



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 1 of 42

TEST REPORT

Application No.: SUCR2505000492AT
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
EUT Description: Smart POS System
Model No.: T6F0A,T6F0B
Trade Mark: SUNMI
FCC ID: 2AH25T6F0A
Standards: 47 CFR Part 2
47 CFR Part 22
47 CFR Part 24
47 CFR Part 27
47 CFR Part 90
Date of Receipt: June 27, 2025
Date of Test: June 28, 2025 to July 2, 2025
Date of Issue: July 2, 2025

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205
Rev.: 01
Page: 2 of 42

Version

Revision Record			
Version	Description	Date	Remark
01	Original	July 2, 2025	/

Authorized for issue by:				
Tested By				
		Hayley Zhang / Project Manager		
Approved By				
		Cloud Peng/Technical Manager		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 3 of 42

Contents

Version	2
1 Test Summary	4
1.1 GSM850/UMTS Band 5/LTE Band 5/26(824~849 MHz)	4
1.2 GSM 1900/UMTS Band 2 /LTE Band 2 /LTE Band 25	5
1.3 UMTS Band 4 /LTE Band 4	6
1.4 LTE Band 7/38/40/41	7
1.5 LTE Band 12/17	8
1.6 LTE Band 13	9
1.7 LTE Band 14	10
1.8 LTE Band 26(814~824 MHz)	12
2 General Information	14
2.1 Details of Client	14
2.2 Test Location	14
2.3 Test Facility	14
2.4 General Description of EUT	15
2.5 Test Mode	16
2.6 Test Environment	16
2.7 Description of Support Units	16
2.8 Technical Specification	17
2.9 Test Frequencies	19
3 Main Test Instruments	28
4 Measurement Uncertainty	29
5 Description of Tests	30
5.1 Field Strength of Spurious Radiation	30
5.2 Test Conditions	40
6 Photographs - Setup Photos	42



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 4 of 42

1 Test Summary

1.1 GSM850/UMTS Band 5/LTE Band 5/26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Appendix	Reference report SUCR250400033705
Peak-Average Ratio	§22.913(d)	Limits ≤ 13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	±2.5ppm.		Reference report SUCR250400033705



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 5 of 42

1.2 GSM 1900/UMTS Band 2 /LTE Band 2 /LTE Band 25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP $\leq$ 2 W	Appendix	Reference report SUCR250400033705
Peak-Average Ratio	§24.232(d)	Limit $\leq$ 13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §24.238(a)	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	$\leq$ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	$\leq$ -13 dBm/1 MHz.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §24.235	Within authorized bands of operation/frequency block.		Reference report SUCR250400033705



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

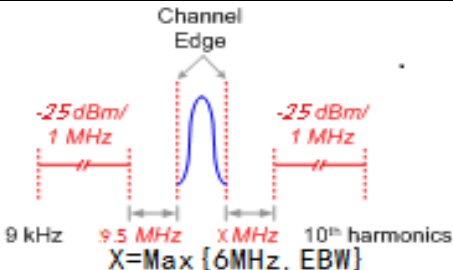
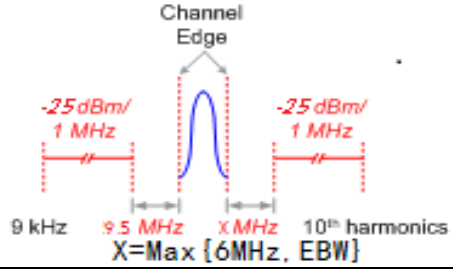
Rev.: 01

Page: 6 of 42

1.3 UMTS Band 4 /LTE Band 4

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	$EIRP \leq 1\text{ W}$	Appendix	Reference report SUCR250400033705
Peak-Average Ratio	§27.50(d)(5)	Limit $\leq 13\text{ dB}$		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(h)	$\leq -13\text{ dBm}/1\%*EBW$, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	$\leq -13\text{ dBm}/1\text{ MHz}$, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.		
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	$\leq -13\text{ dBm}/1\text{ MHz}$.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §27.54	Within authorized bands of operation/frequency block.		Reference report SUCR250400033705

1.4 LTE Band 7/38/40/41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	$EIRP \leq 2W$	Appendix	Reference report SUCR250400033705
Peak-Average Ratio	---	≤ 13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(m)(4)	For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)			Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)			
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §27.54	Within authorized bands of operation/frequency block.		Reference report SUCR250400033705



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 8 of 42

1.5 LTE Band 12/17

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	$ERP \leq 3 \text{ W.}$	Appendix	Reference report SUCR250400033705
Peak-Average Ratio	---	Limit $\leq 13 \text{ dB}$		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(g)	$\leq 43 + 10 \log_{10}(P[\text{Watts}])$		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	$\leq 43 + 10 \log_{10}(P[\text{Watts}])$		
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: $\leq -13 \text{ dBm/100 kHz.}$		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1)(2) §27.54	Within authorized bands of operation/frequency block.		Reference report SUCR250400033705



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 9 of 42

1.6 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Appendix	Reference report SUCR250400033705
Peak-Average Ratio	---	Limit ≤ 13 dB		
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(c)	≤ 43 + 10 log ₁₀ (P[Watts])		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.		Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.		
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1)(2) §27.54	Within authorized bands of operation/frequency block.		Reference report SUCR250400033705



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 10 of 42

1.7 LTE Band 14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §90.542(a)	ERP ≤ 3 W.	Appendix	Reference report SUCR250400033705
Peak-Average Ratio	---	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Emission Mask	§2.1051 §90.210(b)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB..(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.		
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 11 of 42

		factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB.		
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.		
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1)(2) §90.213	Within authorized bands of operation/frequency block.		Reference report SUCR250400033705



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 12 of 42

1.8 LTE Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Appendix B.14	Reference report SUCR250400033705
Peak-Average Ratio	---	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50+10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.		
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		
Field Strength of Spurious Radiation	§2.1053, §90.691	< $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d) (2) §90.213	Within authorized bands of operation/frequency block.		Reference report SUCR250400033705



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 13 of 42

Remark:

This test report (Report No.: SUCR250500049205 issue on 2025/07/02) is based on the original test report (Report No.: SUCR250400033705 issue on 2025/06/14).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report only field strength of spurious radiation were performed based on the worst case of the original report with report number SUCR250400033705 issue on 2025/06/14 and other test data in this report are based on the previous report with report number SUCR250400033705 issue on 2025/06/14.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 14 of 42

2 General Information

2.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, King-p Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 15 of 42

2.4 General Description of EUT

Hardware Version:	V2.1			
Software Version:	P3_AIR-MGL_user_4.1.1_10_20250416			
Power Supply:	DC 3.87V from battery			
Antenna Type:	Internal			
Antenna Gain:	GSM850:	-1.16dBi	GSM1900:	2.79dBi
	WCDMA Band II:	2.79dBi	WCDMA Band IV:	1.66dBi
	WCDMA Band V:	-1.16dBi		
	LTE Band 2:	2.79dBi	LTE Band 4:	1.66dBi
	LTE Band 5:	-1.16dBi	LTE Band 7:	0.78dBi
	LTE Band 12:	1.85dBi	LTE Band 13:	-1.18dBi
	LTE Band 14:	-1.4dBi	LTE Band 17:	1.85dBi
	LTE Band 25:	2.79dBi	LTE Band 26:	-1.16dBi
	LTE Band 30:	0.1dBi	LTE Band 38:	-0.58dBi
	LTE Band 40:	2.03dBi	LTE Band 41:	0.78dBi
	LTE Band 66:	1.66dBi	LTE Band 71:	1.7dBi
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.			
RF Cable:	0.8dB(Below 1GHz)	1.0dB(1.0~2.4GHz)	1.2dB(2.4~3.4GHz)	
	1.5dB(Above 3.4GHz)			
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.				



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 16 of 42

2.5 Test Mode

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EGPRS, 8PSK modulation
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
Remark: The test mode(s) are selected according to relevant radio technology specifications.	

2.6 Test Environment

Environment Parameter	101 kPa Selected Values During Tests	
Relative Humidity	44-46 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~23	4
LTLV	-10	3.6
LTHV	-10	4.4
HTLV	50	3.6
HTHV	50	4.4
Remark:		
NV: Normal Voltage	LV: Low Extreme Test Voltage	HV: High Extreme Test Voltage
NT: Normal Temperature	LT: Low Extreme Test Temperature	HT: High Extreme Test Temperature

2.7 Description of Support Units

The EUT has been tested as an independent unit.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 17 of 42

2.8 Technical Specification

Characteristics	Description				
Radio System Type	☒ GSM	☒ UMTS		☒ LTE	
Supported Frequency Range	Band	TX		RX	
	GSM850	824 to 849 MHz		869 to 894 MHz	
	GSM1900	1850 to 1910 MHz		1930 to 1990 MHz	
	UMTS Band II	1850 to 1910 MHz		1930 to 1990 MHz	
	UMTS Band IV	1710 to 1755 MHz		2110 to 2155 MHz	
	UMTS Band V	824 to 849 MHz		869 to 894 MHz	
	LTE Band 2	1850 to 1910 MHz		1930 to 1990 MHz	
	LTE Band 4	1710 to 1755 MHz		2110 to 2155 MHz	
	LTE Band 5	824 to 849 MHz		869 to 894 MHz	
	LTE Band 7	2500 to 2570 MHz		2620 to 2690 MHz	
	LTE Band 12	699 to 716 MHz		729 to 746 MHz	
	LTE Band 13	777 to 787 MHz		746 to 756 MHz	
	LTE Band 14	788 to 798 MHz		758 to 768 MHz	
	LTE Band 17	704 to 716 MHz		734 to 746 MHz	
	LTE Band 25	1850 to 1915MHz		1930 to 1995 MHz	
	LTE Band 26 (814 to 824 MHz)	814 to 824MHz		859 to 869 MHz	
	LTE Band 26 (824 to 849 MHz)	824 to 849 MHz		869 to 894 MHz	
	LTE Band 30	2305 to 2315 MHz		2350 to 2360 MHz	
	LTE Band 38	2570 to 2620 MHz		2570 to 2620 MHz	
	LTE Band 40 (2305 to 2315MHz)	2305 to 2315MHz		2305 to 2315MHz	
	LTE Band 40 (2350 to 2360MHz)	2350 to 2360MHz		2350 to 2360MHz	
	LTE Band 41	2496 to 2690MHz		2496 to 2690MHz	
	LTE Band 66	1710 to 1780 MHz		2110 to 2200MHz	
	LTE Band 71	663 to 698 MHz		617 to 652 MHz	
Supported Channel Bandwidth	GSM system:	☒ 0.2 MHz			
	UMTS system:	☒ 5 MHz			
	LTE Band 2	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz
		☒ 15 MHz	☒ 20 MHz		
	LTE Band 4	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz
		☒ 15 MHz	☒ 20 MHz		
	LTE Band 5	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205
Rev.: 01
Page: 18 of 42

	LTE Band 7	☒ 5 MHz	☒ 10 MHz	☒ 15 MHz	☒ 20 MHz
	LTE Band 12	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz
	LTE Band 13	☒ 5 MHz	☒ 10 MHz		
	LTE Band 14	☒ 5 MHz	☒ 10 MHz		
	LTE Band 17	☒ 5 MHz	☒ 10 MHz		
	LTE Band 25	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz
		☒ 15 MHz	☒ 20 MHz		
	LTE Band 26(814-824)	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz
	LTE Band 26(824-849)	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz
		☒ 15 MHz			
	LTE Band30	☒ 5 MHz	☒ 10 MHz		
	LTE Band38	☒ 5 MHz	☒ 10 MHz	☒ 15 MHz	☒ 20 MHz
	LTE Band40	☒ 5 MHz	☒ 10 MHz		
	LTE Band41	☒ 5 MHz	☒ 10 MHz	☒ 15 MHz	☒ 20 MHz
	LTE Band66	☒ 1.4 MHz	☒ 3 MHz	☒ 5 MHz	☒ 10 MHz
		☒ 15MHz	☒ 20MHz		
	LTE Band71	☒ 5MHz	☒ 10MHz	☒ 15MHz	☒ 20MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 19 of 42

2.9 Test Frequencies

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM850	TX	Channel 128	Channel 190	Channel 251
		824.2MHz	836.6 MHz	848.8 MHz
	RX	Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM1900	TX	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0 MHz	1909.8 MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA Band II	TX	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA Band IV	TX	Channel 1312	Channel 1413	Channel 1513
		1712.4MHz	1732.6 MHz	1752.6 MHz
	RX	Channel 1537	Channel 1638	Channel 1738
		2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA Band V	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4 MHz	846.6 MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4 MHz	881.4 MHz	891.6 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 20 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 2	1.4MHz	TX	Channel 18607	Channel 18900	Channel 19193
			1850.7 MHz	1880 MHz	1909.3 MHz
		RX	Channel 607	Channel 900	Channel 1193
			1930.7 MHz	1960 MHz	1989.3 MHz
	3MHz	TX	Channel 18615	Channel 18900	Channel 19185
			1851.5 MHz	1880 MHz	1908.5 MHz
		RX	Channel 615	Channel 900	Channel 1185
			1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz	TX	Channel 18625	Channel 18900	Channel 19175
			1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel 1175
			1932.5 MHz	1960 MHz	1987.5 MHz
	10MHz	TX	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
	15MHz	TX	Channel 18675	Channel 18900	Channel 19125
			1857.5 MHz	1880 MHz	1902.5 MHz
		RX	Channel 675	Channel 900	Channel 1125
			1937.5 MHz	1960 MHz	1982.5 MHz
	20MHz	TX	Channel 18700	Channel 18900	Channel 19100
			1860 MHz	1880 MHz	1900 MHz
		RX	Channel 700	Channel 900	Channel 1100
			1940 MHz	1960 MHz	1980 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 21 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 4	1.4MHz	TX	Channel 19957 1710.7 MHz	Channel 20175 1732.5 MHz	Channel 20393 1754.3 MHz
		RX	Channel 1957 2110.7 MHz	Channel 2175 2132.5MHz	Channel 2393 2154.3 MHz
	3MHz	TX	Channel 19965 1711.5 MHz	Channel 20175 1732.5 MHz	Channel 20385 1753.5 MHz
		RX	Channel 1965 2111.5 MHz	Channel 2175 2132.5MHz	Channel 2385 2153.5 MHz
	5MHz	TX	Channel 19975 1712.5 MHz	Channel 20175 1732.5 MHz	Channel 20375 1752.5 MHz
		RX	Channel 1975 2112.5 MHz	Channel 2175 2132.5MHz	Channel 2425 2157.5 MHz
	10MHz	TX	Channel 20000 1715 MHz	Channel 20175 1732.5 MHz	Channel 20350 1750 MHz
		RX	Channel 2000 2115 MHz	Channel 2175 2132.5MHz	Channel 2350 2150 MHz
	15MHz	TX	Channel 20025 1717.5 MHz	Channel 20175 1732.5 MHz	Channel 20325 1747.5 MHz
		RX	Channel 2025 2117.5 MHz	Channel 2175 2132.5MHz	Channel 2325 2147.5 MHz
	20MHz	TX	Channel 20050 1720 MHz	Channel 20175 1732.5 MHz	Channel 20300 1745 MHz
		RX	Channel 2050 2120 MHz	Channel 2175 2132.5MHz	Channel 2300 2145 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 5	1.4MHz	TX	Channel 20407 824.7 MHz	Channel 20525 836.5 MHz	Channel 20643 848.3 MHz
		RX	Channel 2407 869.7 MHz	Channel 2525 881.5 MHz	Channel 2643 893.3 MHz
	3MHz	TX	Channel 20415 825.5 MHz	Channel 20525 836.5 MHz	Channel 20635 847.5 MHz
		RX	Channel 2415 870.5 MHz	Channel 2525 881.5 MHz	Channel 2635 892.5 MHz
	5MHz	TX	Channel 20425 826.5 MHz	Channel 20525 836.5 MHz	Channel 20625 846.5 MHz
		RX	Channel 2425 871.5 MHz	Channel 2525 881.5 MHz	Channel 2625 891.5 MHz
	10MHz	TX	Channel 20450 829 MHz	Channel 20525 836.5 MHz	Channel 20600 844 MHz
		RX	Channel 2450 874 MHz	Channel 2525 881.5 MHz	Channel 2600 889 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 22 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 7	5MHz	TX	Channel 20775	Channel 21100	Channel 21425
			2502.5 MHz	2535 MHz	2567.5 MHz
		RX	Channel 2775	Channel 3100	Channel 5825
			2622.5 MHz	2655 MHz	2687.5 MHz
	10MHz	TX	Channel 20800	Channel 21100	Channel 21400
			2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
			2625 MHz	2655 MHz	2685 MHz
	15MHz	TX	Channel 20825	Channel 21100	Channel 21375
			2507.5 MHz	2535 MHz	2562.5 MHz
		RX	Channel 2825	Channel 3100	Channel 3375
			2627.5 MHz	2655 MHz	2682.5 MHz
	20MHz	TX	Channel 20850	Channel 21100	Channel 21350
			2510 MHz	2535 MHz	2560 MHz
		RX	Channel 2850	Channel 3100	Channel 3350
			2630 MHz	2655 MHz	2680 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 12	1.4MHz	TX	Channel 23017	Channel 23095	Channel 23173
			699.7 MHz	707.5 MHz	715.3 MHz
		RX	Channel 5017	Channel 5095	Channel 5173
			729.7 MHz	737.5 MHz	745.3 MHz
	3MHz	TX	Channel 23025	Channel 23095	Channel 23165
			700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
			730.5 MHz	737.5 MHz	744.5 MHz
	5MHz	TX	Channel 23035	Channel 23095	Channel 23155
			701.5 MHz	707.5 MHz	713.5 MHz
		RX	Channel 5035	Channel 5095	Channel 5155
			731.5 MHz	737.5 MHz	743.5 MHz
	10MHz	TX	Channel 23060	Channel 23095	Channel 23130
			704 MHz	707.5 MHz	711 MHz
		RX	Channel 5060	Channel 5095	Channel 5130
			734 MHz	737.5 MHz	741 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 23 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 13	5MHz	TX	Channel 23205	Channel 23230	Channel 23255
			779.5 MHz	782 MHz	784.5 MHz
		RX	Channel 5205	Channel 5230	Channel 5255
			748.5 MHz	751 MHz	753.5 MHz
	10MHz	TX	Channel 23230	Channel 23230	Channel 23230
		RX	Channel 5230	Channel 5230	Channel 5230
			751 MHz	751 MHz	751 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 14	5MHz	TX	Channel 23305	Channel 23330	Channel 23355
			790.5 MHz	793 MHz	795.5 MHz
		RX	Channel 5305	Channel 5330	Channel 5355
			760.5 MHz	763 MHz	765.5 MHz
	10MHz	TX	Channel 23330	Channel 23330	Channel 23330
		RX	Channel 5330	Channel 5330	Channel 5330
			763MHz	763 MHz	763 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 17	5MHz	TX	Channel 23755	Channel 23790	Channel 23825
			706.5 MHz	710 MHz	713.5 MHz
		RX	Channel 5755	Channel 5790	Channel 5825
			736.5 MHz	740 MHz	743.5 MHz
	10MHz	TX	Channel 23780	Channel 23790	Channel 23800
		RX	Channel 5780	Channel 5790	Channel 5800
			739 MHz	740 MHz	741 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 24 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 25	1.4MHz	TX	Channel 26047	Channel 26365	Channel 26683
			1850.7 MHz	1882.5 MHz	1914.3 MHz
		RX	Channel 8047	Channel 8365	Channel 8683
			1930.7 MHz	1962.5 MHz	1994.3 MHz
	3MHz	TX	Channel 26055	Channel 26365	Channel 26675
			1851.5 MHz	1882.5 MHz	1913.5 MHz
		RX	Channel 8055	Channel 8365	Channel 8675
			1931.5 MHz	1962.5 MHz	1993.5 MHz
	5MHz	TX	Channel 26065	Channel 26365	Channel 26665
			1852.5 MHz	1882.5 MHz	1912.5 MHz
		RX	Channel 8065	Channel 8365	Channel 8665
			1932.5 MHz	1962.5 MHz	1992.5 MHz
	10MHz	TX	Channel 26090	Channel 26365	Channel 26640
			1855 MHz	1882.5 MHz	1910 MHz
		RX	Channel 8090	Channel 8365	Channel 8640
			1935 MHz	1962.5 MHz	1990 MHz
	15MHz	TX	Channel 26115	Channel 26365	Channel 26615
			1857.5 MHz	1882.5 MHz	1907.5 MHz
		RX	Channel 8115	Channel 8365	Channel 8615
			1937.5 MHz	1962.5 MHz	1987.5 MHz
	20MHz	TX	Channel 26140	Channel 26365	Channel 26590
			1860 MHz	1882.5 MHz	1905 MHz
		RX	Channel 8140	Channel 8365	Channel 8590
			1940 MHz	1962.5 MHz	1985 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 25 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 26 (814-824)	1.4MHz	TX	Channel 26697 814.7 MHz	Channel 26740 819 MHz	Channel 26783 823.3 MHz
		RX	Channel 8697 859.7 MHz	Channel 8740 864MHz	Channel 8783 868.3 MHz
	3MHz	TX	Channel 26705 815.5 MHz	Channel 26740 819 MHz	Channel 26775 822.5 MHz
		RX	Channel 8705 860.5 MHz	Channel 8740 864MHz	Channel 8775 867.5 MHz
	5MHz	TX	Channel 26715 816.5 MHz	Channel 26740 819 MHz	Channel 26765 821.5 MHz
		RX	Channel 8715 861.5 MHz	Channel 8740 864MHz	Channel 8765 866.5 MHz
	10MHz	TX	Channel 26740 819 MHz	Channel 26740 819 MHz	Channel 26740 819 MHz
		RX	Channel 8740 864MHz	Channel 8740 864MHz	Channel 8740 864MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band26 (824-849)	1.4MHz	TX	Channel 26797 824.7 MHz	Channel 26915 836.5 MHz	Channel 27033 848.3 MHz
		RX	Channel 8797 869.7 MHz	Channel 8915 881.5 MHz	Channel 9033 893.3 MHz
	3MHz	TX	Channel 26805 825.5 MHz	Channel 26915 836.5 MHz	Channel 27025 847.5 MHz
		RX	Channel 8805 860.5 MHz	Channel 8915 881.5 MHz	Channel 9025 892.5 MHz
	5MHz	TX	Channel 26815 826.5 MHz	Channel 26915 836.5 MHz	Channel 27015 846.5 MHz
		RX	Channel 8815 871.5 MHz	Channel 8915 881.5 MHz	Channel 9015 891.5 MHz
	10MHz	TX	Channel 26840 829 MHz	Channel 26915 836.5 MHz	Channel 26990 844 MHz
		RX	Channel 8840 874 MHz	Channel 8915 881.5 MHz	Channel 8990 889 MHz
	15MHz	TX	Channel 26865 831.5 MHz	Channel 26915 836.5 MHz	Channel 26965 841.5 MHz
		RX	Channel 8865 876.5 MHz	Channel 8915 881.5 MHz	Channel 8965 886.5 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 26 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 30	5MHz	TX	Channel 27685 2307.5 MHz	Channel27710 2310MHz	Channel 27735 2312.5 MHz
		RX	Channel 9795 2352.5MHz	Channel 9820 2355 MHz	Channel 9845 2357.5MHz
	10MHz	TX	Channel 27710 2310 MHz	Channel27710 2310MHz	Channel27710 2310MHz
		RX	Channel 9820 2355 MHz	Channel 9820 2355 MHz	Channel 9820 2355 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 38	5MHz	TX/RX	Channel 37775 2572.5 MHz	Channel38000 2595 MHz	Channel 38225 2617.5 MHz
			Channel 37800 2575 MHz	Channel38000 2595 MHz	Channel 38200 2615 MHz
	10MHz	TX/RX	Channel 37800 2575 MHz	Channel38000 2595 MHz	Channel 38200 2615 MHz
			Channel 37825 2577.5 MHz	Channel38000 2595 MHz	Channel 38175 2612.5 MHz
	15MHz	TX/RX	Channel 37825 2577.5 MHz	Channel38000 2595 MHz	Channel 38175 2612.5 MHz
			Channel 37850 2580 MHz	Channel38000 2595 MHz	Channel 38150 2610 MHz
	20MHz	TX/RX	Channel 37850 2580 MHz	Channel38000 2595 MHz	Channel 38150 2610 MHz
			Channel 37850 2580 MHz	Channel38000 2595 MHz	Channel 38150 2610 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 40 (2305-2315)	5MHz	TX/RX	2307.5MHz	2310.0 MHz	2312.5 MHz
			/	2310.0 MHz	

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 40 (2350-2360)	5MHz	TX/RX	2352.5MHz	2355.0 MHz	2357.5 MHz
			/	2355.0 MHz	

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 41 (2496-2690)	5MHz	TX / RX	Channel 39675 2498.5 MHz	Channel40620 2593 MHz	Channel 41565 2687.5 MHz
			Channel 39700 2501 MHz	Channel40620 2593 MHz	Channel 41540 2685 MHz
	10MHz	TX / RX	Channel 39700 2501 MHz	Channel40620 2593 MHz	Channel 41540 2685 MHz
			Channel 39725 2503.5 MHz	Channel40620 2593 MHz	Channel 41515 2682.5 MHz
	15MHz	TX / RX	Channel 39725 2503.5 MHz	Channel40620 2593 MHz	Channel 41515 2682.5 MHz
			Channel 39750 2506 MHz	Channel40620 2593 MHz	Channel 41490 2680 MHz
	20MHz	TX / RX	Channel 39750 2506 MHz	Channel40620 2593 MHz	Channel 41490 2680 MHz
			Channel 39750 2506 MHz	Channel40620 2593 MHz	Channel 41490 2680 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 27 of 42

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band66	1.4MHz	TX	Channel 131979	Channel 132322	Channel 132665
			1710.7 MHz	1745 MHz	1779.3 MHz
		RX	Channel 66443	Channel 66786	Channel 67329
			2110.7 MHz	2145MHz	2199.3 MHz
	3MHz	TX	Channel 131987	Channel 132322	Channel 132657
			1711.5 MHz	1745 MHz	1778.5MHz
		RX	Channel 66451	Channel 66786	Channel 67321
			2111.5 MHz	2145MHz	2198.5MHz
	5MHz	TX	Channel 131997	Channel 132322	Channel 132647
			1712.5 MHz	1745 MHz	1777.5 MHz
		RX	Channel 66461	Channel 66786	Channel 67311
			2112.5 MHz	2145MHz	2197.5 MHz
	10MHz	TX	Channel 132022	Channel 132322	Channel 132622
			1715 MHz	1745 MHz	1775 MHz
		RX	Channel 66486	Channel 66786	Channel 67286
			2115 MHz	2145MHz	2195 MHz
	15MHz	TX	Channel 132047	Channel 132322	Channel 132597
			1717.5 MHz	1745 MHz	1772.5 MHz
		RX	Channel 66511	Channel 66786	Channel 67261
			2117.5 MHz	2145MHz	2192.5 MHz
	20MHz	TX	Channel 132072	Channel 132322	Channel 132572
			1720 MHz	1745 MHz	1770 MHz
		RX	Channel 66536	Channel 66786	Channel 67236
			2120 MHz	2145MHz	2190 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band71	5MHz	TX	Channel 133147	Channel 133297	Channel 133447
			665.5 MHz	680.5 MHz	695.5 MHz
		RX	Channel 68611	Channel 68761	Channel 68911
			619.5 MHz	634.5 MHz	649.5 MHz
	10MHz	TX	Channel 133172	Channel 133297	Channel 133422
			668 MHz	680.5 MHz	693 MHz
		RX	Channel 68636	Channel 68761	Channel 68886
			622 MHz	634.5 MHz	647 MHz
	15MHz	TX	Channel 133197	Channel 133297	Channel 133397
			670.5 MHz	680.5 MHz	690.5 MHz
		RX	Channel 68661	Channel 68761	Channel 68861
			624.5 MHz	634.5 MHz	644.5 MHz
	20MHz	TX	Channel 133222	Channel 133297	Channel 133372
			673 MHz	680.5 MHz	688 MHz
		RX	Channel 68686	Channel 68761	Channel 68836
			627 MHz	634.5 MHz	642 MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 28 of 42

3 Main Test Instruments

9*6*6 Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/21/2024	11/20/2025
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	8/22/2024	8/21/2026
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	5/7/2025	5/6/2027
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/16/2025	1/15/2026
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/16/2025	1/15/2026
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	9/10/2024	9/9/2025
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR

Remark: NCR=No Calibration Requirement.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 29 of 42

4 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.54\text{dB}$
2	RF power density, conducted	$\pm 1.03\text{dB}$
3	Spurious emissions, conducted	$\pm 0.54\text{dB}$
4	Radio Frequency	$\pm 7.25 \times 10^{-8}$
5	Duty Cycle	$\pm 0.37\%$
6	Occupied Bandwidth	1%
7	Radiated Emission	$\pm 3.13\text{dB}$ (9k -30MHz)
		$\pm 4.8\text{dB}$ (30M -1GHz)
		$\pm 4.8\text{dB}$ (1GHz to 18GHz)
		$\pm 4.80\text{dB}$ (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 30 of 42

5 Description of Tests

5.1 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

$$E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + (\text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{AMP(dB)})$$

$$\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20 \log D - 104.8; \text{ where D is the measurement distance in meters}$$

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:
$$E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + (\text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{AMP(dB)})$$
$$\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20 \log D - 104.8; \text{ where D is the measurement distance in meters}$$
- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by $20 \cdot \log(3/1) = 9.54 \text{ dB}$.

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 31 of 42

GSM 1900_Low

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3700.4	57.75	-48.51	28.82	-57.20	-13.00	44.20	Horizontal
2	5550.6	50.02	-47.66	32.62	-60.28	-13.00	47.28	Horizontal
3	7400.8	49.00	-46.17	36.22	-56.21	-13.00	43.21	Horizontal
4	9251	46.68	-43.20	37.75	-54.03	-13.00	41.03	Horizontal
5	11101.2	48.05	-40.36	39.49	-48.08	-13.00	35.08	Horizontal
6	12951.4	48.85	-39.41	38.83	-46.99	-13.00	33.99	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3700.4	58.16	-48.51	28.82	-56.79	-13.00	43.79	Vertical
2	5550.6	50.11	-47.66	32.62	-60.19	-13.00	47.19	Vertical
3	7400.8	49.43	-46.17	36.22	-55.78	-13.00	42.78	Vertical
4	9251	47.15	-43.20	37.75	-53.56	-13.00	40.56	Vertical
5	11101.2	47.06	-40.36	39.49	-49.07	-13.00	36.07	Vertical
6	12951.4	49.45	-39.41	38.83	-46.39	-13.00	33.39	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 32 of 42

GSM 1900_Mid

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3760	58.21	-48.31	28.92	-56.44	-13.00	43.44	Horizontal
2	5640	50.97	-47.62	32.66	-59.25	-13.00	46.25	Horizontal
3	7520	49.13	-45.85	36.40	-55.58	-13.00	42.58	Horizontal
4	9400	47.41	-43.05	37.96	-52.94	-13.00	39.94	Horizontal
5	11280	47.45	-40.44	39.47	-48.77	-13.00	35.77	Horizontal
6	13160	49.10	-38.58	39.04	-45.70	-13.00	32.70	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3760	49.28	-48.31	28.92	-65.37	-13.00	52.37	Vertical
2	5640	50.79	-47.62	32.66	-59.43	-13.00	46.43	Vertical
3	7520	49.77	-45.85	36.40	-54.94	-13.00	41.94	Vertical
4	9400	48.41	-43.05	37.96	-51.94	-13.00	38.94	Vertical
5	11280	47.51	-40.44	39.47	-48.71	-13.00	35.71	Vertical
6	13160	48.90	-38.58	39.04	-45.90	-13.00	32.90	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 33 of 42

GSM 1900_High

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3819.6	58.88	-48.20	29.01	-55.57	-13.00	42.57	Horizontal
2	5729.4	50.92	-47.54	32.69	-59.19	-13.00	46.19	Horizontal
3	7639.2	48.65	-44.82	36.37	-55.06	-13.00	42.06	Horizontal
4	9549	48.10	-42.31	38.17	-51.30	-13.00	38.30	Horizontal
5	11458.8	49.34	-40.07	39.45	-46.53	-13.00	33.53	Horizontal
6	13368.6	48.27	-39.15	39.35	-46.78	-13.00	33.78	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3819.6	58.22	-48.20	29.01	-56.23	-13.00	43.23	Vertical
2	5729.4	50.54	-47.54	32.69	-59.57	-13.00	46.57	Vertical
3	7639.2	49.49	-44.82	36.37	-54.22	-13.00	41.22	Vertical
4	9549	47.96	-42.31	38.17	-51.44	-13.00	38.44	Vertical
5	11458.8	49.07	-40.07	39.45	-46.80	-13.00	33.80	Vertical
6	13368.6	48.26	-39.15	39.35	-46.79	-13.00	33.79	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 34 of 42

WCDMA Band II_Low

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3704.8	49.71	-48.49	28.83	-65.22	-13.00	52.22	Horizontal
2	5557.2	50.82	-47.66	32.62	-59.48	-13.00	46.48	Horizontal
3	7409.6	55.41	-46.17	36.24	-49.78	-13.00	36.78	Horizontal
4	9262	51.77	-43.13	37.77	-48.85	-13.00	35.85	Horizontal
5	11114.4	47.67	-40.36	39.49	-48.46	-13.00	35.46	Horizontal
6	12966.8	48.80	-39.40	38.82	-47.04	-13.00	34.04	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3703.5	52.69	-48.50	28.83	-62.24	-13.00	49.24	Vertical
2	5557.2	51.99	-47.66	32.62	-58.31	-13.00	45.31	Vertical
3	7409.6	56.46	-46.17	36.24	-48.73	-13.00	35.73	Vertical
4	9262	55.95	-43.13	37.77	-44.67	-13.00	31.67	Vertical
5	11114.4	46.79	-40.36	39.49	-49.34	-13.00	36.34	Vertical
6	12966.8	49.18	-39.40	38.82	-46.66	-13.00	33.66	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 35 of 42

WCDMA Band II_Mid

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3760	49.88	-48.31	28.92	-64.77	-13.00	51.77	Horizontal
2	5640	52.36	-47.62	32.66	-57.86	-13.00	44.86	Horizontal
3	7520	54.28	-45.85	36.40	-50.43	-13.00	37.43	Horizontal
4	9400	51.48	-43.05	37.96	-48.87	-13.00	35.87	Horizontal
5	11280	47.44	-40.44	39.47	-48.78	-13.00	35.78	Horizontal
6	13160	49.33	-38.58	39.04	-45.47	-13.00	32.47	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3760	49.47	-48.31	28.92	-65.18	-13.00	52.18	Vertical
2	5640	50.99	-47.62	32.66	-59.23	-13.00	46.23	Vertical
3	7520	54.84	-45.85	36.40	-49.87	-13.00	36.87	Vertical
4	9400	54.83	-43.05	37.96	-45.52	-13.00	32.52	Vertical
5	11280	47.23	-40.44	39.47	-48.99	-13.00	35.99	Vertical
6	13160	48.76	-38.58	39.04	-46.04	-13.00	33.04	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 36 of 42

WCDMA Band II_High

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3815.2	49.58	-48.20	29.00	-64.87	-13.00	51.87	Horizontal
2	5722.8	51.86	-47.53	32.69	-58.24	-13.00	45.24	Horizontal
3	7630	53.00	-44.77	36.37	-50.65	-13.00	37.65	Horizontal
4	9538	48.90	-42.32	38.15	-50.53	-13.00	37.53	Horizontal
5	11445.6	49.17	-40.07	39.46	-46.71	-13.00	33.71	Horizontal
6	13353.2	48.52	-39.13	39.33	-46.54	-13.00	33.54	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	3815.2	50.10	-48.20	29.00	-64.35	-13.00	51.35	Vertical
2	5722.8	52.02	-47.53	32.69	-58.08	-13.00	45.08	Vertical
3	7630	53.73	-44.77	36.37	-49.92	-13.00	36.92	Vertical
4	9538	53.34	-42.32	38.15	-46.09	-13.00	33.09	Vertical
5	11445.6	48.64	-40.07	39.46	-47.24	-13.00	34.24	Vertical
6	13353.2	48.17	-39.13	39.33	-46.89	-13.00	33.89	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 37 of 42

LTE Band 41 2500-2690_Low

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	5002.18	50.44	-48.01	31.21	-61.62	-25.00	36.62	Horizontal
2	7503.27	49.28	-46.11	36.40	-55.69	-25.00	30.69	Horizontal
3	10004.36	48.11	-41.71	38.80	-50.05	-25.00	25.05	Horizontal
4	12505.45	49.78	-39.84	39.10	-46.22	-25.00	21.22	Horizontal
5	15006.54	49.96	-38.03	40.19	-43.14	-25.00	18.14	Horizontal
6	17507.63	50.75	-36.82	41.85	-39.48	-25.00	14.48	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	5002.18	50.34	-48.01	31.21	-61.72	-25.00	36.72	Vertical
2	7503.27	49.50	-46.11	36.40	-55.47	-25.00	30.47	Vertical
3	10004.36	48.33	-41.71	38.80	-49.83	-25.00	24.83	Vertical
4	12505.45	49.55	-39.84	39.10	-46.45	-25.00	21.45	Vertical
5	15006.54	49.47	-38.03	40.19	-43.63	-25.00	18.63	Vertical
6	17507.63	51.27	-36.82	41.85	-38.96	-25.00	13.96	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 38 of 42

LTE Band 41 2500-2690_Mid

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	5172.18	51.97	-47.87	31.68	-59.48	-25.00	34.48	Horizontal
2	7758.27	49.17	-45.03	36.35	-54.78	-25.00	29.78	Horizontal
3	10344.36	48.36	-41.19	39.04	-49.05	-25.00	24.05	Horizontal
4	12930.45	50.24	-39.42	38.84	-45.60	-25.00	20.60	Horizontal
5	15516.54	51.65	-37.99	39.27	-42.33	-25.00	17.33	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	5172.18	51.85	-47.87	31.68	-59.60	-25.00	34.60	Vertical
2	7758.27	48.68	-45.03	36.35	-55.27	-25.00	30.27	Vertical
3	10344.36	48.16	-41.19	39.04	-49.25	-25.00	24.25	Vertical
4	12930.45	49.17	-39.42	38.84	-46.67	-25.00	21.67	Vertical
5	15516.54	51.85	-37.99	39.27	-42.13	-25.00	17.13	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 39 of 42

LTE Band 41 2500-2690_High

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	5342.18	50.10	-47.75	32.16	-60.76	-25.00	35.76	Horizontal
2	8013.27	49.19	-44.36	36.31	-54.12	-25.00	29.12	Horizontal
3	10684.36	49.23	-41.05	39.28	-47.80	-25.00	22.80	Horizontal
4	13355.45	49.21	-39.13	39.33	-45.85	-25.00	20.85	Horizontal
5	16026.54	51.80	-37.95	38.41	-43.00	-25.00	18.00	Horizontal

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF[dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity
1	5342.18	50.10	-47.75	32.16	-60.76	-25.00	35.76	Vertical
2	8013.27	49.40	-44.36	36.31	-53.91	-25.00	28.91	Vertical
3	10684.36	47.97	-41.05	39.28	-49.06	-25.00	24.06	Vertical
4	13355.45	49.19	-39.13	39.33	-45.87	-25.00	20.87	Vertical
5	16026.54	52.12	-37.95	38.41	-42.68	-25.00	17.68	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 40 of 42

5.2 Test Conditions

Transmit Output Power Data - Average Power, Spectral Density	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2;
Peak-to-Average Ratio	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2;
Bandwidth - Occupied Bandwidth	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2;
Bandwidth - Emission Bandwidth	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2;
Band Edges Compliance	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, H (L= low channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;
Spurious Emission at Antenna Terminals	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 41 of 42

Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;
Field Strength of Spurious Radiation	
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 2
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1; UMTS/TM1; LTE/TM1; Remark: All bandwidth and modulation of GSM/ UMTS/LTE have been pre tested, and only the worst results are reflected in the report.
Frequency Stability	
Test Case	Test Conditions
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.
Test Setup	Test Setup 3
RF Channels (TX)	M (M= middle channel)
Test Mode	GSM/TM1;UMTS/TM1; LTE/TM1 The report only show the bandwidth with the worst case.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049205

Rev.: 01

Page: 42 of 42

6 Photographs - Setup Photos

Refer to Appendix A.4 - WWAN Setup Photos.

---End of Report---