



TEST REPORT

REPORT NUMBER: 25B02W000010-008

ON

Type of Equipment: Handheld Wireless Terminal

Type of Designation: T8F1C

Brand Name: SUNMI

Manufacturer: Shanghai Sunmi Technology Co.,Ltd.

FCC ID: 2AH25T8F1C

IC: 22621-T8F1C

ACCORDING TO

FCC Part 15E, FCC Part 2, ANSI C63.10-2013, RSS-Gen Issue 5, RSS-247 Issue 3

Chongqing Academy of Information and Communications Technology

Month date, year

August 14, 2025

Signature



Zhou Jin

Director

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of Chongqing Academy of Information and Communications Technology.

Revision Version

Report Number	Revision	Date
25B02W000010-008	00	2025-08-14

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

CONTENTS

1. Test Laboratory	5
1.1. Testing Location.....	5
1.2. Testing Environment.....	5
1.3. Project data	5
1.4. Signature	5
2. Client Information.....	6
2.1. Applicant Information.....	6
2.2. Manufacturer Information.....	6
3. Equipment under Test (EUT) and Ancillary Equipment (AE)	7
3.1. About EUT	7
3.2. Internal Identification of EUT used during the test.....	7
3.3. Outline of Equipment under Test	8
3.4. Internal Identification of AE used during the test	8
3.5. EUT Test RF Configuration	8
4. Reference Documents	10
4.1. Documents supplied by applicant	10
4.2. Reference Documents for testing.....	10
5. Test Equipments Utilized	11
5.1. RF Test System	11
5.2. RSE Test System.....	11
5.3. Climate Chamber	12
5.4. Anechoic chamber Vibration table	12
5.5. Test software	12
6. Test Results	12
6.1. Summary of Test Results	13
6.2. Duty cycle	15
6.3. 26dB Occupied Bandwidth.....	17

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.4. Maximum conducted output power	20
6.5. Band Edges Compliance	23
6.6. Transmitter Spurious Emission	30
6.7. AC Powerline Conducted Emission.....	46
ANNEX A EUT Photos	49
ANNEX B Deviations from Prescribed Test Methods.....	50

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

1. Test Laboratory

1.1. Testing Location

Name:	Chongqing Academy of Information and Communications Technology
Designation Number:	CN1239
IC Registration Number:	29397
Address:	No.19 EastRoad,Xiantao Big-data Valley,Yubei District,Chongqing,People's Republic of China
Postal Code:	401336
Telephone:	0086-23-88069965
Fax:	0086-23-88608777


1.2. Testing Environment

Normal Temperature:	15-35°C
Relative Humidity:	30-60%RH

1.3. Project data

Testing Start Date:	2025-06-03
Testing End Date:	2025-06-21

1.4. Signature



2025-08-14

Dong Junxin
(Prepared this test report)



Date

2025-08-14

Wang Lili
(Reviewed this test report)



Date

2025-08-14

Zhou Jin
Director of the laboratory
(Approved this test report)

Date

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

2. Client Information

2.1. Applicant Information

Company Name:	Shanghai Sunmi Technology Co.,Ltd.
Address /Post:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
City:	Shanghai
Country:	China
Telephone:	8618501703215
Fax:	N/A
Email:	fang.lu@sunmi.com
Contact Person:	Fang Lu

2.2. Manufacturer Information

Company Name:	Shanghai Sunmi Technology Co.,Ltd.
Address /Post:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
City:	Shanghai
Country:	China
Telephone:	8618501703215
Fax:	N/A
Email:	fang.lu@sunmi.com
Contact Person:	Fang Lu

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Handheld Wireless Terminal
Model name	T8F1C
Brand name	SUNMI
WLAN Frequency Band	Wi-Fi 5G U-NII-3:802.11a/n/ac
Type of WLAN modulation	OFDM
Extreme Temperature	-20/+55°C
Nominal Test Voltage	3.87V
Extreme Test High Voltage	4.45V
Extreme Test Low Voltage	3.6V

Note1: Photographs of EUT are shown in ANNEX A of this test report.

Note2: High and low voltage values in extreme condition test are given by manufacturer.

Note3: The Extreme Temperature is provided by the manufacturer and has not been verified by the laboratory.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
25B02W000010#S1	IMEI:862072070057563;862072070057571	V00	4.0.0	2025-05-23
25B02W000010#S4	IMEI:862072070057688;862072070057696	V00	4.0.0	2025-05-23

*EUT ID: is used to identify the test sample in the lab internally.

No.	Item(s)	Data
1	Antenna gain of EUT	1.99 dBi

Note: The data of antenna gain is provided by the Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

3.3. Outline of Equipment under Test

Technology	Band	UL Freq.(MHz)	DL Freq.(MHz)
WLAN	5G	UNII 3: 5725MHz-5850MHz	

Test frequency list:

UNII-3:

BW_20M	Channel	149	153	157	161	165
	Freq. (MHz)	5745	5765	5785	5805	5825
BW_40M	Channel	151		159		
	Freq. (MHz)	5755		5795		
BW_80M	Channel		155			
	Freq. (MHz)		5775			

Note: "/" Represents empty

Note: This report is for WLAN UNII-3 only.

3.4. Internal Identification of AE used during the test

AE ID*	Description	Note	dB*
C1	USB Cable	SSM-A033A	--
A1	Adapter	TPA-141A050200UU01	--
A2	Adapter	UC13US	--
A3	Adapter	TPA-10120150UU	--
B1	Battery	GYPA	--
AE1	RF cable	--	1.3

AE ID*: is used to identify the test sample in the lab internally.


dB*: is provided customer.

3.5. EUT Test RF Configuration

EUT uses engineering mode to control RF emissions, changing power levels, channels, rates, and HT.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

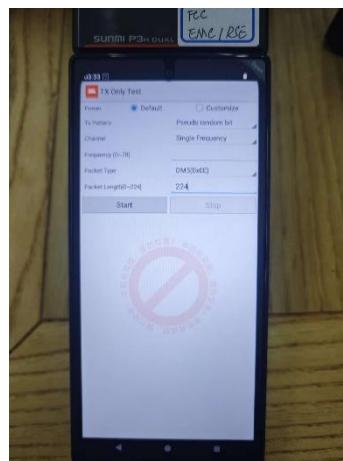

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

4. Reference Documents

4.1. Documents supplied by applicant

PICS/PIXIT, referring to Annex B for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15E	FCC CFR 47, Part 15, Subpart E: Unlicensed National Information Infrastructure Devices	--
FCC Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations	--
ANSI 63.10	Methods Of Measurement Of Radio-Noise Emissions From Low-Voltage Electrical And Electronic Equipment In The Range Of 9 KHz To 40 GHz	2013
KDB 789033 D02	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-Nii) Devices (Part 15, Subpart E)	v02r01
RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021
RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2023

Note: FCC Part 2 and KDB 789033 D02 is not A2LA certified.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

5. Test Equipments Utilized

5.1. RF Test System

No .	Equipme nt	Model	SN	HW Versio n	SW Versio n	Manufac ture	Cal. Interva l	Cal.Due Date
1	Spectrum analyzer	FSQ 26	201137	--	--	R&S	1 Year	2026-06-15

5.2. RSE Test System

No .	Equipmen t	Model	SN	HW Versio n	SW Versio n	Manufact ure	Cal. Interva l	Cal.Due Date
1	EMI Test Receiver	ESU40	100307	--	--	R&S	1 Year	2025-06-28
2	TRILOG Broadband Antenna	VULB916 3	9163- 586	--	--	Schwarzbec k	2 Years	2026-10-28
3	Horn antenna	9120D	1083	--	--	Schwarzbec k	2 Years	2026-11-08
4	Horn antenna	DATE 1152	LM712 7	--	--	ETS	2 Years	2026-09-30
5	Horn antenna	DATE 1012	LM594 5	--	--	ETS	2 Years	2026-09-30
6	Loop Antenna	6502	002132 56	--	--	ETS	1 Year	2026-09-04
7	Amplifier1	SCU-08F1	832002 7	--	--	R&S	--	--
8	Amplifier2	SCU-18F	180093	--	--	R&S	--	--
9	2-Line V-Network	ENV216	102368	--	--	R&S	1 Year	2026-05-23
10	Test Receiver	ESR 3	101382	03	3.48 SP2	R&S	1 Year	2025-06-28
11	Test Receiver	ESW 26	101382	00	1.50 SP1	R&S	1 Year	2025-06-28

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

5.3. Climate Chamber

No.	Name	Type	SN	Manufacture	Cal. Interval	Cal.Due Date
--	--	--	--	--	--	--

5.4. Anechoic chamber Vibration table

No.	Name	Type	SN	Manufacture	Cal. Interval	Cal.Due Date
1	Fully-Anechoic Chamber	FAC5	--	TDK	3 Years	2027-11-04
2	Anechoic Chamber	SAC 10	--	TDK	3 Years	2027-11-05

5.5. Test software

No.	Name	version	SN	Manufacture
1	EMC32 (Transmitter Spurious Emission-Radiated Above 1GHz)	V9.26.01	--	R&S
2	EMC32 (Transmitter Spurious Emission-Radiated Below 1GHz)	V 10.20.01	--	R&S
3	EMC32 (AC Powerline Conducted Emission)	V 10.40.10	--	R&S
4	WIFI/BT CE/FCC/IC automated testing software	V1.0.0.0	--	Beijing Zhiwang Xince Technology Co., Ltd

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6. Test Results

6.1. Summary of Test Results

A brief summary of the tests carried out is shown as following.

FCC Rules	IC Rules	Name of Test	Result
	KDB 789033 D02	Duty cycle	Pass ^{Note4}
15.407(a)	RSS-247 6.2.4.2	Maximum Output Power	Pass ^{Note4}
15.407(a)	RSS-247 6.2.4.2	Power Spectral Density	Pass ^{Note3}
15.407(e)	RSS-247 6.2.4.2	26dB Occupied Bandwidth	Pass ^{Note4}
2.1049	RSS-GEN 6.7	99% Occupied Bandwidth	Pass ^{Note3}
15.407(b)	RSS-247 6.2.4.3	Band edge compliance	Pass
15.407/15.205/15.209	RSS-247 6.2, RSS-Gen 8.9,8.10	Transmitter Spurious Emission - Radiated	Pass
15.207	RSS-GEN 8.8	AC Powerline Conducted Emission	Pass
15.407(g)	RSS-GEN 8.11	Frequency Stability	N/A
15.203	RSS Gen 6.8, RSS-247 5.4	Antenna requirement	Pass ^{Note2}

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

NOTE 1:

The T8F1C, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a variant product for testing. This project is a variant project based on the original report 24T04I300217-066-V1 issued by 3in with below changes:

- Added RFID function.
- Modified 2/3/4G Div Antenna and WIFI Antenna. Remove 1 NFC, Add RFID Antenna.
- PCB Changes,
- Removed: 8 Pin in behind .
- Mechanical shell changes.

Type of Service	Model Name	Super capacitor	pogopin	NFC	RFID
Original	T8F1B	Yes	8 Pin in behind &6 pin in bottom	Two-sided	No
Variant	T8F1C	No	6 Pin in bottom	Under screen	Yes

According to the Product Change Description, we tested radiated spurious emission and the worst mode of Output Power in the original report, and the test data was recorded in the report.

NOTE 2:

5.8G RLAN used an Internal antenna with max Gain 1.99 dBi that complied with 15.203 Requirements.

NOTE 3:

The test verdict of this item come from the original report.

NOTE 4:

The test data in this report is validation data for the worst mode.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.2. Duty cycle

Specifications:	KDB 789033 D02
DUT Serial Number:	IMEI:862072070057563;862072070057571
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	--

Measurement Uncertainty:

Measurement Uncertainty	--
-------------------------	----

Test Procedure:

The measurement method is made according to KDB 789033 B

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission, Set RBW > EBW if possible; otherwise, set RBW to the largest available value. Set VBW > RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T < 16.7 microseconds.)


Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Measurement Results:

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5745	1.39	1.43	97.20
11A	Ant1	5785	1.39	1.42	97.89
11A	Ant1	5825	1.40	1.43	97.90

Test Graphs

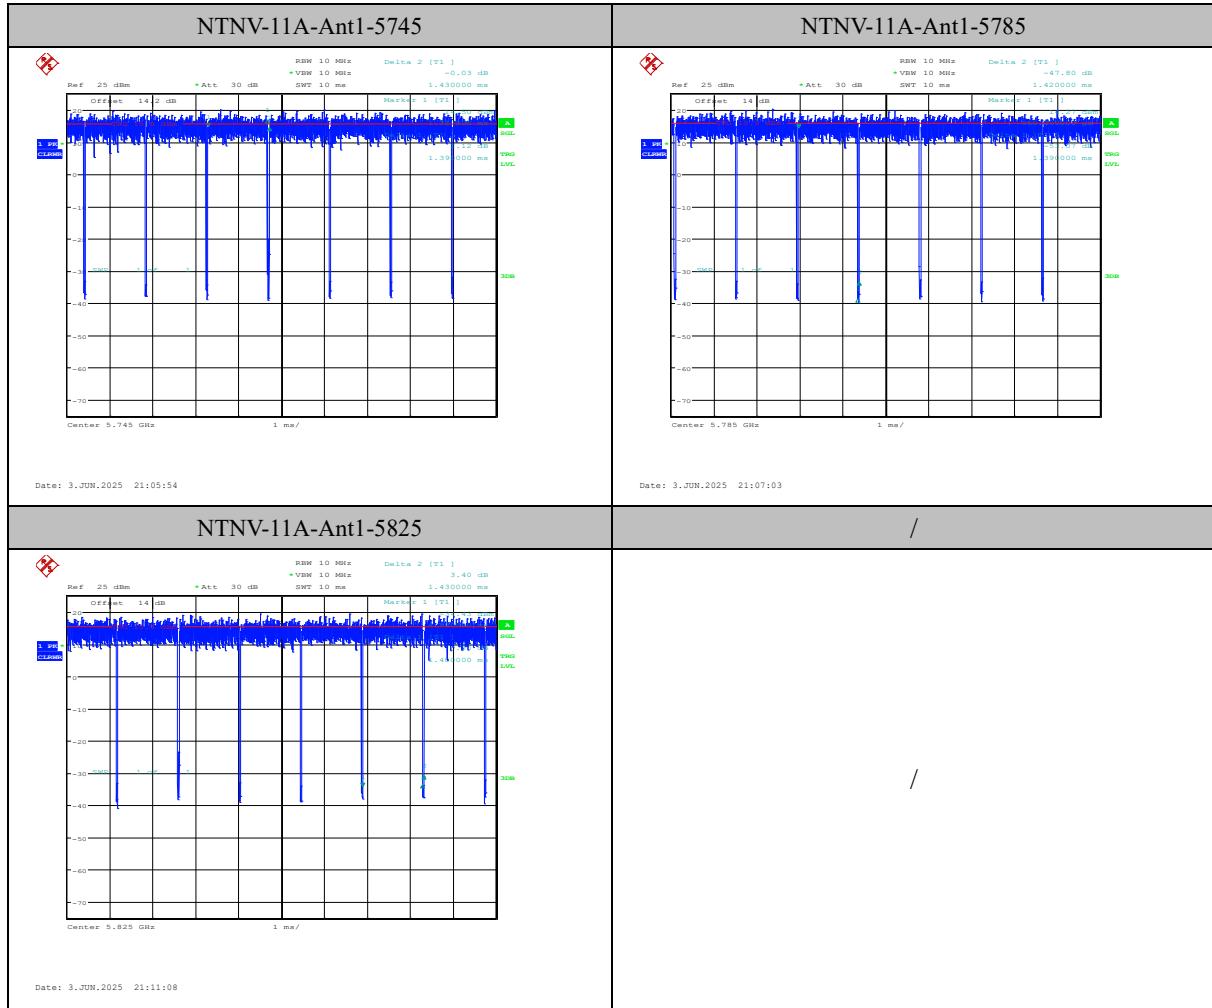

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.3. 26dB Occupied Bandwidth

Specifications:	FCC Part 15.407(e), RSS-247 6.2.4.2
DUT Serial Number:	IMEI:862072070057563;862072070057571
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	--

Measurement Uncertainty:

Measurement Uncertainty	29kHz
-------------------------	-------

Test Procedure:

The measurement is made according to KDB 789033 C


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW= 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 26dB relative to the maximum level measured in the fundamental emission.


Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver maybe employed if it implements the functionality described above.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

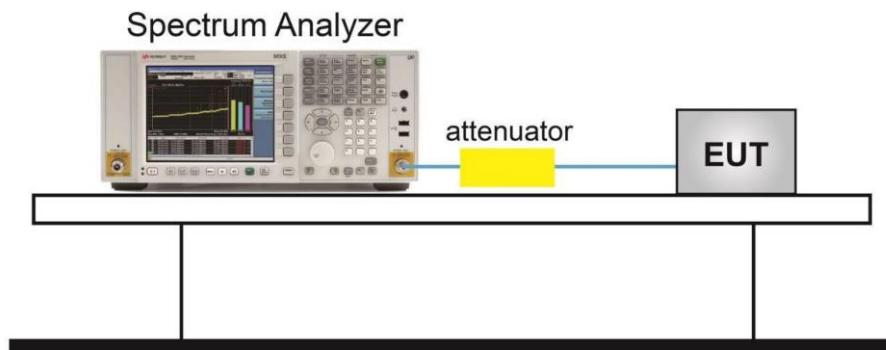Test Setup:

Measurement Result:

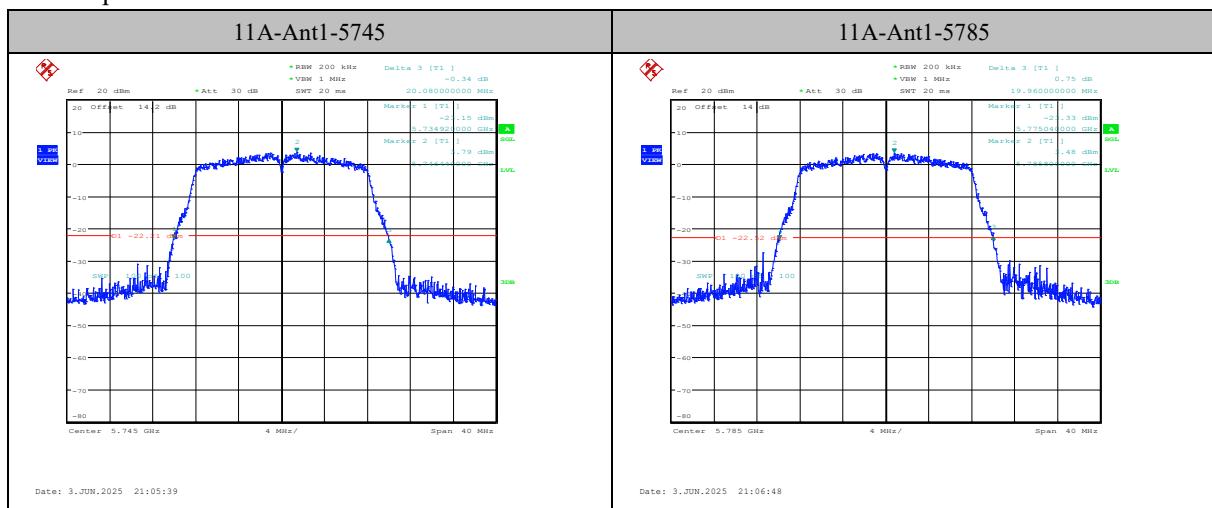
TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5745	20.08	5734.92	5755.00
11A	Ant1	5785	19.96	5775.04	5795.00
11A	Ant1	5825	19.88	5815.08	5834.96

Test Graphs


Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

FAX: 0086-23-88608777

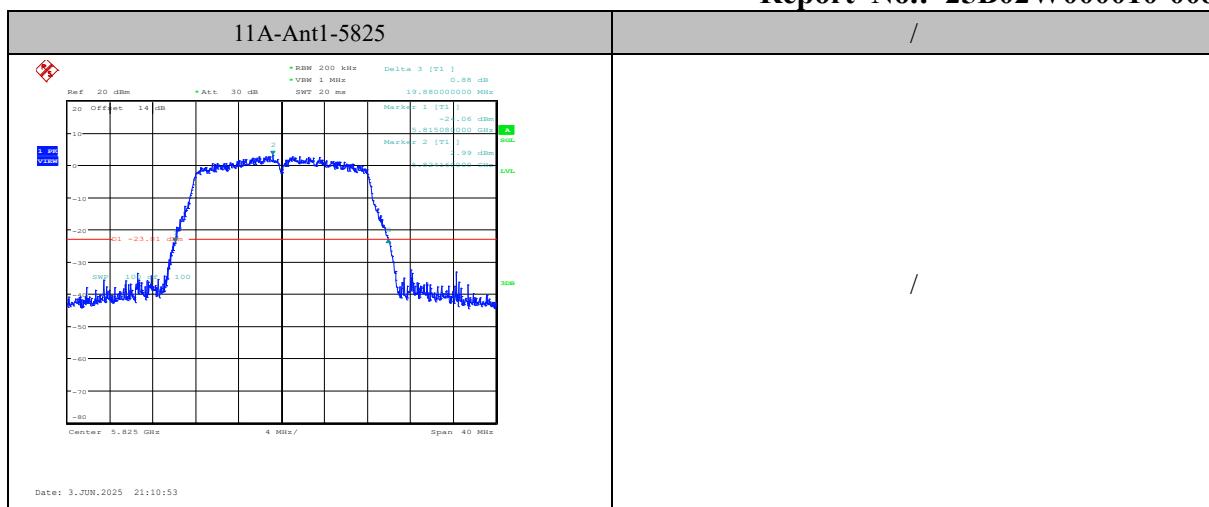

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.4. Maximum conducted output power

Specifications:	FCC Part 15.407 (a), RSS-247 6.2.4.2
DUT Serial Number:	IMEI:862072070057563;862072070057571
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

Standard	Limit (dBm)
FCC Part 15.407 (a)	< 30
RSS-247 6.2.4.2	< 30

Measurement Uncertainty:

Measurement Uncertainty	0.38dB
-------------------------	--------

Test Procedure:

The measurement method SA-2 is made according to KDB 789033 E

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. Measure the duty cycle, x, of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
3. Set RBW = 1 MHz. (iv) Set VBW \geq 3 MHz.
4. Number of points in sweep $\geq 2 \times$ span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
5. Sweep time = auto.
6. Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
9. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.


10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is 25%

Antenna gain of EUT:

No.	Item(s)	Data
1	Antenna gain of EUT	1.99dBi

Note: The data of antenna gain is provided by the Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

Test setup

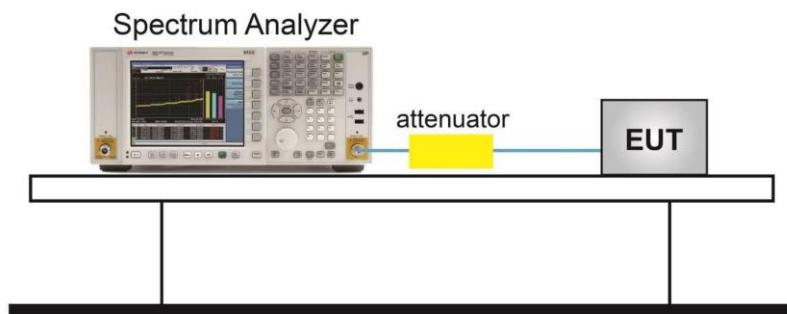

Measurement Results:

Test Mode	Antenn a	Frequency[MH z]	Set Powe r	Chann el Power [dBm]	Duty Cycl e [%]	DC Facto r [dBm]	Resul t [dBm]	Limit [dBm]	Gai n [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdi ct
11A	Ant1	5745	17	14.52	97.2 0	0.12	14.64	≤ 30.0 0	1.99	16.63	---	PASS
11A	Ant1	5785	17	14.38	97.8 9	0.09	14.47	≤ 30.0 0	1.99	16.46	---	PASS
11A	Ant1	5825	17	13.99	97.9 0	0.09	14.08	≤ 30.0 0	1.99	16.07	---	PASS


Note:

1.The Duty Cycle Factor is compensated in the graph.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

2. In the graph, the Center frequency = (Low frequency of 26dB OBW + High frequency of 26dB OBW) /2.
 3. The 11a data rate 6Mbps is selected as worse condition

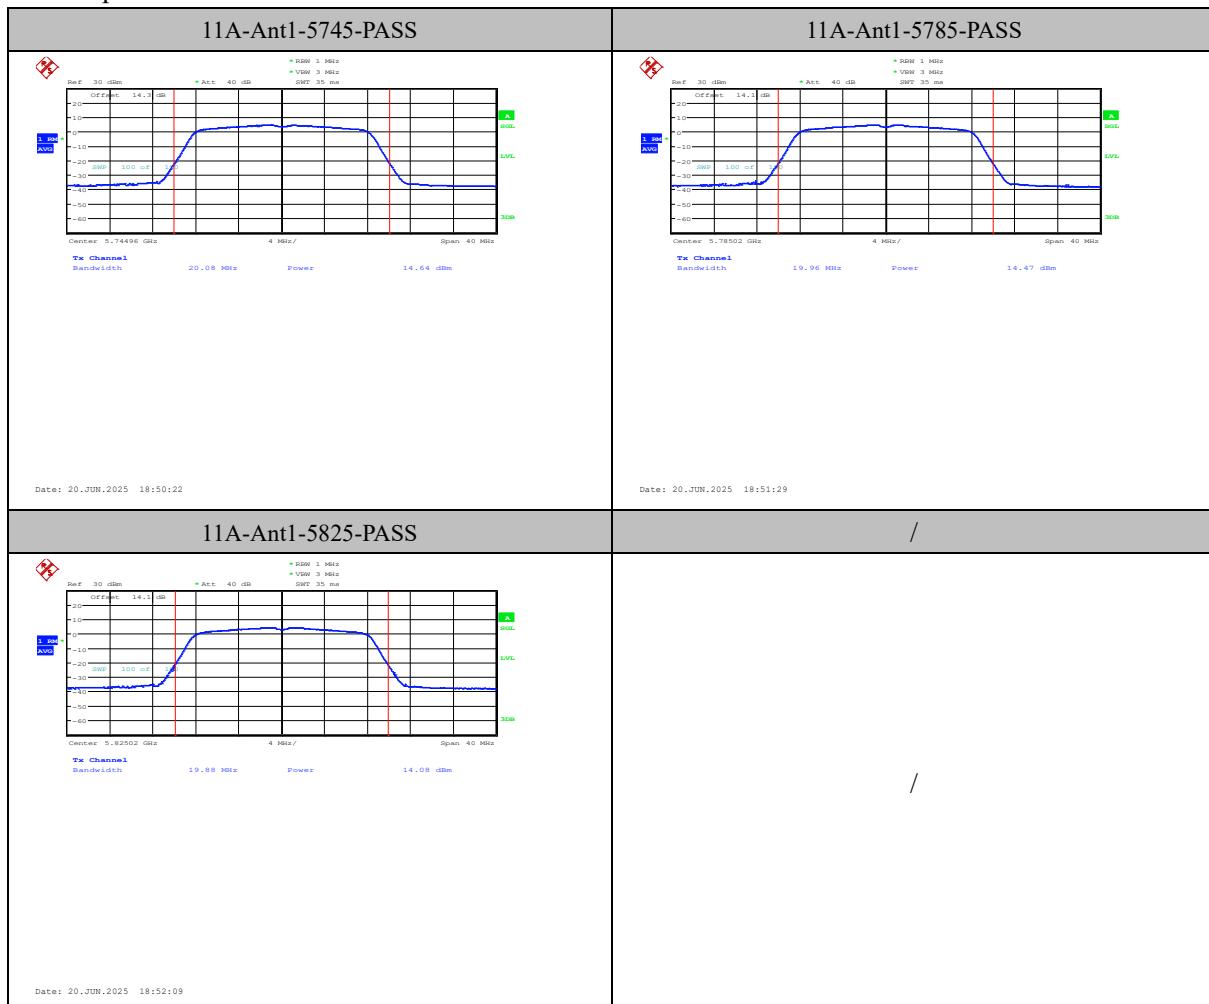Test Graphs

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
 Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.5. Band Edges Compliance

Specifications:	FCC 47 Part 15.407(b), RSS-247 6.2.4.3
DUT Serial Number:	IMEI:862072070057688;862072070057696
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

Above 1G, non-restricted band

Standard	Limit
15.407(b)	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
RSS-247 6.2	27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges; 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Above 1G, Restricted band

Standard	Limit	
FCC Part 15.209	Peak	74dB μ V/m
	Average	54dB μ V/m
RSS-Gen 8.9	Peak	74dB μ V/m
	Average	54dB μ V/m

$$\text{EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} + 20 \log (\text{d[m]}) - 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} - 20 \log (\text{d[m]}) + 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} + 95.2 = 68.2, \text{ for d = 3m}$$

Measurement Uncertainty:

Measurement Uncertainty	1 GHz to 6 GHz: 4.84 dB (k=2)
-------------------------	-------------------------------

Test Procedure:

The measurement is made according to KDB 789033.

Marker-Delta Method: The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

Procedure for peak unwanted emissions measurements above 1000 MHz

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Peak emission levels are measured by setting the instrument as follows:
 - 1) RBW = 1 MHz.
 - 2) VBW \geq [3 \times RBW].
 - 3) Detector = peak.
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately 1 / D, where D is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two, relative to measurement time for continuous transmission.

Procedures for average unwanted emissions measurements above 1000 MHz**Chongqing Academy of Information and Communications Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

a) RBW = 1 MHz.

b) Video bandwidth:

1) If the EUT is configured to transmit with $D \geq 98\%$, then set $VBW \leq RBW / 100$ (i.e., 10 kHz), but not less than 10 Hz.

2) If the EUT D is $< 98\%$, then set $VBW \geq 1 / T$, where T is defined in item a1) of 12.2.

c) Video bandwidth mode or display mode:

1) The instrument shall be set with video filtering applied in the power domain. Typically, this requires setting the detector mode to RMS (power averaging) and setting the average-VBW type to power (rms).

2) As an alternative, the instrument may be set to linear detector mode. Video filtering shall be applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode to accomplish this. Others have a setting for average-VBW type, which can be set to “voltage” regardless of the display mode.

d) Detector = peak.

e) Sweep time = auto.

f) Trace mode = max hold.

g) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where D is the duty cycle. For example, use at least 200 traces if the duty cycle is 25%. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 50 traces should be averaged.)


The measurement was applied in a fully anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna. Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. During the tests, the antenna height varied from 1m to 4m and the EUT azimuth were varied from 0° to 360° in order to identify the maximum level of emissions from the EUT. In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

to determine the attitude having maximum or near-maximum emission level. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.


Test Setup

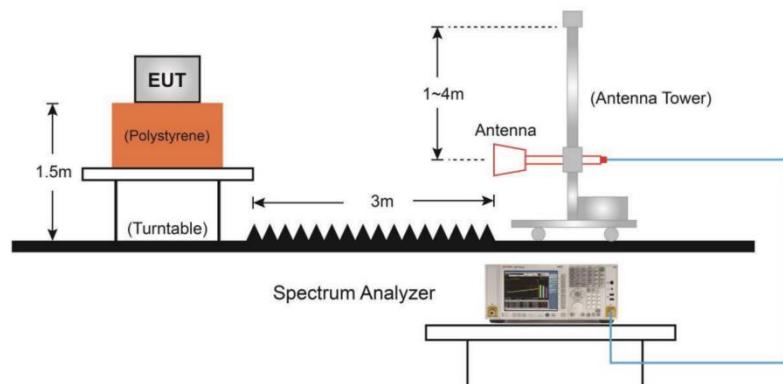

Chongqing Academy of Information and Communications Technology


Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Measurement Result:

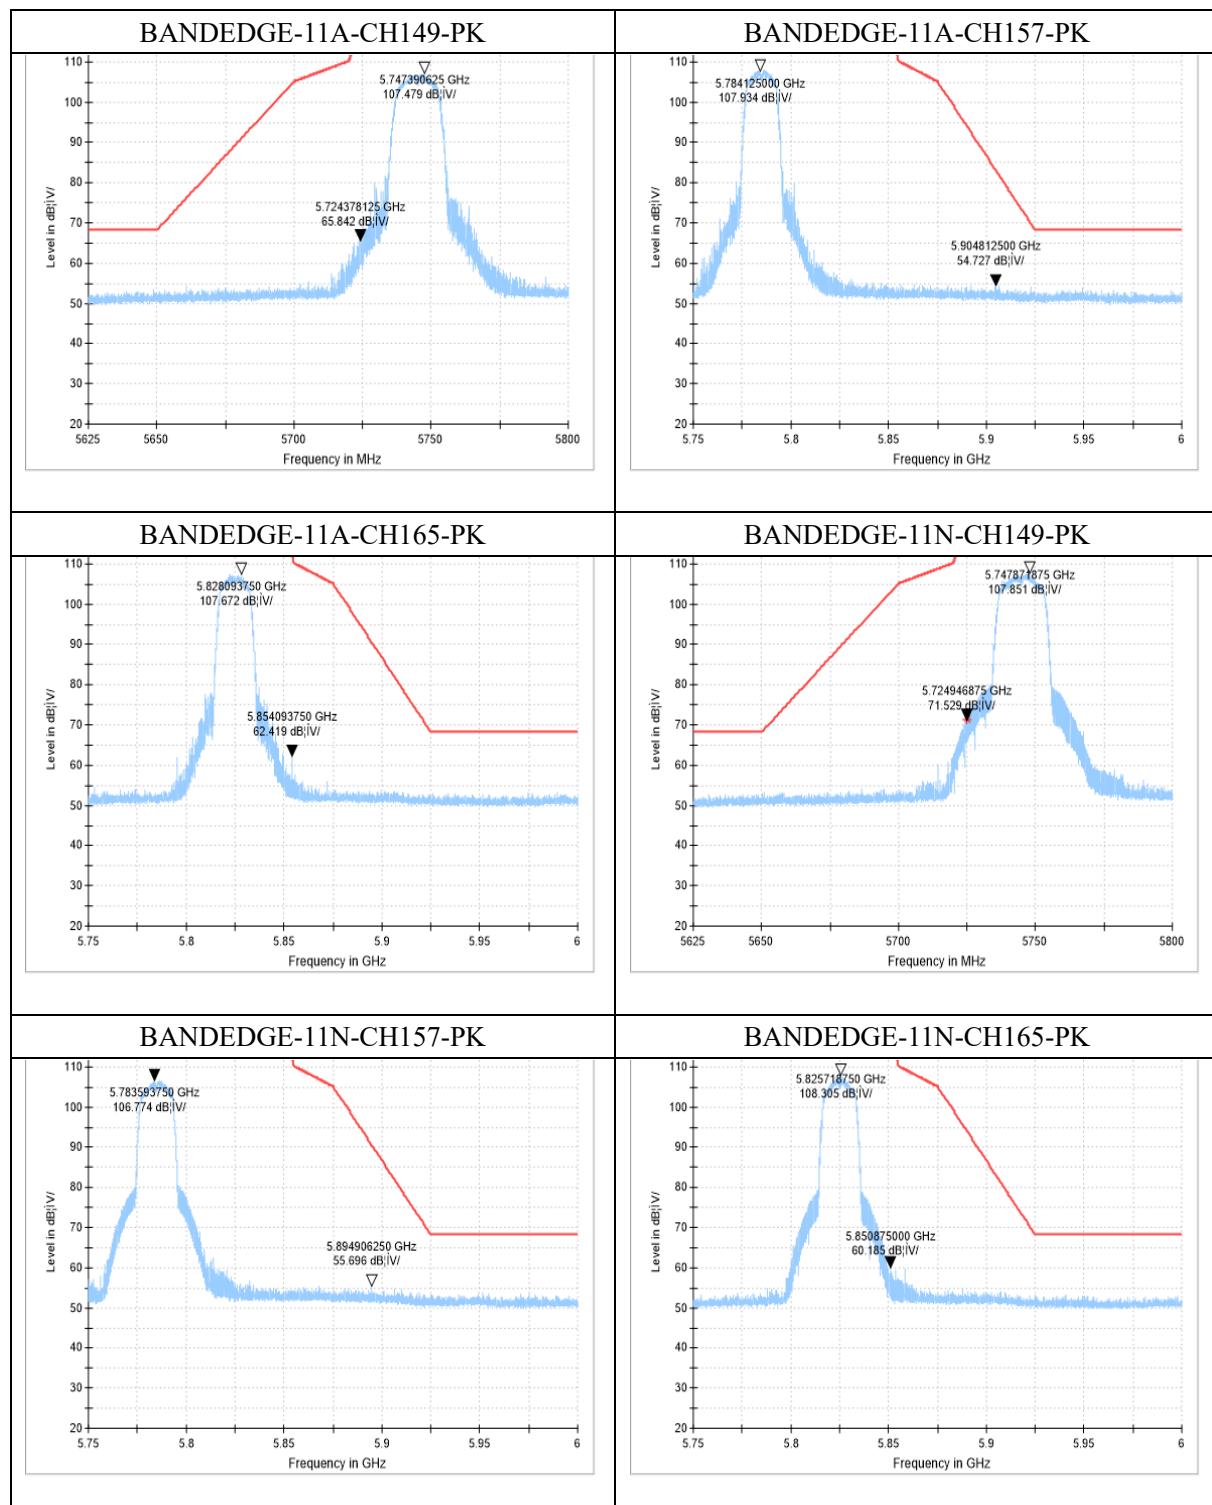


Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

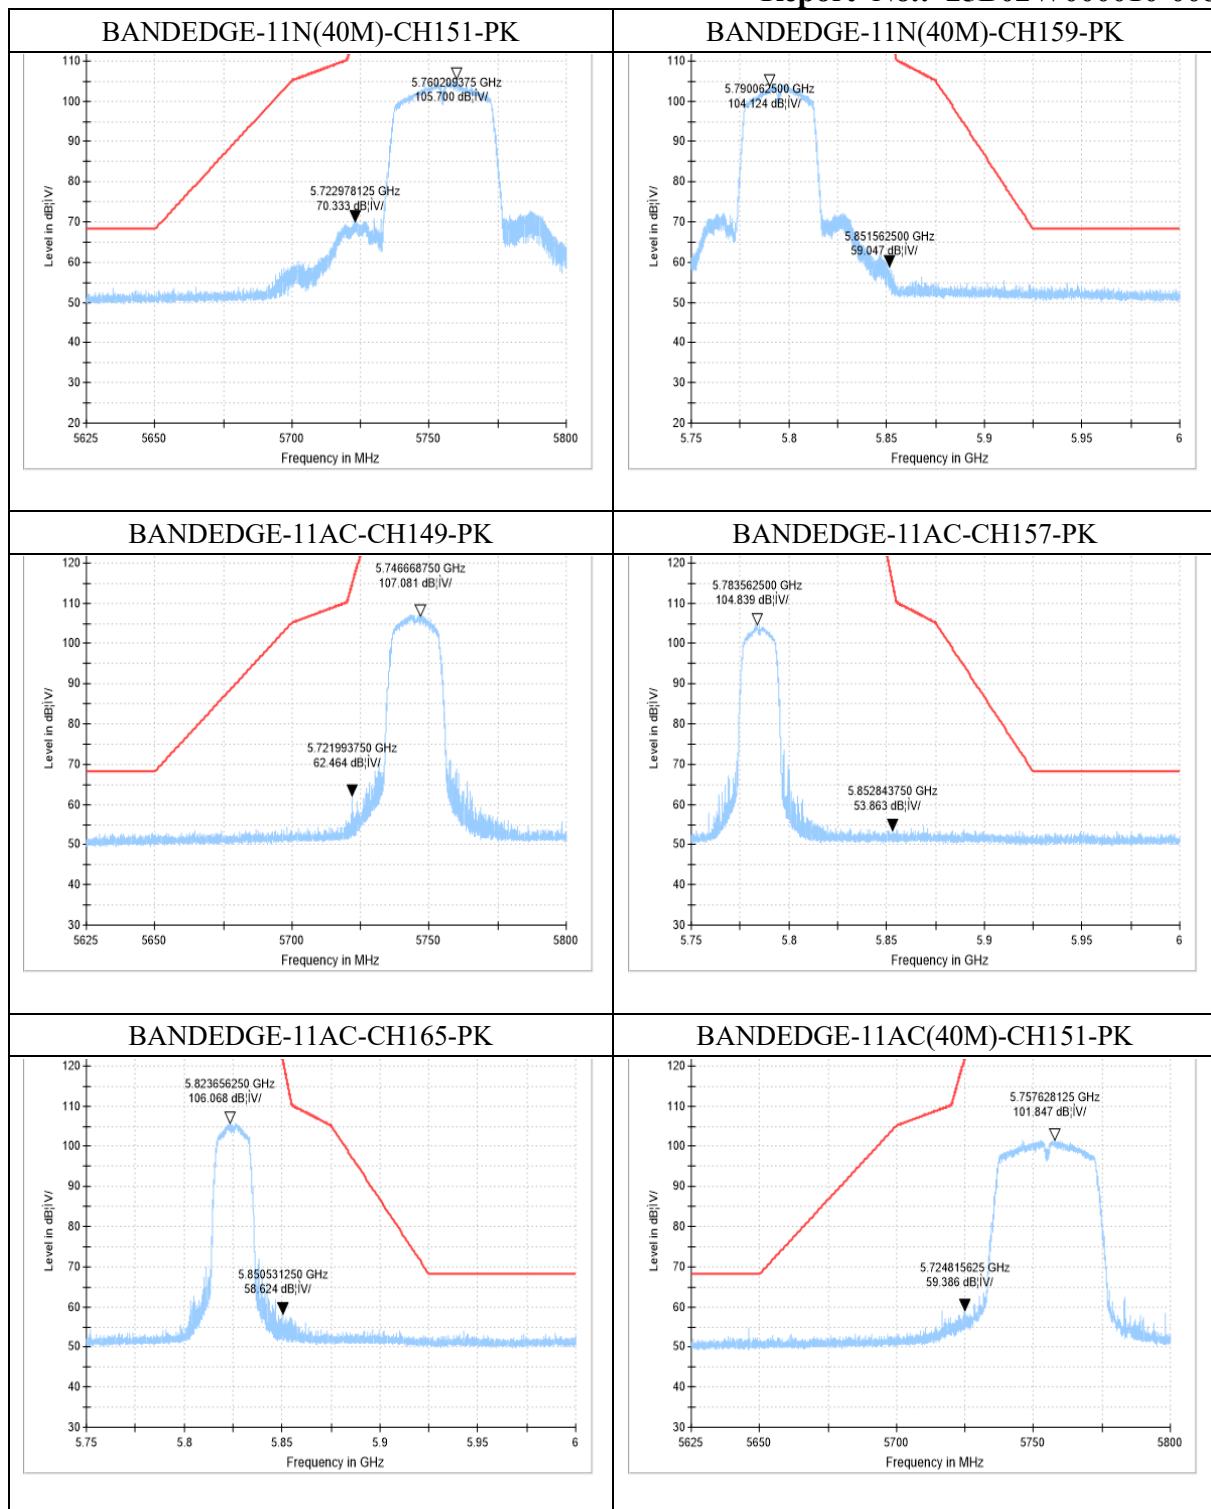

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

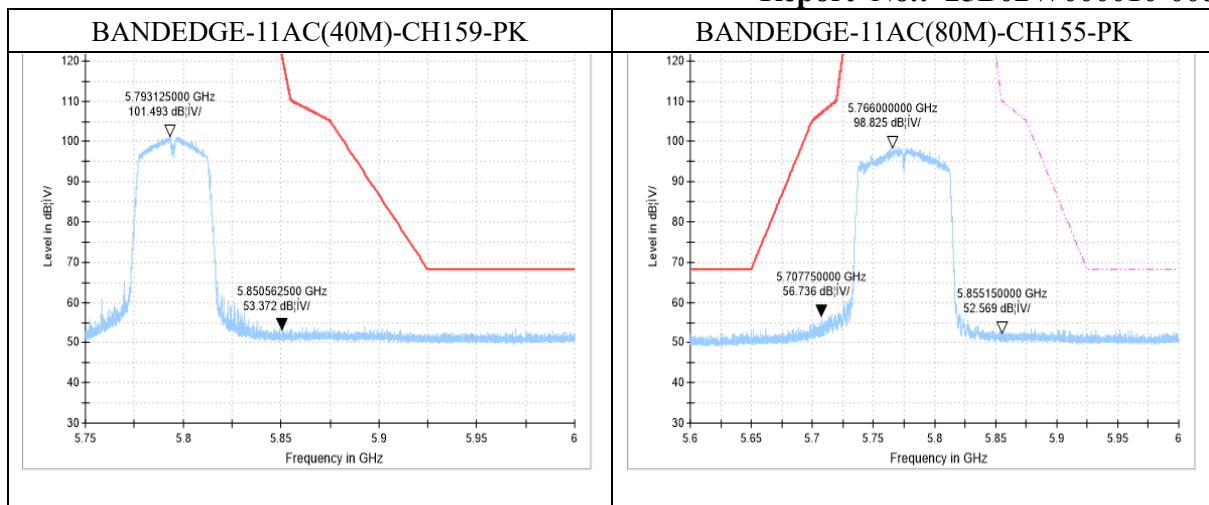

Note:

1. Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.6. Transmitter Spurious Emission

Specifications:	FCC 47 Part 15.407,15.205,15.209, RSS-247 6.2, RSS-Gen 8.9,8.10
DUT Serial Number:	IMEI:862072070057688;862072070057696
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

Below 1G:

Frequency of emission (MHz)	Field strength(dB μ V/m)	Measurement distance(m)
0.009-0.490	129-94	3
0.490-1.705	74-63	3
1.705-30	70	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

Note: for frequency range below 960MHz, the limit in 15.209 is defined in 10m test distance. The limit used above is calculated from 10m to 3m

Above 1G, non-restricted band:

Standard	Limit
FCC Part 15.407(b)	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

RSS-247 6.2	27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 Bm/MHz at 5 MHz above or below the bandedges; 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.
-------------	---

Above 1G, Restricted band:

Standard	Limit	
FCC Part 15.209	Peak	74dB μ V/m
	Average	54dB μ V/m
RSS-Gen 8.9	Peak	74dB μ V/m
	Average	54dB μ V/m

$$\text{EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} + 20 \log (\text{d[m]}) - 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} - 20 \log (\text{d[m]}) + 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} + 95.2 = 68.2, \text{ for d = 3m}$$

Measurement Uncertainty:

Measurement Uncertainty	30MHz-150MHz 3.38 dB (k=2) 150MHz-1000MHz 4.09dB (k=2) 1000MHz-6000MHz 4.84 dB (k=2) 6000MHz-18000MHz 4.52 dB (k=2) 18000MHz-26500MHz 6.19 dB (k=2) 26500MHz-40000MHz 6.03 dB (k=2)
-------------------------	--

Test procedures

The measurement is made according to KDB 789033

Set the spectrum analyzer in the following:

Procedure for Unwanted Emissions Measurements below 1000 MHz:**Chongqing Academy of Information and Communications Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

- a) Follow the requirements in II.G.3. "General Requirements for Unwanted Emissions Measurements."
- b) Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Detector: Peak and Quasi-Peak

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz:

- a) Follow the requirements in II.G.3, "General Requirements for Unwanted Emissions Measurements."
- b) Maximum emission levels are measured by setting the analyzer as follows:
 - (i) RBW = 1 MHz.
 - (ii) VBW \geq 3 MHz.
 - (iii) Detector = Peak.
 - (iv) Sweep time = auto.
 - (v) Trace mode = max hold.
 - (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

Procedures for Average Unwanted Emissions Measurements above 1000 MHz:

- a) Follow the requirements in section II.G.3., "General Requirements for Unwanted Emissions Measurements."
- b) Average emission levels shall be measured using one of the following two methods.
- c) Method AD (Average Detection): Primary method
 - (i) RBW = 1 MHz.
 - (ii) VBW \geq 3 MHz.
 - (iii) Detector = power averaging (rms), if $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
 - (iv) Averaging type = power averaging (rms)

As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

(v) Sweep time = auto.

(vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—rather than turning on and off with the transmit cycle, at least 100 traces shall be averaged.)

(vii) If tests are performed with the EUT transmitting at a duty cycle less than 98%, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

If power averaging (rms) mode was used in step (iv) above, the correction factor is $10 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB must be added to the measured emission levels.

If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log (1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB must be added to the measured emission levels.

If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. Below 18GHz , the measurement antenna was placed at a distance of 3 meters from the EUT. Above 18GHz , the measurement antenna was placed at a distance of 1

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Report No.: 25B02W000010-008

meter from the EUT. During the tests, the antenna height varied from 1m to 4m and the EUT azimuth were varied from 0° to 360° in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Remark:


1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided

Chongqing Academy of Information and Communications Technology


Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Test Setup


Below 30MHz Test Setup

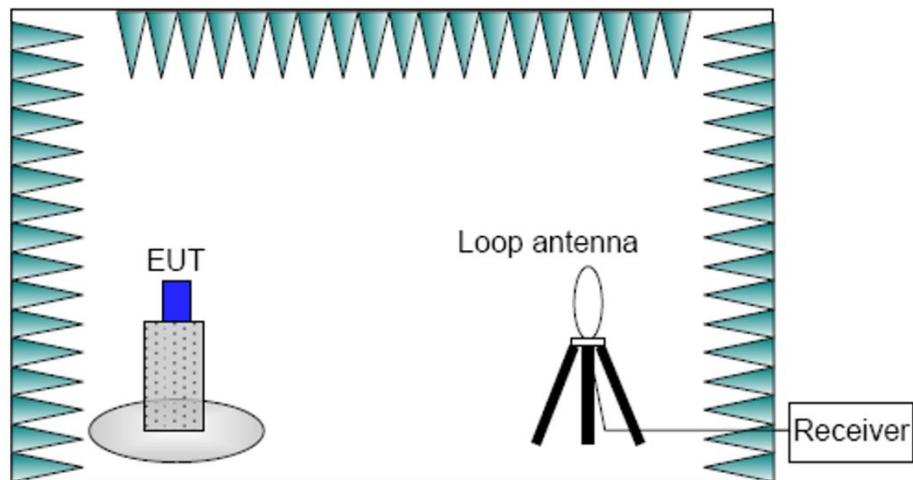

Below 1GHz Test Setup

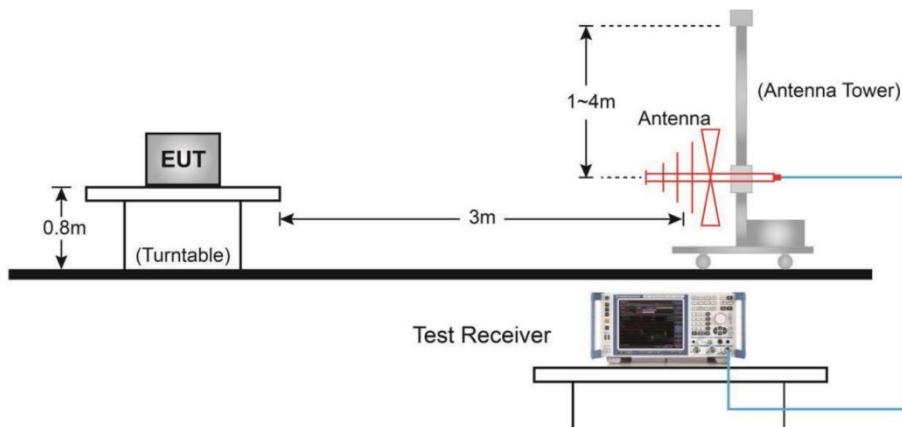


Above 1GHz Test Setup

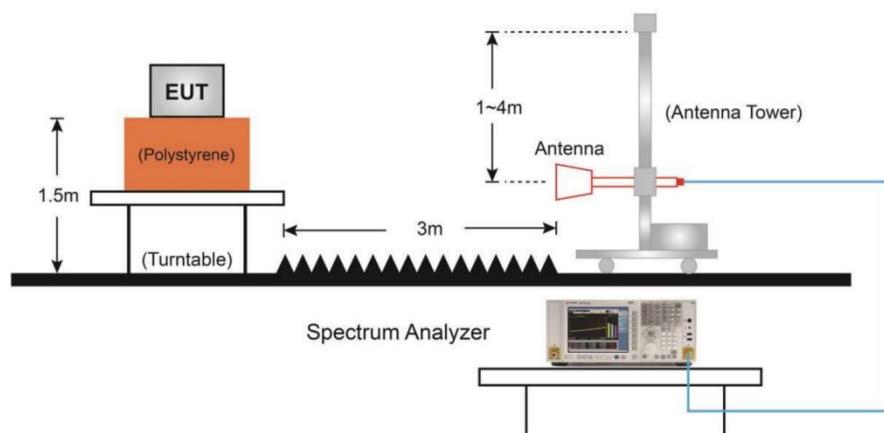

Chongqing Academy of Information and Communications Technology


Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Measurement Results:

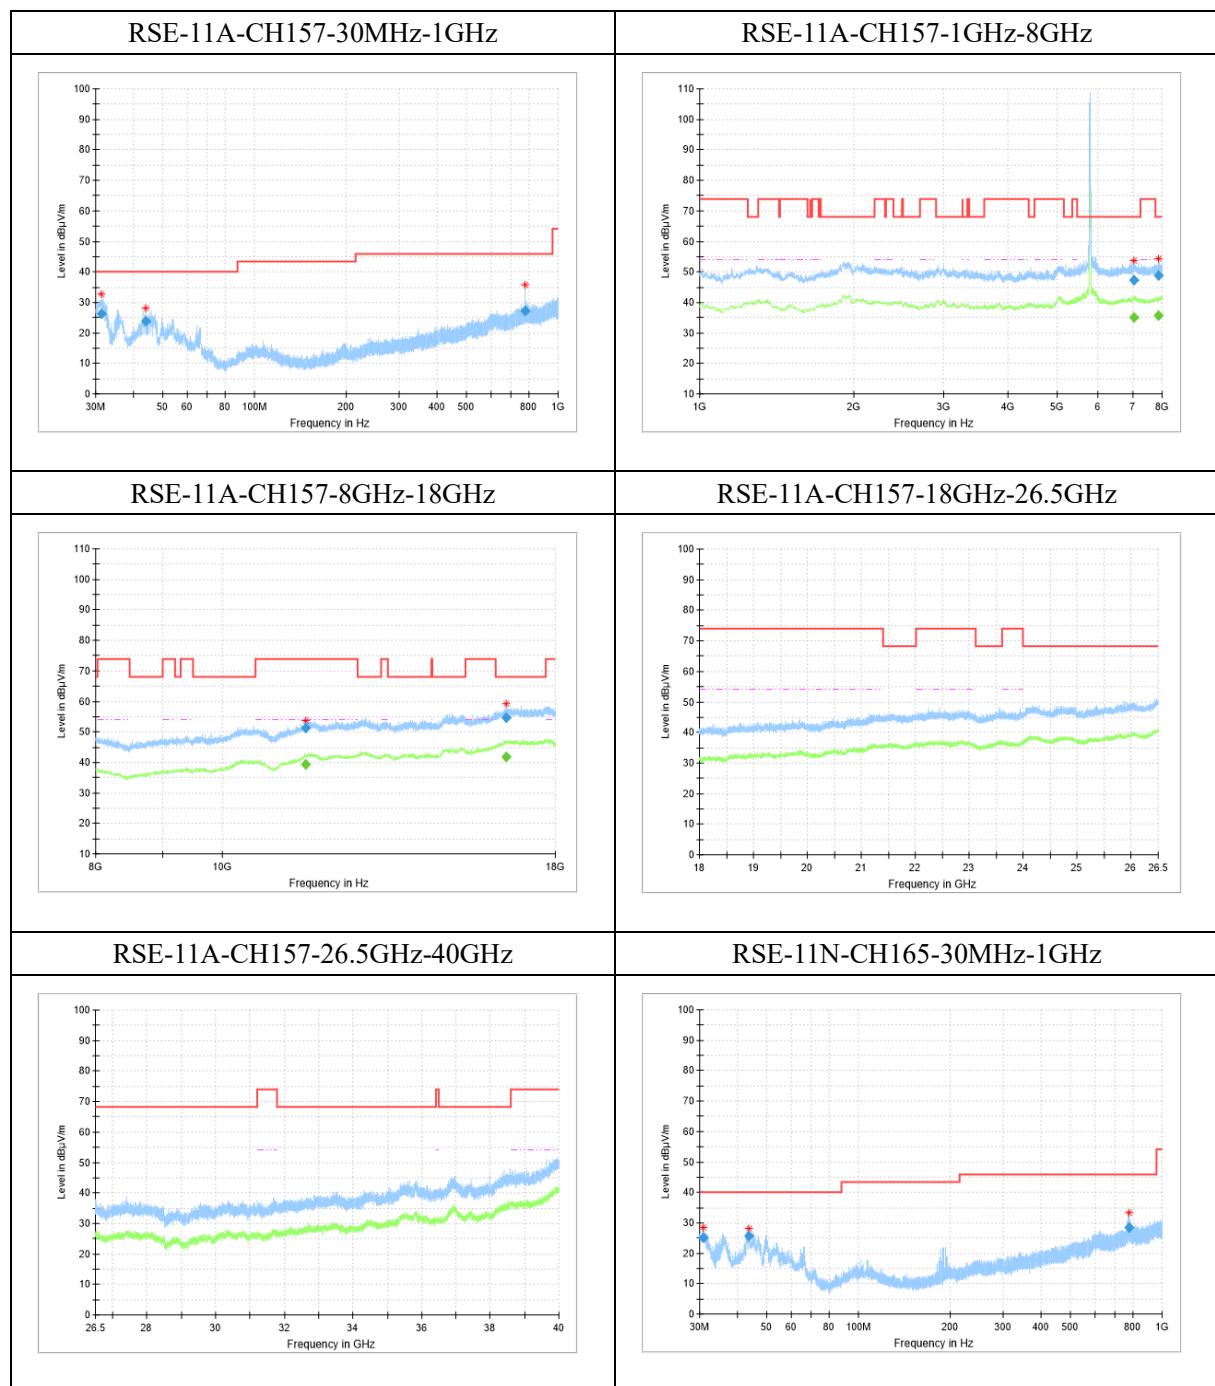


Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

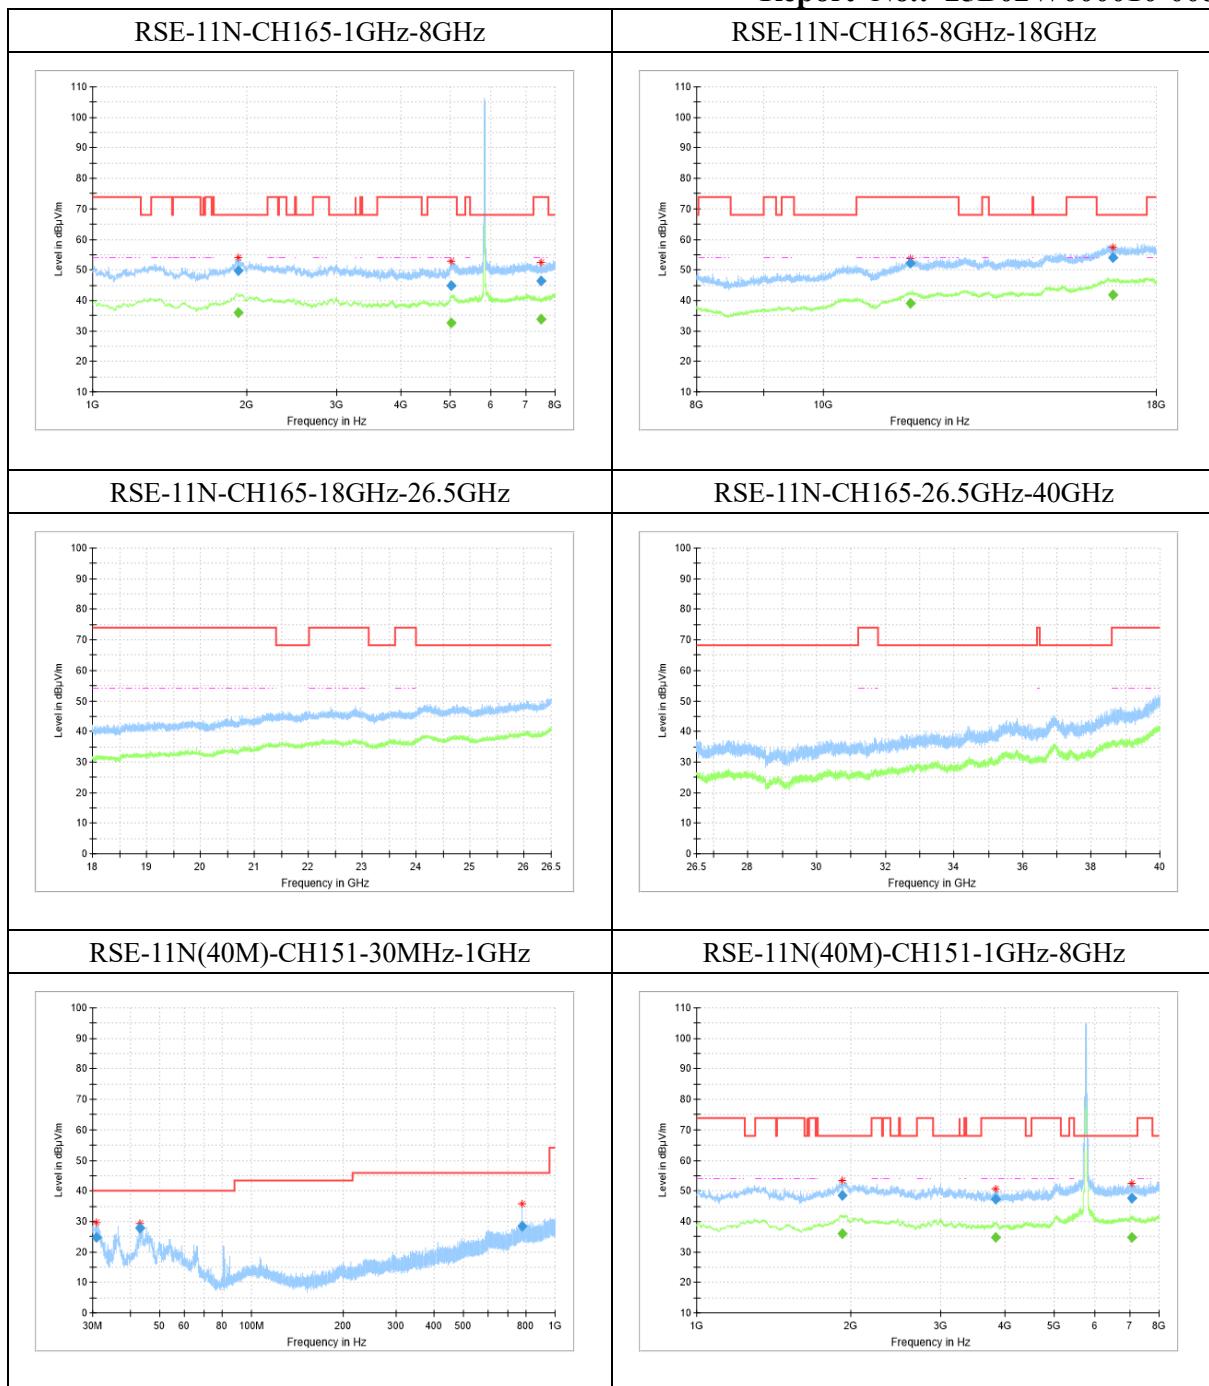


Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

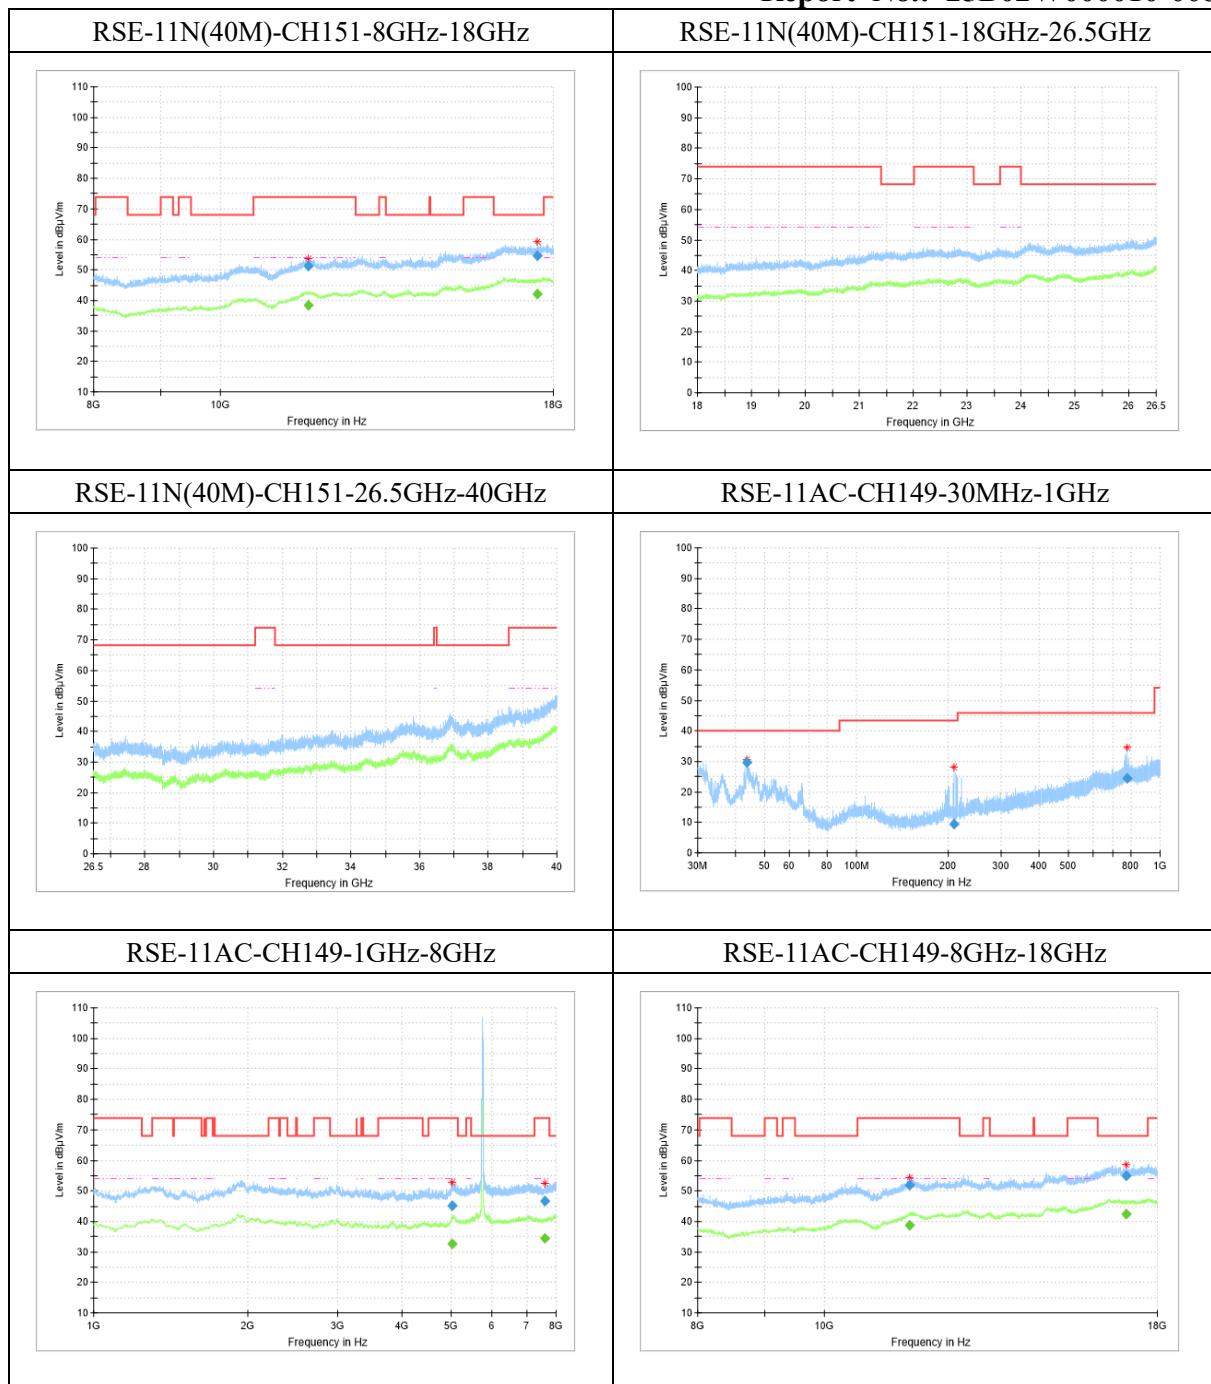


Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

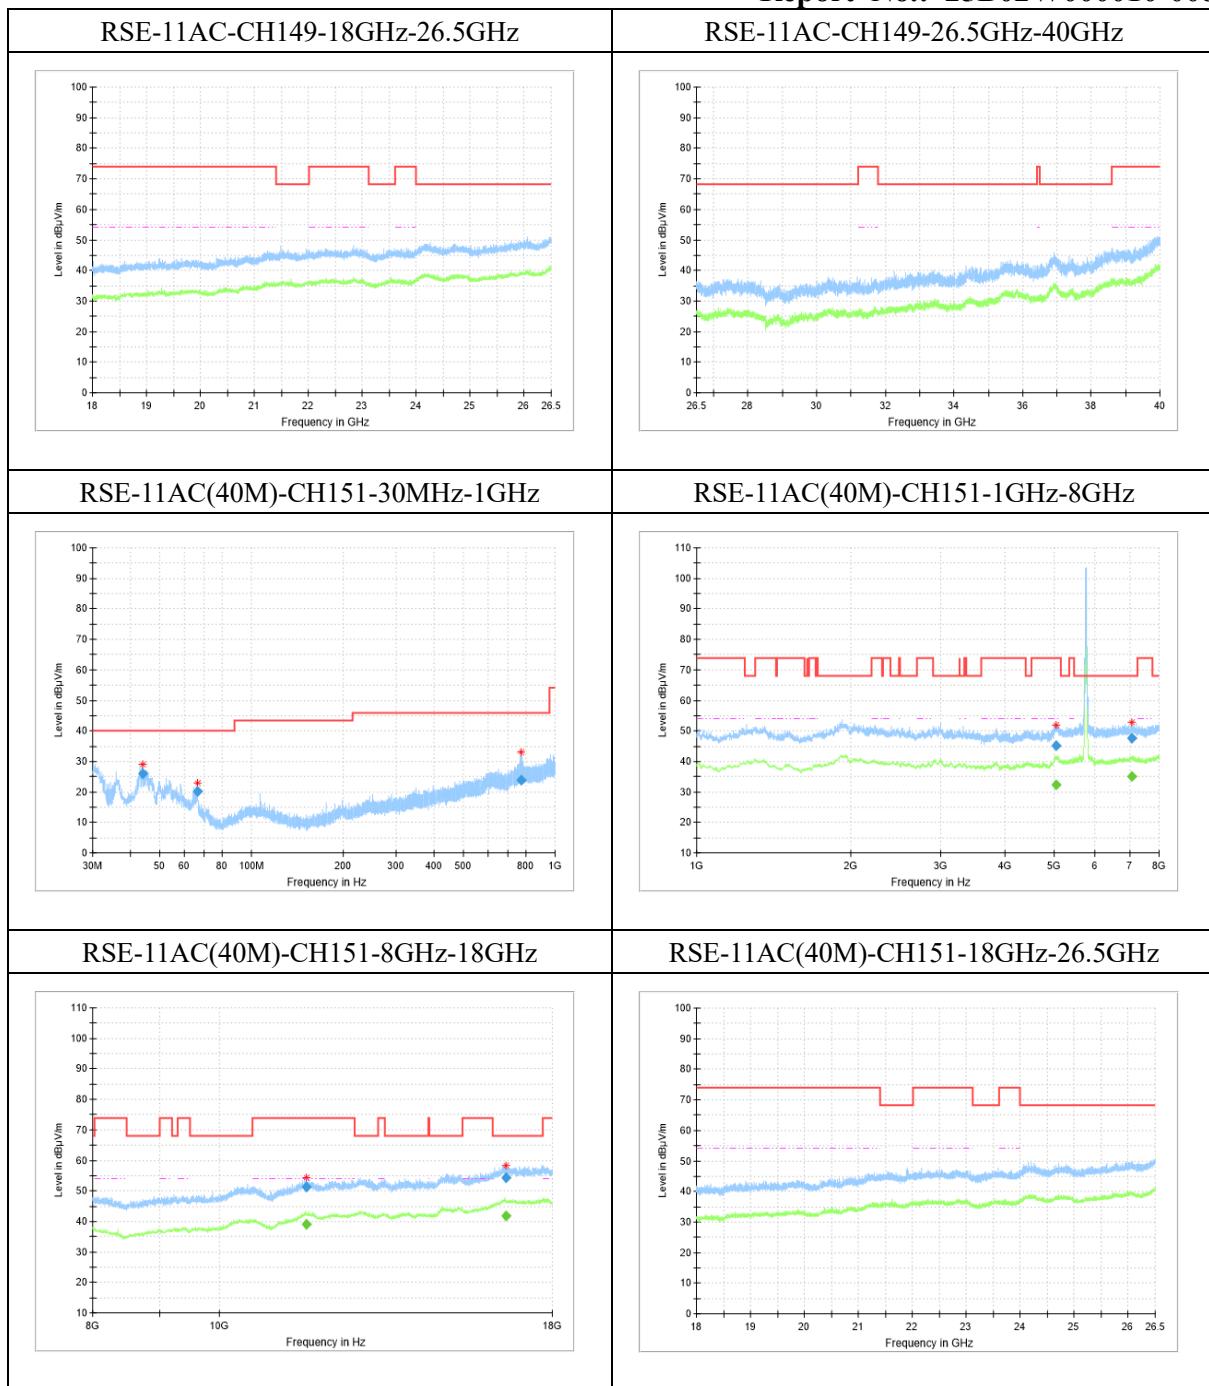

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

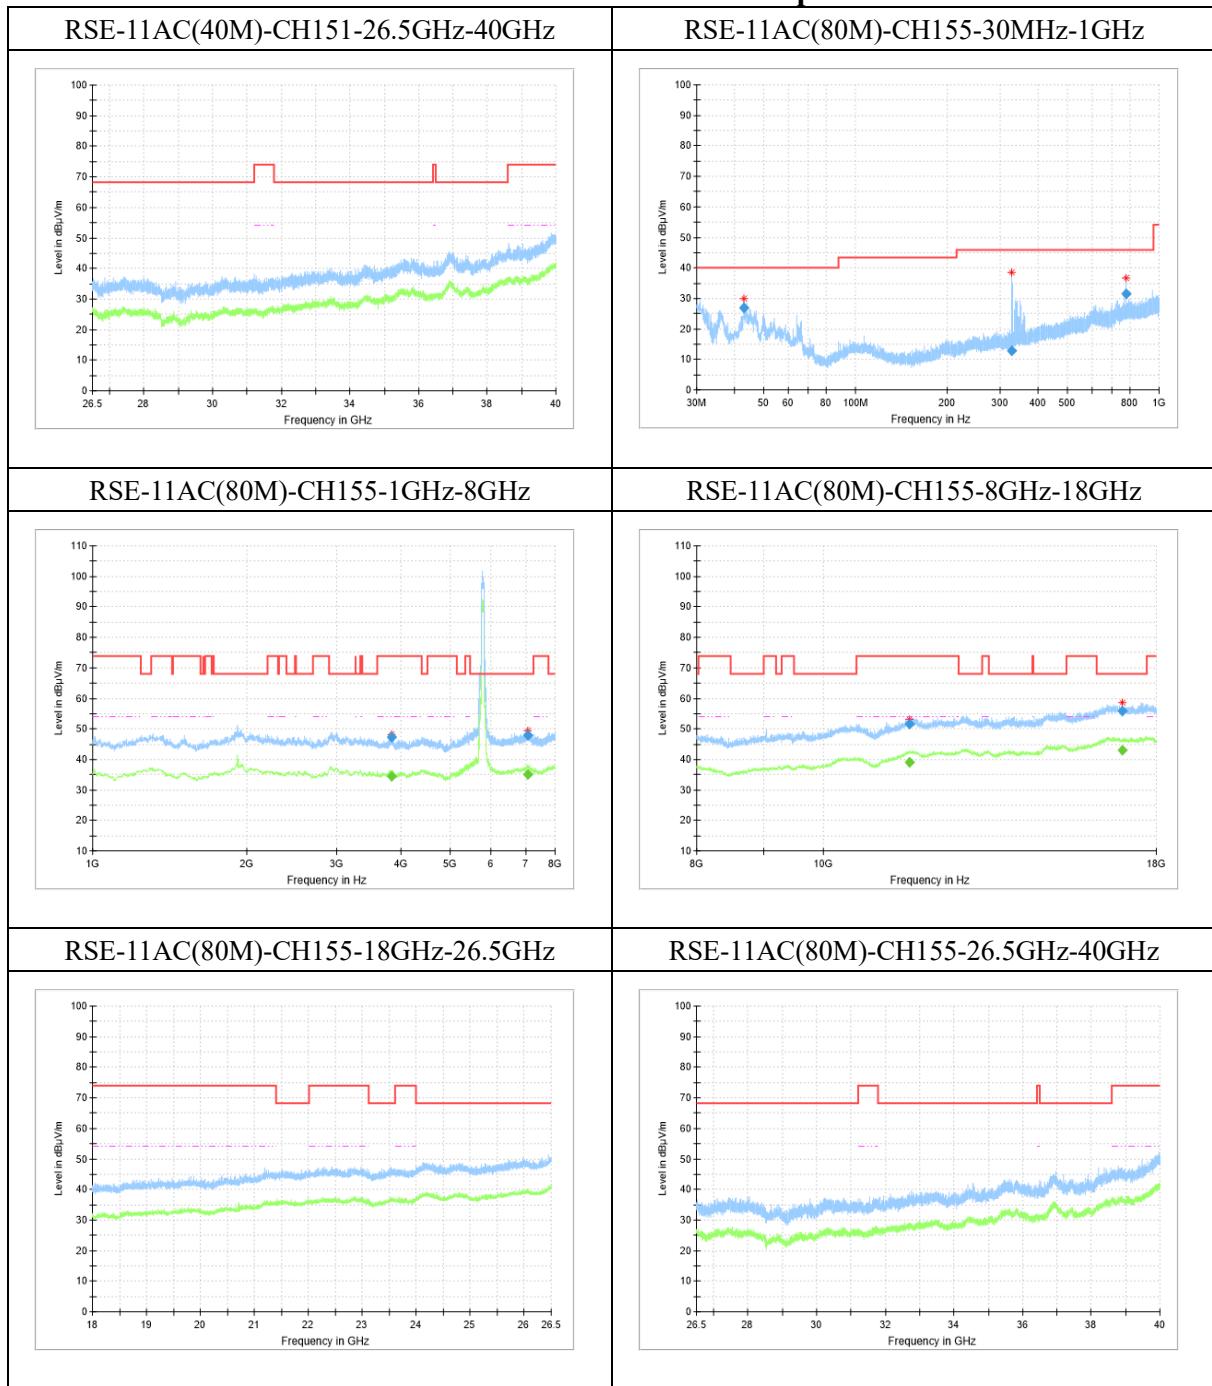

Note:

1. The out-of- limit signal in the picture is the main frequency signal.
2. Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the Emissions in the frequency band 18GHz-40GHz is more than 20dB below the limit are not report.
3. The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.
4. Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

RSE-11A-CH157-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
31.4	26.23	-16	42.23	13.77	40.00	V
43.8	24	-12	36	16.00	40.00	V
776.0	27.26	0	27.26	18.74	46.00	V

RSE-11A-CH157-1GHz-8GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
7040.6	47.39	4	43.39	20.81	68.20	H
7868.6	48.71	4	44.71	19.49	68.20	H

RSE-11A-CH157-1GHz-8GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
7040.6	35.01	4	31.01	---	---	H
7868.6	35.55	4	31.55	---	---	H

RSE-11A-CH157-8GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11589.8	51.41	10	41.41	22.59	74.00	H
16514.5	54.77	18	36.77	13.43	68.20	V

RSE-11A-CH157-8GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11589.8	39.22	10	29.22	14.78	54.00	H
16514.5	41.84	18	23.84	---	---	V

RSE-11N-CH165-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
30.9	24.96	-16	40.96	15.04	40.00	V
43.5	25.54	-12	37.54	14.46	40.00	V
775.8	28.45	0	28.45	17.55	46.00	V

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

RSE-11N-CH165-1GHz-8GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
1927.0	49.65	5	44.65	18.55	68.20	V
5011.5	44.78	5	39.78	29.22	74.00	H
7502.2	46.24	3	43.24	27.76	74.00	H

RSE-11N-CH165-1GHz-8GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
1927.0	35.99	5	30.99	---	---	V
5011.5	32.49	5	27.49	21.51	54.00	H
7502.2	33.79	3	30.79	20.21	54.00	H

RSE-11N-CH165-8GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11660.8	52.12	11	41.12	21.88	74.00	H
16658.0	54.1	17	37.1	14.10	68.20	H

RSE-11N-CH165-8GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11660.8	39.04	11	28.04	14.96	54.00	H
16658.0	41.65	17	24.65	---	---	H

RSE-11N(40M)-CH151-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
30.9	24.66	-16	40.66	15.34	40.00	V
43.0	27.8	-13	40.8	12.20	40.00	V
777.6	28.55	0	28.55	17.45	46.00	V

RSE-11N(40M)-CH151-1GHz-8GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
1925.4	48.39	5	43.39	19.81	68.20	H

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965

FAX: 0086-23-88608777

3835.1	47.18	2	45.18	26.82	74.00	H
7070.2	47.48	4	43.48	20.72	68.20	V

RSE-11N(40M)-CH151-1GHz-8GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
1925.4	35.85	5	30.85	---	---	H
3835.1	34.7	2	32.7	19.30	54.00	H
7070.2	34.92	4	30.92	---	---	V

RSE-11N(40M)-CH151-8GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11688.5	51.29	11	40.29	22.71	74.00	V
17500.8	54.54	18	36.54	13.66	68.20	H

RSE-11N(40M)-CH151-8GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11688.5	38.57	11	27.57	15.43	54.00	V
17500.8	42.18	18	24.18	---	---	H

RSE-11AC-CH149-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
43.5	29.8	-12	41.8	10.20	40.00	V
210.1	9.34	-13	22.34	34.16	43.50	V
775.8	24.38	0	24.38	21.62	46.00	V

RSE-11AC-CH149-1GHz-8GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
5011.9	45.07	5	40.07	28.93	74.00	V
7592.1	46.85	4	42.85	27.15	74.00	H

RSE-11AC-CH149-1GHz-8GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
5011.9	32.51	5	27.51	21.49	54.00	V

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

7592.1	34.4	4	30.4	19.60	54.00	H
--------	------	---	------	-------	-------	---

RSE-11AC-CH149-8GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11633.5	51.82	11	40.82	22.18	74.00	V
17047.5	55.09	18	37.09	13.11	68.20	H

RSE-11AC-CH149-8GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11633.5	38.74	11	27.74	15.26	54.00	V
17047.5	42.34	18	24.34	---	---	H

RSE-11AC(40M)-CH151-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
43.8	25.85	-12	37.85	14.15	40.00	V
66.3	20.24	-14	34.24	19.76	40.00	H
774.4	23.78	0	23.78	22.22	46.00	V

RSE-11AC(40M)-CH151-1GHz-8GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
5032.5	45.09	5	40.09	28.91	74.00	H
7059.2	47.53	4	43.53	20.67	68.20	H

RSE-11AC(40M)-CH151-1GHz-8GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
5032.5	32.38	5	27.38	21.62	54.00	H
7059.2	35.04	4	31.04	---	---	H

RSE-11AC(40M)-CH151-8GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11655.8	51.42	11	40.42	22.58	74.00	H
16597.2	54.46	17	37.46	13.74	68.20	H

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

RSE-11AC(40M)-CH151-8GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11655.8	39.03	11	28.03	14.97	54.00	H
16597.2	41.74	17	24.74	---	---	H

RSE-11AC(80M)-CH155-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
43.0	26.98	-13	39.98	13.02	40.00	V
326.1	12.94	-9	21.94	33.06	46.00	H
776.0	31.53	0	31.53	14.47	46.00	V

RSE-11AC(80M)-CH155-1GHz-8GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
3840.2	47.36	2	45.36	26.64	74.00	V
7083.1	47.85	4	43.85	20.35	68.20	H

RSE-11AC(80M)-CH155-1GHz-8GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
3840.2	34.57	2	32.57	19.43	54.00	V
7083.1	35.22	4	31.22	---	---	H

RSE-11AC(80M)-CH155-8GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11640.5	51.7	11	40.7	22.30	74.00	H
16947.8	56.02	18	38.02	12.18	68.20	V

RSE-11AC(80M)-CH155-8GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
11640.5	39.14	11	28.14	14.86	54.00	H
16947.8	43.08	18	25.08	---	---	V

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.7. AC Powerline Conducted Emission

Specifications:	FCC 47 Part 15.207, RSS-GEN 8.8
DUT Serial Number:	IMEI:862072070057688;862072070057696
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60%RH Air pressure: 86-106kPa
Test Results:	Pass

Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.


Measurement Uncertainty:

Measurement Uncertainty	1.97dB (k=2)
-------------------------	--------------

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Test Setup

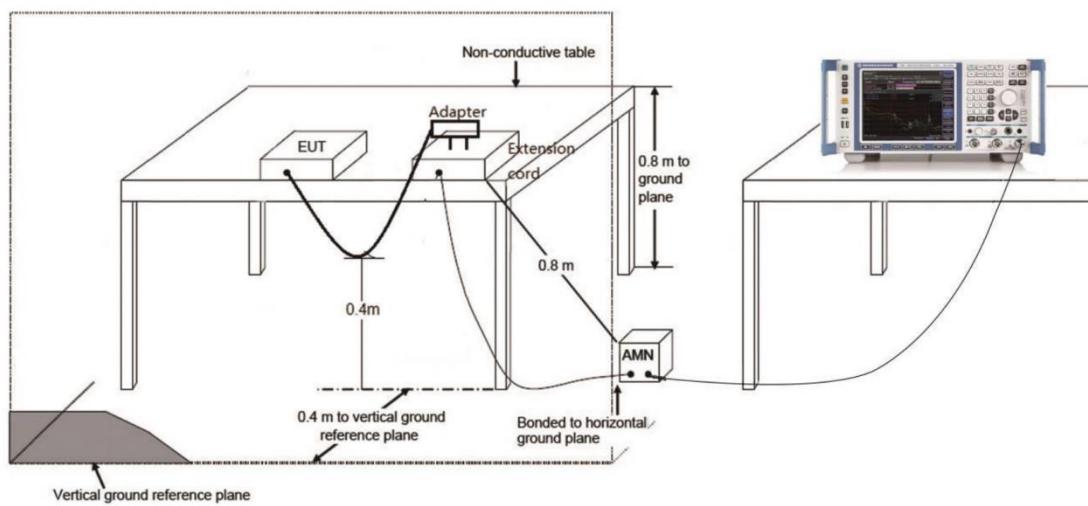

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit

(Quasi-peak-average Limit)


Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Measurement Results:

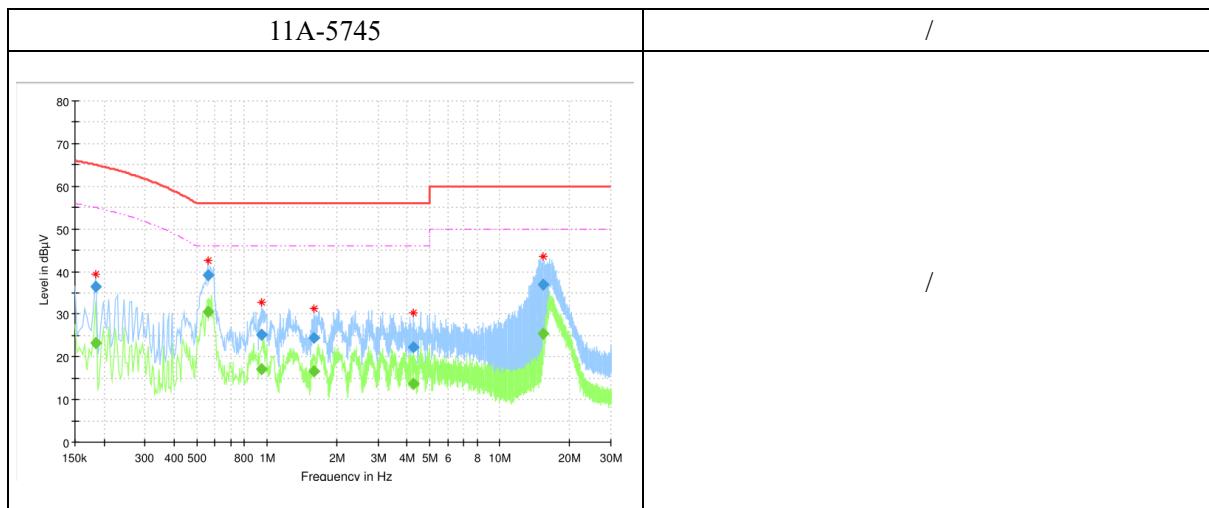

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.183581	36.45	---	65.04	28.59	15000.0	9.000	N	ON	10.1
0.183581	---	23.29	55.04	31.75	15000.0	9.000	N	ON	10.1
0.556706	39.04	---	56.00	16.96	15000.0	9.000	L1	ON	9.9
0.556706	---	30.47	46.00	15.53	15000.0	9.000	L1	ON	9.9
0.948488	---	17.23	46.00	28.77	15000.0	9.000	N	ON	9.9
0.948488	25.19	---	56.00	30.81	15000.0	9.000	N	ON	9.9
1.597725	---	16.75	46.00	29.25	15000.0	9.000	N	ON	9.9
1.597725	24.52	---	56.00	31.48	15000.0	9.000	N	ON	9.9
4.250644	---	13.67	46.00	32.33	15000.0	9.000	N	ON	9.7
4.250644	22.18	---	56.00	33.82	15000.0	9.000	N	ON	9.7
15.351113	---	25.52	50.00	24.48	15000.0	9.000	N	ON	9.8
15.351113	36.96	---	60.00	23.04	15000.0	9.000	N	ON	9.8

Note:

1. L1 and N is all have been tested, the result of them is synthesized in the above data diagram.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

ANNEX A EUT Photos

See the document "25B02W000010-External Photos".

See the document "25B02W000010-Internal Photos".

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

ANNEX B Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

END OF REPORT

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777