



# FCC Test Report

**Test Report  
On Behalf of  
AMBIR TECHNOLOGY INC.  
For  
Barcode Scanner  
Model No.: BR312, BR212**

**FCC ID: 2AH6G-BR212BR312**

**Prepared For: AMBIR TECHNOLOGY INC.  
841 Sivert Drive, Wood Dale, Illinois, 60191, United States**

**Prepared By: Shenzhen HUAK Testing Technology Co., Ltd.  
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

**Date of Test: Dec. 23, 2024 ~ Dec. 31, 2024**

**Date of Report: Dec. 31, 2024**

**Report Number: HK2412238014-E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Test Result Certification****Applicant's Name** ..... : AMBIR TECHNOLOGY INC.

Address ..... : 841 Sivert Drive, Wood Dale, Illinois, 60191, United States

**Manufacturer's Name** ..... : AMBIR TECHNOLOGY INC.

Address ..... : 841 Sivert Drive, Wood Dale, Illinois, 60191, United States

**Product Description**

Trade Mark ..... : N/A

Product Name ..... : Barcode Scanner

Model and/or Type Reference.. : BR312, BR212

**FCC Rules and Regulations Part 15 Subpart C Section 15.249****Standards** ..... : **ANSI C63.10: 2013**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :Date (s) of Performance of Tests ..... : **Dec. 23, 2024 ~ Dec. 31, 2024**Date of Issue ..... : **Dec. 31, 2024**Test Result ..... : **Pass**

Testing Engineer

Len Liao

Technical Manager

Sliver Wan

Authorized Signatory

Jason Zhou

**Table of Contents**

	<b>Page</b>
1 . Test Summary	5
1.1 Test Procedures and Results	5
1.2 Information of the Test Laboratory	5
1.3 Measurement Uncertainty	5
2 . General Information	6
2.1 General Description of EUT	6
2.2 Carrier Frequency of Channels	7
2.3 Operation of EUT during Testing	7
2.4 Description of Test Setup	8
2.5 Description of Support Units	9
2.5 Measurement Instruments List	10
3 . Conducted Emissions Test	11
3.1 Conducted Power Line Emission Limit	11
3.2 Test Setup	11
3.3 Test Procedure	11
3.4 Test Result	12
4. Radiated Emission Test	14
4.1 Radiation Limit	14
4.2 Test Setup	14
4.3 Test Procedure	15
4.4 Test Result	15
5. Band Edge	21
5.1 Limits	21
5.2 Test Procedure	21
5.3 Test Result	22
6. Occupied Bandwidth Measurement	24
6.1 Test Setup	24
6.2 Test Procedure	24
6.3 Measurement Equipment Used	24
6.4 Test Result	24
7. Antenna Requirement	26
8. Photographs of Test	27
9. Photos of the EUT	29

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

**\*\* Modified History \*\***

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Dec. 31, 2024	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 1. Test Summary

### 1.1 Test Procedures and Results

DESCRIPTION OF TEST	SECTION NUMBER	RESULT
CONDUCTED EMISSIONS TEST	15.207	COMPLIANT
RADIATED EMISSION TEST	15.249(a)/15.209	COMPLIANT
BAND EDGE	15.249(d)/15.205	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	15.215(c)	COMPLIANT
ANTENNA REQUIREMENT	15.203	COMPLIANT

### 1.2 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

### 1.3 Measurement Uncertainty

#### Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.71dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



## 2. General Information

### 2.1 General Description of EUT

Equipment:	Barcode Scanner
Model Name:	BR312
Series Model:	BR212
Model Difference:	All model's the function, software and electric circuit are the same, only with product model named different. Test sample model: BR312.
FCC ID:	2AH6G-BR212BR312
Antenna Type:	Internal Antenna
Antenna Gain:	0.56dBi
Operation Frequency:	2410-2470MHz
Number of Channels:	61CH
Modulation Type:	GFSK
Power Source:	DC5V from 2D Wireless Barcode Scanner or DC3.7V from Battery
Power Rating:	DC5V from 2D Wireless Barcode Scanner or DC3.7V from Battery
Note:	<ol style="list-style-type: none"><li>1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</li><li>2. Antenna gain Refer to the antenna specifications.</li><li>3. The cable loss data is obtained from the supplier.</li><li>4. The test results in the report only apply to the tested sample.</li></ol>

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 2.2 Carrier Frequency of Channels

Description of Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410	22	2431	43	2452
2	2411	23	2432	44	2453
3	2412	24	2433	45	2454
4	2413	25	2434	46	2455
5	2414	26	2435	47	2456
6	2415	27	2436	48	2457
7	2416	28	2437	49	2458
8	2417	29	2438	50	2459
9	2418	30	2439	51	2460
10	2419	31	2440	52	2461
11	2420	32	2441	53	2462
12	2421	33	2442	54	2463
13	2422	34	2443	55	2464
14	2423	35	2444	56	2465
15	2424	36	2445	57	2466
16	2425	37	2446	58	2467
17	2426	38	2447	59	2468
18	2427	39	2448	60	2469
19	2428	40	2449	61	2470
20	2429	41	2450		
21	2430	42	2451		

## 2.3 Operation of EUT during Testing

### Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2410MHz


Middle Channel: 2440MHz

High Channel: 2470MHz




## 2.4 Description of Test Setup

Operation of EUT during Conducted and Radiation below 1GHz testing:

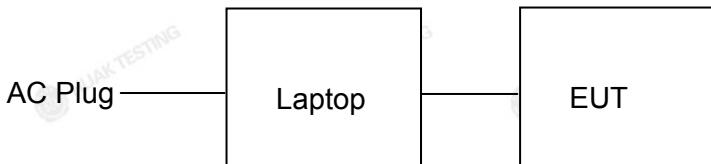

Operation of EUT during Radiation Above 1GHz testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



## 2.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Note
1	Barcode Scanner	N/A	BR312	N/A	EUT
2	USB Cable	N/A	N/A	Length:120cm	Accessory
3	Laptop	Lenovo	TP00096A	Input: DC 20V, 2.25~3.25A  Output: 5VDC, 0.5A	Peripheral

### Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



## 2.5 Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	1 Year
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	1 Year
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	1 Year
4	Spectrum analyzer	Agilent	N9020A	HKE-025	2024/02/20	1 Year
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2024/02/20	1 Year
6	Preamplifier	EMCI	EMC05184 5S	HKE-006	2024/02/20	1 Year
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	1 Year
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	1 Year
9	6dB Attenuator	Pasternack	6db	HKE-184	2024/02/20	1 Year
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	1 Year
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2 Year
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2 Year
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2 Year
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-2	HKE-060	2024/02/20	1 Year
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	1 Year
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	1 Year
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	1 Year
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	1 Year
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	1 Year
22	RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	/	/
23	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	2024/02/20	1 Year
24	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



### 3. Conducted Emissions Test

#### 3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following.

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

#### 3.2 Test Setup

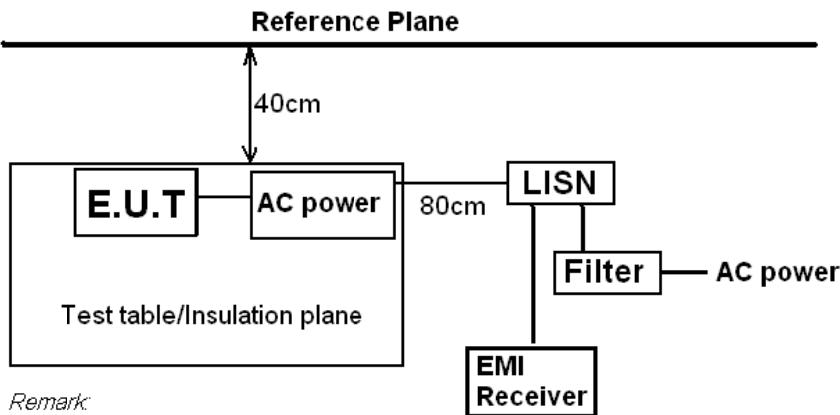

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m

#### 3.3 Test Procedure


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.



### 3.4 Test Result

All modes have been tested, only the worst result was reported as below:

Test Specification: Line

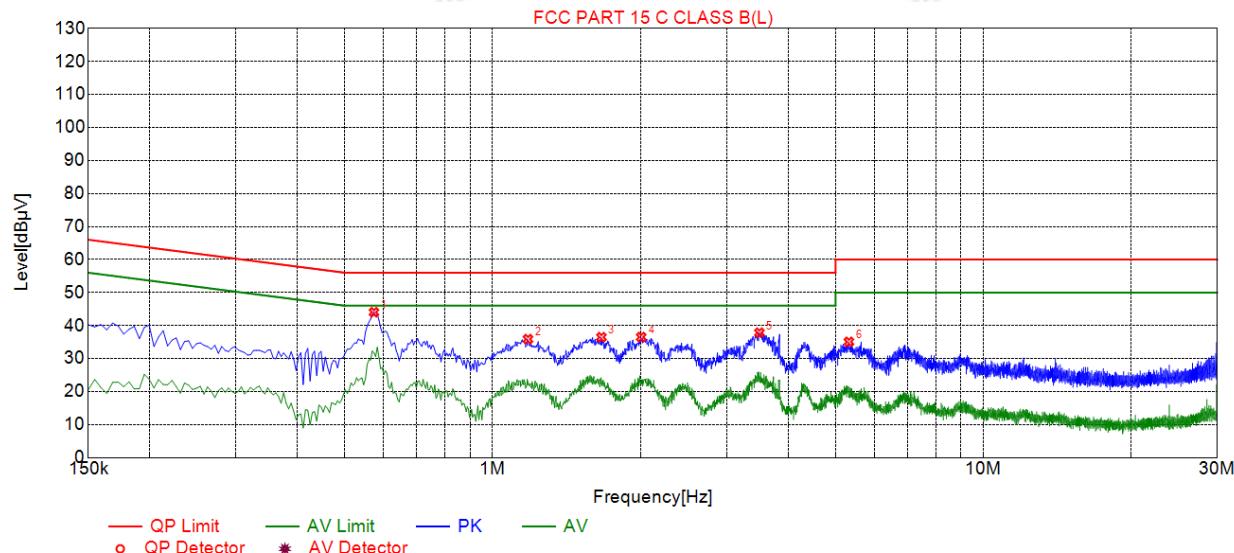

### Suspected List

NO.	Freq. [MHz]	Level [dB $\mu$ V]	Factor [dB]	Limit [dB $\mu$ V]	Margin [dB]	Reading [dB $\mu$ V]	Detector	Type
1	0.5730	44.03	19.86	56.00	11.97	24.17	PK	L
2	1.1805	35.89	19.90	56.00	20.11	15.99	PK	L
3	1.6665	36.47	19.94	56.00	19.53	16.53	PK	L
4	2.0085	36.52	19.96	56.00	19.48	16.56	PK	L
5	3.4980	37.83	20.08	56.00	18.17	17.75	PK	L
6	5.3250	35.07	20.11	60.00	24.93	14.96	PK	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



## Test Specification: Neutral

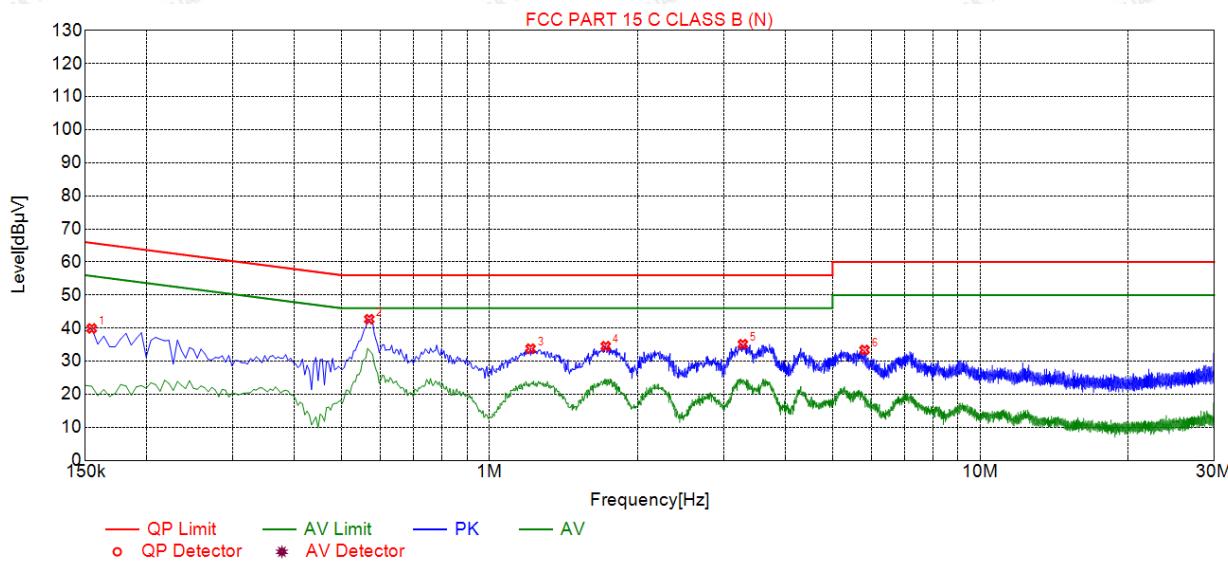

## Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1545	39.91	19.73	65.75	25.84	20.18	PK	N
2	0.5685	42.70	19.74	56.00	13.30	22.96	PK	N
3	1.2120	33.79	19.77	56.00	22.21	14.02	PK	N
4	1.7250	34.53	19.82	56.00	21.47	14.71	PK	N
5	3.2820	35.14	19.95	56.00	20.86	15.19	PK	N
6	5.8110	33.39	19.99	60.00	26.61	13.40	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



## 4. Radiated Emission Test

### 4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.490	300	20log 2400/F (kHz)	2400/F (kHz)
0.490-1.705	30	20log 24000/F (kHz)	24000/F (kHz)
1.705-30	30	20log 30	30
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### 4.2 Test Setup

#### (1) Radiated Emission Test-Up Frequency Below 30MHz

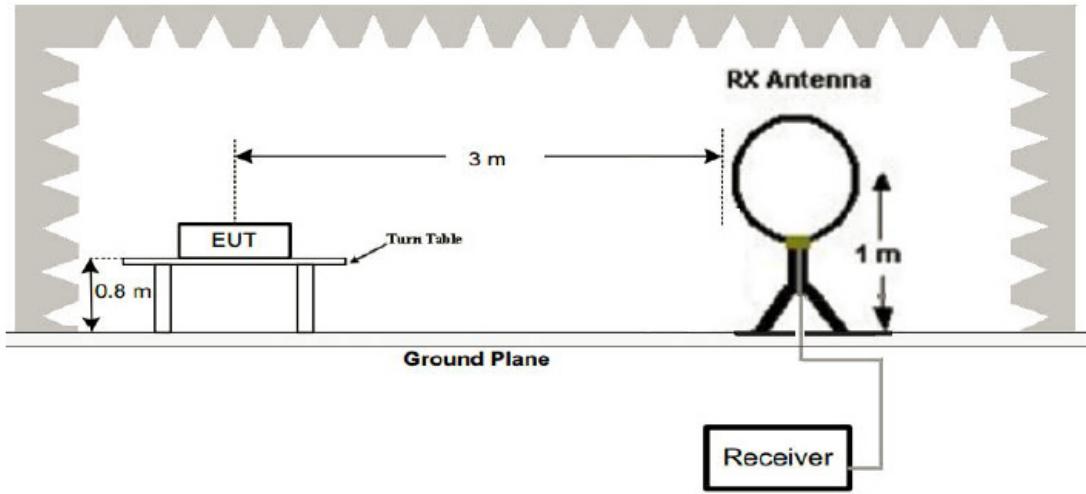


#### (2) Radiated Emission Test-Up Frequency 30MHz~1GHz

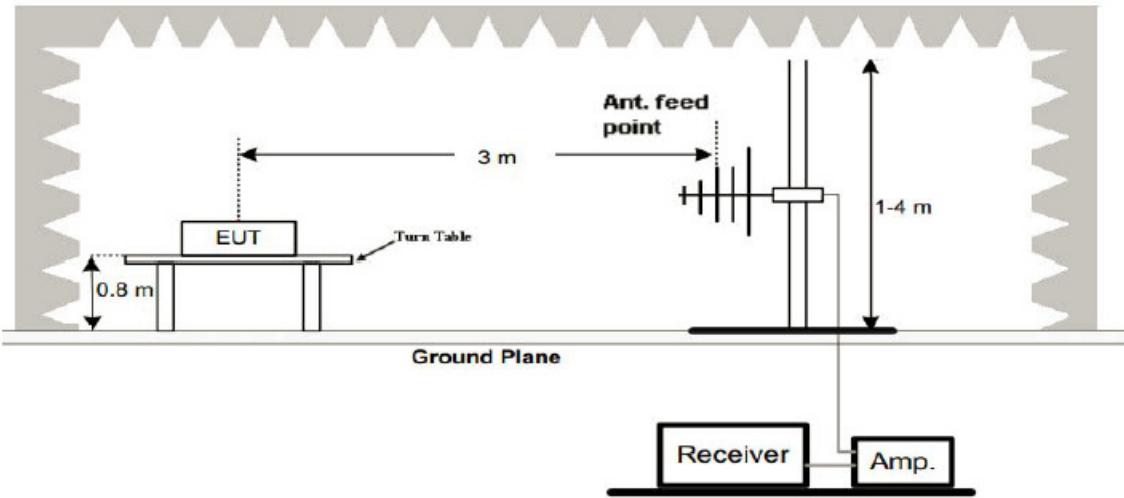



## (3) Radiated Emission Test-Up Frequency Above 1GHz

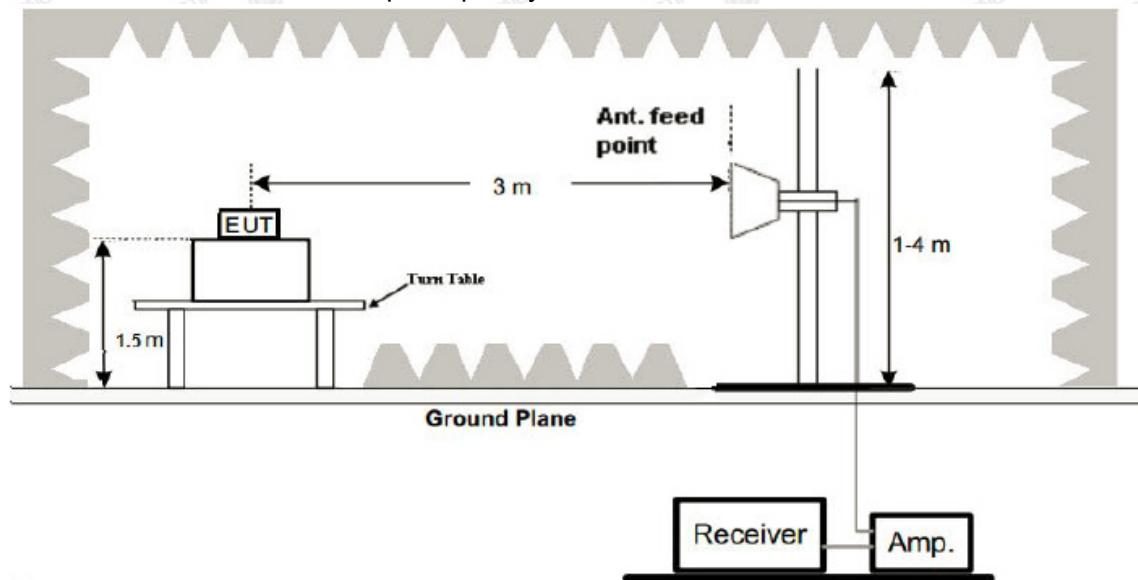

#### 4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 4.4 Test Result


PASS

All the test modes completed for test. The worst case of Radiated Emission is CH 01; the test data of this mode was reported.



## Below 1GHz Test Results:

Antenna polarity: H

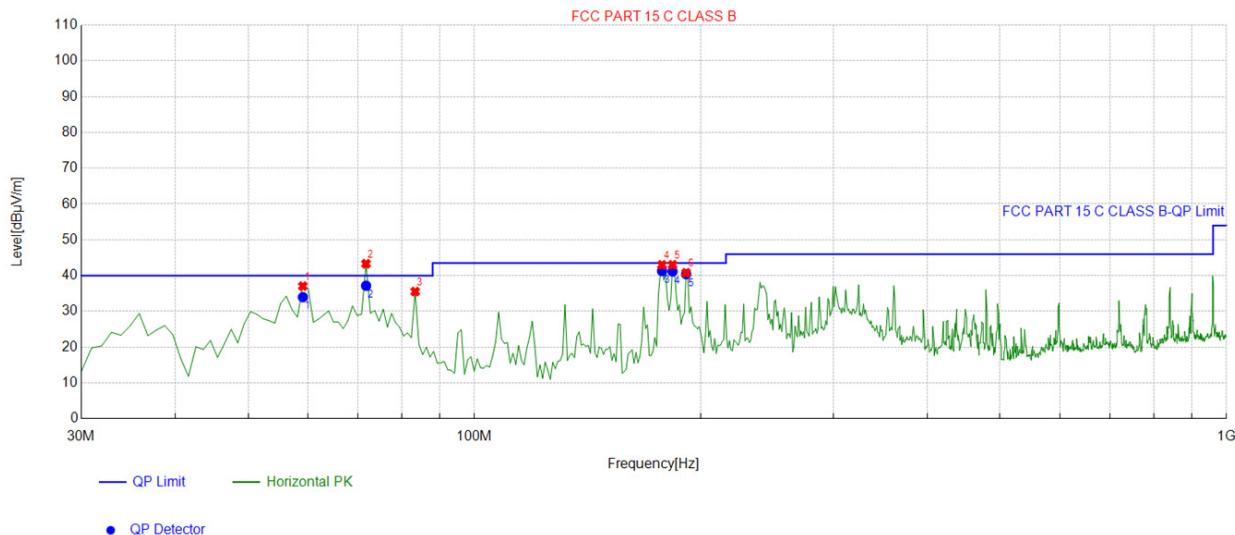

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	59.129129	-13.54	50.59	37.05	40.00	2.95	100	202	Horizontal
2	71.751752	-17.38	60.70	43.32	40.00	-3.32	100	8	Horizontal
3	83.403403	-18.05	53.58	35.53	40.00	4.47	100	3	Horizontal
4	177.58758	-16.61	59.60	42.99	43.50	0.51	100	168	Horizontal
5	183.41341	-15.63	58.64	43.01	43.50	0.49	100	168	Horizontal
6	191.18118	-15.86	56.63	40.77	43.50	2.73	100	160	Horizontal


## Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dB $\mu$ V/m]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	59.12912	-13.54	47.52	33.98	40.00	6.02	100	202	Horizontal
2	71.75175	-17.38	54.55	37.17	40.00	2.83	100	8	Horizontal
3	177.5875	-16.61	57.87	41.26	43.50	2.24	100	168	Horizontal
4	183.4134	-15.63	56.78	41.15	43.50	2.35	100	168	Horizontal
5	191.1811	-15.86	56.25	40.39	43.50	3.11	100	160	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



Antenna polarity: V

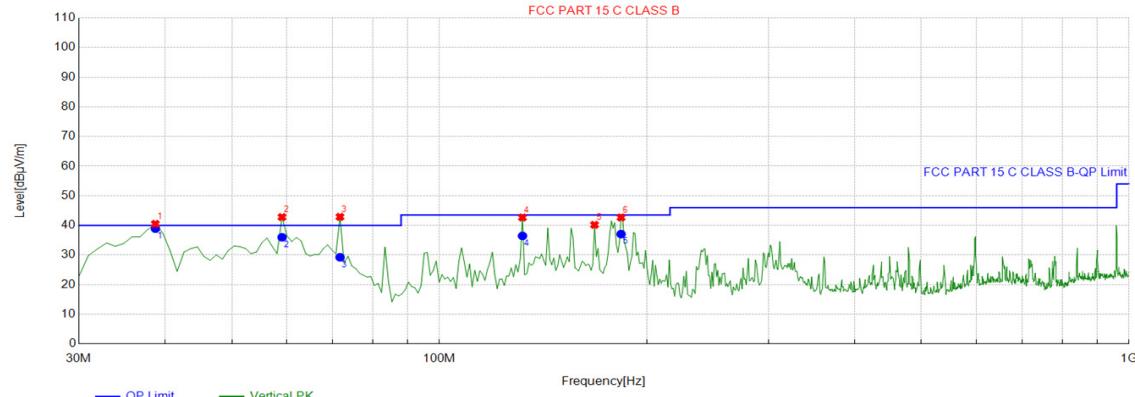

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.738739	-14.30	54.80	40.50	40.00	-0.50	100	8	Vertical
2	59.129129	-13.54	56.35	42.81	40.00	-2.81	100	94	Vertical
3	71.751752	-17.38	60.26	42.88	40.00	-2.88	100	240	Vertical
4	131.95195	-17.33	59.99	42.66	43.50	0.84	100	3	Vertical
5	167.87787	-17.31	57.49	40.18	43.50	3.32	100	137	Vertical
6	183.41341	-15.63	58.29	42.66	43.50	0.84	100	204	Vertical

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dB $\mu$ V/m]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.73873	-14.30	53.20	38.90	40.00	1.10	100	8	Vertical
2	59.12912	-13.54	49.52	35.98	40.00	4.02	100	94	Vertical
3	71.75175	-17.38	46.63	29.25	40.00	10.75	100	240	Vertical
4	131.9519	-17.33	53.78	36.45	43.50	7.05	100	3	Vertical
5	183.4134	-15.63	52.69	37.06	43.50	6.44	100	204	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

## Harmonics and Spurious Emissions

### Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Limit@3m (dB $\mu$ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.



## Above 1 GHz Test Results:

CH Low (2410MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2410	101.73	-5.84	95.89	114	-18.11	peak
2410	85.45	-5.84	79.61	94	-14.39	AVG
4820	53.67	-3.64	50.03	74	-23.97	peak
4820	37.19	-3.64	33.55	54	-20.45	AVG
7230	50.59	-0.95	49.64	74	-24.36	peak
7230	38.76	-0.95	37.81	54	-16.19	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Level-Limit.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2410	101.67	-5.84	95.83	114	-18.17	peak
2410	81.96	-5.84	76.12	94	-17.88	AVG
4820	51.43	-3.64	47.79	74	-26.21	peak
4820	39.85	-3.64	36.21	54	-17.79	AVG
7230	48.76	-0.95	47.81	74	-26.19	peak
7230	38.18	-0.95	37.23	54	-16.77	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Level-Limit.



## CH Middle (2440MHz)

## Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2440	103.57	-5.71	97.86	114	-16.14	peak
2440	74.38	-5.71	68.67	94	-25.33	AVG
4880	47.19	-3.51	43.68	74	-30.32	peak
4880	44.74	-3.51	41.23	54	-12.77	AVG
7320	48.08	-0.82	47.26	74	-26.74	peak
7320	42.35	-0.82	41.53	54	-12.47	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

## Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2440	102.67	-5.71	96.96	114	-17.04	peak
2440	81.28	-5.71	75.57	94	-18.43	AVG
4880	57.67	-3.51	54.16	74	-19.84	peak
4880	42.15	-3.51	38.64	54	-15.36	AVG
7320	51.46	-0.82	50.64	74	-23.36	peak
7320	39.73	-0.82	38.91	54	-15.09	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.



CH High (2470MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2470	105.19	-5.65	99.54	114	-14.46	peak
2470	80.37	-5.65	74.72	94	-19.28	AVG
4940	53.64	-3.43	50.21	74	-23.79	peak
4940	42.18	-3.43	38.75	54	-15.25	AVG
7410	49.72	-0.75	48.97	74	-25.03	peak
7410	38.09	-0.75	37.34	54	-16.66	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Level-Limit.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2470	104.28	-5.65	98.63	114	-15.37	peak
2470	81.76	-5.65	76.11	94	-17.89	AVG
4940	52.15	-3.43	48.72	74	-25.28	peak
4940	41.92	-3.43	38.49	54	-15.51	AVG
7410	49.78	-0.75	49.03	74	-24.97	peak
7410	39.46	-0.75	38.71	54	-15.29	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Level-Limit.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.



## 5. Band Edge

### 5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 1MHz and VBW to 3MHz, to measure the conducted peak band edge.

**5.3 Test Result****PASS**

Radiated Band Edge Test:

Operation Mode: TX CH Low (2410MHz)

Horizontal (Worst case):

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310	54.19	-5.81	48.38	74	-25.62	peak
2310	/	-5.81	/	54	/	AVG
2390	54.53	-5.84	48.69	74	-25.31	peak
2390	/	-5.84	/	54	/	AVG
2400	50.46	-5.84	44.62	74	-29.38	peak
2400	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Level-Limit.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310	56.38	-5.81	50.57	74	-23.43	peak
2310	/	-5.81	/	54	/	AVG
2390	53.74	-5.84	47.9	74	-26.1	peak
2390	/	-5.84	/	54	/	AVG
2400	52.17	-5.84	46.33	74	-27.67	peak
2400	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;  
Margin = Level-Limit.



Operation Mode: TX CH High (2470MHz)

Horizontal (Worst case):

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	54.58	-5.65	48.93	74	-25.07	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	52.13	-5.65	46.48	74	-27.52	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	54.69	-5.65	49.04	74	-24.96	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	51.73	-5.65	46.08	74	-27.92	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 6. Occupied Bandwidth Measurement

### 6.1 Test Setup

Same as Radiated Emission Measurement

### 6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW= 10KHz. VBW= 30KHz, Span= 3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

### 6.3 Measurement Equipment Used

Same as Radiated Emission Measurement

### 6.4 Test Result

**PASS**

Frequency	20dB Bandwidth (MHz)	Result
2410MHz	0.881	<b>PASS</b>
2440MHz	0.919	<b>PASS</b>
2470MHz	0.918	<b>PASS</b>

CH: 2410MHz



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

CH: 2440MHz



CH: 2470MHz



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F, Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 7. Antenna Requirement


### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Connected Construction


The antenna used in this product is a Internal antenna, need professional installation, not easy to remove. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0.56dBi.

#### Antenna

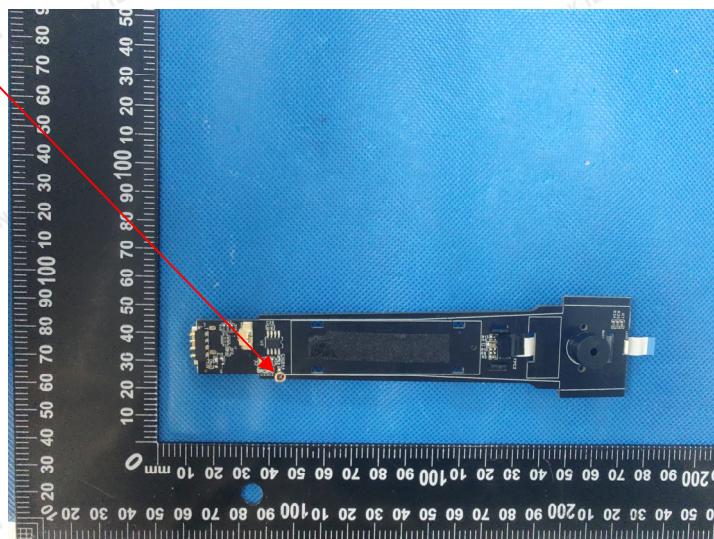



## 8. Photographs of Test

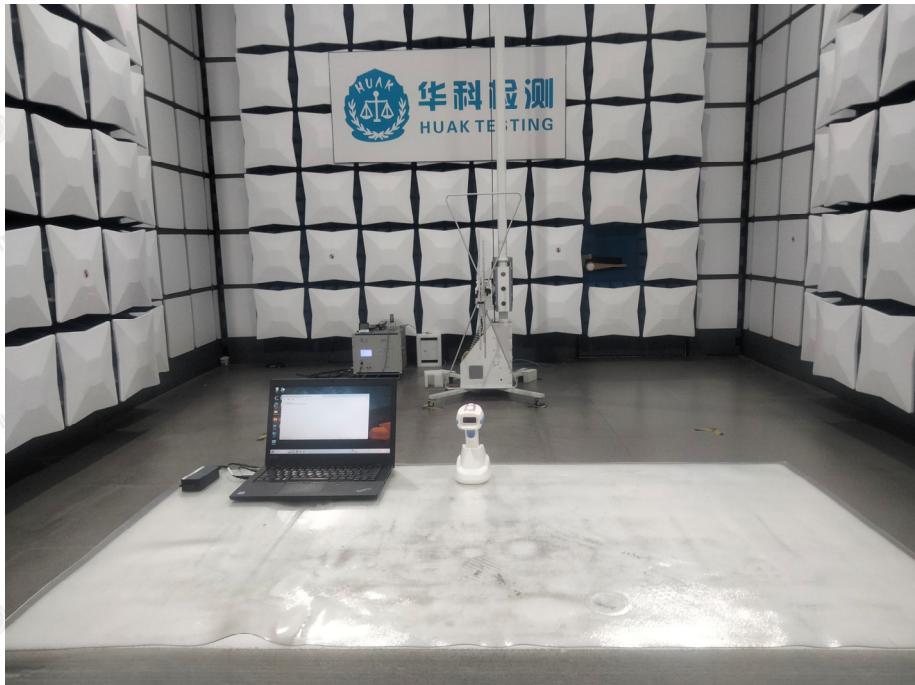**Radiated Emission**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Conducted Emission**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**9. Photos of the EUT**

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----