



TEST REPORT

Report Number. : 14014404-E2

Applicant : Schneider Electric Industries SAS
31 rue Pierre Mendes France
38050 - Grenoble Cedex 9, France

Model : 33102

Brand : Schneider Electric Industries SAS

FCC ID : 2AH7L-BCMW-V1

IC : 21522-BCMW-V1

EUT Description : Wireless Circuit Breaker Communication Module

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C: 2022
ISED RSS-247 ISSUE 2: 2017
ISED RSS-GEN ISSUE 5 + A2:2021

Date Of Issue:
2023-01-31

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2022-07-25	Initial Issue	Charles Moody
V2	2022-08-17	Revised power	Brian Kiewra
V3	2022-08-23	Correcting units in section 10.3 and limits in 11.1.1	Charles Moody
V4	2022-09-26	Revised power	Brian Kiewra
V5	2022-10-03	Revised EUT descriptor in section 6.1	Brian Kiewra
V6	2022-11-22	Revised Section 6.2 and corrected formatting issue	Brian Kiewra
V7	2022-12-09	Added 10dB attenuator to Section 8	Brian Kiewra
V8	2023-01-31	Revised Antenna Gain	Charles Moody

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES	7
5.3. MEASUREMENT UNCERTAINTY	7
5.4. SAMPLE CALCULATION	7
6. EQUIPMENT UNDER TEST	8
6.1. EUT DESCRIPTION	8
6.2. MAXIMUM OUTPUT POWER	8
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
6.4. SOFTWARE AND FIRMWARE	8
6.5. WORST-CASE CONFIGURATION AND MODE	8
6.6. DESCRIPTION OF TEST SETUP	9
7. MEASUREMENT METHOD	10
8. TEST AND MEASUREMENT EQUIPMENT	11
9. ANTENNA PORT TEST RESULTS	14
9.1. ON TIME AND DUTY CYCLE	14
9.2. 99% BANDWIDTH	15
9.2.1. BLE (1Mbps)	15
9.3. 6 dB BANDWIDTH	16
9.3.1. BLE (1Mbps)	16
9.4. OUTPUT POWER	17
9.4.1. BLE (1Mbps)	17
9.5. AVERAGE POWER	18
9.5.1. BLE (1Mbps)	18
9.6. POWER SPECTRAL DENSITY	19
9.6.1. BLE (1Mbps)	19

9.7.	CONDUCTED SPURIOUS EMISSIONS.....	20
9.7.1.	BLE (1Mbps).....	21
10.	RADIATED TEST RESULTS	22
10.1.	LIMITS AND PROCEDURE.....	22
10.2.	TRANSMITTER ABOVE 1 GHZ.....	24
10.2.1.	BLE (1Mbps).....	24
10.3.	WORST CASE BELOW 30MHZ.....	34
10.4.	WORST CASE BELOW 1 GHZ.....	36
10.5.	WORST CASE 18-26 GHZ.....	38
11.	AC POWER LINE CONDUCTED EMISSIONS	40
11.1.1.	AC Power Line Norm.....	41
12.	SETUP PHOTOS	43

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Schneider Electric Industries SAS
31 rue Pierre Mendes France
38050 - Grenoble Cedex 9, France

EUT DESCRIPTION: Wireless Circuit Breaker Communication Module

MODEL: 33102

BRAND: Schneider Electric Industries SAS

SERIAL NUMBER: Non-Serialized

SAMPLE RECEIPT DATE: 2022-07-05

DATE TESTED: 2022-07-06 – 2022-07-11


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Refer to section 2
ISED RSS-247 Issue 2	Refer to section 2
ISED RSS-GEN Issue 5 + A2	Refer to section 2

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. government.

Approved & Released For
UL LLC By:



Brian Kiewra
Project Engineer
Consumer, Medical, and IT Segment
UL LLC

Prepared By:



Charles Moody
Electrical Engineer
Consumer, Medical, and IT Segment
UL LLC

2. TEST RESULTS SUMMARY

This report contains data provided by the applicant which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Complies	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Complies	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Complies	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207 (a)	RSS-Gen 8.8	AC Power Lines Conducted Measurements	Complies	None

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, RSS-GEN Issue 5 + A2, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Radio Frequency	141.2Hz
Occupied Bandwidth, conducted	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Unwanted emissions, conducted	±1.94 dB
Power Spectral Density, conducted	±2.466 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	±3.40 dB
Humidity	±3.39 % RH
Temperature	±0.57°C
Time	±3.39 %

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Final Voltage (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \\ &\text{LISN Insertion Loss.} \\ 36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} &= 46.6 \text{ dBuV} \end{aligned}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a Wireless Circuit Breaker Communication Module.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	BLE	0.28	1.07

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

The radio utilizes a PCB antenna, with a maximum gain of 0.61 dBi.

6.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was v0.0.3.

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz and above 18GHz were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The fundamental of the EUT was investigated in its only orthogonal orientation and its only data rate (1Mbps). As provided by the manufacturer, the EUT only operates in one orientation and one data rate. Therefore, all final radiated testing was performed with the EUT in that defined orientation and data rate.

All testing performed at higher power setting than what power was measured. Manufacturer will set the device to operate at the lower power setting at which power was measured.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	T14S	PC26TDYM	-
AC to DC Power Supply	Schneider Electric	ABLM1A24025	IB215103243	-

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	6-Pin Plug	Power	<3m	Used to connect EUT to power supply

TEST SETUP

The EUT is controlled using an over-the-air communication between the support laptop and the device. This allows for a wireless control of the UCE

SETUP DIAGRAMS

Please refer to 14014404-EP1 for setup diagrams

7. MEASUREMENT METHOD

On time and Duty Cycle: ANSI C63.10 Subclause -11.6

6 dB BW: ANSI C63.10 Subclause -11.8.1

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11 and 6.10.4

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1 and 6.10.5

General Radiated Spurious Emissions: ANSI C63.10 – 2013, Section 6.3 to 6.6.

AC Power-line conducted emissions: ANSI C63.10 – 2013, Section 6.2

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Wireless Antenna Port Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	Conducted Room 2				
HI0096	Environmental Meter	Fisherbrand	14-650-118	2021-09-21	2022-09-22
PWM003	RF Power Meter	Keysight	N1911A	2021-08-30	2022-08-30
PWS005	Peak and Avg Power Sensor, 50MHz – 18GHz	Keysight	N1921A	2022-06-15	2023-06-15
SA0027	Spectrum Analyzer	Keysight	N9030A	2022-05-24	2023-05-24
-	10dB Attenuator	CentricRF	C18S2-10	2022-05-03	2023-05-03
SOFTEMI	Antenna Port Software	UL	Version 2022.5.4		

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2022-04-05	2023-04-05
s/n 210701941	Environmental Meter	Fisher Scientific	15-077-963	2021-08-16	2023-08-16
LISN003	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2021-08-16	2022-08-16
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2021-08-17	2022-08-17
ATA222	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2022-04-05	2023-04-05
PS214	AC Power Source	Elgar	CW2501M (s/n 1523A02396)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
AT0067	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-05-24	2023-05-24
	Gain-Loss Chains				
C4-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-20	2023-05-20
	Receiver & Software				
206496	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-02-15	2023-02-15
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
s/n 210701942	Environmental Meter	Fisher Scientific	15-077-963	2021-8-16	2023-08-16

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	0.009-30MHz				
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2021-08-19	2022-08-19
	30-1000 MHz				
AT0073	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2021-08-30	2022-08-30
	18-40 GHz				
AT0063	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2021-11-04	2022-11-04
	Gain-Loss Chains				
C2-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2022-05-10	2023-05-10
C2-SAC02	Gain-loss string: 25-1000MHz	Various	Various	2022-05-10	2023-05-10
C2-SAC04	Gain-loss string: 18-40GHz	Various	Various	2022-05-10	2023-05-10
	Receiver & Software				
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-03-08	2023-03-08
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
s/n 181474409	Environmental Meter	Fisher Scientific	15-077-963	2021-09-27	2022-09-27

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
BLE	0.258	0.624	0.413	41.35	7.67	3.876

DUTY CYCLE PLOTS

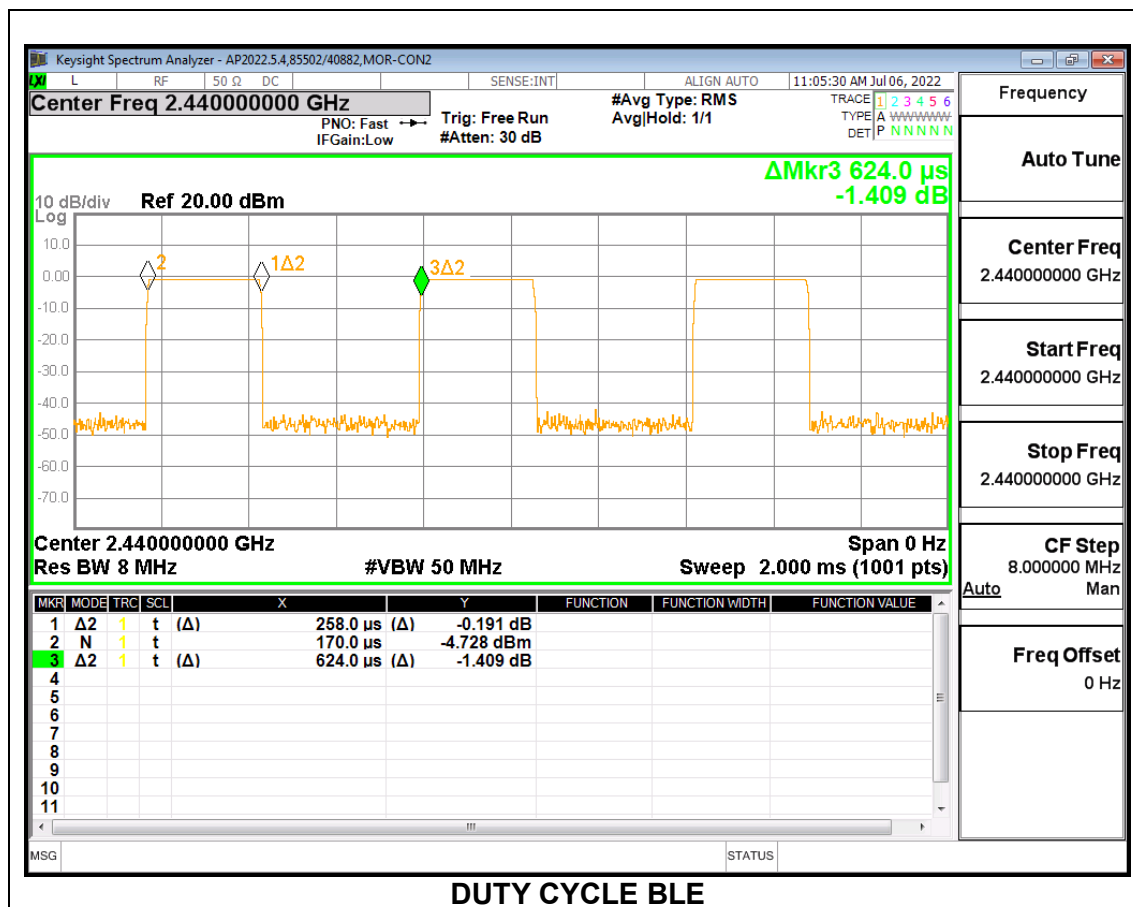

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

9.2.1. BLE (1Mbps)

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0277
Middle	2440	1.0256
High	2480	1.0284



9.3. 6 dB BANDWIDTH


LIMITS

FCC §15.247 (a) (2)
RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

9.3.1. BLE (1Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6570	0.5
Middle	2440	0.6510	0.5
High	2480	0.6480	0.5

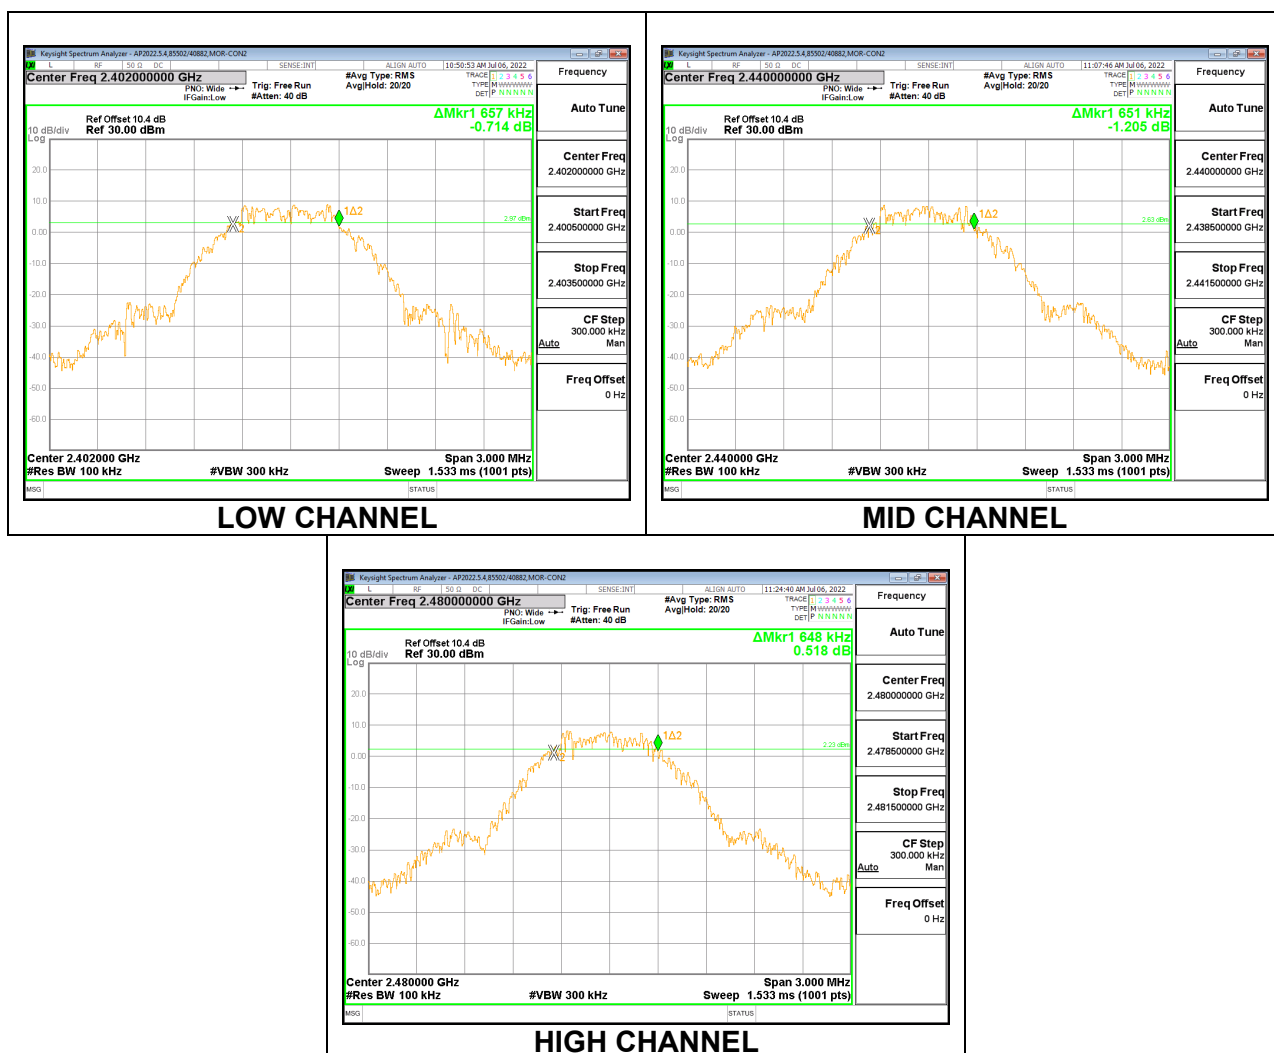

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)
RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.4 dB (including 9.65 dB pad and 0.75 dB cable) was entered as an offset in the power meter.

The power output was measured on the EUT antenna port using SMA cable with 9.65 dB attenuator connected to a power meter via wideband average power sensor. Peak output power was read directly from power meter.

RESULTS

9.4.1. BLE (1Mbps)

Tested By:	85502/40882
Date:	2022-07-06

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	0.280	30	-29.720
Middle	2440	-0.180	30	-30.180
High	2480	-0.630	30	-30.630

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a gated average power meter.

The cable assembly insertion loss of 10.4 dB (including 9.65 dB pad and 0.75 dB cable) was entered as an offset in the power meter.

The power output was measured on the EUT antenna port using SMA cable with 9.65 dB attenuator connected to a power meter via wideband average power sensor. Average output power was read directly from power meter.

RESULTS

9.5.1. BLE (1Mbps)

Tested By:	85502/40882
Date:	2022-07-06

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	-0.04
Middle	2440	-0.52
High	2480	-1.05

9.6. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)


RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

9.6.1. BLE (1Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2402	-6.316	8	-14.32
Middle	2440	-6.696	8	-14.70
High	2480	-7.441	8	-15.44

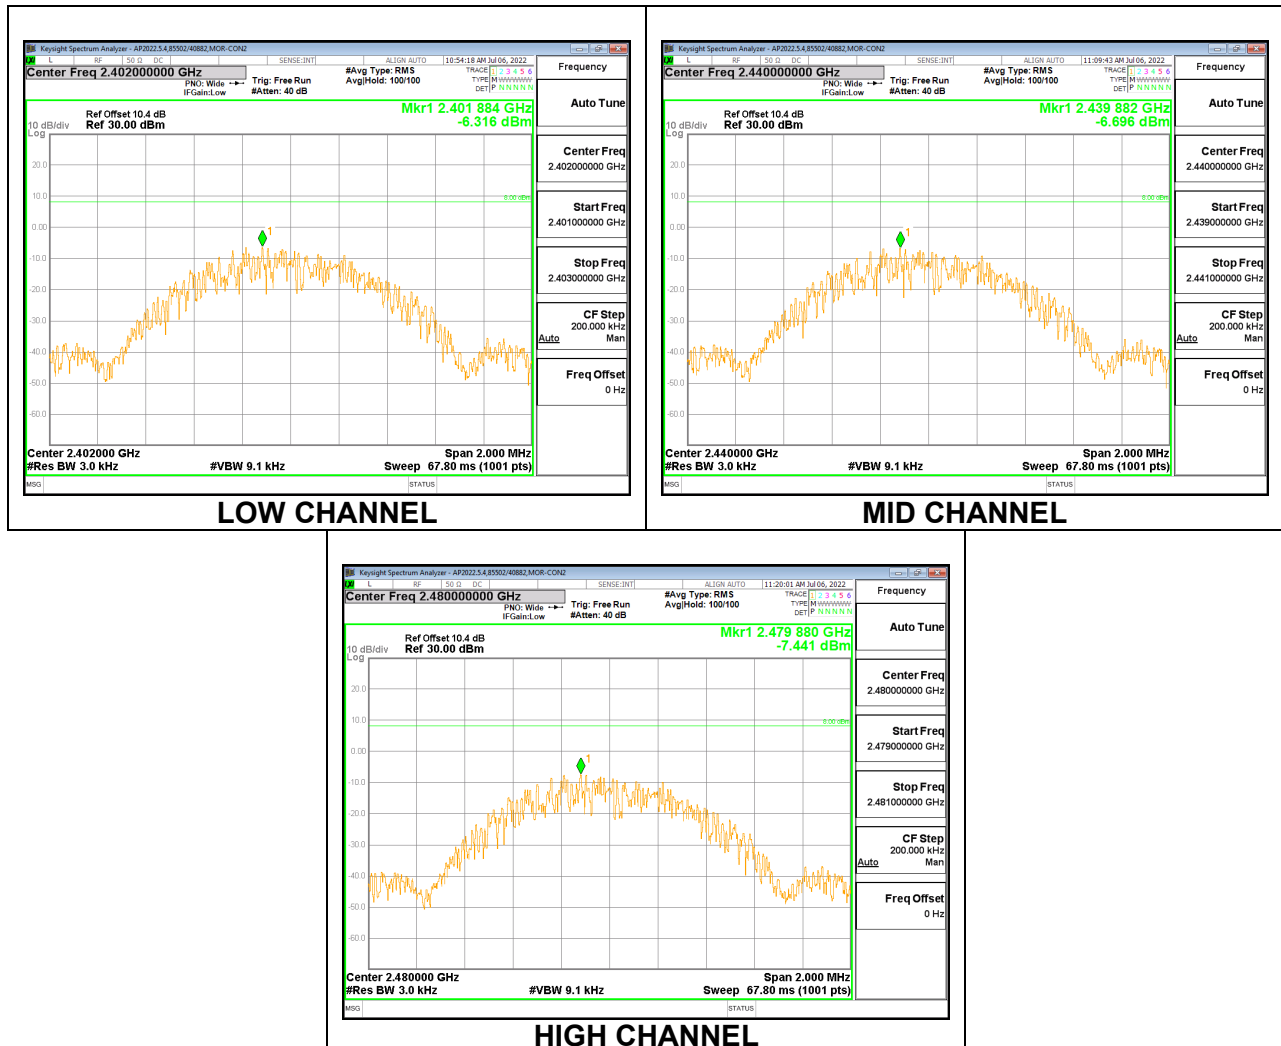

9.7. CONDUCTED SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)
RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is -20 dBc.

RESULTS

9.7.1. BLE (1Mbps)

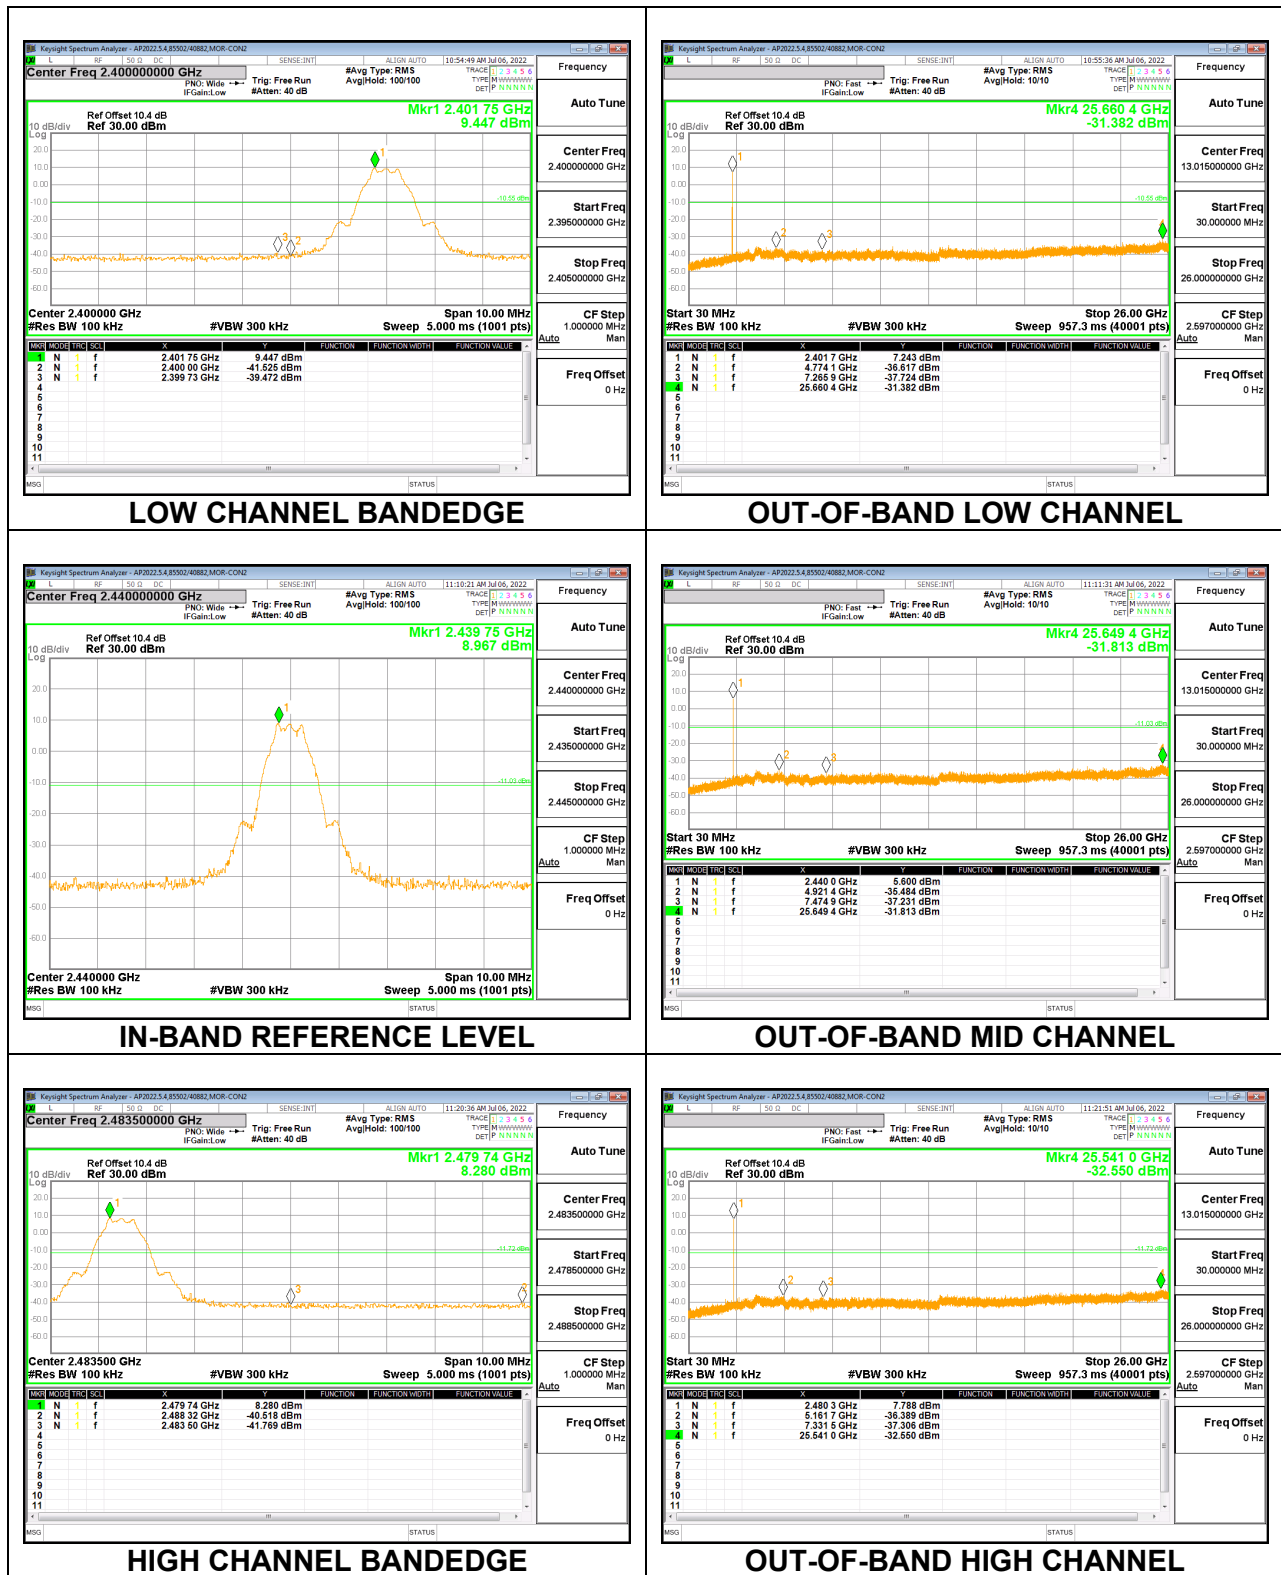

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uA/m) at 3 m	Field Strength Limit (dBuA/m) at 3 m
0.009-0.490	6.37/F(kHz) @ 300 m	-
0.490-1.705	6.37/F(kHz) @ 30 m	-
1.705 - 30	.08 @ 30m	-
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements. Linear Voltage Averaging was used.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

3D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel).

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. BLE (1Mbps)

Antenna 1

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

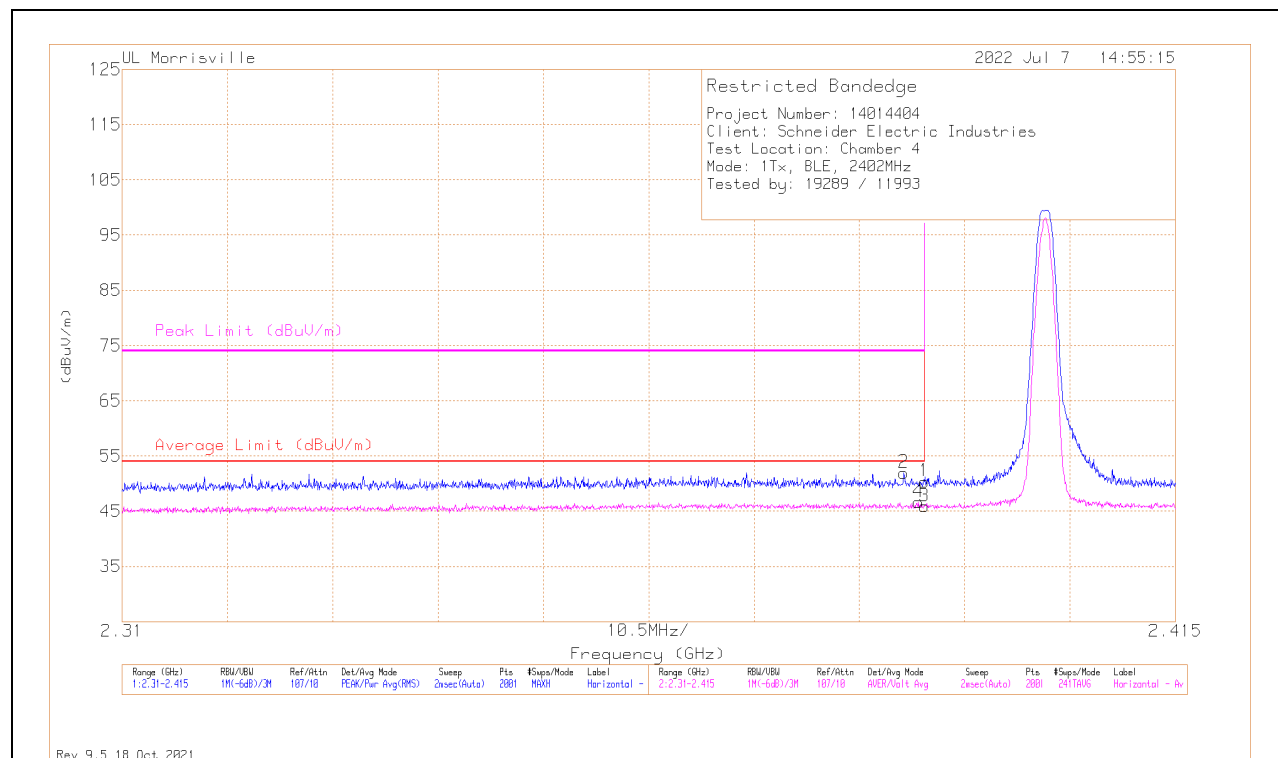

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38996	31.8	Pk	32.2	-13.6	0	50.4	-	-	74	-23.6	333	236	H
2	*** 2.38791	33.35	Pk	32.2	-13.6	0	51.95	-	-	74	-22.05	333	236	H
3	*** 2.38996	19.62	ADV	32.2	-13.6	7.67	45.89	54	-8.11	-	-	333	236	H
4	*** 2.38938	20.38	ADV	32.2	-13.6	7.67	46.65	54	-7.35	-	-	333	236	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

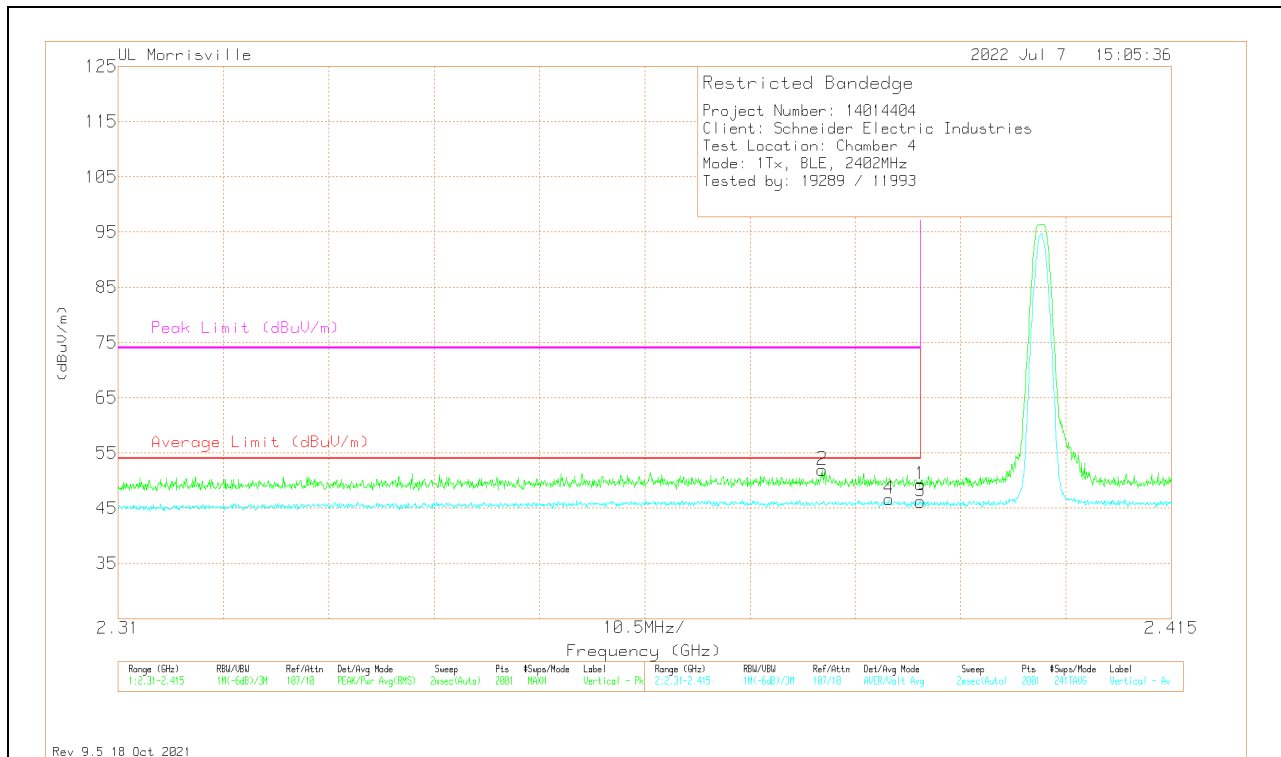

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38996	30.74	Pk	32.2	-13.6	0	49.34	-	-	74	-24.66	359	294	V
2	*** 2.38019	33.35	Pk	32.2	-13.6	0	51.95	-	-	74	-22.05	359	294	V
3	*** 2.38996	19.96	ADV	32.2	-13.6	7.67	46.23	54	-7.77	-	-	359	294	V
4	*** 2.38686	20.43	ADV	32.2	-13.6	7.67	46.7	54	-7.3	-	-	359	294	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

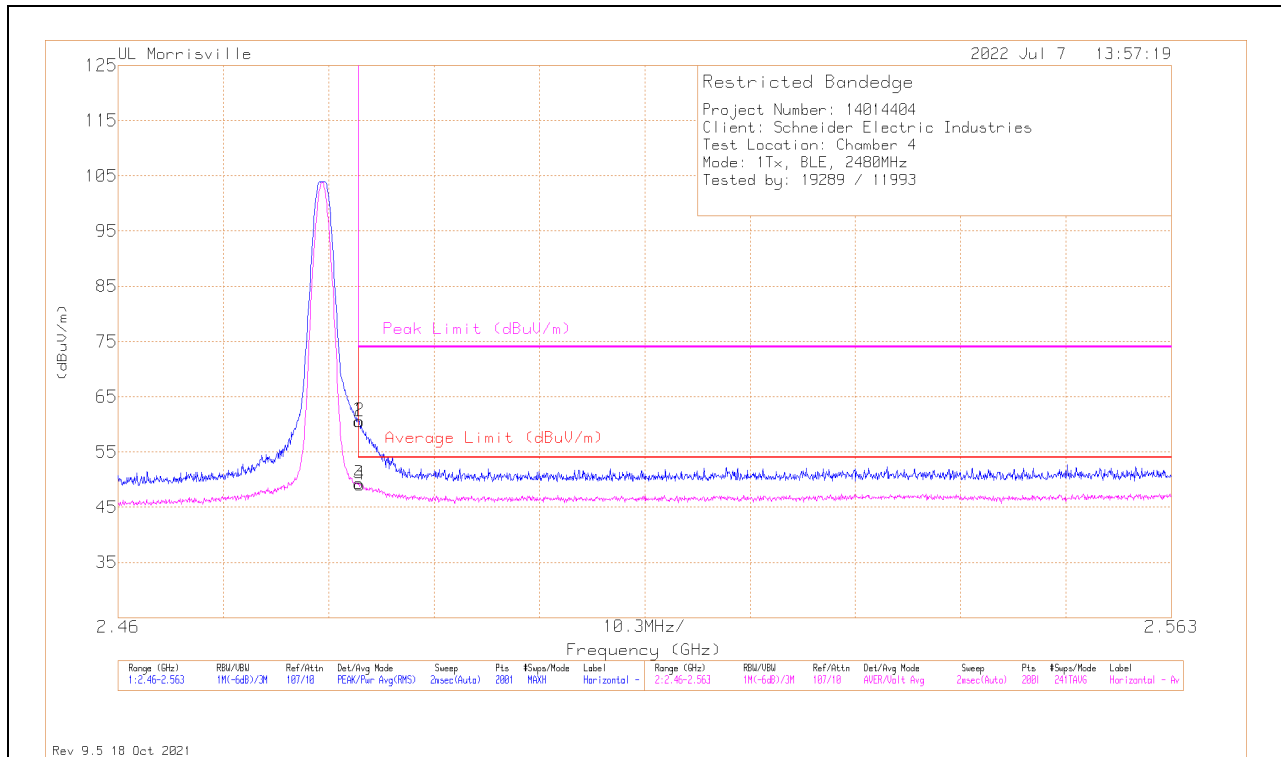

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.48354	41.69	Pk	32.6	-13.7	0	60.59	-	-	74	-13.41	42	271	H
2	*** 2.48359	41.7	Pk	32.6	-13.7	0	60.6	-	-	74	-13.4	42	271	H
3	*** 2.48354	22.76	ADV	32.6	-13.7	7.67	49.33	54	-4.67	-	-	42	271	H
4	*** 2.48364	22.55	ADV	32.6	-13.7	7.67	49.12	54	-4.88	-	-	42	271	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

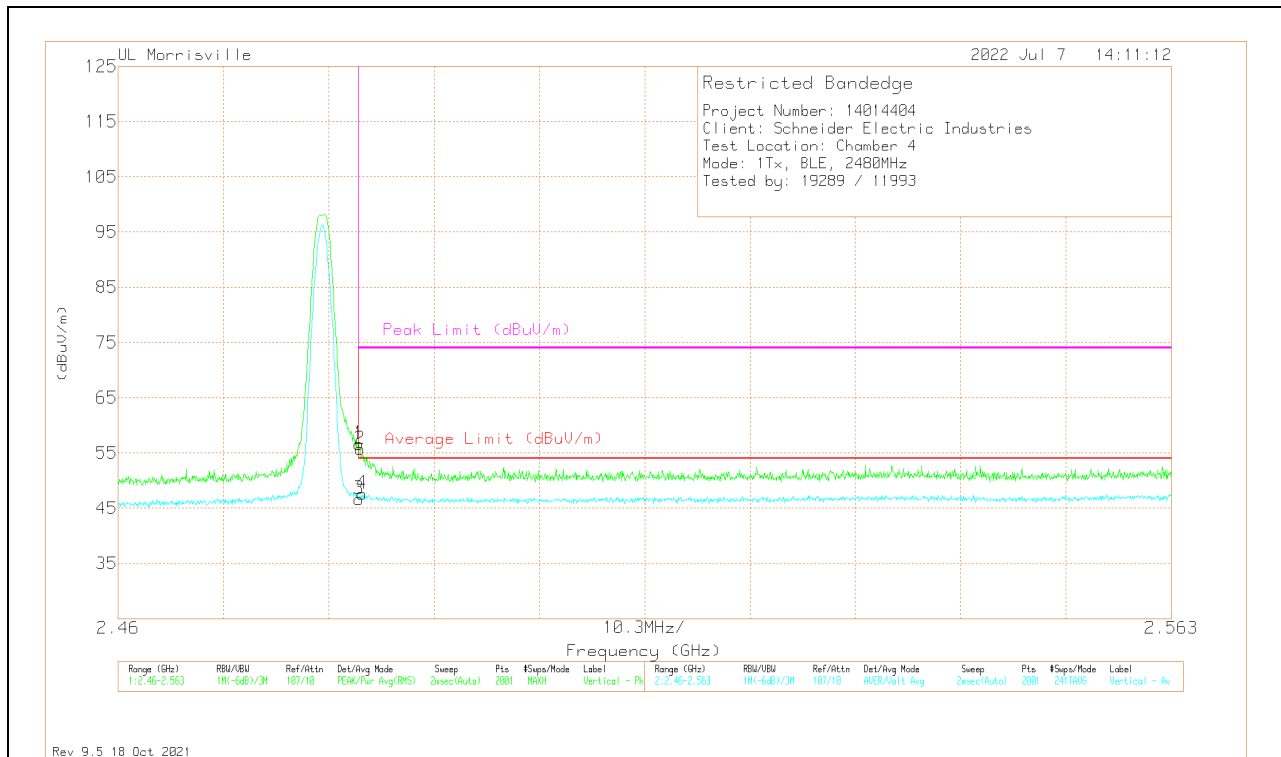

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.48354	37.77	Pk	32.6	-13.7	0	56.67	-	-	74	-17.33	15	307	V
2	*** 2.48369	36.85	Pk	32.6	-13.7	0	55.75	-	-	74	-18.25	15	307	V
3	*** 2.48354	20.09	ADV	32.6	-13.7	7.68	46.67	54	-7.33	-	-	15	307	V
4	*** 2.48384	21.06	ADV	32.6	-13.7	7.68	47.64	54	-6.36	-	-	15	307	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

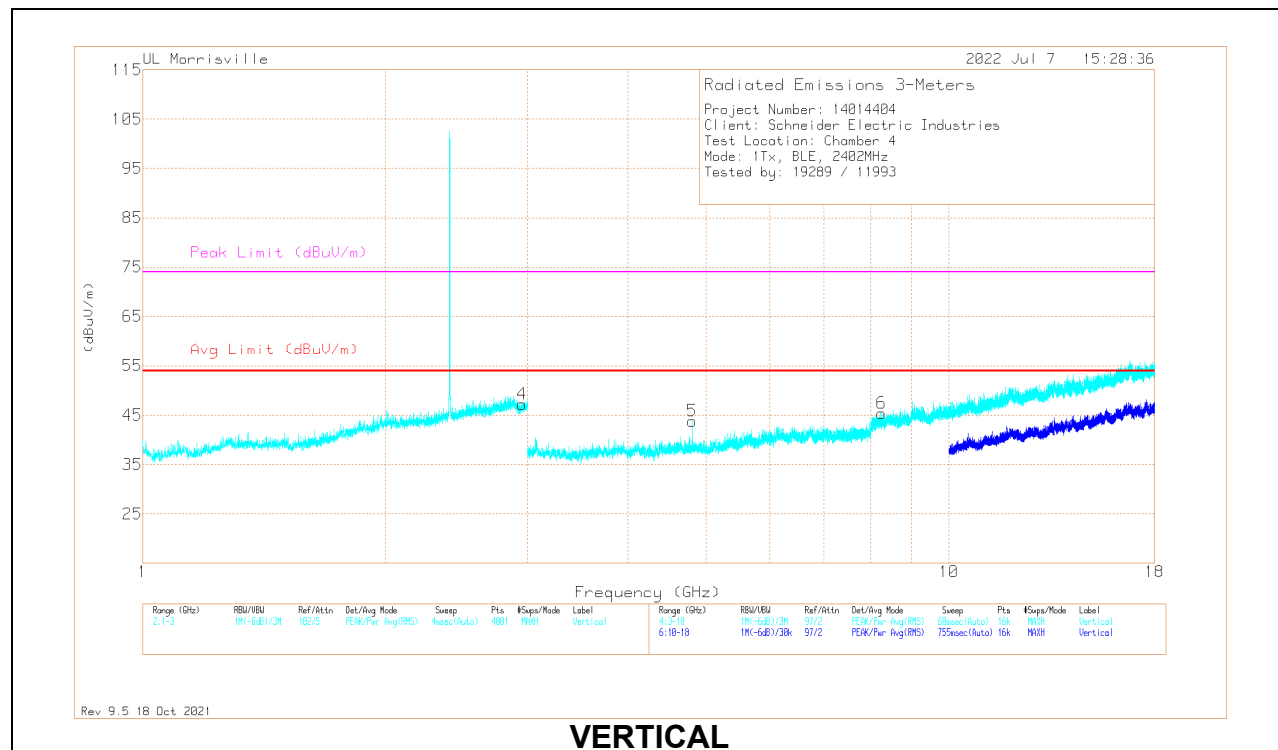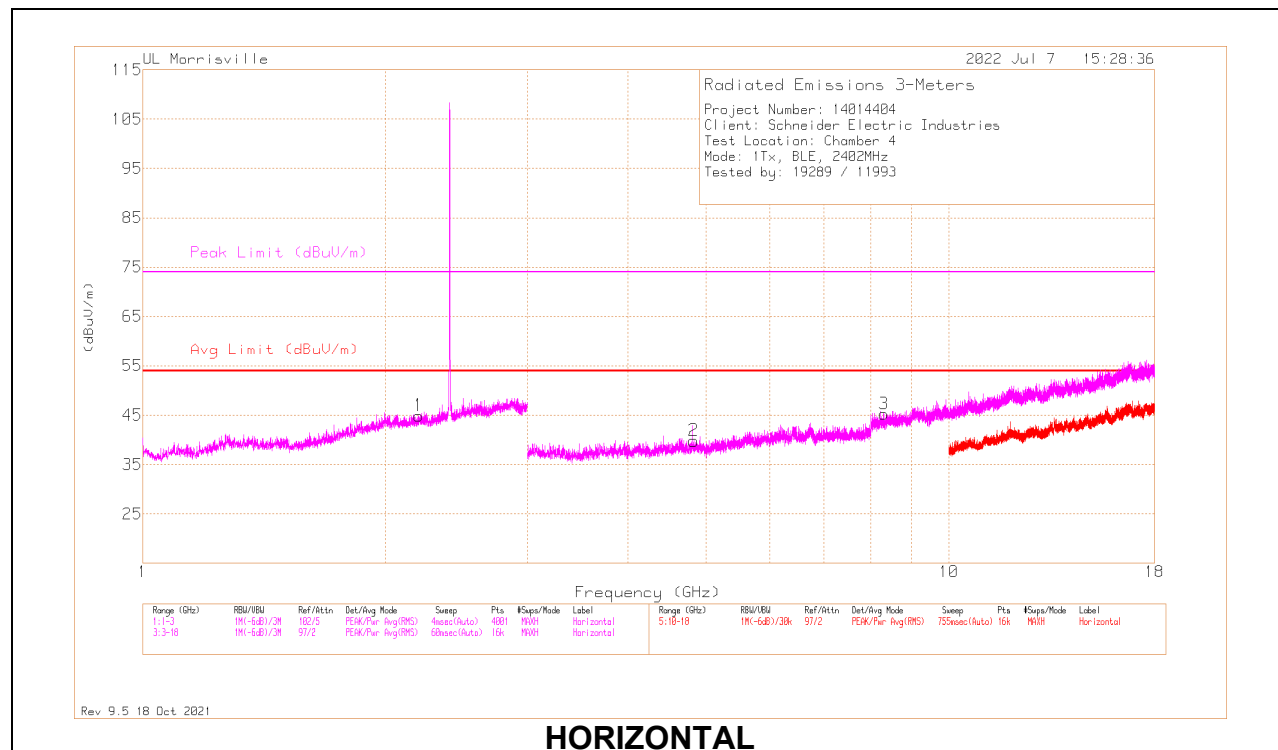

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 4.82531	37.71	Pk	34.1	-32	0	39.81	54	-14.19	74	-34.19	0-360	100	H
3	* ** 8.31281	36.61	Pk	35.7	-27	0	45.31	54	-8.69	74	-28.69	0-360	100	H
5	* ** 4.80375	41.52	Pk	34.1	-31.8	0	43.82	54	-10.18	74	-30.18	0-360	200	V
6	* ** 8.24906	37.04	Pk	35.7	-27.3	0	45.44	54	-8.56	74	-28.56	0-360	200	V
1	2.1985	26.93	Pk	32	-14	0	44.93	-	-	-	-	0-360	100	H
4	2.957	27.08	Pk	32.7	-12.5	0	47.28	-	-	-	-	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

MID CHANNEL RESULTS

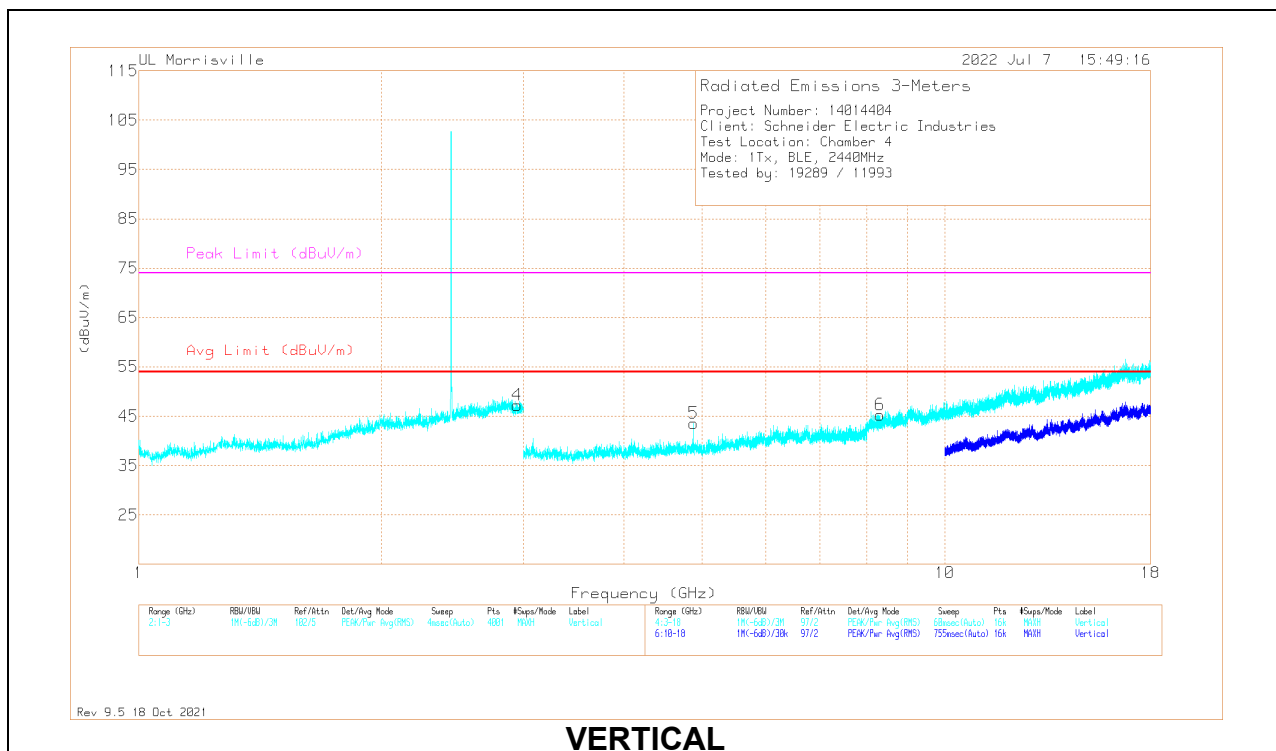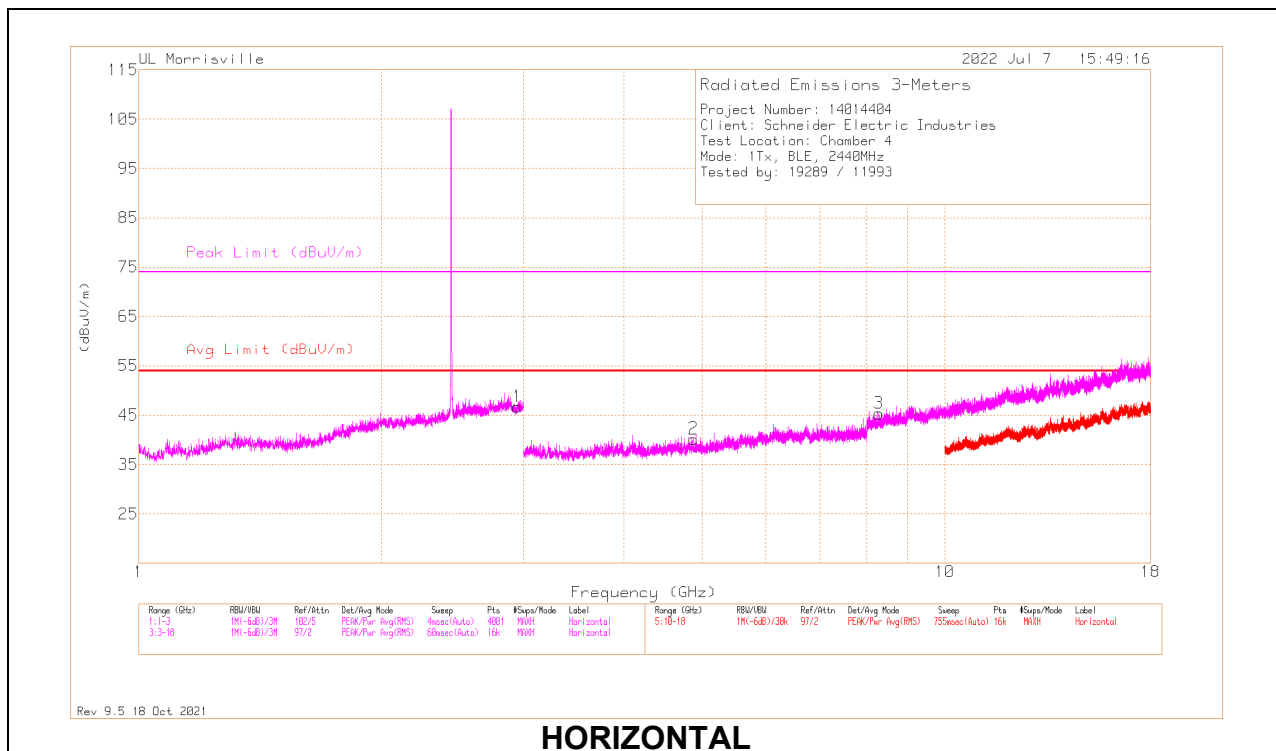

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 4.87969	38.1	Pk	34	-31.9	0	40.2	54	-13.8	74	-33.8	0-360	100	H
3	* ** 8.27906	36.73	Pk	35.7	-27.1	0	45.33	54	-8.67	74	-28.67	0-360	100	H
5	* ** 4.87969	41.45	Pk	34	-31.9	0	43.55	54	-10.45	74	-30.45	0-360	200	V
6	* ** 8.31188	36.59	Pk	35.7	-27	0	45.29	54	-8.71	74	-28.71	0-360	200	V
4	2.9475	27.18	Pk	32.7	-12.6	0	47.28	-	-	-	-	0-360	200	V
1	2.951	26.58	Pk	32.7	-12.6	0	46.68	-	-	-	-	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

HIGH CHANNEL RESULTS

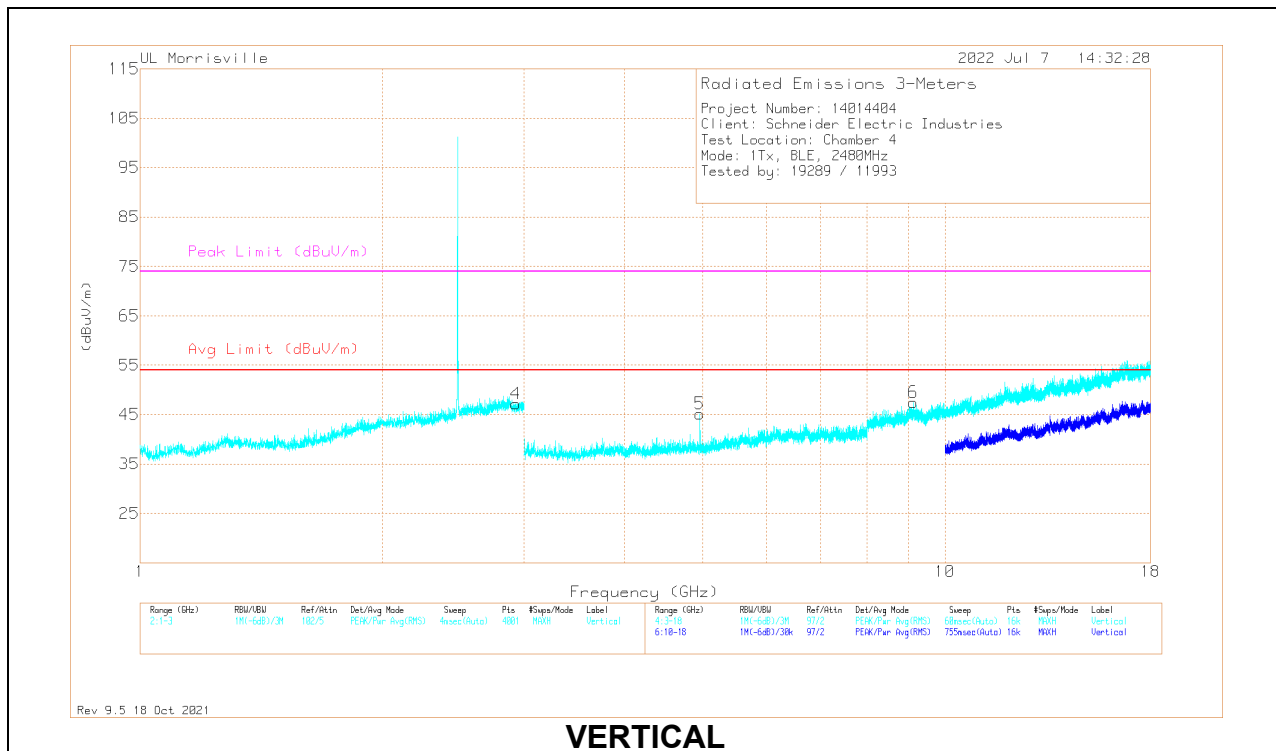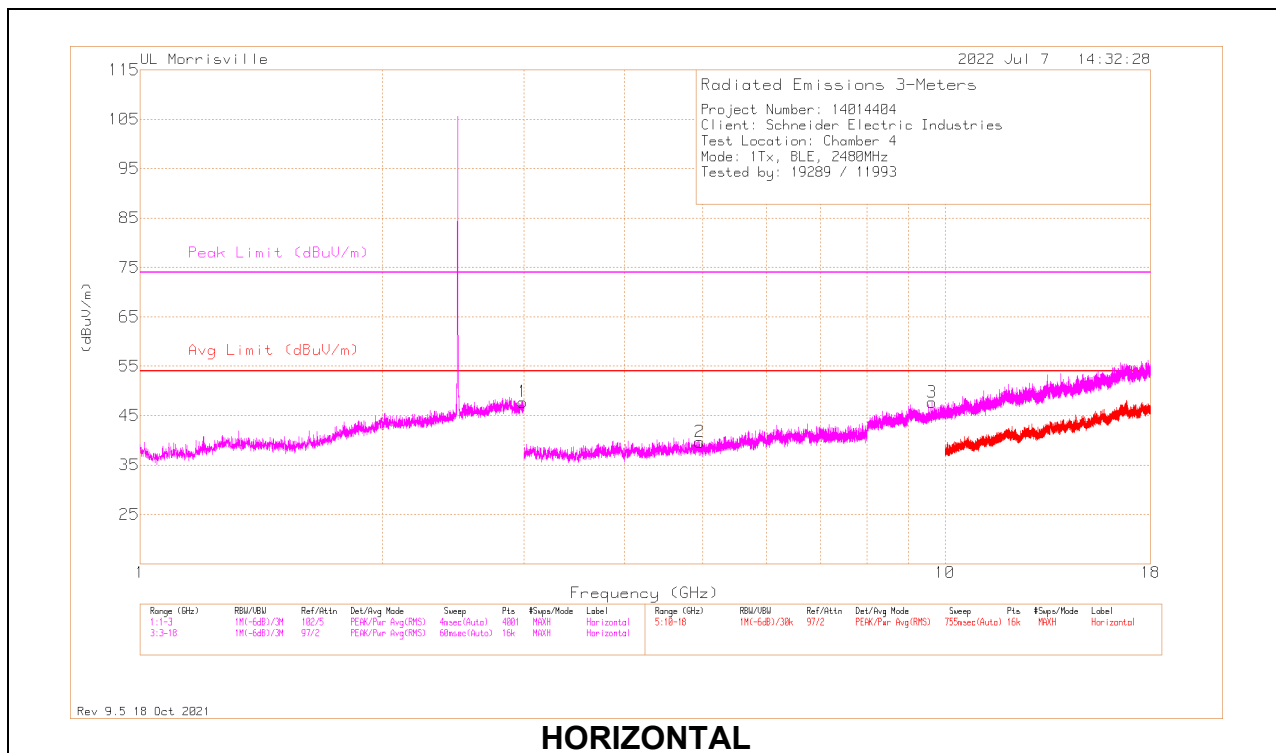

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* ** 4.9575	37.17	Pk	34	-31.5	0	39.67	54	-14.33	74	-34.33	0-360	100	H
5	* ** 4.95938	42.65	Pk	34	-31.5	0	45.15	54	-8.85	74	-28.85	0-360	200	V
6	* ** 9.13031	37.06	Pk	36.2	-25.8	0	47.46	54	-6.54	74	-26.54	0-360	200	V
4	2.93	27.28	Pk	32.6	-12.7	0	47.18	-	-	-	-	0-360	200	V
1	2.9865	27.47	Pk	32.9	-12.6	0	47.77	-	-	-	-	0-360	100	H
3	9.63188	36.48	Pk	36.7	-25.5	0	47.68	-	-	-	-	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

10.3. WORST CASE BELOW 30MHZ

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

Note: All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.

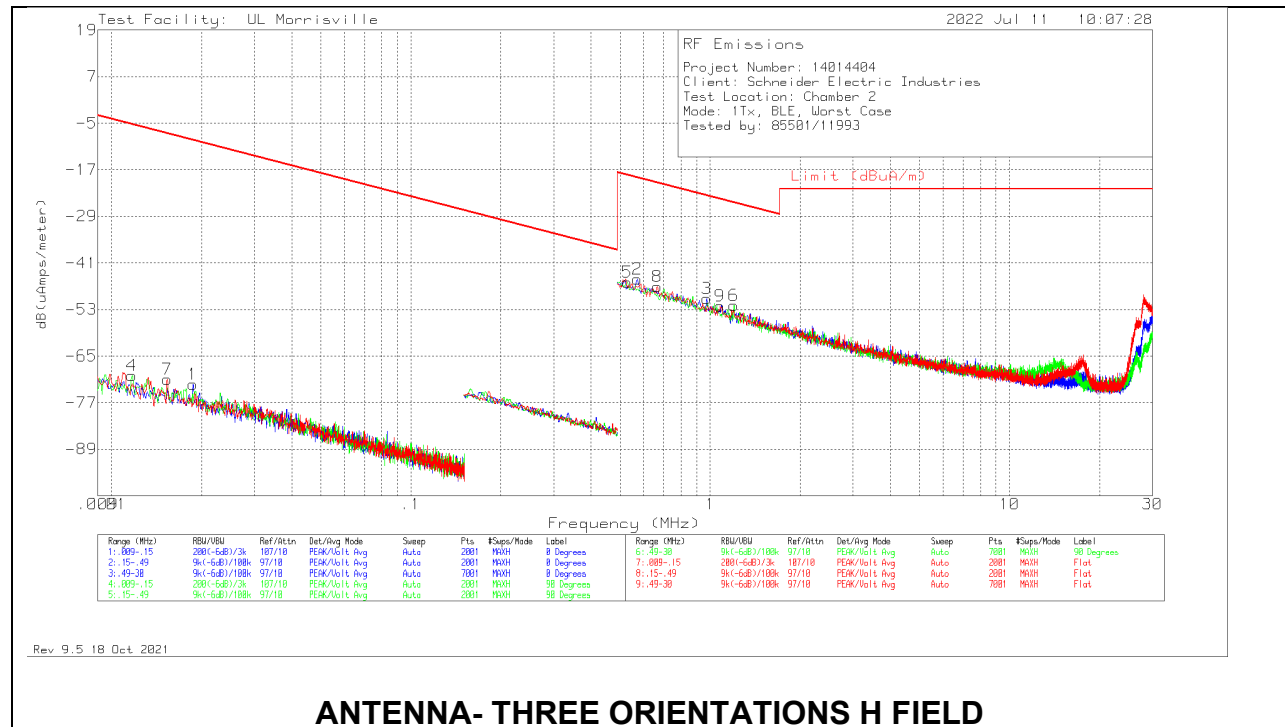


ANTENNA- THREE ORIENTATIONS H FIELD

Below 30MHz Data H FIELD

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0079 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uAmps/meter)	QP/AV Limit (dBuA/m)	PK Limit (dBuA/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Loop Angle
4	.0117	43.69	Pk	-33.8	.1	-80	-70.01	-5.26	14.74	-64.75	0-360	401	90 degs
7	.01539	44.3	Pk	-35.4	.1	-80	-71	-7.64	12.36	-63.36	0-360	401	Flat
1	.01873	44.45	Pk	-36.9	.1	-80	-72.35	-9.34	10.66	-63.01	0-360	401	0 degs
5	.52794	34.27	Pk	-40.3	.1	-40	-45.93	-18.35	-	-27.58	0-360	401	90 degs
2	.5701	35.01	Pk	-40.3	.1	-40	-45.19	-19.02	-	-26.17	0-360	401	0 degs
8	.66707	32.94	Pk	-40.2	.2	-40	-47.06	-20.38	-	-26.68	0-360	401	Flat
3	.97484	29.89	Pk	-40.2	.2	-40	-50.11	-23.67	-	-26.44	0-360	401	0 degs
9	1.08024	27.87	Pk	-40.2	.2	-40	-52.13	-24.57	-	-27.56	0-360	401	Flat
6	1.19829	28.03	Pk	-40.2	.2	-40	-51.97	-25.47	-	-26.5	0-360	401	90 degs

Pk - Peak detector

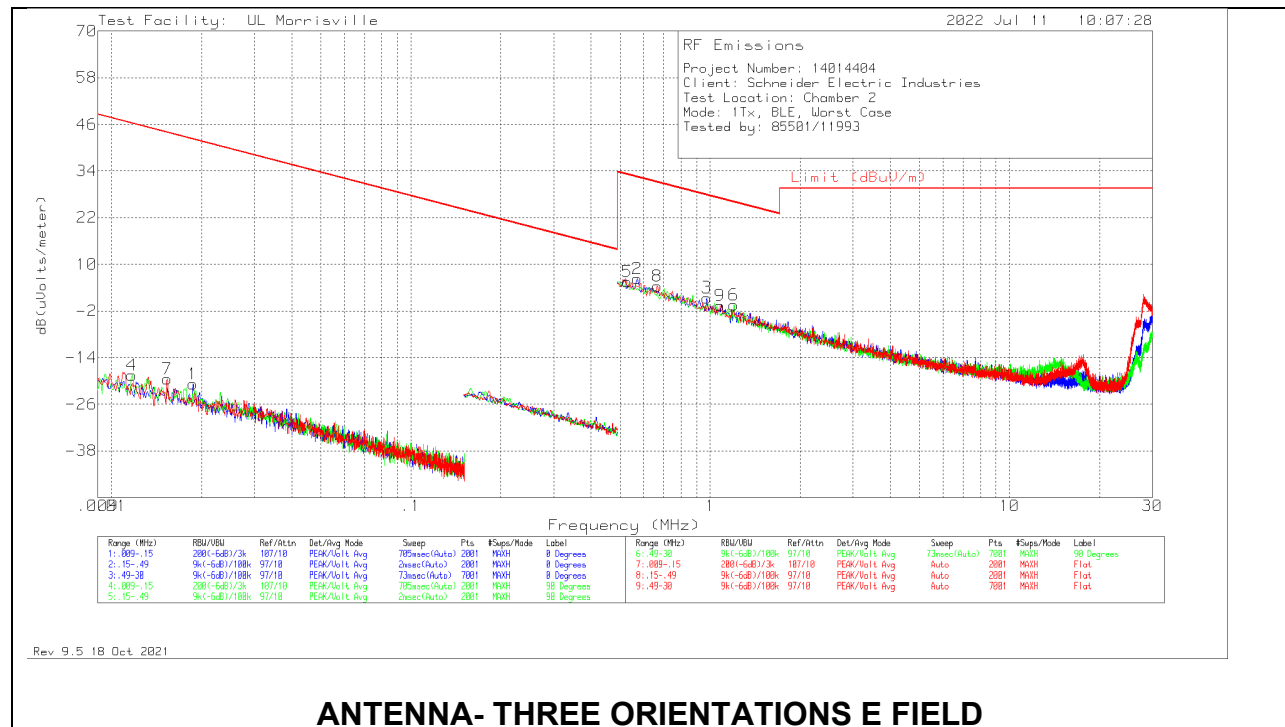

ANTENNA- THREE ORIENTATIONS E FIELD



Below 30MHz Data E FIELD

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0079 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Loop Angle
4	.0117	43.69	Pk	17.7	.1	-80	-18.51	46.24	66.24	-64.75	0-360	401	90 degs
7	.01539	44.3	Pk	16.1	.1	-80	-19.5	43.86	63.86	-63.36	0-360	401	Flat
1	.01873	44.45	Pk	14.6	.1	-80	-20.85	42.16	62.16	-63.01	0-360	401	0 degs
5	.52794	34.27	Pk	11.2	.1	-40	5.57	33.15	-	-27.58	0-360	401	90 degs
2	.5701	35.01	Pk	11.2	.1	-40	6.31	32.48	-	-26.17	0-360	401	0 degs
8	.66707	32.94	Pk	11.3	.2	-40	4.44	31.12	-	-26.68	0-360	401	Flat
3	.97484	29.89	Pk	11.3	.2	-40	1.39	27.83	-	-26.44	0-360	401	0 degs
9	1.08024	27.87	Pk	11.3	.2	-40	-.63	26.93	-	-27.56	0-360	401	Flat
6	1.19829	28.03	Pk	11.3	.2	-40	-.47	26.03	-	-26.5	0-360	401	90 degs

Pk - Peak detector

10.4. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

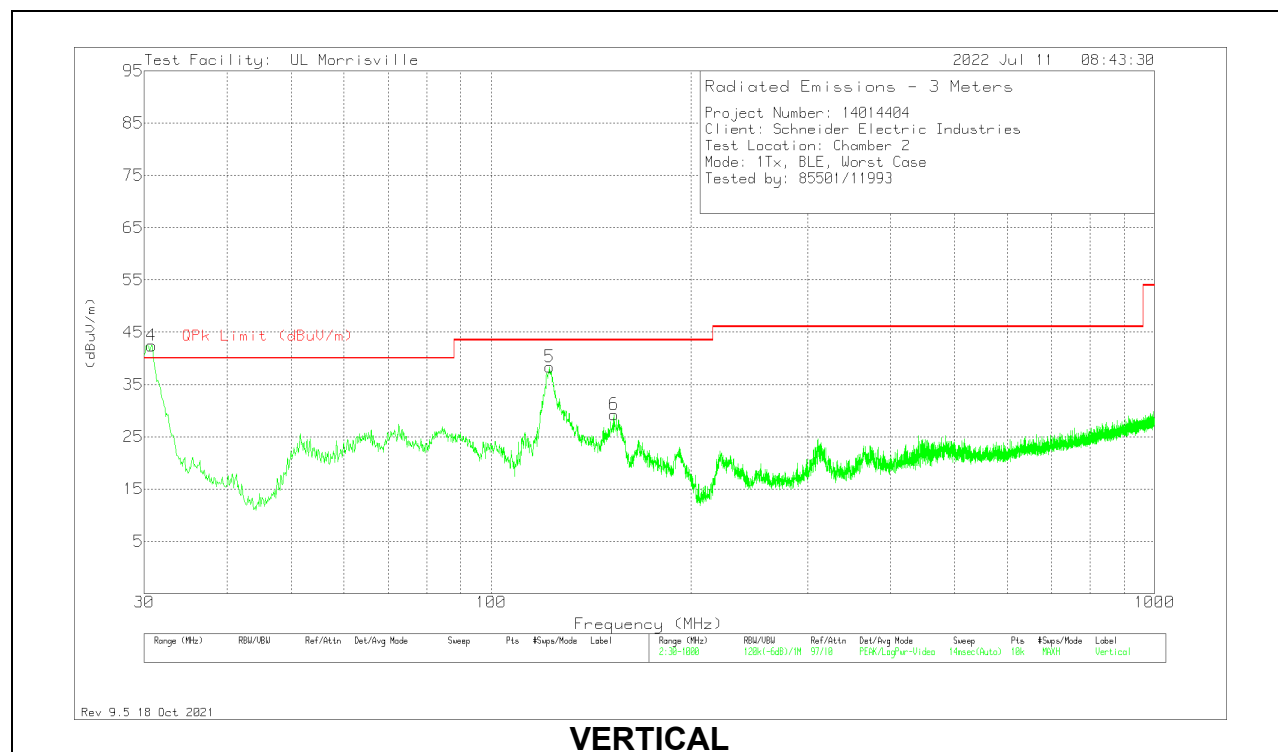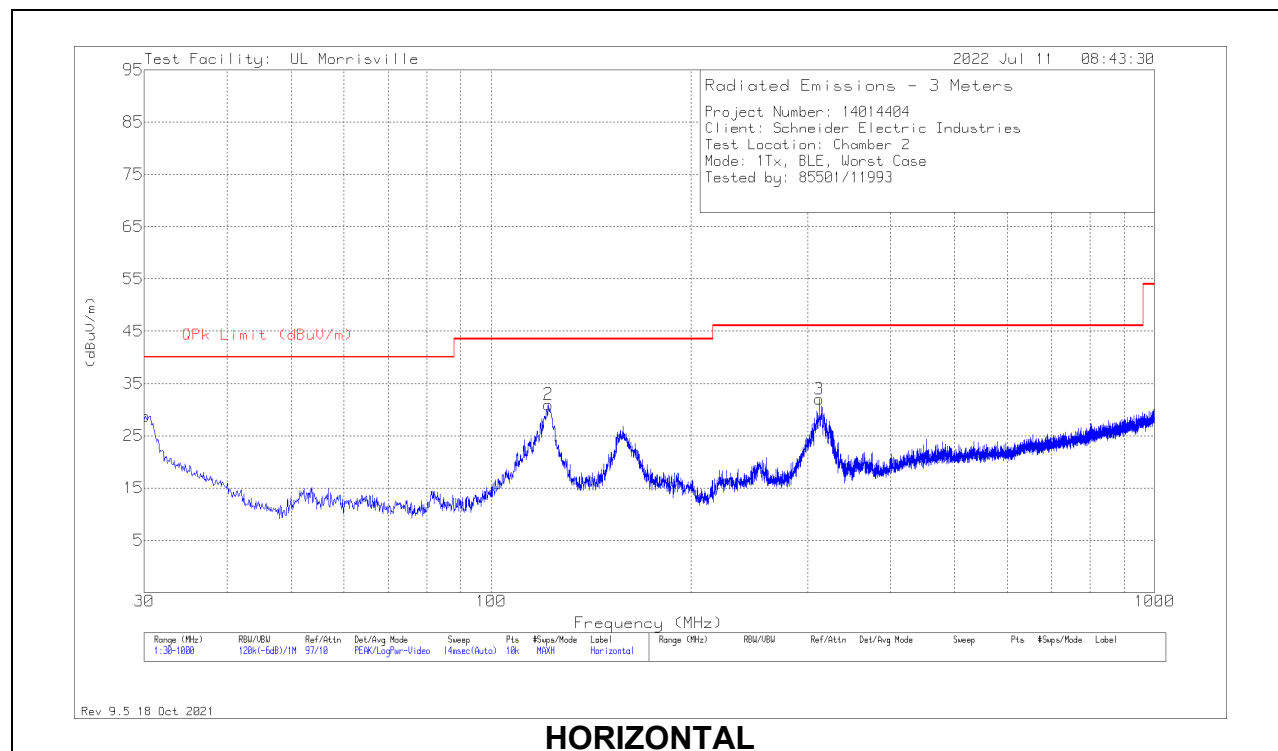

Below 1GHz Data



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0073 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.097	33.59	Pk	26.7	-31.5	28.79	40	-11.21	0-360	399	H
4	30.6264	44.77	Qp	26.4	-31.5	39.67	40	-.33	236	101	V
2	121.956	41.26	Pk	20	-30.3	30.96	43.52	-12.56	0-360	199	H
5	122.3659	44.86	Qp	20	-30.3	34.56	43.52	-8.96	249	102	V
6	153.287	40.76	Pk	18.5	-30	29.26	43.52	-14.26	0-360	101	V
3	312.464	40.79	Pk	19.9	-28.7	31.99	46.02	-14.03	0-360	99	H

Pk - Peak detector

Qp - Quasi-Peak detector

10.5. WORST CASE 18-26 GHZ

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

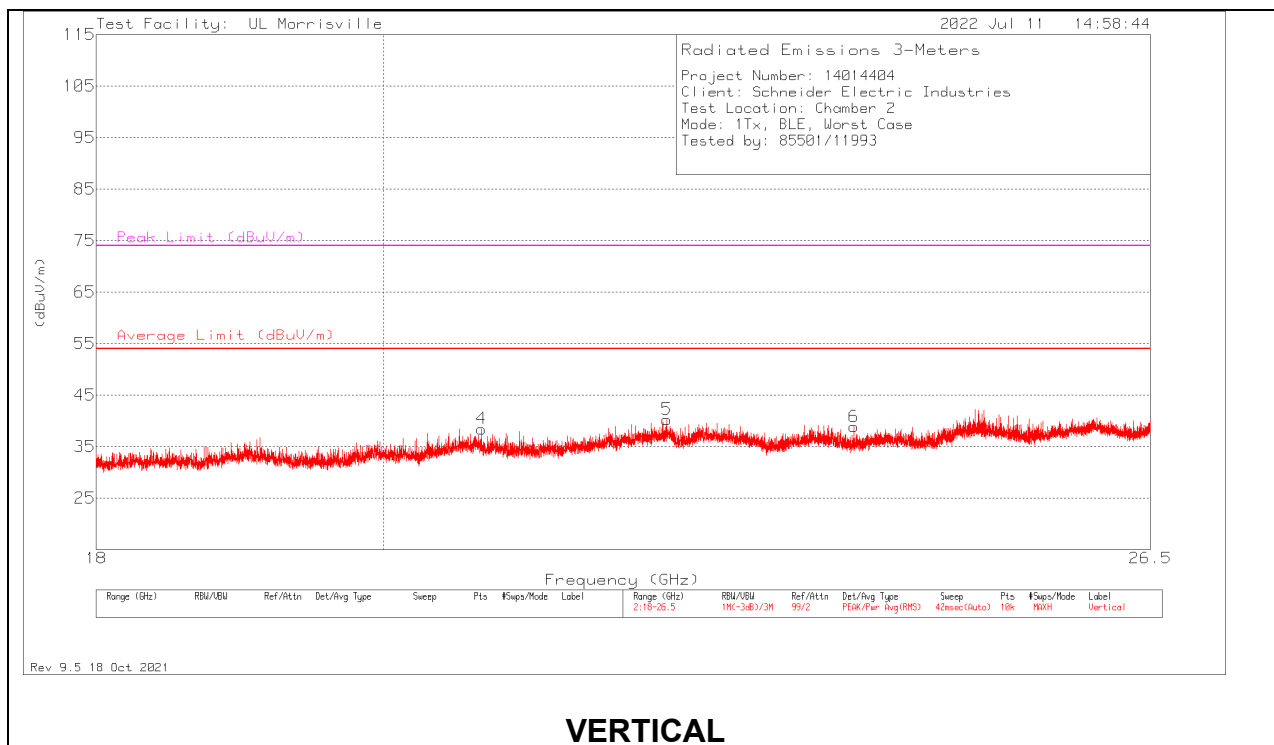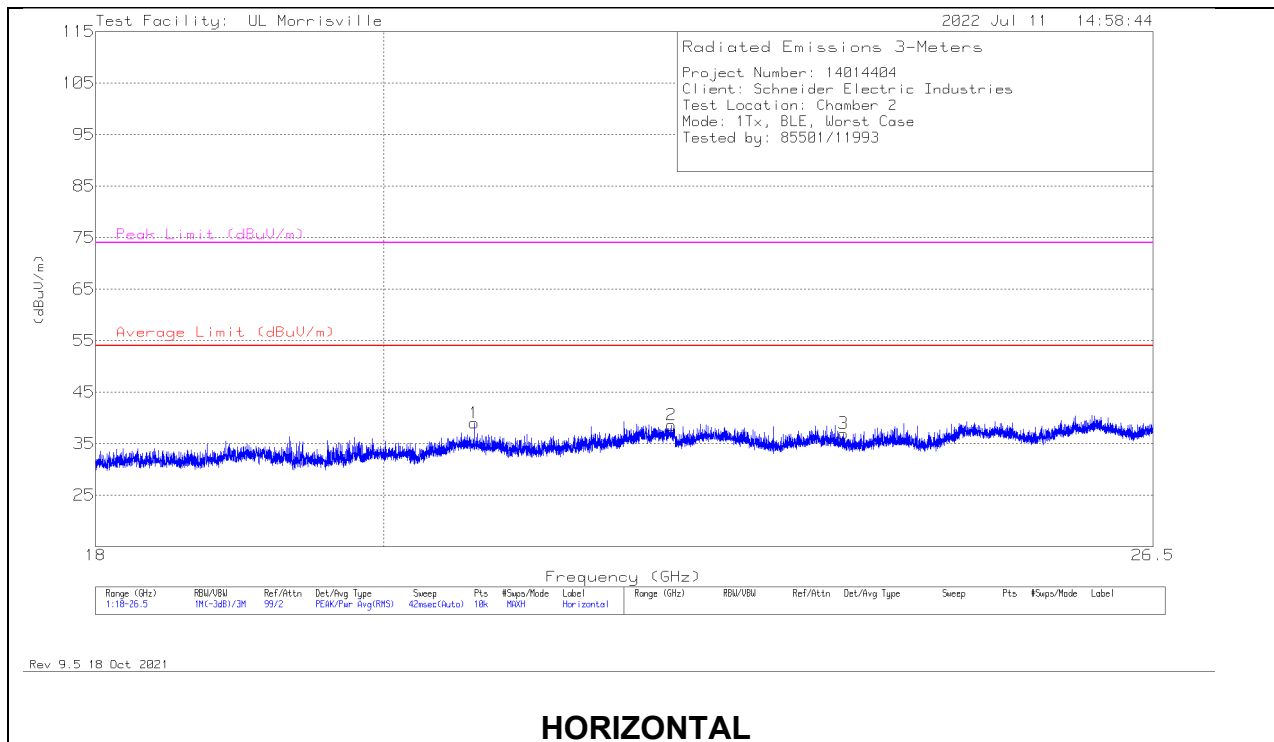

18 – 26GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0063 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 20.67553	43.6	Pk	33.9	-38.5	39	54	-15	74	-35	0-360	250	H
2	* ** 22.21898	40.11	Pk	36.8	-38.3	38.61	54	-15.39	74	-35.39	0-360	101	H
3	* ** 23.66468	39.77	Pk	34.9	-37.7	36.97	54	-17.03	74	-37.03	0-360	101	H
4	* ** 20.73418	43.07	Pk	34	-38.6	38.47	54	-15.53	74	-35.53	0-360	300	V
5	* ** 22.19348	41.69	Pk	36.9	-38.3	40.29	54	-13.71	74	-33.71	0-360	300	V
6	* ** 23.76837	41.7	Pk	34.9	-37.7	38.9	54	-15.1	74	-35.1	0-360	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both lines.

RESULTS

11.1.1. AC Power Line Norm


LINE 1 RESULTS

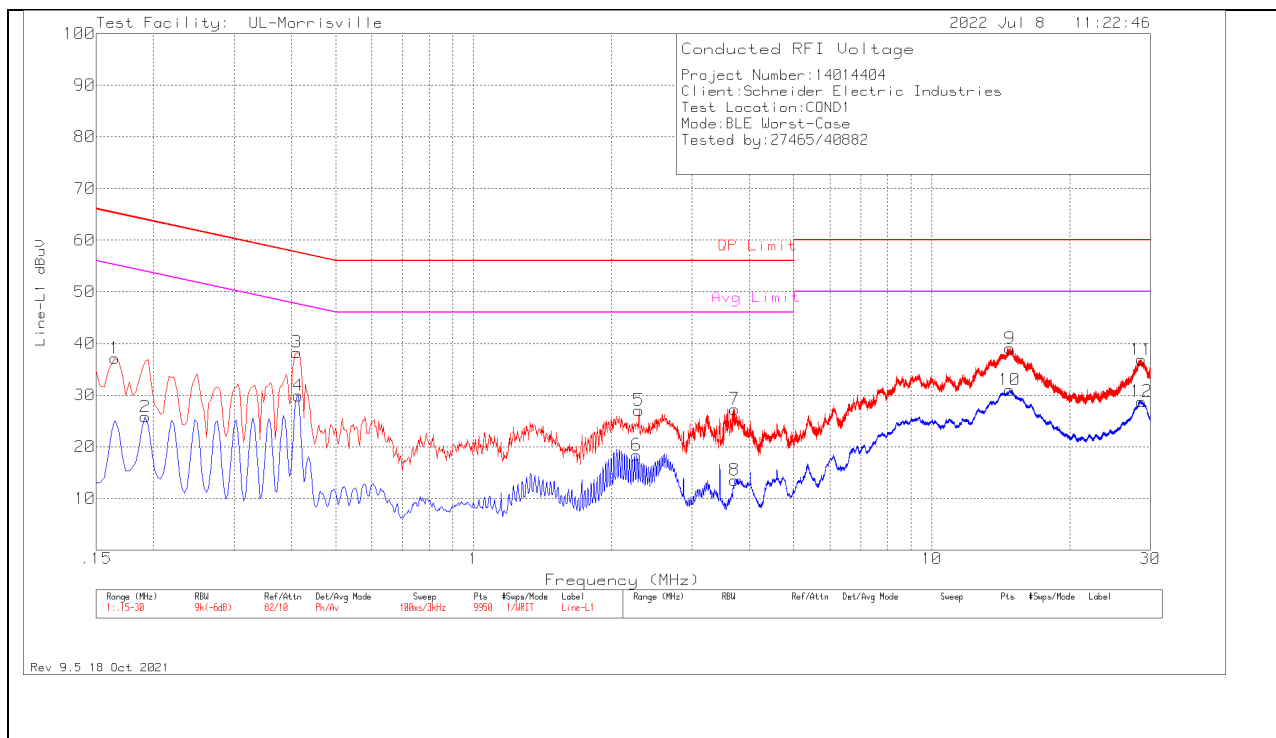

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
1	.165	27.14	Pk	.2	9.8	37.14	65.21	-28.07	55.21	-18.07
2	.192	15.78	Av	.2	9.8	25.78	63.95	-38.17	53.95	-28.17
3	.411	28.39	Pk	.1	9.8	38.29	57.63	-19.34	47.63	-9.34
4	.414	20	Av	.1	9.8	29.9	57.57	-27.67	47.57	-17.67
6	2.271	8.6	Av	0	9.8	18.4	56	-37.6	46	-27.6
5	2.295	17.27	Pk	0	9.8	27.07	56	-28.93	46	-18.93
8	3.714	3.65	Av	0	9.9	13.55	56	-42.45	46	-32.45
7	3.717	17.4	Pk	0	9.9	27.3	56	-28.7	46	-18.7
10	14.799	20.8	Av	.1	10.1	31	60	-29	50	-19
9	14.82	28.85	Pk	.1	10.1	39.05	60	-20.95	50	-10.95
12	28.686	18.25	Av	.3	10.2	28.75	60	-31.25	50	-21.25
11	28.71	26.37	Pk	.3	10.2	36.87	60	-23.13	50	-13.13

Pk - Peak detector
Av - Average detection

LINE 2 RESULTS

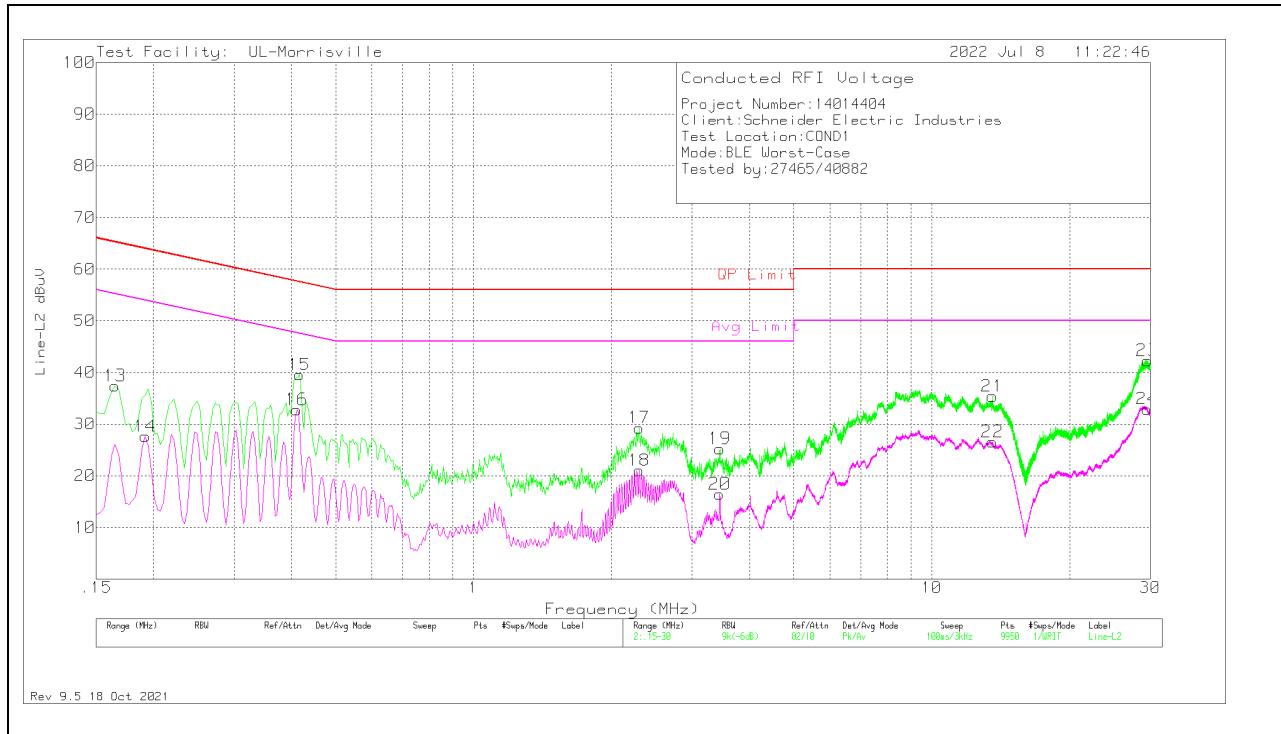

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBUV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
13	.165	27.39	Pk	.2	9.8	37.39	65.21	-27.82	55.21	-17.82
14	.192	17.61	Av	.2	9.8	27.61	63.95	-36.34	53.95	-26.34
16	.411	22.89	Av	.1	9.8	32.79	57.63	-24.84	47.63	-14.84
15	.417	29.65	Pk	.1	9.8	39.55	57.51	-17.96	47.51	-7.96
17	2.298	19.48	Pk	0	9.8	29.28	56	-26.72	46	-16.72
18	2.298	11.22	Av	0	9.8	21.02	56	-34.98	46	-24.98
20	3.444	6.54	Av	0	9.9	16.44	56	-39.56	46	-29.56
19	3.447	15.34	Pk	0	9.9	25.24	56	-30.76	46	-20.76
21	13.56	25.28	Pk	.1	10	35.38	60	-24.62	50	-14.62
22	13.56	16.45	Av	.1	10	26.55	60	-33.45	50	-23.45
24	29.556	22.43	Av	.3	10.2	32.93	60	-27.07	50	-17.07
23	29.574	31.79	Pk	.3	10.2	42.29	60	-17.71	50	-7.71

Pk - Peak detector

Av - Average detection

12. SETUP PHOTOS

Please refer to 14014404-EP1 for setup photos

END OF TEST REPORT