

---

# FCC Test Report

---

Report No.: AGC05406151101FE03

**FCC ID** : 2AHADQKXX  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Fingerprint Encryption Key  
**BRAND NAME** : QBKey  
**MODEL NAME** : QKXX  
**CLIENT** : Niip Limited  
**DATE OF ISSUE** : Jan.21,2016  
**STANDARD(S)** : FCC Part 15 Rules  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan.21,2016	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1. PRODUCT DESCRIPTION.....	6
2.2. TABLE OF CARRIER FREQUENCIES.....	6
2.3. RECEIVER INPUT BANDWIDTH .....	7
2.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE .....	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR .....	7
2.6. RELATED SUBMITTAL(S) / GRANT (S).....	8
2.7. TEST METHODOLOGY.....	8
2.8. SPECIAL ACCESSORIES .....	8
2.9. EQUIPMENT MODIFICATIONS .....	8
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>9</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>9</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>11</b>
5.1. CONFIGURATION OF EUT SYSTEM .....	11
5.2. EQUIPMENT USED IN EUT SYSTEM .....	11
5.3. SUMMARY OF TEST RESULTS .....	12
<b>7. PEAK OUTPUT POWER .....</b>	<b>15</b>
7.1. MEASUREMENT PROCEDURE .....	15
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
7.3. LIMITS AND MEASUREMENT RESULT .....	16
<b>8. 20DB BANDWIDTH .....</b>	<b>22</b>
8.1. MEASUREMENT PROCEDURE .....	22
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	22
8.3. LIMITS AND MEASUREMENT RESULTS .....	22
<b>9. CONDUCTED SPURIOUS EMISSION .....</b>	<b>29</b>
9.1. MEASUREMENT PROCEDURE .....	29
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	29
9.3. MEASUREMENT EQUIPMENT USED .....	29
9.4. LIMITS AND MEASUREMENT RESULT .....	29
<b>10. RADIATED EMISSION .....</b>	<b>33</b>
10.1. MEASUREMENT PROCEDURE .....	33
10.2. TEST SETUP .....	35
10.3. TEST RESULT (Worst Modulation: GFSK) .....	37
<b>11. BAND EDGE EMISSION .....</b>	<b>49</b>

11.1. MEASUREMENT PROCEDURE .....	49
11.2. TEST SET-UP .....	49
11.3. TEST RESULT (Worst Modulation: GFSK) .....	50
<b>12. NUMBER OF HOPPING FREQUENCY.....</b>	<b>54</b>
12.1. MEASUREMENT PROCEDURE .....	54
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	54
12.3. MEASUREMENT EQUIPMENT USED.....	54
12.4. LIMITS AND MEASUREMENT RESULT .....	54
<b>13. TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>55</b>
13.1. MEASUREMENT PROCEDURE .....	55
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	55
13.3. MEASUREMENT EQUIPMENT USED.....	55
13.4. LIMITS AND MEASUREMENT RESULT .....	55
<b>14. FREQUENCY SEPARATION .....</b>	<b>58</b>
14.1. MEASUREMENT PROCEDURE .....	58
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	58
14.3. MEASUREMENT EQUIPMENT USED.....	58
14.4. LIMITS AND MEASUREMENT RESULT .....	58
<b>15. FCC LINE CONDUCTED EMISSION TEST .....</b>	<b>60</b>
15.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....	60
15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	60
15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	61
15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	61
15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	62
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>64</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>67</b>

## 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	Niip Limited
<b>Address</b>	UNITS 903-906A, KOWLOON CENTRE, 33 ASHLEY ROAD, TSIMSHATSUI, KOWLOON, HONGKONG
<b>Manufacturer</b>	Niip Limited
<b>Address</b>	UNITS 903-906A, KOWLOON CENTRE, 33 ASHLEY ROAD, TSIMSHATSUI, KOWLOON, HONGKONG
<b>Product Designation</b>	Fingerprint Encryption Key
<b>Brand Name</b>	QBKey
<b>Test Model</b>	QKXX
<b>Date of test</b>	Jan.16,2016 to Jan.19,2016
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

*Water Zuo*

Tested By

*Water Zuo(Zuo Yingying)*

Jan.21,2016

*Forrest Lei*

Reviewed By

*Forrest Lei(Lei Yonggang)*

Jan.21,2016

*Solger Zhang*

Approved By

*Solger Zhang(Zhang Hongyi)*

Authorized Officer

Jan.21,2016

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is “Fingerprint Encryption Key” designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	4.79dBm(Max)
<b>Bluetooth Version</b>	V4.0
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Number of channels</b>	79
<b>Hardware Version</b>	V5.0
<b>Software Version</b>	BSE_DAT_2(CONTEC).1.1.1_3.6.7.8U
<b>Antenna Designation</b>	Ceramic Antenna
<b>Antenna Gain</b>	2dBi
<b>Power Supply</b>	DC3.7V by Battery

Note: The USB port only used for charging and can't be used to transfer data with PC.

### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2402~2480MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

### 2.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67  
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59  
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75  
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06  
01, 51, 03, 55, 05, 04

### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.
2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permuations, additions, XOR-operations)are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

## **2.6. RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID: 2AHADQKXX** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## **2.7. TEST METHODOLOGY**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009).

Radiated testing was performed at an antenna to EUT distance 3 meters.

Test has been referenced to the DA 00-705

## **2.8. SPECIAL ACCESSORIES**

Refer to section 5.2.

## **2.9. EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

### 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB


Radiated measurement: +/- 3.2dB

### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	BT Link + charging

Note:


1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

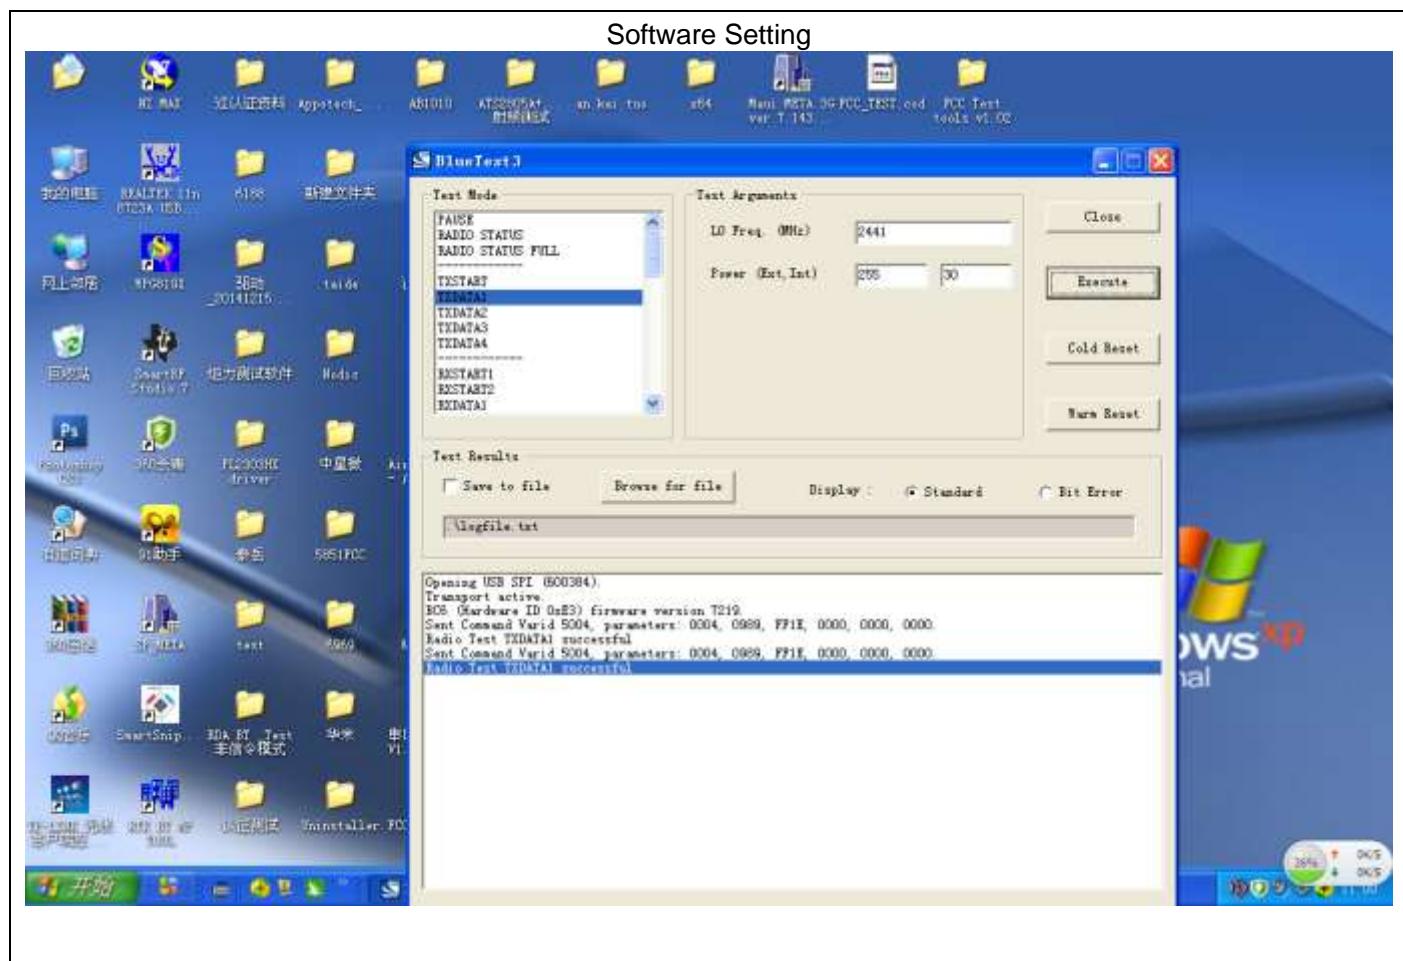

## 5. SYSTEM TEST CONFIGURATION


### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

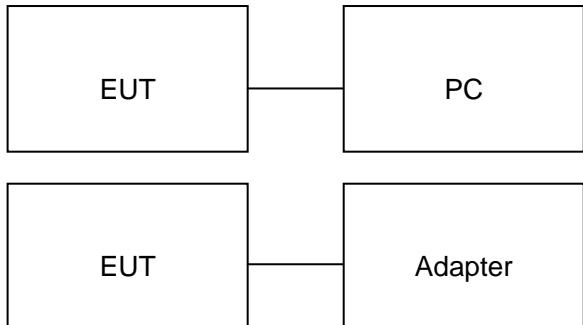

**Note:** Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

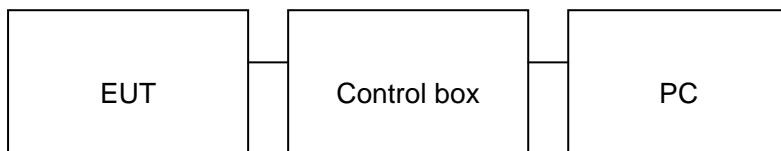

### 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Fingerprint Encryption Key	QBKey	2AHADQKXX	EUT
2	PC	SONY	E1412AYCW	A.E
3	Control box	N/A	N/A	A.E
4	AC adapter	N/A	MX12X8-0502000UU	A.E
5	AC adapter (PC)	GPE0538	1.1m,unshielded	A.E
6	Temporary Antenna Connector	T10	N/A	A.E

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D, Baoding Technology Park, Guangming Road 2, Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

### ALL TEST EQUIPMENT LIST

#### FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Last Calibration</b>	<b>Due Calibration</b>
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016

#### FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Last Calibration</b>	<b>Due Calibration</b>
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016

## 7. PEAK OUTPUT POWER

### 7.1. MEASUREMENT PROCEDURE


For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3. RBW > the 20 dB bandwidth of the emission being measured,  $VBW \geq RBW$ .
4. Record the maximum power from the Spectrum Analyzer.

**Note :** The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements.


### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### PEAK POWER TEST SETUP

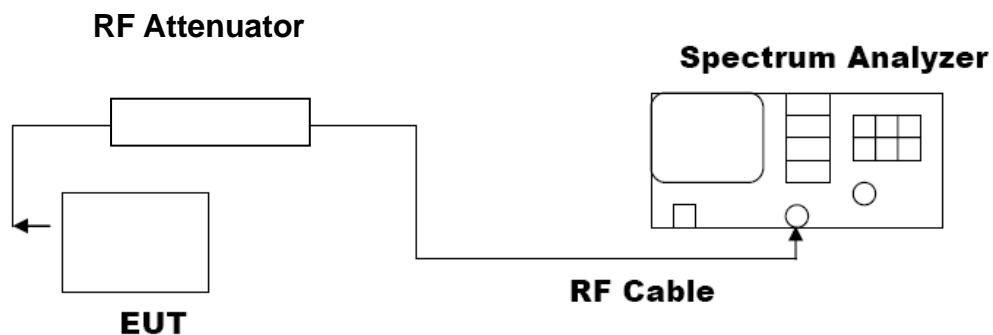


### 7.3. LIMITS AND MEASUREMENT RESULT


PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	0.70	21	Pass
2.441	3.66	21	Pass
2.480	4.79	21	Pass

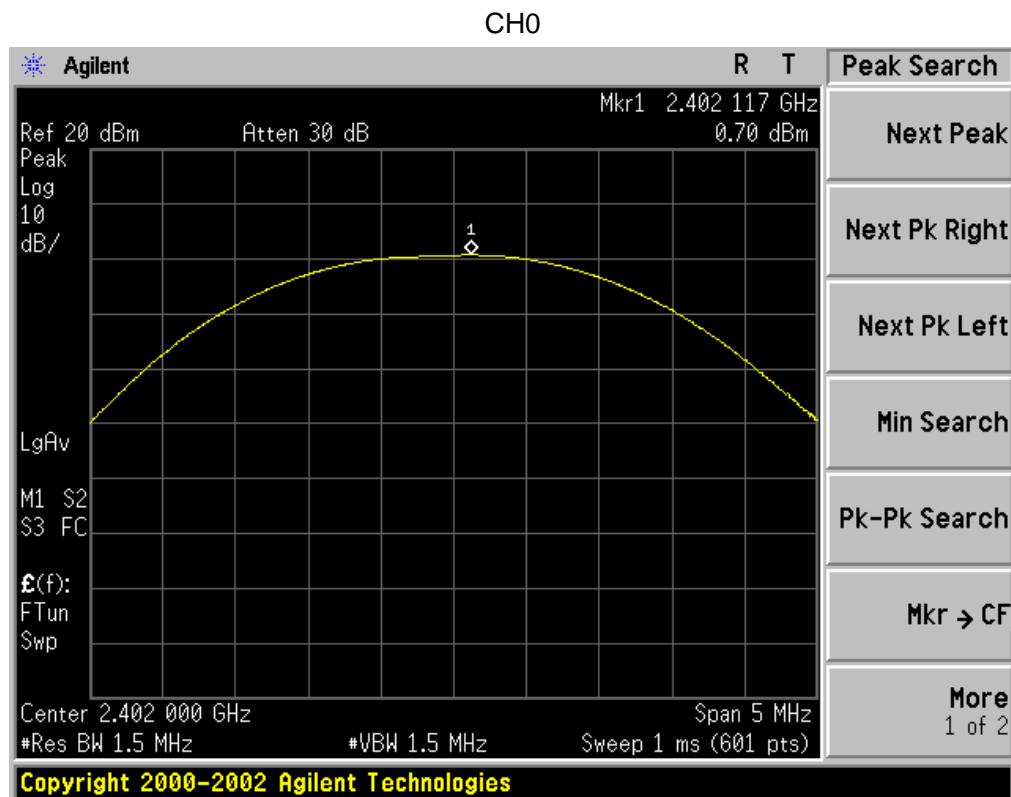


CH39

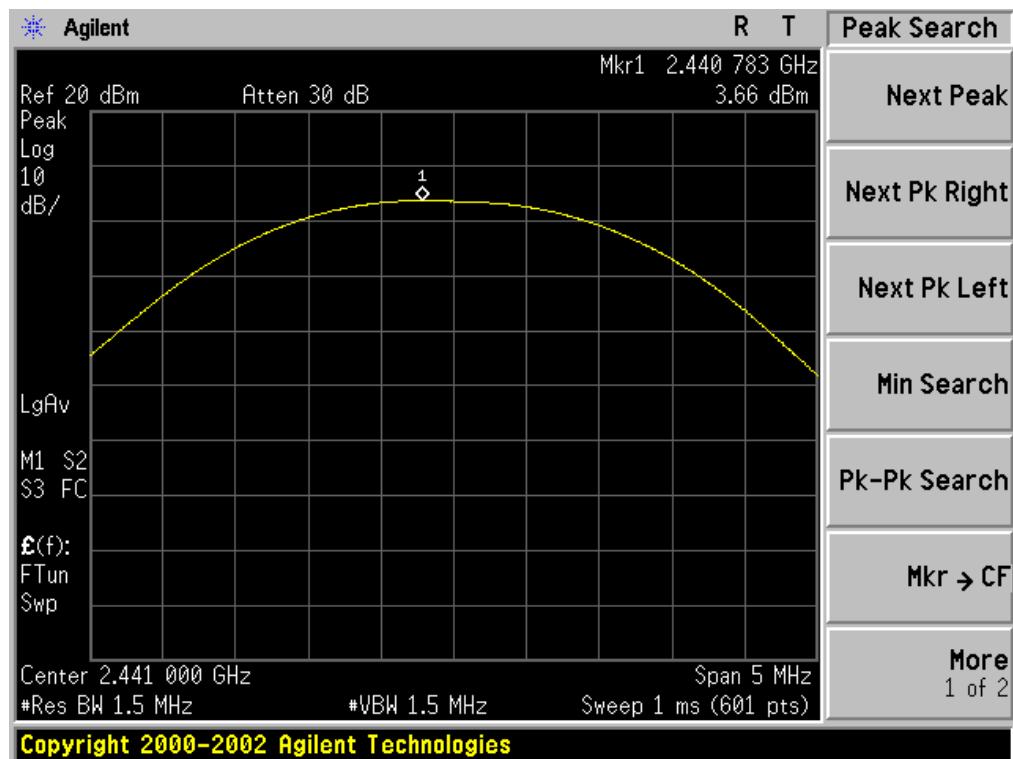


CH78

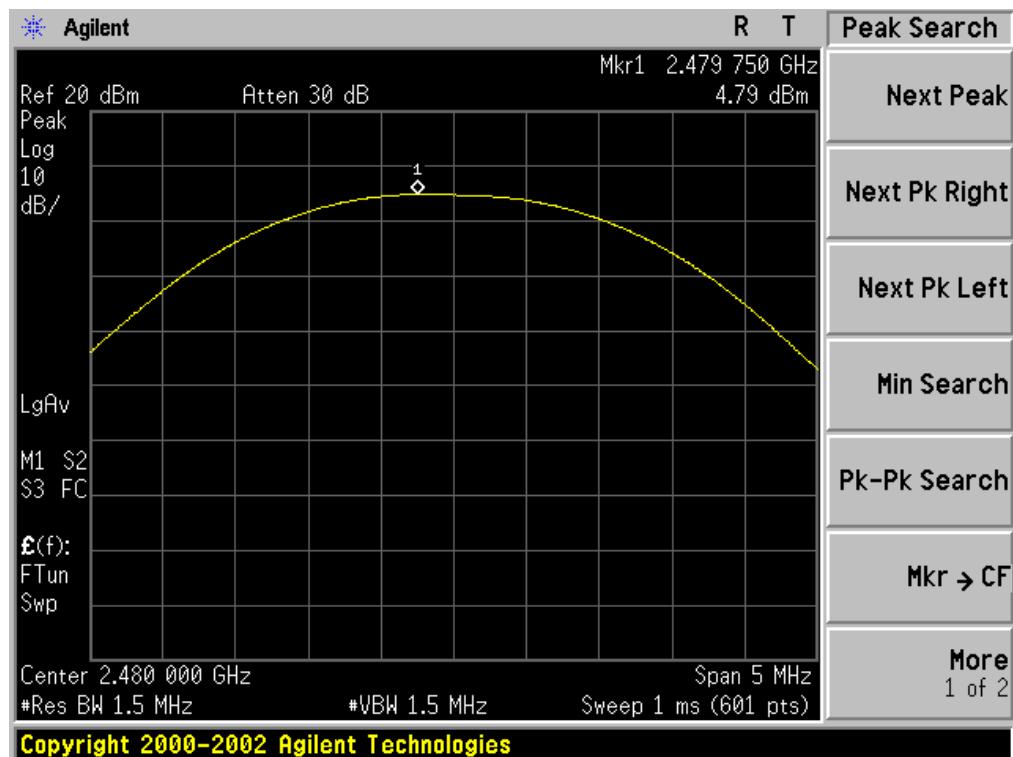


PEAK OUTPUT POWER MEASUREMENT RESULT FOR II /4-DQPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-2.70	21	Pass
2.441	0.38	21	Pass
2.480	1.97	21	Pass

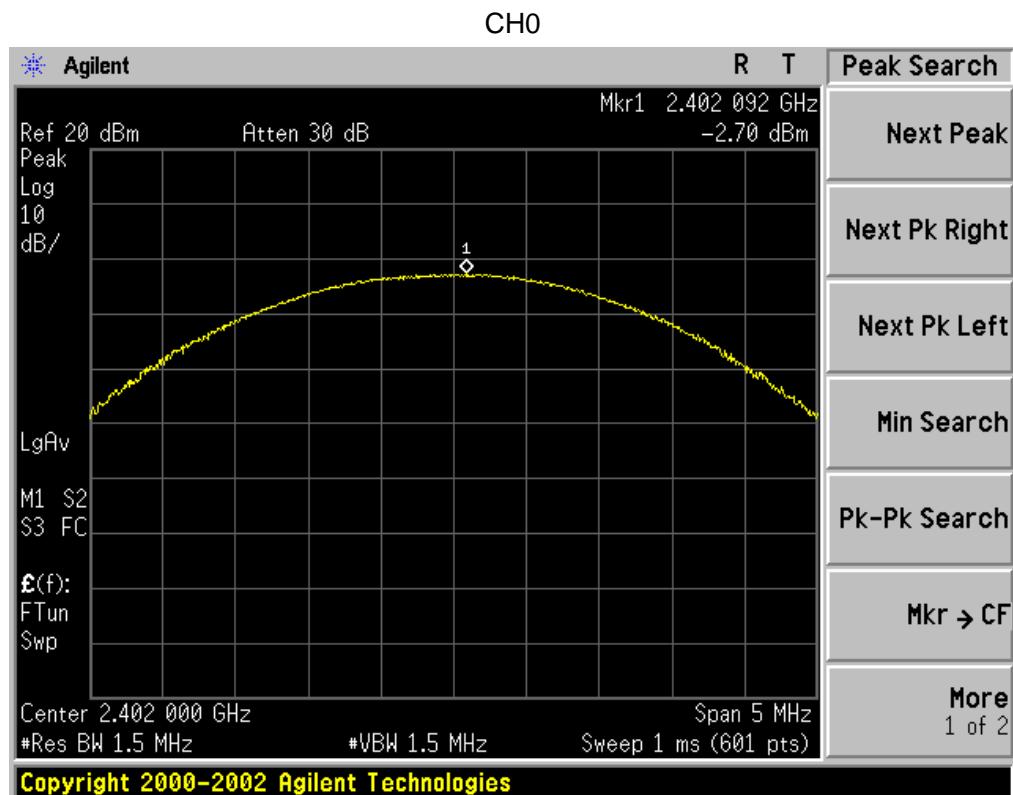


CH39

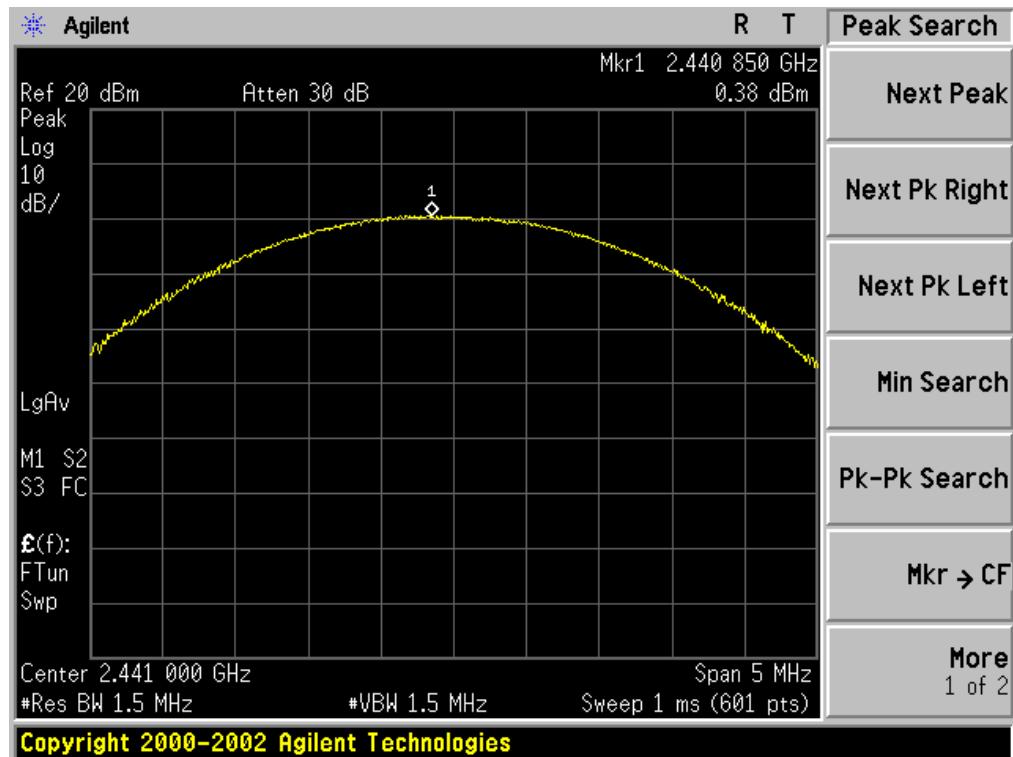


CH78

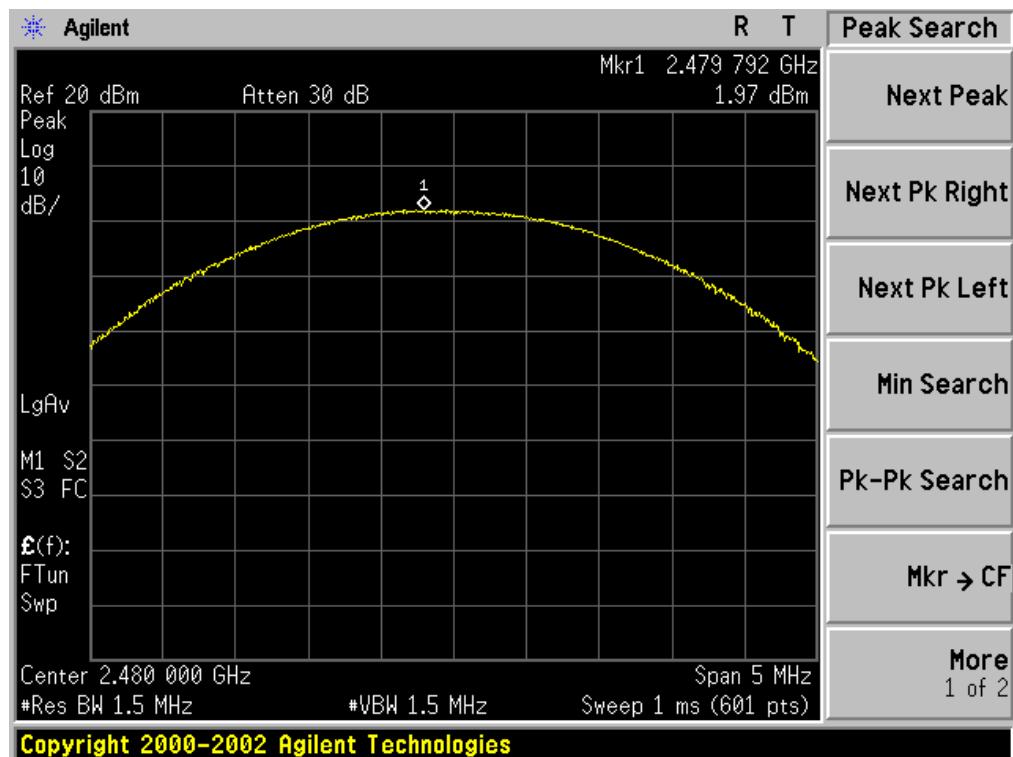


PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-2.24	21	Pass
2.441	0.99	21	Pass
2.480	2.38	21	Pass

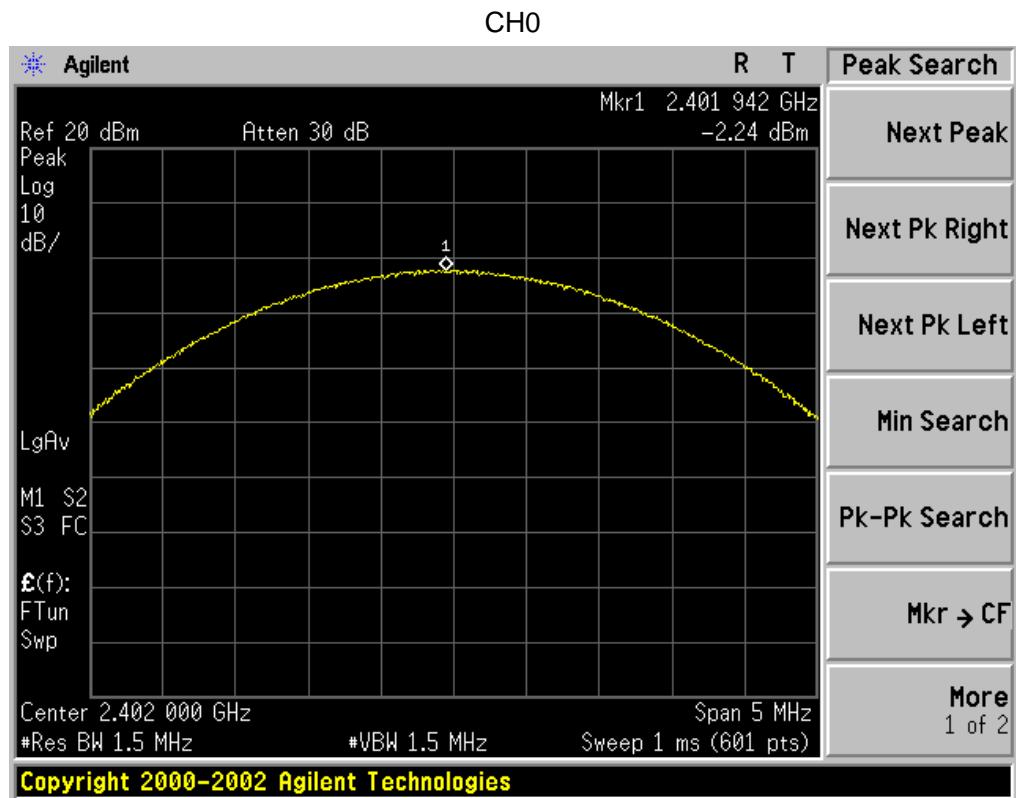

CH39

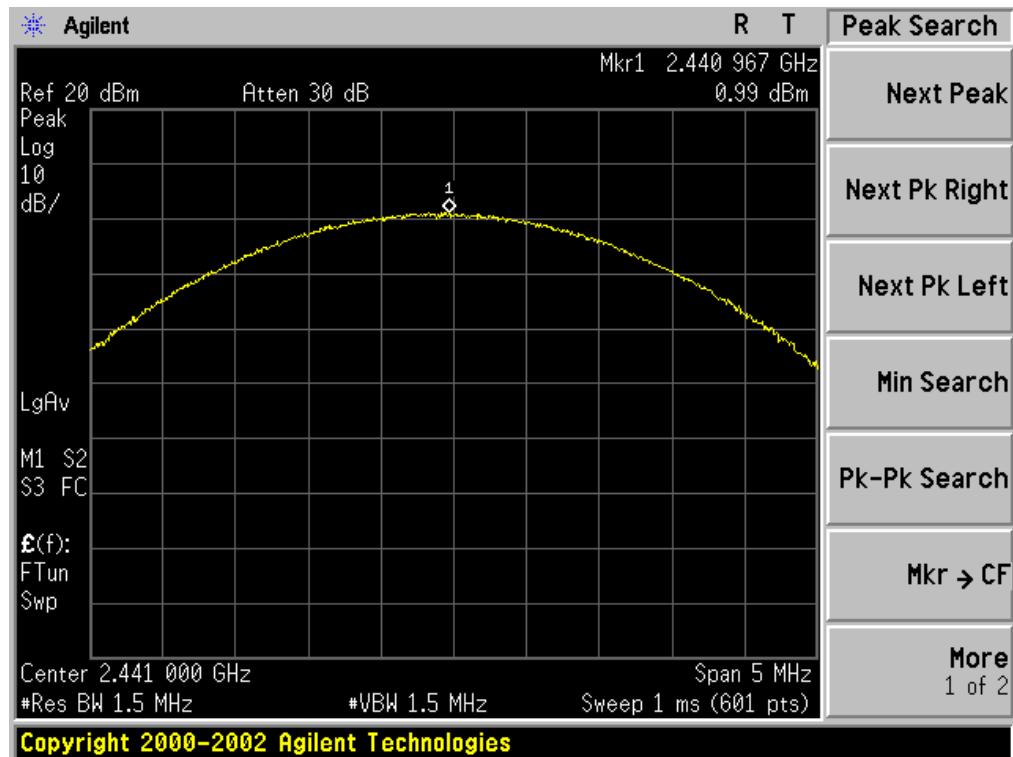

CH78

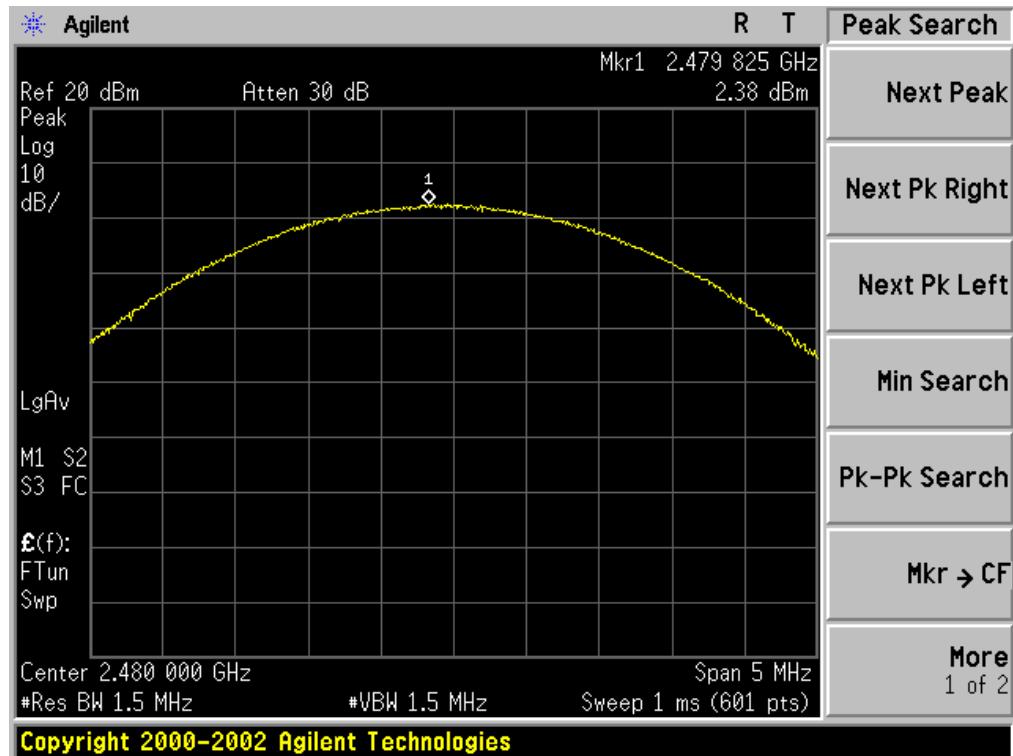


## 8. 20DB BANDWIDTH

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

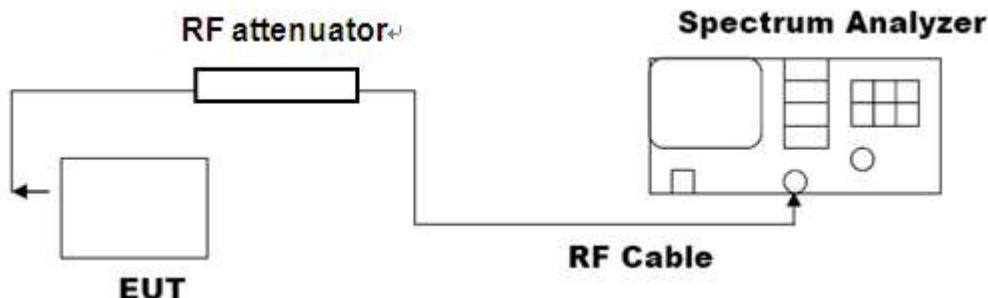


Note: The EUT has been used temporary antenna connector for testing.


### 8.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
N/A	Low Channel	1.110	PASS
	Middle Channel	1.109	PASS
	High Channel	1.095	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

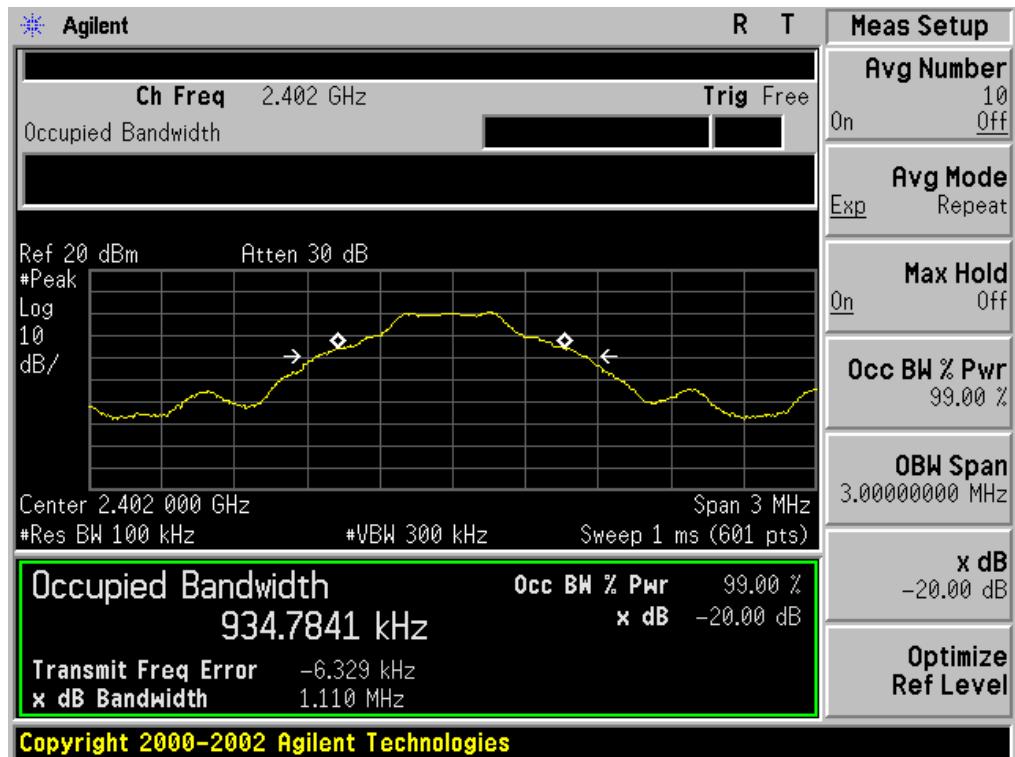

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

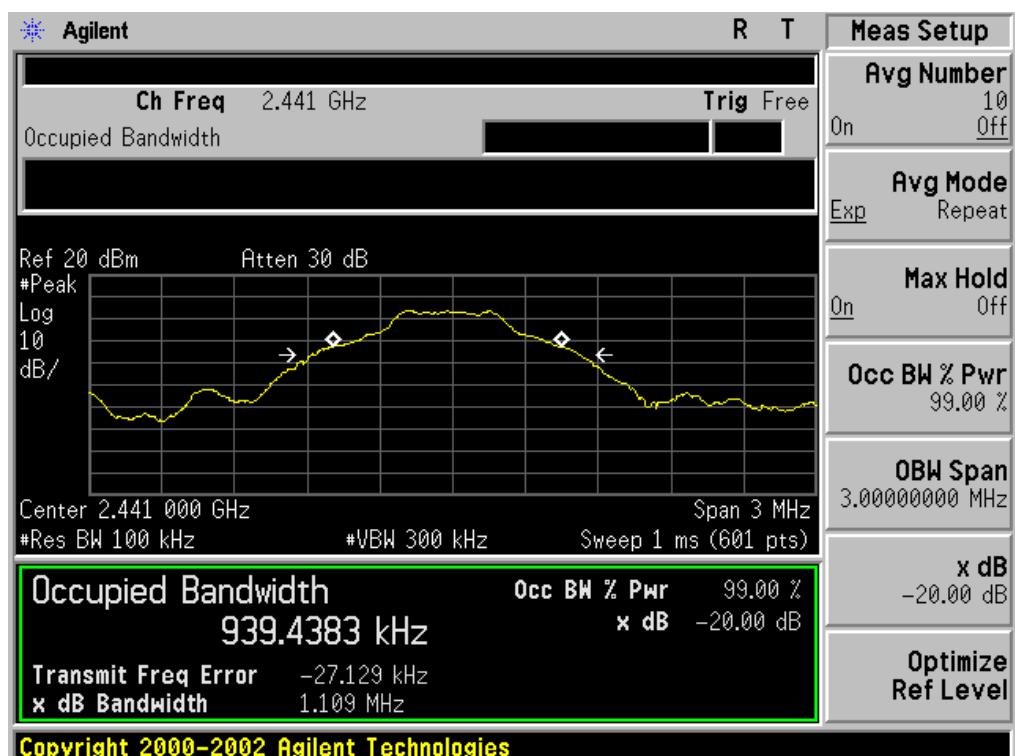


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

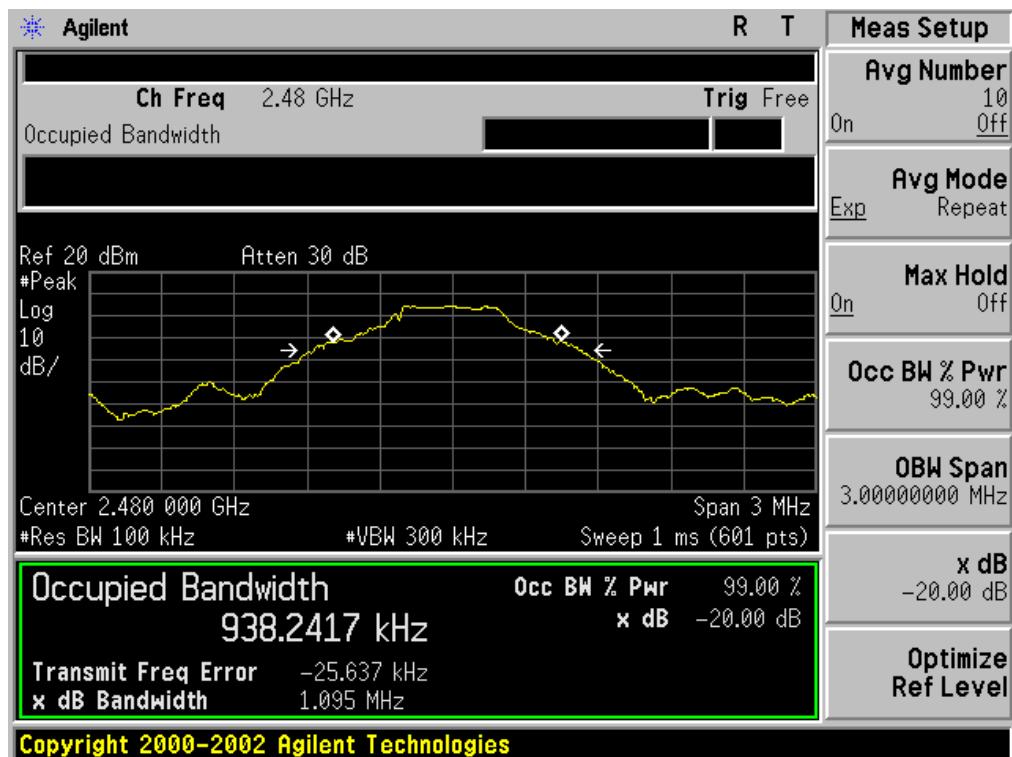


### BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT

Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.365	PASS
	Middle Channel	1.366	PASS
	High Channel	1.386	PASS


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

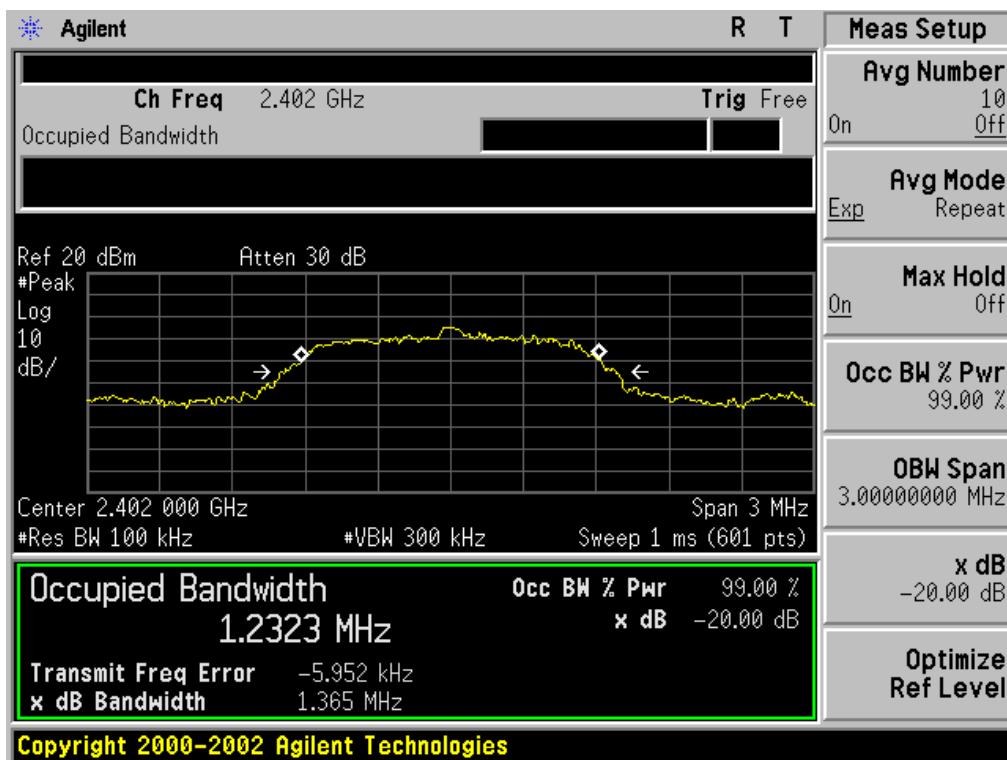

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

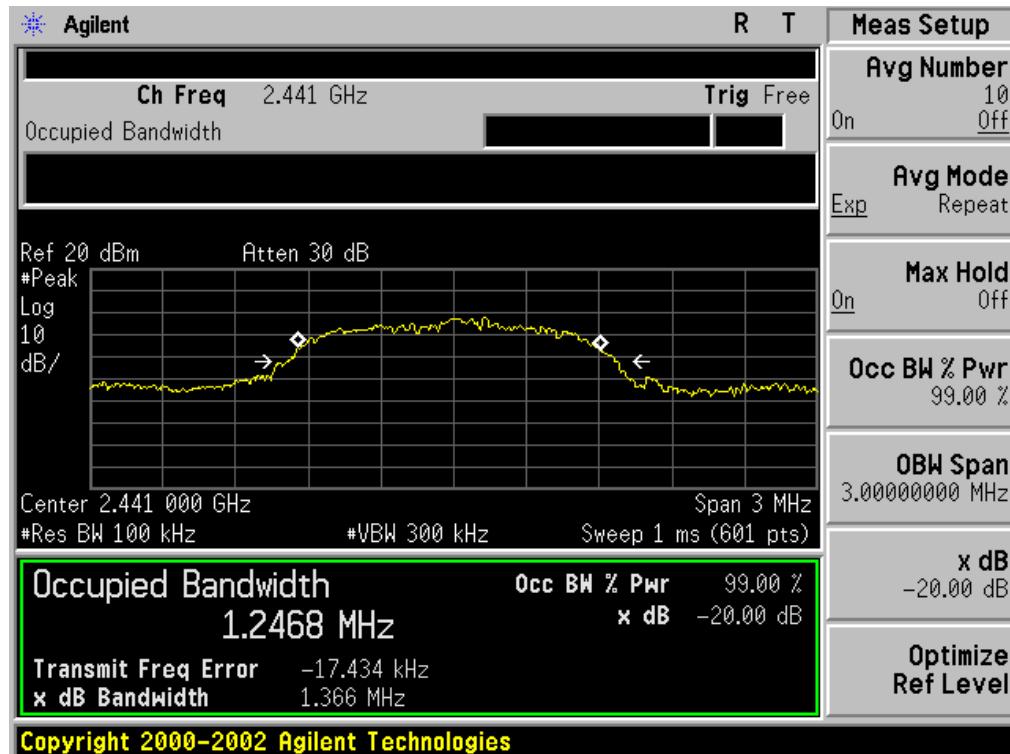


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

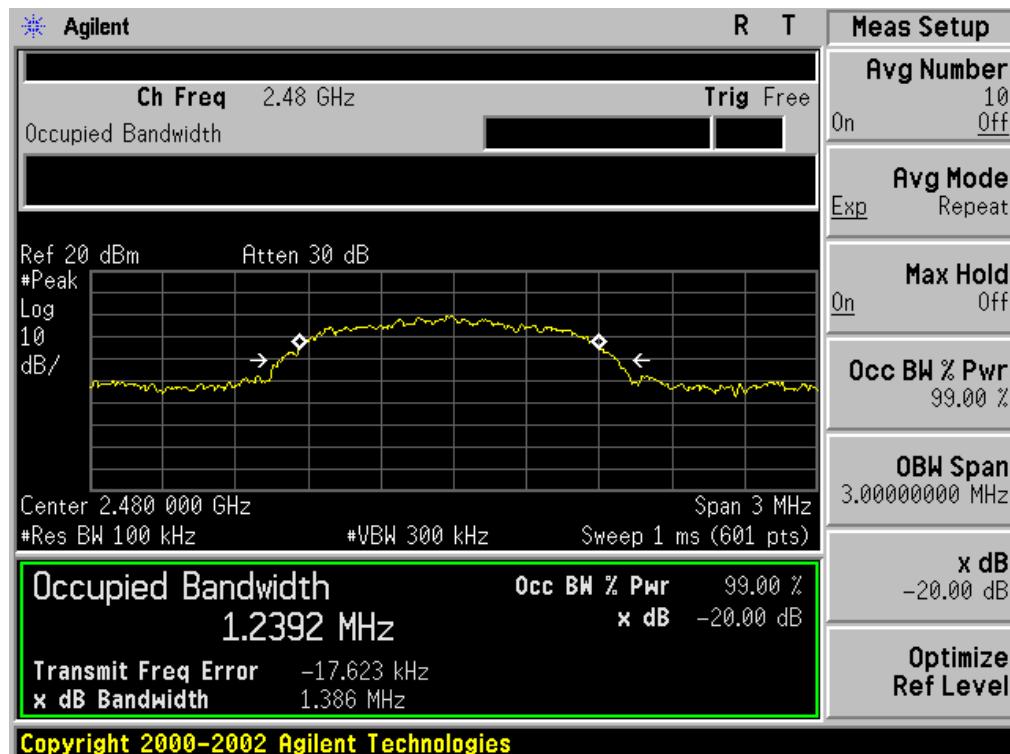


### BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT

Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.334	PASS
	Middle Channel	1.369	PASS
	High Channel	1.386	PASS


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

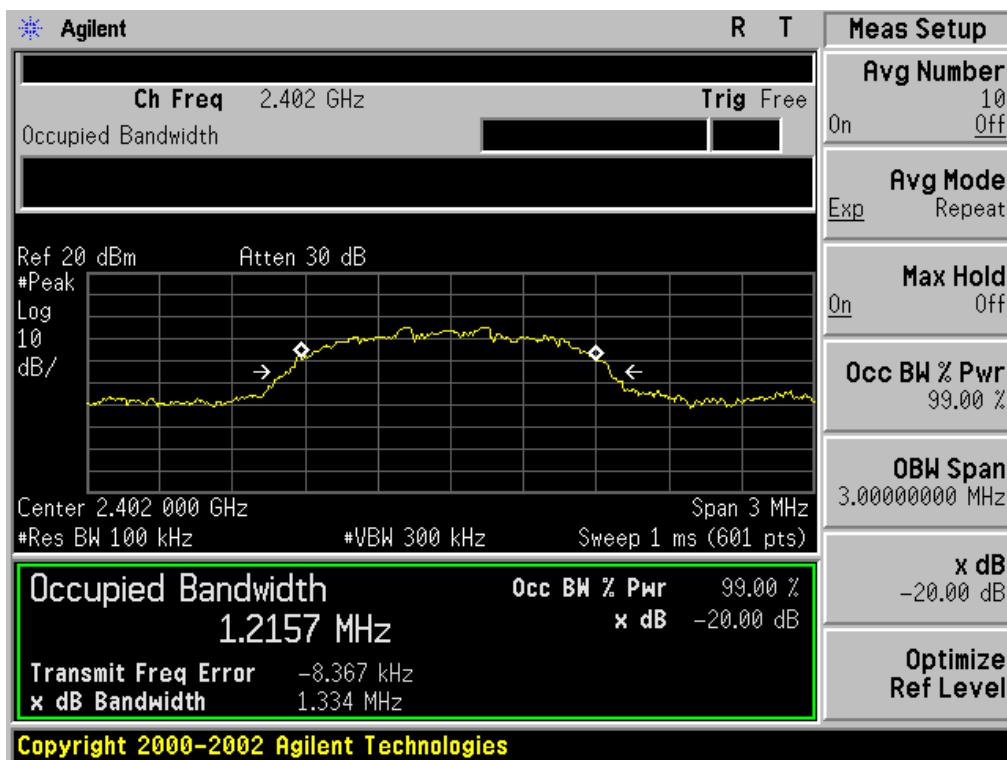

## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

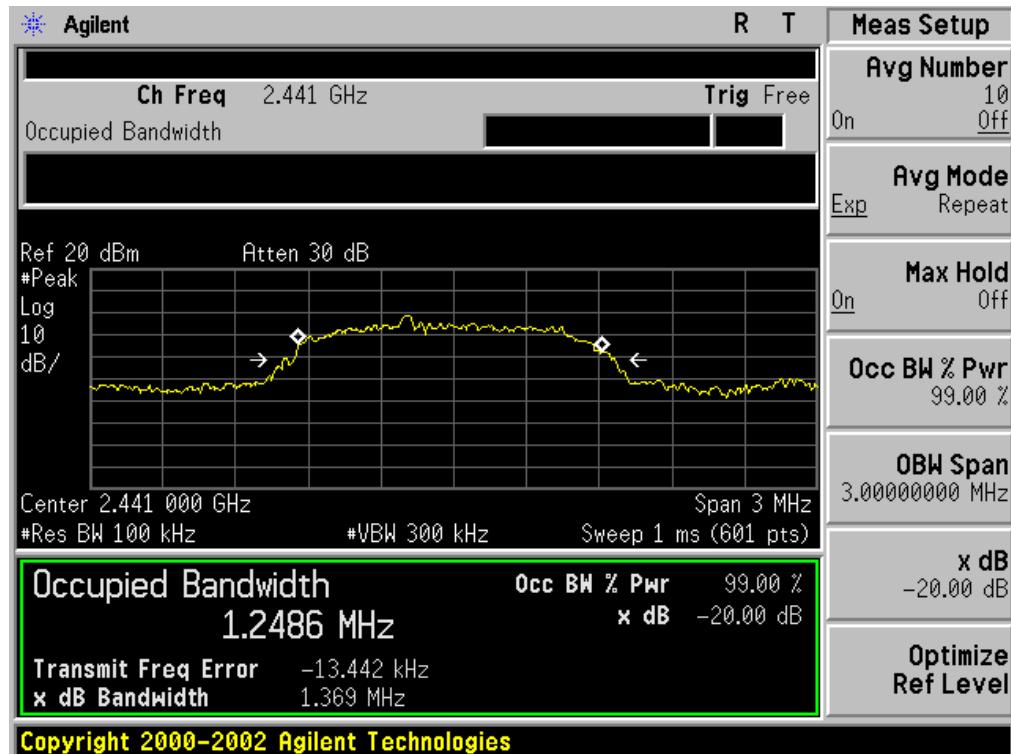

## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

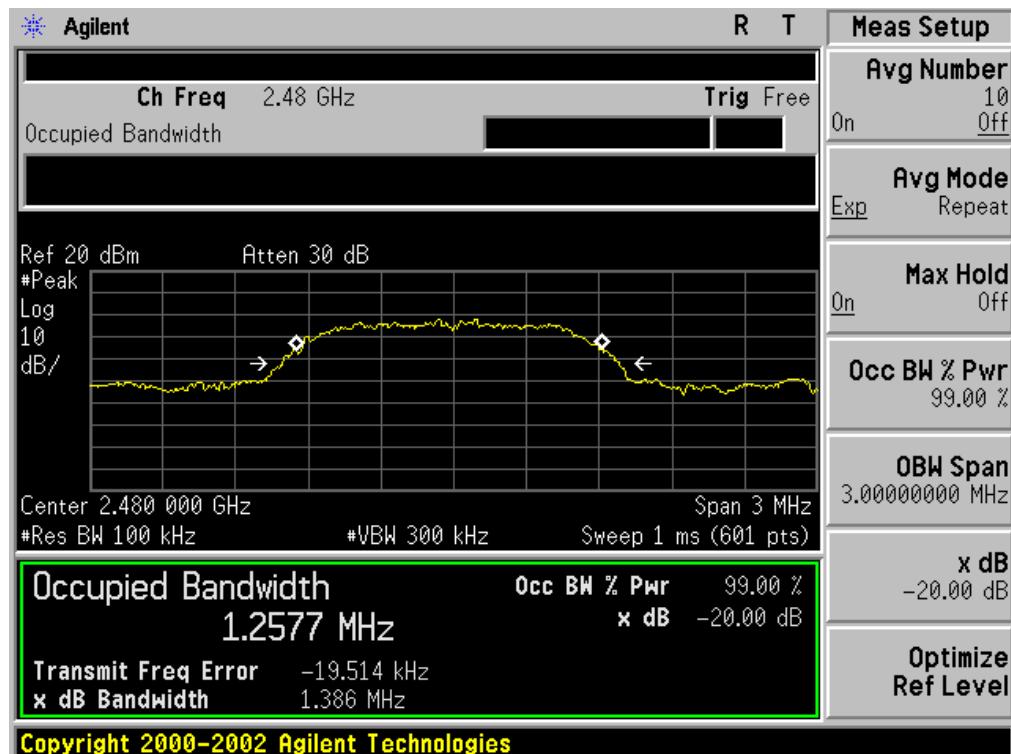

## 9. CONDUCTED SPURIOUS EMISSION

### 9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2



### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6



### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS



TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE  
OF GFSK MODULATION IN LOW CHANNEL

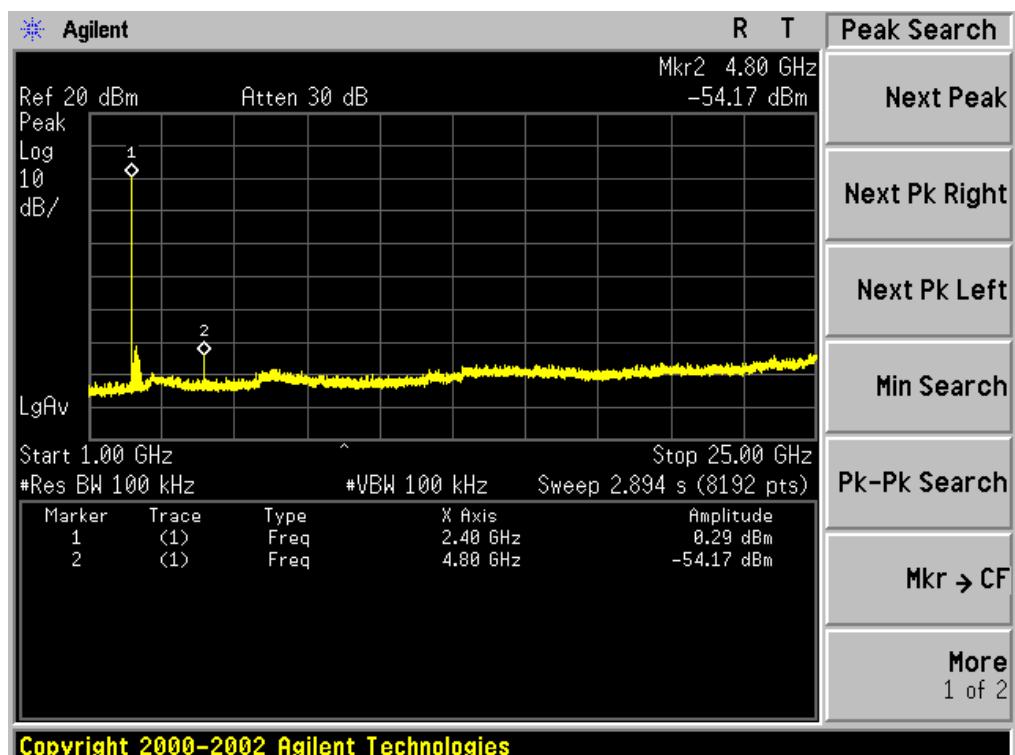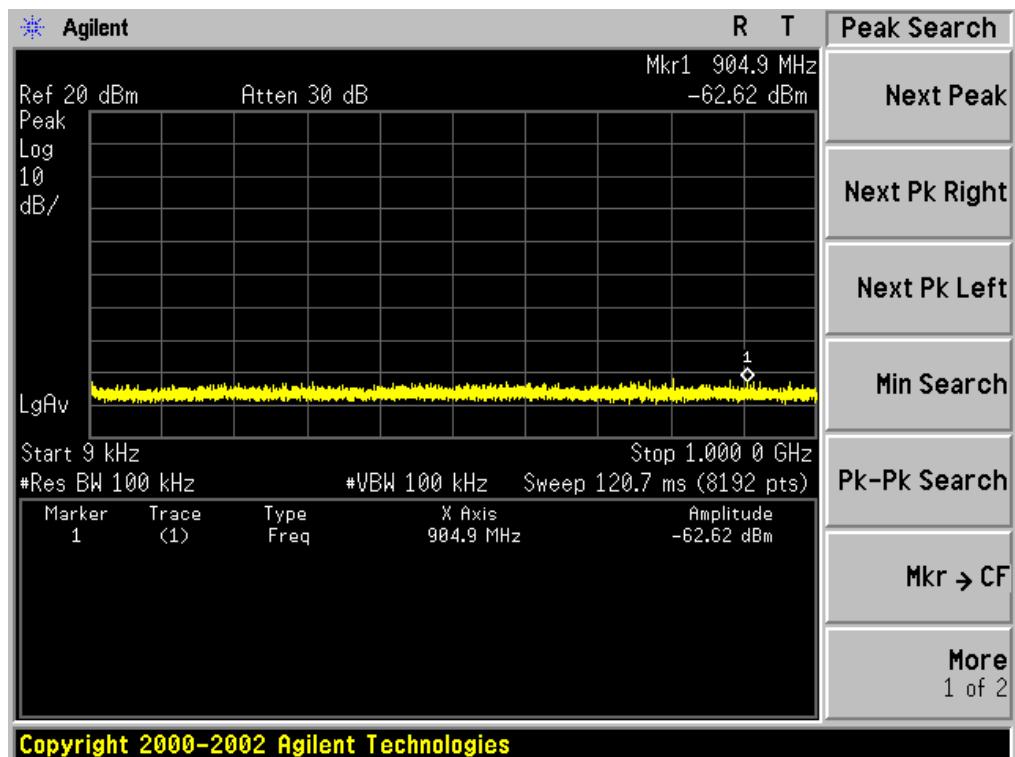

TEST PLOT OF OUT OF BAND EMISSIONS  
OF GFSK MODULATION IN MIDDLE CHANNEL

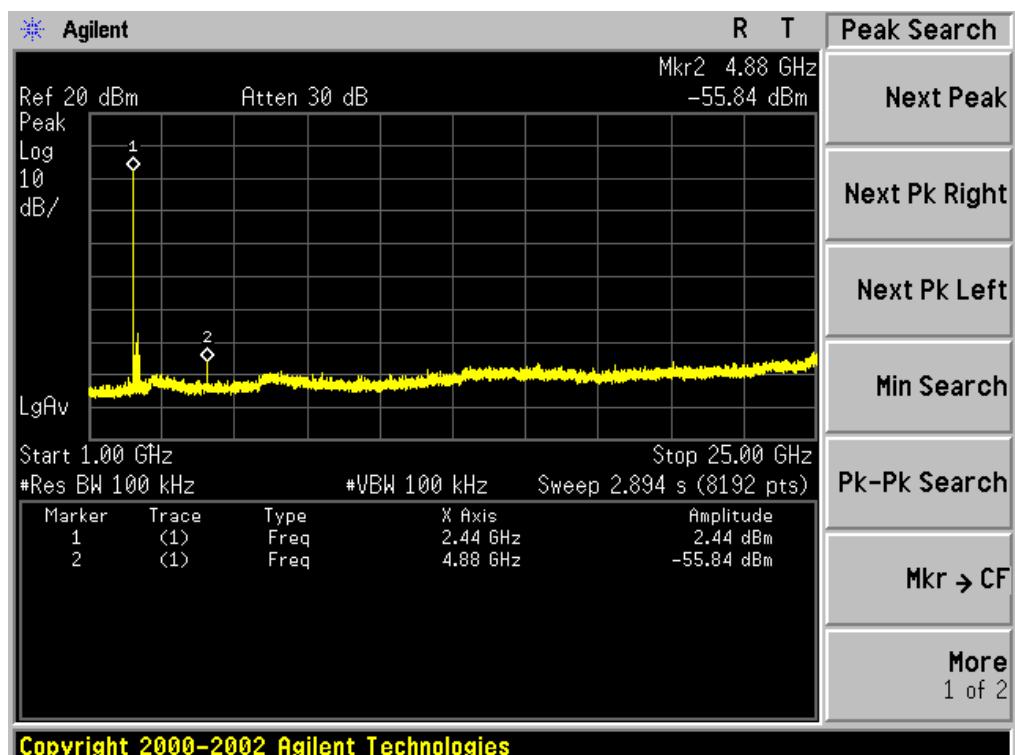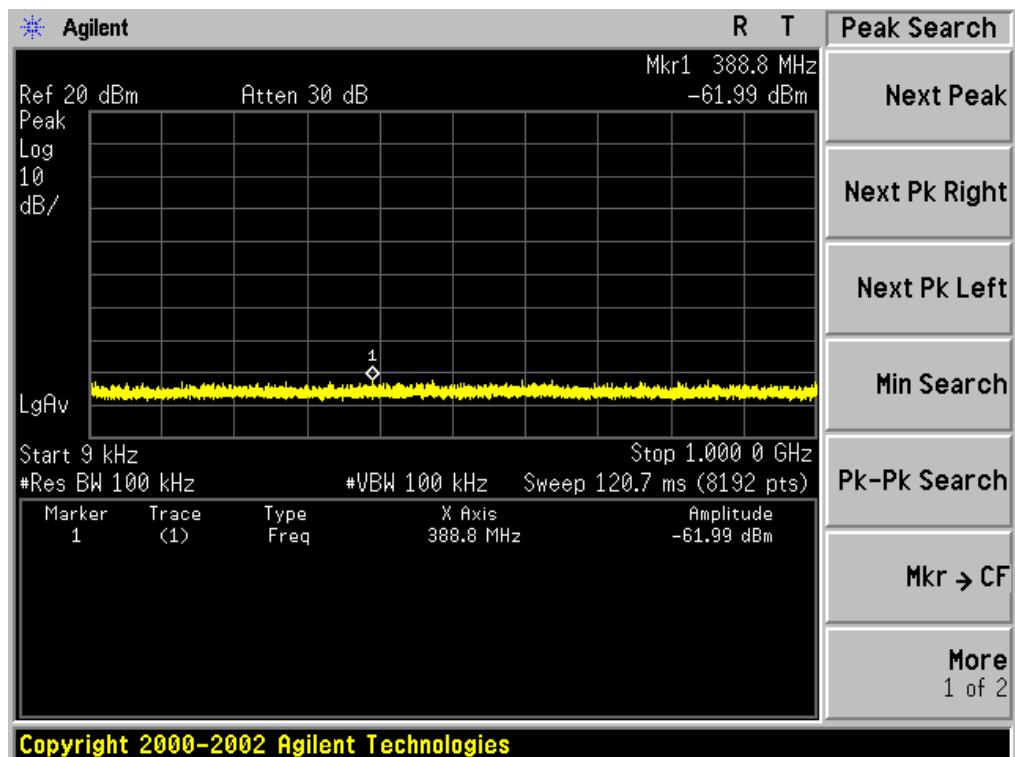

TEST PLOT OF OUT OF BAND EMISSIONS  
OF GFSK MODULATION IN HIGH CHANNEL

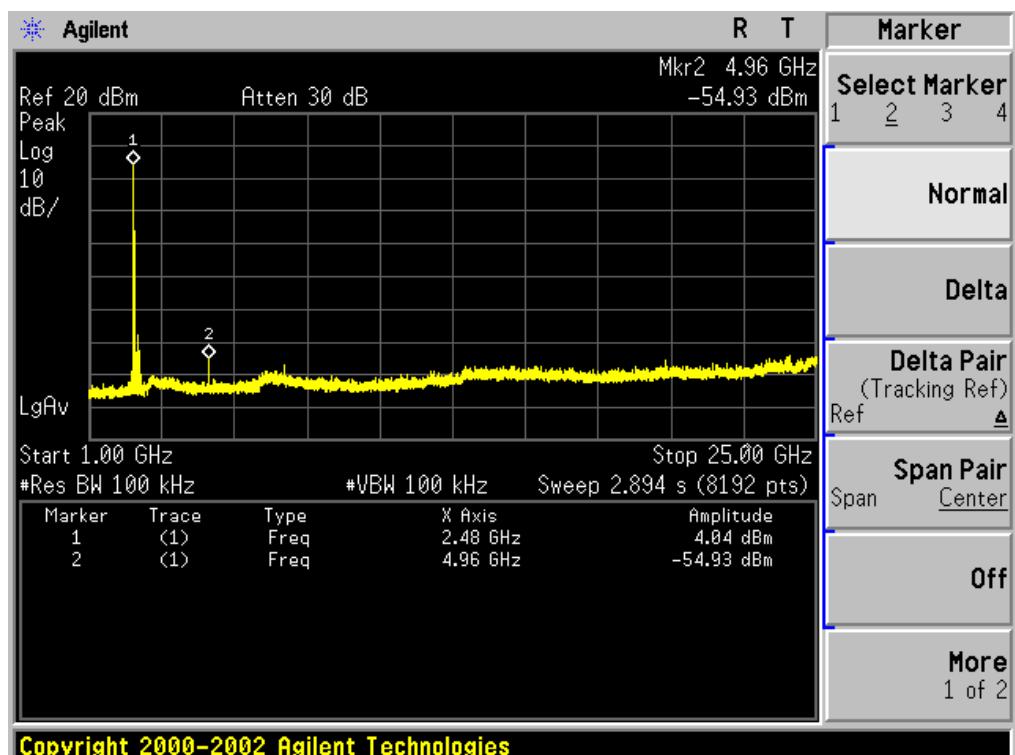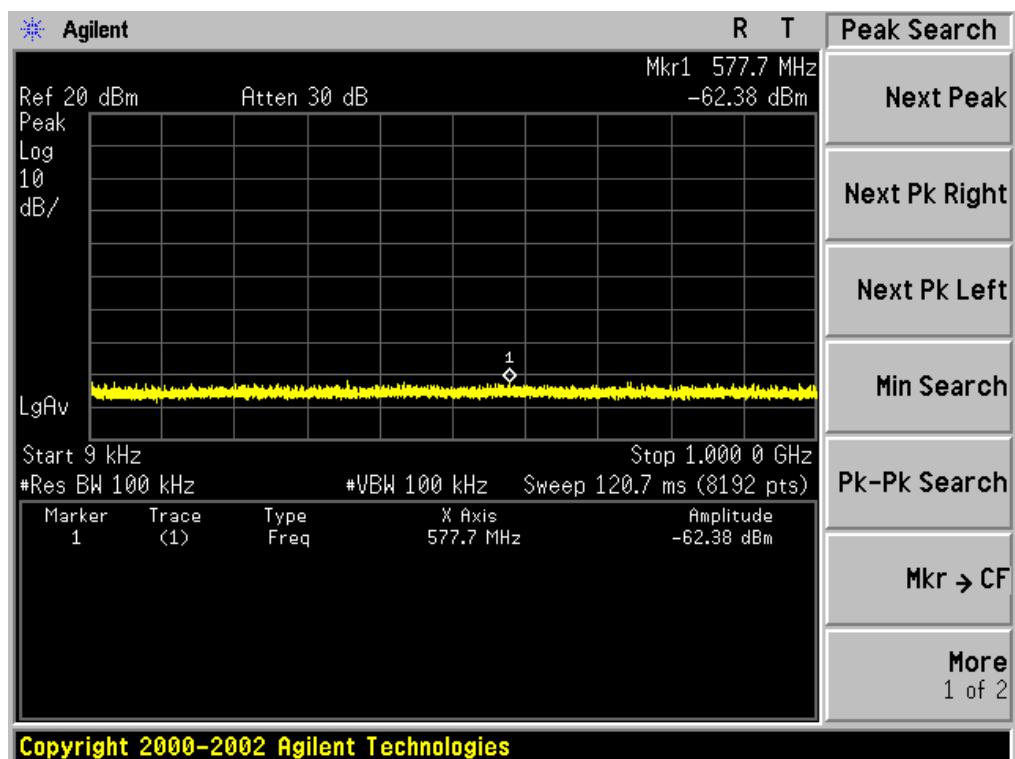

## 10. RADIATED EMISSION

### 10.1. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported for above 1GHz, and the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

## 10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

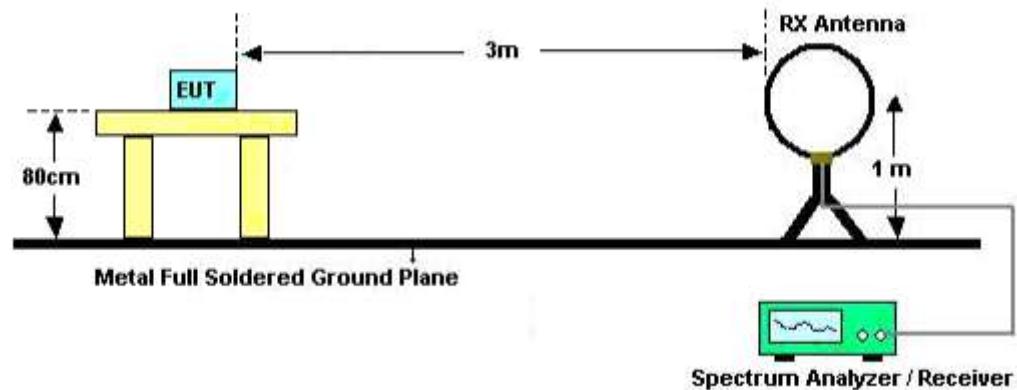

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

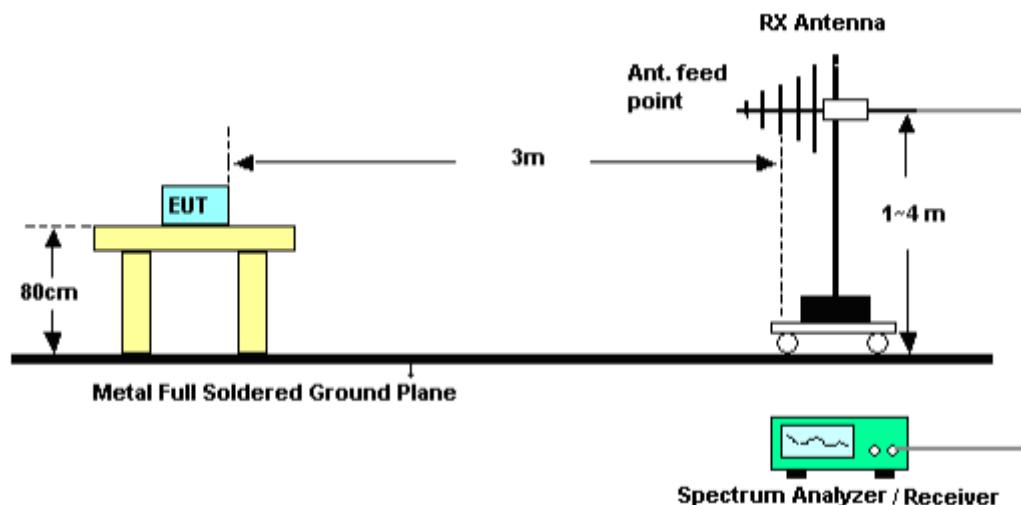

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

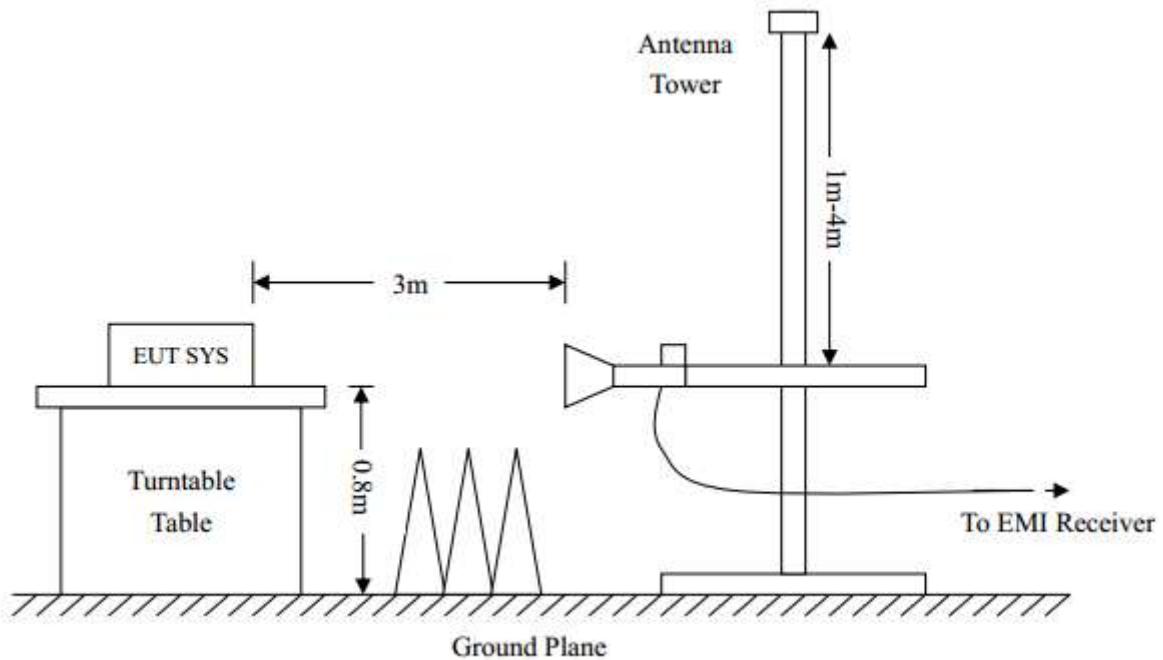

### 10.3. TEST RESULT (Worst Modulation: GFSK)

#### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

#### RADIATED EMISSION BELOW 1GHZ

#### RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL



Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT:Fingerprint Encryption Key  
M/N:QKXX  
Mode: Low Channel TX  
Note:

Polarization: *Horizontal*

Temperature: 23.1

Power:

Humidity: 54.1 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		135.0833	12.49	12.90	25.39	43.50	-18.11	peak			
2		185.2000	17.15	11.31	28.46	43.50	-15.04	peak			
3		327.4667	9.32	17.24	26.56	46.00	-19.44	peak			
4		348.4833	9.84	18.64	28.48	46.00	-17.52	peak			
5		618.4666	1.92	23.77	25.69	46.00	-20.31	peak			
6	*	796.3000	4.41	27.27	31.68	46.00	-14.32	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL



Site: site #1  
 Polarization: Vertical  
 Temperature: 23.1  
 Limit: FCC Class B 3M Radiation  
 Power: 16.03 dBuV  
 Humidity: 54.1 %  
 EUT:Fingerprint Encryption Key  
 Distance:  
 M/N:QKXX  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		115.6833	16.03	4.71	20.74	43.50	-22.76	peak			
2		225.6167	14.95	11.51	26.46	46.00	-19.54	peak			
3		264.4167	8.05	14.34	22.39	46.00	-23.61	peak			
4		608.7667	1.65	22.93	24.58	46.00	-21.42	peak			
5		754.2667	2.35	26.69	29.04	46.00	-16.96	peak			
6	*	896.5333	6.15	28.52	34.67	46.00	-11.33	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL



Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT:Fingerprint Encryption Key  
M/N:QKXX  
Mode: Middle Channel TX  
Note:


Polarization: *Horizontal*  
Power:  
Distance:

Temperature: 23.1  
Humidity: 54.1 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	13.88	13.66	27.54	43.50	-15.96	peak			
2		199.7500	16.64	11.99	28.63	43.50	-14.87	peak			
3		359.8000	12.08	18.80	30.88	46.00	-15.12	peak			
4		490.7500	1.58	21.03	22.61	46.00	-23.39	peak			
5		734.8667	2.23	26.19	28.42	46.00	-17.58	peak			
6	*	906.2333	2.47	28.78	31.25	46.00	-14.75	peak			

## RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

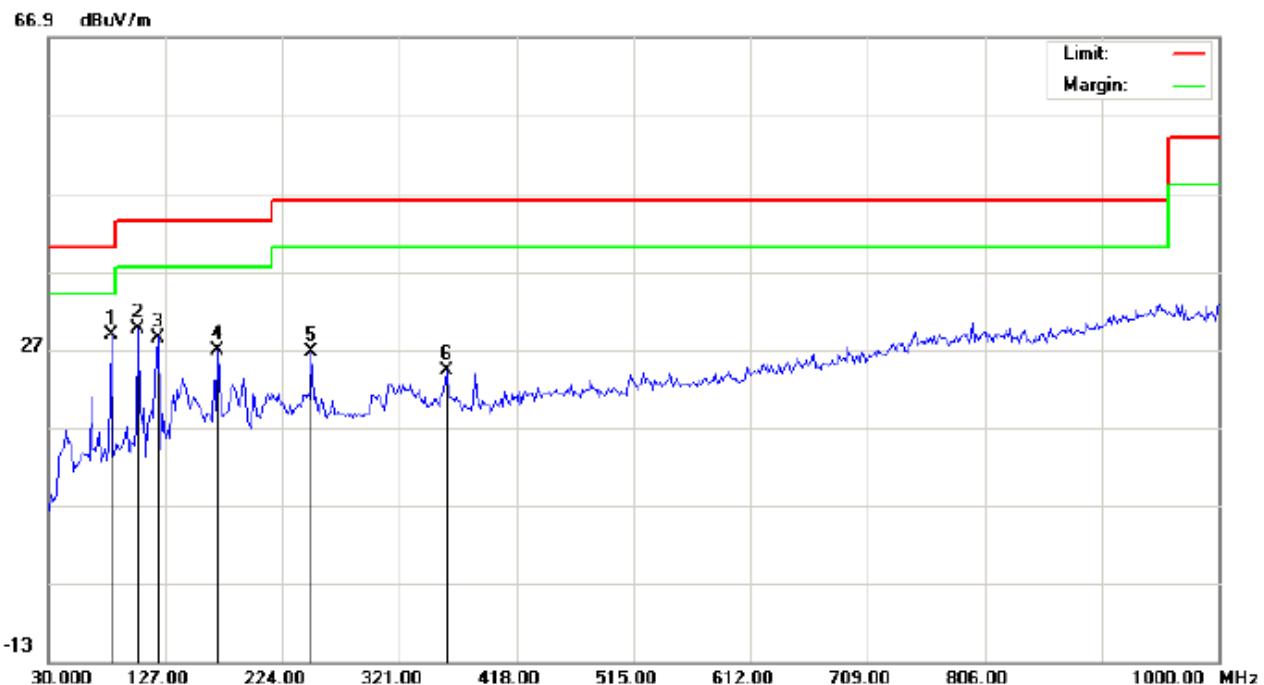

Site: site #1 Polarization: *Vertical* Temperature: 23.1  
 Limit: FCC Class B 3M Radiation Power: Humidity: 54.1 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	81.7333	26.32	2.42	28.74	40.00	-11.26	peak			
2		104.3667	30.53	-0.93	29.60	43.50	-13.90	peak			
3		120.5333	21.42	7.08	28.50	43.50	-15.00	peak			
4		170.6500	12.05	14.66	26.71	43.50	-16.79	peak			
5		248.2500	12.89	13.73	26.62	46.00	-19.38	peak			
6		359.8000	5.40	18.80	24.20	46.00	-21.80	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL




Site: site #1 Polarization: *Horizontal* Temperature: 23.1  
 Limit: FCC Class B 3M Radiation Power: Humidity: 54.1 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	17.17	13.66	30.83	43.50	-12.67	peak			
2		212.6833	18.45	10.71	29.16	43.50	-14.34	peak			
3		269.2667	15.72	10.18	25.90	46.00	-20.10	peak			
4	*	359.8000	22.90	18.80	41.70	46.00	-4.30	peak			
5		642.7166	2.93	23.83	26.76	46.00	-19.24	peak			
6		954.7333	2.61	29.95	32.56	46.00	-13.44	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

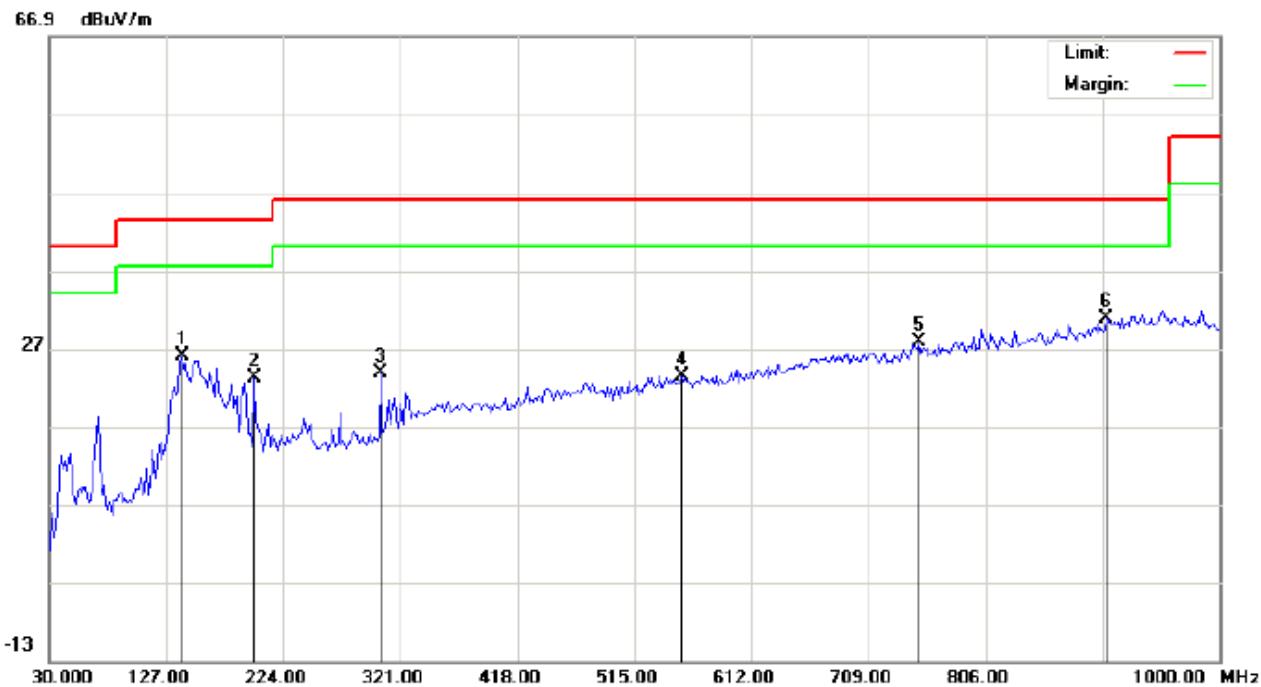

Site: site #1  
 Polarization: Vertical  
 Temperature: 23.1  
 Limit: FCC Class B 3M Radiation  
 Power:  
 Humidity: 54.1 %  
 EUT:Fingerprint Encryption Key  
 Distance:  
 M/N:QKXX  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		139.9333	10.86	15.17	26.03	43.50	-17.47	peak			
2		199.7500	14.24	9.06	23.30	43.50	-20.20	peak			
3		304.8333	8.01	15.73	23.74	46.00	-22.26	peak			
4		553.8000	0.93	22.50	23.43	46.00	-22.57	peak			
5		751.0333	1.09	26.64	27.73	46.00	-18.27	peak			
6	*	906.2333	1.95	28.78	30.73	46.00	-15.27	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

### RADIATED EMISSION ABOVE 1GHZ

#### RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-LOW CHANNEL-HORIZONTAL

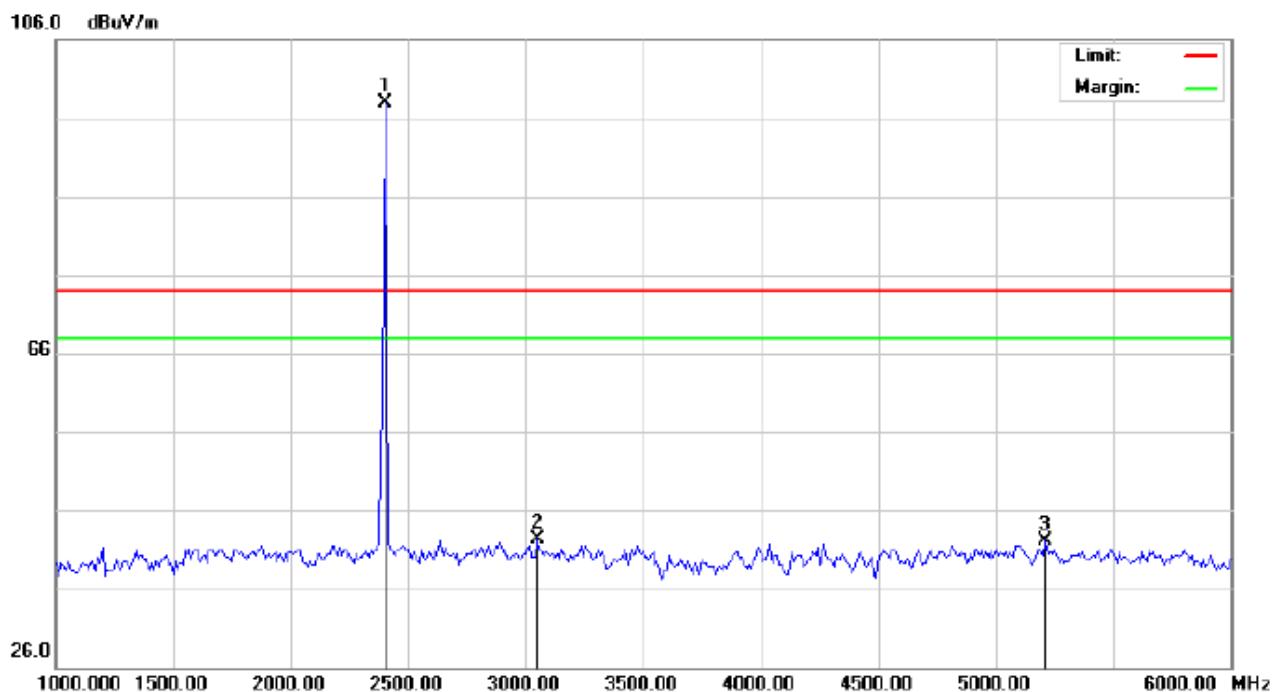


Site: Conduction Polarization: **Horizontal** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	87.61	10.32	97.93	74.00	23.93	peak			
2		3050.000	30.69	11.69	42.38	74.00	-31.62	peak			
3		5208.333	38.06	4.03	42.09	74.00	-31.91	peak			

**RESULT: PASS**

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-LOW CHANNEL –VERTICAL

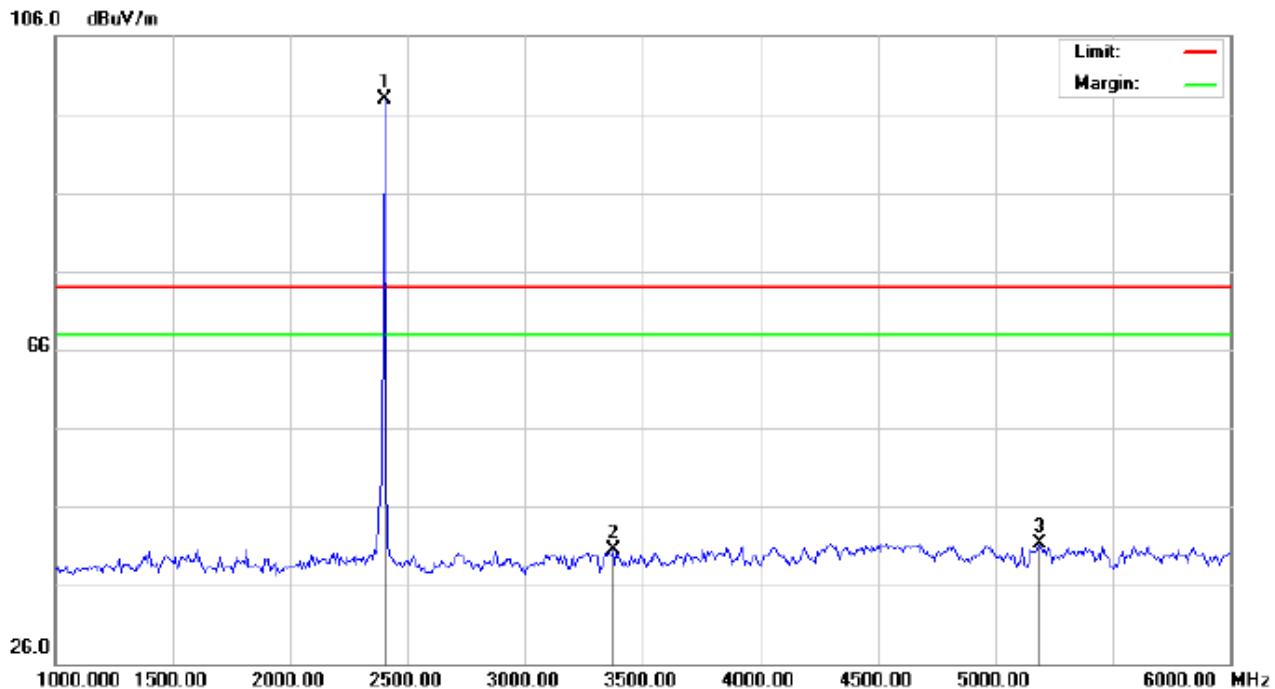


Site: Conduction Polarization: **Vertical** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	87.67	10.32	97.99	74.00	23.99	peak			
2		3375.000	28.51	11.99	40.50	74.00	-33.50	peak			
3		5191.667	36.93	4.36	41.29	74.00	-32.71	peak			

**RESULT: PASS**

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-MIDDLE CHANNEL-HORIZONTAL

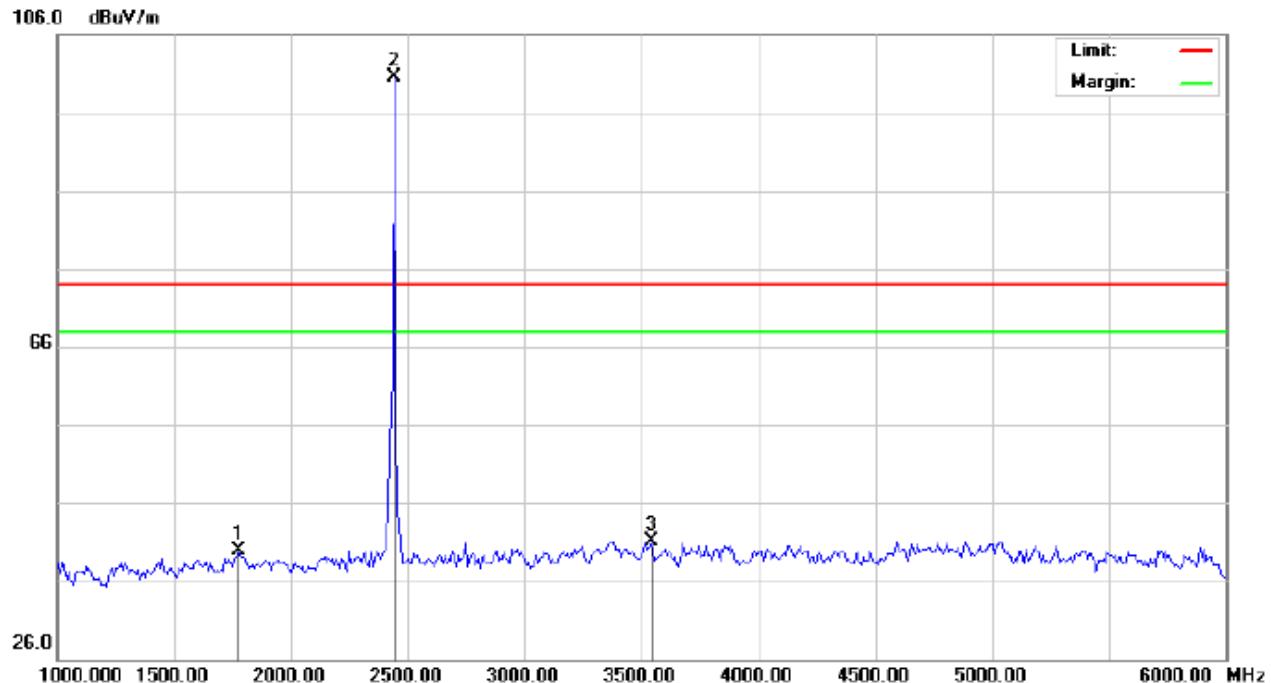


Site: Conduction Polarization: **Horizontal** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1775.000	32.32	7.51	39.83	74.00	-34.17	peak			
2	*	2441.000	90.23	10.36	100.59	74.00	26.59	peak			
3		3541.667	28.68	12.37	41.05	74.00	-32.95	peak			

**RESULT: PASS**

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics) - MIDDLE CHANNEL –VERTICAL

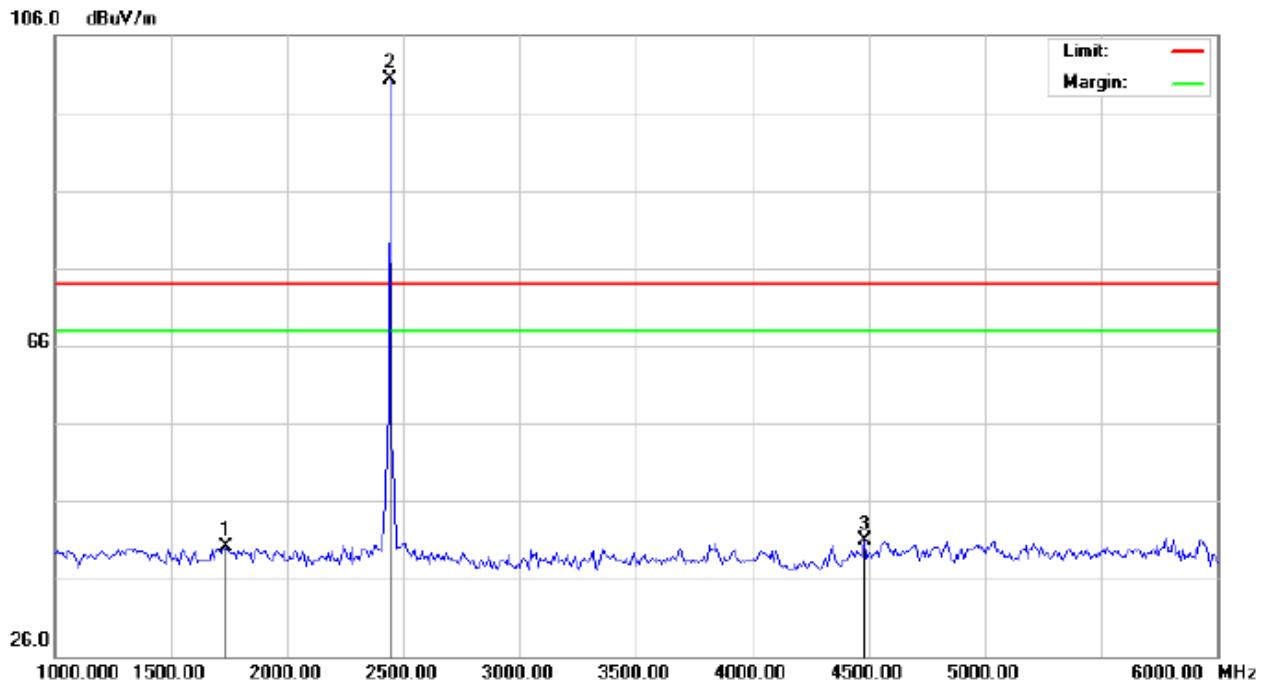


Site: Conduction Polarization: **Vertical** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1733.333	32.95	7.07	40.02	74.00	-33.98	peak			
2	*	2441.000	89.89	10.36	100.25	74.00	26.25	peak			
3		4483.333	33.65	7.17	40.82	74.00	-33.18	peak			

**RESULT: PASS**

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL-HORIZONTAL

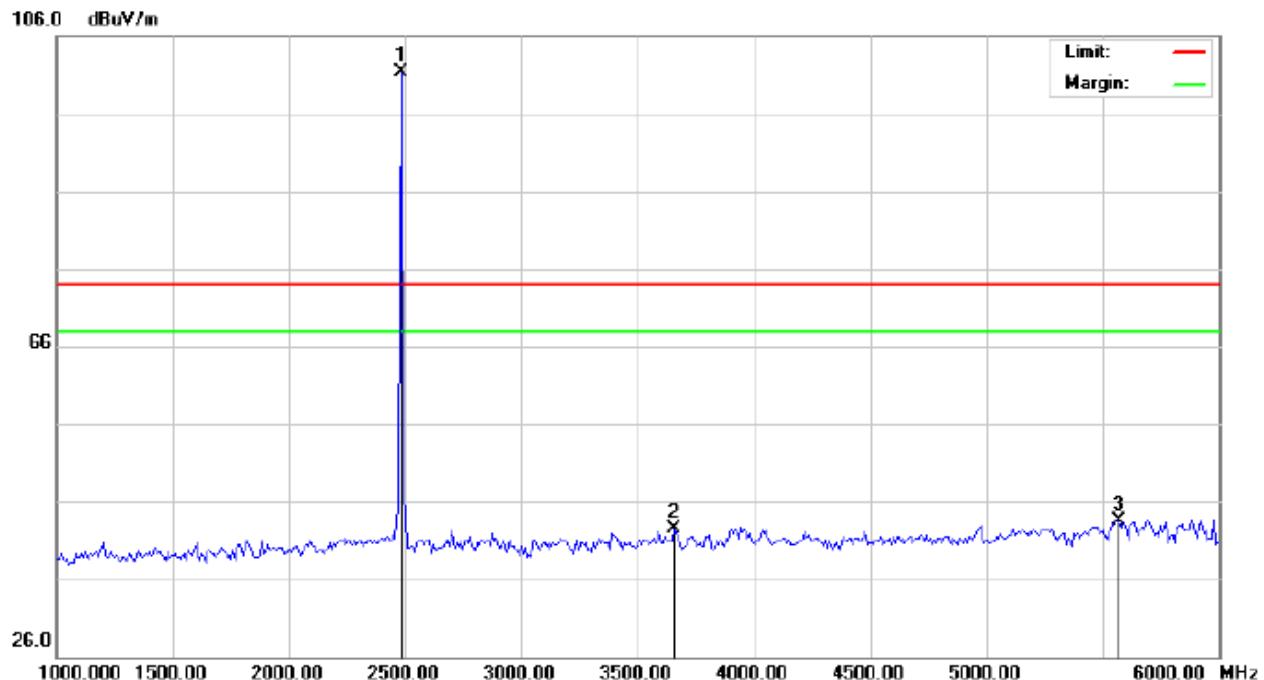


Site: Conduction Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.93	10.41	101.34	74.00	27.34	peak			
2		3658.333	29.47	13.09	42.56	74.00	-31.44	peak			
3		5566.667	45.29	-1.78	43.51	74.00	-30.49	peak			

**RESULT: PASS**

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL –VERTICAL

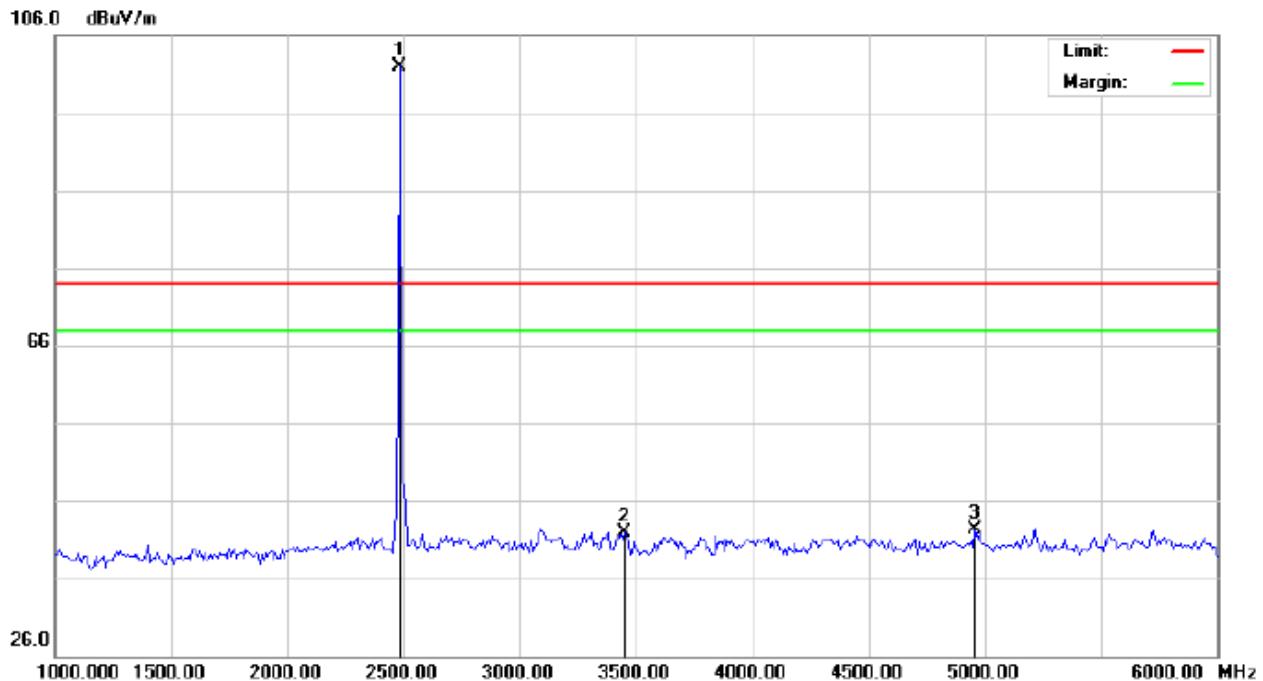

Site: Conduction Polarization: **Vertical** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dB <sub>UV</sub>	dB <sub>UV/m</sub>	dB <sub>UV/m</sub>	dB <sub>UV/m</sub>	dB		cm	Degree	
1	*	2480.000	91.47	10.41	101.88	74.00	27.88	peak			
2		3450.000	29.92	12.06	41.98	74.00	-32.02	peak			
3		4958.333	34.25	8.09	42.34	74.00	-31.66	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

## **11. BAND EDGE EMISSION**

### **11.1. MEASUREMENT PROCEDURE**


1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency=Operation Frequency,  $RBW \geq 100\text{kHz}$ ,  $VBW \geq 3 \times RBW$ ,  
Center frequency =Operation frequency
3. The band edges was measured and recorded.

### **11.2. TEST SET-UP**

Radiated same as 10.2

### 11.3. TEST RESULT (Worst Modulation: GFSK)


TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Horizontal

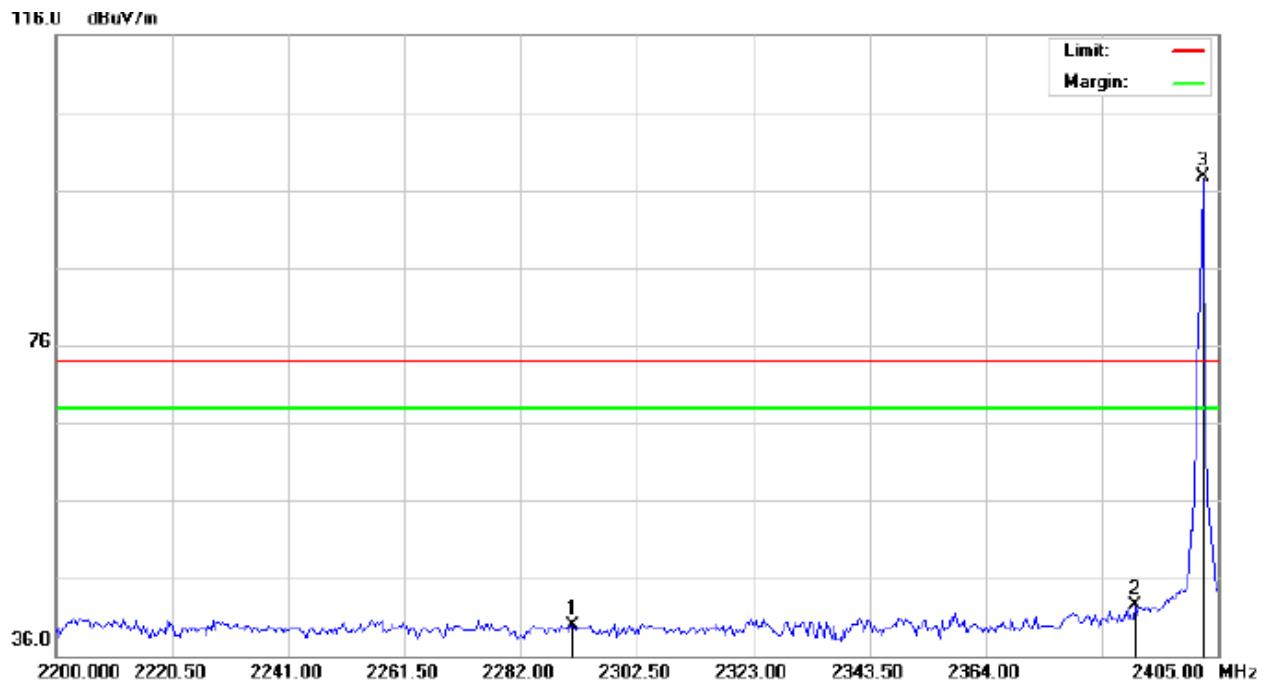

Site: Conduction Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2291.225	29.76	10.20	39.96	74.00	-34.04	peak			
2		2390.000	32.12	10.31	42.43	74.00	-31.57	peak			
3	*	2402.000	87.41	10.32	97.73	74.00	23.73	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Vertical

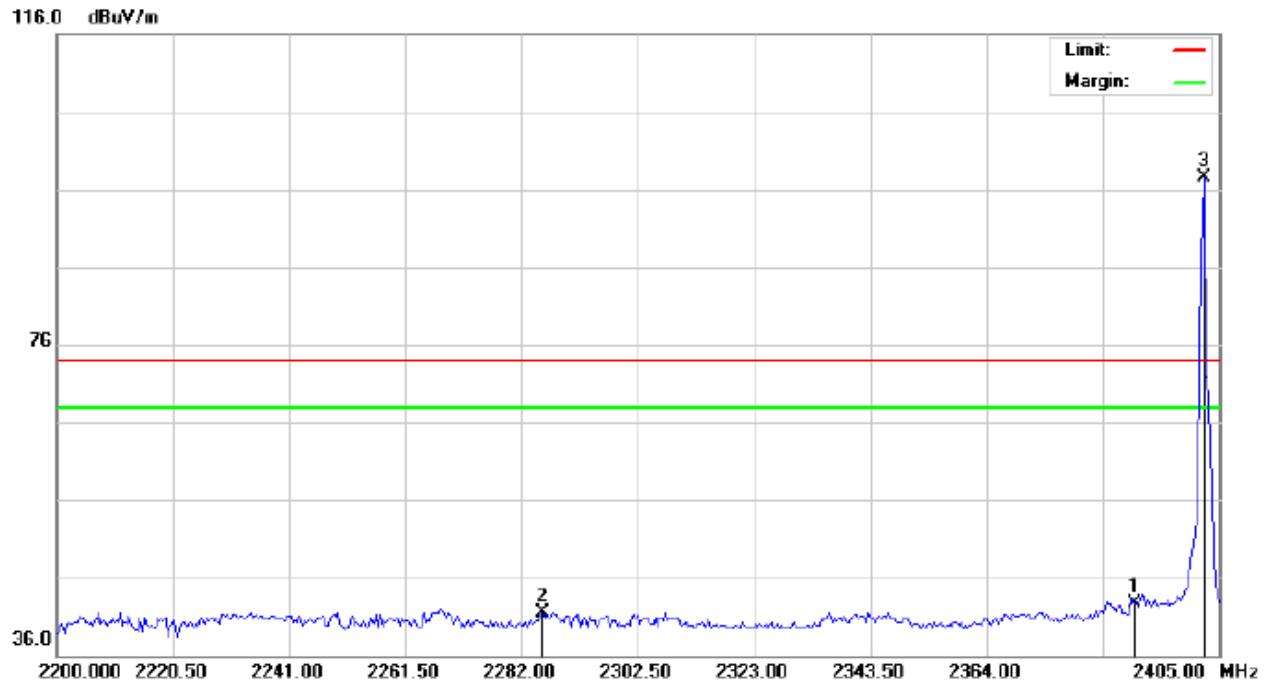

Site: Conduction      Polarization: **Vertical**      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
 EUT:Fingerprint Encryption Key      Distance:  
 M/N:QKXX  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2390.000	32.35	10.31	42.66	74.00	-31.34	peak			
2		2285.758	31.22	10.19	41.41	74.00	-32.59	peak			
3	*	2402.000	87.26	10.32	97.58	74.00	23.58	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Horizontal

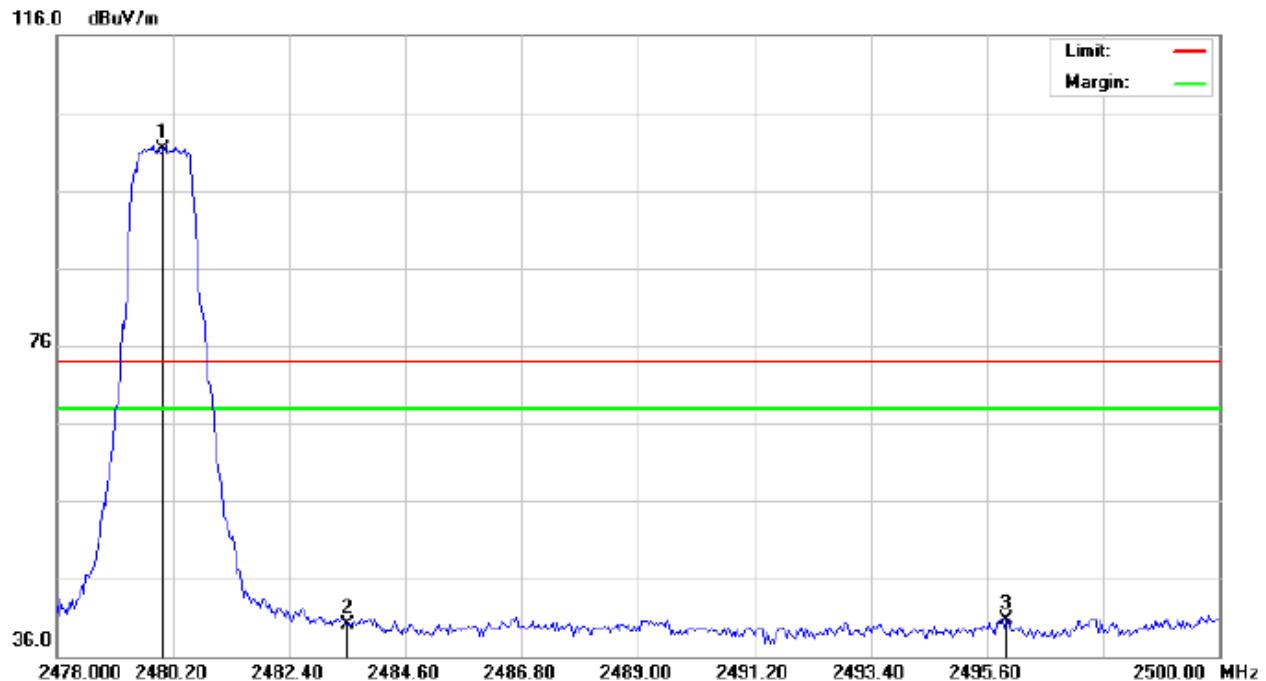

Site: Conduction Polarization: **Horizontal** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.96	10.41	101.37	74.00	27.37	peak			
2		2483.500	29.75	10.41	40.16	74.00	-33.84	peak			
3		2495.967	30.28	10.43	40.71	74.00	-33.29	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Vertical

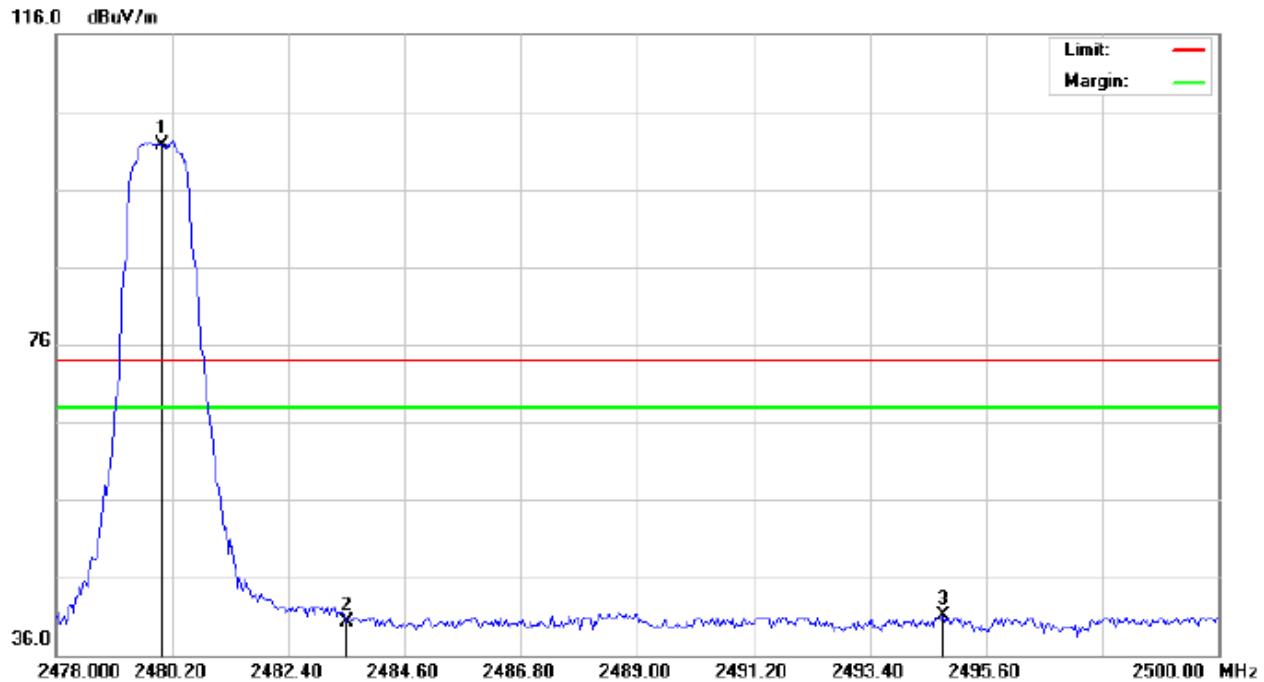

Site: Conduction Polarization: **Vertical** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Fingerprint Encryption Key Distance:  
 M/N:QKXX  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.000	91.35	10.41	101.76	74.00	27.76	peak			
2		2483.500	29.87	10.41	40.28	74.00	-33.72	peak			
3		2494.793	30.62	10.42	41.04	74.00	-32.96	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.  
 3. Hopping off and Hopping on have been tested and only worst case recorded

## 12. NUMBER OF HOPPING FREQUENCY

### 12.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

### 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

### 12.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

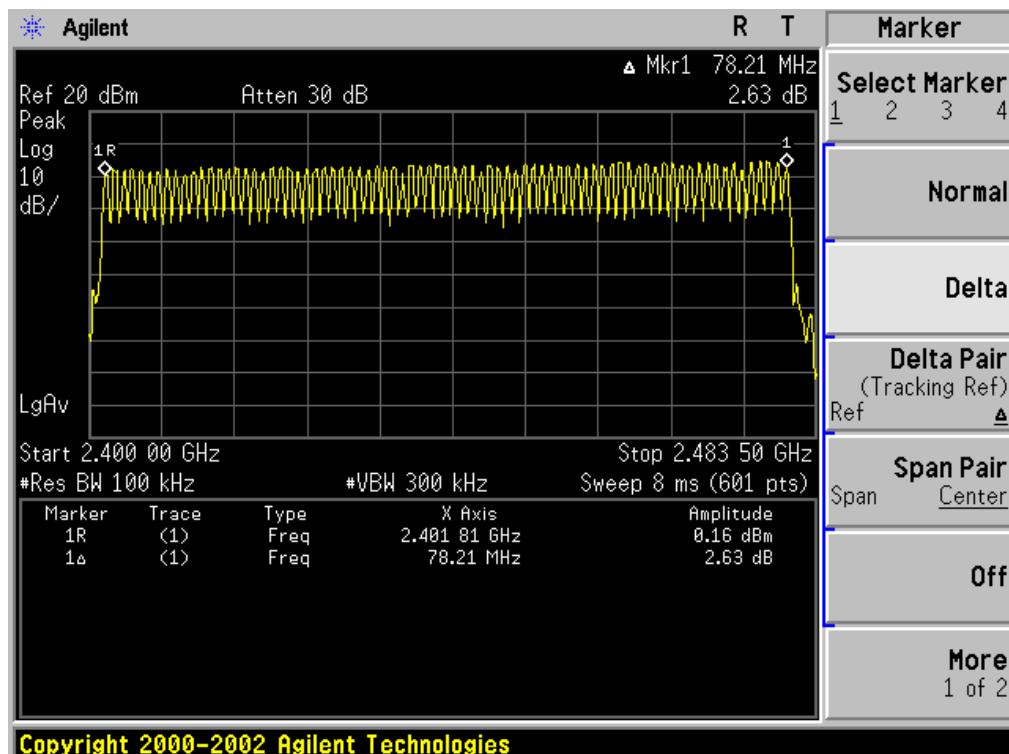

## 13. TIME OF OCCUPANCY (DWELL TIME)

### 13.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set Span = zero span, centered on a hoping channel
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

### 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

### 13.4. LIMITS AND MEASUREMENT RESULT

The Worst Case (3Mbps)

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.886	31.6	307.84	400
Middle	2.886	31.6	307.84	400
High	2.886	31.6	307.84	400

Low Channel Time

$$2.886 * (1600/6) / 79 * 31.6 = 307.84 \text{ ms}$$


Middle Channel Time

$$2.886 * (1600/6) / 79 * 31.6 = 307.84 \text{ ms}$$


High Channel Time

$$2.886 * (1600/6) / 79 * 31.6 = 307.84 \text{ ms}$$


TEST PLOT OF LOW CHANNEL

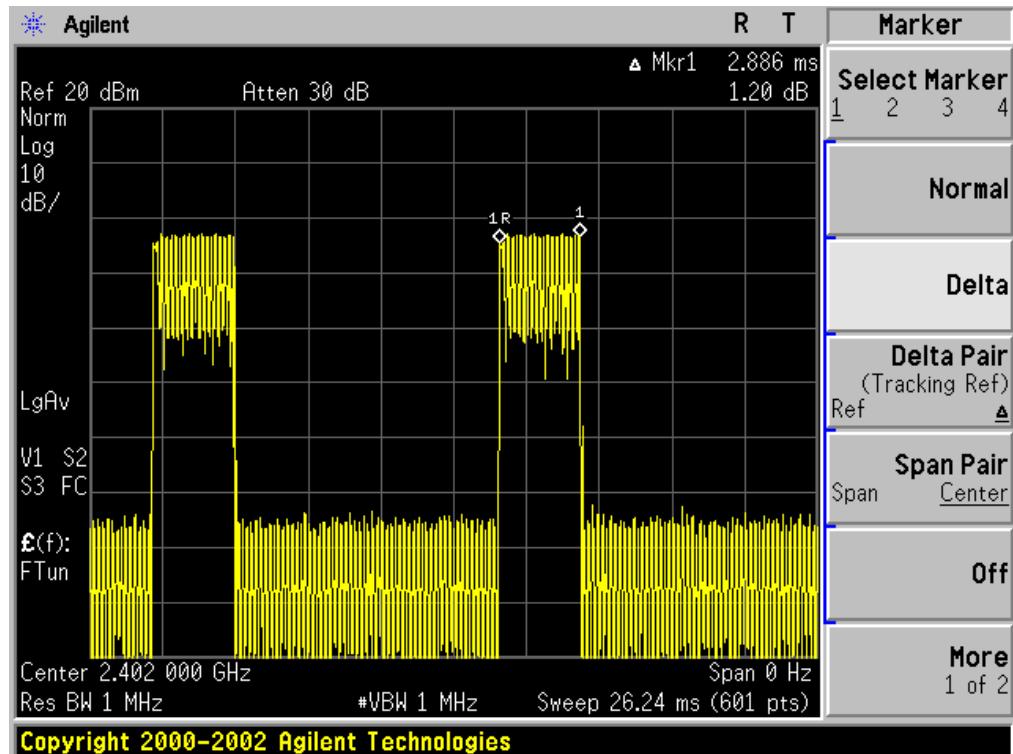

TEST PLOT OF MIDDLE CHANNEL

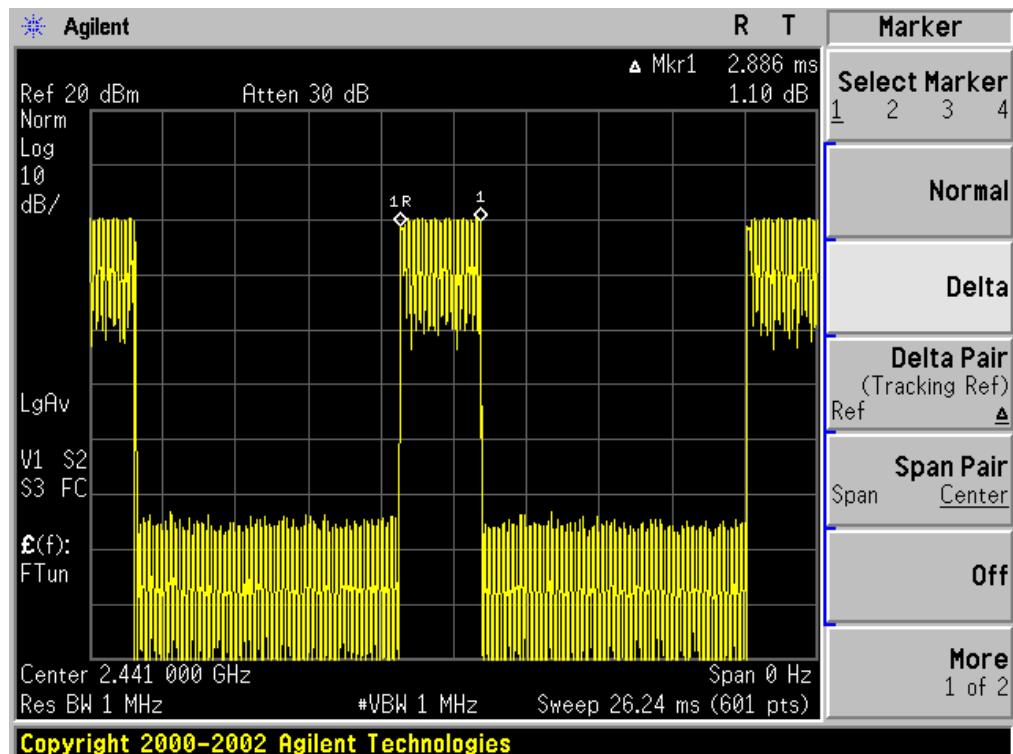

TEST PLOT OF HIGH CHANNEL

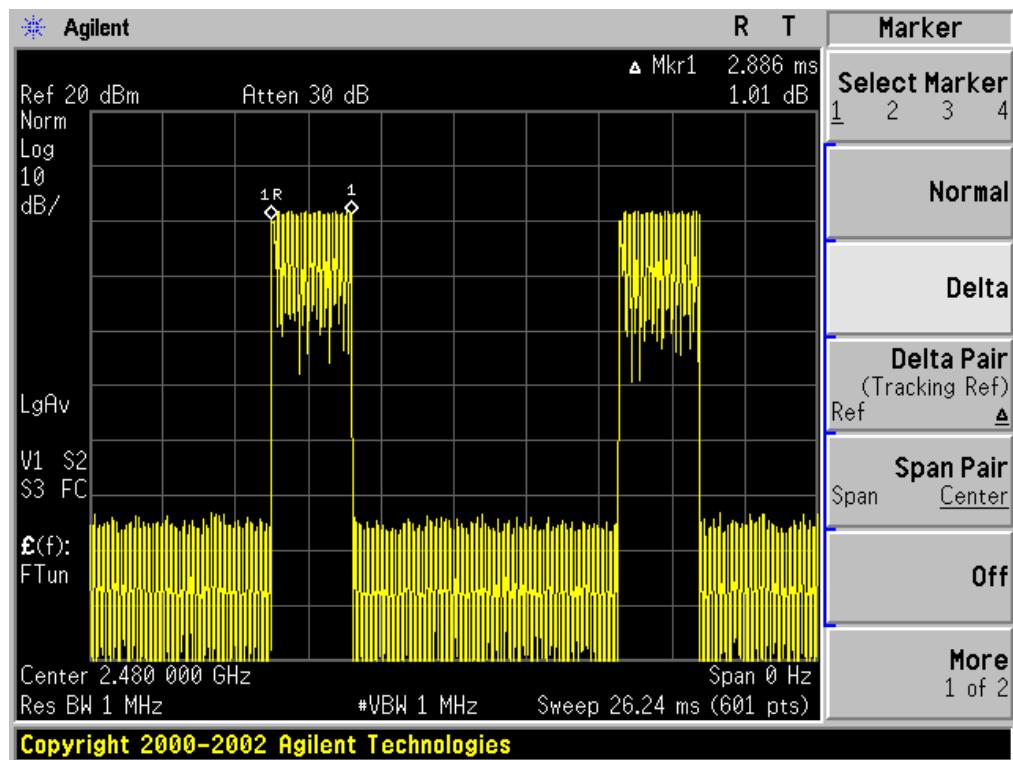

## 14. FREQUENCY SEPARATION

### 14.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold

### 14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


### 14.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

### 14.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1000	$\geq 25$ KHz or 2/3 20 dB BW	Pass

TEST PLOT FOR FREQUENCY SEPARATION ( 3Mbps )

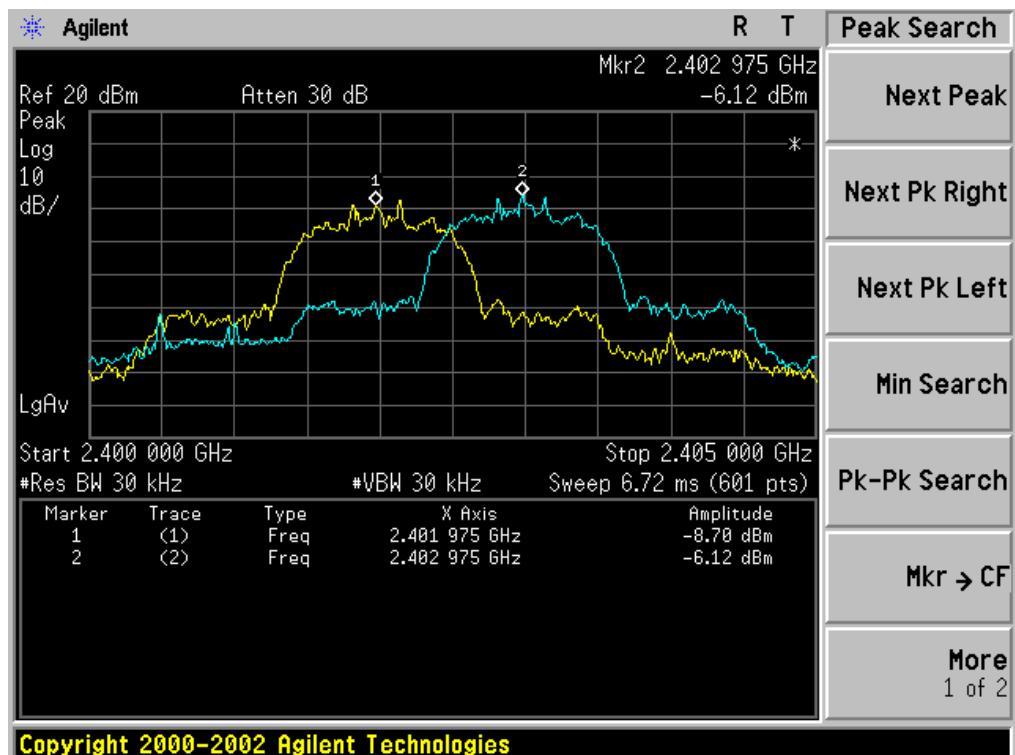

## 15. FCC LINE CONDUCTED EMISSION TEST


### 15.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

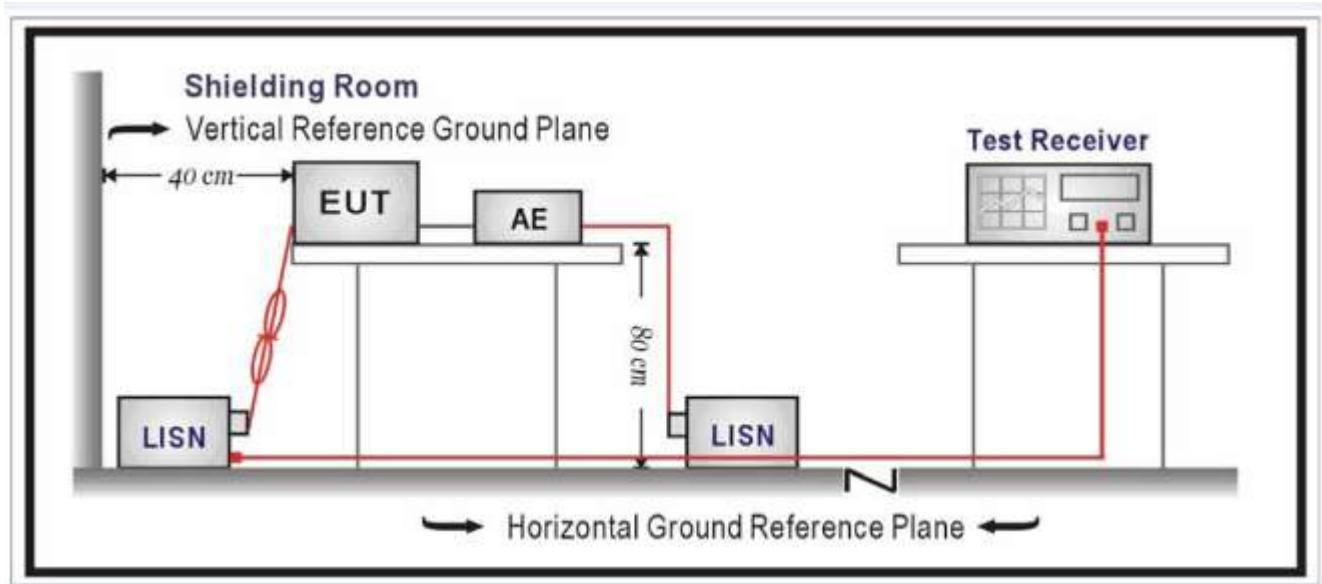

### **15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### **15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

## 15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

### Worst Case (By Adapter)


Line Conducted Emission Test Line 1-L

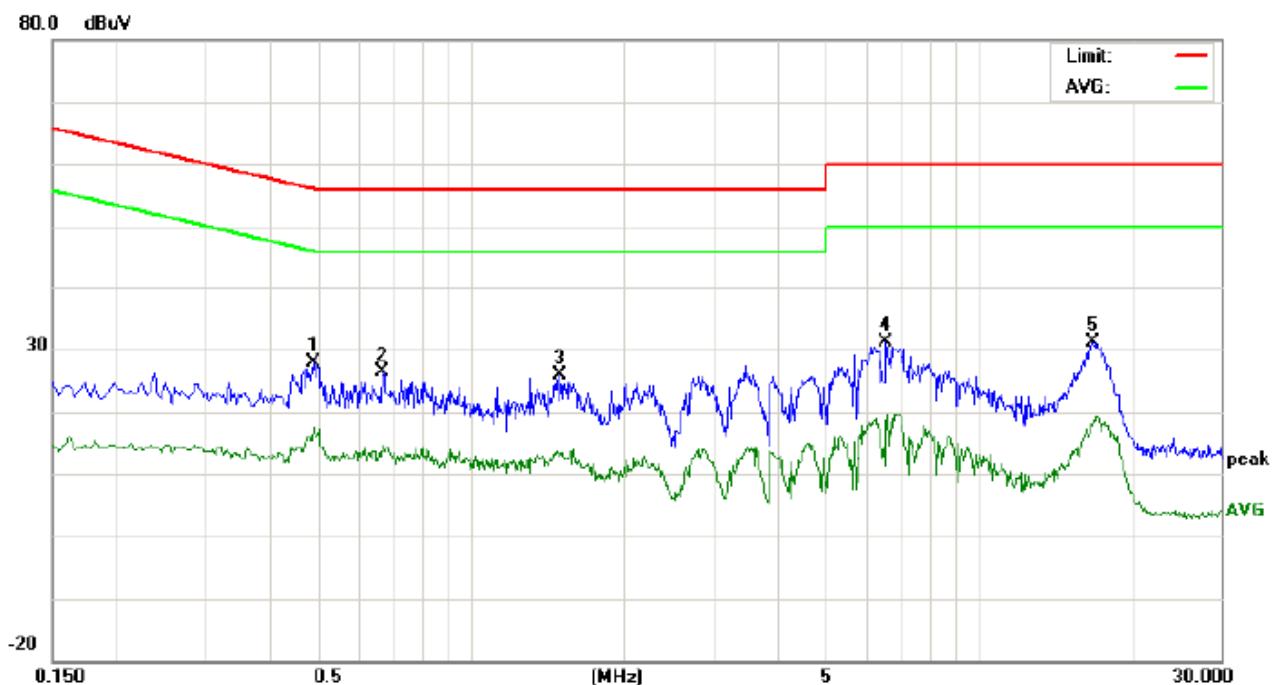

Site: Conduction Phase: **L1** Temperature: 23.4  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.0 %  
 EUT:Fingerprint Encryption Key  
 M/N:QKXX  
 Mode: BT Link + charging  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4900	17.53		6.97	10.39	27.92		17.36	56.17	46.17	-28.25	-28.81	P	
2	0.6700	16.02		3.28	10.34	26.36		13.62	56.00	46.00	-29.64	-32.38	P	
3	1.4980	15.44		3.09	10.38	25.82		13.47	56.00	46.00	-30.18	-32.53	P	
4	6.5580	20.72		7.51	10.31	31.03		17.82	60.00	50.00	-28.97	-32.18	P	
5	16.8380	20.94		7.47	10.13	31.07		17.60	60.00	50.00	-28.93	-32.40	P	

Line Conducted Emission Test Line 2-N

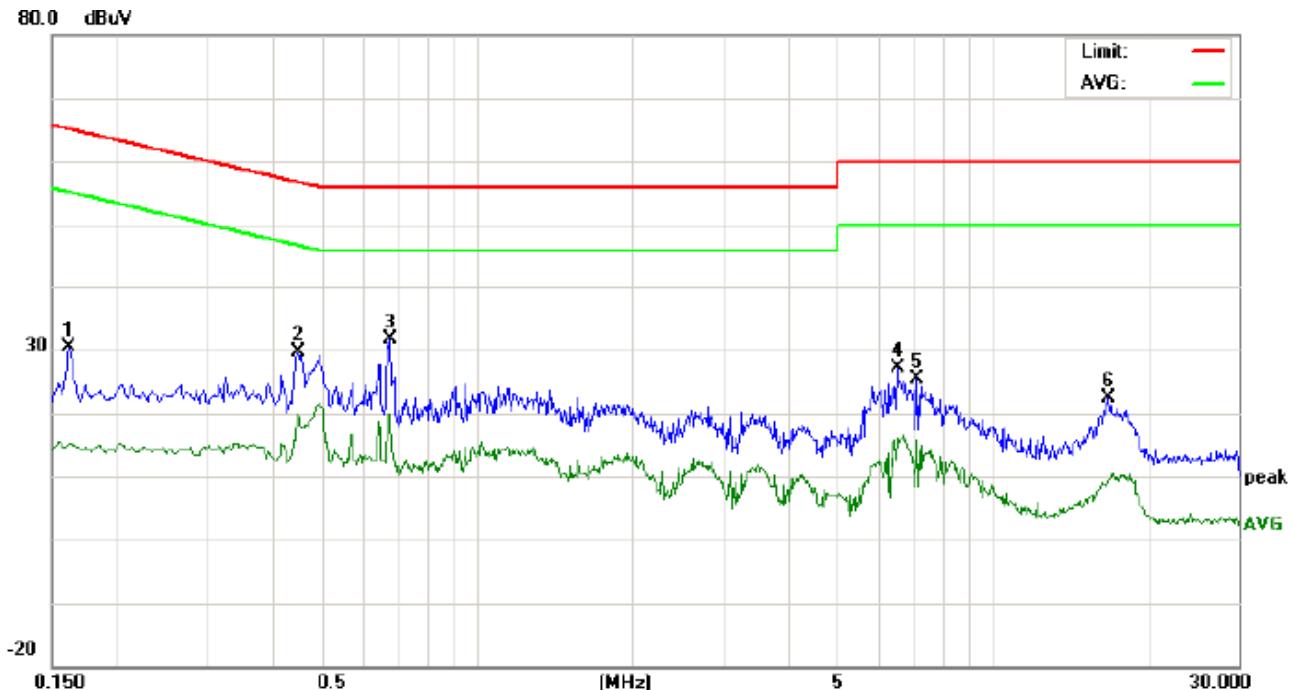


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	20.27		4.95	10.17	30.44		15.12	65.36	55.36	-34.92	-40.24	P	
2	0.4500	19.38		9.48	10.37	29.75		19.85	56.87	46.87	-27.12	-27.02	P	
3	0.6820	21.23		9.35	10.34	31.57		19.69	56.00	46.00	-24.43	-26.31	P	
4	6.5380	16.86		5.73	10.30	27.16		16.03	60.00	50.00	-32.84	-33.97	P	
5	7.1700	15.11		5.23	10.35	25.46		15.58	60.00	50.00	-34.54	-34.42	P	
6	16.8220	12.28		-0.70	10.13	22.41		9.43	60.00	50.00	-37.59	-40.57	P	



## APPENDIX A: PHOTOGRAPHS OF TEST SETUP


### FCC LINE CONDUCTED EMISSION TEST SETUP



### FCC RADIATED EMISSION TEST SETUP

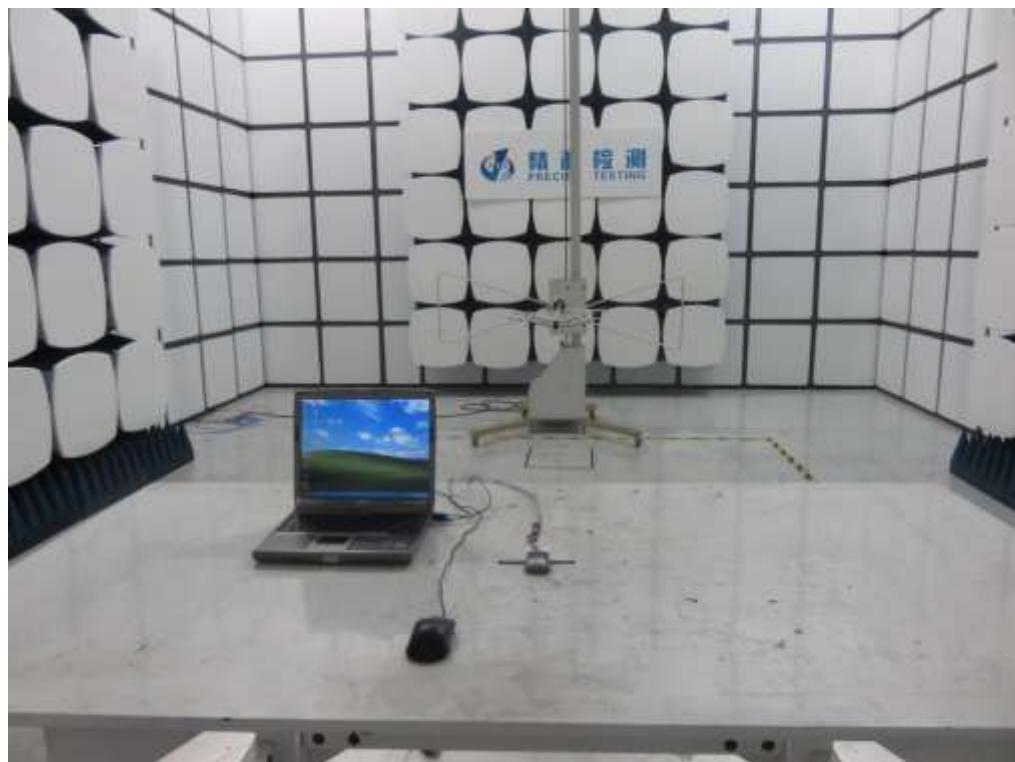

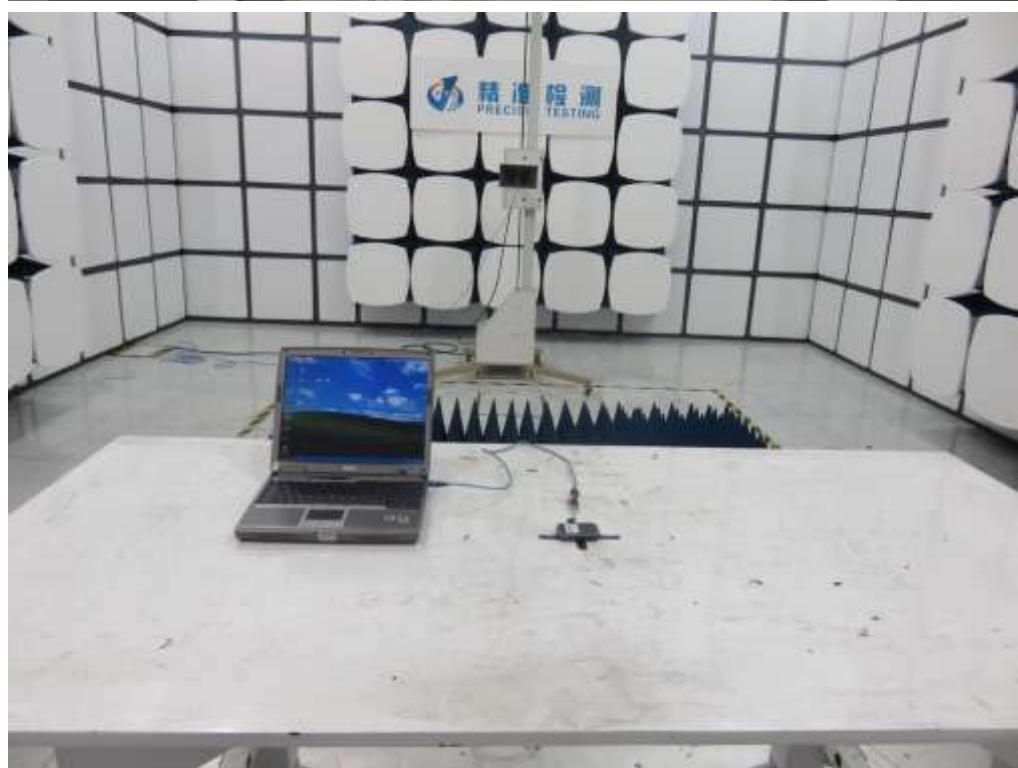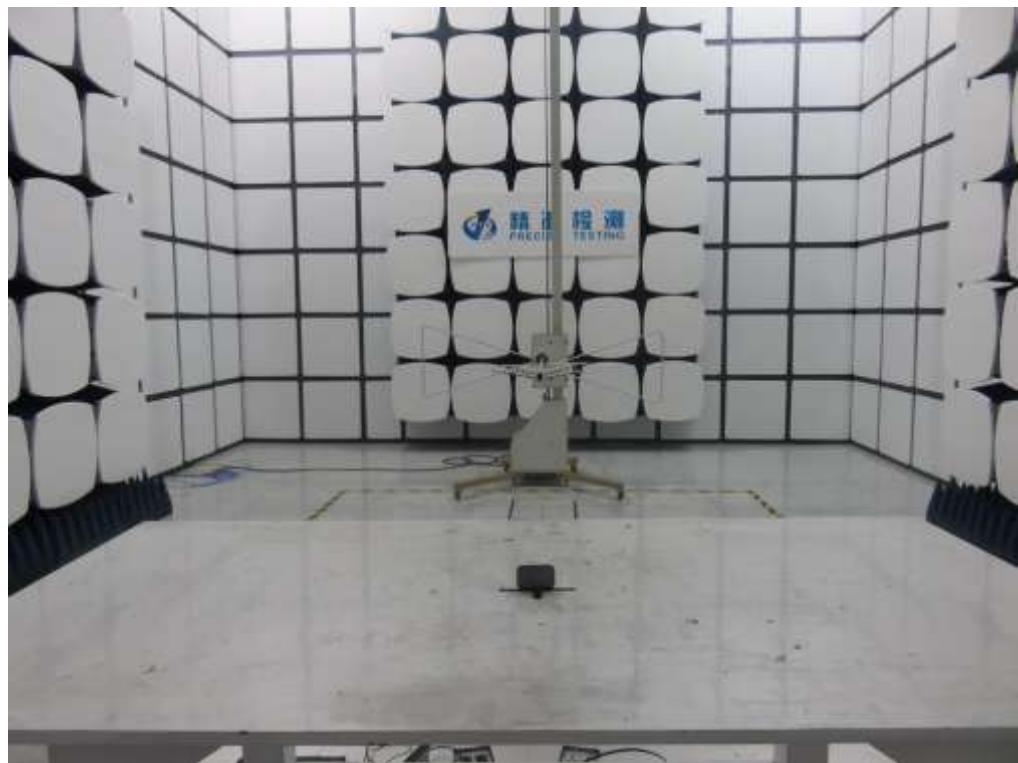

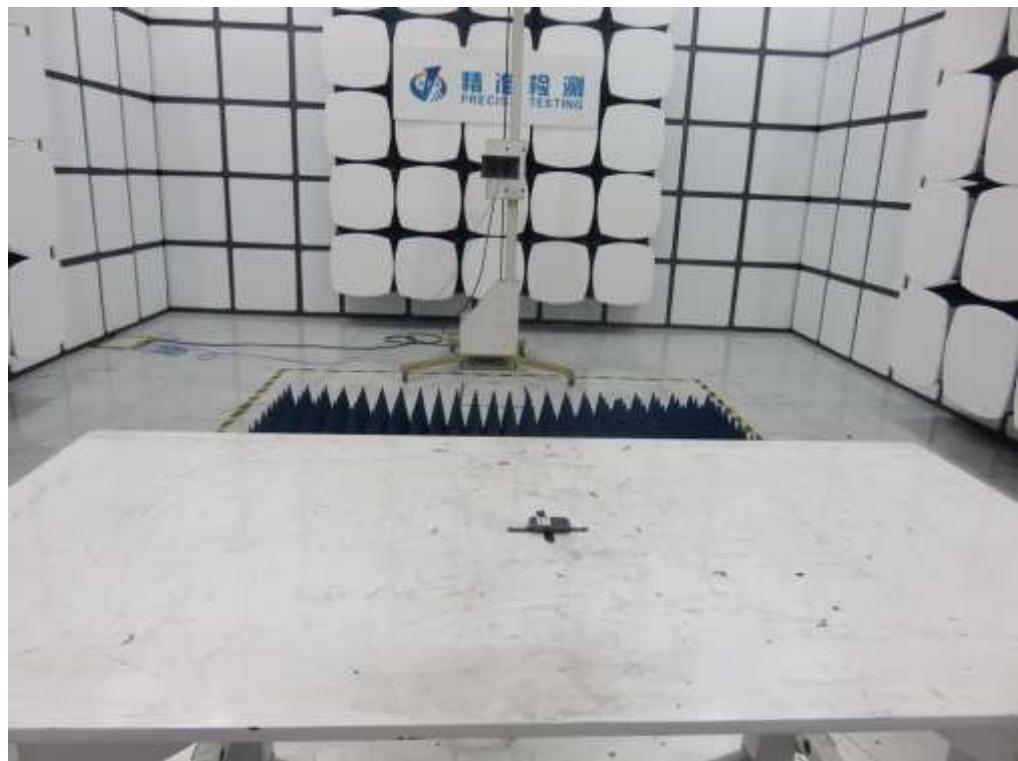

VIEW OF EUT (A.E)



**Note: The Adapter above was provided by AGC Lab.**

**APPENDIX B: PHOTOGRAPHS OF EUT**  
**TOTAL VIEW OF EUT**



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT

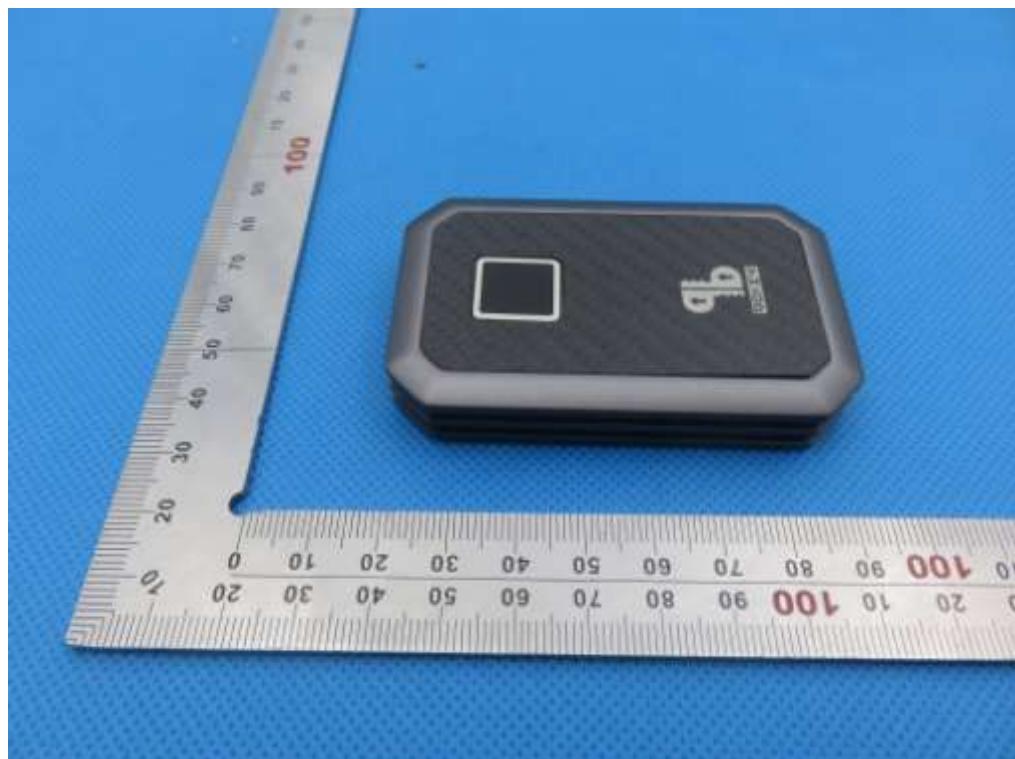


VIEW OF EUT (Port)




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

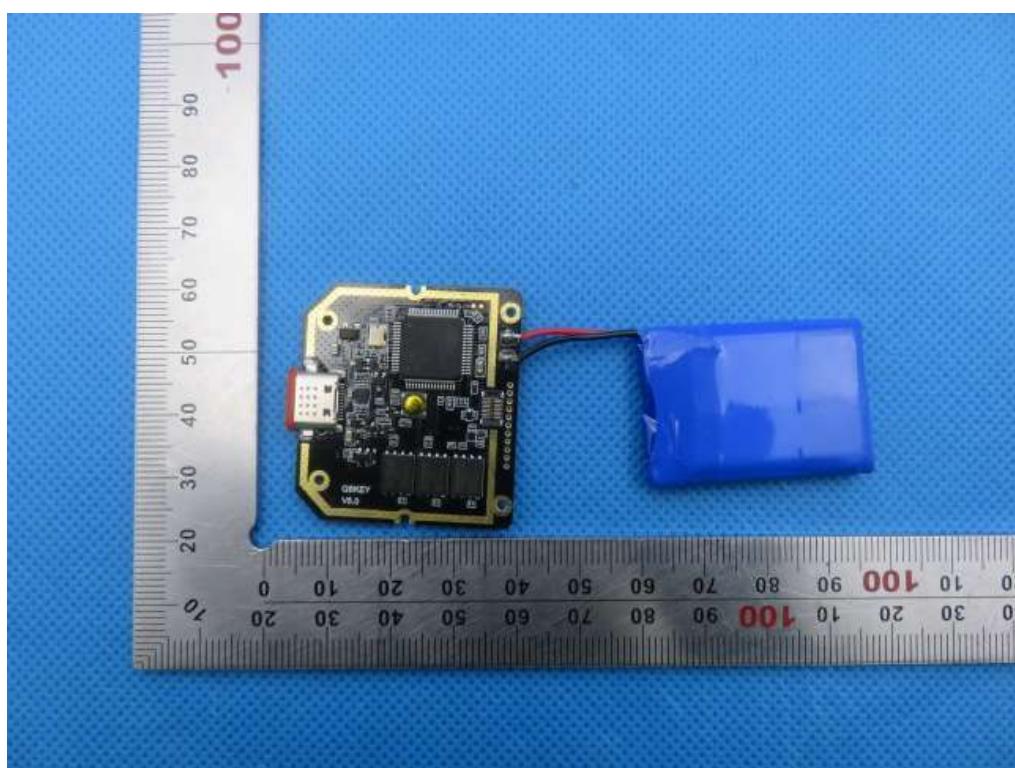


INTERNAL VIEW OF EUT-2

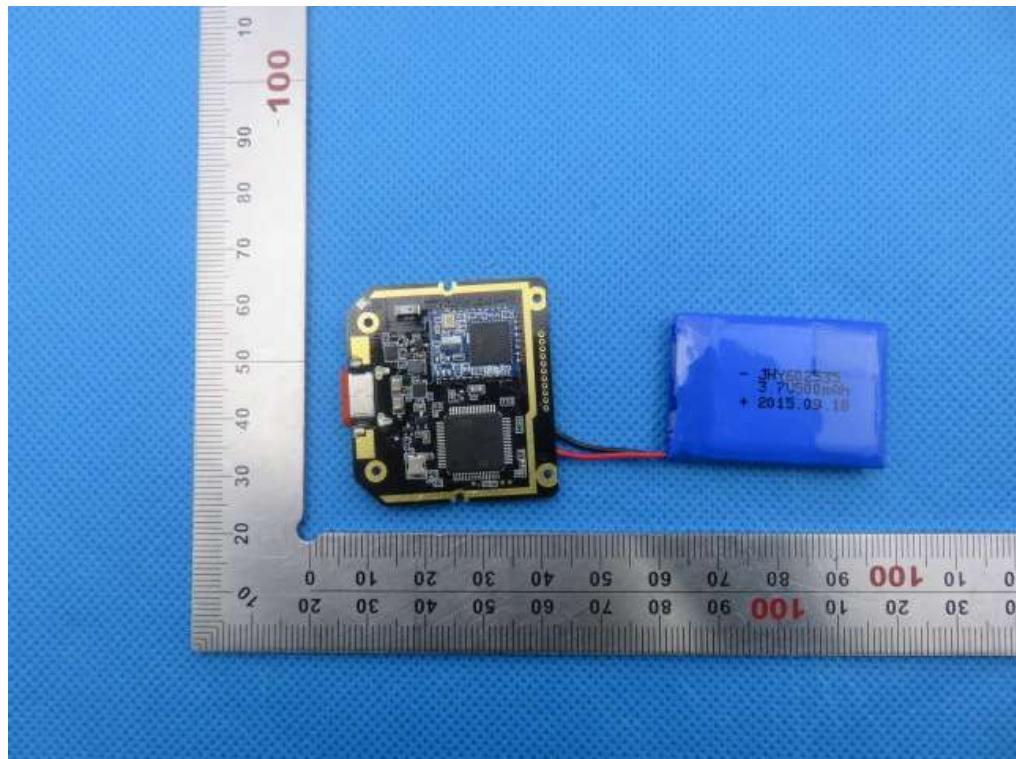


INTERNAL VIEW OF EUT-3

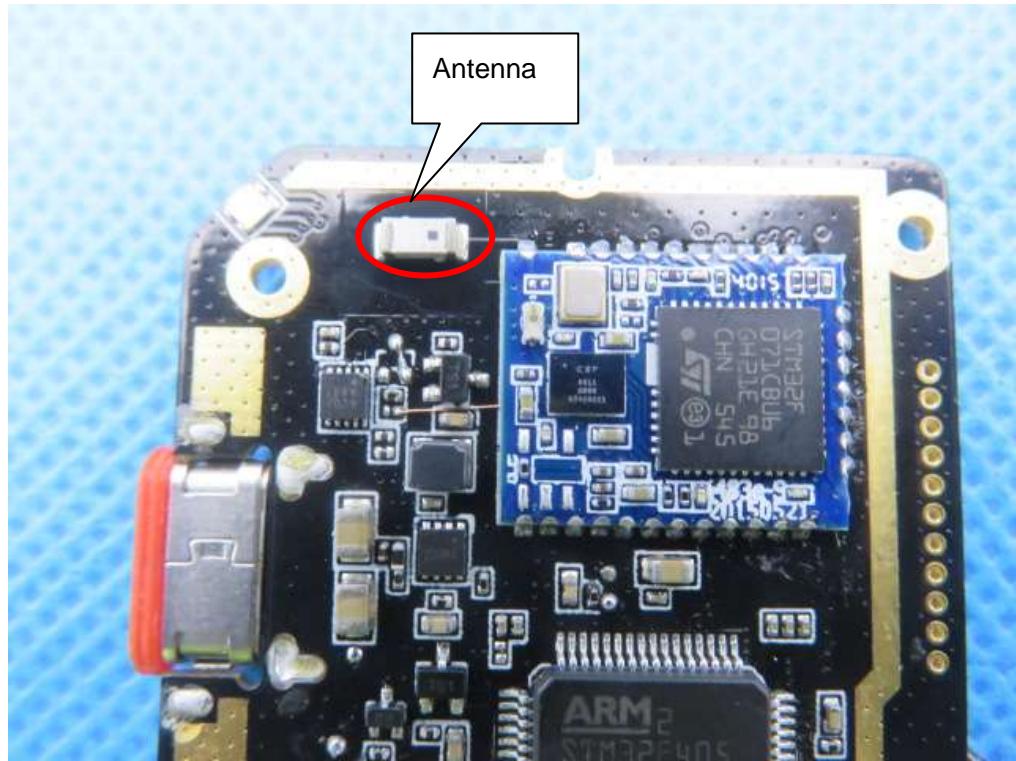

INTERNAL VIEW OF EUT-4

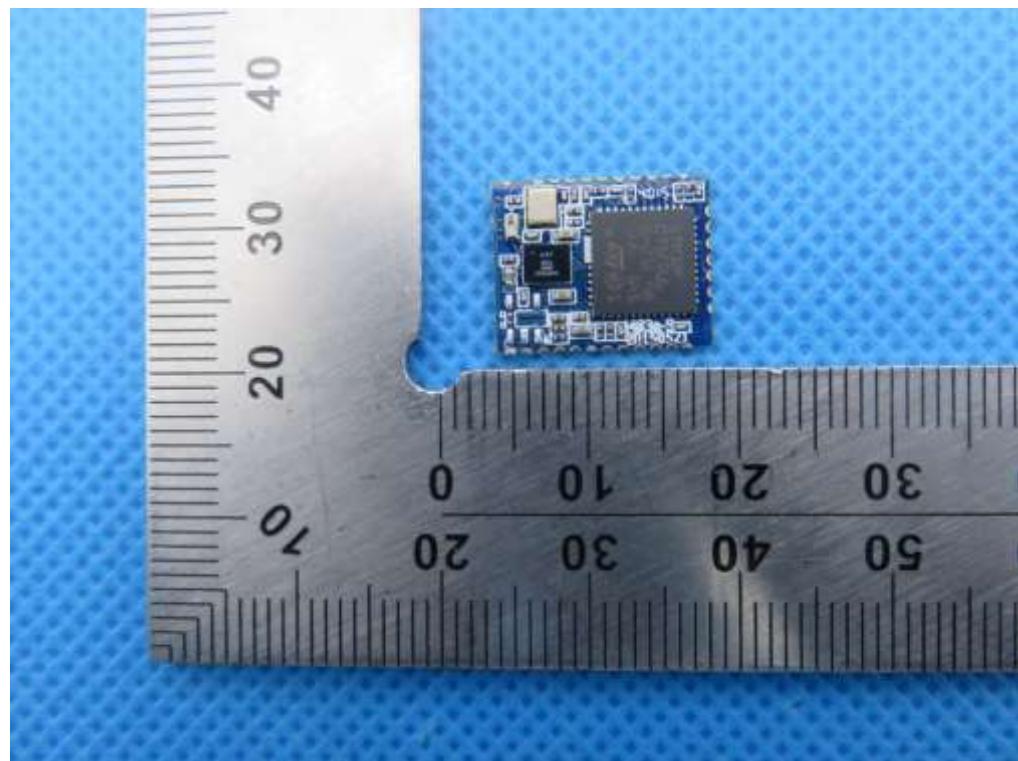

INTERNAL VIEW OF EUT-5

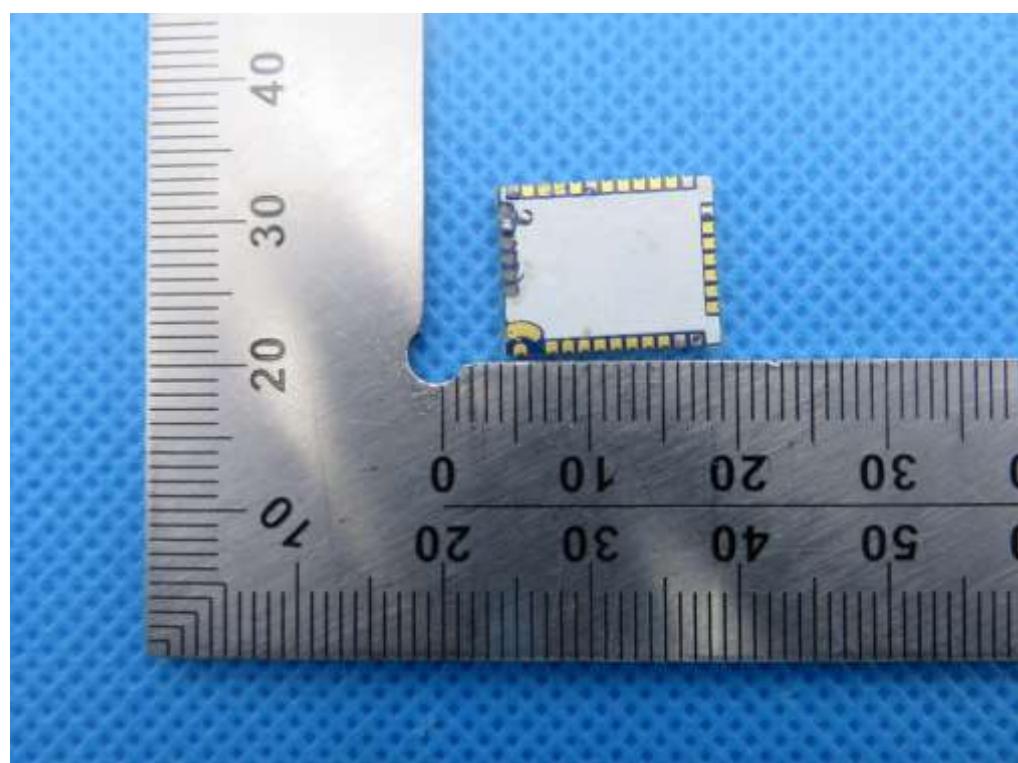

----END OF REPORT----