#### FCC TEST REPORT

### For

# Guangzhou maiguang Electronic Science Technology Co., Ltd

WIFI Control remote

Model No.: MIC-V6

Prepared for : Guangzhou maiguang Electronic Science Technology Co., Ltd
Address : Unit8,388 Zengnan Road , Liwan District, Guangzhou, P.R. China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,

Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330 Fax : (+86)755-82591332 Web : www.LCS-cert.com

Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 15, 2015

Number of tested samples : 1

Sample number : Prototype

Date of Test : December 15, 2015- January 11, 2015

Date of Report : January 11, 2015

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.247): 2015

**Report Reference No. .....: LCS1510160717E** 

Date of Issue.....: January 11, 2015

Testing Laboratory Name ......: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address.....: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,

Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ......: Full application of Harmonised standards

Partial application of Harmonised standards  $\Box$ 

Other standard testing method  $\Box$ 

Applicant's Name .....: Guangzhou maiguang Electronic Science Technology Co., Ltd

Address .....: Unit8,388 Zengnan Road, Liwan District, Guangzhou, P.R. China

**Test Specification** 

Standard.....: FCC CFR 47 PART 15 C(15.247): 2015

Test Report Form No. .....: LCSEMC-1.0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF .....: Dated 2011-03

## Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: WIFI Control remote

Trade Mark.....: Maxsepct

Model/ Type reference .....: MIC-V6

Ratings.....: Input: AC 100~240V, 50/60Hz, Output: 5V/1A

Result .....: Positive

Compiled by:

**Supervised by:** 

Approved by:

Dick Su / File administrators

Glin Lu / Technique principal

Gavin Liang/ Manager

# **FCC -- TEST REPORT**

Test Report No.: LCS1510160717E

January 11, 2015 Date of issue

Type / Model	: MIC-V6
EUT	: WIFI Control remote
Applicant	: Guangzhou maiguang Electronic Science Technology Co., Ltd
Address	: Unit8,388 Zengnan Road , Liwan District, Guangzhou, P.R. China
Telephone	:/
Fax	: /
Manufacturer	: Guangzhou maiguang Electronic Science Technology Co., Ltd
A dalmana	William Conf.
Address	: Unit8,388 Zengnan Road , Liwan District, Guangzhou, P.R. China
Telephone	: Unit8,388 Zengnan Road , Liwan District, Guangzhou, P.R. China : /
	:/
Telephone	:/
Telephone	:/
Telephone	: / : /
TelephoneFax	: / : / : Guangzhou maiguang Electronic Science Technology Co., Ltd
Factory	: / : / : Guangzhou maiguang Electronic Science Technology Co., Ltd : Unit8,388 Zengnan Road , Liwan District, Guangzhou, P.R. China

Test Result	Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. DESCRIPTION OF DEVICE (EUT)	
2. TEST METHODOLOGY	8
2.1 EUT CONFIGURATION	8
3. SYSTEM TEST CONFIGURATION	9
3.1. JUSTIFICATION	
4. SUMMARY OF TEST RESULTS	10
5. SUMMARY OF TEST EQUIPMENT	11
6. TEST RESULT	12
6.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 6.2. POWER SPECTRAL DENSITY MEASUREMENT 6.3. 6 DB SPECTRUM BANDWIDTH MEASUREMENT 6.4. RADIATED EMISSIONS MEASUREMENT 6.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST 6.6. POWER LINE CONDUCTED EMISSIONS	
7. ANTENNA REQUIREMENT	50
7.1 STANDARD APPLICABLE	

## 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

EUT : WIFI Control remote

Test Model : MIC-V6

Power Supply : Input: AC 100~240V, 50/60Hz, Output: 5V/1A

Hardware Version : V1.30 Software Version : V1.30

WIFI

Frequency Range : 2412-2462MHz

Channel Spacing : 5MHz

Channel Number : 11 Channel for 20MHz bandwidth(2412~2462MHz)

Modulation Type : 802.11b: DSSS; 802.11g/n: OFDM Antenna Description : Integral Antenna, 3.7 dBi(Max.)

# 1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Dongguan Guanjin Electronics Technology Co.,Ltd	AC Adapter	K05S050100G	1	CE

### 1.3. External I/O Cable

I/O Port Description	Quantity	Cable
TF Slot	1	N/A

## 1.4. Description of Test Facility

Site Description EMC Lab.

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1. VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108. UL Registration Number. is 100571-492. TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

Name of Firm : Shenzhen LCS Compliance Testing Laboratory Ltd.

Site Location : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,

Bao'an District, Shenzhen, Guangdong, China

## 1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

# 1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty		9KHz~30MHz	3.10dB	(1)
		30MHz~200MHz	2.96dB	(1)
	:	200MHz~1000MHz	3.10dB	(1)
		1GHz~26.5GHz	3.80dB	(1)
		26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty:		150kHz~30MHz	1.63dB	(1)
Power disturbance	:	30MHz~300MHz	1.60dB	(1)

<sup>(1).</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description Of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(Low Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode : 1 Mbps, DSSS. 802.11g Mode : 6 Mbps, OFDM. 802.11n Mode HT20:.MCS0, OFDM.

Channel List & Frequency

802.11b/g/n(HT20)

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
	1	2412	7	2442
	2	2417	8	2447
2412 2462MHz	3	2422	9	2452
2412~2462MHz	4	2427	10	2457
	5	2432	11	2462
	6	2437		

<sup>\*\*\*</sup>Note: For pre-testing, when performed with LiPo Battery Charger, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

#### 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209, 15.247.

#### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

#### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

# 3. SYSTEM TEST CONFIGURATION

### 3.1. Justification

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

## 3.2. EUT Exercise Software

N/A

## 3.3. Special Accessories

N/A

# 3.4. Block Diagram/Schematics

Please refer to the related document

# 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

# 3.6. Test Setup

Please refer to the test setup photo.

# 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C				
FCC Rules	Result			
§15.247(b)	b) Maximum Conducted Output Power			
§15.247(e) Power Spectral Density		Compliant		
§15.247(a)(2)	6dB Bandwidth	Compliant		
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant		
§15.205	Emissions at Restricted Band	Compliant		
§15.207(a) Conducted Emissions		Compliant		
§15.203	Antenna Requirements	Compliant		

# 5. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Sensor	R&S	NRV-Z51	100458	2015-06-18	2016-06-17
2	Power Sensor	R&S	NRV-Z32	10057	2015-06-18	2016-06-17
3	Power Meter	R&S	NRVS	100444	2015-06-18	2016-06-17
4	DC Filter	MPE	23872C	N/A	2015-06-18	2016-06-17
5	RF Cable	Harbour Industries	1452	N/A	2015-06-18	2016-06-17
6	SMA Connector	Harbour Industries	9625	N/A	2015-06-18	2016-06-17
7	Spectrum Analyzer	Agilent	N9020A	MY50510140	2015-10-27	2016-10-26
8	Signal analyzer	Agilent	E4448A(Exter nal mixers to 40GHz)	US44300469	2015-06-16	2016-06-15
9	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2015-06-18	2016-06-17
10	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03СН03-НҮ	2015-06-18	2016-06-17
11	Amplifier	SCHAFFNER	COA9231A	18667	2015-06-18	2016-06-17
12	12 Amplifier Agi		8449B	3008A02120	2015-06-18	2016-06-17
13	Amplifier	MITEQ	AMF-6F-2604 00	9121372	2015-06-16	2016-06-15
14	Loop Antenna	R&S	HFH2-Z2	860004/001	2015-06-18	2016-06-17
15	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2015-06-10	2016-06-09
16	Horn Antenna	EMCO	3115	6741	2015-06-10	2016-06-09
17	Horn Antenna	SCHWARZBEC K	BBHA9170	BBHA9170154	2015-06-10	2016-06-09
18	RF Cable-R03m	Jye Bao	RG142	CB021	2015-06-18	2016-06-17
19	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2015-06-18	2016-06-17
20	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2015-06-18	2016-06-17
21	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2015-06-18	2016-06-17
22	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2015-06-18	2016-06-17
23	EMI Test Software	AUDIX	ЕЗ	N/A	2015-06-18	2016-06-17

### 6. TEST RESULT

## 6.1. Maximum Conducted Output Power Measurement

#### 6.1.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


#### 6.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

#### 6.1.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

#### 6.1.4. Test Setup Layout



#### 6.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.1.6. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

#### 802.11b

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	19.55	30	Complies
6	2437	18.87	30	Complies
11	2462	18.53	30	Complies

### 802.11g

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	18.65	30	Complies
6	2437	18.80	30	Complies
11	2462	19.29	30	Complies

#### 802.11n HT20

Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412	18.58	30	Complies
6	2437	18.66	30	Complies
11	2462	19.37	30	Complies

Note: The relevant measured result has the offset with cable loss already.

## 6.2. Power Spectral Density Measurement

#### 5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


#### 5.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

#### 5.2.3. Test Procedures

- 1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3. Set the RBW = 3 kHz.
- 4. Set the VBW  $\geq$  3\*RBW
- 5. Set the span to 1.5 times the DTS channel bandwidth.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

#### 5.2.4. Test Setup Layout



## 6.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.2.6. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

### 802.11b

Channel	Frequency (MHz)	Power <i>Density</i> (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
1	2412	-10.895	8	Complies
6	2437	-11.330	8	Complies
11	2462	-10.590	8	Complies

## 802.11g

Channel	Frequency (MHz)	Power <i>Density</i> (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
1	2412	-11.383	8	Complies
6	2437	-11.282	8	Complies
11	2462	-11.819	8	Complies


#### 802.11n HT20


Channel	Frequency (MHz)	Power <i>Density</i> (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
1	2412	-10.784	8	Complies
6	2437	-11.412	8	Complies
11	2462	-10.824	8	Complies

Note: The measured power density (dBm) has the offset with cable loss already.


802.11b power density



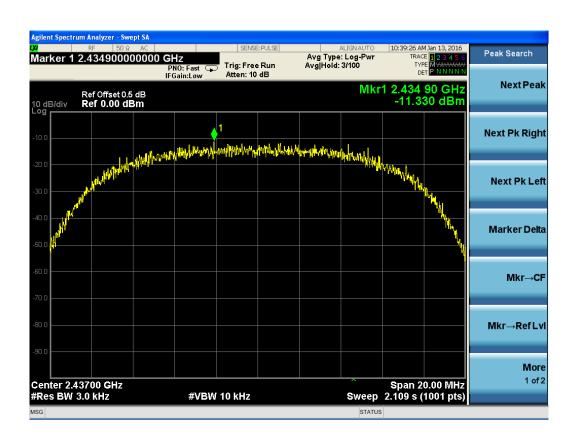


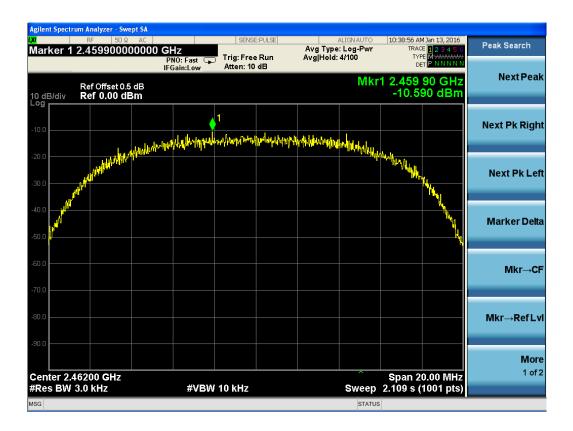


802.11g power density

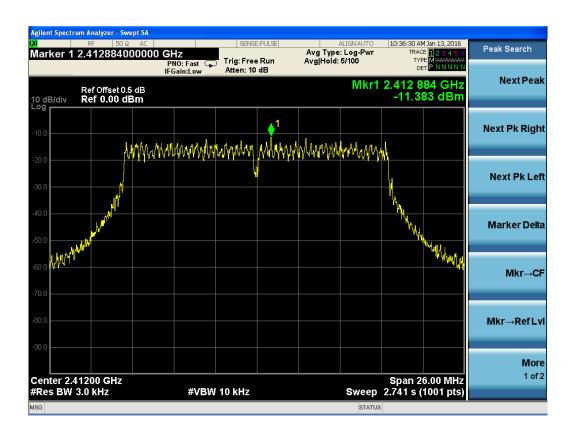





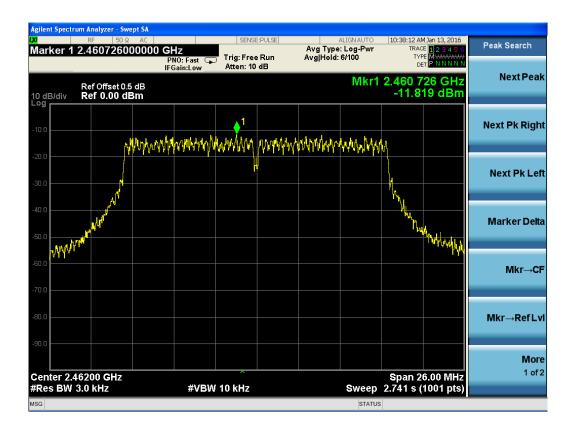

### 802.11n HT20 power density

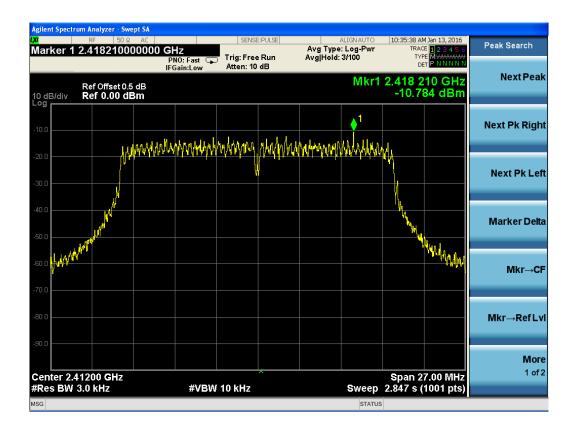

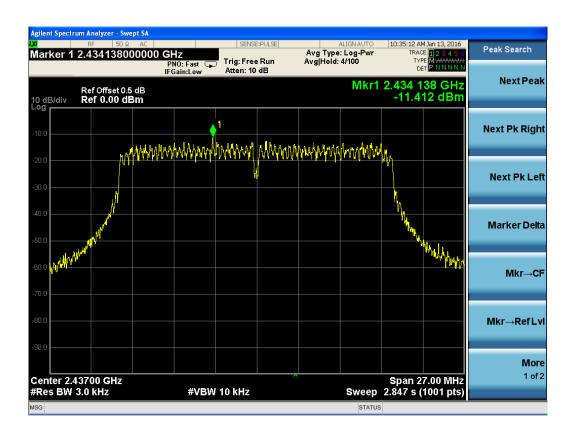

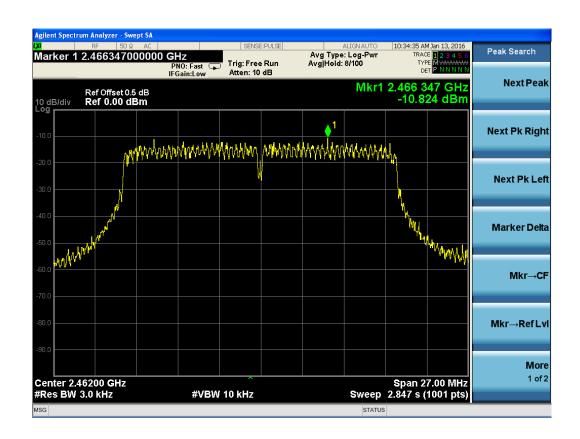

## 6.3. 6 dB Spectrum Bandwidth Measurement

#### 6.3.1. Standard Applicable

According to §15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

#### 6.3.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
- 3. Measured the spectrum width with power higher than 6dB below carrier.

#### 6.3.4. Test Setup Layout



### 6.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 6.3.6. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	802.11b/g/n

### 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	12.11	500	Complies
6	2437	12.13	500	Complies
11	2462	12.56	500	Complies


# 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	16.38	500	Complies
6	2437	16.38	500	Complies
11	2462	16.36	500	Complies

#### 802.11n HT20

Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
1	2412	17.04	500	Complies
6	2437	17.03	500	Complies
11	2462	17.06	500	Complies


#### 802.11b channel, 6dB bandwidth

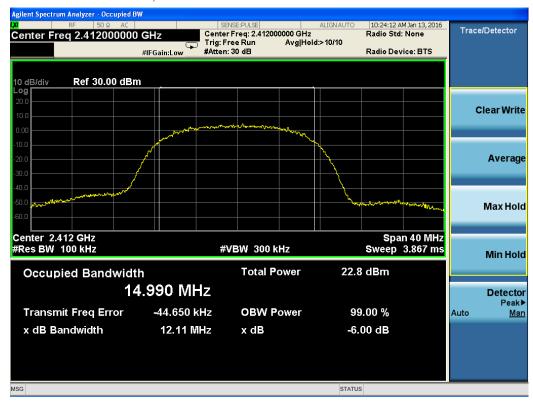







802.11g channel, 6dB bandwidth

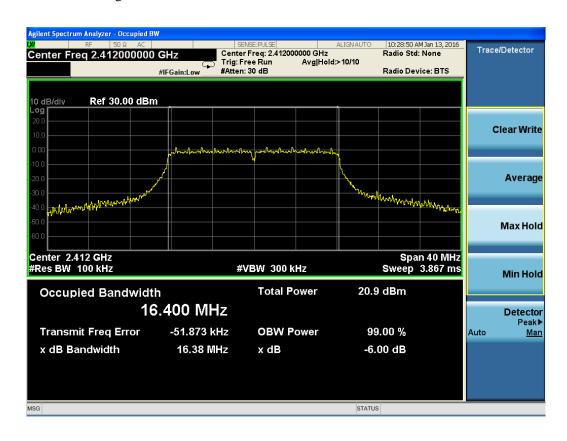




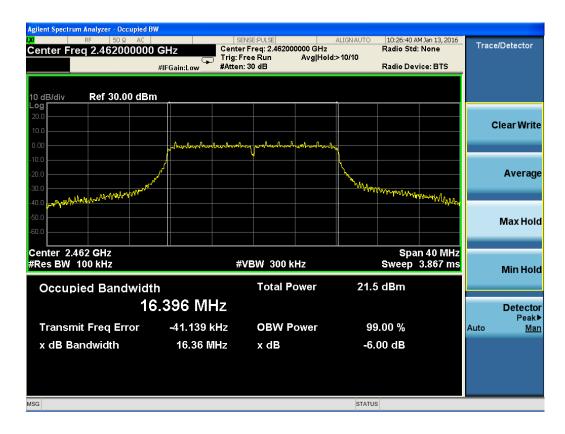

#### 802.11n HT20 channel, 6dB bandwidth

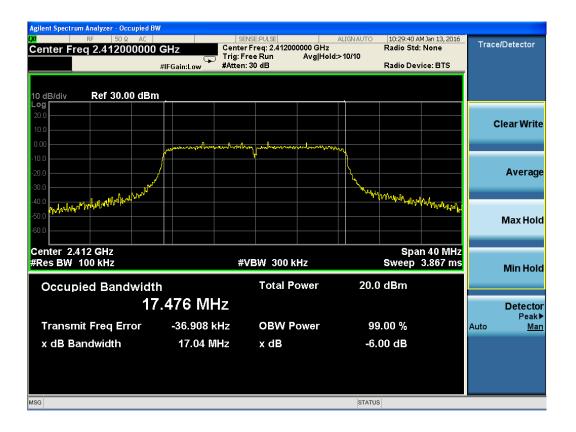



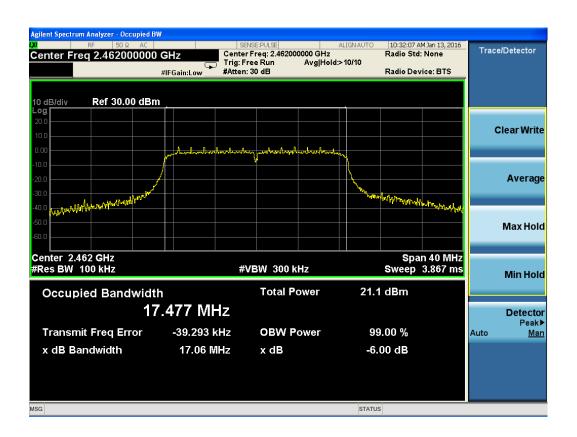

#### 6.4. Radiated Emissions Measurement

### 6.4.1. Standard Applicable

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 6.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

#### 6.4.3. Test Procedures


- 1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz and ground with absorber material. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.

- 4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 6.4.4. Test Setup Layout

For radiated emissions below 30MHz

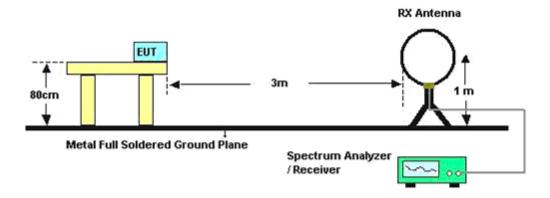

For radiated emissions above 30MHz

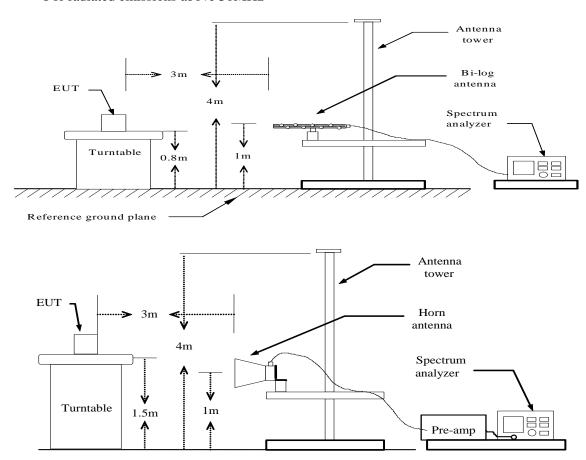

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distanc [3m] / test distance [1.5m]) (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

### 6.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 6.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	Temperature 25°C		60%	
Test Engineer	Dick	Configurations	802.11b/g/n	

Freq. (MHz)	Level (dBuV)			Remark		
-	-	-	-	See Note		

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 6.4.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	Temperature 25°C		60%	
Test Engineer	Dick	Configurations	802.11b (High CH)	

Test result for 802.11b (High Channel))(120V/60Hz)


For pre-testing, when performed with LiPo Battery Charger, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report

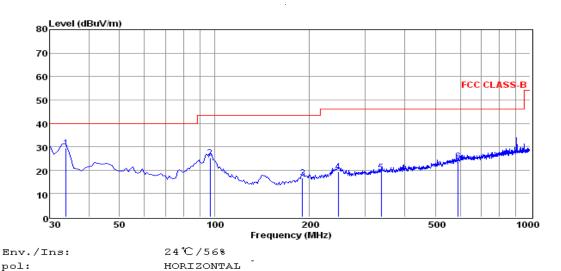

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dВ	dB/m	dBuV/m	dBuV/m	dВ	
1	33.88	16.65	0.37	12.31	29.33	40.00	-10.67	QP
2	96.93	11.70	0.61	12.96	25.27	43.50	-18.23	QP
3	190.05	5.33	0.86	10.56	16.75	43.50	-26.75	QP
4	246.31	6.38	0.97	12.08	19.43	46.00	-26.57	QP
5	337.49	3.79	1.16	14.02	18.97	46.00	-27.03	QP
6	590.66	4.11	1.54	18.28	23.93	46.00	-22.07	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that ate 20db blow the offficial limit are not reported

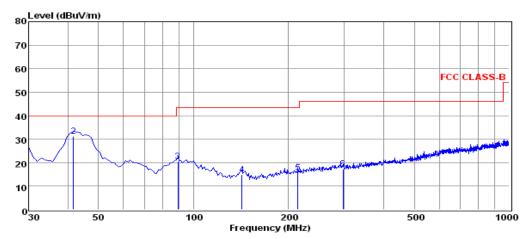

Env./Ins: pol:

24℃/56% VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dВ	dB/m	dBuV/m	dBuV/m	dВ	
1	30.00	12.10	0.39	12.33	24.82	40.00	-15.18	QP
2	41.64	17.28	0.50	13.57	31.35	40.00	-8.65	QP
3	89.17	8.32	0.68	11.64	20.64	43.50	-22.86	QP
4	142.52	5.99	0.71	8.21	14.91	43.50	-28.59	QP
5	214.30	3.91	0.95	11.02	15.88	43.50	-27.62	QP
6	297.72	3.11	1.12	13.02	17.25	46.00	-28.75	QP

Note: 1. All readings are Quasi-peak values.

#### Note:

Pre-scan all mode and recorded the worst case results in this report (802.11b (High Channel)). Emission level  $(dBuV/m) = 20 \log Emission level (uV/m)$ .

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<sup>2.</sup> Measured= Reading + Antenna Factor + Cable Loss
3. The emission that ate 20db blow the offficial limit are not reported

## 6.4.8. Results for Radiated Emissions (Above 1GHz) 802.11b

### Channel 1

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	52.92	33.06	35.04	3.94	54.88	74	-19.12	Peak	Horizontal
4824.00	38.78	33.06	35.04	3.94	40.74	54	-13.26	Average	Horizontal
4824.00	50.40	33.06	35.04	3.94	52.36	74	-21.64	Peak	Vertical
4824.00	41.54	33.06	35.04	3.94	43.50	54	-10.50	Average	Vertical

### Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	51.09	33.16	35.15	3.96	53.06	74	-20.94	Peak	Horizontal
4874.00	42.96	33.16	35.15	3.96	44.93	54	-9.07	Average	Horizontal
4874.00	54.05	33.16	35.15	3.96	56.02	74	-17.98	Peak	Vertical
4874.00	46.17	33.16	35.15	3.96	48.14	54	-5.86	Average	Vertical

### Channel 11

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	54.66	33.26	35.14	3.98	56.76	74	-17.24	Peak	Horizontal
4924.00	40.60	33.26	35.14	3.98	42.70	54	-11.30	Average	Horizontal
4924.00	53.43	33.26	35.14	3.98	55.53	74	-18.47	Peak	Vertical
4924.00	40.68	33.26	35.14	3.98	42.78	54	-11.22	Average	Vertical

# 802.11g

## Channel 1

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	51.79	33.06	35.04	3.94	53.75	74	-20.25	Peak	Horizontal
4824.00	38.72	33.06	35.04	3.94	40.68	54	-13.32	Average	Horizontal
4824.00	54.27	33.06	35.04	3.94	56.23	74	-17.77	Peak	Vertical
4824.00	40.42	33.06	35.04	3.94	42.38	54	-11.62	Average	Vertical

### Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	54.44	33.16	35.15	3.96	56.41	74	-17.59	Peak	Horizontal
4874.00	41.24	33.16	35.15	3.96	43.21	54	-10.79	Average	Horizontal
4874.00	50.60	33.16	35.15	3.96	52.57	74	-21.43	Peak	Vertical
4874.00	39.87	33.16	35.15	3.96	41.84	54	-12.16	Average	Vertical

## Channel 11

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	55.94	33.26	35.14	3.98	58.04	74	-15.96	Peak	Horizontal
4924.00	34.32	33.26	35.14	3.98	36.42	54	-17.58	Average	Horizontal
4924.00	51.48	33.26	35.14	3.98	53.58	74	-20.42	Peak	Vertical
4924.00	39.49	33.26	35.14	3.98	41.59	54	-12.41	Average	Vertical

#### 802.11n HT20

#### Channel 1

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.00	53.53	33.06	35.04	3.94	55.49	74	-18.51	Peak	Horizontal
4824.00	37.86	33.06	35.04	3.94	39.82	54	-14.18	Average	Horizontal
4824.00	51.14	33.06	35.04	3.94	53.10	74	-20.90	Peak	Vertical
4824.00	41.01	33.06	35.04	3.94	42.97	54	-11.03	Average	Vertical

#### Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measure d dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.00	53.65	33.16	35.15	3.96	55.62	74	-18.38	Peak	Horizontal
4874.00	38.93	33.16	35.15	3.96	40.90	54	-13.10	Average	Horizontal
4874.00	53.42	33.16	35.15	3.96	55.39	74	-18.61	Peak	Vertical
4874.00	38.45	33.16	35.15	3.96	40.42	54	-13.58	Average	Vertical

#### Channel 11

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.00	51.43	33.26	35.14	3.98	53.53	74	-20.47	Peak	Horizontal
4924.00	38.87	33.26	35.14	3.98	40.97	54	-13.03	Average	Horizontal
4924.00	51.42	33.26	35.14	3.98	53.52	74	-20.48	Peak	Vertical
4924.00	36.76	33.26	35.14	3.98	38.86	54	-15.14	Average	Vertical

#### Notes:

- 1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2. Radiated emissions measured in frequency range from 9k~10th harmonic or 40GHz (which is less) were made with an instrument using Peak detector mode.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

# 6.4.9. Results of Band Edges Test (Radiated)

802.11b

Tx-2412

Freq. MHz	Readin g Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2390.00	51.39	32.89	35.16	3.51	52.63	74	-21.37	Peak	Horizontal
2390.00	38.39	32.89	35.16	3.51	39.64	54	-14.36	Average	Horizontal
2400.00	55.52	32.92	35.16	3.54	56.82	74	-17.18	Peak	Horizontal
2400.00	39.66	32.92	35.16	3.54	40.96	54	-13.04	Average	Horizontal
2390.00	51.17	32.89	35.16	3.51	52.41	74	-21.59	Peak	Vertical
2390.00	38.41	32.89	35.16	3.51	39.66	54	-14.34	Average	Vertical
2400.00	55.85	32.92	35.16	3.54	57.15	74	-16.85	Peak	Vertical
2400.00	40.11	32.92	35.16	3.54	41.41	54	-12.59	Average	Vertical

## Tx-2462

Freq. MHz	Readin g Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	56.48	33.06	35.18	3.60	57.96	74	-16.04	Peak	Horizontal
2483.50	39.07	33.06	35.18	3.60	40.55	54	-13.45	Average	Horizontal
2483.50	56.70	33.06	35.18	3.60	58.18	74	-15.82	Peak	Vertical
2483.50	38.43	33.06	35.18	3.60	39.91	54	-14.09	Average	Vertical

# 802.11g

Tx-2412

Freq. MHz	Readin g Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2390.00	53.88	32.89	35.16	3.51	55.12	74	-18.88	Peak	Horizontal
2390.00	36.40	32.89	35.16	3.51	37.65	54	-16.35	Average	Horizontal
2400.00	58.26	32.92	35.16	3.54	59.56	74	-14.44	Peak	Horizontal
2400.00	40.92	32.92	35.16	3.54	42.22	54	-11.78	Average	Horizontal
2390.00	51.90	32.89	35.16	3.51	53.14	74	-20.86	Peak	Vertical
2390.00	36.97	32.89	35.16	3.51	38.22	54	-15.78	Average	Vertical
2400.00	55.90	32.92	35.16	3.54	57.20	74	-16.80	Peak	Vertical
2400.00	38.85	32.92	35.16	3.54	40.15	54	-13.85	Average	Vertical

Tx-2462

Freq. MHz	Readin g Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	56.35	33.06	35.18	3.60	57.83	74	-16.17	Peak	Horizontal
2483.50	39.55	33.06	35.18	3.60	41.03	54	-12.97	Average	Horizontal
2483.50	55.43	33.06	35.18	3.60	56.91	74	-17.09	Peak	Vertical
2483.50	38.34	33.06	35.18	3.60	39.82	54	-14.18	Average	Vertical

# 802.11n(HT20)

Tx-2412

Freq. MHz	Readin g Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2390.00	53.27	32.89	35.16	3.51	54.51	74	-19.49	Peak	Horizontal
2390.00	37.17	32.89	35.16	3.51	38.42	54	-15.58	Average	Horizontal
2400.00	57.38	32.92	35.16	3.54	58.68	74	-15.32	Peak	Horizontal
2400.00	40.61	32.92	35.16	3.54	41.91	54	-12.09	Average	Horizontal
2390.00	51.32	32.89	35.16	3.51	52.56	74	-21.44	Peak	Vertical
2390.00	35.64	32.89	35.16	3.51	36.89	54	-17.11	Average	Vertical
2400.00	53.58	32.92	35.16	3.54	54.88	74	-19.12	Peak	Vertical
2400.00	37.56	32.92	35.16	3.54	38.86	54	-15.14	Average	Vertical

Tx-2462

Freq. MHz	Readin g Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	57.55	33.06	35.18	3.60	59.03	74	-14.97	Peak	Horizontal
2483.50	39.08	33.06	35.18	3.60	40.56	54	-13.44	Average	Horizontal
2483.50	54.95	33.06	35.18	3.60	56.43	74	-17.57	Peak	Vertical
2483.50	38.20	33.06	35.18	3.60	39.68	54	-14.32	Average	Vertical

# 6.5. Conducted Spurious Emissions and Band Edges Test

# 6.5.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### 6.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

#### 6.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9kHz to 40GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

Preliminary tests on individual chains. The worst-case configuration was with a combiner, therefore final test were performed with all chains feeding a combiner.

#### 6.5.4. Test Setup Layout


This test setup layout is the same as that shown in section 5.4.4.


#### 6.5.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

# 6.5.6. Test Results of Conducted Spurious Emissions


#### 802.11b

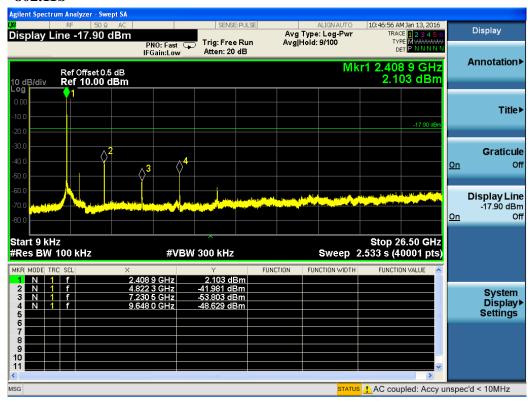


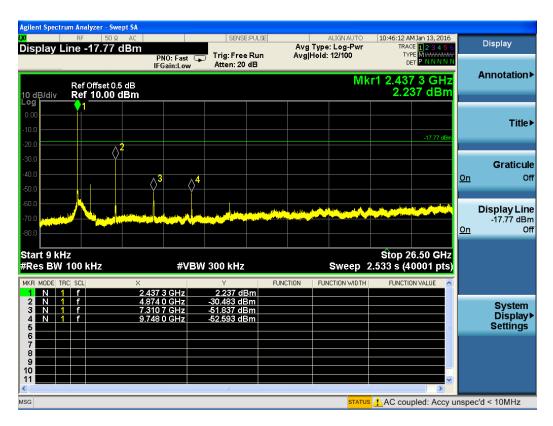


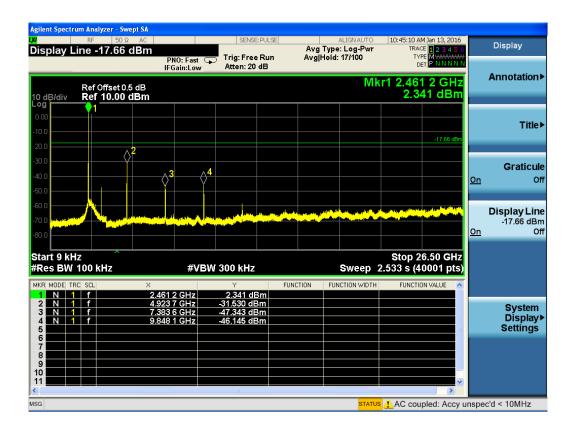


#### 802.11g

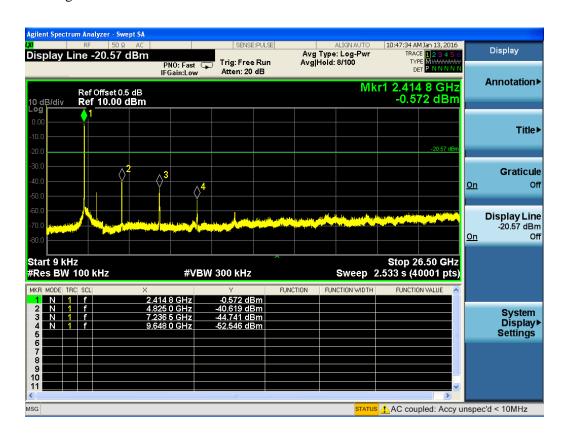


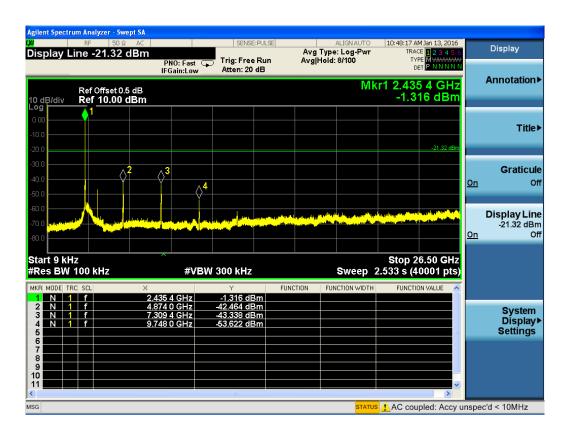


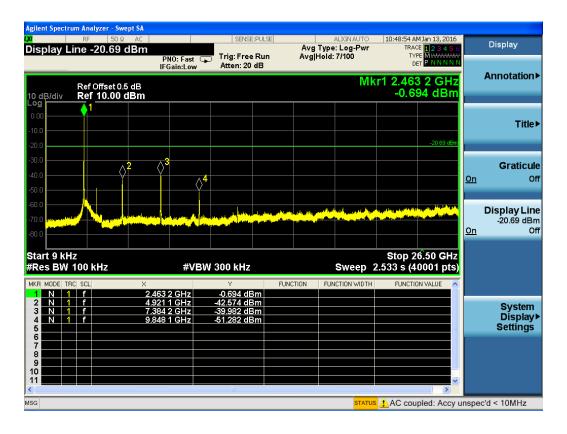

#### 802.11n HT20

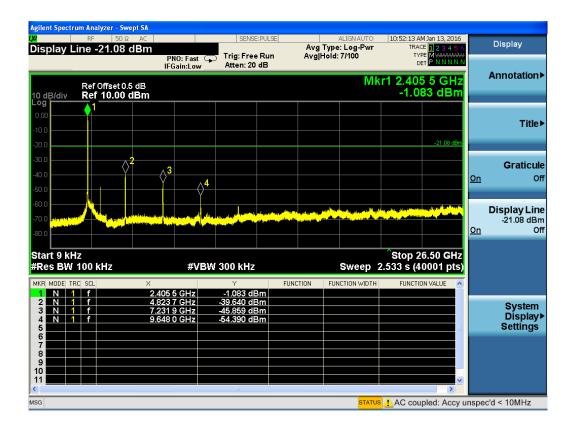

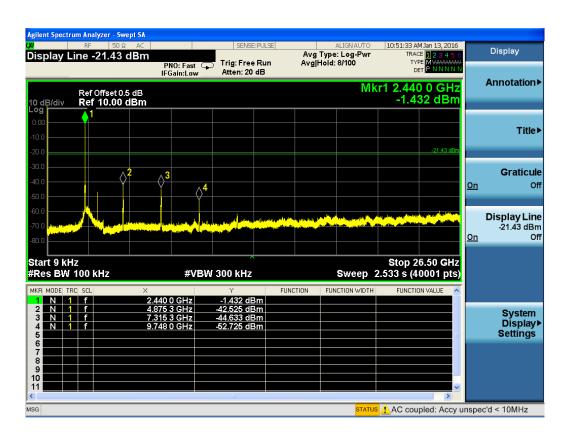

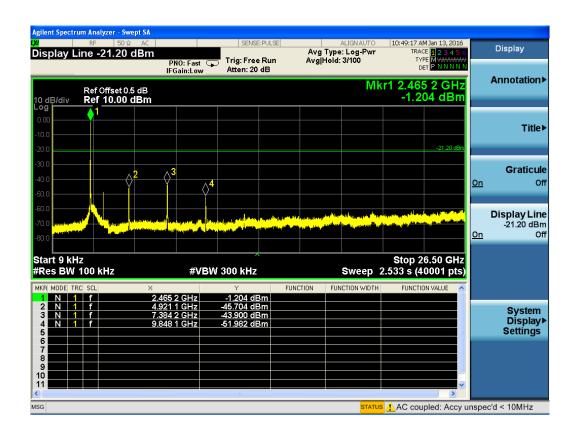

# 6.5.7. Test Results of Band Edges Test

#### 802.11b






# 802.11g





#### 802.11n HT20

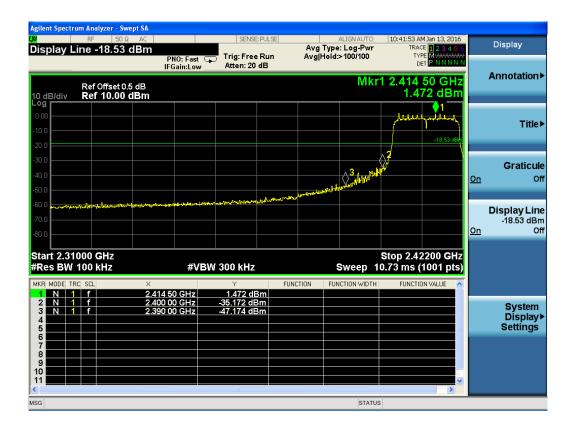




#### 6.6. Power line conducted emissions

### 6.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range	Limits (dBμV)				
(MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

### 6.6.2 Block Diagram of Test Setup

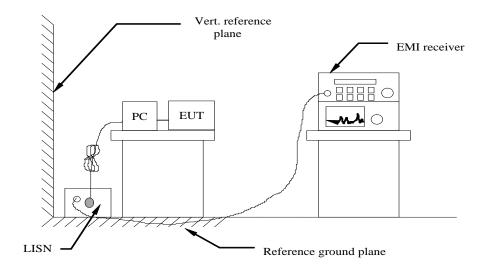


#### 6.6.3 Test Results

#### PASS.


The test data please refer to following page.

For pre-testing, when performed with LiPo Battery Charger, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report

# Test result for 802.11b (High Channel)(120V/60Hz)

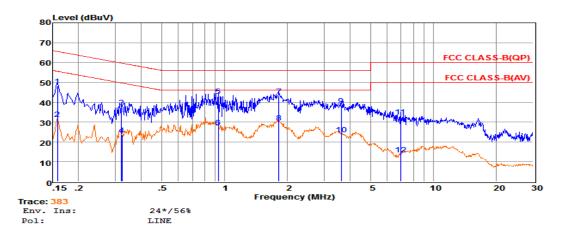

	Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15816	28.54	9.58	0.02	10.00	48.14	65.56	-17.42	QP
2	0.15826	11.82	9.58	0.02	10.00	31.42	55.55	-24.13	Average
3	0.32169	17.95	9.62	0.03	10.00	37.60	59.66	-22.06	QP
4	0.32179	3.79	9.62	0.03	10.00	23.44	49.66	-26.22	Average
5	0.93314	23.30	9.63	0.05	10.00	42.98	56.00	-13.02	QP
6	0.93324	7.74	9.63	0.05	10.00	27.42	46.00	-18.58	Average
7	1.81918	23.38	9.64	0.05	10.00	43.07	56.00	-12.93	QP
8	1.82018	10.10	9.64	0.05	10.00	29.79	46.00	-16.21	Average
9	3.62252	18.77	9.65	0.06	10.00	38.48	56.00	-17.52	QP
10	3.62352	4.16	9.65	0.06	10.00	23.87	46.00	-22.13	Average
11	6.95084	13.10	9.68	0.07	10.00	32.85	60.00	-27.15	QP
12	6.95184	-5.95	9.68	0.07	10.00	13.80	50.00	-36.20	Average

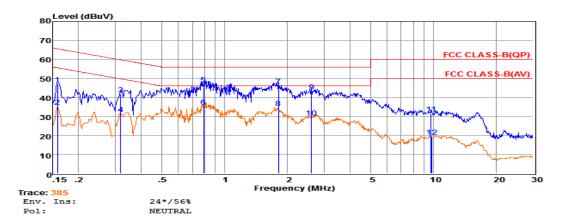

	Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15816	27.15	9.68	0.02	10.00	46.85	65.56	-18.71	QP
2	0.15826	15.40	9.68	0.02	10.00	35.10	55.55	-20.45	Average
3	0.31830	22.10	9.61	0.03	10.00	41.74	59.75	-18.01	QP
4	0.31840	11.45	9.61	0.03	10.00	31.09	49.75	-18.66	Average
5	0.79180	27.19	9.63	0.04	10.00	46.86	56.00	-9.14	QP
6	0.79190	15.38	9.63	0.04	10.00	35.05	46.00	-10.95	Average
7	1.80957	26.27	9.63	0.05	10.00	45.95	56.00	-10.05	QP
8	1.81057	14.70	9.63	0.05	10.00	34.38	46.00	-11.62	Average
9	2.60823	23.45	9.64	0.05	10.00	43.14	56.00	-12.86	QP
10	2.60923	9.65	9.64	0.05	10.00	29.34	46.00	-16.66	Average
11	9.75670	11.87	9.72	0.08	10.00	31.67	60.00	-28.33	QP
12	9.75770	-0.55	9.72	0.08	10.00	19.25	50.00	-30.75	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

\*\*\*Note: Pre-scan all mode and recorded the worst case results in this report (802.11b (High Channel)).

# 7. ANTENNA REQUIREMENT

# 7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### 7.2 Antenna Connected Construction

### 7.2.1. Standard Applicable

According to §15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

# 7.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 3.7dBi, and the antenna is connect to PCB board and no consideration of replacement. Please see EUT photo for details.

7.2.3. Results: Compliance.

# **Measurement parameters:**

Measurement parameter							
Detector:	Peak						
Sweep time:	Auto						
Resolution bandwidth:	3 MHz						
Video bandwidth:	3 MHz						
Trace-Mode:	Max hold						

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth devices, the DSSS mode is used.

#### **Limits:**

FCC	IC				
Antenna Gain					
6dBi					

Result: -/-

-----THE END OF TEST REPORT-----