


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5610MHz_TX

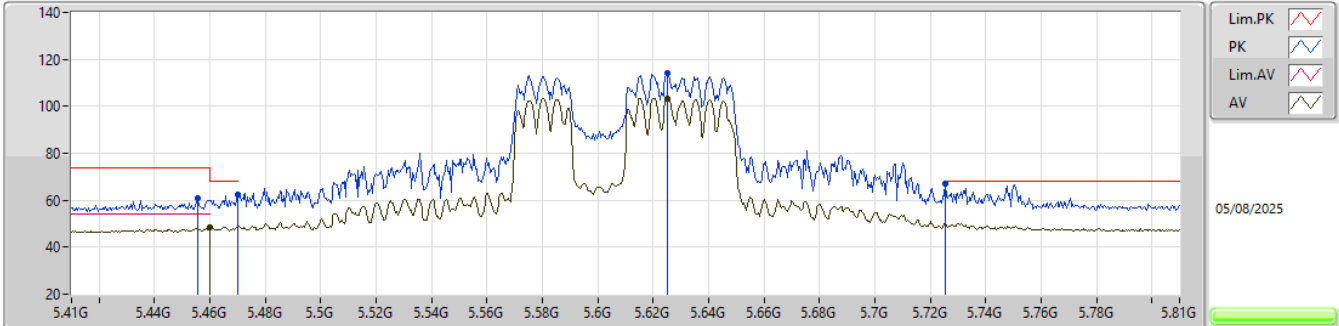


EUT_Y_4TX
Setting 67
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4556G	60.71	74.00	-13.29	64.26	3	Vertical	0	1.07	-	31.62	8.55	43.72
AV	5.46G	48.32	54.00	-5.68	51.85	3	Vertical	0	1.07	-	31.64	8.55	43.72
PK	5.47G	62.33	68.20	-5.87	65.81	3	Vertical	0	1.07	-	31.68	8.56	43.72
PK	5.6252G	114.06	Inf	-Inf	117.20	3	Vertical	0	1.07	-	31.70	8.73	43.57
AV	5.6252G	103.53	Inf	-Inf	106.67	3	Vertical	0	1.07	-	31.70	8.73	43.57
PK	5.7256G	66.88	68.20	-1.32	69.47	3	Vertical	0	1.07	-	32.05	8.83	43.47

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5610MHz_TX

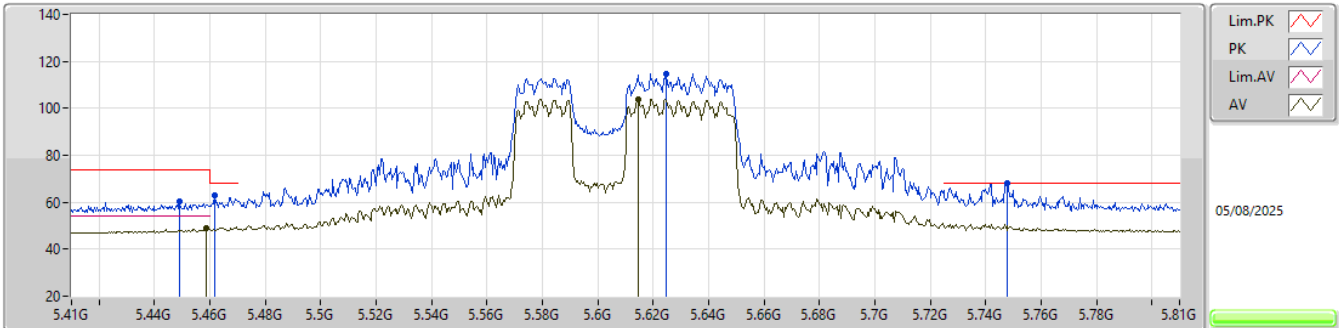


EUT_Y_4TX
Setting 67
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4488G	60.16	74.00	-13.84	63.75	3	Horizontal	348	2.95	-	31.60	8.54	43.73
PK	5.4616G	62.83	68.20	-5.37	66.35	3	Horizontal	348	2.95	-	31.65	8.55	43.72
AV	5.4588G	48.81	54.00	-5.19	52.34	3	Horizontal	348	2.95	-	31.64	8.55	43.72
PK	5.6248G	114.84	Inf	-Inf	117.99	3	Horizontal	348	2.95	-	31.70	8.73	43.58
AV	5.6144G	103.99	Inf	-Inf	107.20	3	Horizontal	348	2.95	-	31.66	8.72	43.59
PK	5.7476G	68.13	68.20	-0.07	70.63	3	Horizontal	348	2.95	-	32.10	8.85	43.45

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5610MHz_TX

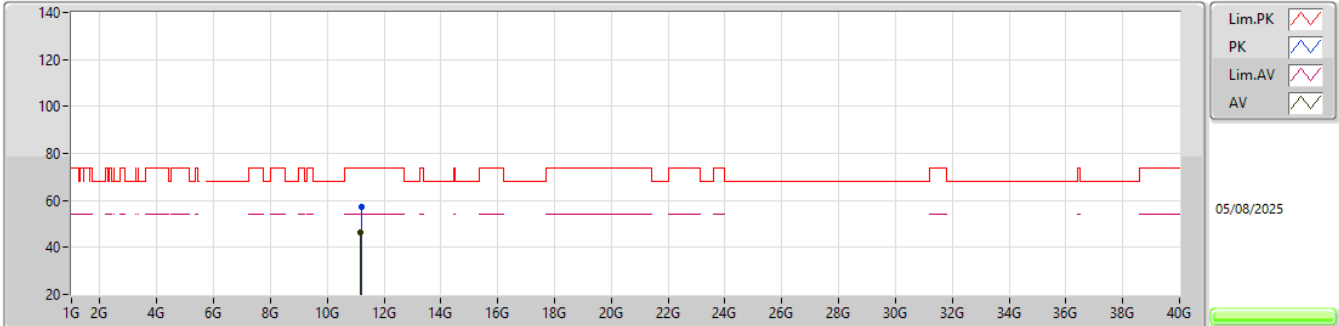


EUT_V_4TX
Setting 67
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.2302G	57.17	74.00	-16.83	47.50	3	Vertical	108	2.47	-	39.46	13.04	42.83			
AV	11.1812G	46.40	54.00	-7.60	36.81	3	Vertical	108	2.47	-	39.44	13.00	42.85			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5610MHz_TX

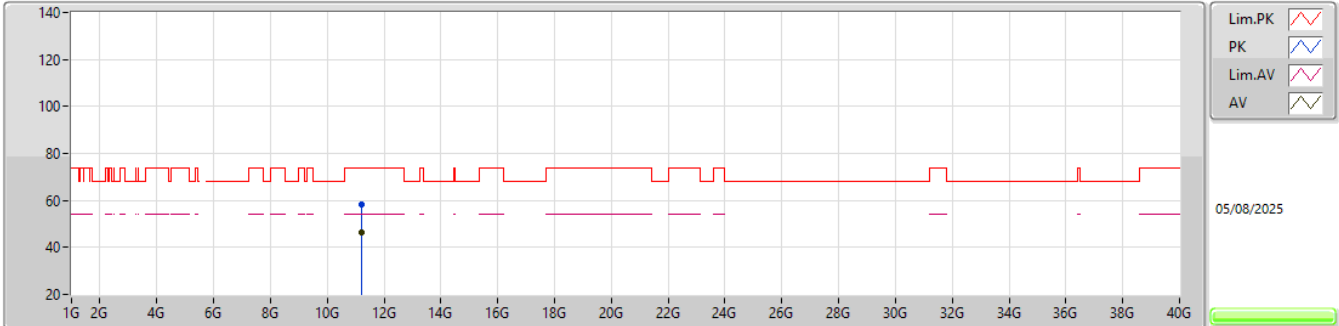


EUT_V_4TX
Setting 67
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.2098G	58.16	74.00	-15.84	48.55	3	Horizontal	267	1.84	-	39.42	13.03	42.84			
AV	11.1932G	46.36	54.00	-7.64	36.78	3	Horizontal	267	1.84	-	39.41	13.01	42.84			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

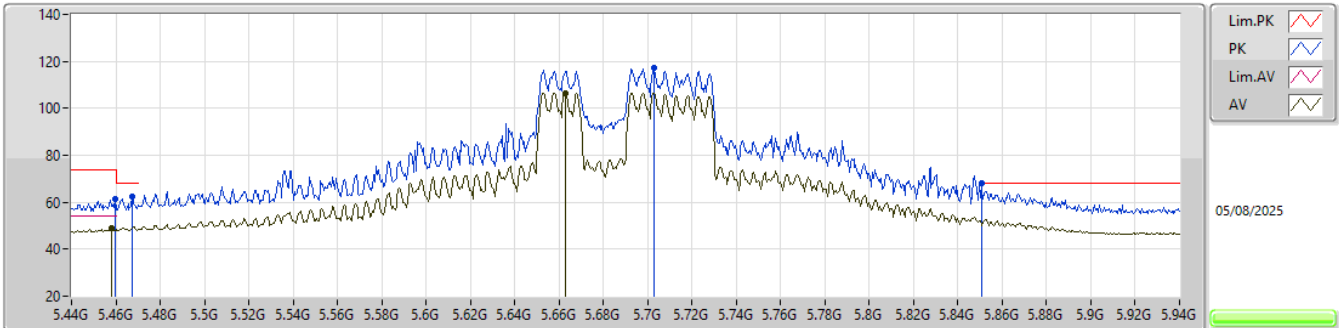


EUT_Y_4TX
Setting 80
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4595G	61.62	74.00	-12.38	65.15	3	Vertical	19	2.52	-	31.64	8.55	43.72			
AV	5.458G	48.73	54.00	-5.27	52.27	3	Vertical	19	2.52	-	31.63	8.55	43.72			
PK	5.4675G	62.16	68.20	-6.04	65.65	3	Vertical	19	2.52	-	31.67	8.56	43.72			
PK	5.703G	117.40	Inf	-Inf	120.08	3	Vertical	19	2.52	-	32.01	8.81	43.50			
AV	5.663G	106.57	Inf	-Inf	109.49	3	Vertical	19	2.52	-	31.85	8.77	43.54			
PK	5.8505G	67.88	68.20	-0.32	70.16	3	Vertical	19	2.52	-	32.10	8.97	43.35			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

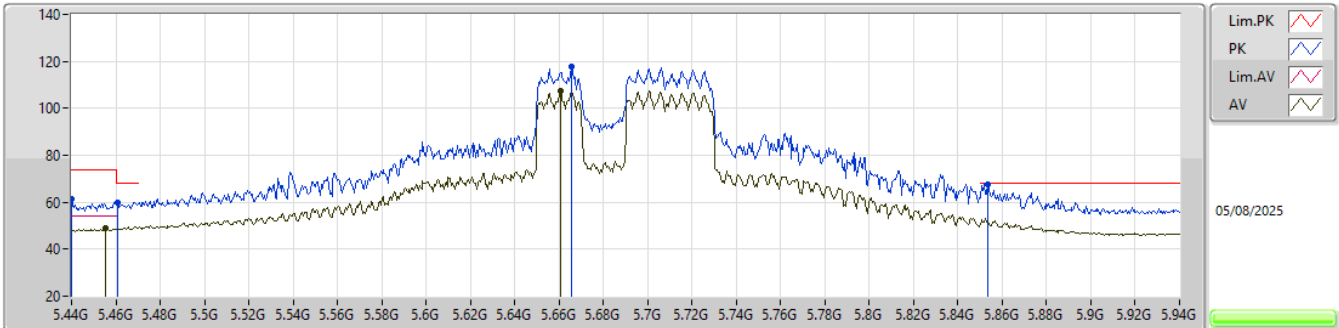


EUT_Y_4TX
Setting 80
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.44G	61.17	74.00	-12.83	64.81	3	Horizontal	360	2.97	-	31.56	8.53	43.73			
PK	5.461G	59.98	68.20	-8.22	63.51	3	Horizontal	360	2.97	-	31.64	8.55	43.72			
AV	5.4555G	48.86	54.00	-5.14	52.41	3	Horizontal	360	2.97	-	31.62	8.55	43.72			
PK	5.6655G	117.58	Inf	-Inf	120.48	3	Horizontal	360	2.97	-	31.86	8.77	43.53			
AV	5.6605G	107.31	Inf	-Inf	110.25	3	Horizontal	360	2.97	-	31.84	8.76	43.54			
PK	5.8535G	67.37	68.20	-0.83	69.64	3	Horizontal	360	2.97	-	32.11	8.97	43.35			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

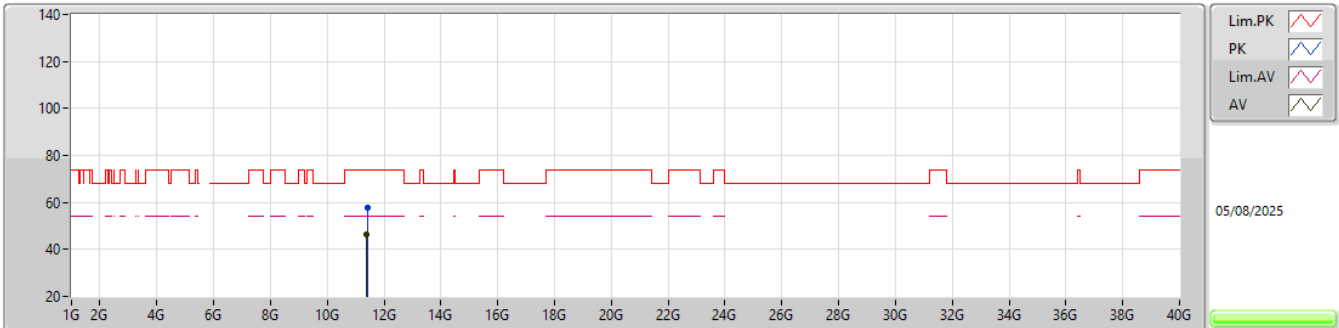


EUT_V_4TX
Setting 80
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4076G	57.61	74.00	-16.39	47.31	3	Vertical	195	1.56	-	39.90	13.17	42.77			
AV	11.3651G	46.36	54.00	-7.64	36.18	3	Vertical	195	1.56	-	39.83	13.14	42.79			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

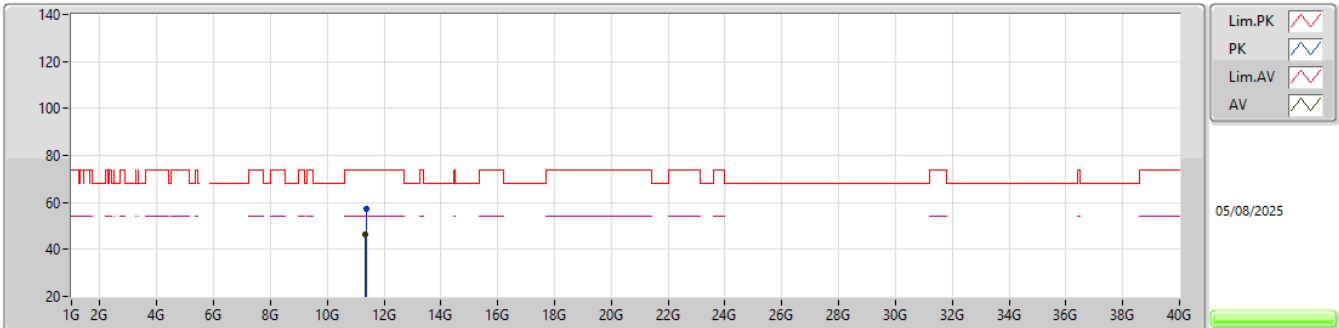


EUT V_4TX
Setting 80
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.3808G	57.48	74.00	-16.52	47.25	3	Horizontal	63	1.28	-	39.86	13.15	42.78			
AV	11.3527G	46.37	54.00	-7.63	36.22	3	Horizontal	63	1.28	-	39.81	13.13	42.79			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

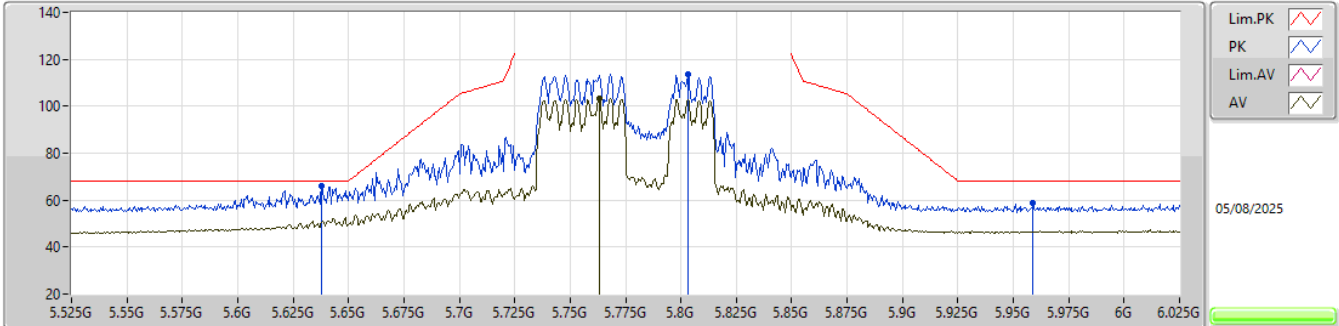


EUT_Y_4TX
Setting 69
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.638G	65.84	68.20	-2.36	68.91	3	Vertical	16	1.80	-	31.75	8.74	43.56			
PK	5.803G	113.79	Inf	-Inf	116.18	3	Vertical	16	1.80	-	32.10	8.91	43.40			
AV	5.763G	103.13	Inf	-Inf	105.60	3	Vertical	16	1.80	-	32.10	8.87	43.44			
PK	5.959G	59.01	68.20	-9.19	60.84	3	Vertical	16	1.80	-	32.32	9.09	43.24			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

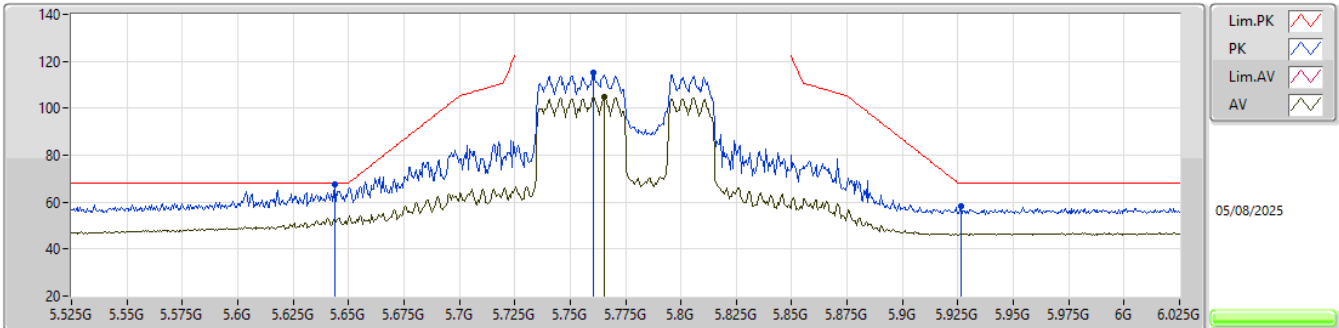


EUT_Y_4TX
Setting 69
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.644G	67.70	68.20	-0.50	70.73	3	Horizontal	358	2.91	-	31.78	8.75	43.56			
PK	5.7605G	115.02	Inf	-Inf	117.49	3	Horizontal	358	2.91	-	32.10	8.87	43.44			
AV	5.7655G	105.05	Inf	-Inf	107.51	3	Horizontal	358	2.91	-	32.10	8.87	43.43			
PK	5.9265G	58.09	68.20	-10.11	60.00	3	Horizontal	358	2.91	-	32.30	9.06	43.27			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

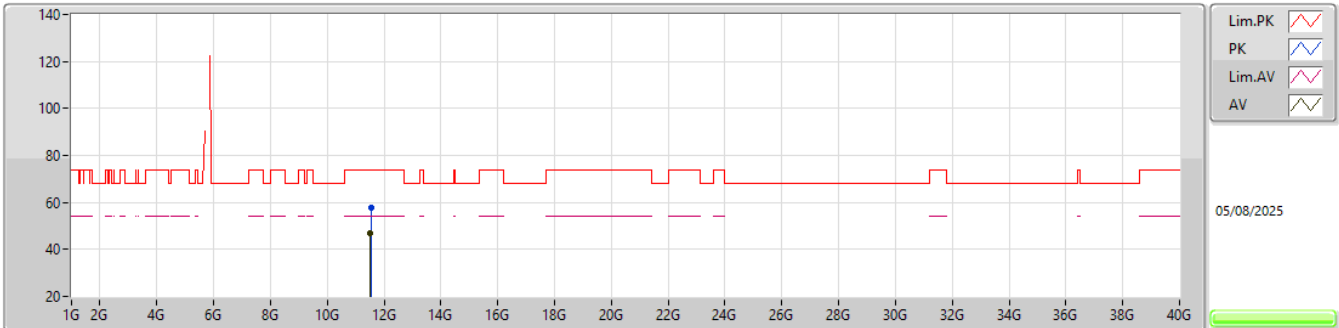


EUT_V_4TX
Setting 69
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.5451G	57.97	74.00	-16.03	47.60	3	Vertical	334	2.24	-	39.91	13.26	42.80			
AV	11.5168G	47.06	54.00	-6.94	36.61	3	Vertical	334	2.24	-	39.97	13.24	42.76			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

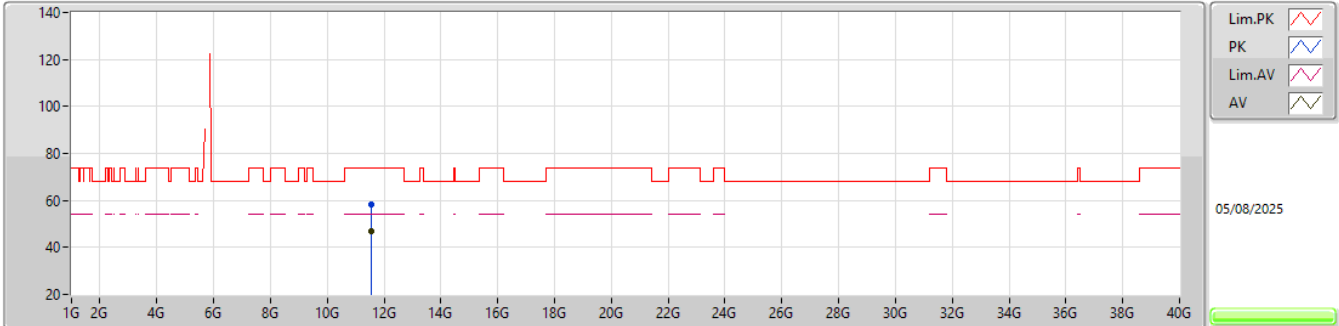


EUT_V_4TX
Setting 69
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.5341G	58.35	74.00	-15.65	47.95	3	Horizontal	322	2.00	-	39.93	13.26	42.79			
AV	11.5406G	46.92	54.00	-7.08	36.54	3	Horizontal	322	2.00	-	39.92	13.26	42.80			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5250MHz Straddle 5.25-5.35GHz_TX

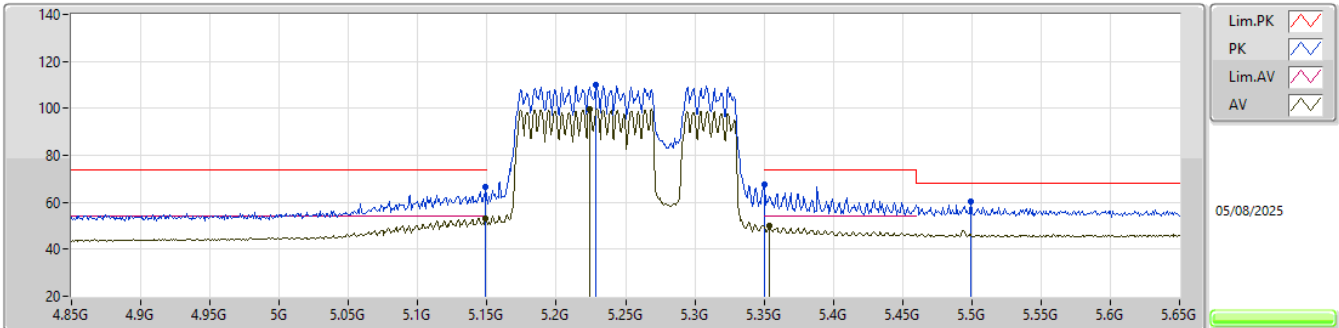


EUT_Y_4TX
Setting 63
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1492G	66.81	74.00	-7.19	70.30	3	Vertical	17	1.06	-	32.00	8.39	43.88			
AV	5.1492G	53.34	54.00	-0.66	56.83	3	Vertical	17	1.06	-	32.00	8.39	43.88			
PK	5.2284G	110.05	Inf	-Inf	113.93	3	Vertical	17	1.06	-	31.53	8.43	43.84			
AV	5.2244G	99.60	Inf	-Inf	103.46	3	Vertical	17	1.06	-	31.55	8.43	43.84			
PK	5.35G	67.78	74.00	-6.22	71.68	3	Vertical	17	1.06	-	31.40	8.47	43.77			
AV	5.354G	50.01	54.00	-3.99	53.91	3	Vertical	17	1.06	-	31.40	8.47	43.77			
PK	5.4996G	60.27	68.20	-7.93	63.58	3	Vertical	17	1.06	-	31.80	8.59	43.70			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5250MHz Straddle 5.25-5.35GHz_TX

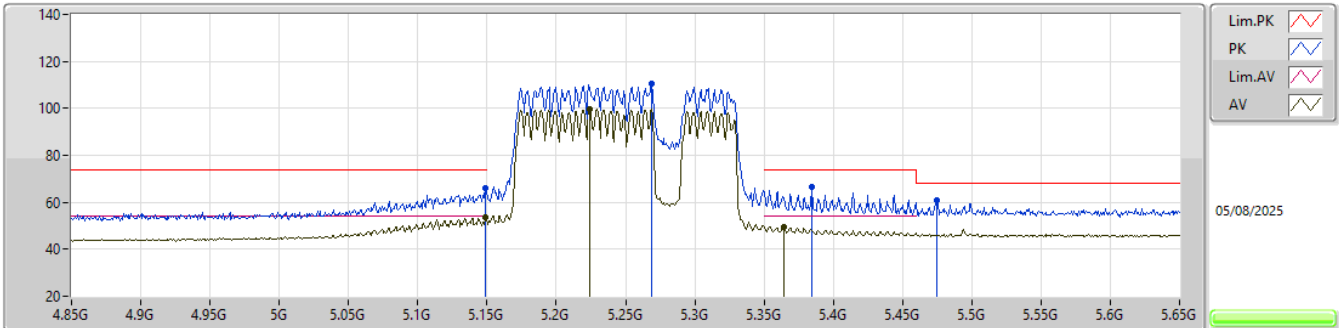


EUT_Y_4TX
Setting 63
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1484G	66.13	74.00	-7.87	69.63	3	Horizontal	16	1.05	-	31.99	8.39	43.88			
AV	5.1492G	53.81	54.00	-0.19	57.30	3	Horizontal	16	1.05	-	32.00	8.39	43.88			
PK	5.2692G	110.38	Inf	-Inf	114.44	3	Horizontal	16	1.05	-	31.32	8.44	43.82			
AV	5.2244G	99.63	Inf	-Inf	103.49	3	Horizontal	16	1.05	-	31.55	8.43	43.84			
PK	5.3844G	66.63	74.00	-7.37	70.51	3	Horizontal	16	1.05	-	31.40	8.48	43.76			
AV	5.3644G	49.49	54.00	-4.51	53.38	3	Horizontal	16	1.05	-	31.40	8.48	43.77			
PK	5.4748G	60.69	68.20	-7.51	64.13	3	Horizontal	16	1.05	-	31.70	8.57	43.71			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5250MHz Straddle 5.25-5.35GHz_TX

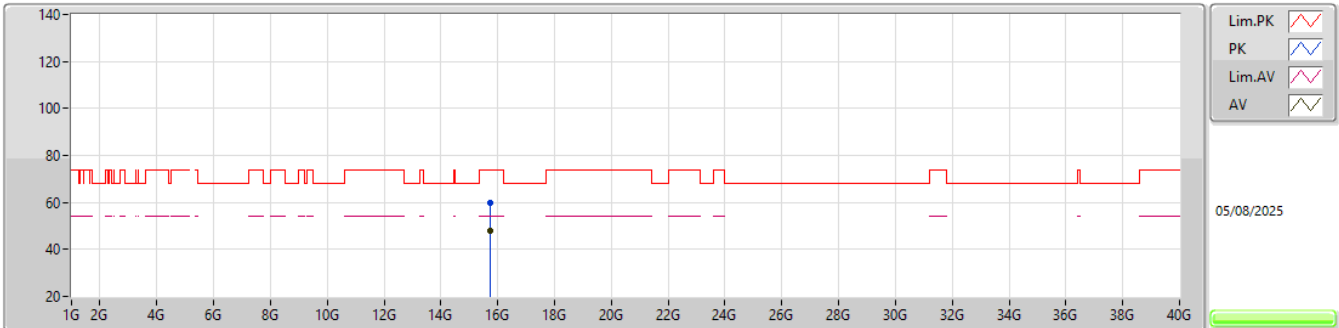


EUT_V_4TX
Setting 63
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.7243G	59.93	74.00	-14.07	48.49	3	Vertical	307	1.31	-	37.65	16.18	42.39			
AV	15.7316G	48.11	54.00	-5.89	36.67	3	Vertical	307	1.31	-	37.66	16.18	42.40			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5250MHz Straddle 5.25-5.35GHz_TX

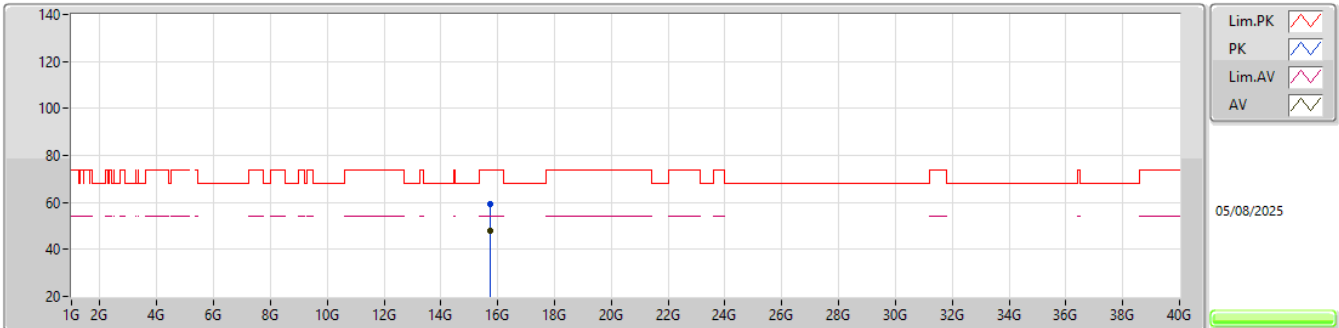


EUT_V_4TX
Setting 63
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.7455G	59.30	74.00	-14.70	47.84	3	Horizontal	302	2.85	-	37.69	16.18	42.41			
AV	15.7462G	48.14	54.00	-5.86	36.68	3	Horizontal	302	2.85	-	37.69	16.18	42.41			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

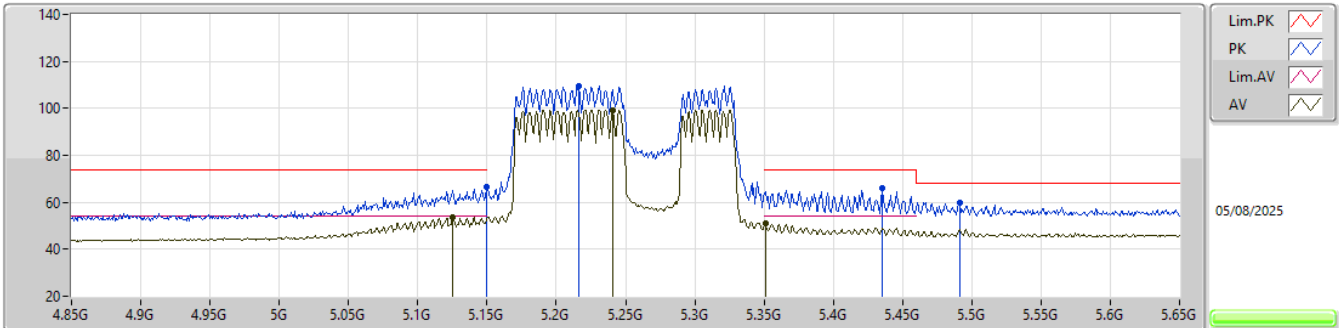


EUT_Y_4TX
Setting 64
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.15G	66.78	74.00	-7.22	70.26	3	Vertical	360	1.05	-	32.00	8.39	43.87					
AV	5.1252G	53.46	54.00	-0.54	57.12	3	Vertical	360	1.05	-	31.85	8.38	43.89					
PK	5.2164G	109.64	Inf	-Inf	113.45	3	Vertical	360	1.05	-	31.60	8.43	43.84					
AV	5.2404G	99.37	Inf	-Inf	103.31	3	Vertical	360	1.05	-	31.46	8.43	43.83					
PK	5.4356G	65.95	74.00	-8.05	69.61	3	Vertical	360	1.05	-	31.54	8.53	43.73					
AV	5.3508G	51.21	54.00	-2.79	55.11	3	Vertical	360	1.05	-	31.40	8.47	43.77					
PK	5.4916G	60.03	68.20	-8.17	63.37	3	Vertical	360	1.05	-	31.77	8.59	43.70					

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

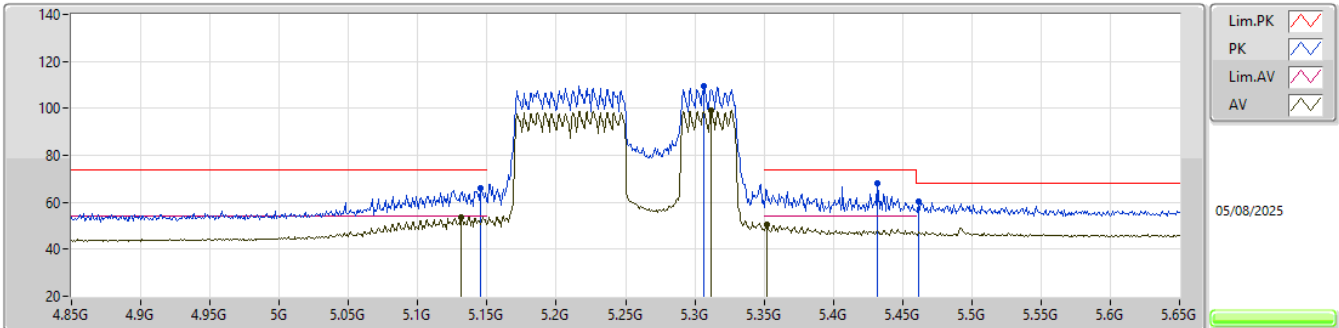


EUT_Y_4TX
Setting 64
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1452G	65.78	74.00	-8.22	69.30	3	Horizontal	335	1.80	-	31.97	8.39	43.88
AV	5.1316G	53.86	54.00	-0.14	57.47	3	Horizontal	335	1.80	-	31.89	8.38	43.88
PK	5.3068G	109.62	Inf	-Inf	113.73	3	Horizontal	335	1.80	-	31.23	8.46	43.80
AV	5.3116G	99.17	Inf	-Inf	103.25	3	Horizontal	335	1.80	-	31.25	8.46	43.79
AV	5.3524G	50.60	54.00	-3.40	54.50	3	Horizontal	335	1.80	-	31.40	8.47	43.77
PK	5.4316G	68.05	74.00	-5.95	71.73	3	Horizontal	335	1.80	-	31.53	8.52	43.73
PK	5.4612G	60.26	68.20	-7.94	63.79	3	Horizontal	335	1.80	-	31.64	8.55	43.72

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

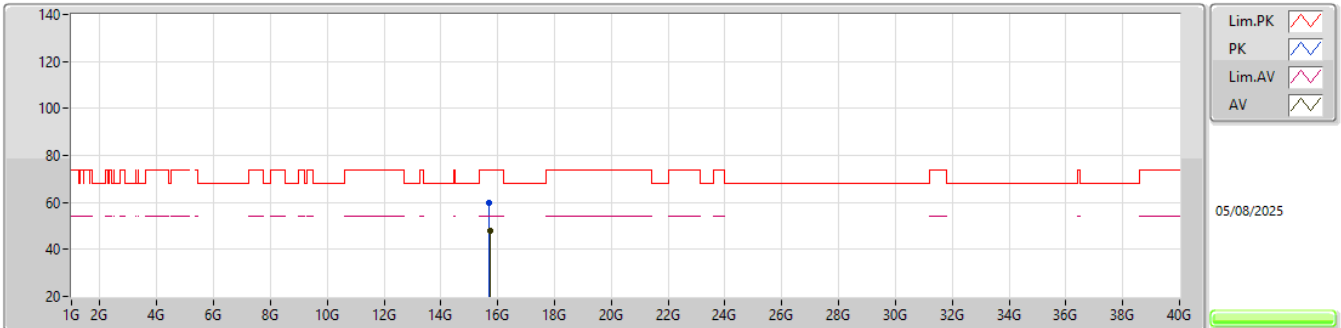


EUT_V_4TX
Setting 64
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.7107G	59.67	74.00	-14.33	48.25	3	Vertical	337	1.32	-	37.62	16.18	42.38			
AV	15.7414G	48.12	54.00	-5.88	36.67	3	Vertical	337	1.32	-	37.68	16.18	42.41			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

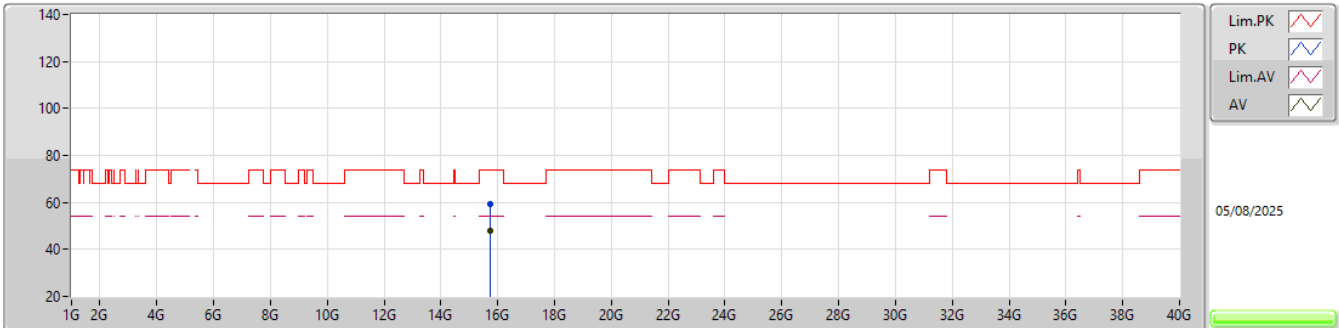


EUT_V_4TX
Setting 64
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.7345G	59.55	74.00	-14.45	48.10	3	Horizontal	92	1.39	-	37.67	16.18	42.40			
AV	15.7164G	48.07	54.00	-5.93	36.65	3	Horizontal	92	1.39	-	37.63	16.18	42.39			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


5570MHz_TX

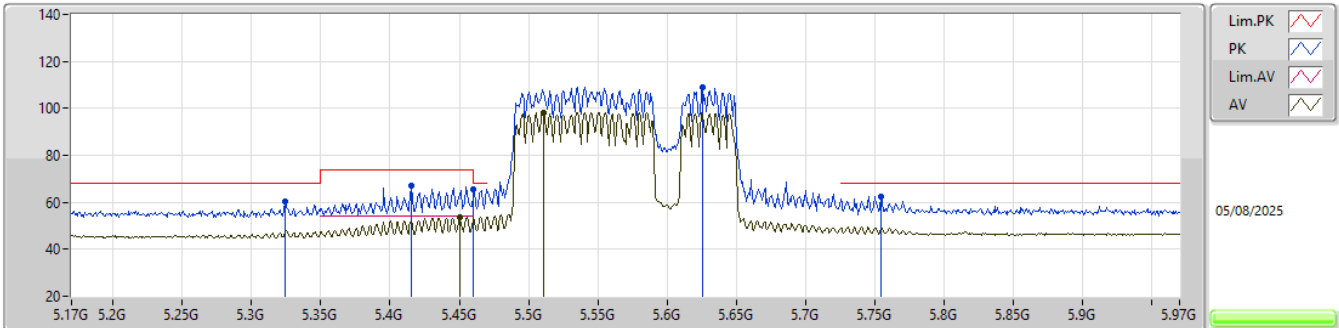EUT_Y_4TX
Setting 61
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3244G	60.51	68.20	-7.69	64.54	3	Vertical	1	1.05	-	31.30	8.46	43.79			
PK	5.4156G	67.27	74.00	-6.73	71.04	3	Vertical	1	1.05	-	31.46	8.51	43.74			
PK	5.4604G	65.76	68.20	-2.44	69.29	3	Vertical	1	1.05	-	31.64	8.55	43.72			
AV	5.4508G	53.67	54.00	-0.33	57.25	3	Vertical	1	1.05	-	31.60	8.54	43.72			
AV	5.5108G	98.21	Inf	-Inf	101.51	3	Vertical	1	1.05	-	31.78	8.61	43.69			
PK	5.626G	109.06	Inf	-Inf	112.20	3	Vertical	1	1.05	-	31.70	8.73	43.57			
PK	5.7548G	62.42	68.20	-5.78	64.91	3	Vertical	1	1.05	-	32.10	8.86	43.45			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5570MHz_TX

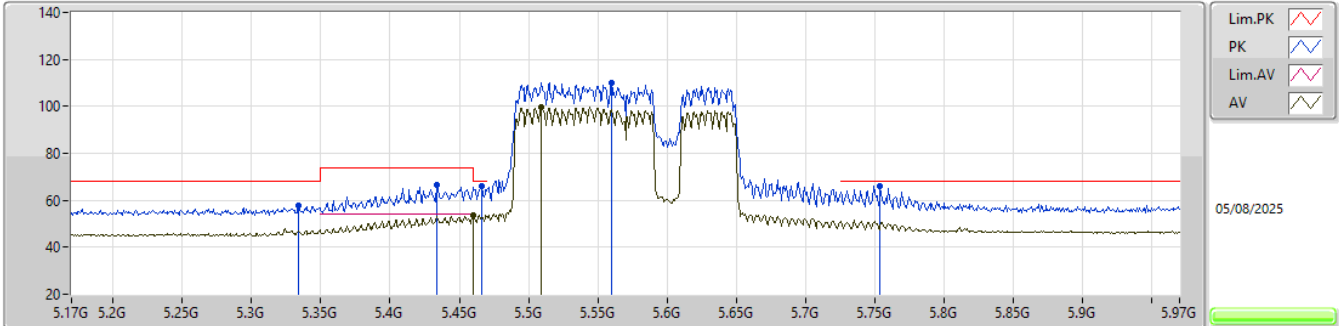


EUT_Y_4TX
Setting 61
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.334G	57.89	68.20	-10.31	61.86	3	Horizontal	350	3.00	-	31.34	8.47	43.78			
PK	5.434G	66.71	74.00	-7.29	70.37	3	Horizontal	350	3.00	-	31.54	8.53	43.73			
PK	5.466G	66.27	68.20	-1.93	69.77	3	Horizontal	350	3.00	-	31.66	8.56	43.72			
AV	5.4596G	53.70	54.00	-0.30	57.23	3	Horizontal	350	3.00	-	31.64	8.55	43.72			
AV	5.5092G	99.60	Inf	-Inf	102.91	3	Horizontal	350	3.00	-	31.78	8.60	43.69			
PK	5.5596G	110.03	Inf	-Inf	113.33	3	Horizontal	350	3.00	-	31.68	8.66	43.64			
PK	5.754G	66.17	68.20	-2.03	68.66	3	Horizontal	350	3.00	-	32.10	8.86	43.45			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5570MHz_TX

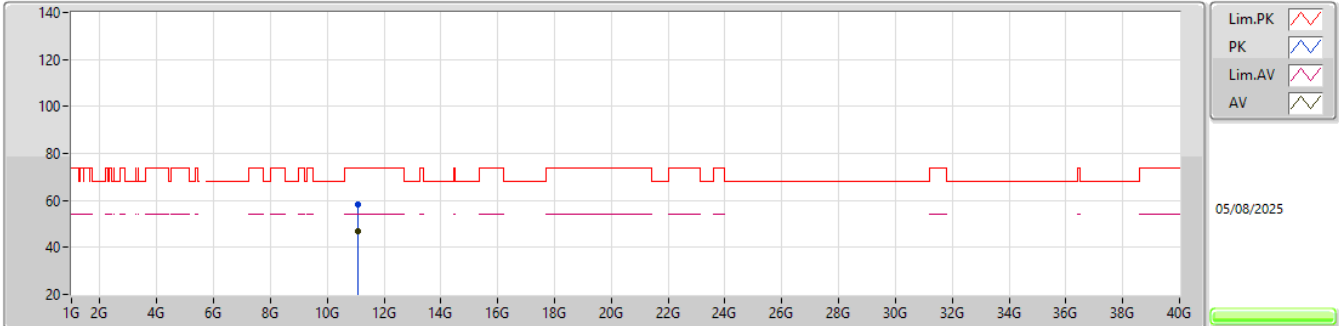


EUT_V_4TX
Setting 61
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0951G	58.07	74.00	-15.93	48.29	3	Vertical	209	2.11	-	39.72	12.94	42.88			
AV	11.0905G	46.81	54.00	-7.19	37.01	3	Vertical	209	2.11	-	39.74	12.94	42.88			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5570MHz_TX

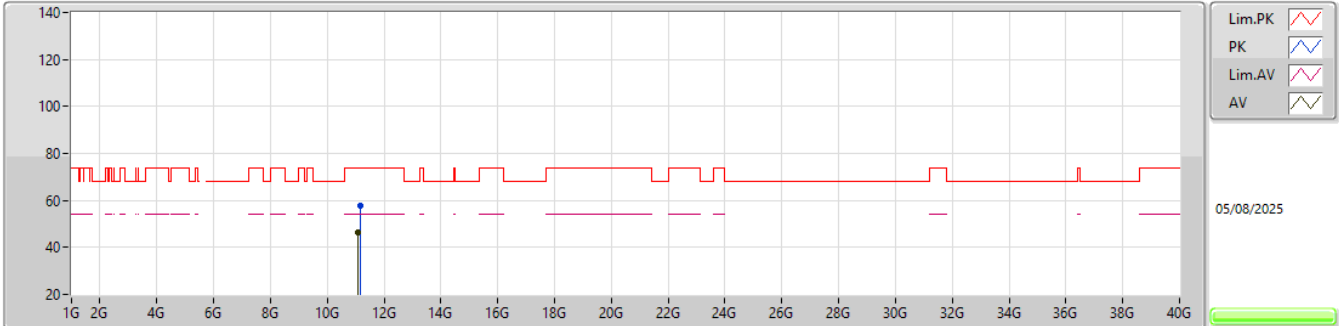


EUT_V_4TX
Setting 61
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.1668G	57.65	74.00	-16.35	48.04	3	Horizontal	159	1.09	-	39.47	12.99	42.85			
AV	11.09G	46.56	54.00	-7.44	36.76	3	Horizontal	159	1.09	-	39.74	12.94	42.88			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5570MHz_TX

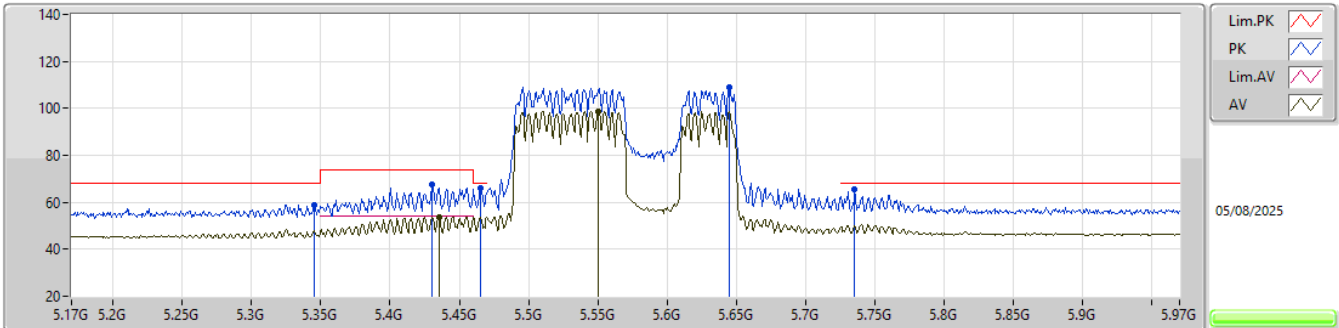EUT_Y_4TX
Setting 61
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3452G	58.87	68.20	-9.33	62.80	3	Vertical	2	1.08	-	31.38	8.47	43.78			
PK	5.43G	67.77	74.00	-6.23	71.46	3	Vertical	2	1.08	-	31.52	8.52	43.73			
AV	5.4356G	53.76	54.00	-0.24	57.42	3	Vertical	2	1.08	-	31.54	8.53	43.73			
PK	5.4652G	66.04	68.20	-2.16	69.54	3	Vertical	2	1.08	-	31.66	8.56	43.72			
AV	5.55G	98.73	Inf	-Inf	102.03	3	Vertical	2	1.08	-	31.70	8.65	43.65			
PK	5.6452G	108.82	Inf	-Inf	111.84	3	Vertical	2	1.08	-	31.78	8.75	43.55			
PK	5.7356G	65.51	68.20	-2.69	68.06	3	Vertical	2	1.08	-	32.07	8.84	43.46			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5570MHz_TX

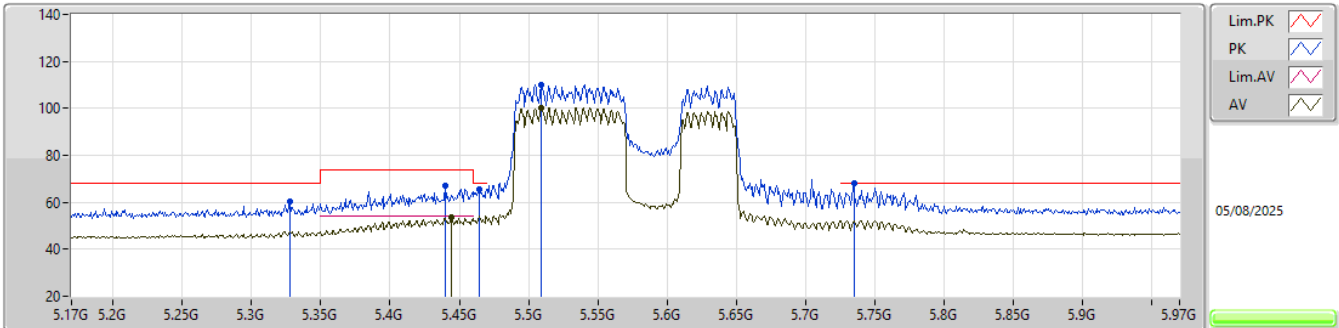EUT_Y_4TX
Setting 61
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3276G	60.45	68.20	-7.75	64.47	3	Horizontal	348	3.00	-	31.31	8.46	43.79			
PK	5.4396G	67.03	74.00	-6.97	70.67	3	Horizontal	348	3.00	-	31.56	8.53	43.73			
AV	5.4444G	53.43	54.00	-0.57	57.04	3	Horizontal	348	3.00	-	31.58	8.54	43.73			
PK	5.4644G	65.74	68.20	-2.46	69.24	3	Horizontal	348	3.00	-	31.66	8.56	43.72			
PK	5.5092G	110.08	Inf	-Inf	113.39	3	Horizontal	348	3.00	-	31.78	8.60	43.69			
AV	5.5092G	100.36	Inf	-Inf	103.67	3	Horizontal	348	3.00	-	31.78	8.60	43.69			
PK	5.7348G	68.01	68.20	-0.19	70.57	3	Horizontal	348	3.00	-	32.07	8.84	43.47			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5570MHz_TX

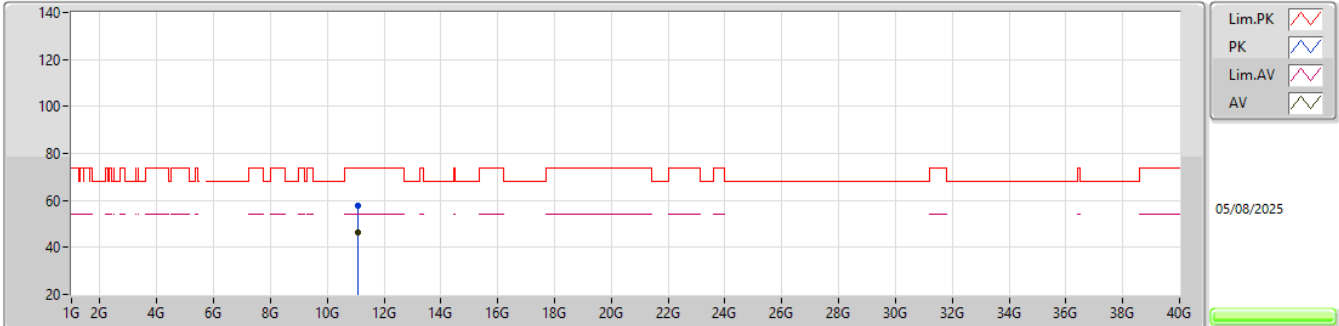


EUT_V_4TX
Setting 61
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0983G	57.78	74.00	-16.22	48.00	3	Vertical	127	2.73	-	39.71	12.95	42.88			
AV	11.0903G	46.52	54.00	-7.48	36.72	3	Vertical	127	2.73	-	39.74	12.94	42.88			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5570MHz_TX

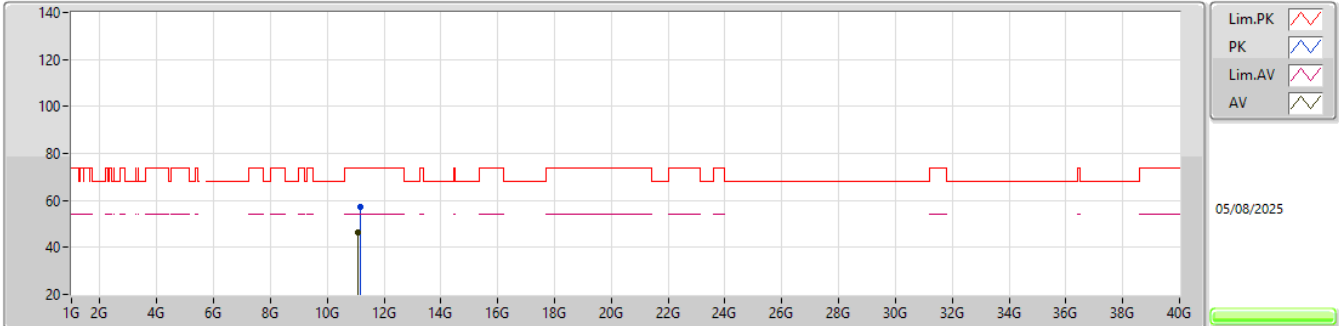

EUT_V_4TX
Setting 61
04-I-B-5


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.1839G	57.46	74.00	-16.54	47.87	3	Horizontal	330	2.34	-	39.43	13.01	42.85			
AV	11.1002G	46.63	54.00	-7.37	36.86	3	Horizontal	330	2.34	-	39.70	12.95	42.88			

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX	Pass	PK	5.4652G	68.15	68.20	-0.05	3	Horizontal	145	2.82	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

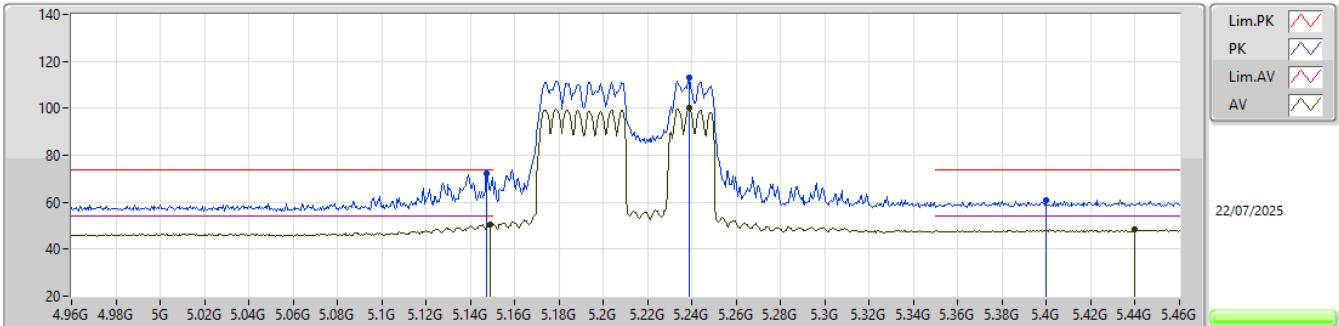EUT_Z_4TX
Setting 51
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	72.12	74.00	-1.88	65.23	3	Vertical	1	1.80	-	32.79	6.64	32.54			
AV	5.149G	50.40	54.00	-3.60	43.50	3	Vertical	1	1.80	-	32.80	6.64	32.54			
PK	5.239G	113.18	Inf	-Inf	106.15	3	Vertical	1	1.80	-	32.90	6.65	32.52			
AV	5.2385G	100.15	Inf	-Inf	93.12	3	Vertical	1	1.80	-	32.90	6.65	32.52			
PK	5.3995G	60.75	74.00	-13.25	53.20	3	Vertical	1	1.80	-	33.30	6.73	32.48			
AV	5.4395G	48.23	54.00	-5.77	40.44	3	Vertical	1	1.80	-	33.46	6.80	32.47			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

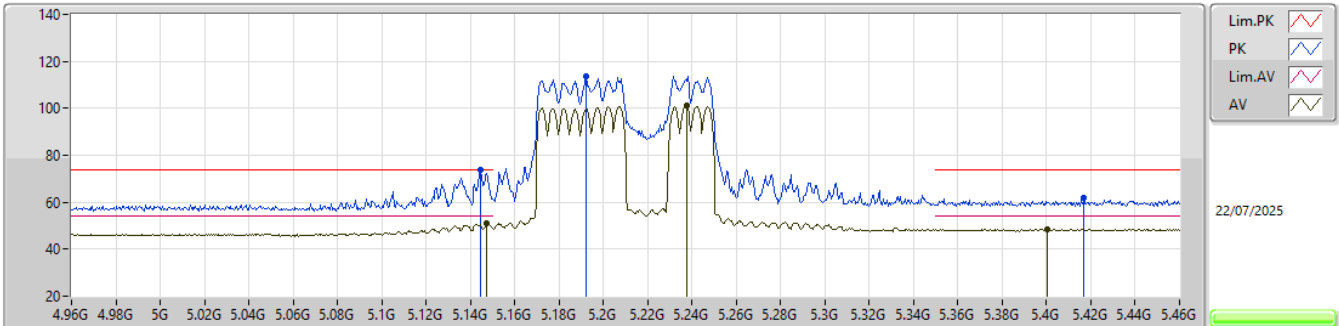EUT_Z_4TX
Setting 51
01-S-5-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1445G	73.76	74.00	-0.24	66.88	3	Horizontal	358	1.80	-	32.79	6.64	32.55
AV	5.1475G	50.93	54.00	-3.07	44.04	3	Horizontal	358	1.80	-	32.79	6.64	32.54
PK	5.192G	113.55	Inf	-Inf	106.57	3	Horizontal	358	1.80	-	32.88	6.63	32.53
AV	5.2375G	101.18	Inf	-Inf	94.15	3	Horizontal	358	1.80	-	32.90	6.65	32.52
PK	5.417G	62.03	74.00	-11.97	54.38	3	Horizontal	358	1.80	-	33.37	6.76	32.48
AV	5.4005G	48.59	54.00	-5.41	41.04	3	Horizontal	358	1.80	-	33.30	6.73	32.48

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

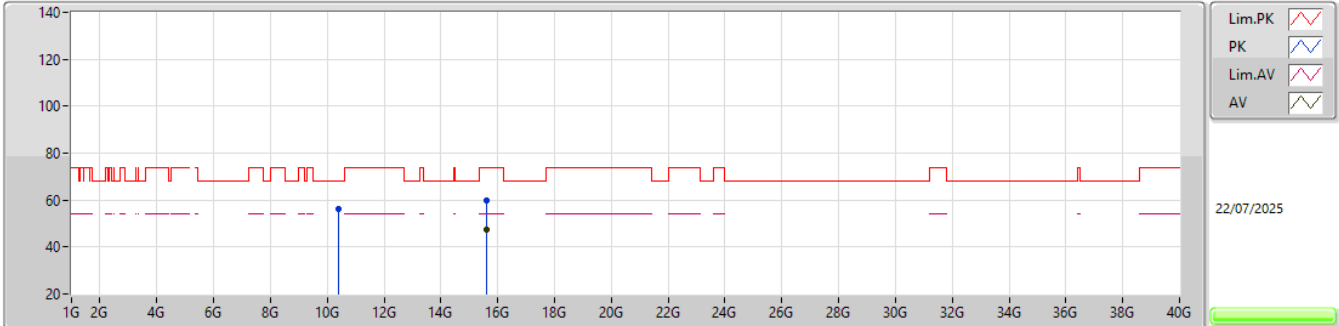


EUT_Z_4TX
Setting 51
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41406G	56.18	68.20	-12.02	39.20	3	Vertical	107	1.69	-	38.73	10.74	32.49			
PK	15.62186G	59.64	74.00	-14.36	40.50	3	Vertical	225	1.48	-	38.27	13.61	32.74			
AV	15.62078G	47.22	54.00	-6.78	28.07	3	Vertical	225	1.48	-	38.28	13.61	32.74			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

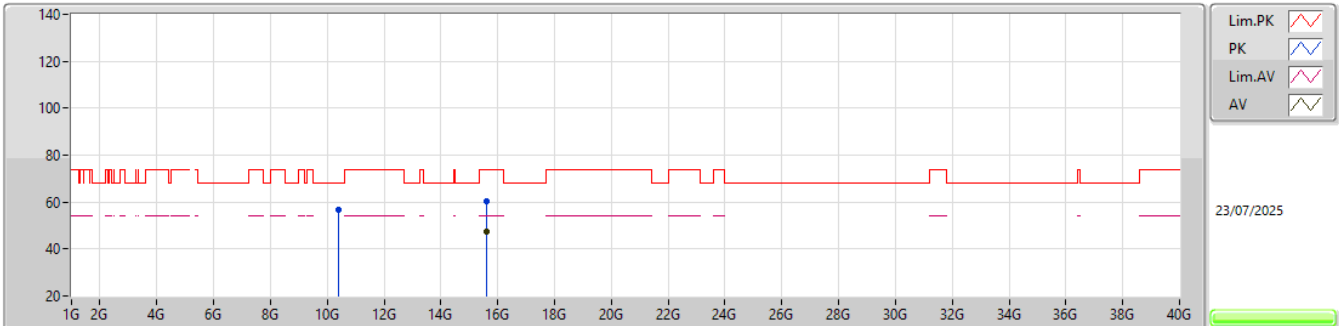


EUT_Z_4TX
Setting 51
01-S-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.4168G	56.90	68.20	-11.30	39.91	3	Horizontal	8	1.24	-	38.73	10.75	32.49				
PK	15.62832G	60.53	74.00	-13.47	41.43	3	Horizontal	184	2.71	-	38.23	13.61	32.74				
AV	15.62396G	47.34	54.00	-6.66	28.21	3	Horizontal	184	2.71	-	38.26	13.61	32.74				

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5290MHz_TX

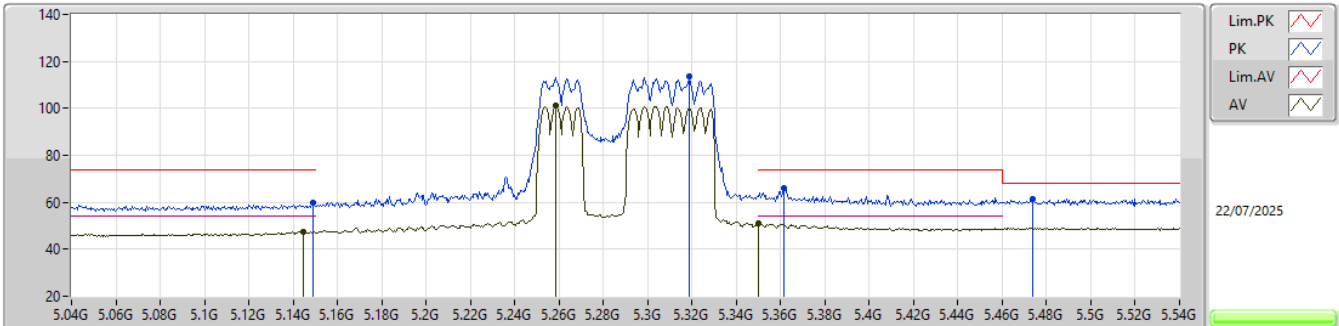EUT_Z_4TX
Setting 54
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.149G	59.65	74.00	-14.35	52.75	3	Vertical	1	1.80	-	32.80	6.64	32.54
AV	5.1445G	47.44	54.00	-6.56	40.56	3	Vertical	1	1.80	-	32.79	6.64	32.55
PK	5.319G	113.57	Inf	-Inf	106.34	3	Vertical	1	1.80	-	33.04	6.69	32.50
AV	5.2585G	101.05	Inf	-Inf	93.99	3	Vertical	1	1.80	-	32.92	6.66	32.52
PK	5.3615G	66.17	74.00	-7.83	58.80	3	Vertical	1	1.80	-	33.15	6.71	32.49
AV	5.35G	50.90	54.00	-3.10	43.59	3	Vertical	1	1.80	-	33.10	6.71	32.50
PK	5.474G	61.55	68.20	-6.65	53.51	3	Vertical	1	1.80	-	33.64	6.87	32.47

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5290MHz_TX

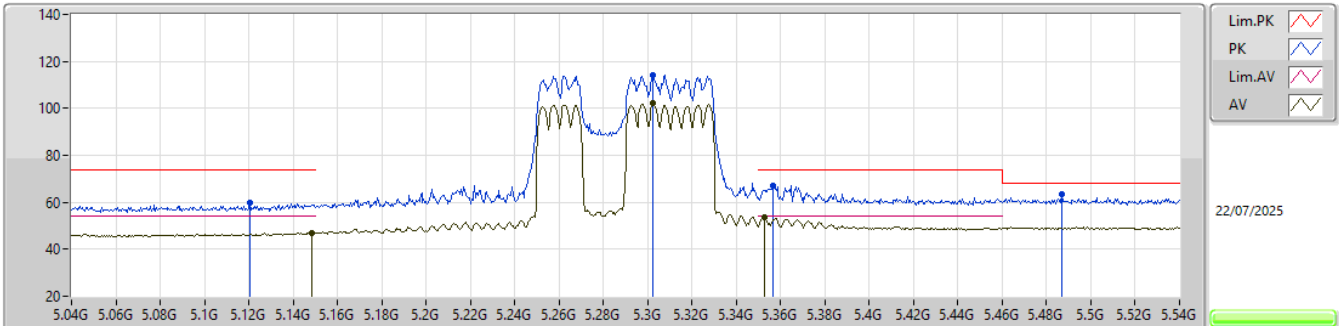EUT_Z_4TX
Setting 54
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1205G	59.85	74.00	-14.15	53.01	3	Horizontal	360	1.80	-	32.74	6.65	32.55
AV	5.1485G	47.10	54.00	-6.90	40.20	3	Horizontal	360	1.80	-	32.80	6.64	32.54
PK	5.3025G	114.15	Inf	-Inf	106.97	3	Horizontal	360	1.80	-	33.01	6.68	32.51
AV	5.3025G	102.11	Inf	-Inf	94.93	3	Horizontal	360	1.80	-	33.01	6.68	32.51
PK	5.3565G	67.28	74.00	-6.72	59.93	3	Horizontal	360	1.80	-	33.13	6.71	32.49
AV	5.3525G	53.76	54.00	-0.24	46.44	3	Horizontal	360	1.80	-	33.11	6.71	32.50
PK	5.487G	63.40	68.20	-4.80	55.25	3	Horizontal	360	1.80	-	33.72	6.89	32.46

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

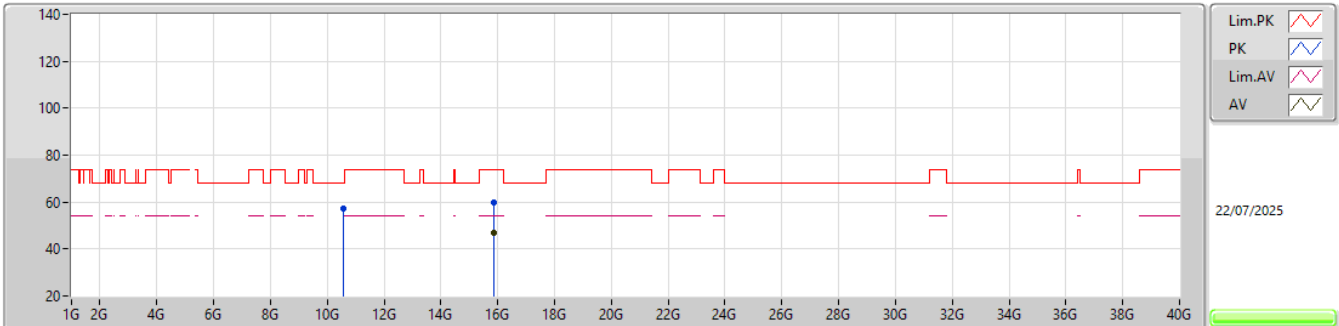


EUT_Z_4TX
Setting 54
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5829G	57.19	68.20	-11.01	39.59	3	Vertical	101	1.51	-	39.10	10.91	32.41			
PK	15.87298G	59.67	74.00	-14.33	40.32	3	Vertical	174	1.87	-	38.49	13.64	32.78			
AV	15.8674G	46.92	54.00	-7.08	27.59	3	Vertical	174	1.87	-	38.47	13.64	32.78			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

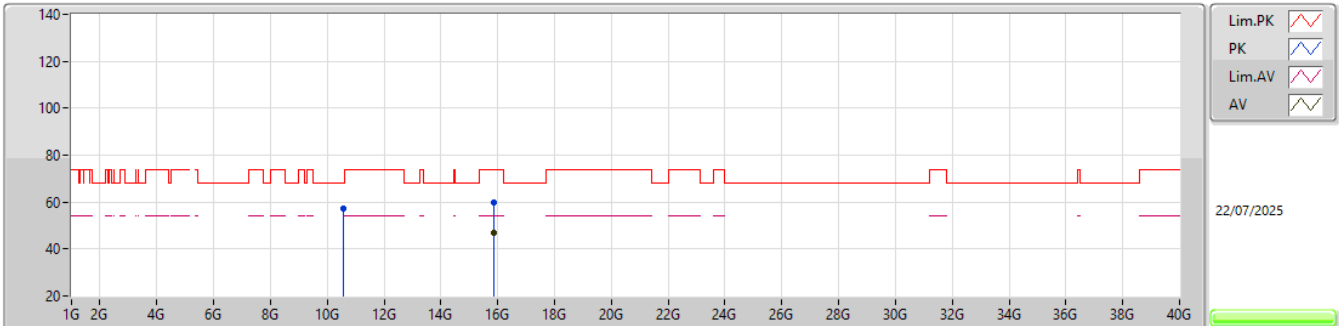


EUT_Z_4TX
Setting 54
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58418G	57.10	68.20	-11.10	39.49	3	Horizontal	351	1.57	-	39.10	10.92	32.41			
PK	15.8704G	59.83	74.00	-14.17	40.49	3	Horizontal	245	1.48	-	38.48	13.64	32.78			
AV	15.86258G	47.03	54.00	-6.97	27.72	3	Horizontal	245	1.48	-	38.45	13.64	32.78			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

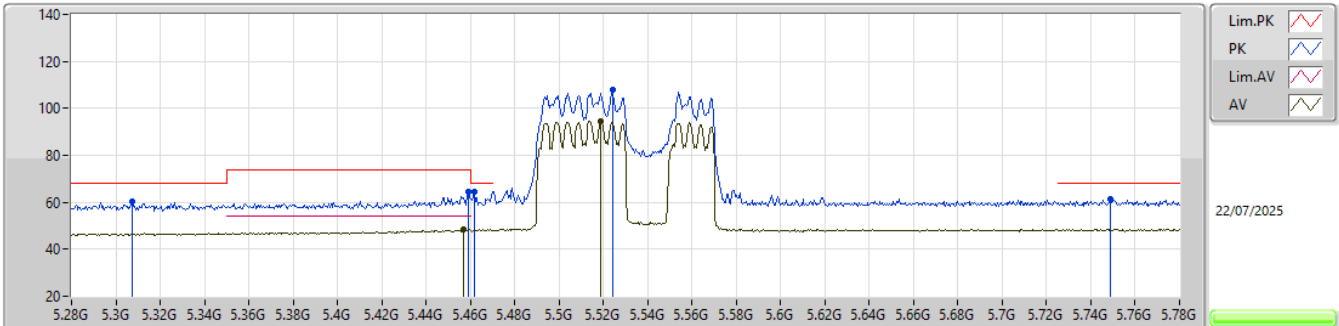EUT_Z_4TX
Setting 50
01-S-5-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3075G	60.10	68.20	-8.10	52.91	3	Vertical	129	2.76	-	33.02	6.68	32.51			
PK	5.459G	64.30	74.00	-9.70	56.38	3	Vertical	129	2.76	-	33.55	6.84	32.47			
AV	5.457G	48.43	54.00	-5.57	40.52	3	Vertical	129	2.76	-	33.54	6.84	32.47			
PK	5.462G	64.28	68.20	-3.92	56.34	3	Vertical	129	2.76	-	33.57	6.84	32.47			
PK	5.524G	108.04	Inf	-Inf	99.69	3	Vertical	129	2.76	-	33.85	6.96	32.46			
AV	5.519G	94.53	Inf	-Inf	86.20	3	Vertical	129	2.76	-	33.84	6.95	32.46			
PK	5.749G	61.28	68.20	-6.92	52.34	3	Vertical	129	2.76	-	34.10	7.29	32.45			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

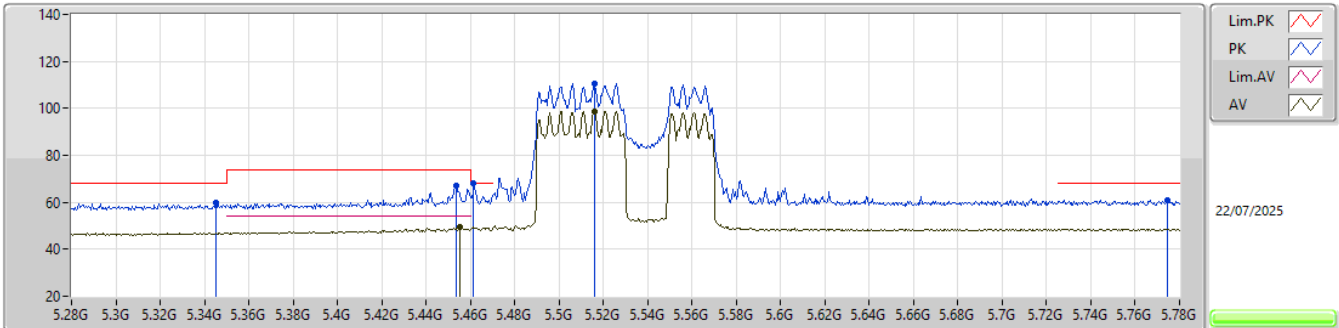EUT_Z_4TX
Setting 50
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.345G	59.69	68.20	-8.51	52.40	3	Horizontal	144	2.74	-	33.09	6.70	32.50			
PK	5.4535G	67.03	74.00	-6.97	59.15	3	Horizontal	144	2.74	-	33.52	6.83	32.47			
AV	5.4555G	49.50	54.00	-4.50	41.61	3	Horizontal	144	2.74	-	33.53	6.83	32.47			
PK	5.4615G	67.97	68.20	-0.23	60.03	3	Horizontal	144	2.74	-	33.57	6.84	32.47			
PK	5.516G	110.65	Inf	-Inf	102.34	3	Horizontal	144	2.74	-	33.83	6.94	32.46			
AV	5.516G	98.61	Inf	-Inf	90.30	3	Horizontal	144	2.74	-	33.83	6.94	32.46			
PK	5.7745G	60.88	68.20	-7.32	51.86	3	Horizontal	144	2.74	-	34.15	7.32	32.45			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

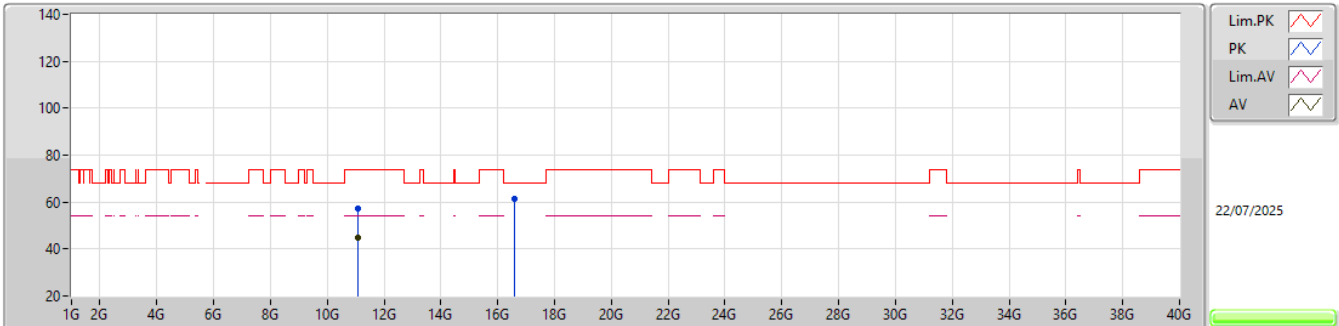


EUT_Z_4TX
Setting 50
01-S-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.0667G	57.01	74.00	-16.99	39.05	3	Vertical	38	1.57	-	39.00	11.41	32.45				
AV	11.06408G	44.63	54.00	-9.37	26.67	3	Vertical	38	1.57	-	39.00	11.41	32.45				
PK	16.58334G	61.56	68.20	-6.64	40.54	3	Vertical	267	1.55	-	39.60	13.82	32.40				

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

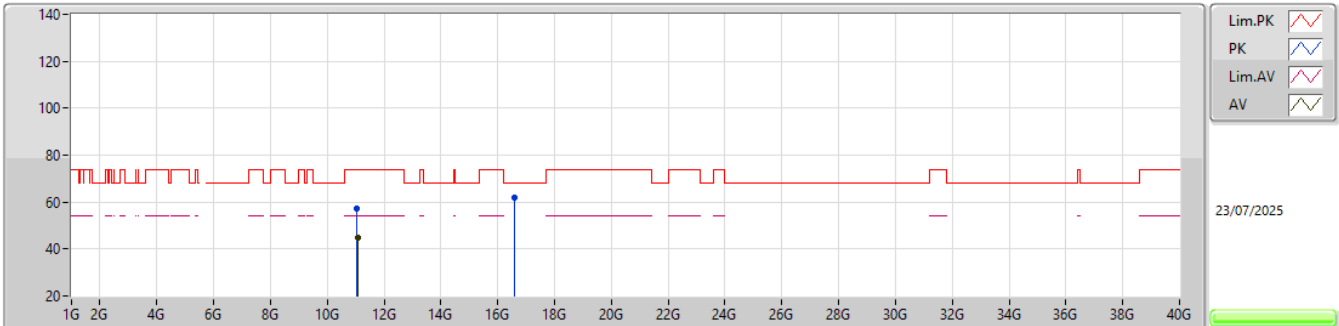EUT_Z_4TX
Setting 50
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05968G	56.99	74.00	-17.01	39.04	3	Horizontal	74	1.39	-	39.00	11.40	32.45			
AV	11.06664G	44.58	54.00	-9.42	26.62	3	Horizontal	74	1.39	-	39.00	11.41	32.45			
PK	16.58508G	62.07	68.20	-6.13	41.05	3	Horizontal	345	1.80	-	39.60	13.82	32.40			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5610MHz_TX

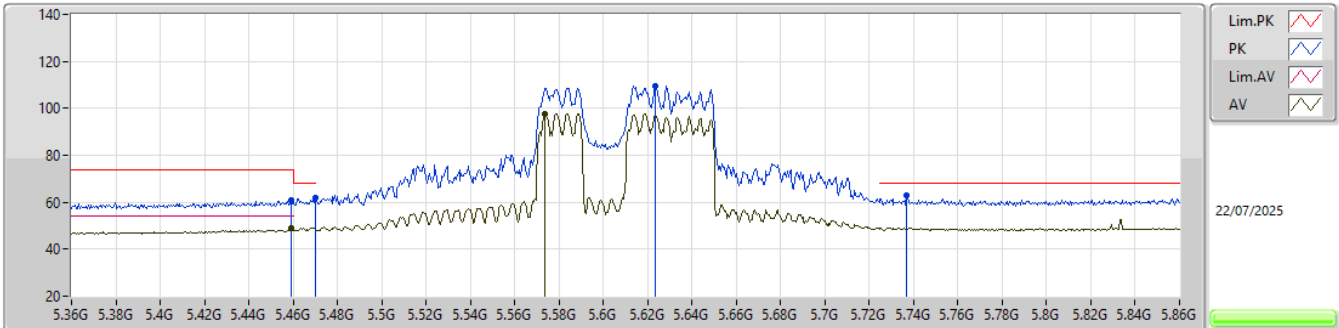EUT_Z_4TX
Setting 67
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	61.01	74.00	-12.99	53.09	3	Vertical	130	2.88	-	33.55	6.84	32.47			
AV	5.459G	48.71	54.00	-5.29	40.79	3	Vertical	130	2.88	-	33.55	6.84	32.47			
PK	5.47G	61.64	68.20	-6.56	53.63	3	Vertical	130	2.88	-	33.62	6.86	32.47			
PK	5.6235G	109.32	Inf	-Inf	100.70	3	Vertical	130	2.88	-	33.95	7.13	32.46			
AV	5.5735G	97.76	Inf	-Inf	89.27	3	Vertical	130	2.88	-	33.90	7.05	32.46			
PK	5.737G	62.97	68.20	-5.23	54.05	3	Vertical	130	2.88	-	34.10	7.27	32.45			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5610MHz_TX

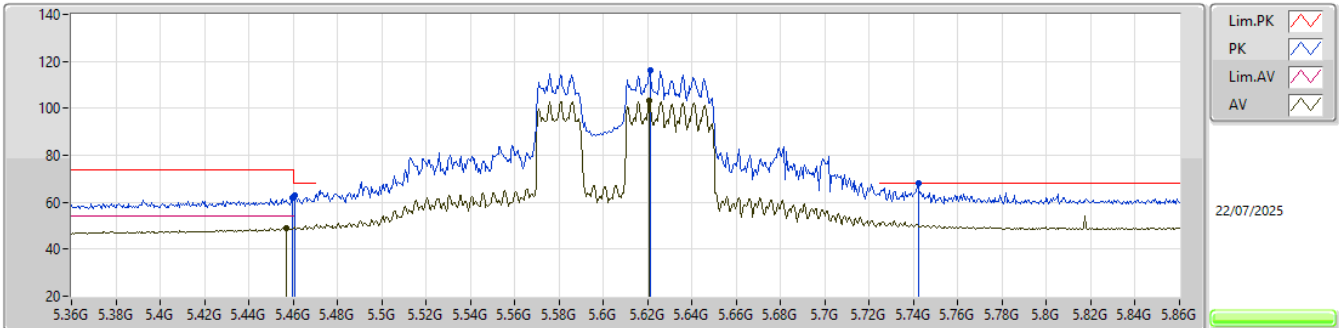EUT_Z_4TX
Setting 67
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4595G	61.83	74.00	-12.17	53.90	3	Horizontal	143	2.78	-	33.56	6.84	32.47
AV	5.457G	49.15	54.00	-4.85	41.24	3	Horizontal	143	2.78	-	33.54	6.84	32.47
PK	5.4605G	63.10	68.20	-5.10	55.17	3	Horizontal	143	2.78	-	33.56	6.84	32.47
PK	5.621G	116.02	Inf	-Inf	107.41	3	Horizontal	143	2.78	-	33.94	7.13	32.46
AV	5.6205G	103.19	Inf	-Inf	94.58	3	Horizontal	143	2.78	-	33.94	7.13	32.46
PK	5.742G	67.98	68.20	-0.22	59.05	3	Horizontal	143	2.78	-	34.10	7.28	32.45

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5610MHz_TX

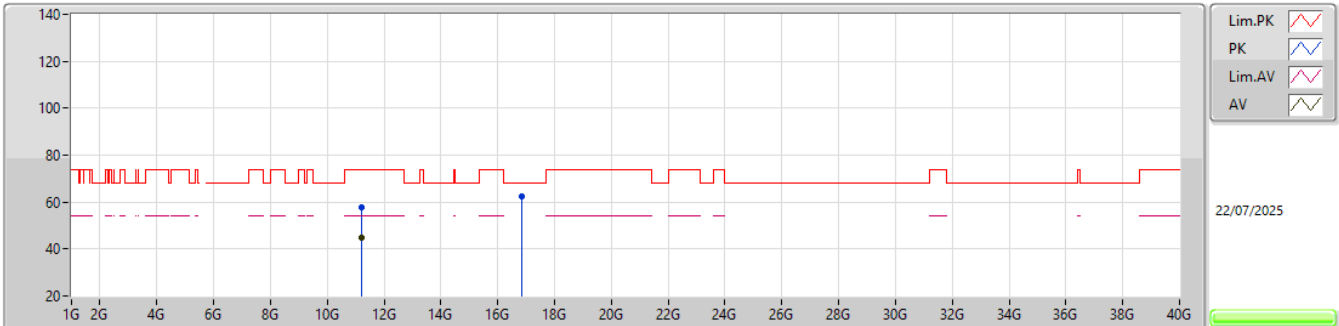EUT_Z_4TX
Setting 67
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22724G	57.80	74.00	-16.20	39.88	3	Vertical	313	1.69	-	38.85	11.57	32.50			
AV	11.22872G	45.03	54.00	-8.97	27.10	3	Vertical	313	1.69	-	38.86	11.57	32.50			
PK	16.83446G	62.60	68.20	-5.60	40.58	3	Vertical	107	1.52	-	40.34	13.89	32.21			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5610MHz_TX

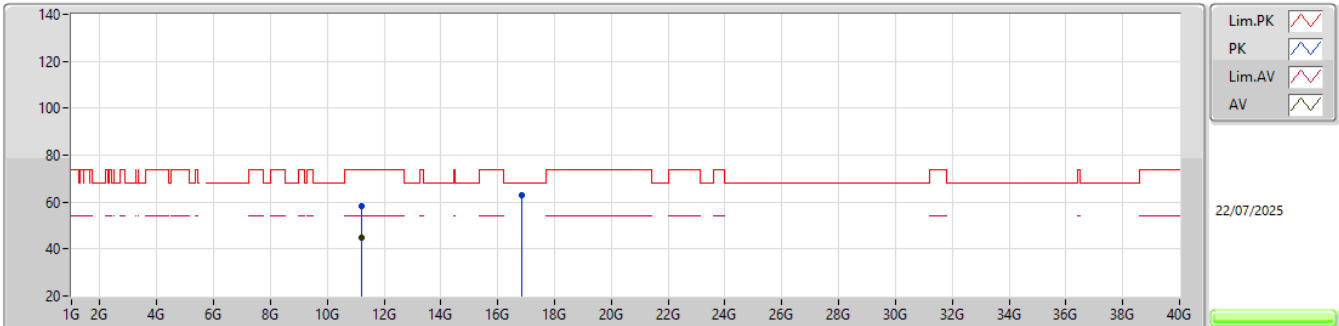EUT_Z_4TX
Setting 67
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22646G	58.20	74.00	-15.80	40.28	3	Horizontal	355	1.54	-	38.85	11.57	32.50			
AV	11.226G	44.95	54.00	-9.05	27.03	3	Horizontal	355	1.54	-	38.85	11.57	32.50			
PK	16.83162G	62.87	68.20	-5.33	40.86	3	Horizontal	239	1.92	-	40.33	13.89	32.21			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

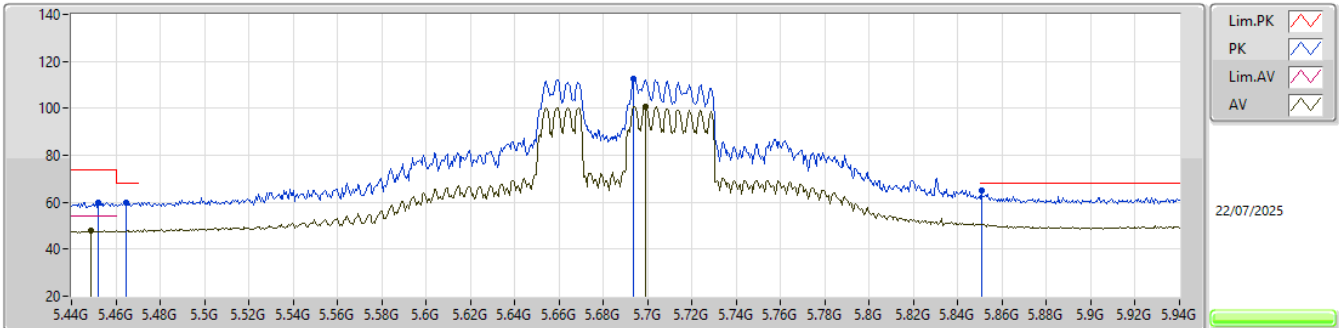


EUT_Z_4TX
Setting 80
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.452G	59.96	74.00	-14.04	52.09	3	Vertical	127	2.82	-	33.51	6.83	32.47
AV	5.4485G	47.95	54.00	-6.05	40.11	3	Vertical	127	2.82	-	33.49	6.82	32.47
PK	5.4645G	59.89	68.20	-8.31	51.92	3	Vertical	127	2.82	-	33.59	6.85	32.47
PK	5.6935G	112.74	Inf	-Inf	103.88	3	Vertical	127	2.82	-	34.09	7.22	32.45
AV	5.699G	100.88	Inf	-Inf	92.01	3	Vertical	127	2.82	-	34.10	7.22	32.45
PK	5.8505G	64.89	68.20	-3.31	55.45	3	Vertical	127	2.82	-	34.50	7.39	32.45

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

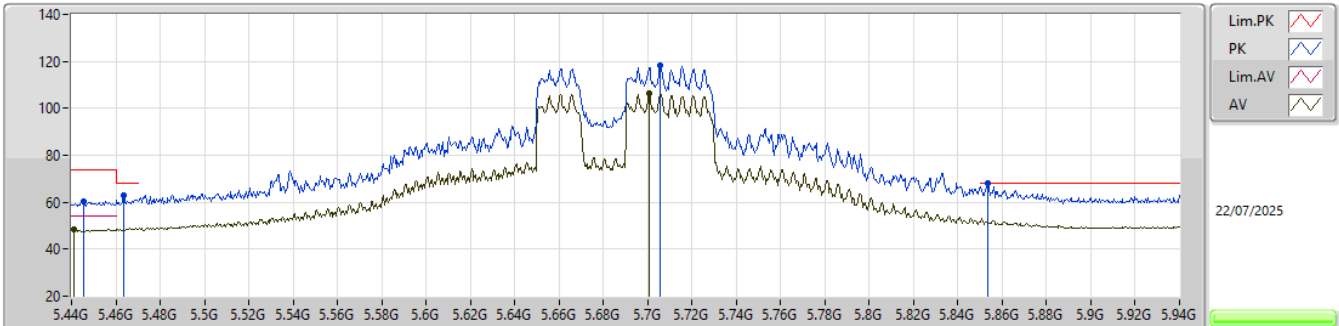


EUT_Z_4TX
Setting 80
01-S-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4455G	60.55	74.00	-13.45	52.73	3	Horizontal	142	2.90	-	33.48	6.81	32.47			
AV	5.441G	48.22	54.00	-5.78	40.42	3	Horizontal	142	2.90	-	33.46	6.81	32.47			
PK	5.4635G	62.72	68.20	-5.48	54.76	3	Horizontal	142	2.90	-	33.58	6.85	32.47			
PK	5.7055G	118.16	Inf	-Inf	109.28	3	Horizontal	142	2.90	-	34.10	7.23	32.45			
AV	5.7005G	106.39	Inf	-Inf	97.51	3	Horizontal	142	2.90	-	34.10	7.23	32.45			
PK	5.8535G	67.96	68.20	-0.24	58.50	3	Horizontal	142	2.90	-	34.52	7.39	32.45			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5690MHz Straddle 5.47-5.725GHz_TX

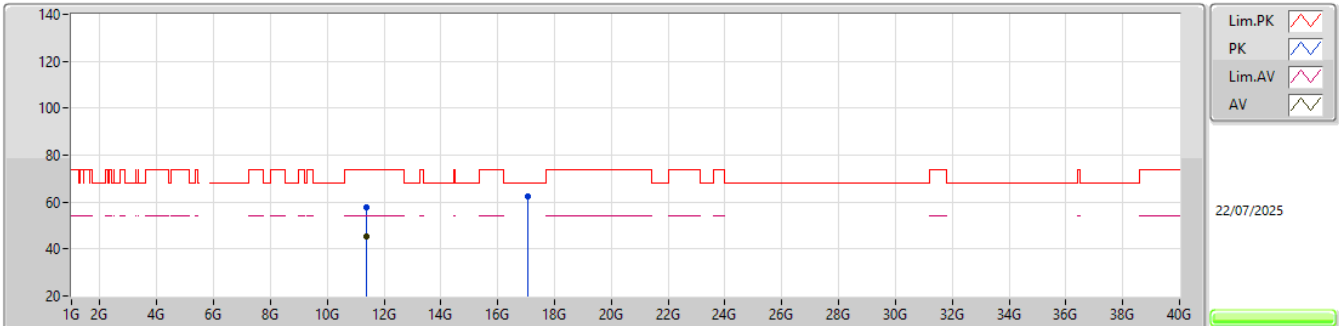EUT_Z_4TX
Setting 80
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37068G	57.92	74.00	-16.08	39.64	3	Vertical	116	1.93	-	39.10	11.72	32.54			
AV	11.3754G	45.41	54.00	-8.59	27.13	3	Vertical	116	1.93	-	39.10	11.72	32.54			
PK	17.06956G	62.67	68.20	-5.53	39.77	3	Vertical	47	1.76	-	40.98	13.96	32.04			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5690MHz Straddle 5.47-5.725GHz_TX

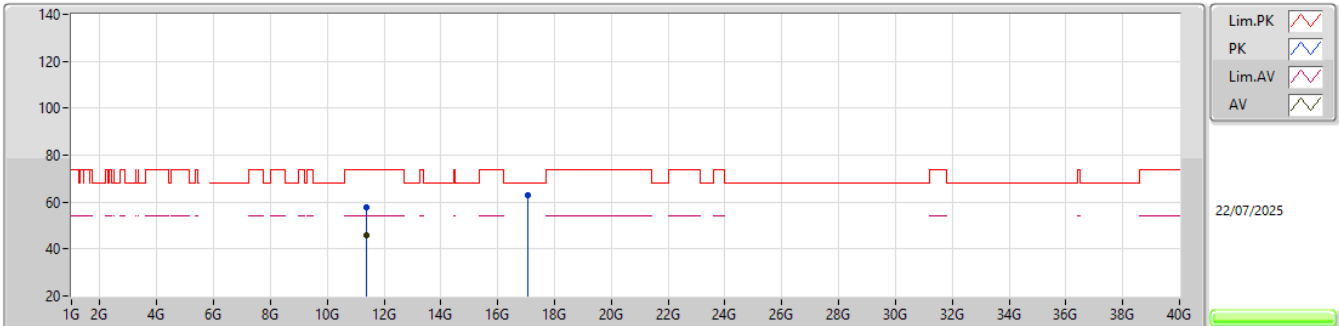EUT_Z_4TX
Setting 80
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37358G	58.01	74.00	-15.99	39.73	3	Horizontal	273	1.44	-	39.10	11.72	32.54			
AV	11.37384G	45.66	54.00	-8.34	27.38	3	Horizontal	273	1.44	-	39.10	11.72	32.54			
PK	17.07862G	62.83	68.20	-5.37	39.89	3	Horizontal	285	1.53	-	41.01	13.96	32.03			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5775MHz_TX

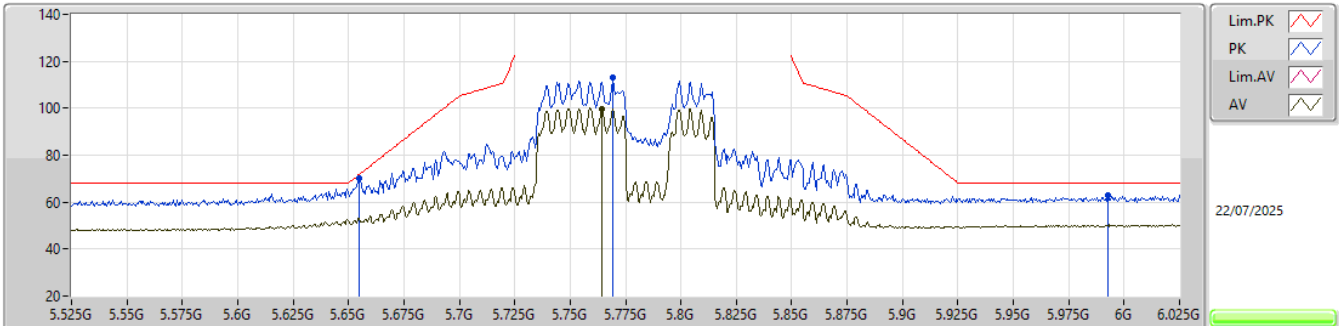EUT_Z_4TX
Setting 72
01-S-5-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.655G	69.93	71.90	-1.97	61.20	3	Vertical	138	3.00	-	34.01	7.17	32.45			
PK	5.7695G	112.85	Inf	-Inf	103.85	3	Vertical	138	3.00	-	34.14	7.31	32.45			
AV	5.7645G	99.90	Inf	-Inf	90.91	3	Vertical	138	3.00	-	34.13	7.31	32.45			
PK	5.9925G	63.05	68.20	-5.15	52.73	3	Vertical	138	3.00	-	35.27	7.49	32.44			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5775MHz_TX

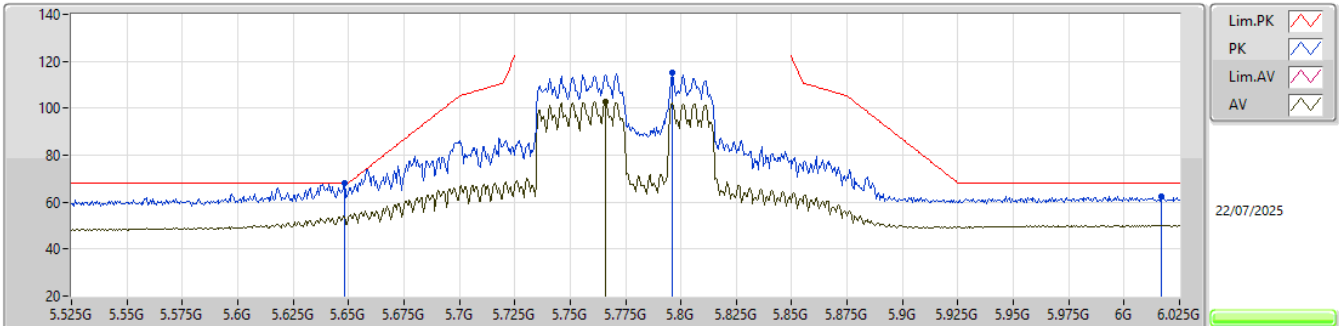EUT_Z_4TX
Setting 72
01-S-5-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.648G	67.87	68.20	-0.33	59.16	3	Horizontal	139	2.20	-	34.00	7.16	32.45			
PK	5.796G	115.04	Inf	-Inf	105.96	3	Horizontal	139	2.20	-	34.19	7.34	32.45			
AV	5.766G	102.76	Inf	-Inf	93.77	3	Horizontal	139	2.20	-	34.13	7.31	32.45			
PK	6.017G	62.64	68.20	-5.56	52.24	3	Horizontal	139	2.20	-	35.33	7.51	32.44			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

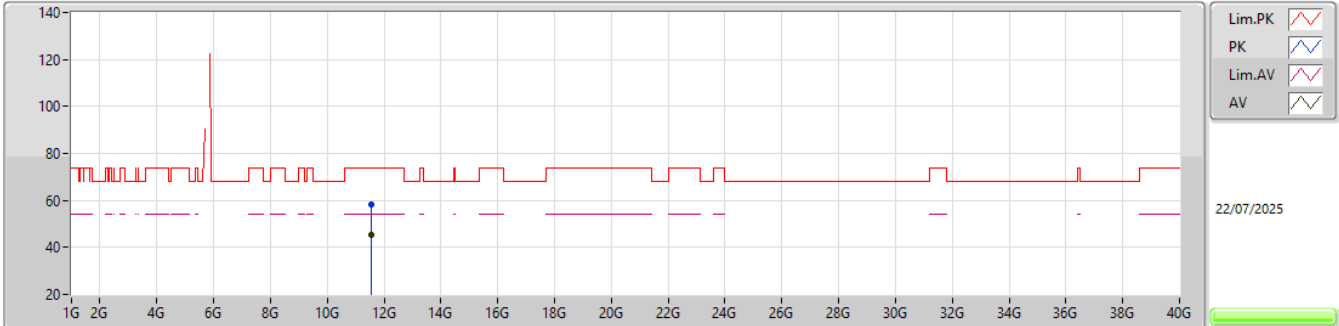


EUT_Z_4TX
Setting 72
01-S-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.55256G	58.49	74.00	-15.51	40.20	3	Vertical	292	1.39	-	38.99	11.90	32.60			
AV	11.55392G	45.58	54.00	-8.42	27.29	3	Vertical	292	1.39	-	38.99	11.90	32.60			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

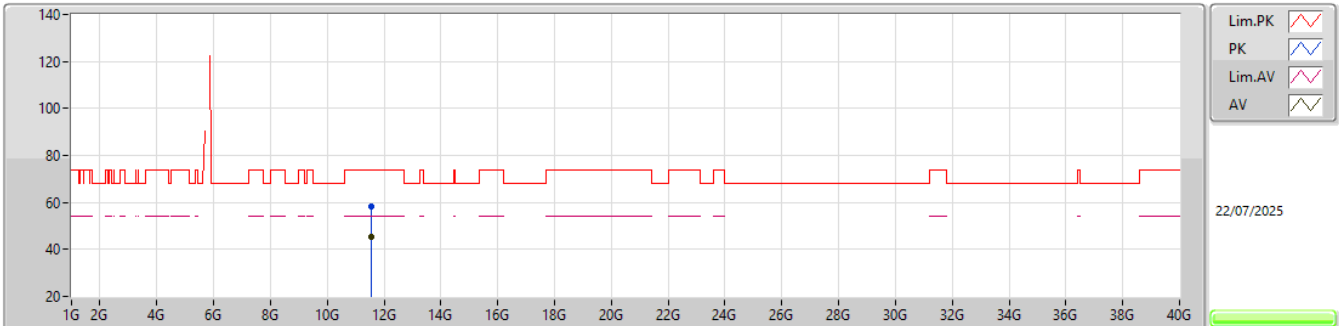


EUT_Z_4TX
Setting 72
01-S-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.5571G	58.18	74.00	-15.82	39.89	3	Horizontal	81	1.59	-	38.99	11.91	32.61			
AV	11.55262G	45.35	54.00	-8.65	27.06	3	Horizontal	81	1.59	-	38.99	11.90	32.60			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX

5250MHz Straddle 5.15-5.25GHz_TX

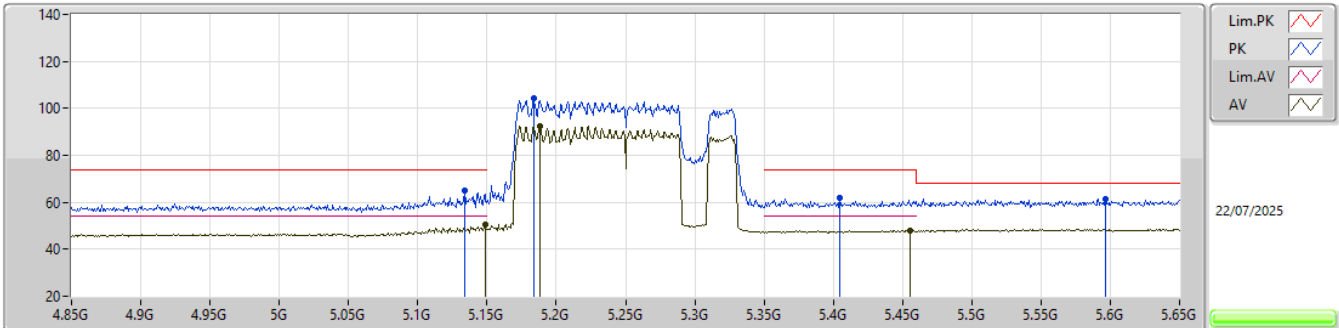


EUT_Z_4TX
Setting 63
01-S-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.134G	64.77	74.00	-9.23	57.91	3	Vertical	140	2.45	-	32.77	6.64	32.55			
AV	5.1484G	50.26	54.00	-3.74	43.36	3	Vertical	140	2.45	-	32.80	6.64	32.54			
PK	5.1836G	104.15	Inf	-Inf	97.19	3	Vertical	140	2.45	-	32.87	6.63	32.54			
AV	5.1884G	92.38	Inf	-Inf	85.40	3	Vertical	140	2.45	-	32.88	6.63	32.53			
PK	5.4044G	61.86	74.00	-12.14	54.28	3	Vertical	140	2.45	-	33.32	6.74	32.48			
AV	5.4556G	48.09	54.00	-5.91	40.20	3	Vertical	140	2.45	-	33.53	6.83	32.47			
PK	5.5964G	61.52	68.20	-6.68	52.99	3	Vertical	140	2.45	-	33.90	7.09	32.46			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX

5250MHz Straddle 5.15-5.25GHz_TX

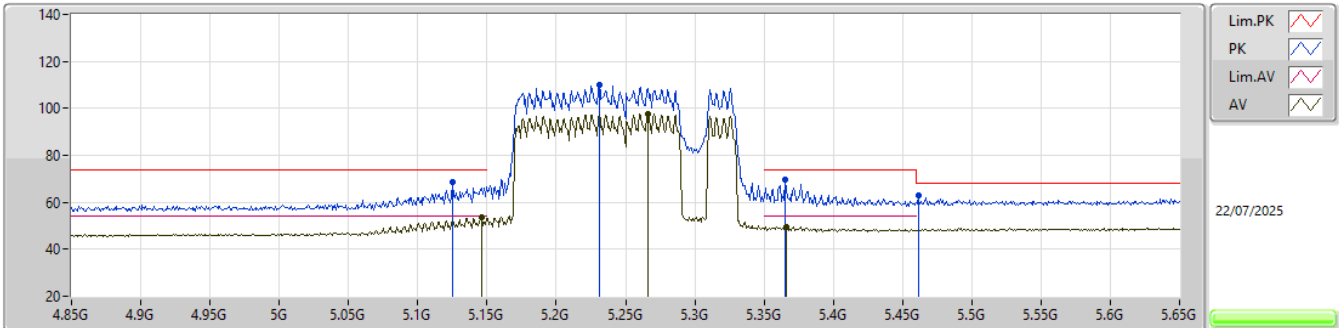


EUT_Z_4TX
Setting 63
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1252G	68.46	74.00	-5.54	61.62	3	Horizontal	142	3.00	-	32.75	6.64	32.55
AV	5.146G	53.77	54.00	-0.23	46.88	3	Horizontal	142	3.00	-	32.79	6.64	32.54
PK	5.2308G	109.99	Inf	-Inf	102.96	3	Horizontal	142	3.00	-	32.90	6.65	32.52
AV	5.266G	97.71	Inf	-Inf	90.64	3	Horizontal	142	3.00	-	32.93	6.66	32.52
PK	5.3652G	69.76	74.00	-4.24	62.38	3	Horizontal	142	3.00	-	33.16	6.71	32.49
AV	5.366G	49.48	54.00	-4.52	42.10	3	Horizontal	142	3.00	-	33.16	6.71	32.49
PK	5.4612G	62.69	68.20	-5.51	54.75	3	Horizontal	142	3.00	-	33.57	6.84	32.47

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX

5250MHz Straddle 5.15-5.25GHz_TX

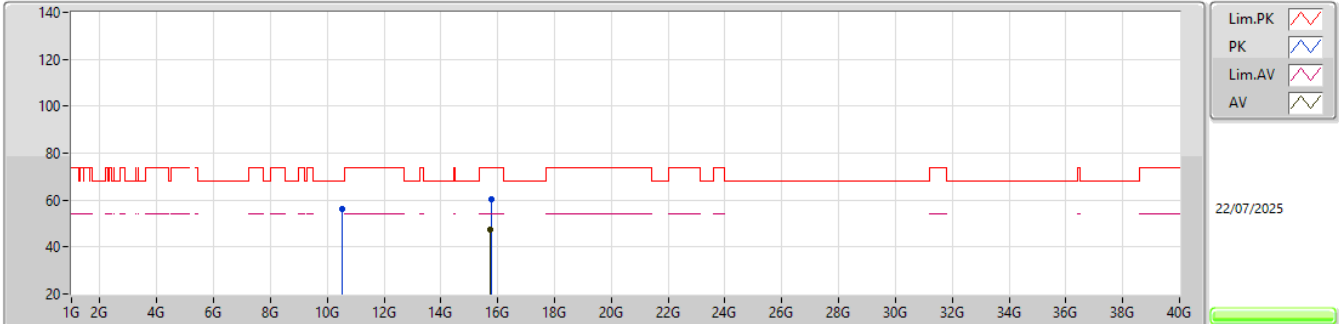


EUT_Z_4TX
Setting 63
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50532G	56.21	68.20	-11.99	38.77	3	Vertical	348	1.88	-	39.01	10.84	32.41			
PK	15.75884G	60.13	74.00	-13.87	40.86	3	Vertical	310	1.93	-	38.40	13.63	32.76			
AV	15.74636G	47.51	54.00	-6.49	28.26	3	Vertical	310	1.93	-	38.39	13.62	32.76			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX


5250MHz Straddle 5.15-5.25GHz_TX

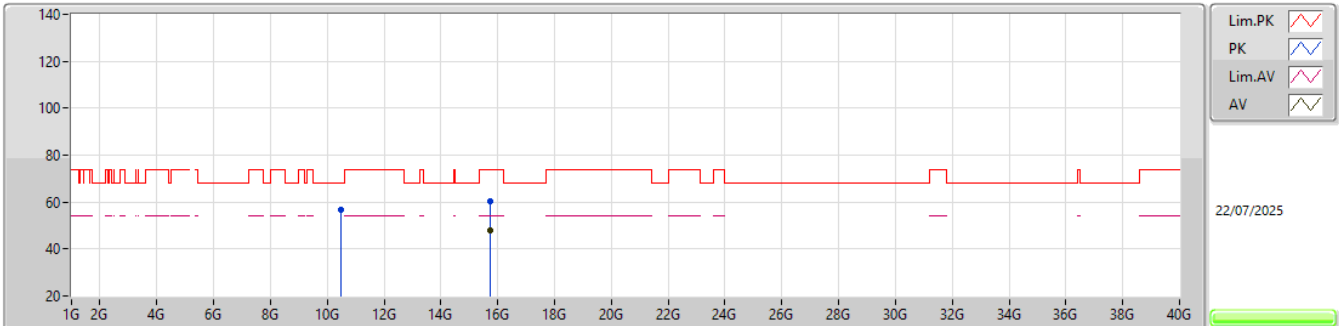EUT_Z_4TX
Setting 63
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49766G	56.54	68.20	-11.66	39.13	3	Horizontal	60	1.54	-	38.99	10.83	32.41			
PK	15.75754G	60.42	74.00	-13.58	41.15	3	Horizontal	154	1.72	-	38.40	13.63	32.76			
AV	15.75424G	47.73	54.00	-6.27	28.46	3	Horizontal	154	1.72	-	38.40	13.63	32.76			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

5250MHz Straddle 5.15-5.25GHz_TX

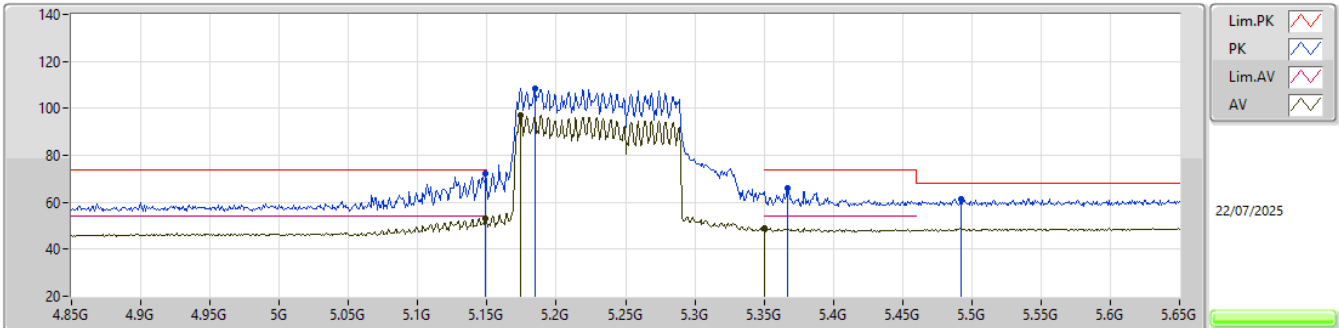


EUT_Z_4TX
Setting 67
01-S-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1492G	72.19	74.00	-1.81	65.29	3	Vertical	158	3.00	-	32.80	6.64	32.54			
AV	5.1492G	53.28	54.00	-0.72	46.38	3	Vertical	158	3.00	-	32.80	6.64	32.54			
PK	5.1844G	108.62	Inf	-Inf	101.66	3	Vertical	158	3.00	-	32.87	6.63	32.54			
AV	5.174G	97.19	Inf	-Inf	90.24	3	Vertical	158	3.00	-	32.85	6.64	32.54			
PK	5.3668G	66.13	74.00	-7.87	58.74	3	Vertical	158	3.00	-	33.17	6.71	32.49			
AV	5.35G	48.96	54.00	-5.04	41.65	3	Vertical	158	3.00	-	33.10	6.71	32.50			
PK	5.4924G	61.57	68.20	-6.63	53.38	3	Vertical	158	3.00	-	33.75	6.90	32.46			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

5250MHz Straddle 5.15-5.25GHz_TX

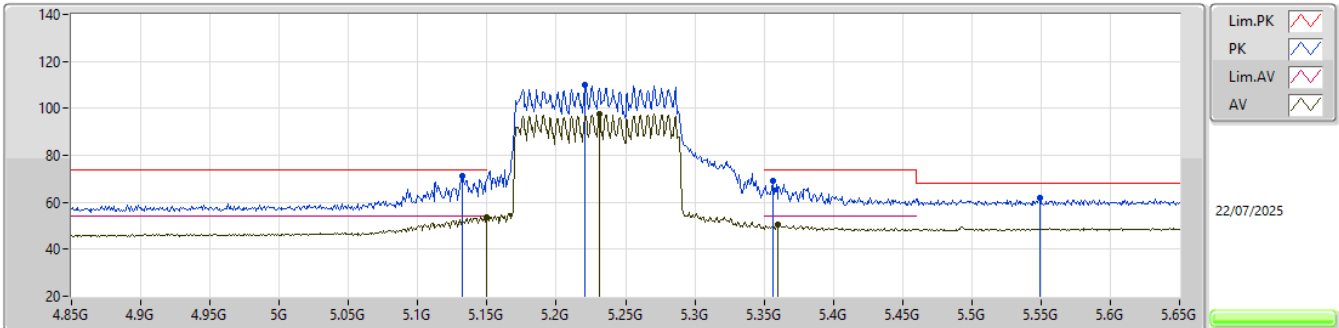


EUT_Z_4TX
Setting 67
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1324G	71.25	74.00	-2.75	64.40	3	Horizontal	148	2.72	-	32.76	6.64	32.55
AV	5.15G	53.80	54.00	-0.20	46.90	3	Horizontal	148	2.72	-	32.80	6.64	32.54
PK	5.2204G	110.20	Inf	-Inf	103.19	3	Horizontal	148	2.72	-	32.90	6.64	32.53
AV	5.2308G	97.64	Inf	-Inf	90.61	3	Horizontal	148	2.72	-	32.90	6.65	32.52
PK	5.3564G	69.18	74.00	-4.82	61.83	3	Horizontal	148	2.72	-	33.13	6.71	32.49
AV	5.3604G	50.31	54.00	-3.69	42.95	3	Horizontal	148	2.72	-	33.14	6.71	32.49
PK	5.5492G	62.08	68.20	-6.12	53.63	3	Horizontal	148	2.72	-	33.90	7.01	32.46

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

5250MHz Straddle 5.15-5.25GHz_TX

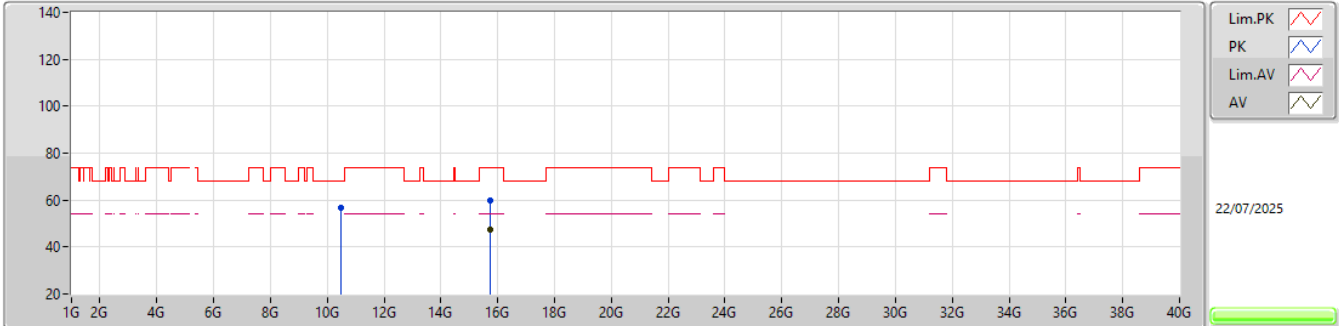


EUT_Z_4TX
Setting 67
01-S-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.49714G	56.61	68.20	-11.59	39.20	3	Vertical	189	1.99	-	38.99	10.83	32.41			
PK	15.74124G	59.90	74.00	-14.10	40.68	3	Vertical	127	1.40	-	38.36	13.62	32.76			
AV	15.75758G	47.50	54.00	-6.50	28.23	3	Vertical	127	1.40	-	38.40	13.63	32.76			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

5250MHz Straddle 5.15-5.25GHz_TX

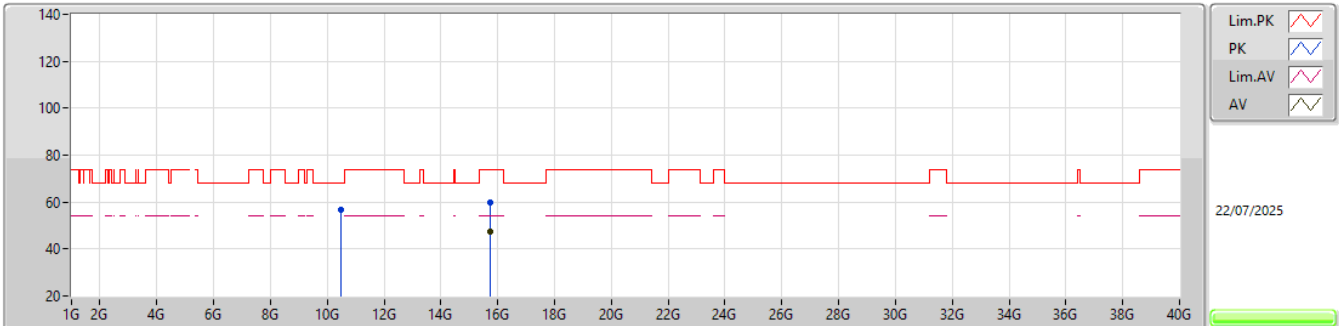


EUT_Z_4TX
Setting 67
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50134G	56.48	68.20	-11.72	39.06	3	Horizontal	37	1.45	-	39.00	10.83	32.41			
PK	15.75516G	59.78	74.00	-14.22	40.51	3	Horizontal	7	1.64	-	38.40	13.63	32.76			
AV	15.75246G	47.52	54.00	-6.48	28.25	3	Horizontal	7	1.64	-	38.40	13.63	32.76			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX


5570MHz_TX

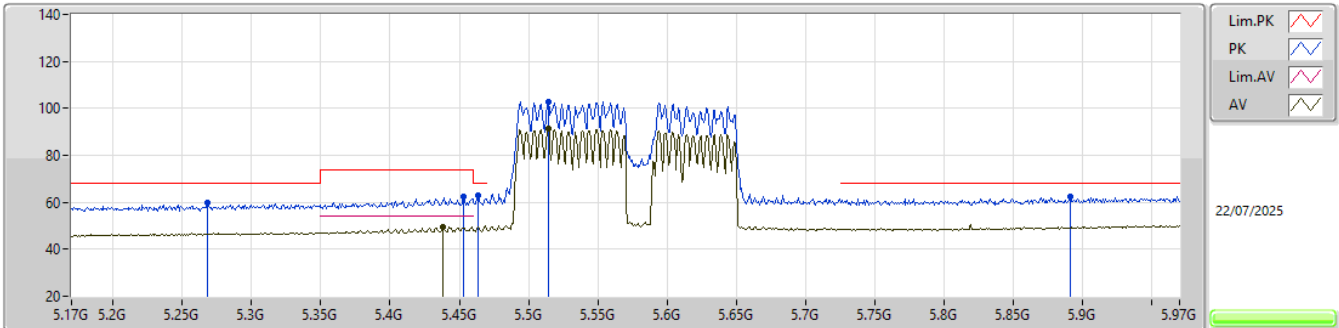EUT_Z_4TX
Setting 59
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2684G	60.00	68.20	-8.20	52.92	3	Vertical	127	1.80	-	32.94	6.66	32.52			
PK	5.4532G	62.24	74.00	-11.76	54.36	3	Vertical	127	1.80	-	33.52	6.83	32.47			
AV	5.438G	49.67	54.00	-4.33	41.89	3	Vertical	127	1.80	-	33.45	6.80	32.47			
PK	5.4636G	63.07	68.20	-5.13	55.11	3	Vertical	127	1.80	-	33.58	6.85	32.47			
PK	5.514G	102.64	Inf	-Inf	94.33	3	Vertical	127	1.80	-	33.83	6.94	32.46			
AV	5.514G	91.24	Inf	-Inf	82.93	3	Vertical	127	1.80	-	33.83	6.94	32.46			
PK	5.8908G	62.39	68.20	-5.81	52.67	3	Vertical	127	1.80	-	34.74	7.42	32.44			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX


5570MHz_TX

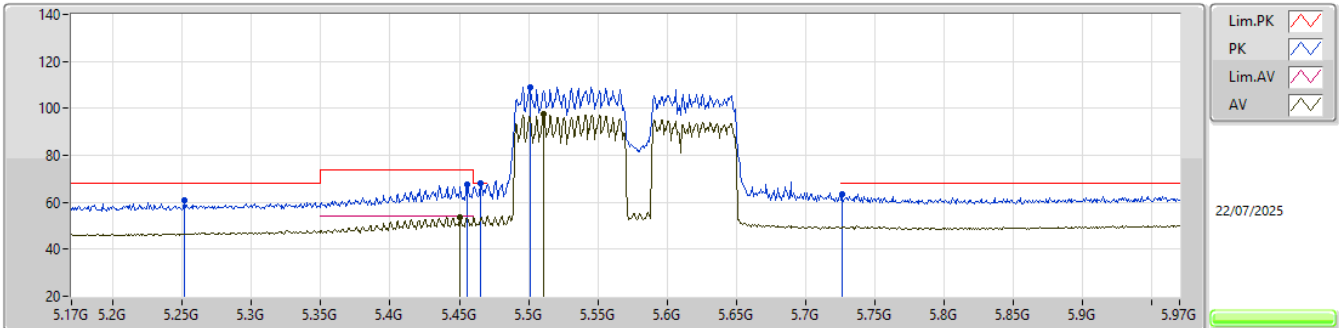EUT_Z_4TX
Setting 59
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2516G	60.78	68.20	-7.42	53.74	3	Horizontal	145	2.82	-	32.90	6.66	32.52			
PK	5.4556G	67.69	74.00	-6.31	59.80	3	Horizontal	145	2.82	-	33.53	6.83	32.47			
AV	5.45G	53.50	54.00	-0.50	45.65	3	Horizontal	145	2.82	-	33.50	6.82	32.47			
PK	5.4652G	68.15	68.20	-0.05	60.18	3	Horizontal	145	2.82	-	33.59	6.85	32.47			
PK	5.5012G	109.17	Inf	-Inf	100.91	3	Horizontal	145	2.82	-	33.80	6.92	32.46			
AV	5.5108G	97.34	Inf	-Inf	89.05	3	Horizontal	145	2.82	-	33.82	6.93	32.46			
PK	5.726G	63.40	68.20	-4.80	54.49	3	Horizontal	145	2.82	-	34.10	7.26	32.45			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX


5570MHz_TX

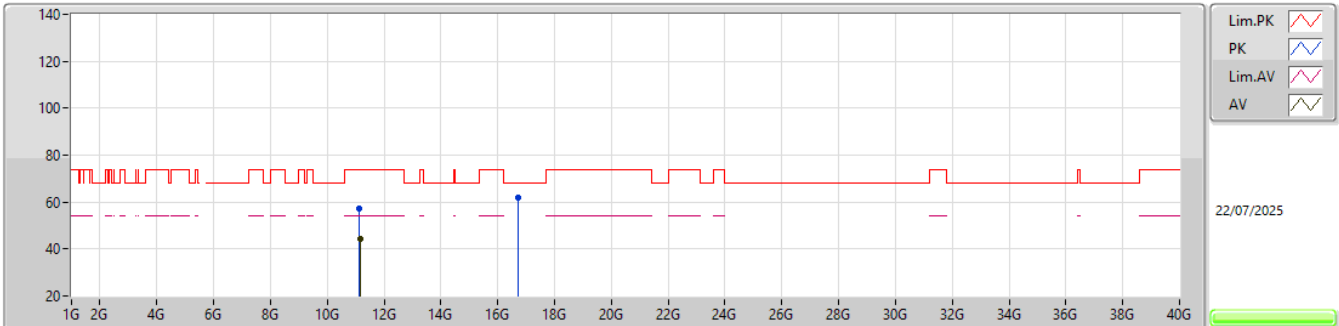EUT_Z_4TX
Setting 59
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14024G	57.13	74.00	-16.87	39.28	3	Vertical	169	1.67	-	38.84	11.48	32.47			
AV	11.14916G	44.48	54.00	-9.52	26.66	3	Vertical	169	1.67	-	38.80	11.49	32.47			
PK	16.70656G	61.87	68.20	-6.33	40.49	3	Vertical	3	1.82	-	39.83	13.85	32.30			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX

5570MHz_TX

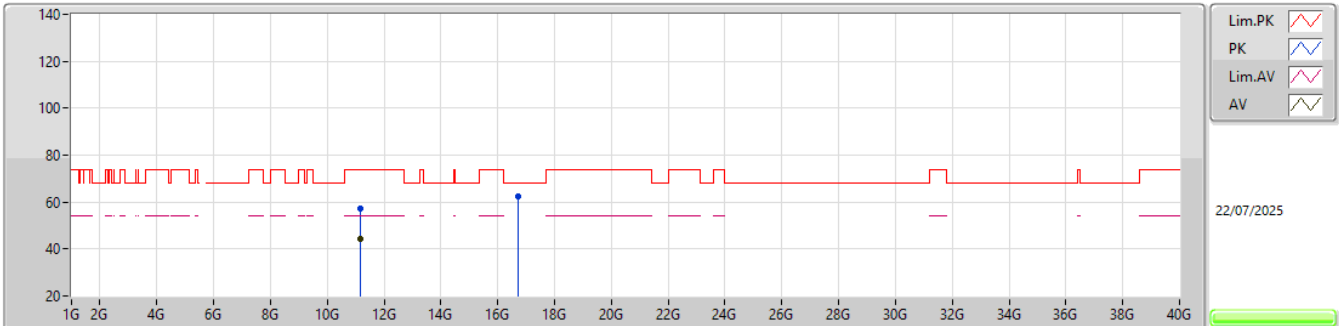


EUT_Z_4TX
Setting 59
01-S-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.14634G	57.21	74.00	-16.79	39.38	3	Horizontal	222	1.92	-	38.81	11.49	32.47			
AV	11.14928G	44.52	54.00	-9.48	26.70	3	Horizontal	222	1.92	-	38.80	11.49	32.47			
PK	16.71416G	62.64	68.20	-5.56	41.22	3	Horizontal	60	1.77	-	39.86	13.86	32.30			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5570MHz_TX

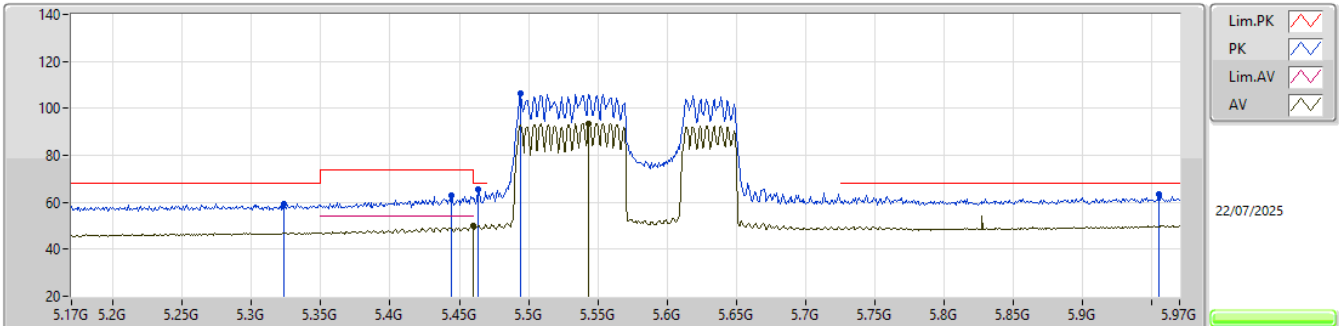EUT_Z_4TX
Setting 60
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3236G	59.23	68.20	-8.97	51.99	3	Vertical	129	2.97	-	33.05	6.69	32.50
PK	5.4444G	63.06	74.00	-10.94	55.24	3	Vertical	129	2.97	-	33.48	6.81	32.47
PK	5.4636G	65.54	68.20	-2.66	57.58	3	Vertical	129	2.97	-	33.58	6.85	32.47
AV	5.4596G	49.79	54.00	-4.21	41.86	3	Vertical	129	2.97	-	33.56	6.84	32.47
PK	5.494G	106.20	Inf	-Inf	98.00	3	Vertical	129	2.97	-	33.76	6.90	32.46
AV	5.5436G	93.69	Inf	-Inf	85.26	3	Vertical	129	2.97	-	33.89	7.00	32.46
PK	5.9548G	63.20	68.20	-5.00	53.05	3	Vertical	129	2.97	-	35.12	7.47	32.44

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5570MHz_TX

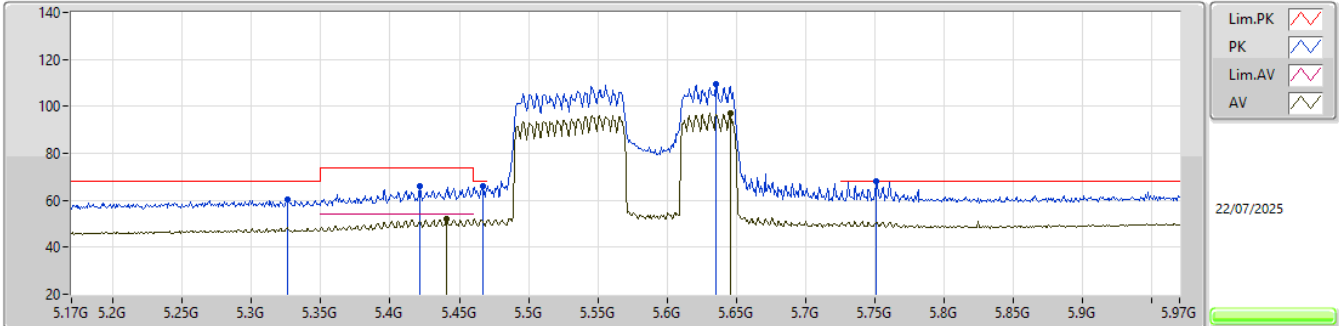


EUT_Z_4TX
Setting 60
01-S-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.326G	60.36	68.20	-7.84	53.12	3	Horizontal	141	2.83	-	33.05	6.69	32.50
PK	5.4212G	65.84	74.00	-8.16	58.17	3	Horizontal	141	2.83	-	33.38	6.77	32.48
AV	5.4404G	51.91	54.00	-2.09	44.12	3	Horizontal	141	2.83	-	33.46	6.80	32.47
PK	5.4668G	66.21	68.20	-1.99	58.23	3	Horizontal	141	2.83	-	33.60	6.85	32.47
PK	5.6356G	109.61	Inf	-Inf	100.95	3	Horizontal	141	2.83	-	33.97	7.14	32.45
AV	5.646G	97.20	Inf	-Inf	88.50	3	Horizontal	141	2.83	-	33.99	7.16	32.45
PK	5.7508G	68.11	68.20	-0.09	59.17	3	Horizontal	141	2.83	-	34.10	7.29	32.45

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5570MHz_TX

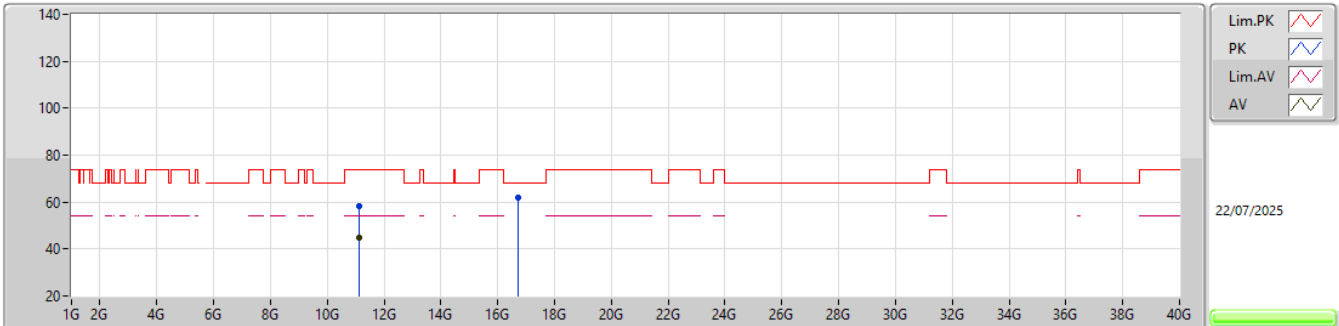EUT_Z_4TX
Setting 60
01-S-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.13954G	58.31	74.00	-15.69	40.46	3	Vertical	78	1.35	-	38.84	11.48	32.47			
AV	11.14468G	44.89	54.00	-9.11	27.05	3	Vertical	78	1.35	-	38.82	11.49	32.47			
PK	16.70194G	62.11	68.20	-6.09	40.76	3	Vertical	273	1.64	-	39.81	13.85	32.31			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5570MHz_TX

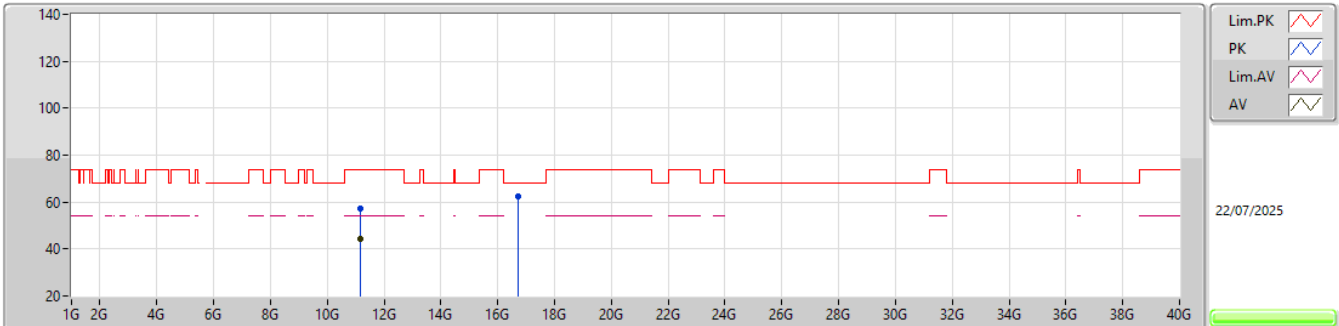EUT_Z_4TX
Setting 60
01-S-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14966G	57.11	74.00	-16.89	39.29	3	Horizontal	340	1.96	-	38.80	11.49	32.47			
AV	11.14656G	44.56	54.00	-9.44	26.73	3	Horizontal	340	1.96	-	38.81	11.49	32.47			
PK	16.70306G	62.19	68.20	-6.01	40.84	3	Horizontal	246	1.59	-	39.81	13.85	32.31			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	AV	3.284G	45.19	54.00	-8.81	Vertical

Mode 2

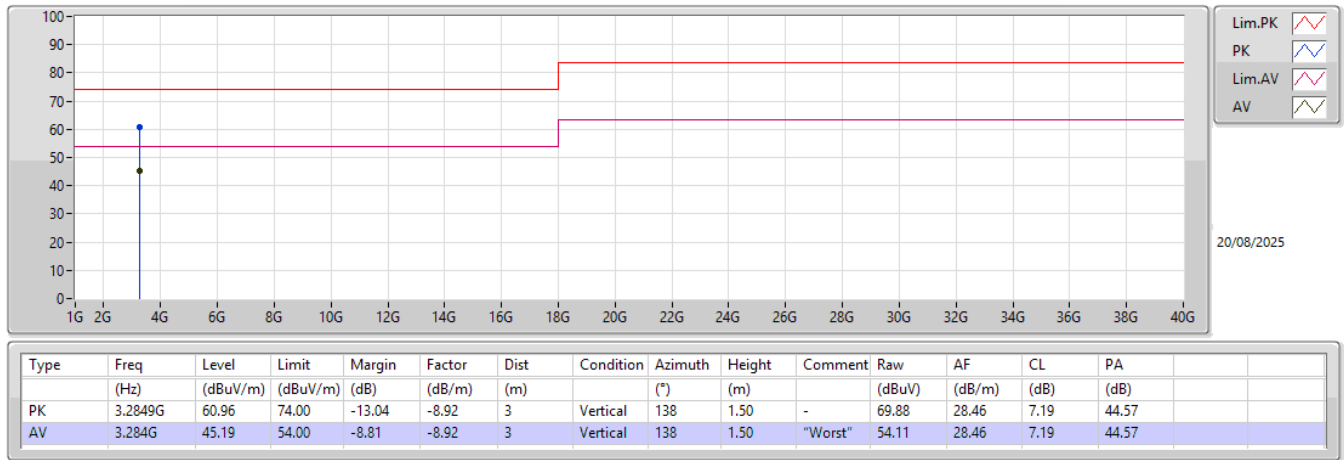

Mode 2

