


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

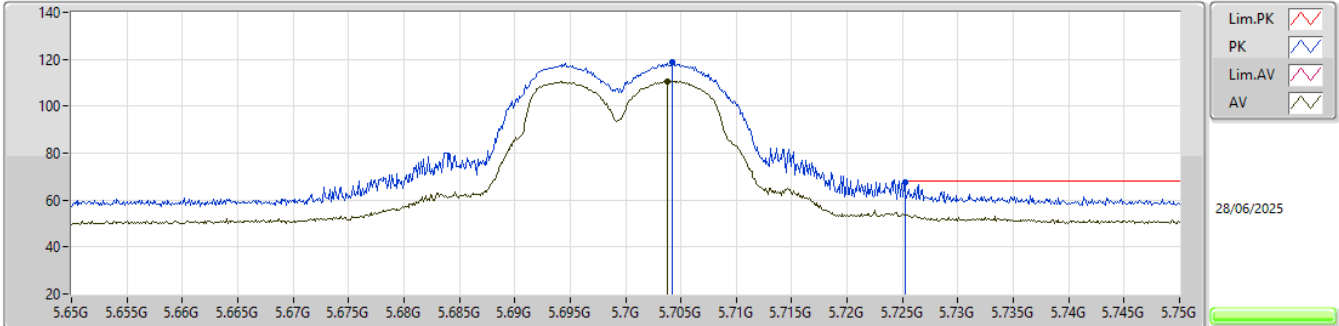


EUT_Z_4TX
Setting 61
04-I-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7042G	118.90	Inf	-Inf	121.58	3	Vertical	180	1.80	-	32.01	8.81	43.50				
AV	5.7038G	110.63	Inf	-Inf	113.31	3	Vertical	180	1.80	-	32.01	8.81	43.50				
PK	5.7252G	67.63	68.20	-0.57	70.22	3	Vertical	180	1.80	-	32.05	8.83	43.47				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

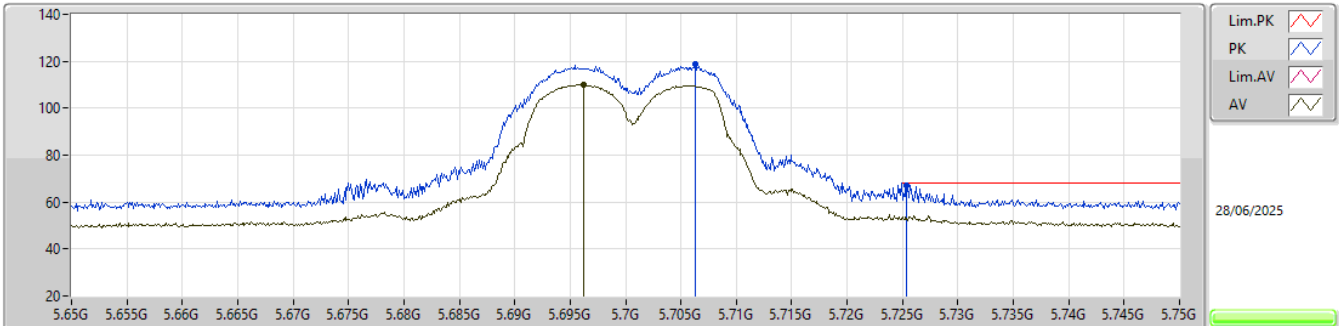


EUT_Z_4TX
Setting 61
04-I-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7063G	118.80	Inf	-Inf	121.47	3	Horizontal	188	1.80	-	32.01	8.81	43.49			
AV	5.6962G	110.16	Inf	-Inf	112.88	3	Horizontal	188	1.80	-	31.98	8.80	43.50			
PK	5.7254G	67.27	68.20	-0.93	69.86	3	Horizontal	188	1.80	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

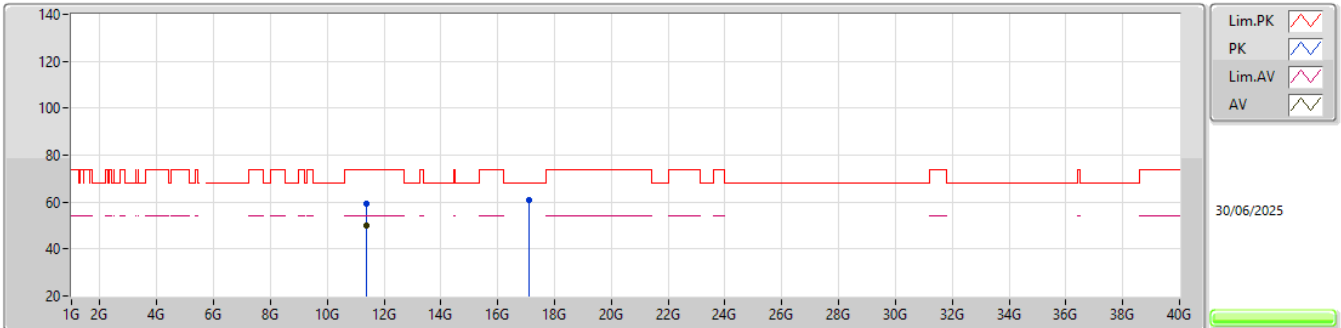


EUT_Z_4TX
Setting 61
04-H-G-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.39991G	59.49	74.00	-14.51	49.20	3	Vertical	277	1.25	-	39.90	13.16	42.77				
AV	11.39957G	50.12	54.00	-3.88	39.83	3	Vertical	277	1.25	-	39.90	13.16	42.77				
PK	17.0999G	60.81	68.20	-7.39	47.04	3	Vertical	261	2.57	-	40.00	16.32	42.55				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

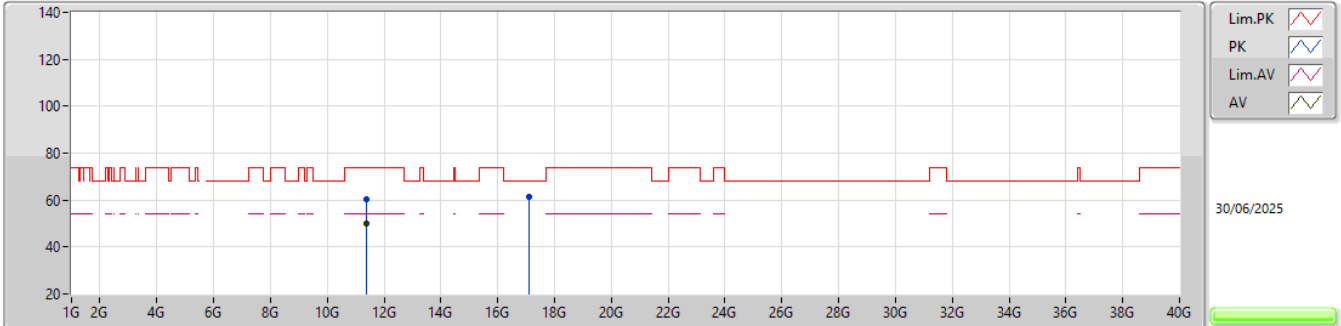


EUT_Z_4TX
Setting 61
04-H-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39904G	60.46	74.00	-13.54	50.17	3	Horizontal	100	2.05	-	39.90	13.16	42.77			
AV	11.39912G	49.92	54.00	-4.08	39.63	3	Horizontal	100	2.05	-	39.90	13.16	42.77			
PK	17.09958G	61.43	68.20	-6.77	47.66	3	Horizontal	250	1.73	-	40.00	16.32	42.55			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

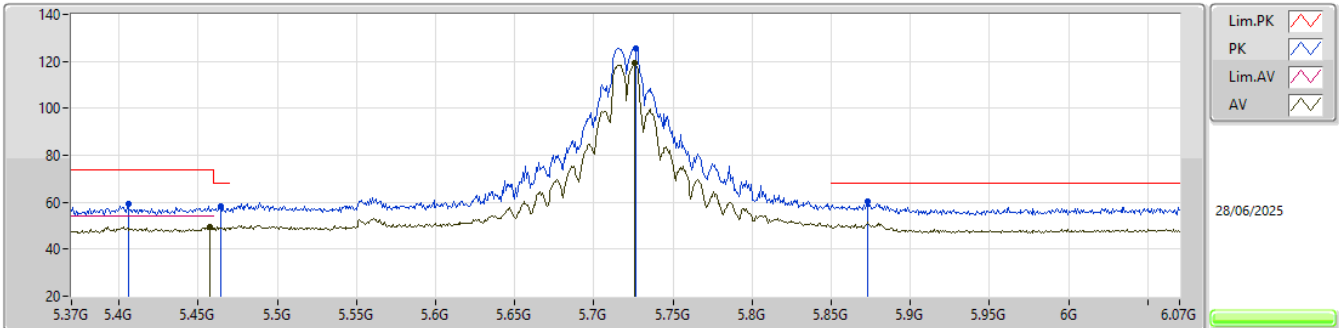EUT_Z_4TX
Setting 108
04-I-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4057G	59.43	74.00	-14.57	63.26	3	Vertical	182	1.80	-	31.42	8.50	43.75			
PK	5.4645G	58.36	68.20	-9.84	61.86	3	Vertical	182	1.80	-	31.66	8.56	43.72			
AV	5.4575G	49.71	54.00	-4.29	53.25	3	Vertical	182	1.80	-	31.63	8.55	43.72			
PK	5.7263G	125.70	Inf	-Inf	128.29	3	Vertical	182	1.80	-	32.05	8.83	43.47			
AV	5.7256G	119.16	Inf	-Inf	121.75	3	Vertical	182	1.80	-	32.05	8.83	43.47			
PK	5.8733G	60.55	68.20	-7.65	62.70	3	Vertical	182	1.80	-	32.19	8.99	43.33			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

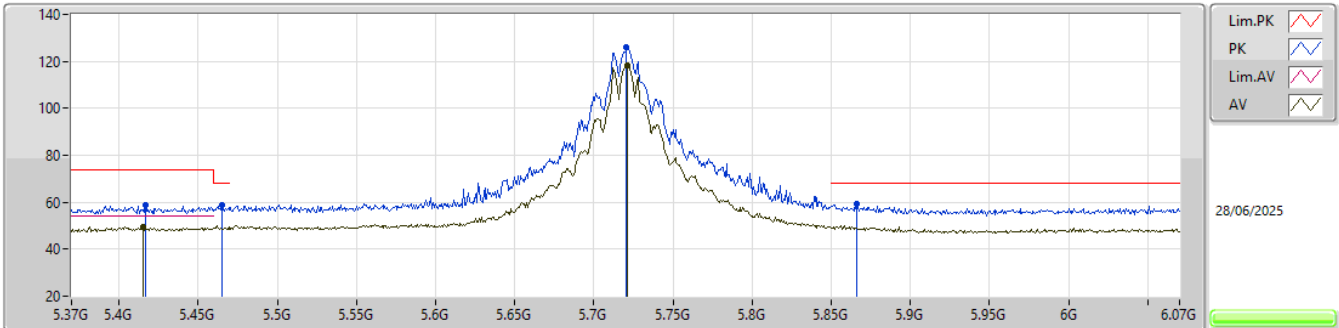EUT_Z_4TX
Setting 108
04-I-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4169G	58.62	74.00	-15.38	62.38	3	Horizontal	181	1.80	-	31.47	8.51	43.74			
AV	5.4155G	49.62	54.00	-4.38	53.39	3	Horizontal	181	1.80	-	31.46	8.51	43.74			
PK	5.4652G	58.60	68.20	-9.60	62.10	3	Horizontal	181	1.80	-	31.66	8.56	43.72			
PK	5.7207G	125.85	Inf	-Inf	128.46	3	Horizontal	181	1.80	-	32.04	8.83	43.48			
AV	5.7214G	118.48	Inf	-Inf	121.09	3	Horizontal	181	1.80	-	32.04	8.83	43.48			
PK	5.8663G	59.33	68.20	-8.87	61.50	3	Horizontal	181	1.80	-	32.17	8.99	43.33			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

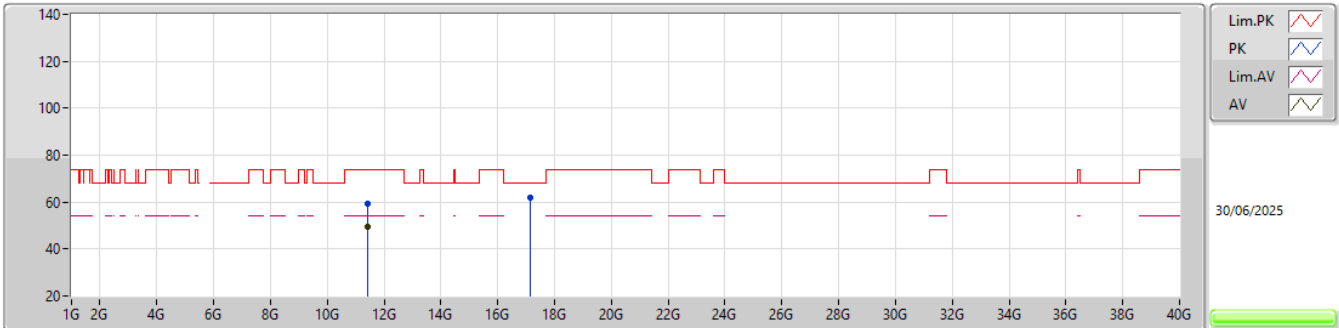


EUT_Z_4TX
Setting 108
04-H-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44051G	59.44	74.00	-14.56	49.11	3	Vertical	189	2.21	-	39.90	13.19	42.76			
AV	11.4392G	49.36	54.00	-4.64	39.03	3	Vertical	189	2.21	-	39.90	13.19	42.76			
PK	17.16025G	61.64	68.20	-6.56	47.51	3	Vertical	126	2.04	-	40.44	16.33	42.64			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

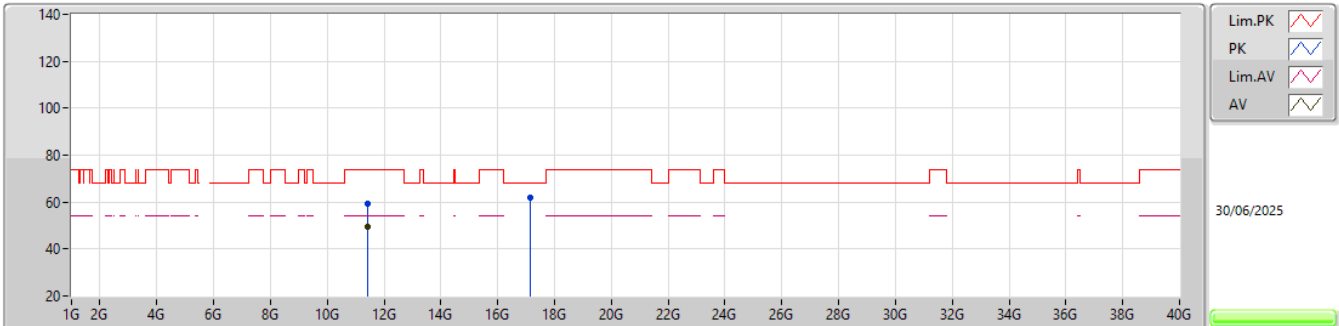


EUT_Z_4TX
Setting 108
04-H-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.43972G	59.14	74.00	-14.86	48.81	3	Horizontal	245	2.24	-	39.90	13.19	42.76				
AV	11.43959G	49.35	54.00	-4.65	39.02	3	Horizontal	245	2.24	-	39.90	13.19	42.76				
PK	17.15947G	62.12	68.20	-6.08	47.99	3	Horizontal	93	1.11	-	40.44	16.33	42.64				

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5500MHz_TX

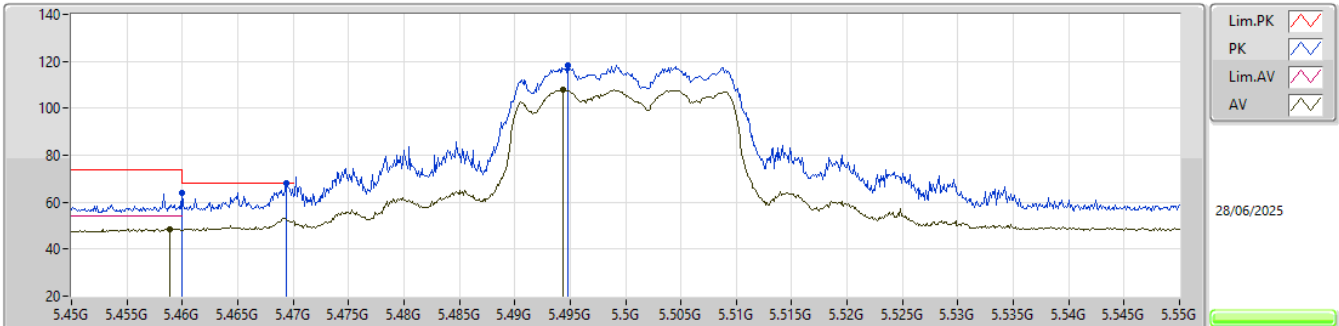EUT_Z_4TX
Setting 61
04-I-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.46G	63.82	74.00	-10.18	67.35	3	Vertical	185	1.80	-	31.64	8.55	43.72			
AV	5.4589G	48.66	54.00	-5.34	52.19	3	Vertical	185	1.80	-	31.64	8.55	43.72			
PK	5.4694G	67.88	68.20	-0.32	71.36	3	Vertical	185	1.80	-	31.68	8.56	43.72			
PK	5.4948G	118.44	Inf	-Inf	121.77	3	Vertical	185	1.80	-	31.78	8.59	43.70			
AV	5.4944G	107.73	Inf	-Inf	111.06	3	Vertical	185	1.80	-	31.78	8.59	43.70			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5500MHz_TX

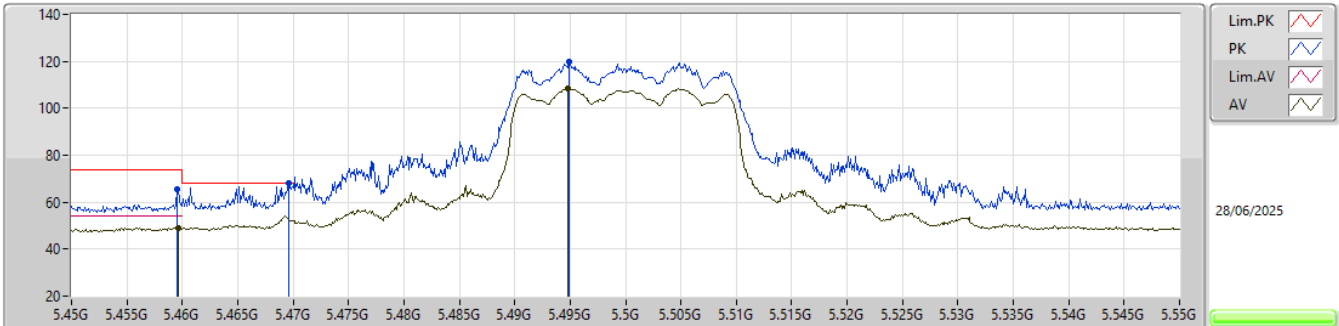EUT_Z_4TX
Setting 61
04-I-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4595G	65.77	74.00	-8.23	69.30	3	Horizontal	180	1.80	-	31.64	8.55	43.72			
AV	5.4596G	49.16	54.00	-4.84	52.69	3	Horizontal	180	1.80	-	31.64	8.55	43.72			
PK	5.4696G	68.02	68.20	-0.18	71.50	3	Horizontal	180	1.80	-	31.68	8.56	43.72			
PK	5.4949G	119.63	Inf	-Inf	122.96	3	Horizontal	180	1.80	-	31.78	8.59	43.70			
AV	5.4948G	108.28	Inf	-Inf	111.61	3	Horizontal	180	1.80	-	31.78	8.59	43.70			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5500MHz_TX

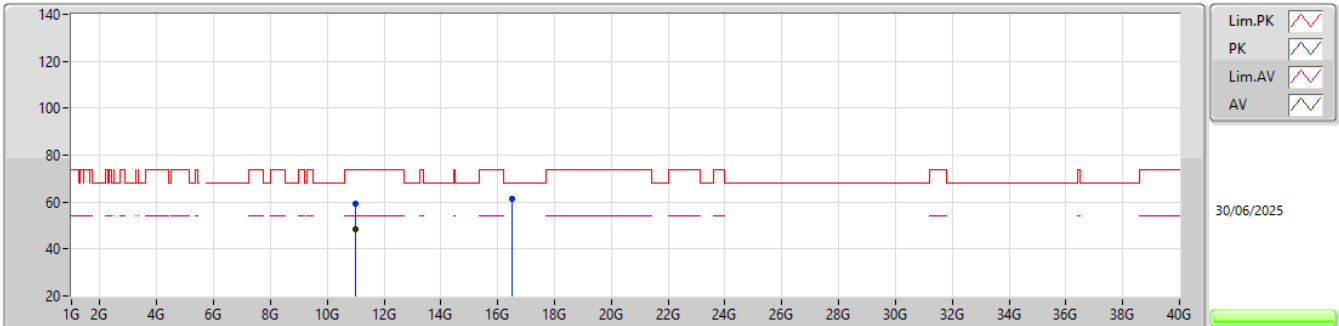EUT_Z_4TX
Setting 61
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00035G	59.50	74.00	-14.50	49.53	3	Vertical	259	2.33	-	40.00	12.88	42.91			
AV	11.00081G	48.42	54.00	-5.58	38.45	3	Vertical	259	2.33	-	40.00	12.88	42.91			
PK	16.50013G	61.46	68.20	-6.74	48.23	3	Vertical	62	1.11	-	39.10	16.26	42.13			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

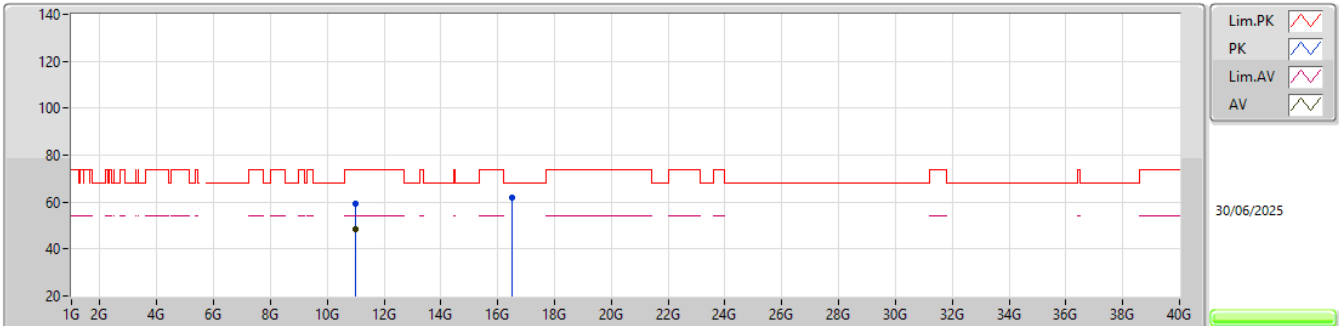


EUT_Z_4TX
Setting 61
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00015G	59.26	74.00	-14.74	49.29	3	Horizontal	265	1.62	-	40.00	12.88	42.91			
AV	10.99948G	48.43	54.00	-5.57	38.47	3	Horizontal	265	1.62	-	40.00	12.87	42.91			
PK	16.49986G	61.74	68.20	-6.46	48.52	3	Horizontal	233	1.21	-	39.10	16.25	42.13			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

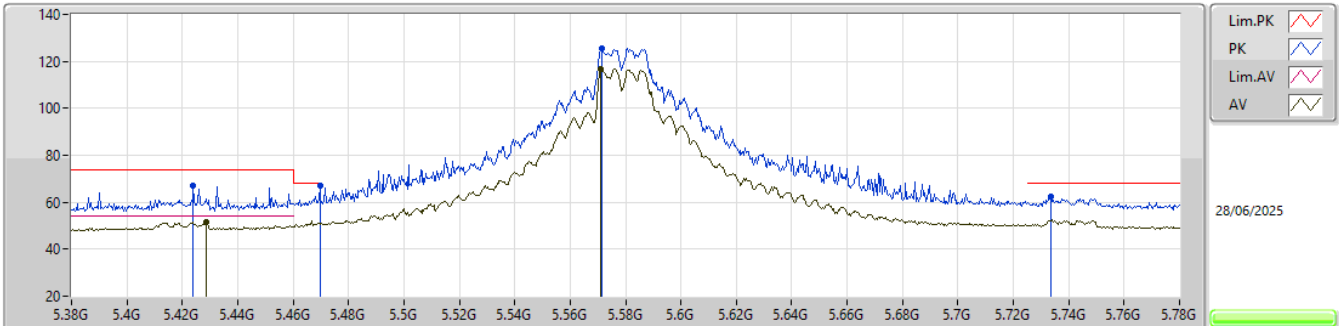


EUT_Z_4TX
Setting 102
04-I-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.424G	67.27	74.00	-6.73	70.99	3	Vertical	177	1.80	-	31.50	8.52	43.74			
AV	5.4288G	51.51	54.00	-2.49	55.21	3	Vertical	177	1.80	-	31.52	8.52	43.74			
PK	5.4696G	67.05	68.20	-1.15	70.53	3	Vertical	177	1.80	-	31.68	8.56	43.72			
PK	5.5716G	125.39	Inf	-Inf	128.69	3	Vertical	177	1.80	-	31.66	8.67	43.63			
AV	5.5712G	116.88	Inf	-Inf	120.18	3	Vertical	177	1.80	-	31.66	8.67	43.63			
PK	5.7336G	62.62	68.20	-5.58	65.18	3	Vertical	177	1.80	-	32.07	8.84	43.47			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5580MHz_TX

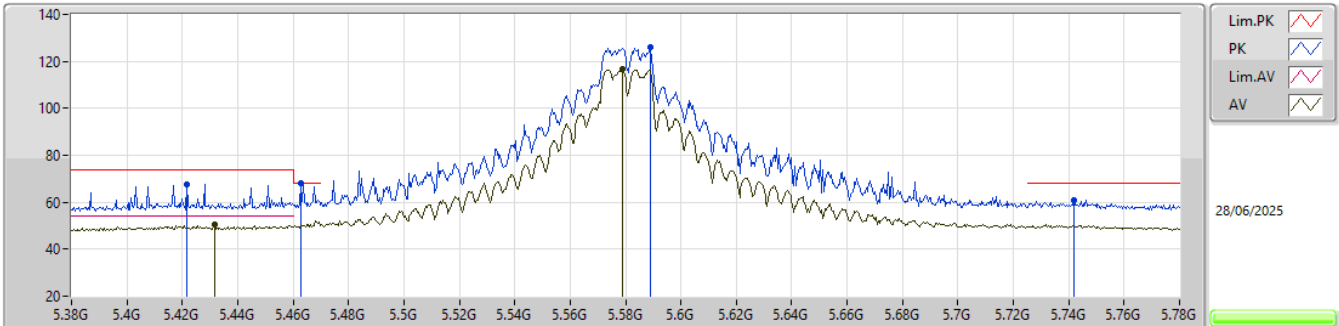EUT_Z_4TX
Setting 102
04-I-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4216G	67.58	74.00	-6.42	71.32	3	Horizontal	190	1.80	-	31.49	8.51	43.74			
AV	5.4316G	50.58	54.00	-3.42	54.26	3	Horizontal	190	1.80	-	31.53	8.52	43.73			
PK	5.4628G	68.05	68.20	-0.15	71.56	3	Horizontal	190	1.80	-	31.65	8.56	43.72			
PK	5.5888G	125.87	Inf	-Inf	129.17	3	Horizontal	190	1.80	-	31.62	8.69	43.61			
AV	5.5788G	116.48	Inf	-Inf	119.78	3	Horizontal	190	1.80	-	31.64	8.68	43.62			
PK	5.742G	61.10	68.20	-7.10	63.63	3	Horizontal	190	1.80	-	32.08	8.85	43.46			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5580MHz_TX

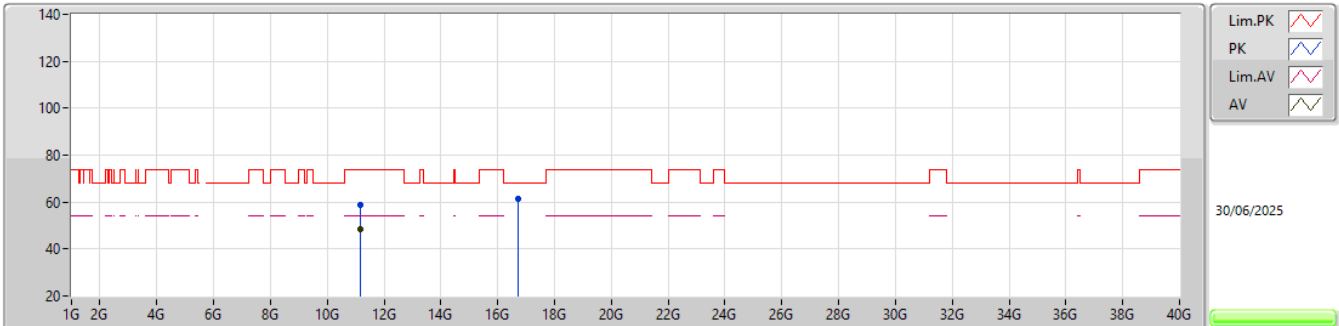EUT_Z_4TX
Setting 102
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15965G	58.70	74.00	-15.30	49.09	3	Vertical	88	2.77	-	39.48	12.99	42.86			
AV	11.1599G	48.38	54.00	-5.62	38.77	3	Vertical	88	2.77	-	39.48	12.99	42.86			
PK	16.74084G	61.62	68.20	-6.58	48.15	3	Vertical	22	2.99	-	39.45	16.28	42.26			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

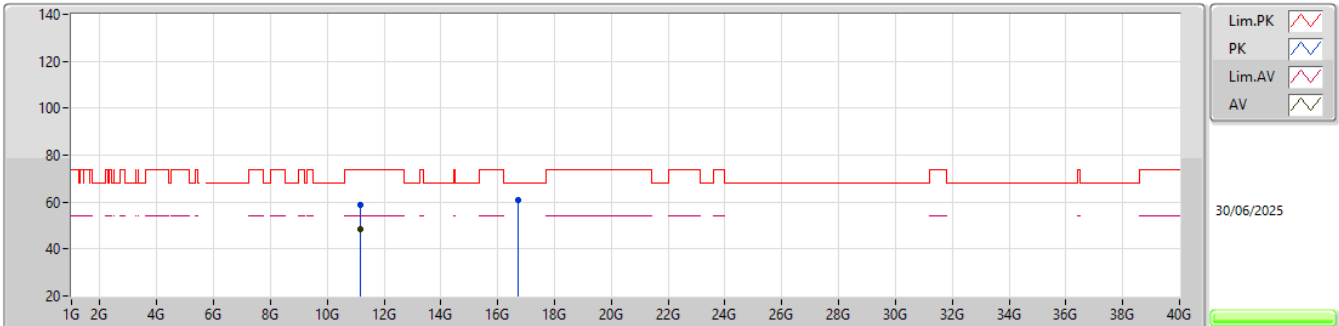


EUT_Z_4TX
Setting 102
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15909G	58.95	74.00	-15.05	49.34	3	Horizontal	351	1.81	-	39.48	12.99	42.86			
AV	11.15909G	48.29	54.00	-5.71	38.68	3	Horizontal	351	1.81	-	39.48	12.99	42.86			
PK	16.73965G	60.98	68.20	-7.22	47.51	3	Horizontal	142	2.82	-	39.44	16.28	42.25			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

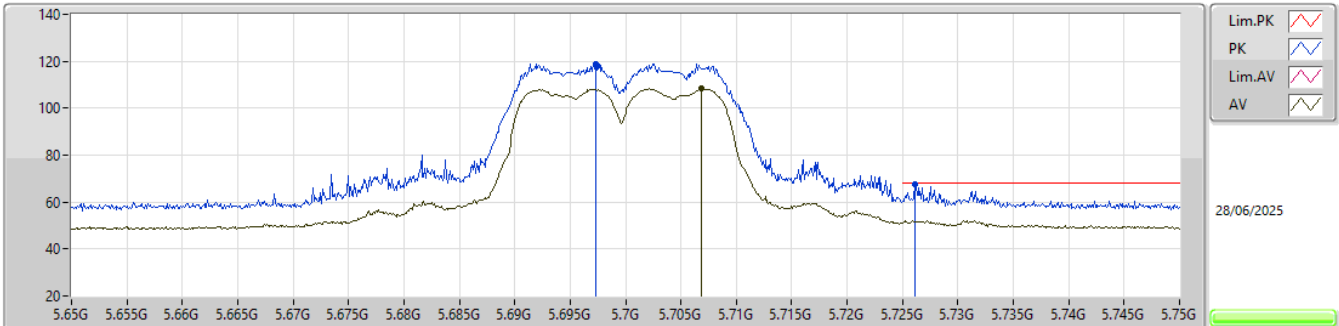


EUT_Z_4TX
Setting 57
04-I-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6973G	119.02	Inf	-Inf	121.73	3	Vertical	180	1.80	-	31.99	8.80	43.50				
AV	5.7069G	108.27	Inf	-Inf	110.94	3	Vertical	180	1.80	-	32.01	8.81	43.49				
PK	5.7261G	67.40	68.20	-0.80	69.99	3	Vertical	180	1.80	-	32.05	8.83	43.47				

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

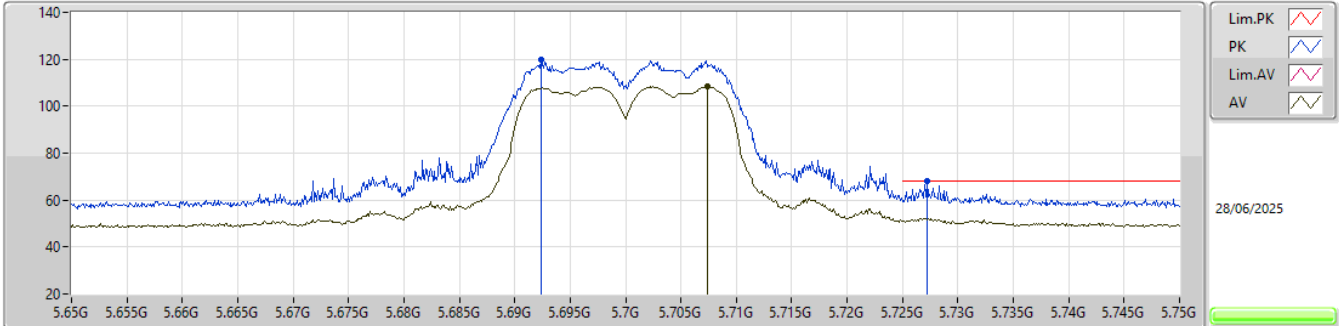


EUT_Z_4TX
Setting 57
04-I-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6924G	119.65	Inf	-Inf	122.39	3	Horizontal	187	1.80	-	31.97	8.80	43.51			
AV	5.7074G	108.43	Inf	-Inf	111.10	3	Horizontal	187	1.80	-	32.01	8.81	43.49			
PK	5.7272G	68.15	68.20	-0.05	70.74	3	Horizontal	187	1.80	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5700MHz_TX

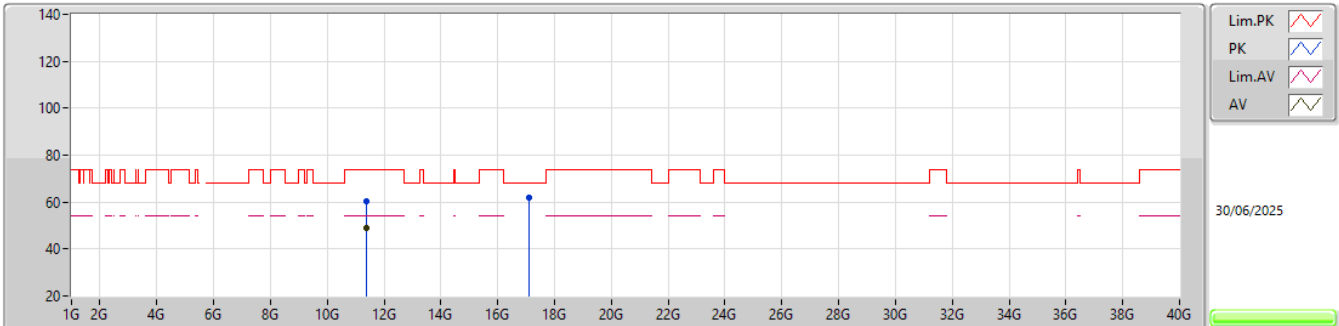EUT_Z_4TX
Setting 57
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40026G	60.18	74.00	-13.82	49.89	3	Vertical	283	1.48	-	39.90	13.16	42.77			
AV	11.40086G	48.77	54.00	-5.23	38.48	3	Vertical	283	1.48	-	39.90	13.16	42.77			
PK	17.09957G	61.71	68.20	-6.49	47.94	3	Vertical	308	1.76	-	40.00	16.32	42.55			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

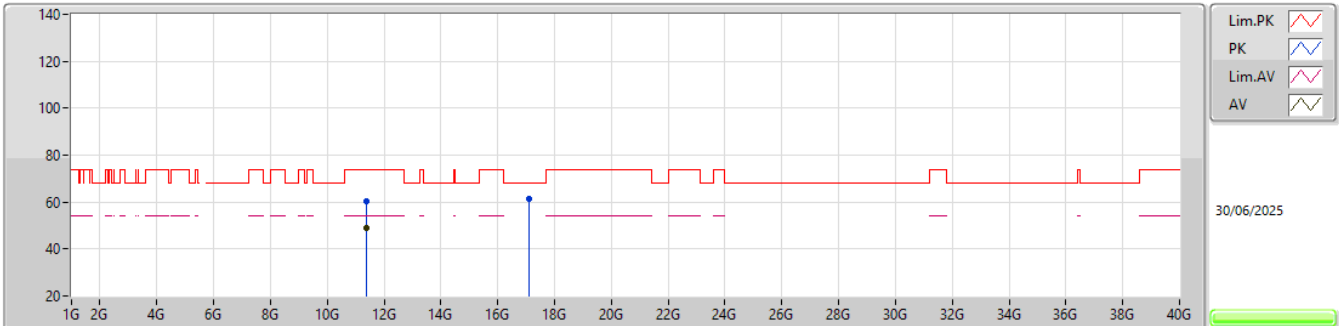


EUT_Z_4TX
Setting 57
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.3992G	60.19	74.00	-13.81	49.90	3	Horizontal	71	2.56	-	39.90	13.16	42.77				
AV	11.40042G	48.74	54.00	-5.26	38.45	3	Horizontal	71	2.56	-	39.90	13.16	42.77				
PK	17.09932G	61.26	68.20	-6.94	47.49	3	Horizontal	41	1.05	-	40.00	16.32	42.55				

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

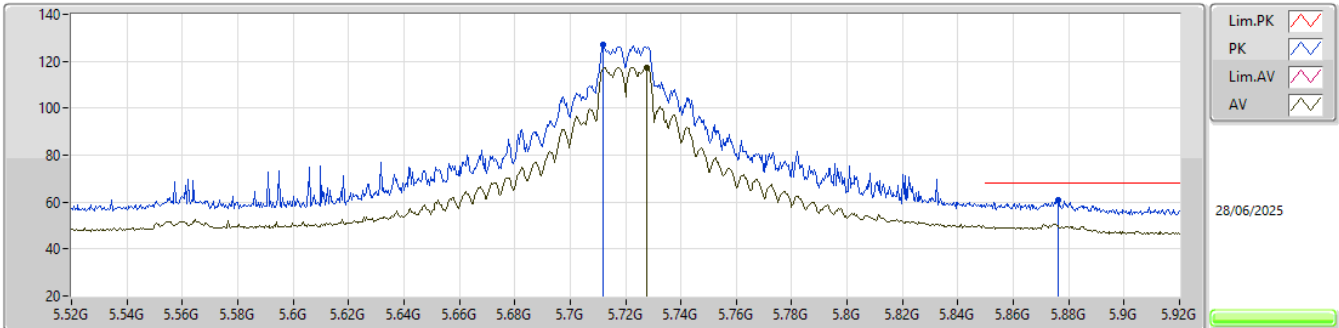


EUT_Z_4TX
Setting 103
04-I-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.712G	126.99	Inf	-Inf	129.64	3	Vertical	181	1.80	-	32.02	8.82	43.49			
AV	5.7276G	117.38	Inf	-Inf	119.96	3	Vertical	181	1.80	-	32.06	8.83	43.47			
PK	5.8764G	60.68	68.20	-7.52	62.79	3	Vertical	181	1.80	-	32.21	9.00	43.32			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

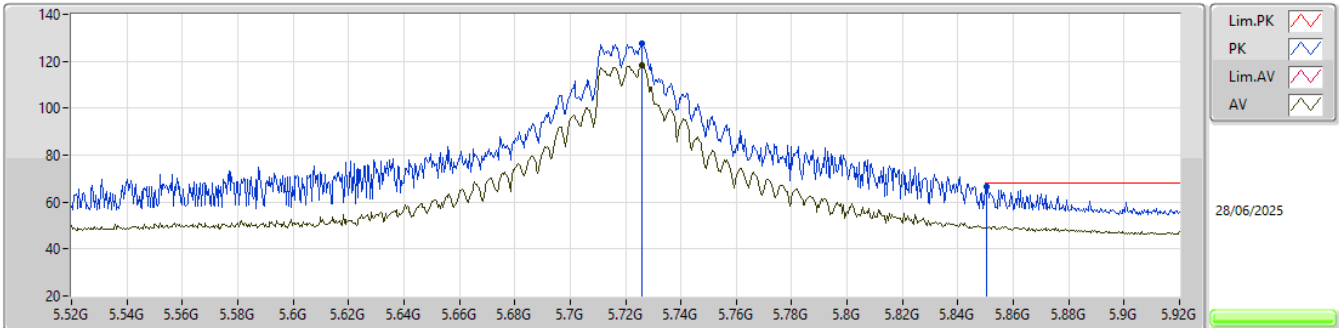


EUT_Z_4TX
Setting 103
04-I-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.726G	127.72	Inf	-Inf	130.31	3	Horizontal	183	1.80	-	32.05	8.83	43.47			
AV	5.726G	118.05	Inf	-Inf	120.64	3	Horizontal	183	1.80	-	32.05	8.83	43.47			
PK	5.8504G	66.75	68.20	-1.45	69.03	3	Horizontal	183	1.80	-	32.10	8.97	43.35			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

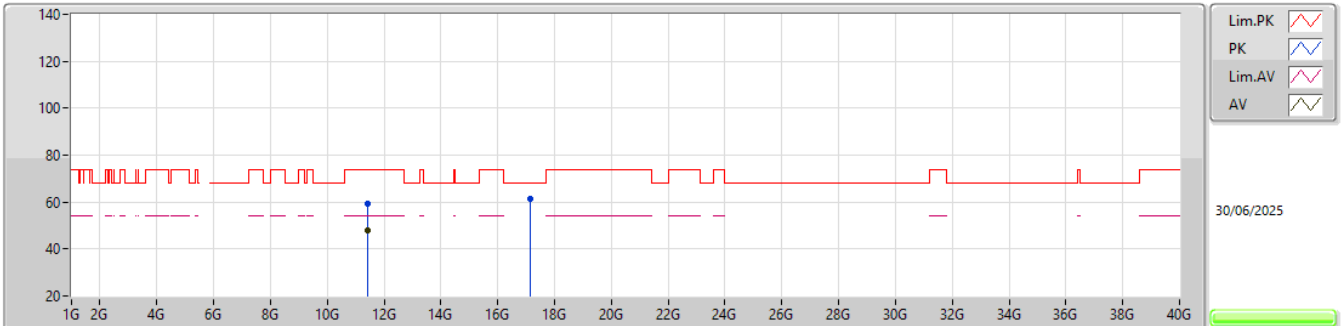


EUT_Z_4TX
Setting 103
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4395G	59.17	74.00	-14.83	48.84	3	Vertical	166	1.65	-	39.90	13.19	42.76			
AV	11.4395G	48.08	54.00	-5.92	37.75	3	Vertical	166	1.65	-	39.90	13.19	42.76			
PK	17.16052G	61.39	68.20	-6.81	47.26	3	Vertical	244	2.32	-	40.44	16.33	42.64			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

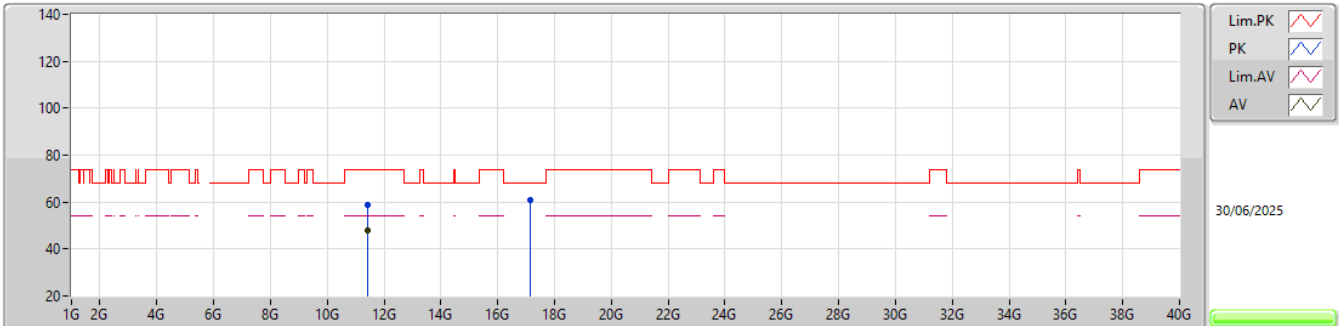


EUT_Z_4TX
Setting 103
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.44054G	58.91	74.00	-15.09	48.58	3	Horizontal	48	2.44	-	39.90	13.19	42.76				
AV	11.4392G	47.95	54.00	-6.05	37.62	3	Horizontal	48	2.44	-	39.90	13.19	42.76				
PK	17.15952G	61.01	68.20	-7.19	46.88	3	Horizontal	242	1.01	-	40.44	16.33	42.64				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

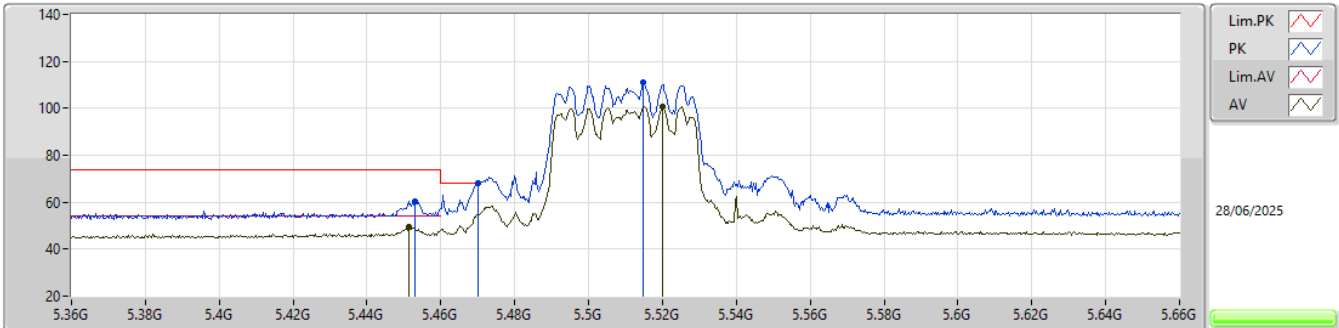


EUT_Z_4TX
Setting 60
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.453G	60.33	74.00	-13.67	63.89	3	Vertical	349	2.45	-	31.61	8.55	43.72			
AV	5.4515G	49.67	54.00	-4.33	53.24	3	Vertical	349	2.45	-	31.61	8.54	43.72			
PK	5.47G	68.16	68.20	-0.04	71.64	3	Vertical	349	2.45	-	31.68	8.56	43.72			
PK	5.5148G	110.99	Inf	-Inf	114.30	3	Vertical	349	2.45	-	31.77	8.61	43.69			
AV	5.5199G	100.70	Inf	-Inf	104.00	3	Vertical	349	2.45	-	31.76	8.62	43.68			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5510MHz_TX

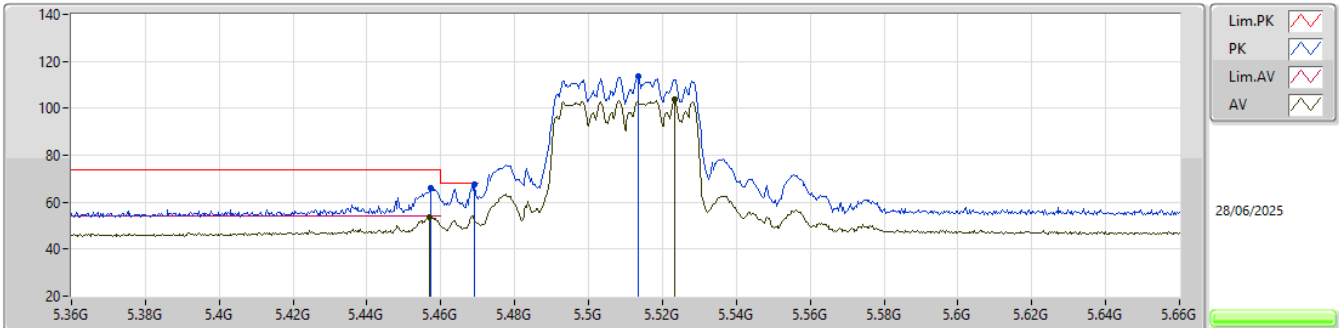EUT_Z_4TX
Setting 60
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4572G	65.86	74.00	-8.14	69.40	3	Horizontal	334.3	3.00	-	31.63	8.55	43.72			
AV	5.4569G	53.81	54.00	-0.19	57.35	3	Horizontal	334.3	3.00	-	31.63	8.55	43.72			
PK	5.4692G	67.64	68.20	-0.56	71.12	3	Horizontal	334.3	3.00	-	31.68	8.56	43.72			
PK	5.5136G	113.39	Inf	-Inf	116.70	3	Horizontal	334.3	3.00	-	31.77	8.61	43.69			
AV	5.5232G	103.59	Inf	-Inf	106.90	3	Horizontal	334.3	3.00	-	31.75	8.62	43.68			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

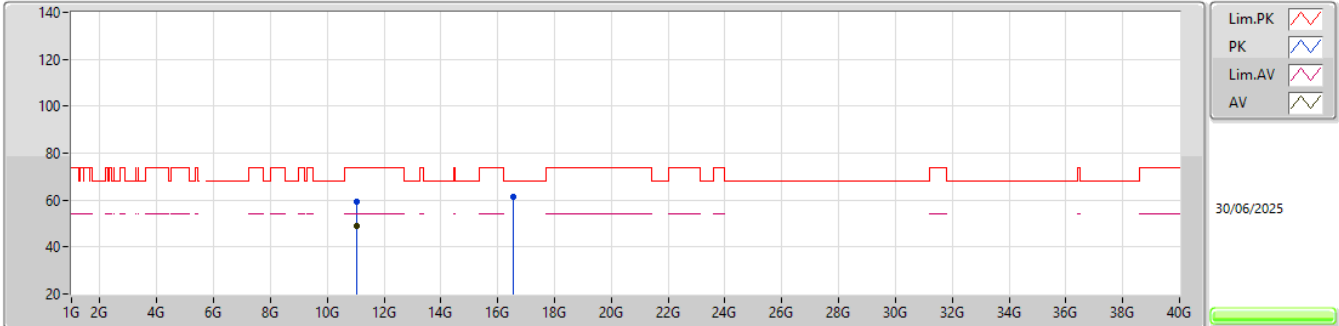


EUT_Z_4TX
Setting 60
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.02088G	59.40	74.00	-14.60	49.45	3	Vertical	292	1.31	-	39.96	12.89	42.90				
AV	11.02026G	48.76	54.00	-5.24	38.81	3	Vertical	292	1.31	-	39.96	12.89	42.90				
PK	16.52941G	61.42	68.20	-6.78	48.27	3	Vertical	294	2.68	-	39.04	16.26	42.15				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

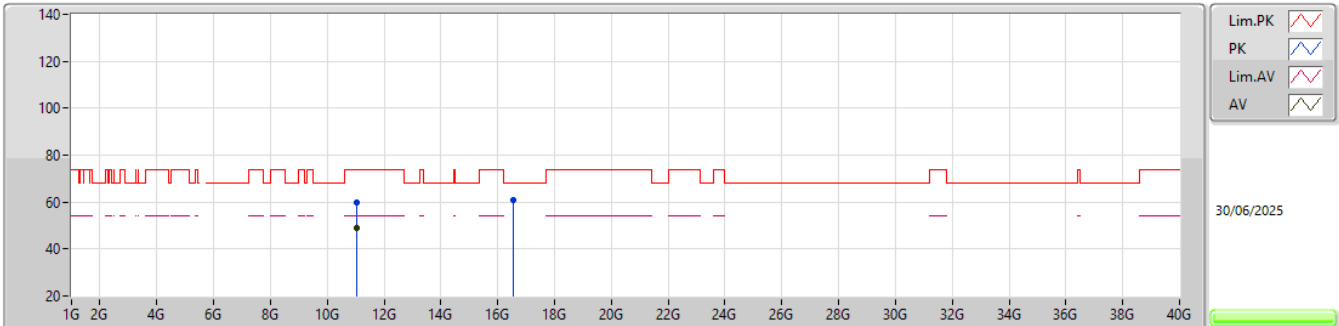


EUT_Z_4TX
Setting 60
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.02084G	59.58	74.00	-14.42	49.63	3	Horizontal	78	1.46	-	39.96	12.89	42.90			
AV	11.02089G	48.85	54.00	-5.15	38.90	3	Horizontal	78	1.46	-	39.96	12.89	42.90			
PK	16.53072G	61.09	68.20	-7.11	47.94	3	Horizontal	77	2.67	-	39.04	16.26	42.15			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

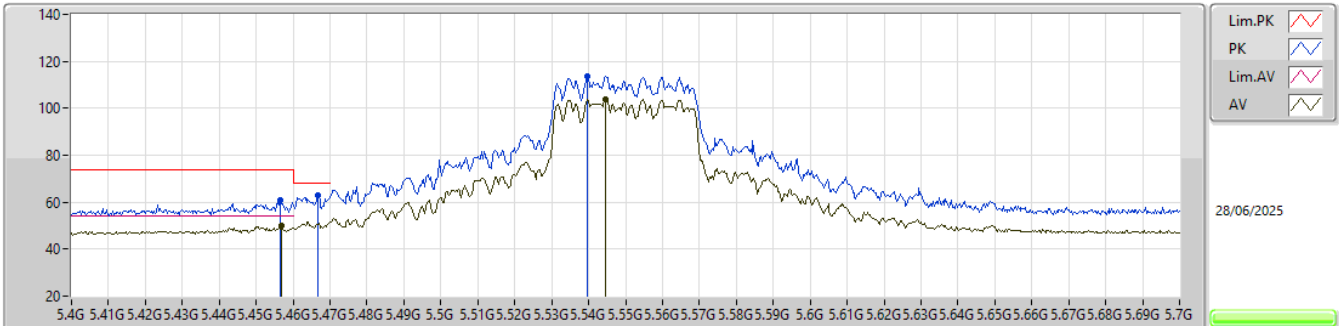


EUT_Z_4TX
Setting 80
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4564G	61.02	74.00	-12.98	64.56	3	Vertical	358	3.00	-	31.63	8.55	43.72			
AV	5.4567G	49.96	54.00	-4.04	53.50	3	Vertical	358	3.00	-	31.63	8.55	43.72			
PK	5.4666G	62.79	68.20	-5.41	66.28	3	Vertical	358	3.00	-	31.67	8.56	43.72			
PK	5.5398G	113.85	Inf	-Inf	117.15	3	Vertical	358	3.00	-	31.72	8.64	43.66			
AV	5.5446G	104.02	Inf	-Inf	107.33	3	Vertical	358	3.00	-	31.71	8.64	43.66			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

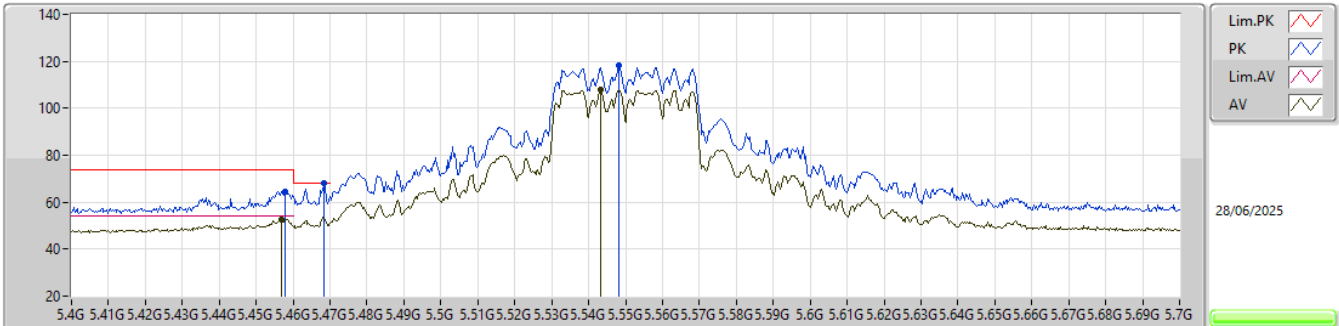


EUT_Z_4TX
Setting 80
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4579G	64.70	74.00	-9.30	68.24	3	Horizontal	334	3.00	-	31.63	8.55	43.72			
AV	5.4567G	52.83	54.00	-1.17	56.37	3	Horizontal	334	3.00	-	31.63	8.55	43.72			
PK	5.4684G	67.98	68.20	-0.22	71.47	3	Horizontal	334	3.00	-	31.67	8.56	43.72			
PK	5.5482G	118.30	Inf	-Inf	121.60	3	Horizontal	334	3.00	-	31.70	8.65	43.65			
AV	5.5431G	107.69	Inf	-Inf	111.00	3	Horizontal	334	3.00	-	31.71	8.64	43.66			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5550MHz_TX

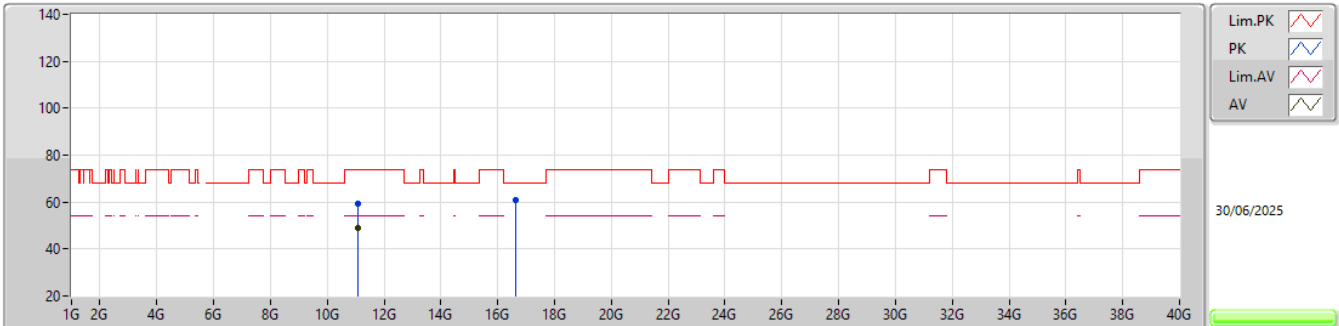EUT_Z_4TX
Setting 80
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.09924G	59.47	74.00	-14.53	49.70	3	Vertical	206	1.95	-	39.70	12.95	42.88			
AV	11.10054G	48.94	54.00	-5.06	39.17	3	Vertical	206	1.95	-	39.70	12.95	42.88			
PK	16.65052G	60.82	68.20	-7.38	47.66	3	Vertical	206	2.69	-	39.10	16.27	42.21			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5550MHz_TX

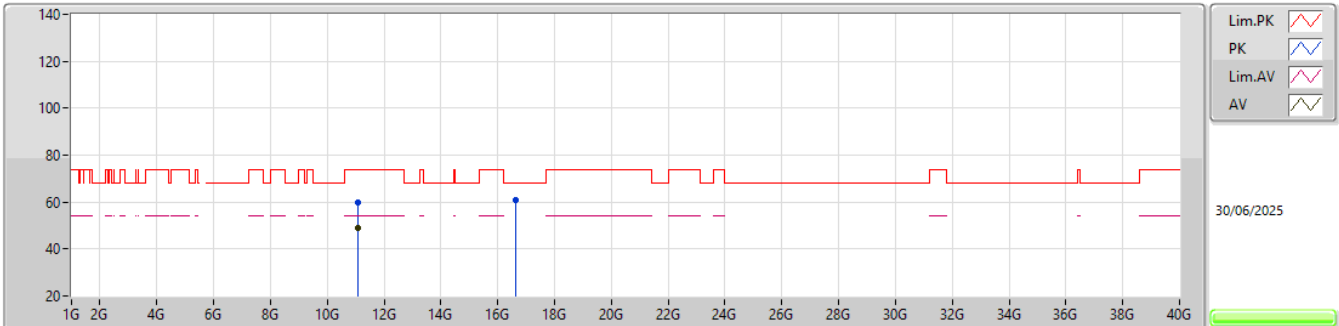EUT_Z_4TX
Setting 80
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10075G	59.91	74.00	-14.09	50.14	3	Horizontal	319	1.52	-	39.70	12.95	42.88			
AV	11.09927G	49.02	54.00	-4.98	39.25	3	Horizontal	319	1.52	-	39.70	12.95	42.88			
PK	16.6501G	60.71	68.20	-7.49	47.55	3	Horizontal	43	1.86	-	39.10	16.27	42.21			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

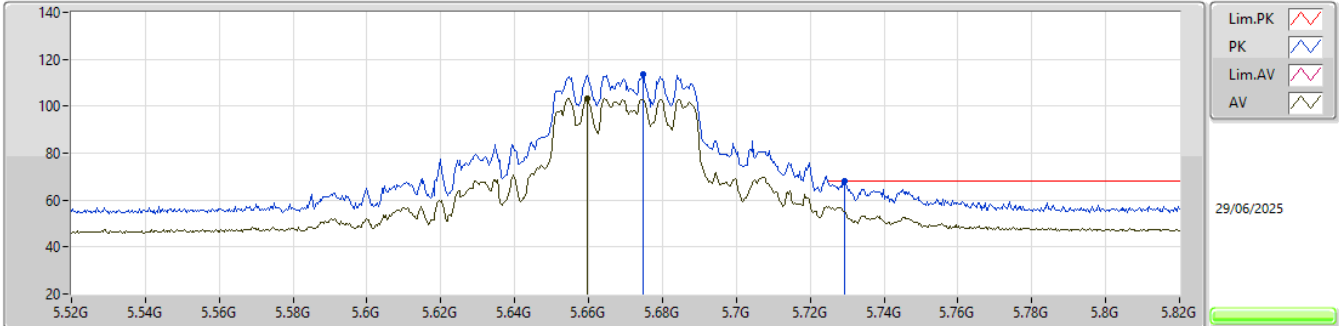


EUT_Z_4TX
Setting 77
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.6748G	113.61	Inf	-Inf	116.46	3	Vertical	335	2.82	-	31.90	8.78	43.53				
AV	5.6595G	103.50	Inf	-Inf	106.44	3	Vertical	335	2.82	-	31.84	8.76	43.54				
PK	5.7294G	67.90	68.20	-0.30	70.47	3	Vertical	335	2.82	-	32.06	8.84	43.47				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

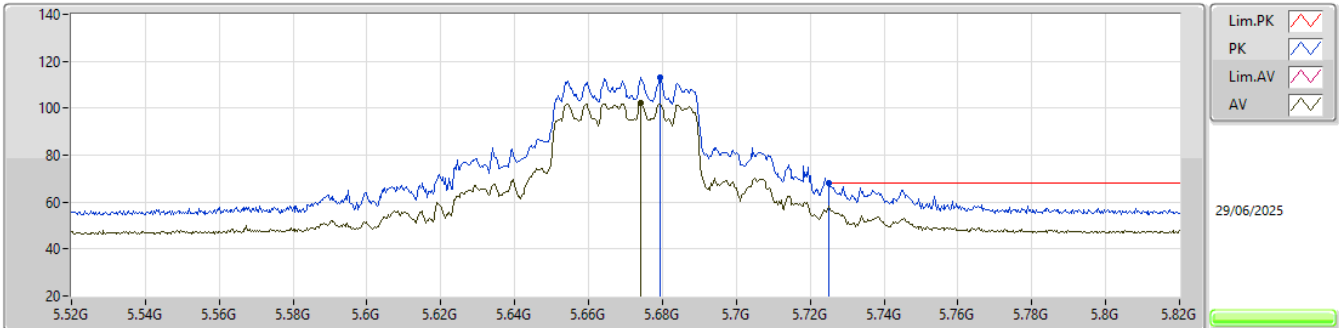


EUT_Z_4TX
Setting 77
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6793G	113.26	Inf	-Inf	116.08	3	Horizontal	335	2.73	-	31.92	8.78	43.52				
AV	5.6742G	102.10	Inf	-Inf	104.95	3	Horizontal	335	2.73	-	31.90	8.78	43.53				
PK	5.7252G	67.99	68.20	-0.21	70.58	3	Horizontal	335	2.73	-	32.05	8.83	43.47				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5670MHz_TX

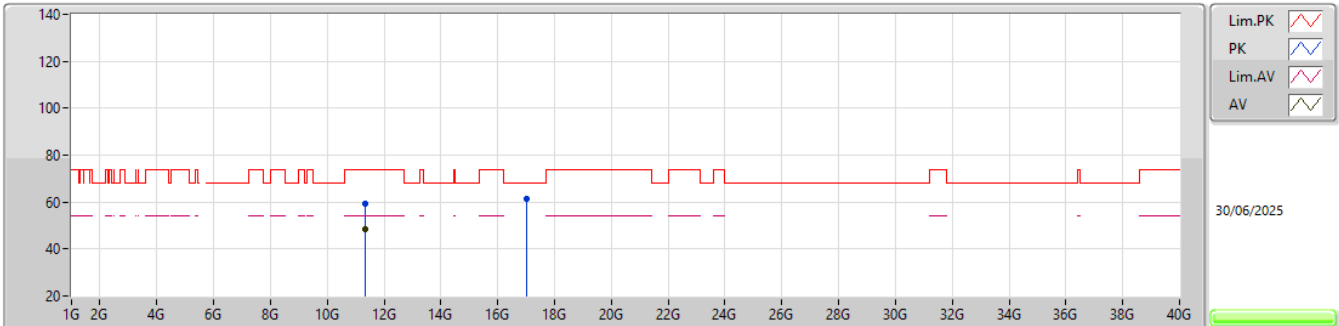EUT_Z_4TX
Setting 77
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.34012G	59.18	74.00	-14.82	49.09	3	Vertical	270	2.21	-	39.76	13.12	42.79			
AV	11.3397G	48.60	54.00	-5.40	38.51	3	Vertical	270	2.21	-	39.76	13.12	42.79			
PK	17.01038G	61.49	68.20	-6.71	47.65	3	Vertical	93	2.87	-	39.94	16.31	42.41			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

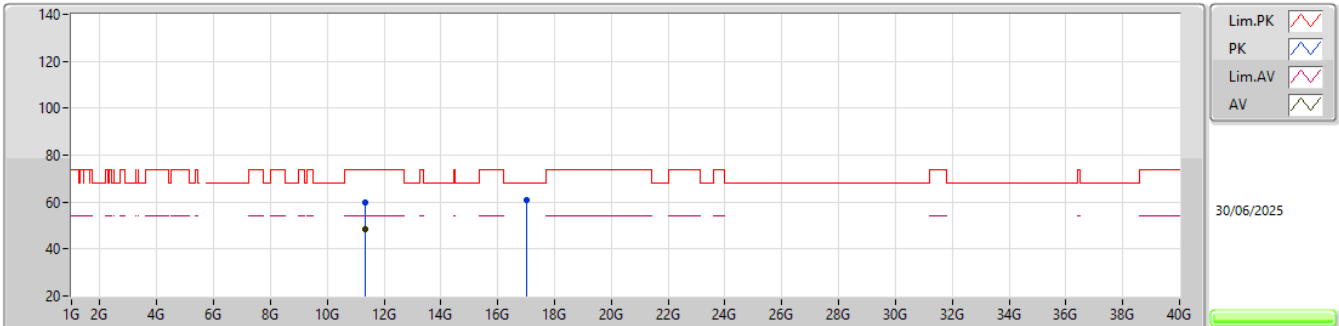


EUT_Z_4TX
Setting 77
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.34066G	59.77	74.00	-14.23	49.68	3	Horizontal	30	1.89	-	39.76	13.12	42.79			
AV	11.34027G	48.54	54.00	-5.46	38.45	3	Horizontal	30	1.89	-	39.76	13.12	42.79			
PK	17.01009G	61.00	68.20	-7.20	47.16	3	Horizontal	266	2.54	-	39.94	16.31	42.41			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

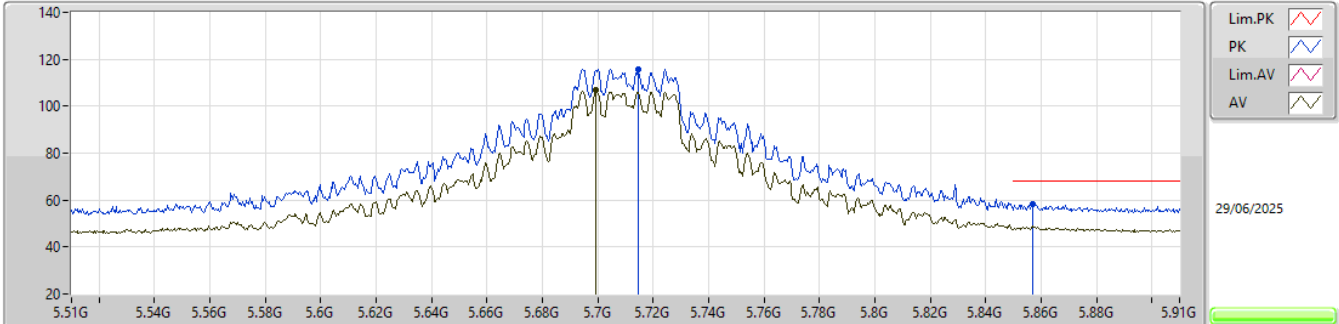


EUT_Z_4TX
Setting 108
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7148G	115.94	Inf	-Inf	118.58	3	Vertical	334	2.75	-	32.03	8.82	43.49			
AV	5.6992G	106.82	Inf	-Inf	109.52	3	Vertical	334	2.75	-	32.00	8.80	43.50			
PK	5.8572G	58.25	68.20	-9.95	60.48	3	Vertical	334	2.75	-	32.13	8.98	43.34			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

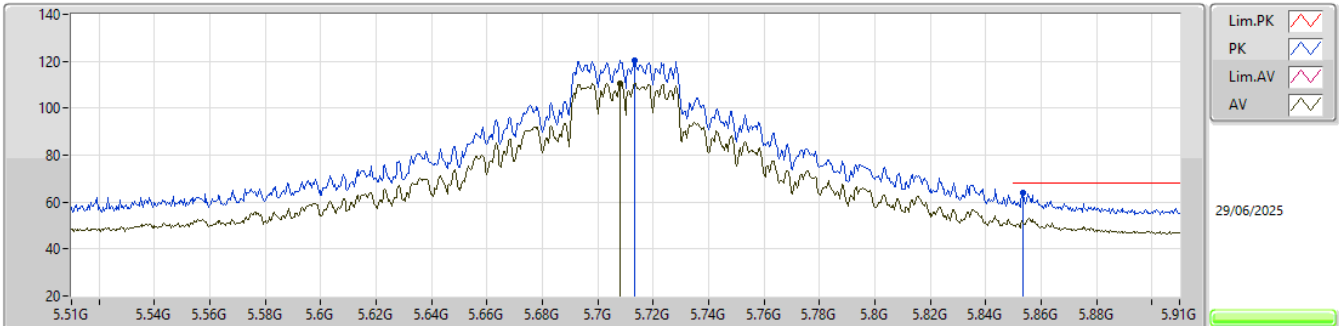


EUT_Z_4TX
Setting 108
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7132G	120.46	Inf	-Inf	123.10	3	Horizontal	332.1	2.97	-	32.03	8.82	43.49			
AV	5.708G	110.61	Inf	-Inf	113.27	3	Horizontal	332.1	2.97	-	32.02	8.81	43.49			
PK	5.8536G	63.79	68.20	-4.41	66.06	3	Horizontal	332.1	2.97	-	32.11	8.97	43.35			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

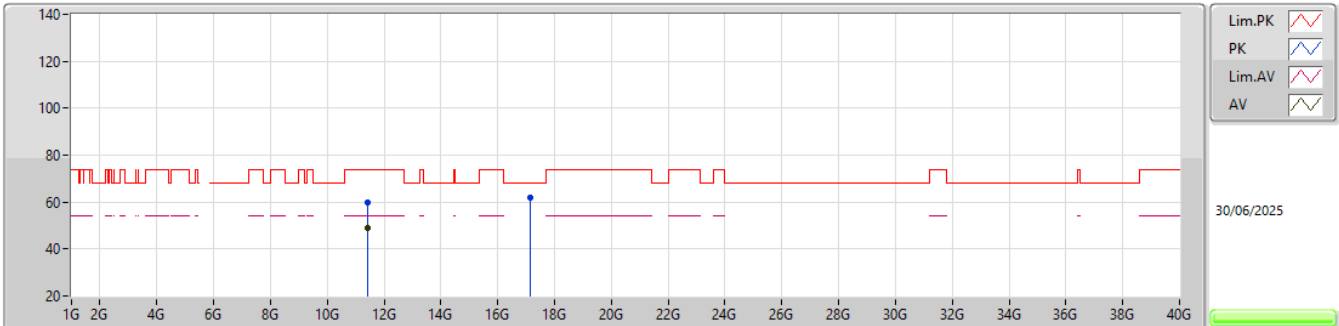


EUT_Z_4TX
Setting 108
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.42061G	59.71	74.00	-14.29	49.40	3	Vertical	2	2.67	-	39.90	13.18	42.77				
AV	11.41943G	48.73	54.00	-5.27	38.43	3	Vertical	2	2.67	-	39.90	13.17	42.77				
PK	17.1306G	61.72	68.20	-6.48	47.76	3	Vertical	95	1.82	-	40.24	16.32	42.60				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5710MHz Straddle 5.47-5.725GHz_TX

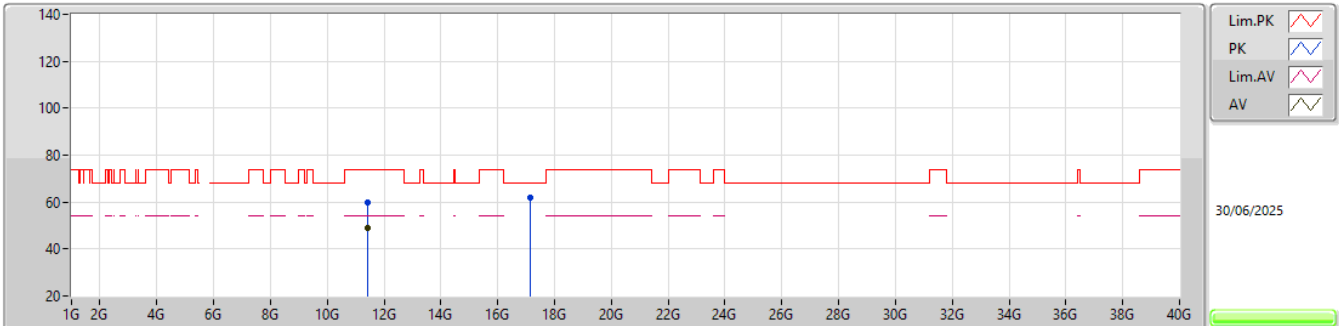EUT_Z_4TX
Setting 108
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.42028G	59.99	74.00	-14.01	49.68	3	Horizontal	86	1.65	-	39.90	13.18	42.77			
AV	11.41966G	48.77	54.00	-5.23	38.46	3	Horizontal	86	1.65	-	39.90	13.18	42.77			
PK	17.1295G	61.98	68.20	-6.22	48.01	3	Horizontal	43	2.26	-	40.24	16.32	42.59			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

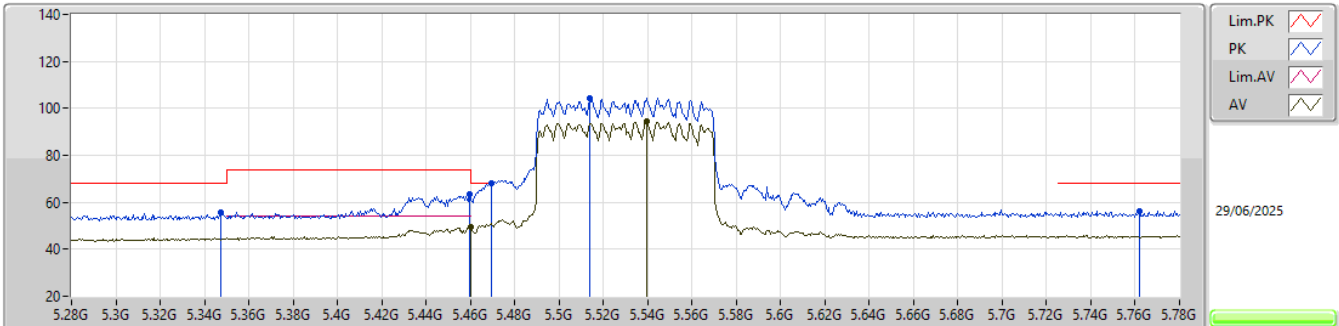


EUT_Z_4TX
Setting 60
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3475G	55.77	68.20	-12.43	59.69	3	Vertical	333	2.53	-	31.39	8.47	43.78			
PK	5.4595G	63.53	74.00	-10.47	67.06	3	Vertical	333	2.53	-	31.64	8.55	43.72			
AV	5.46G	49.69	54.00	-4.31	53.22	3	Vertical	333	2.53	-	31.64	8.55	43.72			
PK	5.4695G	67.89	68.20	-0.31	71.37	3	Vertical	333	2.53	-	31.68	8.56	43.72			
PK	5.514G	104.32	Inf	-Inf	107.63	3	Vertical	333	2.53	-	31.77	8.61	43.69			
AV	5.5395G	94.46	Inf	-Inf	97.76	3	Vertical	333	2.53	-	31.72	8.64	43.66			
PK	5.762G	56.22	68.20	-11.98	58.69	3	Vertical	333	2.53	-	32.10	8.87	43.44			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

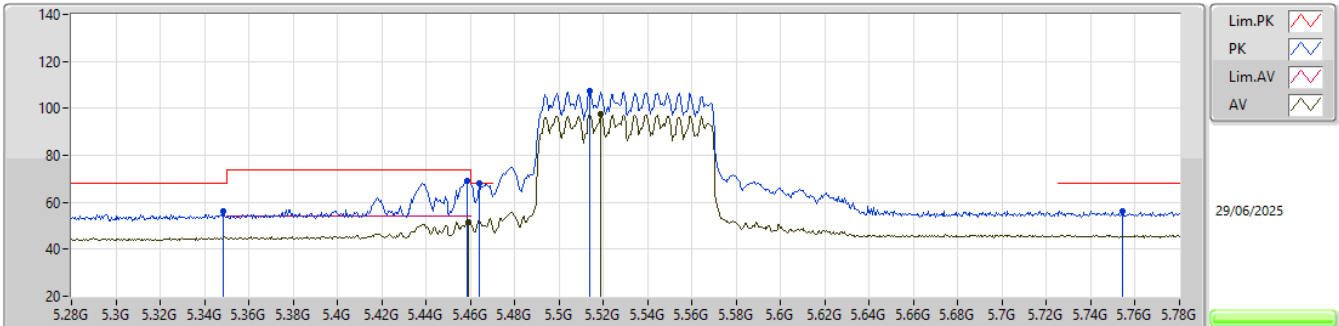


EUT_Z_4TX
Setting 60
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3485G	56.04	68.20	-12.16	59.96	3	Horizontal	327	1.80	-	31.39	8.47	43.78			
PK	5.4585G	69.03	74.00	-4.97	72.57	3	Horizontal	327	1.80	-	31.63	8.55	43.72			
AV	5.459G	51.43	54.00	-2.57	54.96	3	Horizontal	327	1.80	-	31.64	8.55	43.72			
PK	5.464G	67.96	68.20	-0.24	71.46	3	Horizontal	327	1.80	-	31.66	8.56	43.72			
PK	5.514G	107.23	Inf	-Inf	110.54	3	Horizontal	327	1.80	-	31.77	8.61	43.69			
AV	5.519G	97.34	Inf	-Inf	100.65	3	Horizontal	327	1.80	-	31.76	8.61	43.68			
PK	5.7545G	56.25	68.20	-11.95	58.74	3	Horizontal	327	1.80	-	32.10	8.86	43.45			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

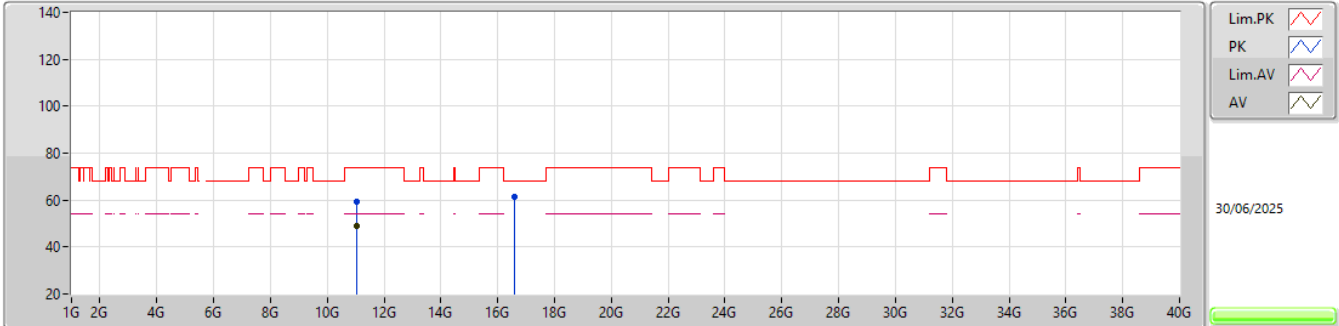


EUT_Z_4TX
Setting 60
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05964G	59.40	74.00	-14.60	49.51	3	Vertical	162	2.89	-	39.86	12.92	42.89			
AV	11.05937G	48.77	54.00	-5.23	38.88	3	Vertical	162	2.89	-	39.86	12.92	42.89			
PK	16.58984G	61.33	68.20	-6.87	48.33	3	Vertical	165	1.49	-	38.92	16.26	42.18			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5530MHz_TX

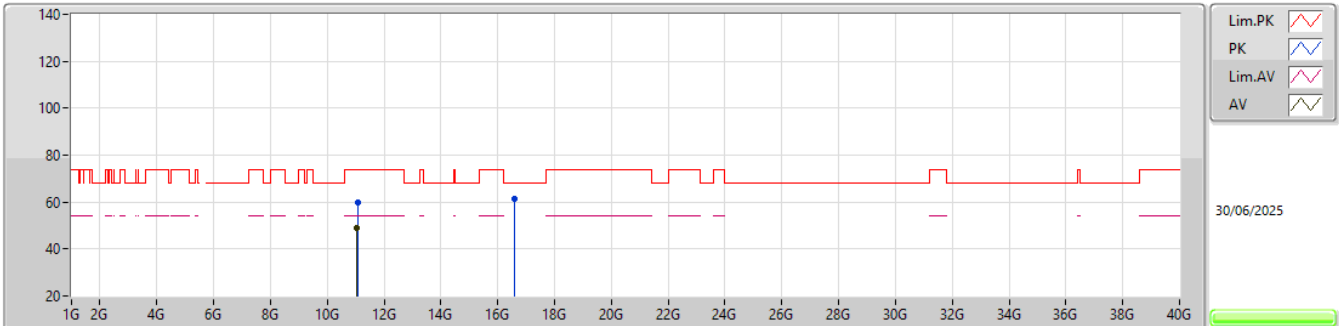EUT_Z_4TX
Setting 60
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.06086G	59.70	74.00	-14.30	49.81	3	Horizontal	78	2.65	-	39.86	12.92	42.89			
AV	11.05938G	48.74	54.00	-5.26	38.85	3	Horizontal	78	2.65	-	39.86	12.92	42.89			
PK	16.58998G	61.38	68.20	-6.82	48.38	3	Horizontal	294	2.28	-	38.92	16.26	42.18			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

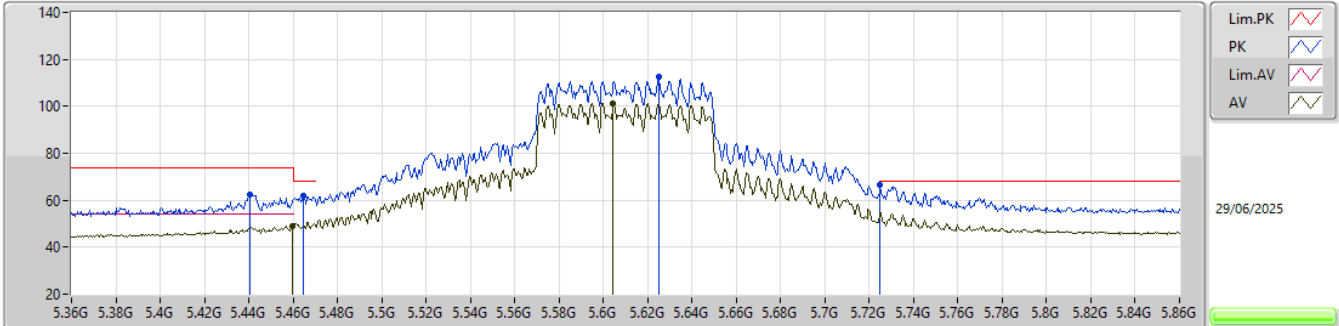


EUT_Z_4TX
Setting 80
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4405G	62.41	74.00	-11.59	66.05	3	Vertical	354	3.00	-	31.56	8.53	43.73			
PK	5.4645G	61.68	68.20	-6.52	65.18	3	Vertical	354	3.00	-	31.66	8.56	43.72			
AV	5.4595G	48.89	54.00	-5.11	52.42	3	Vertical	354	3.00	-	31.64	8.55	43.72			
PK	5.625G	112.45	Inf	-Inf	115.60	3	Vertical	354	3.00	-	31.70	8.73	43.58			
AV	5.6045G	101.20	Inf	-Inf	104.48	3	Vertical	354	3.00	-	31.62	8.70	43.60			
PK	5.725G	66.58	68.20	-1.62	69.18	3	Vertical	354	3.00	-	32.05	8.83	43.48			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

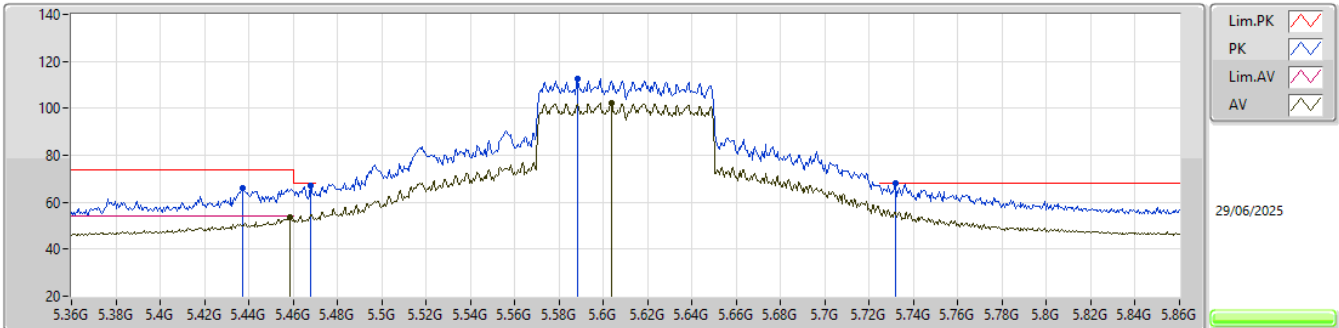


EUT_Z_4TX
Setting 80
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.437G	65.98	74.00	-8.02	69.63	3	Horizontal	324	2.98	-	31.55	8.53	43.73
PK	5.468G	67.02	68.20	-1.18	70.51	3	Horizontal	324	2.98	-	31.67	8.56	43.72
AV	5.4585G	53.42	54.00	-0.58	56.96	3	Horizontal	324	2.98	-	31.63	8.55	43.72
PK	5.5885G	112.63	Inf	-Inf	115.93	3	Horizontal	324	2.98	-	31.62	8.69	43.61
AV	5.6035G	102.19	Inf	-Inf	105.48	3	Horizontal	324	2.98	-	31.61	8.70	43.60
PK	5.732G	67.96	68.20	-0.24	70.53	3	Horizontal	324	2.98	-	32.06	8.84	43.47

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5610MHz_TX

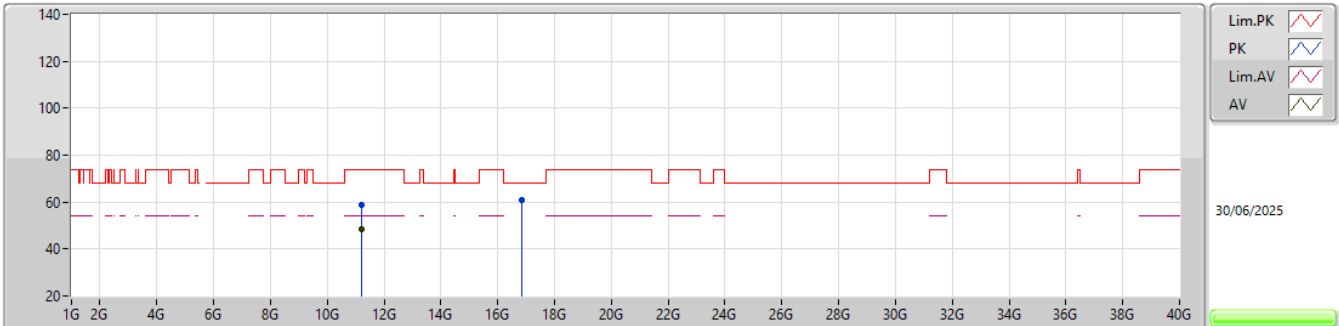EUT_Z_4TX
Setting 80
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21973G	59.02	74.00	-14.98	49.39	3	Vertical	226	2.68	-	39.44	13.03	42.84			
AV	11.22085G	48.31	54.00	-5.69	38.67	3	Vertical	226	2.68	-	39.44	13.03	42.83			
PK	16.82971G	60.91	68.20	-7.29	46.78	3	Vertical	7	1.63	-	40.14	16.29	42.30			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

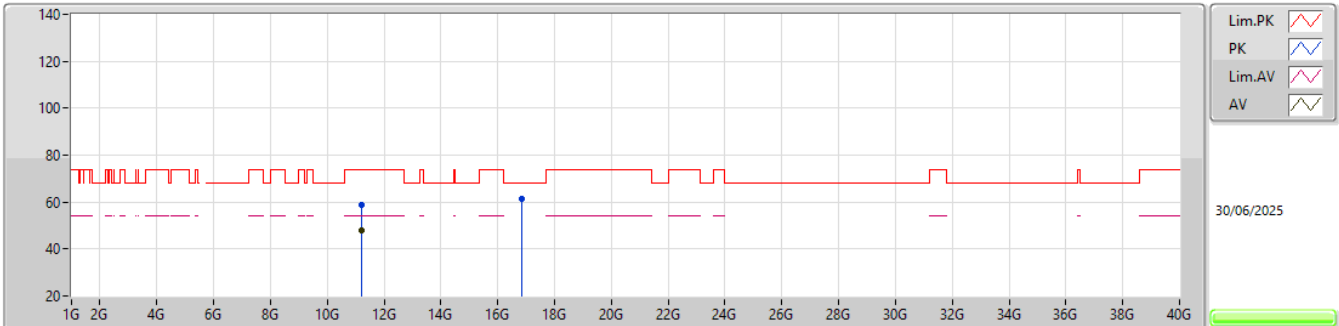


EUT_Z_4TX
Setting 80
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22072G	58.96	74.00	-15.04	49.32	3	Horizontal	237	1.49	-	39.44	13.03	42.83			
AV	11.21982G	48.18	54.00	-5.82	38.55	3	Horizontal	237	1.49	-	39.44	13.03	42.84			
PK	16.83074G	61.55	68.20	-6.65	47.41	3	Horizontal	18	2.16	-	40.15	16.29	42.30			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

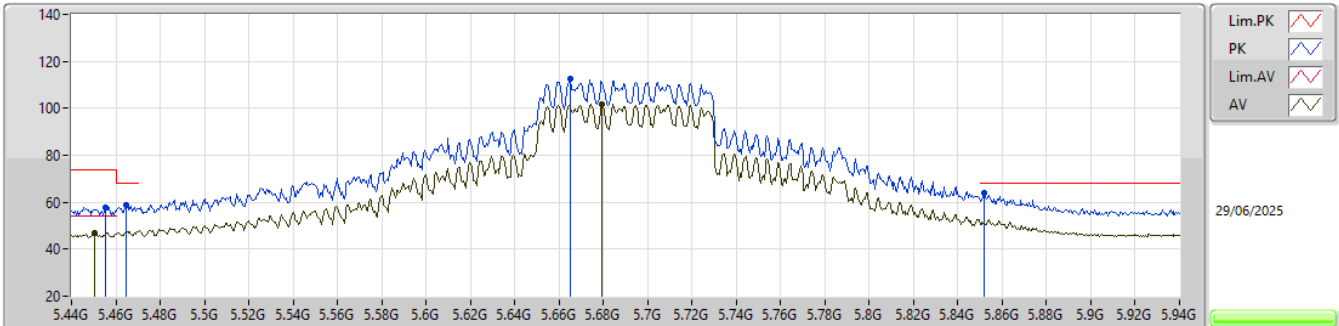


EUT_Z_4TX
Setting 94
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4555G	57.92	74.00	-16.08	61.47	3	Vertical	334	2.73	-	31.62	8.55	43.72
AV	5.4505G	47.05	54.00	-6.95	50.63	3	Vertical	334	2.73	-	31.60	8.54	43.72
PK	5.4645G	58.97	68.20	-9.23	62.47	3	Vertical	334	2.73	-	31.66	8.56	43.72
PK	5.665G	112.67	Inf	-Inf	115.58	3	Vertical	334	2.73	-	31.86	8.77	43.54
AV	5.6795G	101.64	Inf	-Inf	104.46	3	Vertical	334	2.73	-	31.92	8.78	43.52
PK	5.852G	63.79	68.20	-4.41	66.06	3	Vertical	334	2.73	-	32.11	8.97	43.35

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

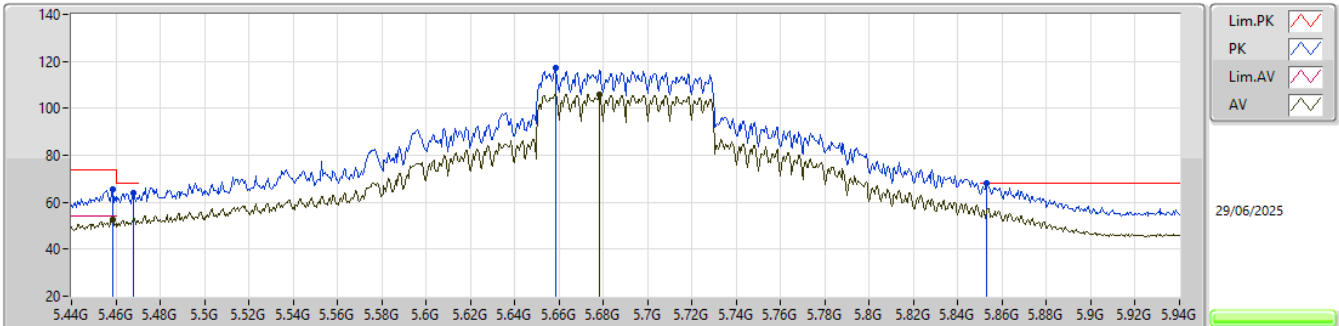


EUT_Z_4TX
Setting 94
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4585G	65.64	74.00	-8.36	69.18	3	Horizontal	332	2.97	-	31.63	8.55	43.72			
AV	5.4585G	52.44	54.00	-1.56	55.98	3	Horizontal	332	2.97	-	31.63	8.55	43.72			
PK	5.468G	64.00	68.20	-4.20	67.49	3	Horizontal	332	2.97	-	31.67	8.56	43.72			
PK	5.6585G	117.00	Inf	-Inf	119.95	3	Horizontal	332	2.97	-	31.83	8.76	43.54			
AV	5.678G	106.03	Inf	-Inf	108.86	3	Horizontal	332	2.97	-	31.91	8.78	43.52			
PK	5.853G	67.96	68.20	-0.24	70.23	3	Horizontal	332	2.97	-	32.11	8.97	43.35			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

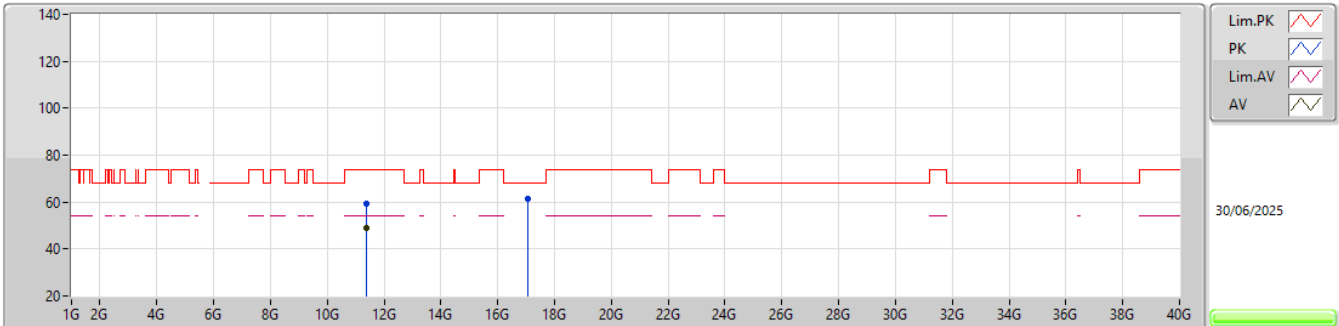


EUT_Z_4TX
Setting 94
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.38079G	59.23	74.00	-14.77	49.00	3	Vertical	220	2.95	-	39.86	13.15	42.78				
AV	11.38013G	48.84	54.00	-5.16	38.61	3	Vertical	220	2.95	-	39.86	13.15	42.78				
PK	17.06927G	61.45	68.20	-6.75	47.57	3	Vertical	154	1.34	-	40.06	16.32	42.50				

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

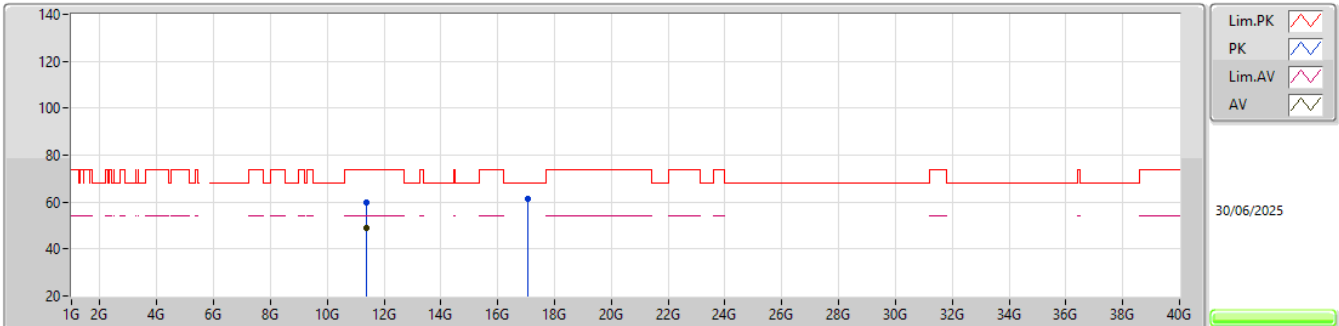


EUT_Z_4TX
Setting 94
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37948G	59.74	74.00	-14.26	49.51	3	Horizontal	195	2.37	-	39.86	13.15	42.78			
AV	11.37959G	48.72	54.00	-5.28	38.49	3	Horizontal	195	2.37	-	39.86	13.15	42.78			
PK	17.07079G	61.20	68.20	-7.00	47.32	3	Horizontal	58	1.10	-	40.06	16.32	42.50			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

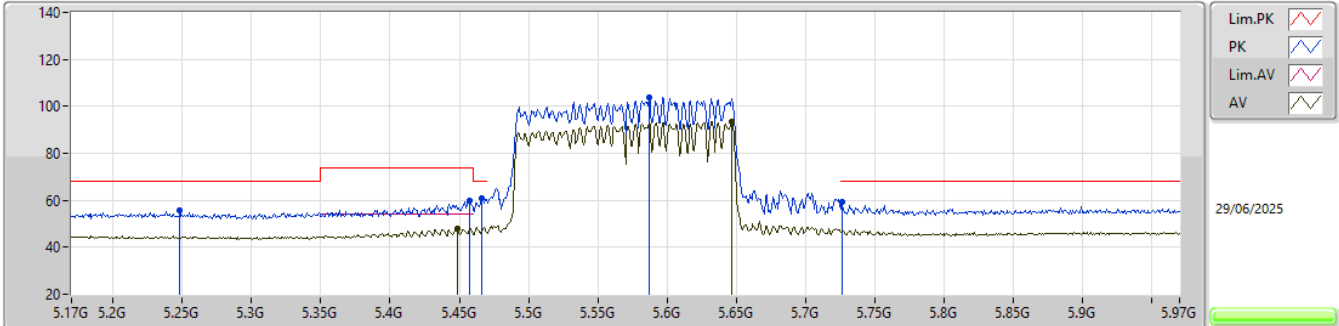


EUT_Z_4TX
Setting 61
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2484G	55.46	68.20	-12.74	59.44	3	Vertical	4	2.57	-	31.41	8.44	43.83			
PK	5.4572G	59.79	74.00	-14.21	63.33	3	Vertical	4	2.57	-	31.63	8.55	43.72			
AV	5.4484G	47.88	54.00	-6.12	51.48	3	Vertical	4	2.57	-	31.59	8.54	43.73			
PK	5.466G	61.04	68.20	-7.16	64.54	3	Vertical	4	2.57	-	31.66	8.56	43.72			
PK	5.5868G	103.83	Inf	-Inf	107.12	3	Vertical	4	2.57	-	31.63	8.69	43.61			
AV	5.6468G	93.43	Inf	-Inf	96.44	3	Vertical	4	2.57	-	31.79	8.75	43.55			
PK	5.726G	59.18	68.20	-9.02	61.77	3	Vertical	4	2.57	-	32.05	8.83	43.47			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

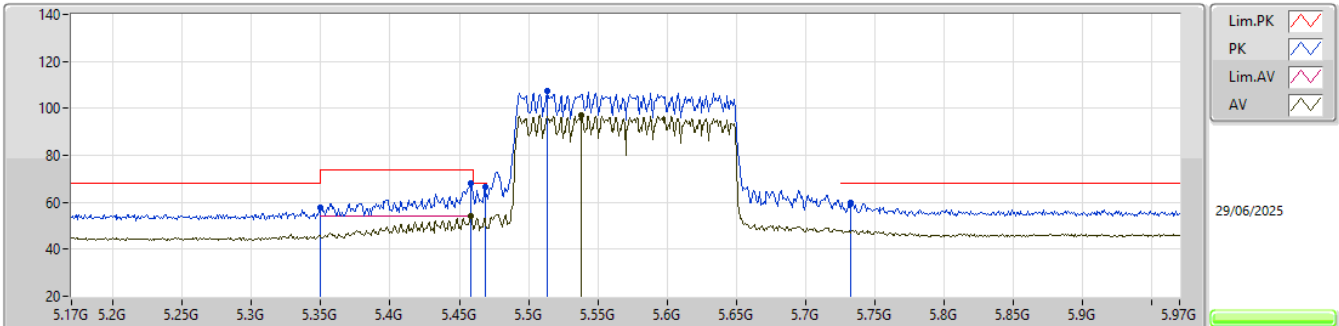


EUT_Z_4TX
Setting 61
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3492G	57.77	68.20	-10.43	61.68	3	Horizontal	333	2.97	-	31.40	8.47	43.78			
PK	5.458G	67.97	74.00	-6.03	71.51	3	Horizontal	333	2.97	-	31.63	8.55	43.72			
AV	5.458G	53.88	54.00	-0.12	57.42	3	Horizontal	333	2.97	-	31.63	8.55	43.72			
PK	5.4684G	66.44	68.20	-1.76	69.93	3	Horizontal	333	2.97	-	31.67	8.56	43.72			
PK	5.5132G	107.16	Inf	-Inf	110.47	3	Horizontal	333	2.97	-	31.77	8.61	43.69			
AV	5.538G	97.05	Inf	-Inf	100.36	3	Horizontal	333	2.97	-	31.72	8.63	43.66			
PK	5.7324G	60.00	68.20	-8.20	62.57	3	Horizontal	333	2.97	-	32.06	8.84	43.47			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

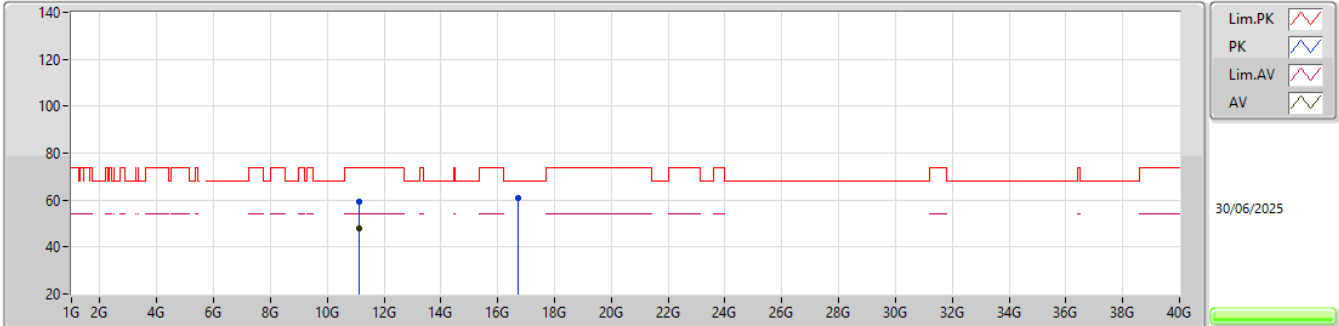


EUT_Z_4TX
Setting 61
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14001G	59.41	74.00	-14.59	49.75	3	Vertical	333	1.09	-	39.54	12.98	42.86			
AV	11.14033G	48.14	54.00	-5.86	38.48	3	Vertical	333	1.09	-	39.54	12.98	42.86			
PK	16.71015G	60.97	68.20	-7.23	47.67	3	Vertical	37	1.85	-	39.26	16.28	42.24			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

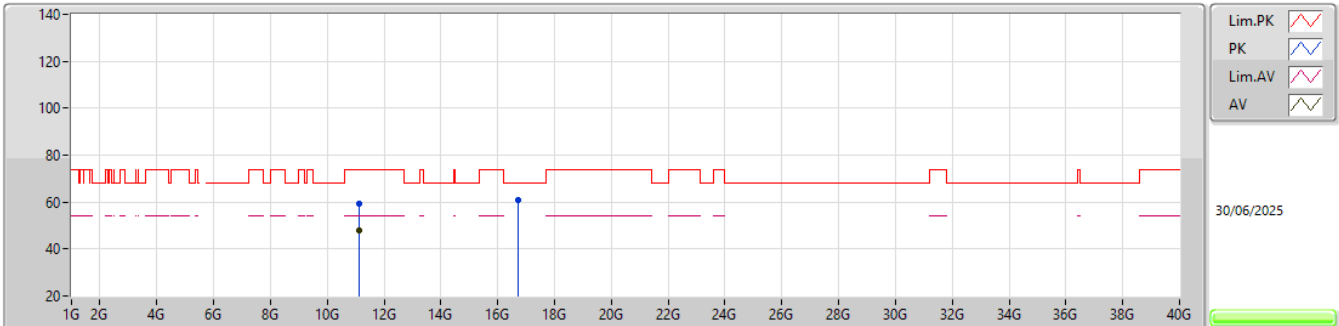


EUT_Z_4TX
Setting 61
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.13934G	59.12	74.00	-14.88	49.47	3	Horizontal	260	1.79	-	39.54	12.97	42.86			
AV	11.14009G	48.05	54.00	-5.95	38.39	3	Horizontal	260	1.79	-	39.54	12.98	42.86			
PK	16.70969G	60.73	68.20	-7.47	47.43	3	Horizontal	168	2.67	-	39.26	16.28	42.24			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

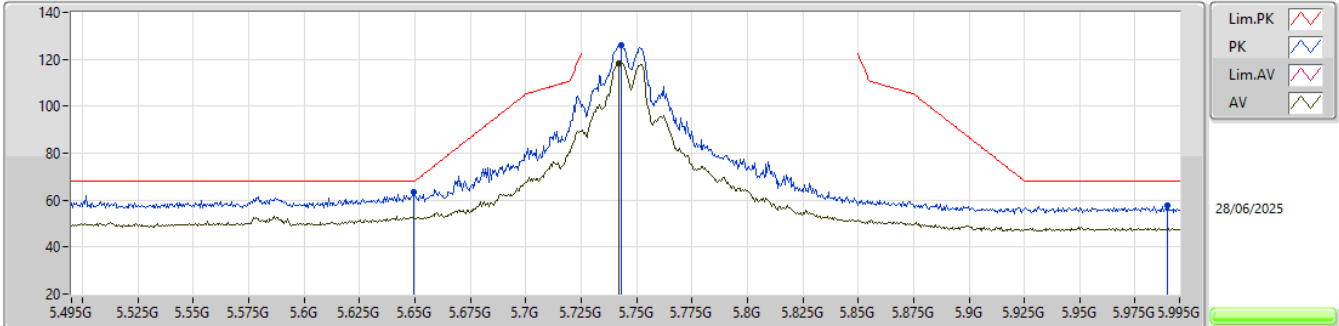


EUT_Z_4TX
Setting 95
04-I-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6495G	63.50	68.20	-4.70	66.50	3	Vertical	184	1.80	-	31.80	8.75	43.55				
PK	5.743G	126.09	Inf	-Inf	128.61	3	Vertical	184	1.80	-	32.09	8.85	43.46				
AV	5.742G	118.45	Inf	-Inf	120.98	3	Vertical	184	1.80	-	32.08	8.85	43.46				
PK	5.9895G	57.72	68.20	-10.48	59.42	3	Vertical	184	1.80	-	32.38	9.13	43.21				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

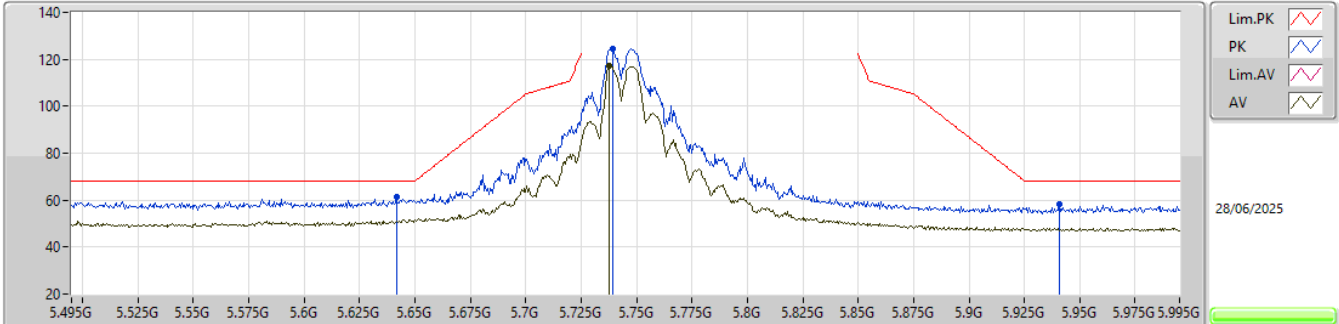


EUT_Z_4TX
Setting 95
04-I-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6415G	61.17	68.20	-7.03	64.22	3	Horizontal	184	1.80	-	31.77	8.74	43.56			
PK	5.739G	124.46	Inf	-Inf	126.99	3	Horizontal	184	1.80	-	32.08	8.85	43.46			
AV	5.7375G	117.02	Inf	-Inf	119.56	3	Horizontal	184	1.80	-	32.08	8.84	43.46			
PK	5.941G	58.10	68.20	-10.10	59.99	3	Horizontal	184	1.80	-	32.30	9.07	43.26			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5745MHz_TX

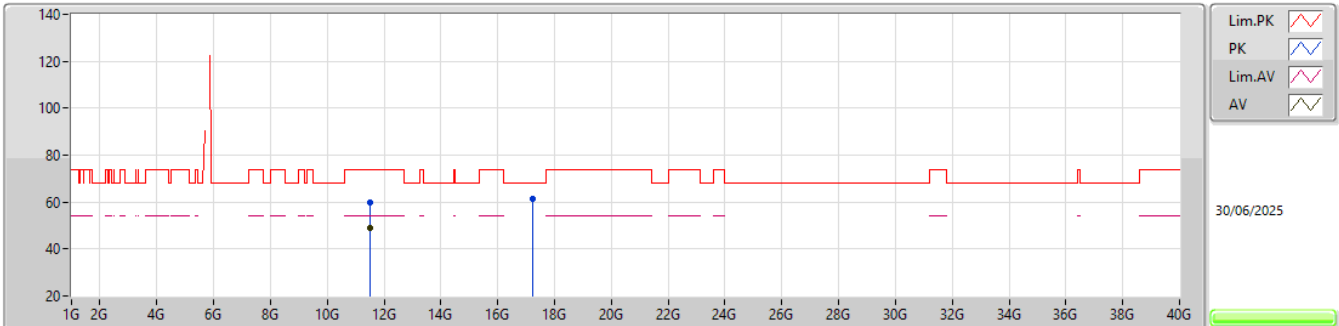EUT_Z_4TX
Setting 95
04-H-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48928G	59.69	74.00	-14.31	49.23	3	Vertical	168	2.16	-	39.98	13.22	42.74			
AV	11.48921G	49.06	54.00	-4.94	38.60	3	Vertical	168	2.16	-	39.98	13.22	42.74			
PK	17.23498G	61.58	68.20	-6.62	47.40	3	Vertical	163	1.96	-	40.60	16.34	42.76			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

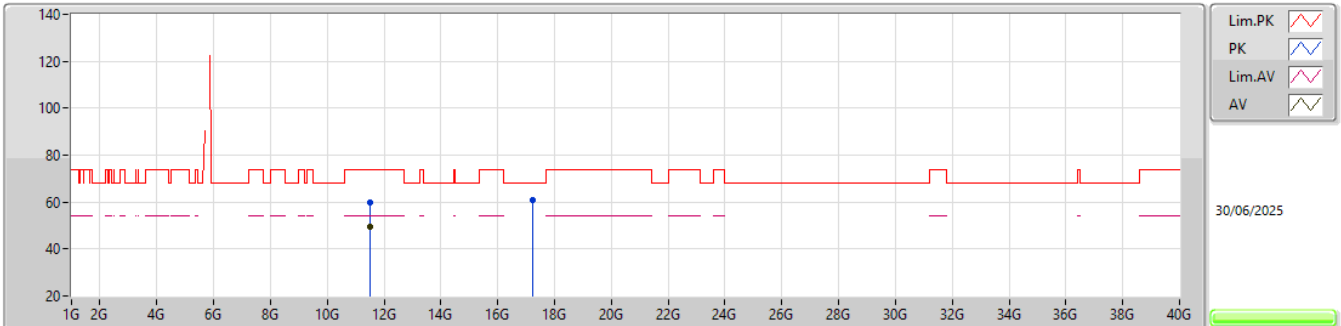


EUT_Z_4TX
Setting 95
04-H-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48906G	59.70	74.00	-14.30	49.24	3	Horizontal	356	1.49	-	39.98	13.22	42.74			
AV	11.49024G	49.29	54.00	-4.71	38.82	3	Horizontal	356	1.49	-	39.98	13.23	42.74			
PK	17.23495G	61.08	68.20	-7.12	46.90	3	Horizontal	283	2.90	-	40.60	16.34	42.76			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5785MHz_TX

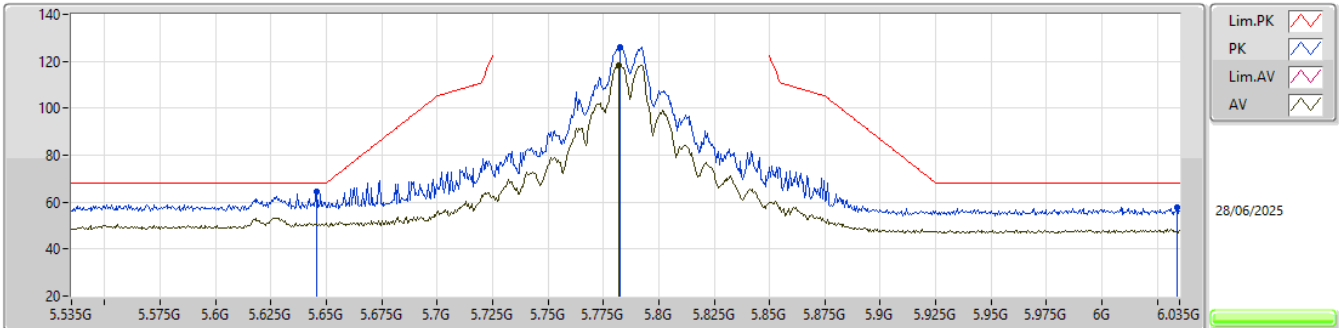EUT_Z_4TX
Setting 108
04-I-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6455G	64.44	68.20	-3.76	67.46	3	Vertical	184	1.80	-	31.78	8.75	43.55			
PK	5.7825G	126.27	Inf	-Inf	128.70	3	Vertical	184	1.80	-	32.10	8.89	43.42			
AV	5.782G	118.48	Inf	-Inf	120.91	3	Vertical	184	1.80	-	32.10	8.89	43.42			
PK	6.034G	57.75	68.20	-10.45	59.38	3	Vertical	184	1.80	-	32.40	9.16	43.19			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

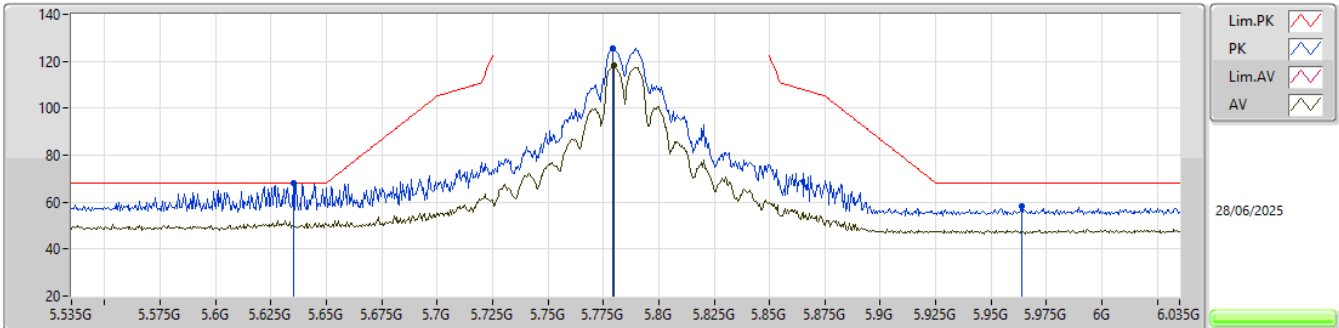


EUT_Z_4TX
Setting 108
04-I-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.635G	68.00	68.20	-0.20	71.09	3	Horizontal	186	1.80	-	31.74	8.74	43.57			
PK	5.7795G	125.40	Inf	-Inf	127.83	3	Horizontal	186	1.80	-	32.10	8.89	43.42			
AV	5.78G	118.08	Inf	-Inf	120.51	3	Horizontal	186	1.80	-	32.10	8.89	43.42			
PK	5.964G	58.18	68.20	-10.02	59.99	3	Horizontal	186	1.80	-	32.33	9.10	43.24			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

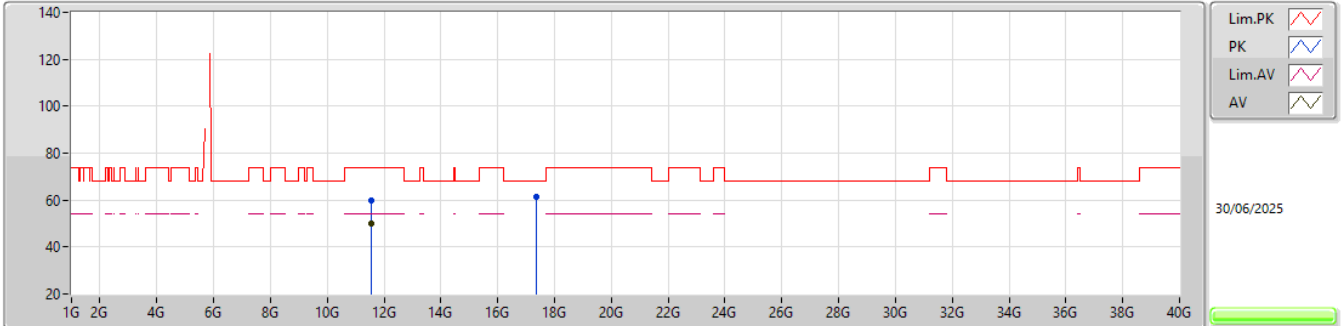


EUT_Z_4TX
Setting 108
04-H-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56985G	59.96	74.00	-14.04	49.70	3	Vertical	86	2.49	-	39.82	13.28	42.84			
AV	11.57019G	49.79	54.00	-4.21	39.53	3	Vertical	86	2.49	-	39.82	13.28	42.84			
PK	17.35479G	61.52	68.20	-6.68	46.78	3	Vertical	261	2.51	-	41.34	16.35	42.95			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5785MHz_TX

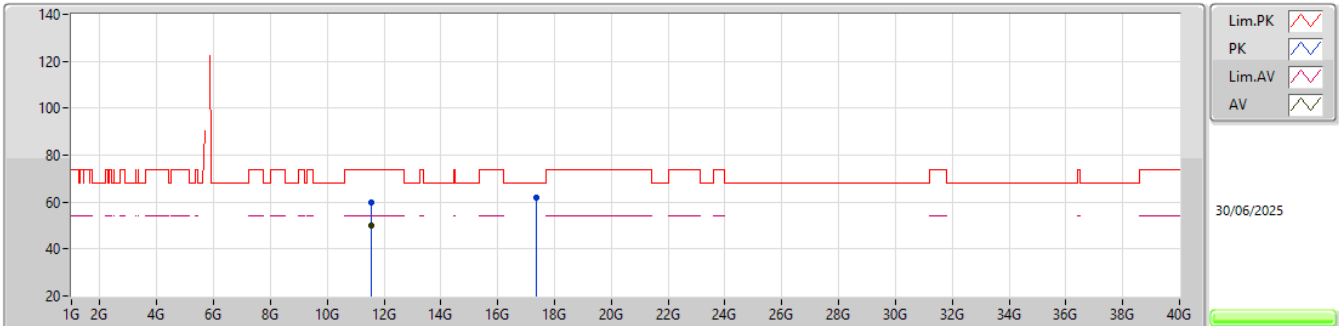EUT_Z_4TX
Setting 108
04-H-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5705G	59.58	74.00	-14.42	49.32	3	Horizontal	295	2.34	-	39.82	13.28	42.84			
AV	11.57094G	49.87	54.00	-4.13	39.61	3	Horizontal	295	2.34	-	39.82	13.28	42.84			
PK	17.3541G	61.85	68.20	-6.35	47.12	3	Horizontal	238	2.01	-	41.33	16.35	42.95			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

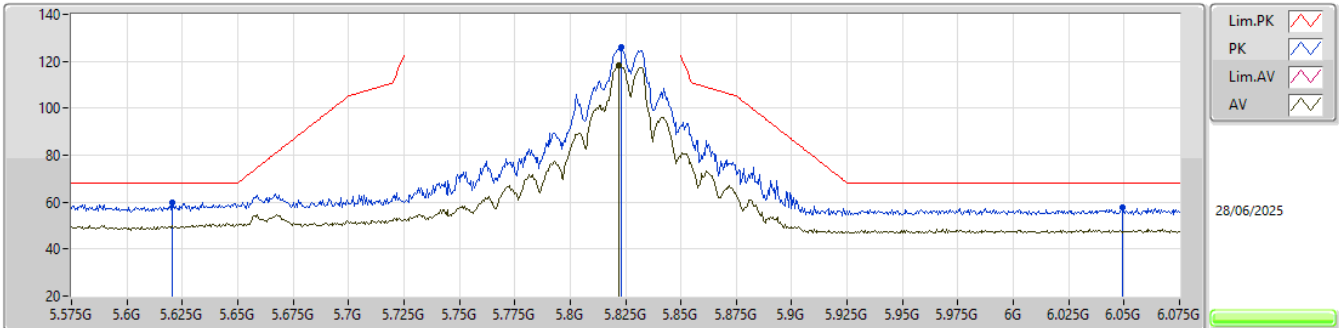


EUT_Z_4TX
Setting 108
04-I-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6205G	59.65	68.20	-8.55	62.83	3	Vertical	184	1.80	-	31.68	8.72	43.58			
PK	5.823G	125.95	Inf	-Inf	128.29	3	Vertical	184	1.80	-	32.10	8.94	43.38			
AV	5.822G	118.14	Inf	-Inf	120.48	3	Vertical	184	1.80	-	32.10	8.94	43.38			
PK	6.0495G	57.89	68.20	-10.31	59.50	3	Vertical	184	1.80	-	32.40	9.17	43.18			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

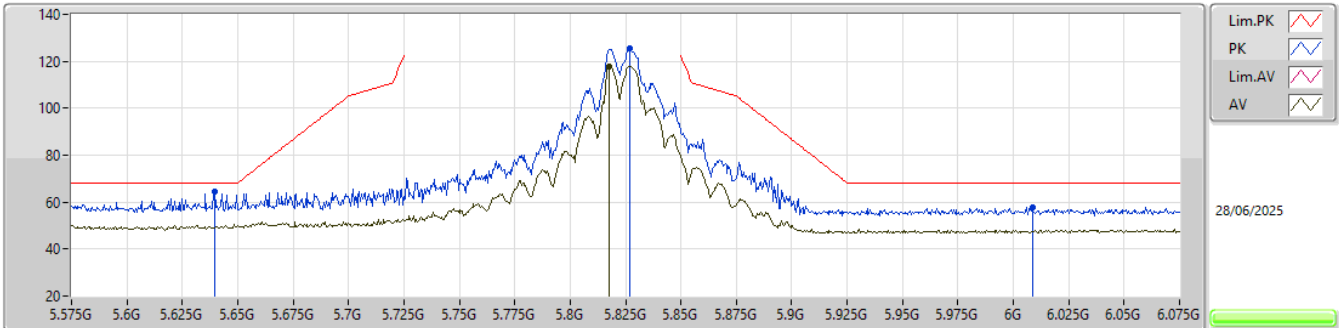


EUT_Z_4TX
Setting 108
04-I-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6395G	64.27	68.20	-3.93	67.33	3	Horizontal	183	1.80	-	31.76	8.74	43.56			
PK	5.827G	125.43	Inf	-Inf	127.76	3	Horizontal	183	1.80	-	32.10	8.94	43.37			
AV	5.8175G	118.00	Inf	-Inf	120.35	3	Horizontal	183	1.80	-	32.10	8.93	43.38			
PK	6.0085G	57.87	68.20	-10.33	59.52	3	Horizontal	183	1.80	-	32.40	9.15	43.20			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

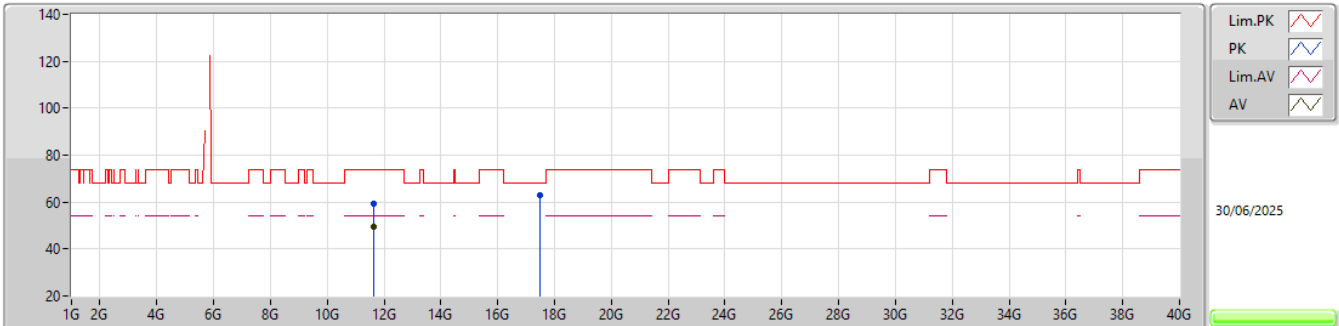


EUT_Z_4TX
Setting 108
04-H-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64988G	59.31	74.00	-14.69	49.42	3	Vertical	257	1.23	-	39.50	13.34	42.95			
AV	11.65029G	49.64	54.00	-4.36	39.75	3	Vertical	257	1.23	-	39.50	13.34	42.95			
PK	17.47561G	62.72	68.20	-5.48	47.30	3	Vertical	340	2.65	-	42.20	16.36	43.14			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

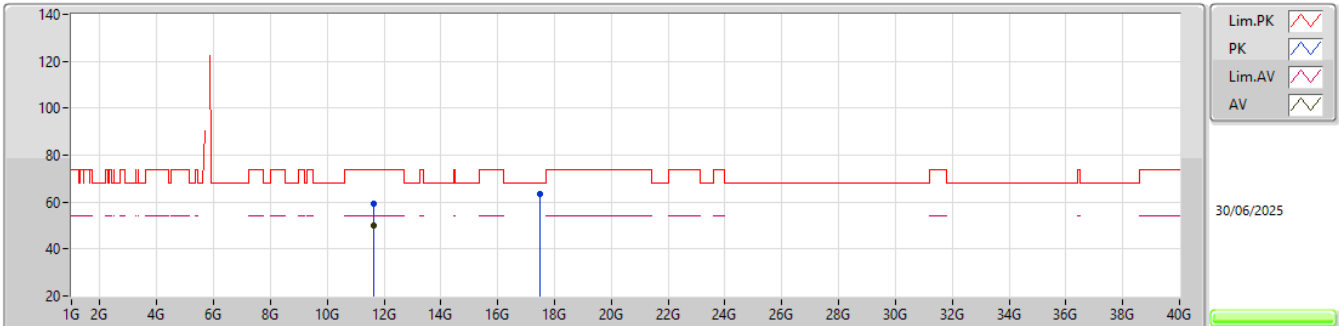


EUT_Z_4TX
Setting 108
04-H-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64967G	59.20	74.00	-14.80	49.31	3	Horizontal	255	3.00	-	39.50	13.34	42.95			
AV	11.65021G	49.81	54.00	-4.19	39.92	3	Horizontal	255	3.00	-	39.50	13.34	42.95			
PK	17.47479G	63.21	68.20	-4.99	47.79	3	Horizontal	308	2.66	-	42.20	16.36	43.14			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

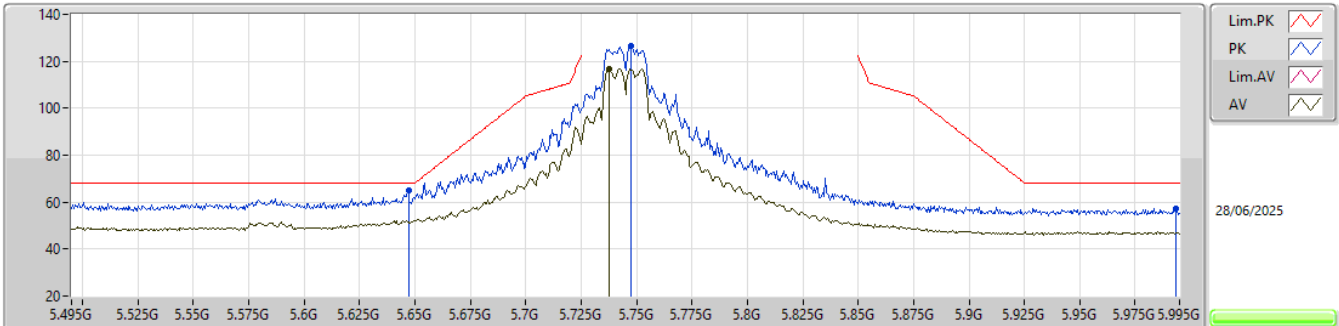


EUT_Z_4TX
Setting 94
04-I-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.647G	64.96	68.20	-3.24	67.97	3	Vertical	181	1.80	-	31.79	8.75	43.55
PK	5.7475G	126.67	Inf	-Inf	129.18	3	Vertical	181	1.80	-	32.09	8.85	43.45
AV	5.7375G	116.86	Inf	-Inf	119.40	3	Vertical	181	1.80	-	32.08	8.84	43.46
PK	5.9935G	57.48	68.20	-10.72	59.17	3	Vertical	181	1.80	-	32.39	9.13	43.21

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

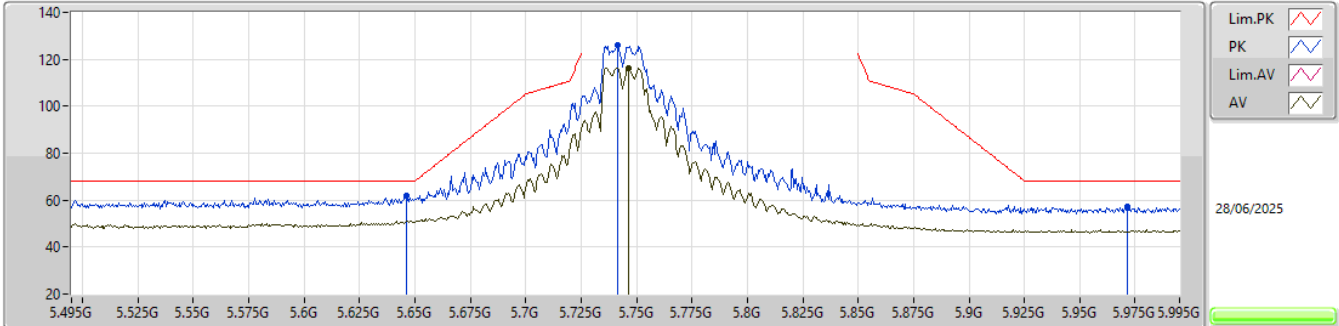


EUT_Z_4TX
Setting 94
04-I-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.646G	61.99	68.20	-6.21	65.01	3	Horizontal	183	1.80	-	31.78	8.75	43.55			
PK	5.7415G	125.86	Inf	-Inf	128.39	3	Horizontal	183	1.80	-	32.08	8.85	43.46			
AV	5.7465G	116.36	Inf	-Inf	118.87	3	Horizontal	183	1.80	-	32.09	8.85	43.45			
PK	5.9715G	57.12	68.20	-11.08	58.90	3	Horizontal	183	1.80	-	32.34	9.11	43.23			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

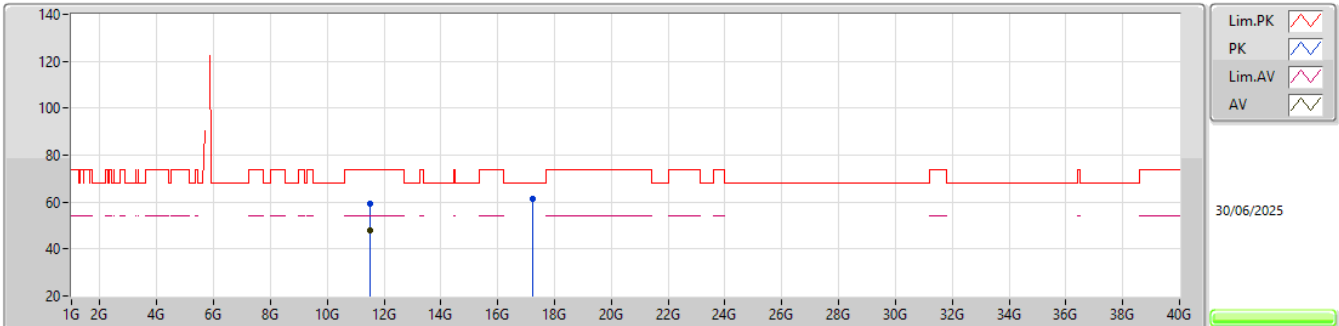


EUT_Z_4TX
Setting 94
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49088G	59.13	74.00	-14.87	48.66	3	Vertical	145	2.98	-	39.98	13.23	42.74			
AV	11.49095G	48.12	54.00	-5.88	37.65	3	Vertical	145	2.98	-	39.98	13.23	42.74			
PK	17.23507G	61.13	68.20	-7.07	46.95	3	Vertical	145	1.30	-	40.60	16.34	42.76			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5745MHz_TX

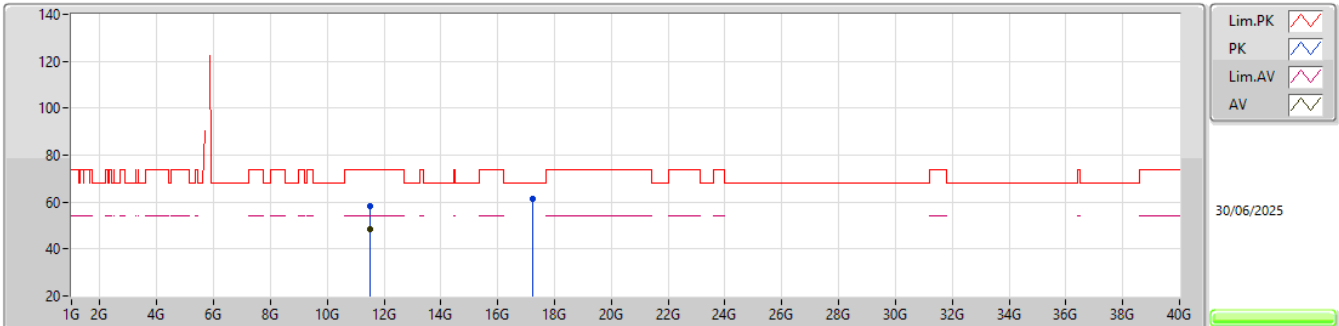EUT_Z_4TX
Setting 94
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48973G	58.45	74.00	-15.55	47.98	3	Horizontal	167	2.72	-	39.98	13.23	42.74			
AV	11.48958G	48.25	54.00	-5.75	37.78	3	Horizontal	167	2.72	-	39.98	13.23	42.74			
PK	17.2348G	61.52	68.20	-6.68	47.34	3	Horizontal	154	2.11	-	40.60	16.34	42.76			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5785MHz_TX

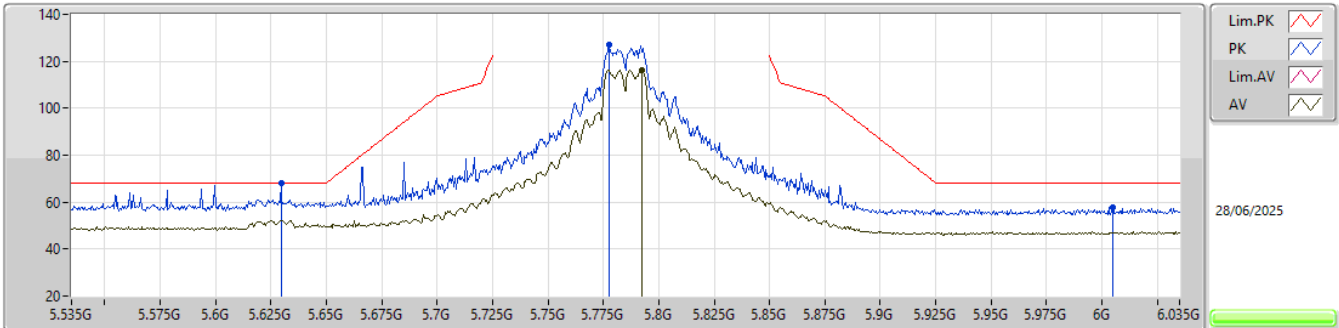
EUT_Z_4TX
Setting 94
04-I-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6295G	68.08	68.20	-0.12	71.20	3	Vertical	181	1.80	-	31.72	8.73	43.57				
PK	5.7775G	126.92	Inf	-Inf	129.35	3	Vertical	181	1.80	-	32.10	8.89	43.42				
AV	5.7925G	116.38	Inf	-Inf	118.79	3	Vertical	181	1.80	-	32.10	8.90	43.41				
PK	6.005G	57.79	68.20	-10.41	59.45	3	Vertical	181	1.80	-	32.40	9.14	43.20				

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5785MHz_TX

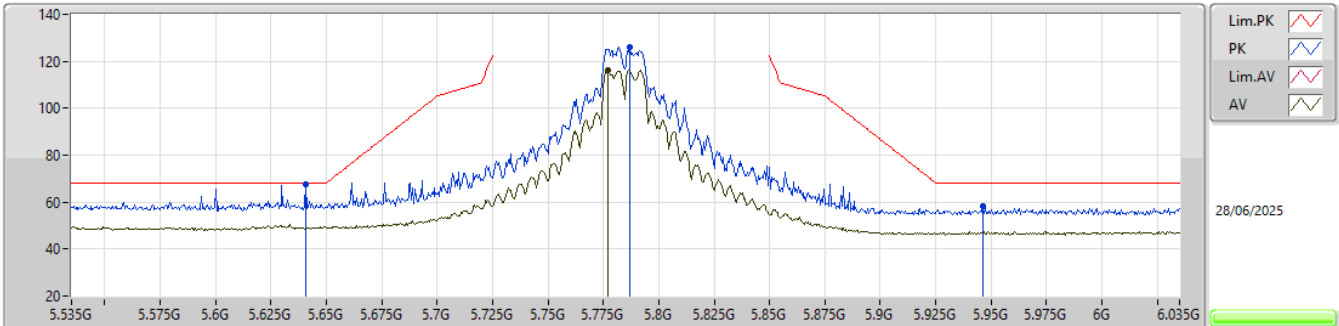


EUT_Z_4TX
Setting 94
04-I-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6405G	67.65	68.20	-0.55	70.71	3	Horizontal	185	1.80	-	31.76	8.74	43.56			
PK	5.787G	126.25	Inf	-Inf	128.66	3	Horizontal	185	1.80	-	32.10	8.90	43.41			
AV	5.777G	116.06	Inf	-Inf	118.49	3	Horizontal	185	1.80	-	32.10	8.89	43.42			
PK	5.9465G	58.07	68.20	-10.13	59.94	3	Horizontal	185	1.80	-	32.30	9.08	43.25			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5785MHz_TX

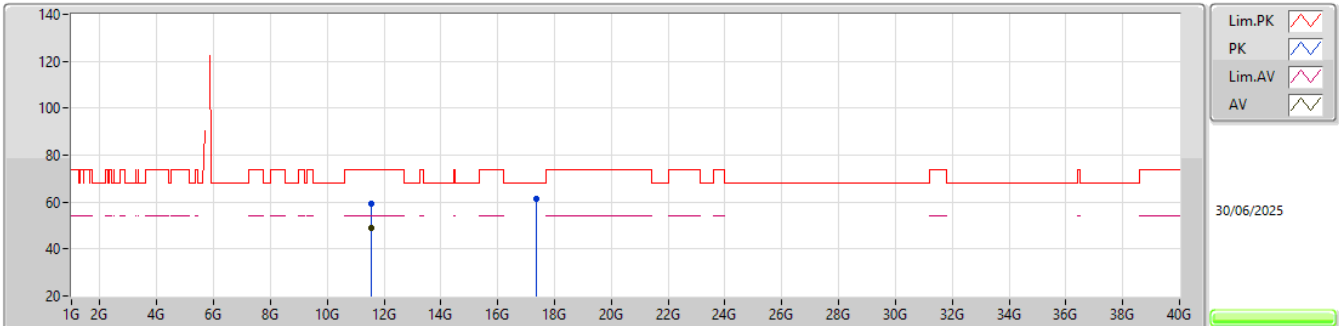EUT_Z_4TX
Setting 94
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56965G	59.56	74.00	-14.44	49.30	3	Vertical	342	2.07	-	39.82	13.28	42.84			
AV	11.57074G	48.95	54.00	-5.05	38.69	3	Vertical	342	2.07	-	39.82	13.28	42.84			
PK	17.35599G	61.60	68.20	-6.60	46.85	3	Vertical	10	1.55	-	41.35	16.35	42.95			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5785MHz_TX

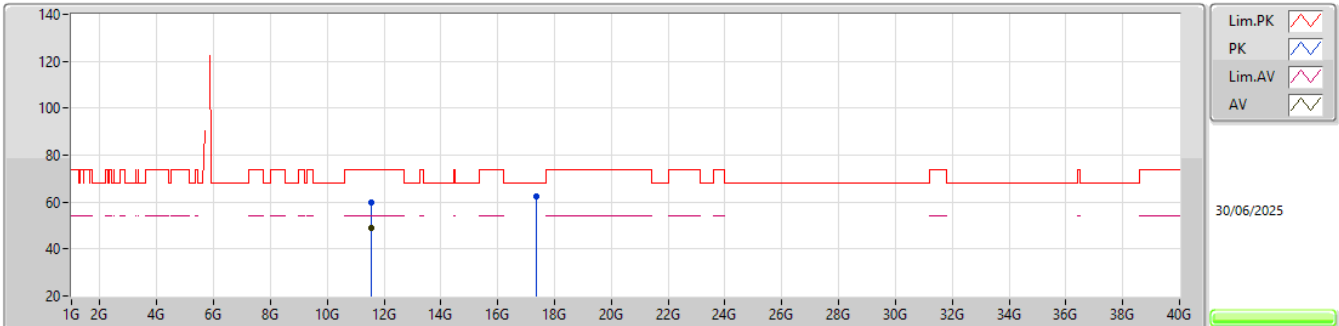EUT_Z_4TX
Setting 94
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57032G	59.58	74.00	-14.42	49.32	3	Horizontal	297	1.17	-	39.82	13.28	42.84			
AV	11.57086G	48.95	54.00	-5.05	38.69	3	Horizontal	297	1.17	-	39.82	13.28	42.84			
PK	17.35423G	62.20	68.20	-6.00	47.47	3	Horizontal	161	2.88	-	41.33	16.35	42.95			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5825MHz_TX

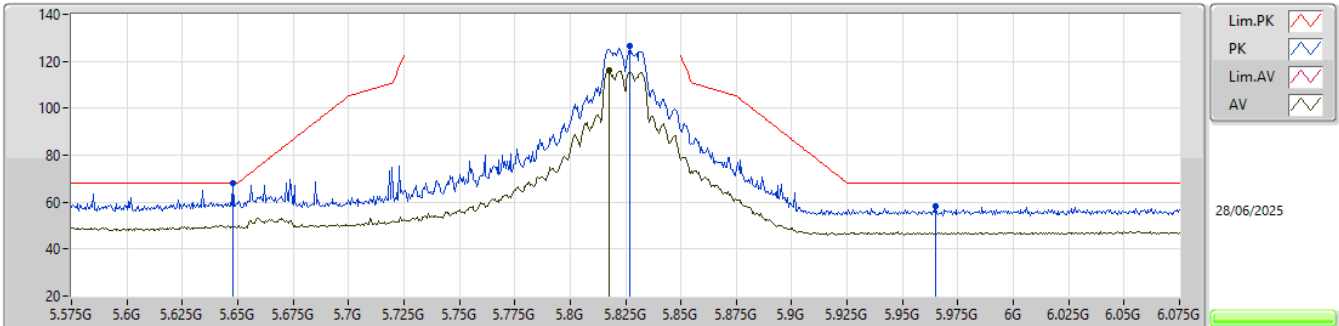EUT_Z_4TX
Setting 93
04-I-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.648G	67.91	68.20	-0.29	70.92	3	Vertical	181	1.80	-	31.79	8.75	43.55			
PK	5.827G	126.39	Inf	-Inf	128.72	3	Vertical	181	1.80	-	32.10	8.94	43.37			
AV	5.8175G	116.07	Inf	-Inf	118.42	3	Vertical	181	1.80	-	32.10	8.93	43.38			
PK	5.965G	58.32	68.20	-9.88	60.12	3	Vertical	181	1.80	-	32.33	9.10	43.23			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5825MHz_TX

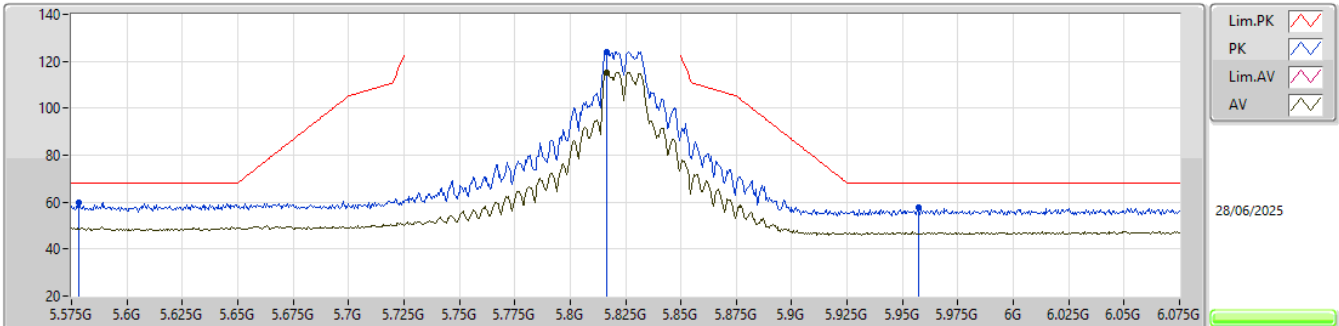


EUT_Z_4TX
Setting 93
04-I-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.5785G	59.79	68.20	-8.41	63.09	3	Horizontal	184	1.80	-	31.64	8.68	43.62			
PK	5.8165G	124.18	Inf	-Inf	126.53	3	Horizontal	184	1.80	-	32.10	8.93	43.38			
AV	5.8165G	115.41	Inf	-Inf	117.76	3	Horizontal	184	1.80	-	32.10	8.93	43.38			
PK	5.9575G	57.56	68.20	-10.64	59.40	3	Horizontal	184	1.80	-	32.31	9.09	43.24			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5825MHz_TX

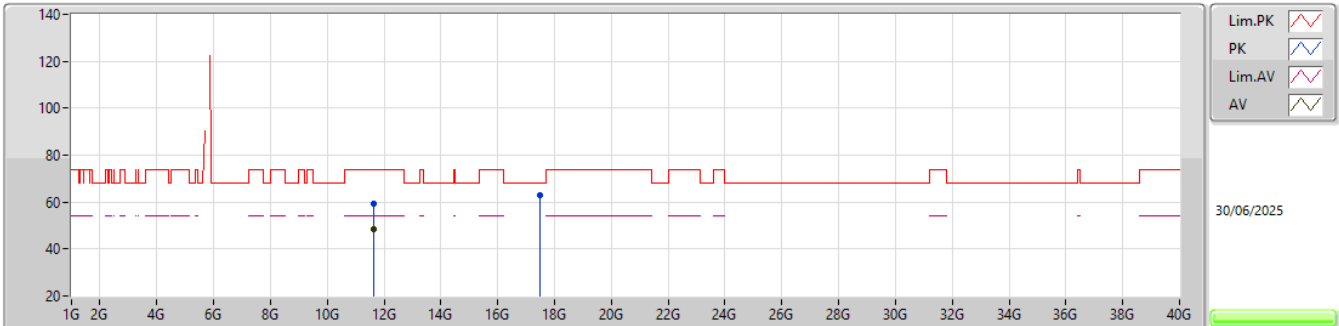EUT_Z_4TX
Setting 93
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64918G	59.50	74.00	-14.50	49.61	3	Vertical	60	1.33	-	39.50	13.34	42.95			
AV	11.6491G	48.21	54.00	-5.79	38.32	3	Vertical	60	1.33	-	39.50	13.34	42.95			
PK	17.47499G	63.14	68.20	-5.06	47.72	3	Vertical	208	2.24	-	42.20	16.36	43.14			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5825MHz_TX

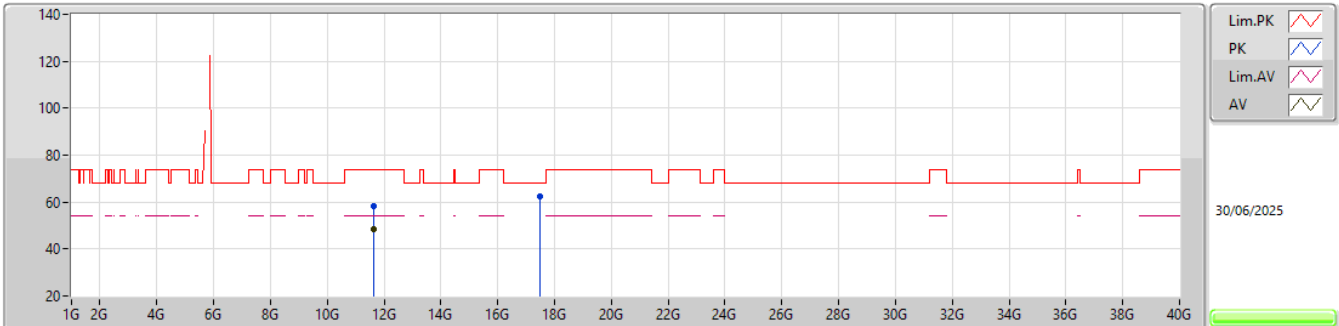EUT_Z_4TX
Setting 93
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64901G	58.52	74.00	-15.48	48.63	3	Horizontal	281	1.73	-	39.50	13.34	42.95			
AV	11.65022G	48.27	54.00	-5.73	38.38	3	Horizontal	281	1.73	-	39.50	13.34	42.95			
PK	17.47449G	62.53	68.20	-5.67	47.11	3	Horizontal	296	1.17	-	42.20	16.36	43.14			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5755MHz_TX

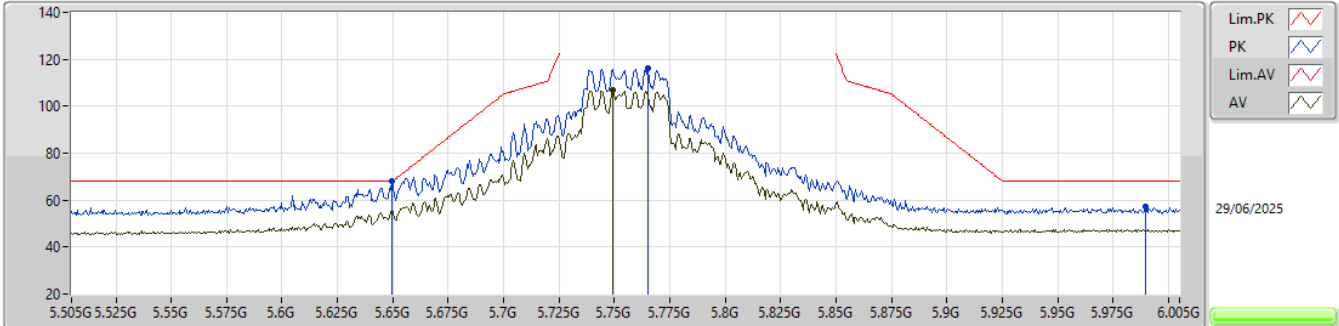


EUT_Z_4TX
Setting 97
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6495G	68.16	68.20	-0.04	71.16	3	Vertical	336	2.96	-	31.80	8.75	43.55				
PK	5.765G	116.19	Inf	-Inf	118.66	3	Vertical	336	2.96	-	32.10	8.87	43.44				
AV	5.7495G	106.78	Inf	-Inf	109.27	3	Vertical	336	2.96	-	32.10	8.86	43.45				
PK	5.9895G	57.01	68.20	-11.19	58.71	3	Vertical	336	2.96	-	32.38	9.13	43.21				

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5755MHz_TX

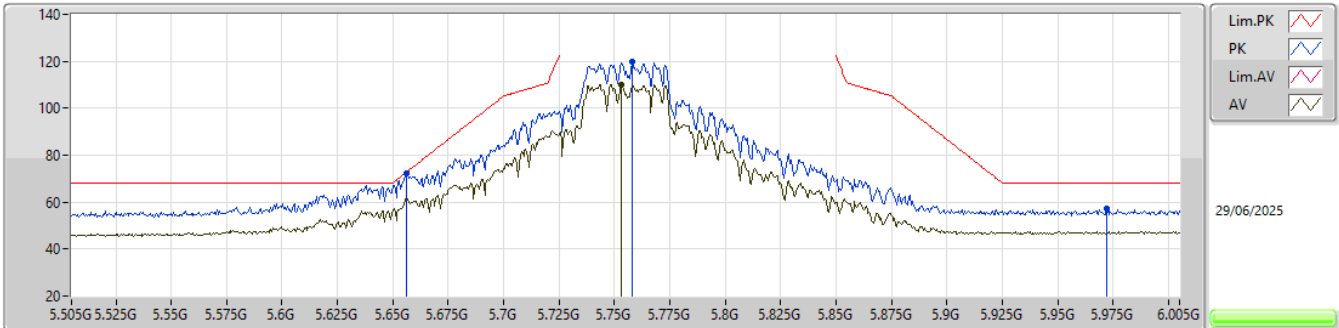EUT_Z_4TX
Setting 97
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.656G	72.45	72.64	-0.19	75.41	3	Horizontal	0	2.89	-	31.82	8.76	43.54			
PK	5.758G	119.87	Inf	-Inf	122.34	3	Horizontal	0	2.89	-	32.10	8.87	43.44			
AV	5.753G	109.94	Inf	-Inf	112.43	3	Horizontal	0	2.89	-	32.10	8.86	43.45			
PK	5.972G	56.99	68.20	-11.21	58.77	3	Horizontal	0	2.89	-	32.34	9.11	43.23			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5755MHz_TX

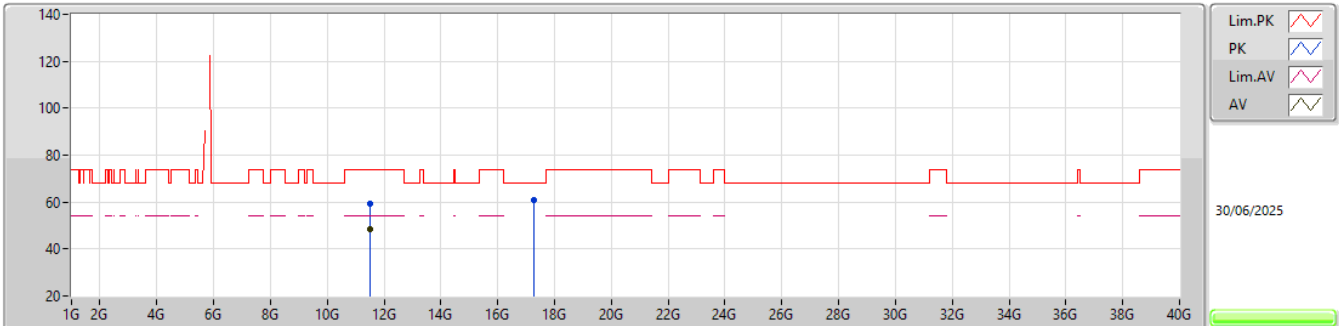EUT_Z_4TX
Setting 97
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.51016G	59.12	74.00	-14.88	48.65	3	Vertical	169	1.03	-	39.98	13.24	42.75			
AV	11.51028G	48.30	54.00	-5.70	37.83	3	Vertical	169	1.03	-	39.98	13.24	42.75			
PK	17.26554G	61.03	68.20	-7.17	46.87	3	Vertical	13	1.34	-	40.63	16.34	42.81			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5755MHz_TX

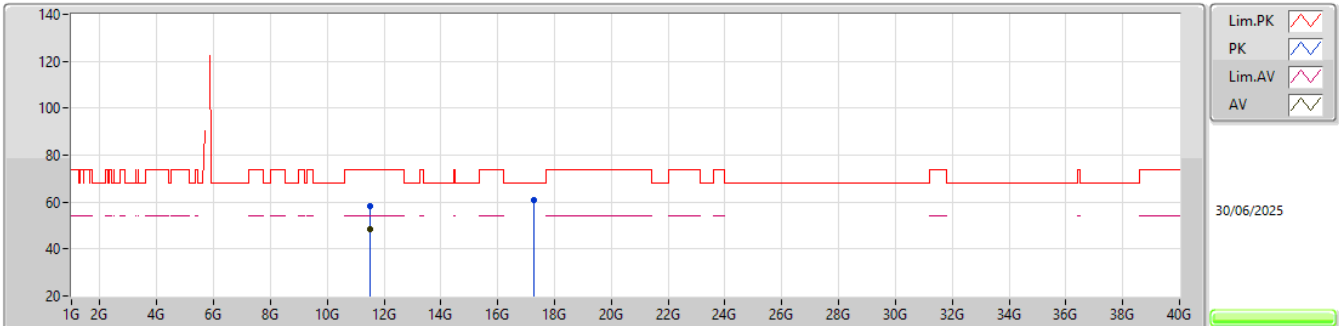EUT_Z_4TX
Setting 97
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.51047G	58.52	74.00	-15.48	48.05	3	Horizontal	128	1.64	-	39.98	13.24	42.75			
AV	11.51038G	48.48	54.00	-5.52	38.01	3	Horizontal	128	1.64	-	39.98	13.24	42.75			
PK	17.26505G	61.00	68.20	-7.20	46.84	3	Horizontal	353	1.48	-	40.63	16.34	42.81			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5795MHz_TX

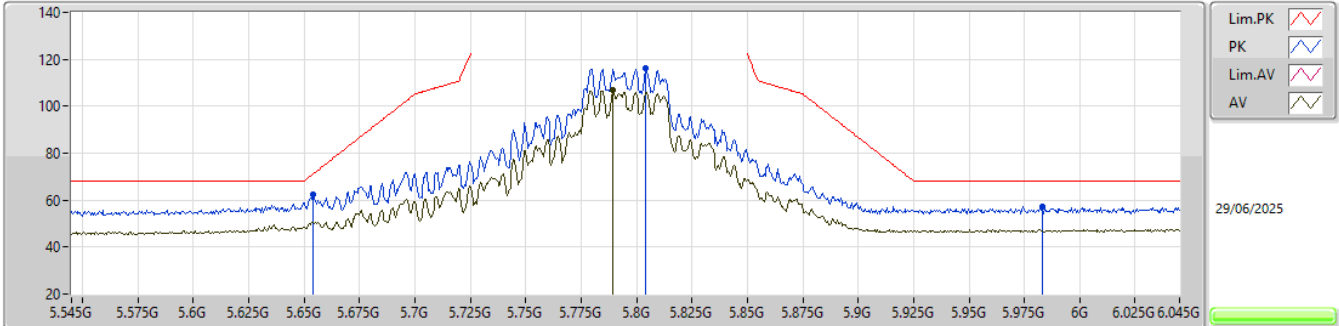


EUT_Z_4TX
Setting 108
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.654G	62.38	71.16	-8.78	65.35	3	Vertical	335.1	2.94	-	31.82	8.76	43.55			
PK	5.804G	116.22	Inf	-Inf	118.61	3	Vertical	335.1	2.94	-	32.10	8.91	43.40			
AV	5.7895G	106.66	Inf	-Inf	109.07	3	Vertical	335.1	2.94	-	32.10	8.90	43.41			
PK	5.983G	57.19	68.20	-11.01	58.92	3	Vertical	335.1	2.94	-	32.37	9.12	43.22			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5795MHz_TX

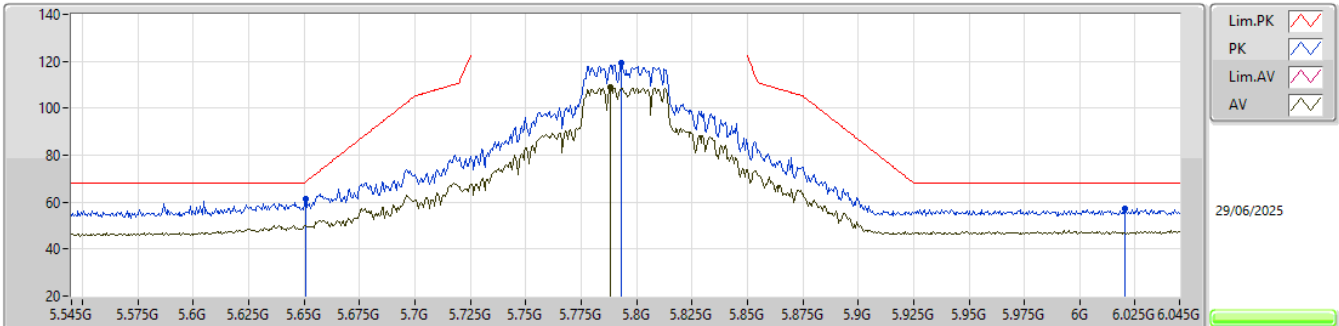


EUT_Z_4TX
Setting 108
04-I-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6505G	61.56	68.57	-7.01	64.56	3	Horizontal	0	3.00	-	31.80	8.75	43.55			
PK	5.793G	119.16	Inf	-Inf	121.57	3	Horizontal	0	3.00	-	32.10	8.90	43.41			
AV	5.788G	109.16	Inf	-Inf	111.57	3	Horizontal	0	3.00	-	32.10	8.90	43.41			
PK	6.0205G	57.33	68.20	-10.87	58.97	3	Horizontal	0	3.00	-	32.40	9.15	43.19			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5795MHz_TX

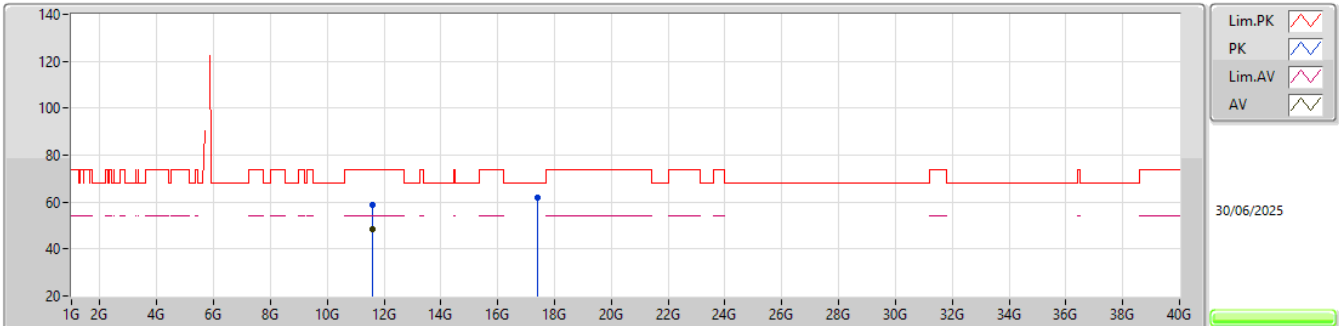EUT_Z_4TX
Setting 108
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.58969G	58.92	74.00	-15.08	48.75	3	Vertical	316	1.53	-	39.74	13.30	42.87			
AV	11.58938G	48.40	54.00	-5.60	38.23	3	Vertical	316	1.53	-	39.74	13.30	42.87			
PK	17.38532G	61.68	68.20	-6.52	46.75	3	Vertical	119	2.74	-	41.58	16.35	43.00			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5795MHz_TX

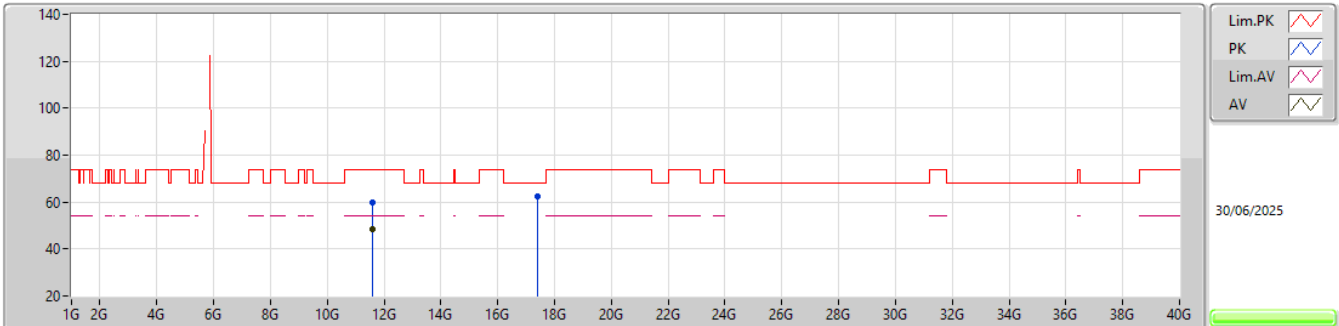EUT_Z_4TX
Setting 108
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.58931G	59.58	74.00	-14.42	49.41	3	Horizontal	154	1.86	-	39.74	13.30	42.87			
AV	11.58933G	48.56	54.00	-5.44	38.39	3	Horizontal	154	1.86	-	39.74	13.30	42.87			
PK	17.38547G	62.31	68.20	-5.89	47.38	3	Horizontal	39	2.50	-	41.58	16.35	43.00			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5775MHz_TX

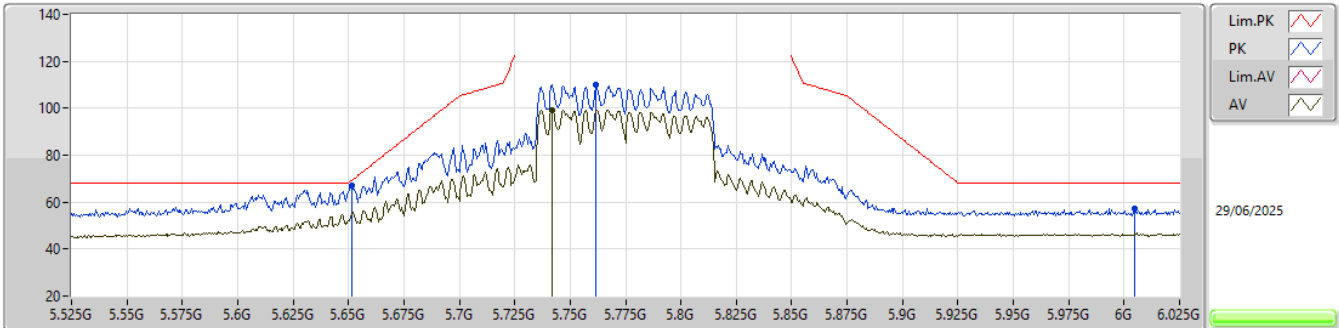EUT_Z_4TX
Setting 82
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6515G	67.03	69.31	-2.28	70.02	3	Vertical	1.2	2.64	-	31.81	8.75	43.55			
PK	5.7615G	109.78	Inf	-Inf	112.25	3	Vertical	1.2	2.64	-	32.10	8.87	43.44			
AV	5.742G	99.29	Inf	-Inf	101.82	3	Vertical	1.2	2.64	-	32.08	8.85	43.46			
PK	6.005G	57.30	68.20	-10.90	58.96	3	Vertical	1.2	2.64	-	32.40	9.14	43.20			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5775MHz_TX

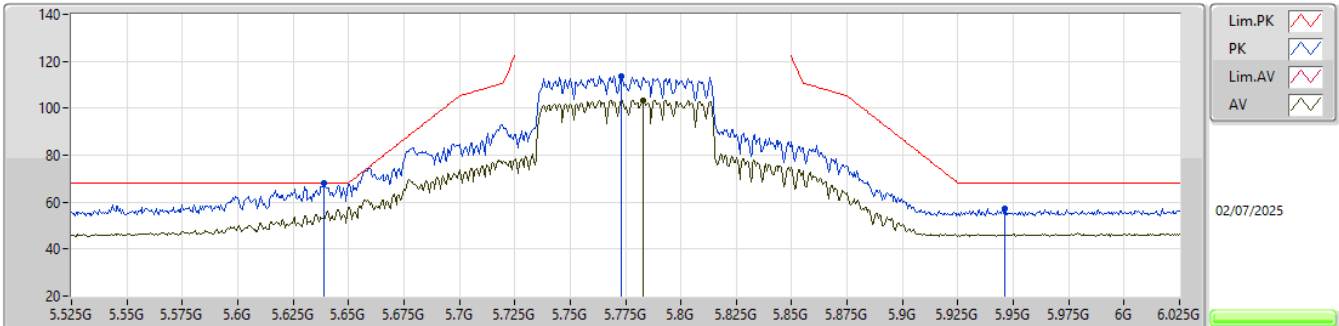EUT_Z_4TX
Setting 82
04-I-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.639G	67.97	68.20	-0.23	71.03	3	Horizontal	0	2.97	-	31.76	8.74	43.56			
PK	5.773G	113.59	Inf	-Inf	116.04	3	Horizontal	0	2.97	-	32.10	8.88	43.43			
AV	5.783G	103.45	Inf	-Inf	105.88	3	Horizontal	0	2.97	-	32.10	8.89	43.42			
PK	5.946G	57.14	68.20	-11.06	59.01	3	Horizontal	0	2.97	-	32.30	9.08	43.25			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5775MHz_TX

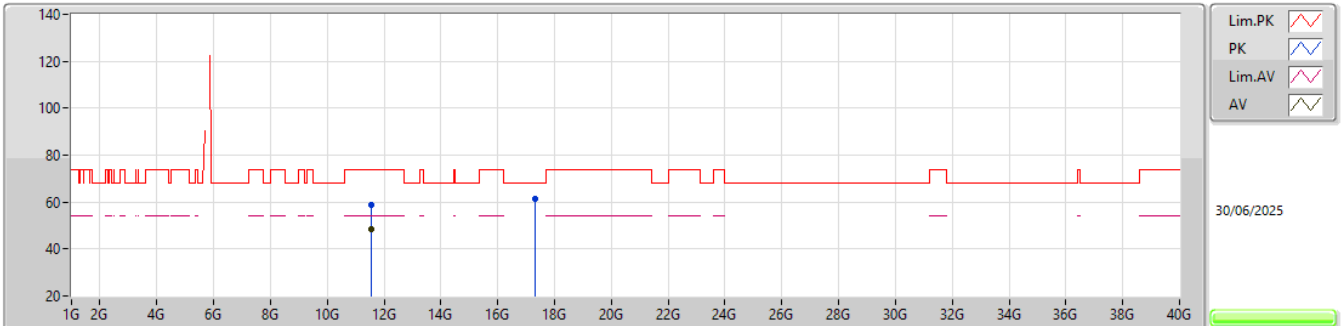


EUT_Z_4TX
Setting 82
04-I-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.5509G	58.85	74.00	-15.15	48.49	3	Vertical	25	1.31	-	39.90	13.27	42.81			
AV	11.54943G	48.69	54.00	-5.31	38.33	3	Vertical	25	1.31	-	39.90	13.27	42.81			
PK	17.32591G	61.13	68.20	-7.07	46.67	3	Vertical	179	2.99	-	41.01	16.35	42.90			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5775MHz_TX

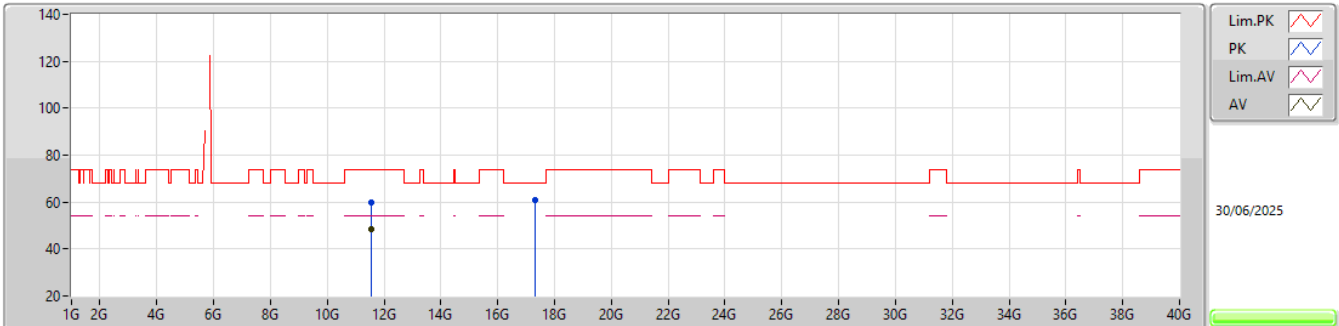

EUT_Z_4TX
Setting 82
04-I-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55003G	59.76	74.00	-14.24	49.40	3	Horizontal	338	2.29	-	39.90	13.27	42.81			
AV	11.5501G	48.49	54.00	-5.51	38.13	3	Horizontal	338	2.29	-	39.90	13.27	42.81			
PK	17.32475G	60.85	68.20	-7.35	46.40	3	Horizontal	9	1.30	-	41.00	16.35	42.90			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	Pass	PK	5.47G	68.19	68.20	-0.01	3	Horizontal	352	1.54	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

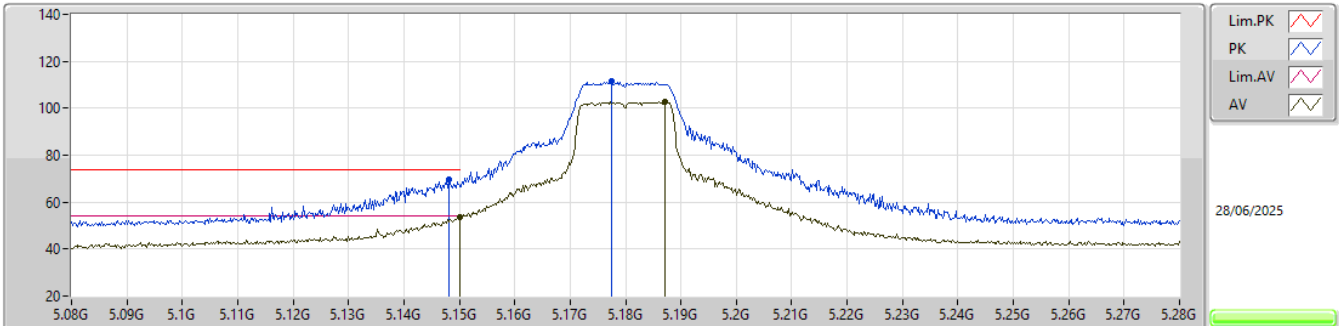


EUT_Y_1TX
Setting 58
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1482G	69.75	74.00	-4.25	59.50	3	Horizontal	1	1.84	-	33.60	7.58	30.93				
AV	5.15G	53.82	54.00	-0.18	43.57	3	Horizontal	1	1.84	-	33.60	7.58	30.93				
PK	5.1774G	111.46	Inf	-Inf	101.13	3	Horizontal	1	1.84	-	33.65	7.59	30.91				
AV	5.1872G	102.57	Inf	-Inf	92.22	3	Horizontal	1	1.84	-	33.67	7.59	30.91				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

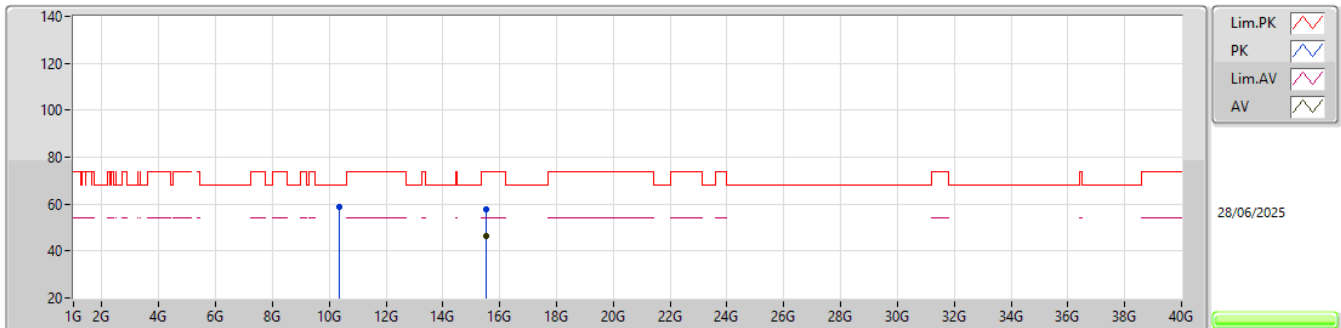


EUT Y_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.35296G	58.95	68.20	-9.25	39.13	3	Vertical	302	2.14	-	38.39	11.96	30.53			
PK	15.54078G	57.73	74.00	-16.27	37.30	3	Vertical	77	1.51	-	37.94	14.43	31.94			
AV	15.53596G	46.43	54.00	-7.57	25.97	3	Vertical	77	1.51	-	37.96	14.43	31.93			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

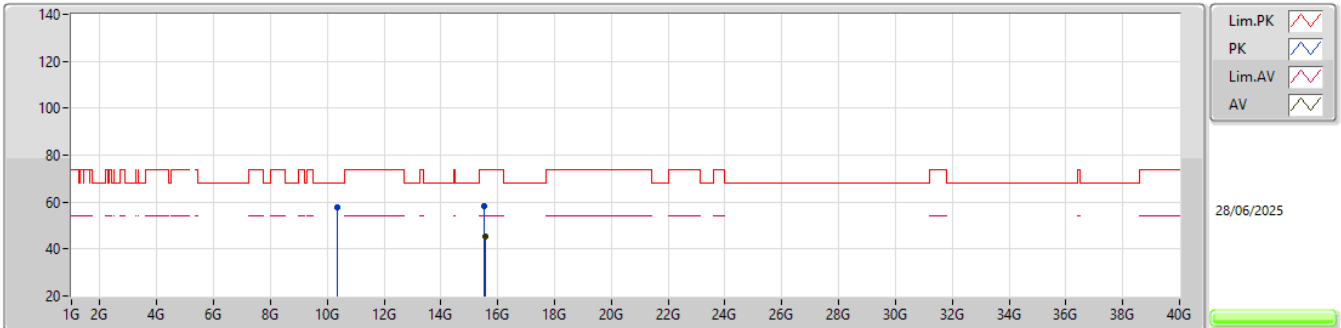


EUT_Y_1TX
Setting 108
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3587G	57.67	68.20	-10.53	37.85	3	Horizontal	310	2.81	-	38.38	11.96	30.52			
PK	15.53326G	58.27	74.00	-15.73	37.80	3	Horizontal	41	2.75	-	37.97	14.43	31.93			
AV	15.54998G	45.40	54.00	-8.60	25.00	3	Horizontal	41	2.75	-	37.90	14.44	31.94			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

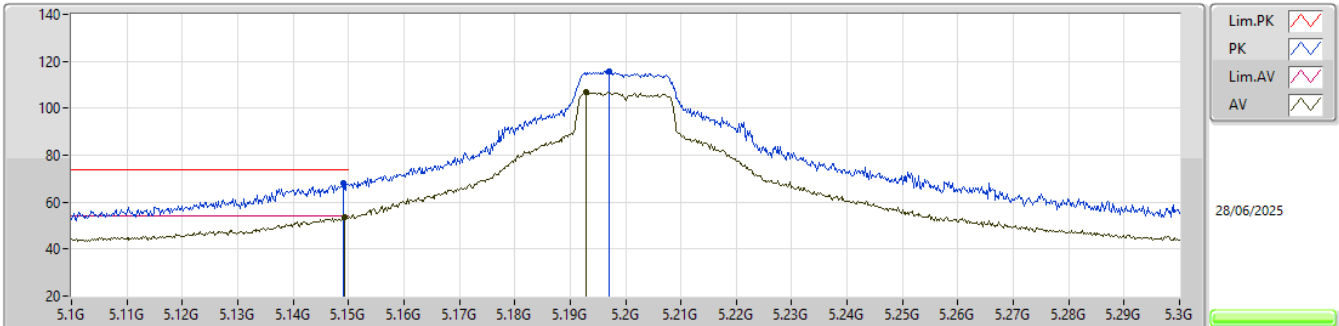


EUT_Y_1TX
Setting 74
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.149G	68.35	74.00	-5.65	58.10	3	Horizontal	360	1.85	-	33.60	7.58	30.93				
AV	5.1492G	53.80	54.00	-0.20	43.55	3	Horizontal	360	1.85	-	33.60	7.58	30.93				
PK	5.197G	115.83	Inf	-Inf	105.45	3	Horizontal	360	1.85	-	33.69	7.59	30.90				
AV	5.1928G	106.66	Inf	-Inf	96.28	3	Horizontal	360	1.85	-	33.69	7.59	30.90				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

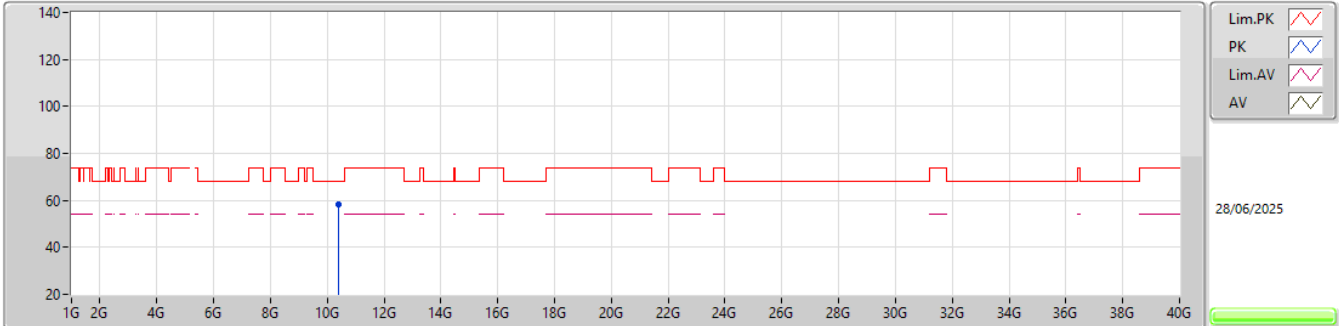


EUT_Y_1TX
Setting 74
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.39996G	58.05	68.20	-10.15	38.28	3	Vertical	14	2.78	-	38.30	11.98	30.51				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

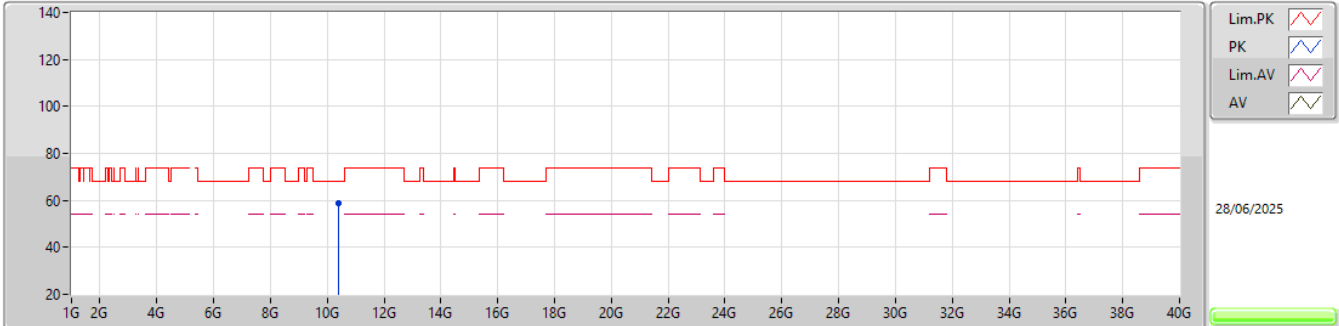


EUT_Y_1TX
Setting 74
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.39903G	58.56	68.20	-9.64	38.79	3	Horizontal	279	2.01	-	38.30	11.98	30.51				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

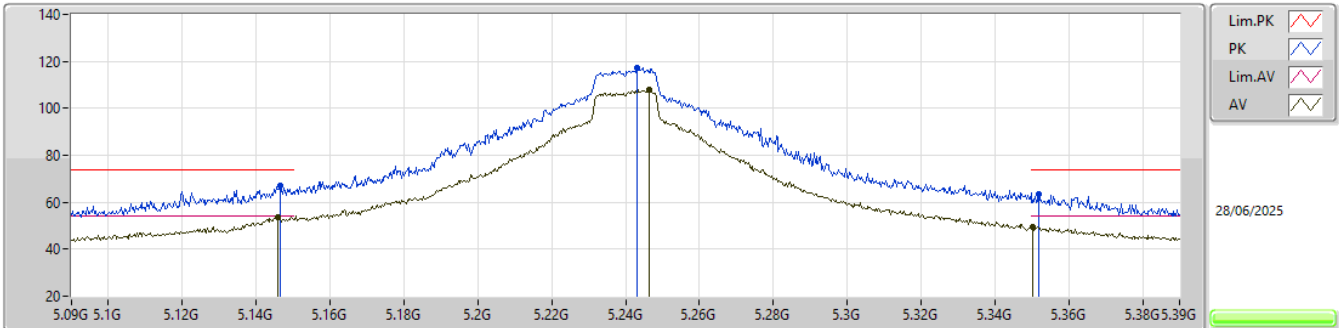


EUT_Y_1TX
Setting 84
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1464G	66.99	74.00	-7.01	56.75	3	Horizontal	355	1.88	-	33.59	7.58	30.93					
AV	5.1458G	53.77	54.00	-0.23	43.53	3	Horizontal	355	1.88	-	33.59	7.58	30.93					
PK	5.243G	117.13	Inf	-Inf	106.68	3	Horizontal	355	1.88	-	33.70	7.62	30.87					
AV	5.2463G	107.75	Inf	-Inf	97.30	3	Horizontal	355	1.88	-	33.70	7.62	30.87					
PK	5.3519G	63.23	74.00	-10.77	52.44	3	Horizontal	355	1.88	-	33.90	7.70	30.81					
AV	5.3504G	49.56	54.00	-4.44	38.77	3	Horizontal	355	1.88	-	33.90	7.70	30.81					

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

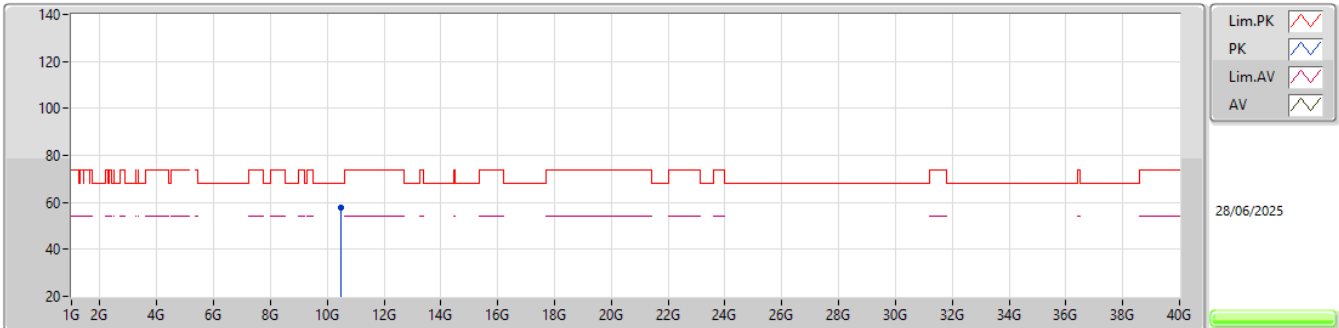


EUT_V_1TX
Setting 84
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.47913G	57.95	68.20	-10.25	38.17	3	Vertical	262	2.40	-	38.26	12.02	30.50				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

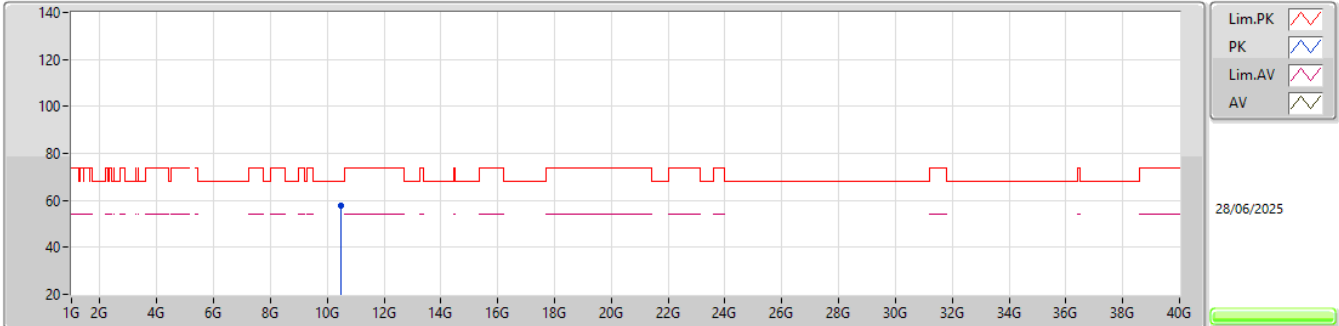


EUT_V_1TX
Setting 84
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47906G	57.88	68.20	-10.32	38.10	3	Horizontal	193	2.26	-	38.26	12.02	30.50			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

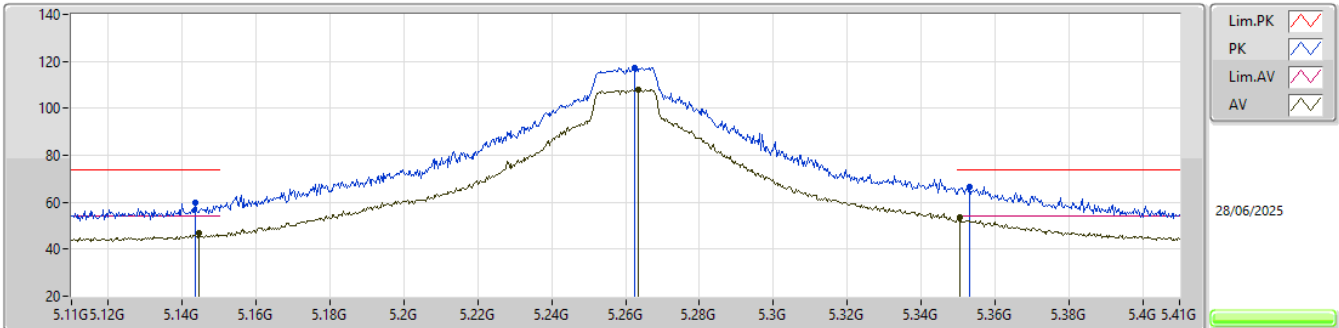


EUT_Y_1TX
Setting 88
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1436G	59.57	74.00	-14.43	49.33	3	Horizontal	2	1.48	-	33.59	7.58	30.93			
AV	5.1445G	46.68	54.00	-7.32	36.44	3	Horizontal	2	1.48	-	33.59	7.58	30.93			
PK	5.2624G	117.45	Inf	-Inf	106.95	3	Horizontal	2	1.48	-	33.72	7.64	30.86			
AV	5.2636G	108.08	Inf	-Inf	97.57	3	Horizontal	2	1.48	-	33.73	7.64	30.86			
PK	5.3533G	66.77	74.00	-7.23	55.98	3	Horizontal	2	1.48	-	33.90	7.70	30.81			
AV	5.3506G	53.84	54.00	-0.16	43.05	3	Horizontal	2	1.48	-	33.90	7.70	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

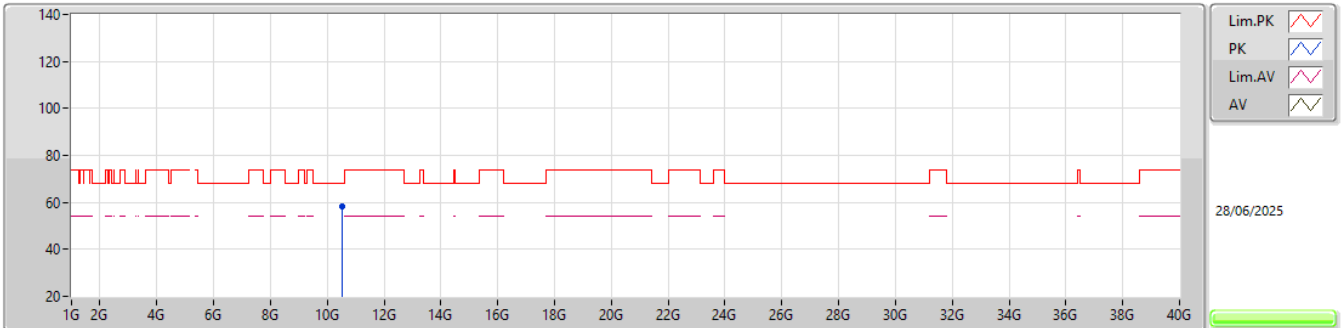


EUT_V_1TX
Setting 88
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.5208G	58.03	68.20	-10.17	38.18	3	Vertical	200	1.84	-	38.30	12.04	30.49				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

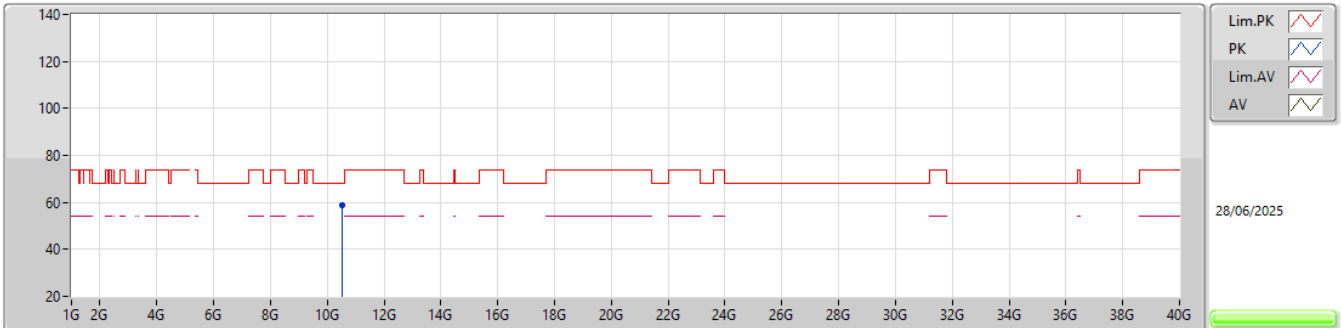


EUT_Y_1TX
Setting 88
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52058G	58.75	68.20	-9.45	38.90	3	Horizontal	36	1.74	-	38.30	12.04	30.49			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX


5300MHz_TX

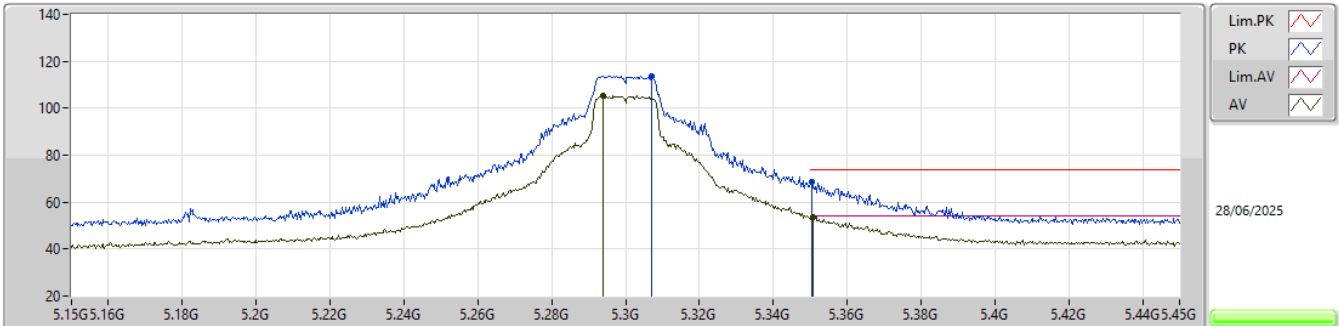EUT_Y_1TX
Setting 75
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3072G	113.85	Inf	-Inf	103.21	3	Horizontal	2	1.74	-	33.81	7.67	30.84			
AV	5.294G	105.32	Inf	-Inf	94.72	3	Horizontal	2	1.74	-	33.79	7.66	30.85			
PK	5.3504G	68.52	74.00	-5.48	57.73	3	Horizontal	2	1.74	-	33.90	7.70	30.81			
AV	5.3507G	53.81	54.00	-0.19	43.02	3	Horizontal	2	1.74	-	33.90	7.70	30.81			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

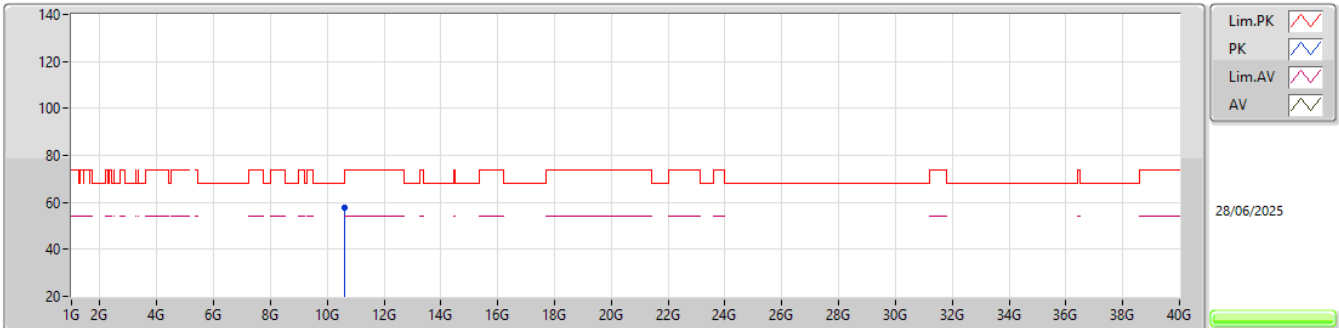


EUT_Y_1TX
Setting 75
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.60085G	57.94	74.00	-16.06	37.95	3	Vertical	92	2.31	-	38.40	12.08	30.49				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

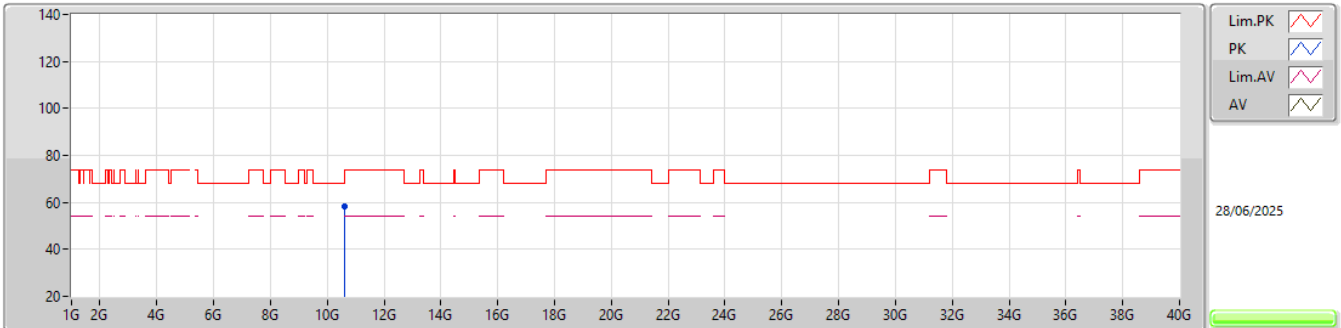


EUT_Y_1TX
Setting 75
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.60073G	58.26	74.00	-15.74	38.27	3	Horizontal	217	2.95	-	38.40	12.08	30.49				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

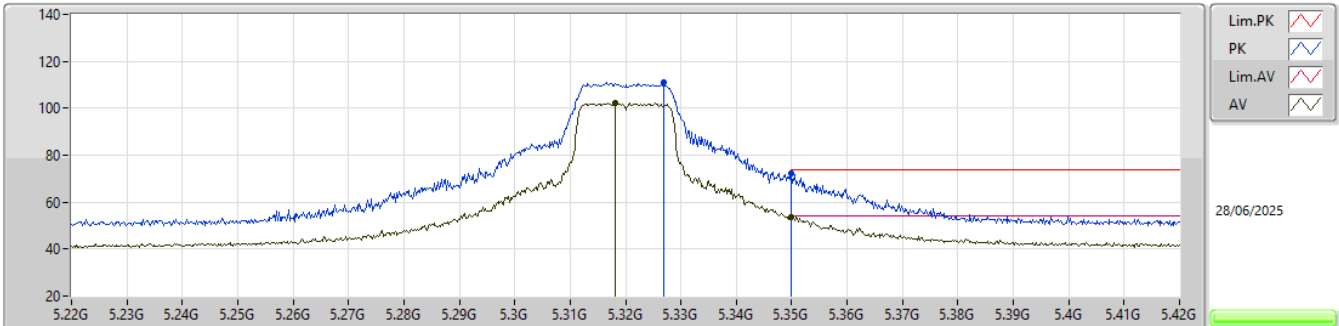


EUT_Y_1TX
Setting 60
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.327G	110.93	Inf	-Inf	100.22	3	Horizontal	-0	1.80	-	33.85	7.69	30.83
AV	5.3182G	102.23	Inf	-Inf	91.54	3	Horizontal	-0	1.80	-	33.84	7.68	30.83
PK	5.35G	72.09	74.00	-1.91	61.30	3	Horizontal	-0	1.80	-	33.90	7.70	30.81
AV	5.35G	53.87	54.00	-0.13	43.08	3	Horizontal	-0	1.80	-	33.90	7.70	30.81

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

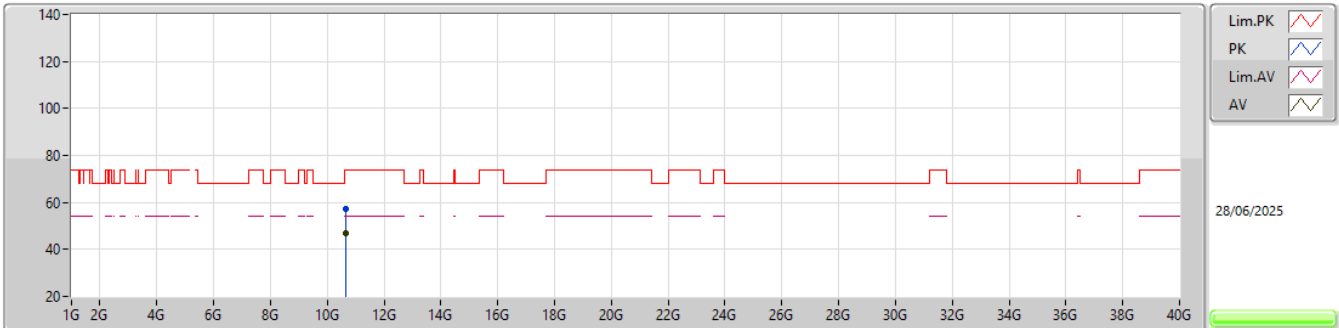


EUT_V_1TX
Setting 60
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.64036G	57.40	74.00	-16.60	37.39	3	Vertical	172	1.81	-	38.40	12.10	30.49			
AV	10.63908G	46.84	54.00	-7.16	26.83	3	Vertical	172	1.81	-	38.40	12.10	30.49			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

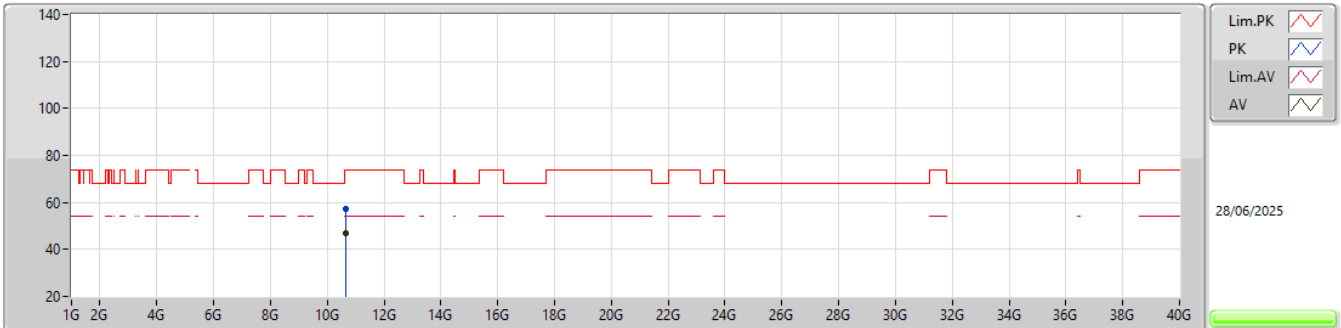


EUT_V_1TX
Setting 60
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6396G	57.36	74.00	-16.64	37.35	3	Horizontal	257	1.31	-	38.40	12.10	30.49			
AV	10.64032G	47.14	54.00	-6.86	27.13	3	Horizontal	257	1.31	-	38.40	12.10	30.49			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

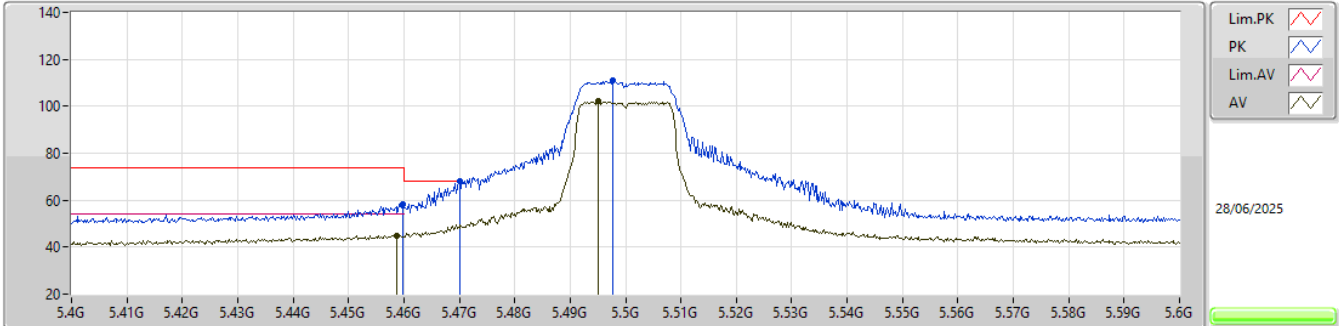


EUT Y_1TX
Setting 54
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4598G	58.17	74.00	-15.83	47.22	3	Horizontal	352	1.54	-	33.92	7.78	30.75			
AV	5.4586G	44.93	54.00	-9.07	33.98	3	Horizontal	352	1.54	-	33.92	7.78	30.75			
PK	5.47G	68.19	68.20	-0.01	57.22	3	Horizontal	352	1.54	-	33.94	7.78	30.75			
PK	5.4976G	111.03	Inf	-Inf	99.96	3	Horizontal	352	1.54	-	34.00	7.80	30.73			
AV	5.495G	102.27	Inf	-Inf	91.21	3	Horizontal	352	1.54	-	33.99	7.80	30.73			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

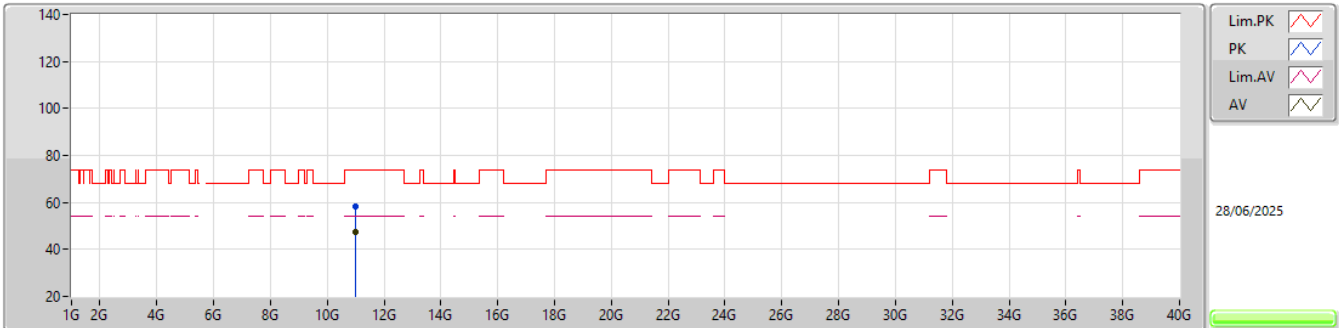


EUT_V_1TX
Setting 54
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00089G	58.06	74.00	-15.94	37.85	3	Vertical	19	2.67	-	38.40	12.29	30.48			
AV	11.00075G	47.22	54.00	-6.78	27.01	3	Vertical	19	2.67	-	38.40	12.29	30.48			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

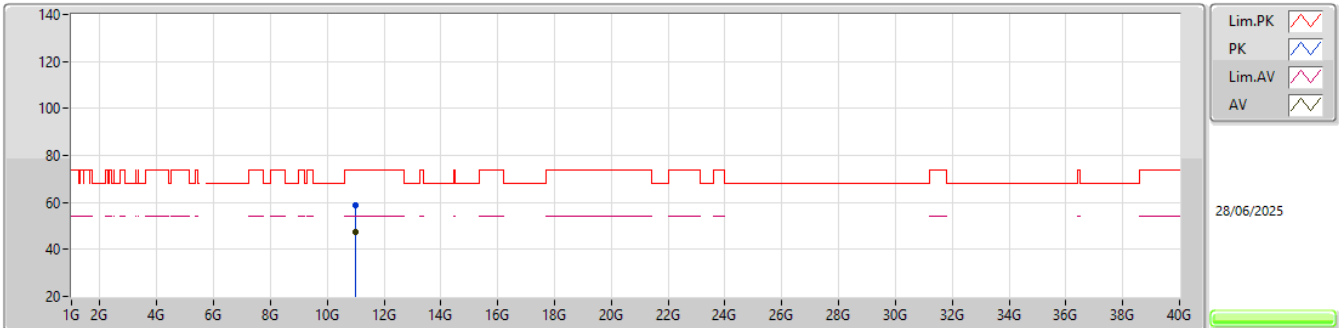


EUT_V_1TX
Setting 54
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0001G	58.72	74.00	-15.28	38.51	3	Horizontal	89	2.25	-	38.40	12.29	30.48			
AV	11.00067G	47.55	54.00	-6.45	27.34	3	Horizontal	89	2.25	-	38.40	12.29	30.48			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

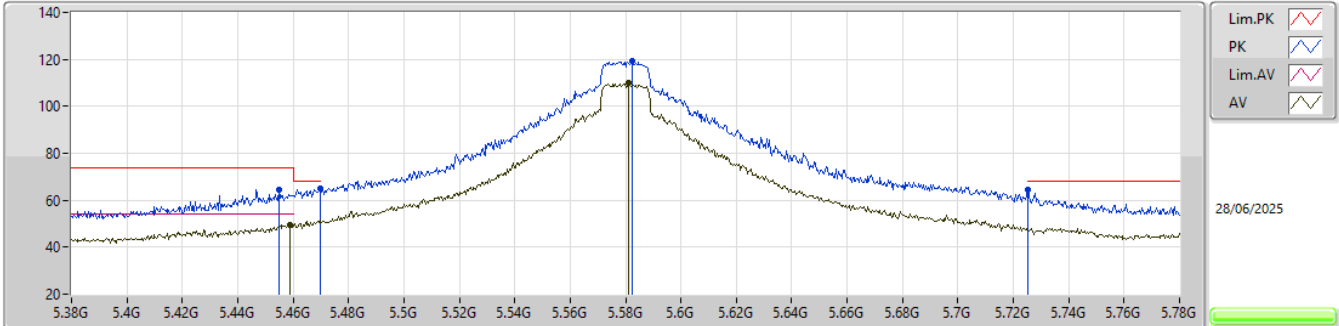


EUT_Y_1TX
Setting 108
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4548G	64.58	74.00	-9.42	53.66	3	Horizontal	360	1.80	-	33.91	7.77	30.76			
AV	5.4588G	49.68	54.00	-4.32	38.73	3	Horizontal	360	1.80	-	33.92	7.78	30.75			
PK	5.4696G	64.76	68.20	-3.44	53.79	3	Horizontal	360	1.80	-	33.94	7.78	30.75			
PK	5.5824G	119.22	Inf	-Inf	108.04	3	Horizontal	360	1.80	-	34.04	7.85	30.71			
AV	5.5812G	109.85	Inf	-Inf	98.67	3	Horizontal	360	1.80	-	34.04	7.85	30.71			
PK	5.7252G	64.56	68.20	-3.64	53.16	3	Horizontal	360	1.80	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

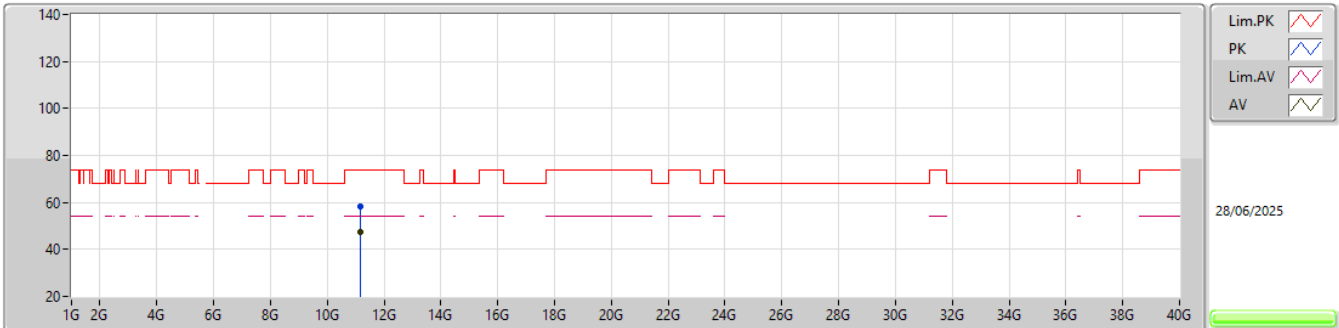


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.15914G	58.10	74.00	-15.90	37.78	3	Vertical	43	1.68	-	38.50	12.37	30.55			
AV	11.16093G	47.16	54.00	-6.84	26.84	3	Vertical	43	1.68	-	38.50	12.37	30.55			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

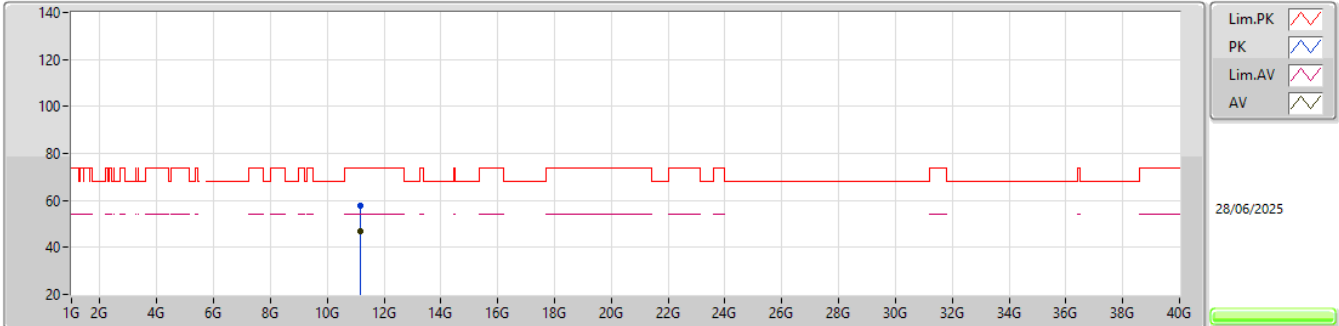


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.15959G	57.94	74.00	-16.06	37.62	3	Horizontal	239	1.55	-	38.50	12.37	30.55			
AV	11.16098G	46.85	54.00	-7.15	26.53	3	Horizontal	239	1.55	-	38.50	12.37	30.55			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

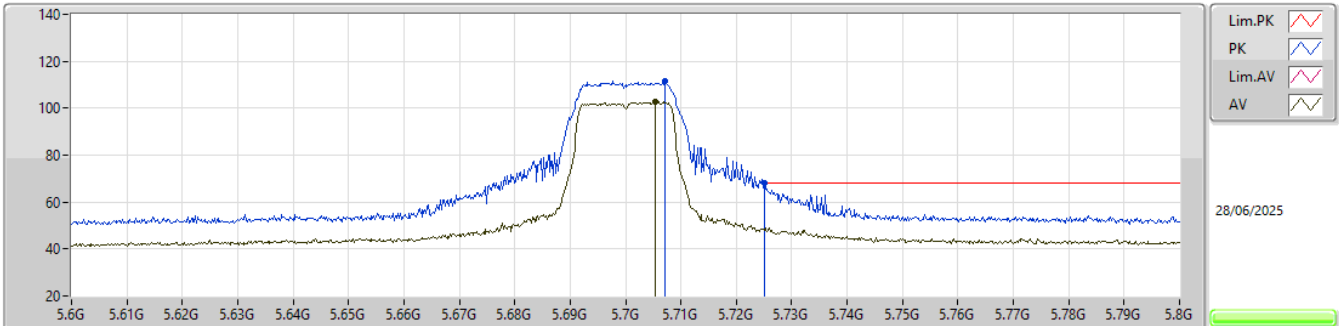EUT_Y_1TX
Setting 52
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7072G	111.57	Inf	-Inf	100.20	3	Horizontal	354	1.80	-	34.00	8.05	30.68			
AV	5.7054G	102.75	Inf	-Inf	91.39	3	Horizontal	354	1.80	-	34.00	8.04	30.68			
PK	5.725G	67.98	68.20	-0.22	56.58	3	Horizontal	354	1.80	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5700MHz_TX

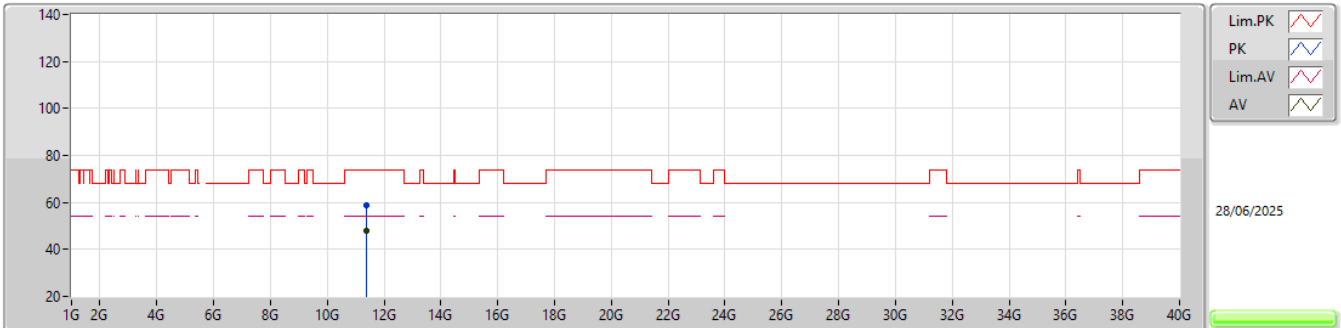


EUT_V_1TX
Setting 52
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39974G	58.77	74.00	-15.23	38.24	3	Vertical	315	1.25	-	38.70	12.49	30.66			
AV	11.39982G	47.86	54.00	-6.14	27.33	3	Vertical	315	1.25	-	38.70	12.49	30.66			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5700MHz_TX

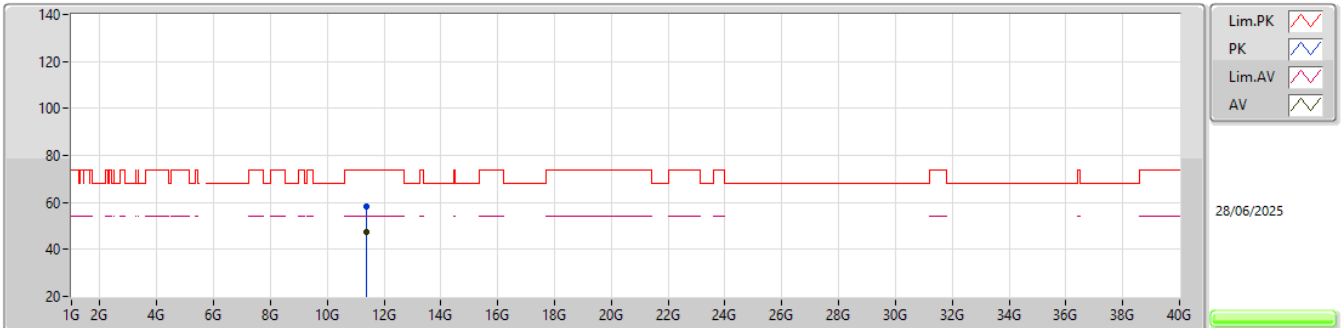


EUT_V_1TX
Setting 52
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40062G	58.38	74.00	-15.62	37.85	3	Horizontal	19	1.06	-	38.70	12.49	30.66			
AV	11.40038G	47.63	54.00	-6.37	27.10	3	Horizontal	19	1.06	-	38.70	12.49	30.66			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

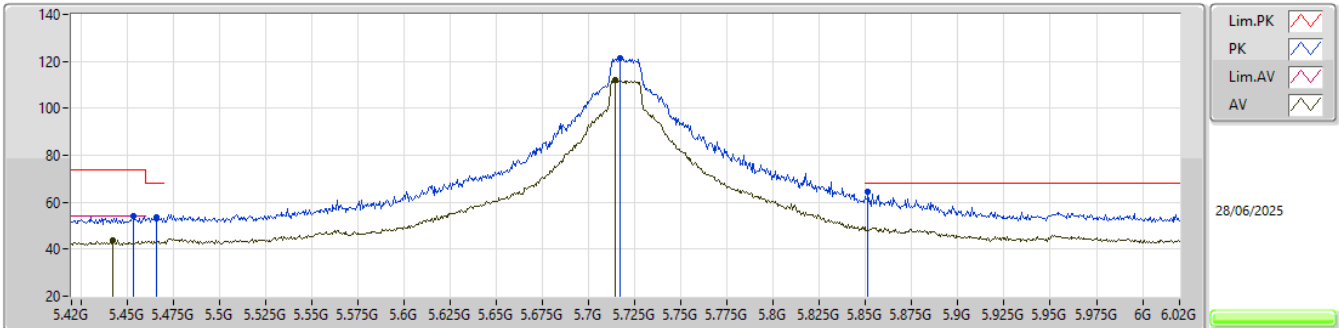EUT_Y_1TX
Setting 108
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4536G	54.11	74.00	-19.89	43.19	3	Horizontal	352	1.80	-	33.91	7.77	30.76			
AV	5.4422G	43.87	54.00	-10.13	32.96	3	Horizontal	352	1.80	-	33.90	7.77	30.76			
PK	5.4662G	53.37	68.20	-14.83	42.41	3	Horizontal	352	1.80	-	33.93	7.78	30.75			
PK	5.717G	121.59	Inf	-Inf	110.21	3	Horizontal	352	1.80	-	34.00	8.06	30.68			
AV	5.7146G	112.09	Inf	-Inf	100.71	3	Horizontal	352	1.80	-	34.00	8.06	30.68			
PK	5.8514G	64.55	68.20	-3.65	53.10	3	Horizontal	352	1.80	-	33.91	8.19	30.65			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

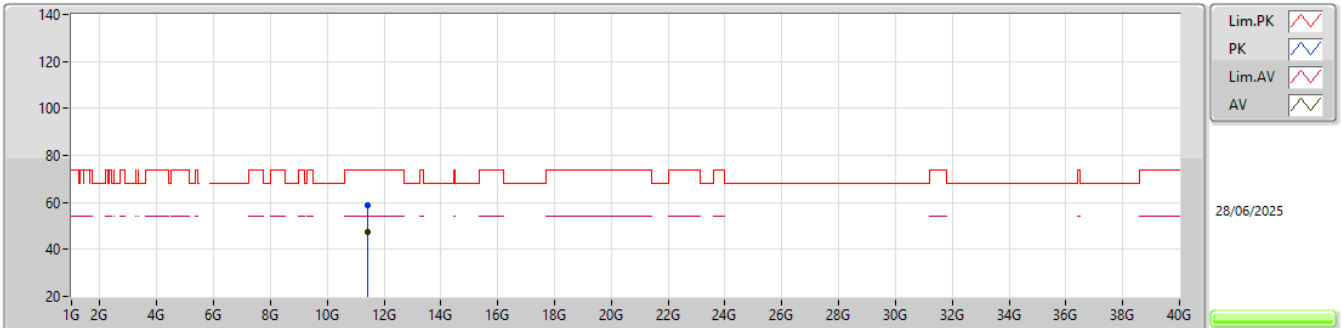


EUT V_1TX
Setting 108
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43929G	58.73	74.00	-15.27	38.12	3	Vertical	154	2.97	-	38.78	12.51	30.68			
AV	11.43939G	47.43	54.00	-6.57	26.82	3	Vertical	154	2.97	-	38.78	12.51	30.68			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

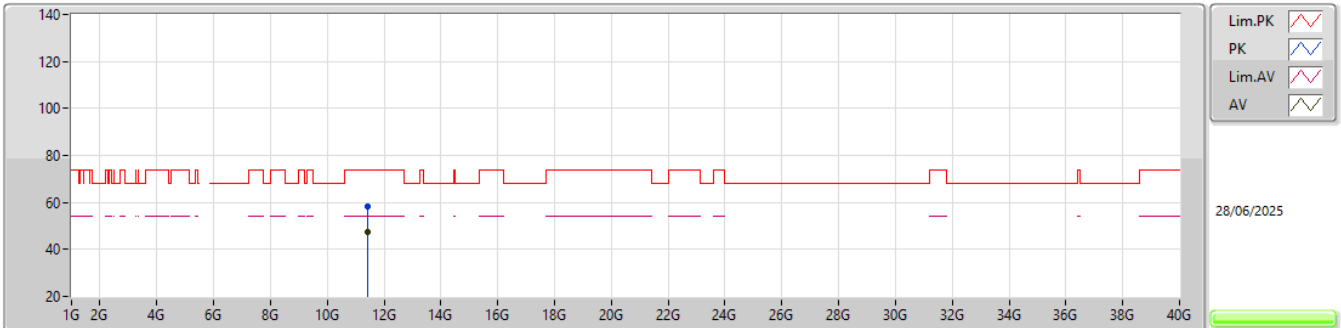


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4405G	58.28	74.00	-15.72	37.67	3	Horizontal	84	2.29	-	38.78	12.51	30.68			
AV	11.43909G	47.57	54.00	-6.43	26.96	3	Horizontal	84	2.29	-	38.78	12.51	30.68			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

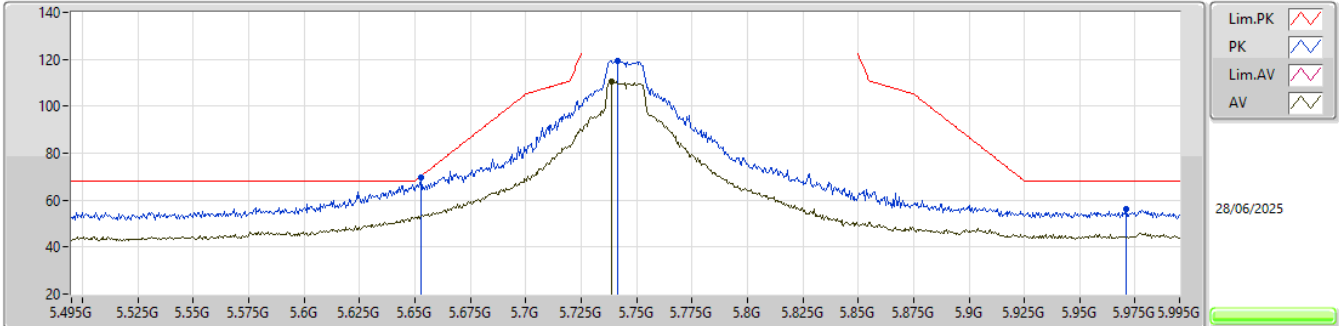


EUT_Y_1TX
Setting 88
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6525G	69.89	70.05	-0.16	58.63	3	Horizontal	354	1.80	-	34.00	7.95	30.69			
PK	5.7415G	119.54	Inf	-Inf	108.10	3	Horizontal	354	1.80	-	34.00	8.11	30.67			
AV	5.7385G	110.57	Inf	-Inf	99.14	3	Horizontal	354	1.80	-	34.00	8.10	30.67			
PK	5.971G	56.22	68.20	-11.98	44.47	3	Horizontal	354	1.80	-	34.24	8.13	30.62			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

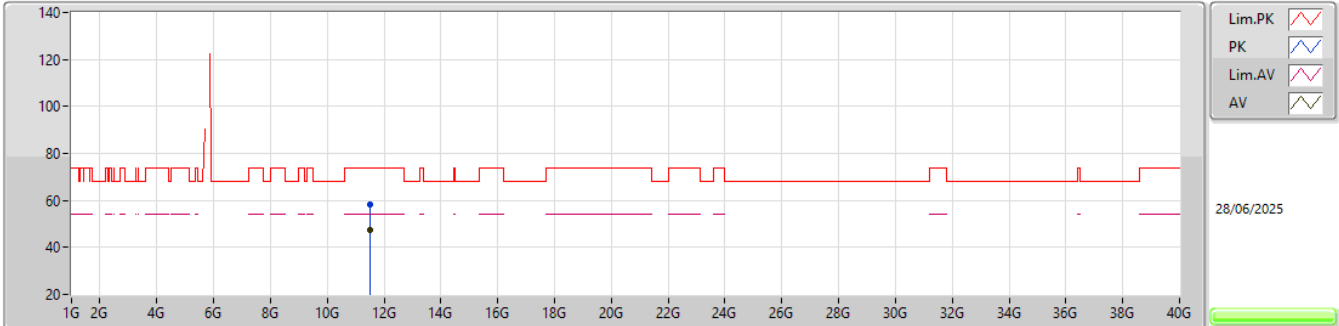


EUT_V_1TX
Setting 88
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49018G	58.41	74.00	-15.59	37.63	3	Vertical	150	2.18	-	38.96	12.53	30.71			
AV	11.49074G	47.44	54.00	-6.56	26.66	3	Vertical	150	2.18	-	38.96	12.53	30.71			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5745MHz_TX

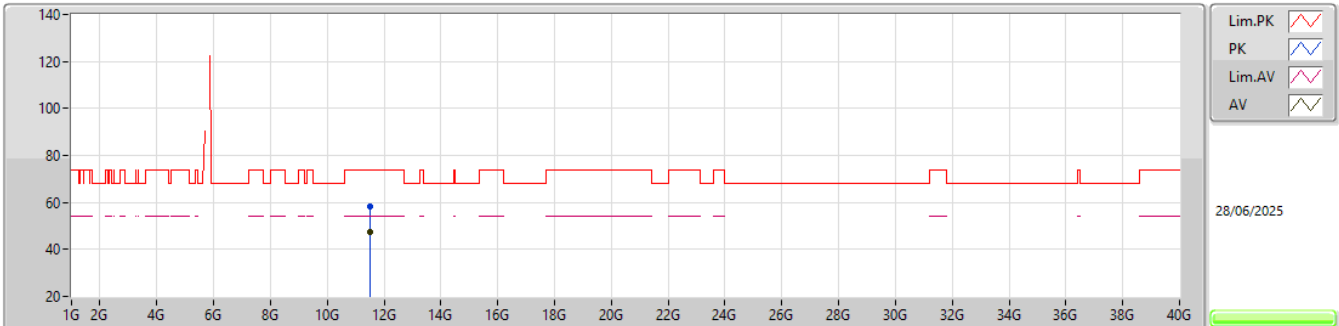
EUT_V_1TX
Setting 88
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49074G	58.46	74.00	-15.54	37.68	3	Horizontal	333	2.91	-	38.96	12.53	30.71			
AV	11.48962G	47.57	54.00	-6.43	26.79	3	Horizontal	333	2.91	-	38.96	12.53	30.71			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

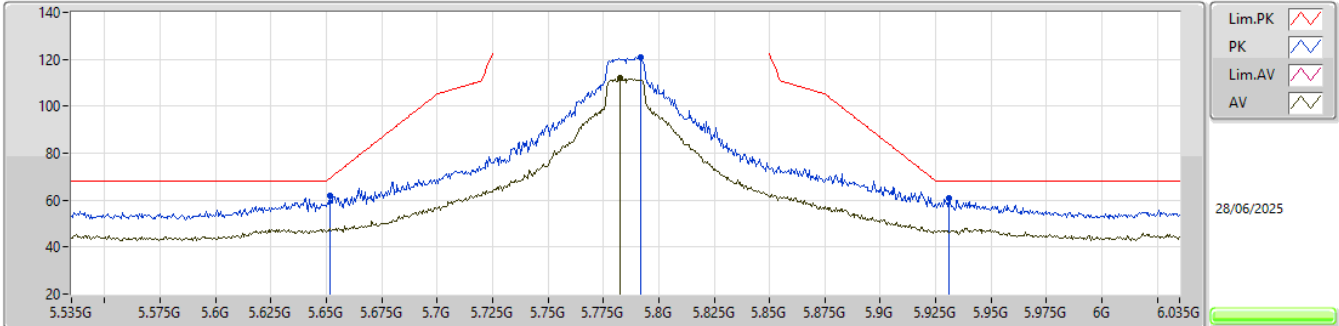


EUT_Y_1TX
Setting 108
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6515G	61.89	69.31	-7.42	50.63	3	Horizontal	356	1.71	-	34.00	7.95	30.69			
PK	5.792G	120.96	Inf	-Inf	109.42	3	Horizontal	356	1.71	-	34.00	8.20	30.66			
AV	5.7825G	111.98	Inf	-Inf	100.46	3	Horizontal	356	1.71	-	34.00	8.18	30.66			
PK	5.931G	60.81	68.20	-7.39	49.13	3	Horizontal	356	1.71	-	34.16	8.15	30.63			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5785MHz_TX

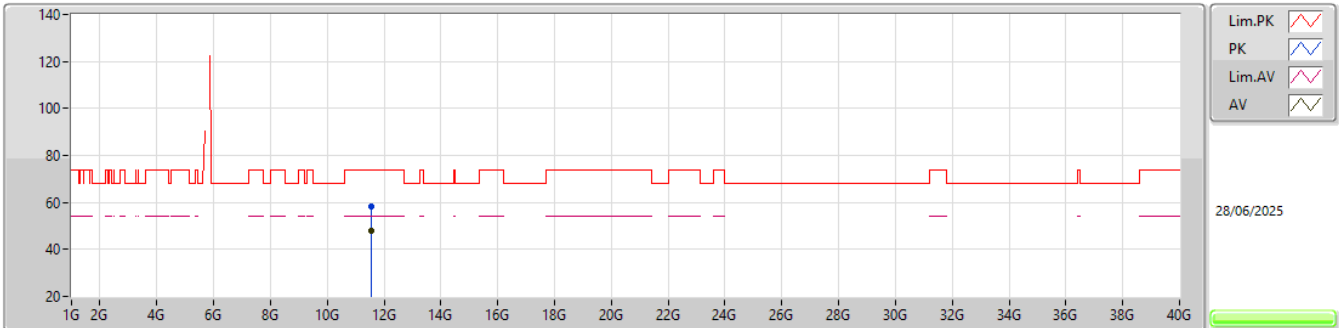
EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.57094G	58.45	74.00	-15.55	37.51	3	Vertical	76	1.82	-	39.14	12.57	30.77			
AV	11.5699G	47.91	54.00	-6.09	26.97	3	Vertical	76	1.82	-	39.14	12.57	30.77			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

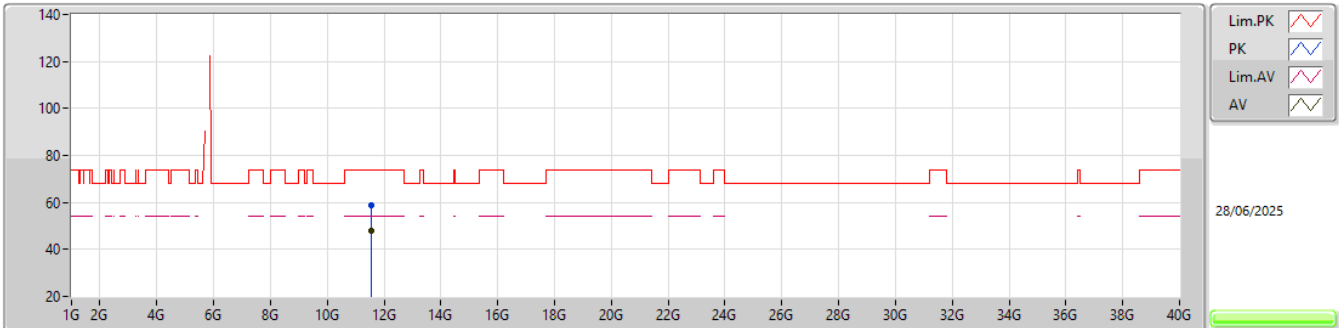


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56932G	59.00	74.00	-15.00	38.06	3	Horizontal	151	2.92	-	39.14	12.57	30.77			
AV	11.5699G	47.84	54.00	-6.16	26.90	3	Horizontal	151	2.92	-	39.14	12.57	30.77			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

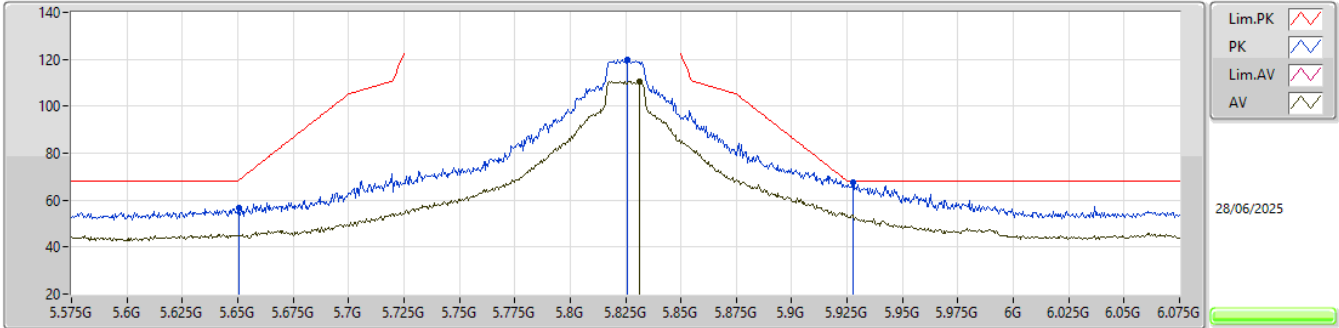


EUT_Y_1TX
Setting 106
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6505G	56.77	68.57	-11.80	45.51	3	Horizontal	353	1.80	-	34.00	7.95	30.69			
PK	5.826G	120.04	Inf	-Inf	108.54	3	Horizontal	353	1.80	-	33.95	8.20	30.65			
AV	5.8315G	110.67	Inf	-Inf	99.18	3	Horizontal	353	1.80	-	33.94	8.20	30.65			
PK	5.9275G	67.37	68.20	-0.83	55.69	3	Horizontal	353	1.80	-	34.16	8.15	30.63			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

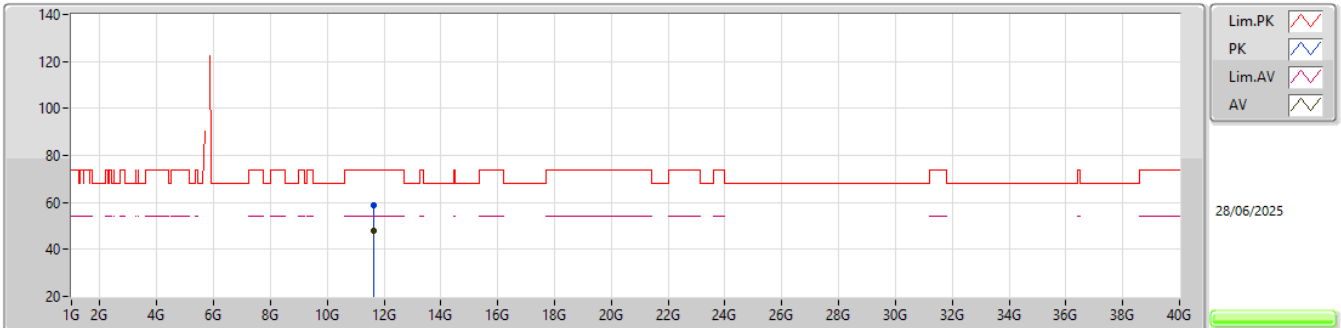


EUT_V_1TX
Setting 106
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.6501G	58.83	74.00	-15.17	37.76	3	Vertical	246	2.95	-	39.30	12.61	30.84			
AV	11.65016G	48.16	54.00	-5.84	27.09	3	Vertical	246	2.95	-	39.30	12.61	30.84			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

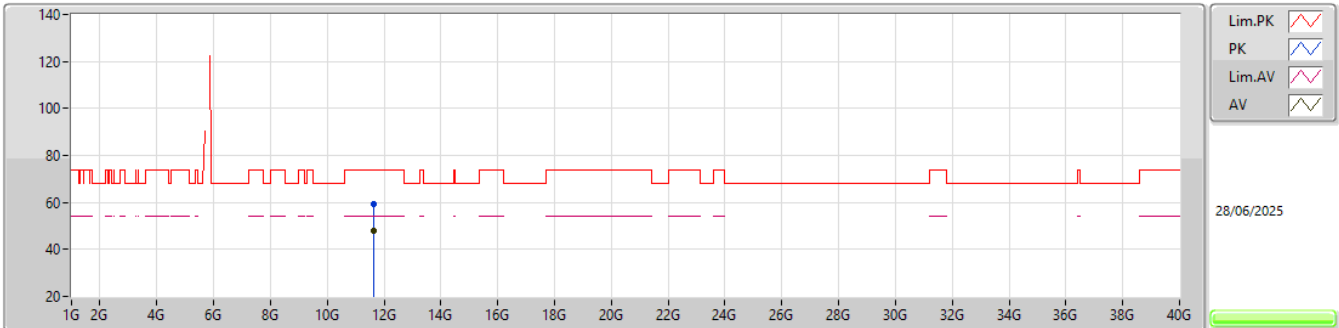


EUT_V_1TX
Setting 106
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64945G	59.15	74.00	-14.85	38.08	3	Horizontal	70	1.03	-	39.30	12.61	30.84			
AV	11.65027G	48.00	54.00	-6.00	26.93	3	Horizontal	70	1.03	-	39.30	12.61	30.84			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5180MHz_TX

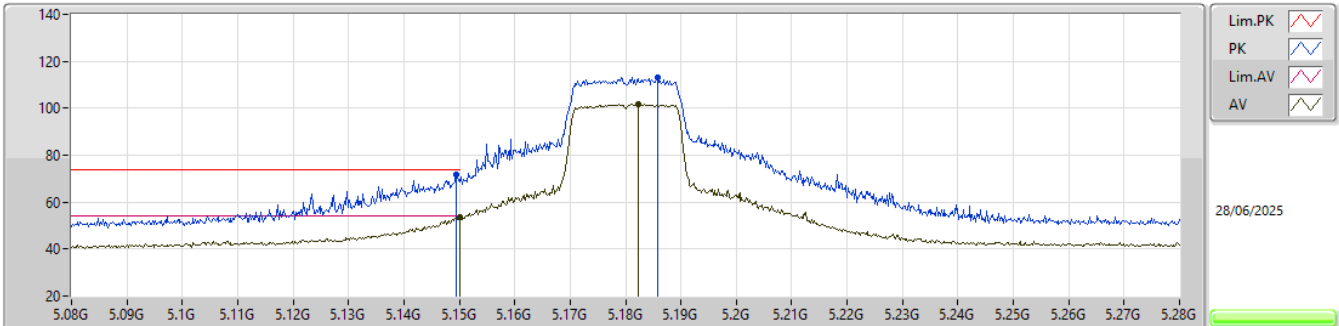EUT_Y_1TX
Setting 54
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1494G	71.67	74.00	-2.33	61.42	3	Horizontal	351	1.80	-	33.60	7.58	30.93			
AV	5.15G	53.80	54.00	-0.20	43.55	3	Horizontal	351	1.80	-	33.60	7.58	30.93			
PK	5.1858G	113.30	Inf	-Inf	102.95	3	Horizontal	351	1.80	-	33.67	7.59	30.91			
AV	5.1822G	101.86	Inf	-Inf	91.52	3	Horizontal	351	1.80	-	33.66	7.59	30.91			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

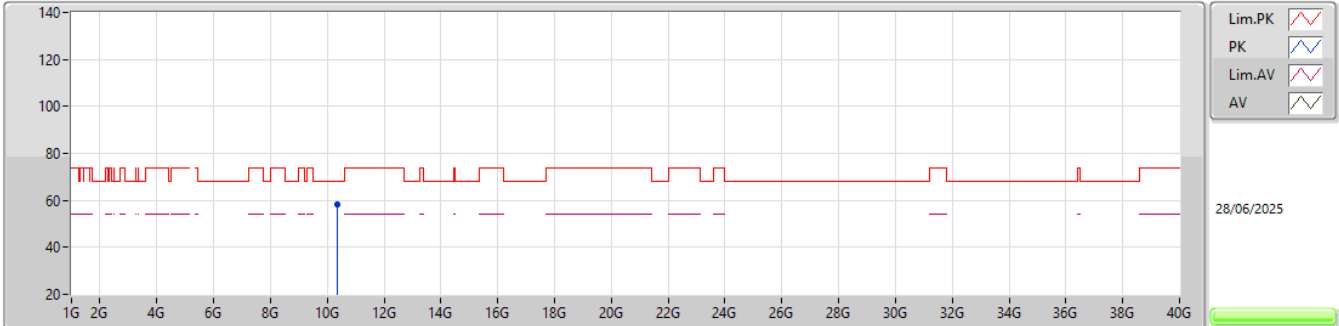


EUT_V_1TX
Setting 54
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.36074G	58.03	68.20	-10.17	38.21	3	Vertical	282	2.46	-	38.38	11.96	30.52				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

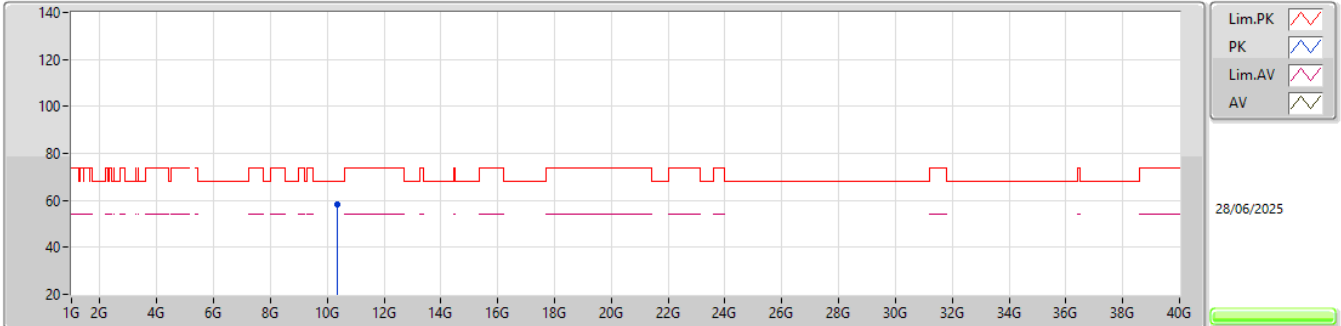


EUT_V_1TX
Setting 54
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3603G	58.23	68.20	-9.97	38.41	3	Horizontal	34	1.41	-	38.38	11.96	30.52			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5200MHz_TX

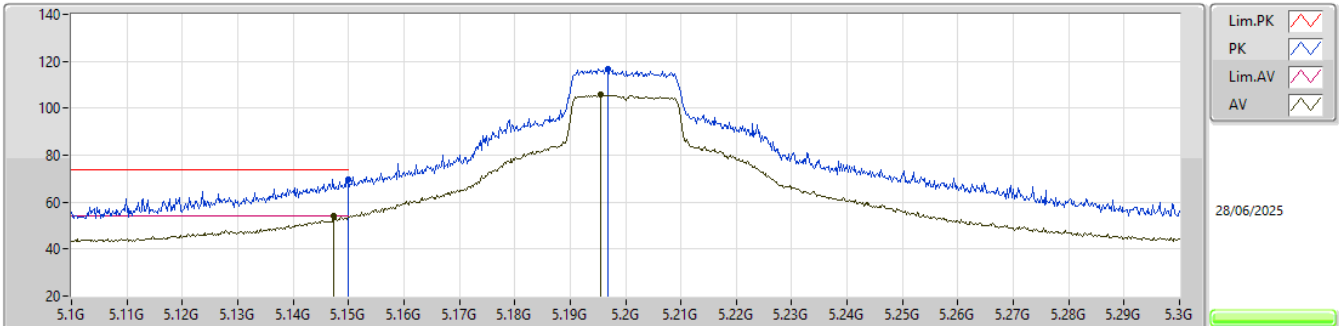EUT_Y_1TX
Setting 68
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	69.64	74.00	-4.36	59.39	3	Horizontal	357	1.91	-	33.60	7.58	30.93			
AV	5.1474G	53.89	54.00	-0.11	43.65	3	Horizontal	357	1.91	-	33.59	7.58	30.93			
PK	5.1968G	116.76	Inf	-Inf	106.38	3	Horizontal	357	1.91	-	33.69	7.59	30.90			
AV	5.1954G	105.67	Inf	-Inf	95.29	3	Horizontal	357	1.91	-	33.69	7.59	30.90			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

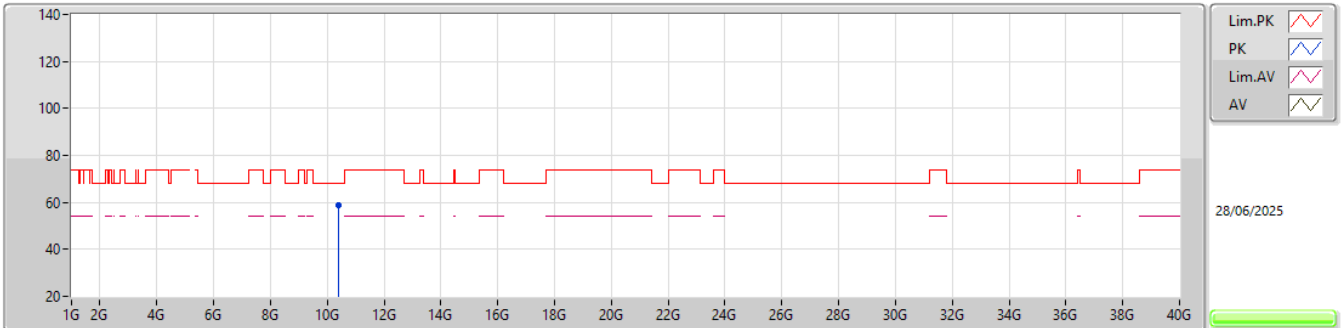


EUT_Y_1TX
Setting 68
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39924G	58.91	68.20	-9.29	39.14	3	Vertical	278	1.58	-	38.30	11.98	30.51			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

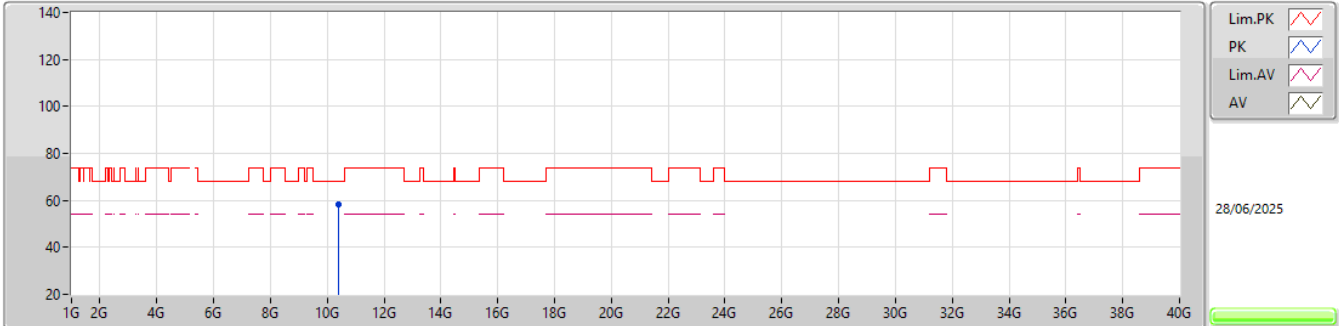


EUT_V_1TX
Setting 68
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39934G	58.10	68.20	-10.10	38.33	3	Horizontal	57	2.38	-	38.30	11.98	30.51			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TX

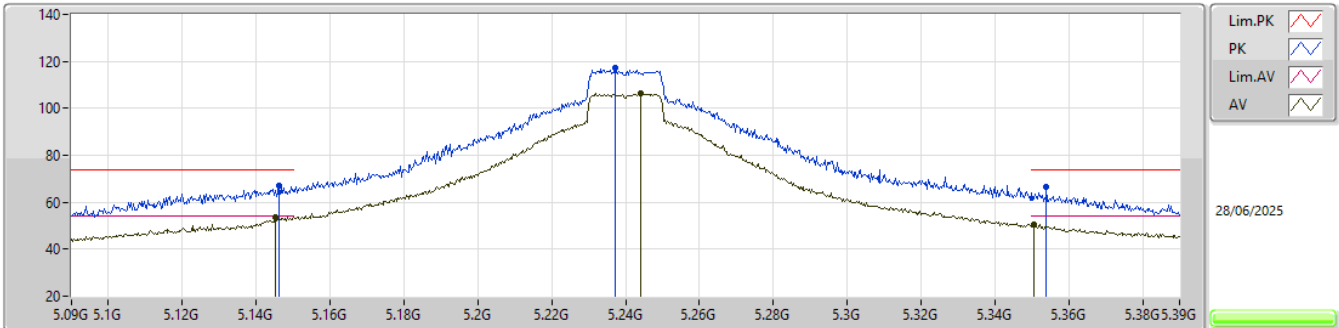


EUT_Y_1TX
Setting 83
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1461G	67.06	74.00	-6.94	56.82	3	Horizontal	356	1.62	-	33.59	7.58	30.93			
AV	5.1452G	53.74	54.00	-0.26	43.50	3	Horizontal	356	1.62	-	33.59	7.58	30.93			
PK	5.2373G	117.43	Inf	-Inf	106.99	3	Horizontal	356	1.62	-	33.70	7.62	30.88			
AV	5.2442G	106.21	Inf	-Inf	95.76	3	Horizontal	356	1.62	-	33.70	7.62	30.87			
PK	5.354G	66.41	74.00	-7.59	55.61	3	Horizontal	356	1.62	-	33.90	7.71	30.81			
AV	5.3507G	50.43	54.00	-3.57	39.64	3	Horizontal	356	1.62	-	33.90	7.70	30.81			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5240MHz_TX

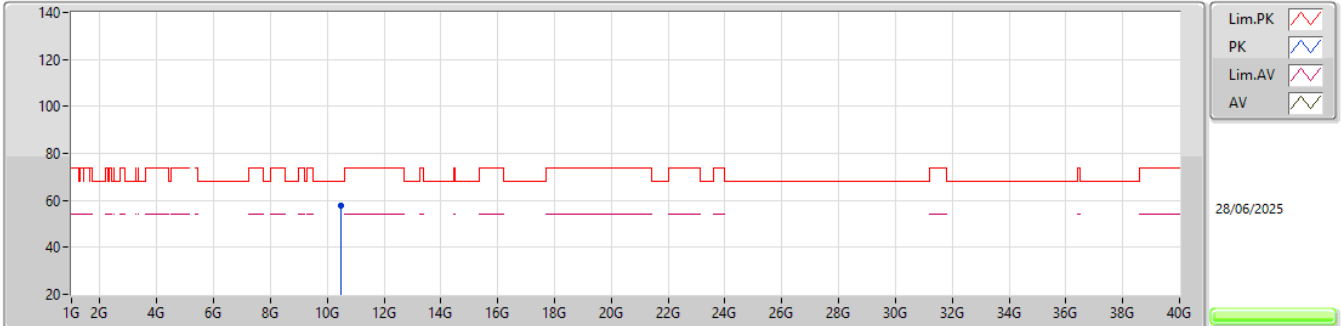


EUT_Y_1TX
Setting 83
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.47959G	57.95	68.20	-10.25	38.16	3	Vertical	168	2.43	-	38.26	12.02	30.49				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5240MHz_TX

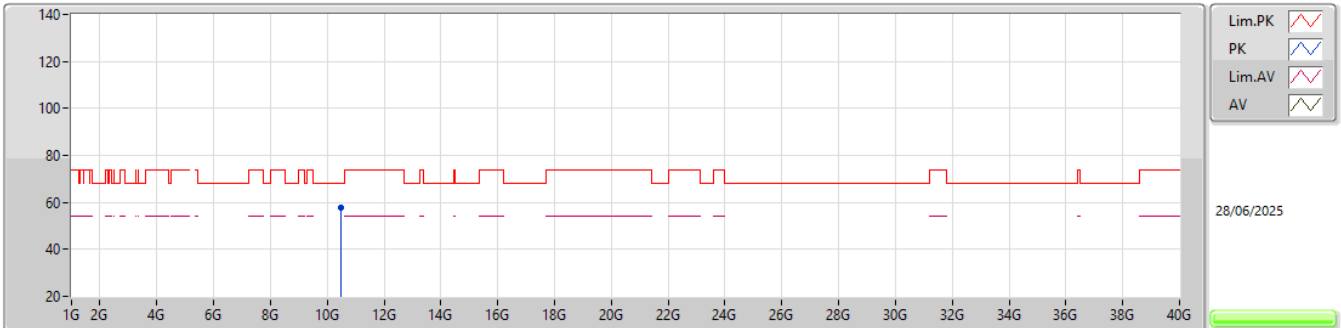


EUT_Y_1TX
Setting 83
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.47936G	57.97	68.20	-10.23	38.18	3	Horizontal	296	1.81	-	38.26	12.02	30.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

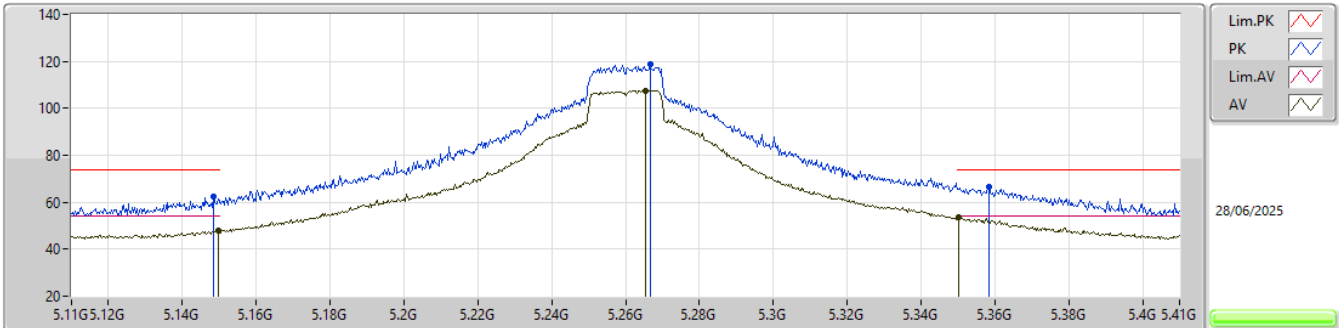EUT_Y_1TX
Setting 85
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1484G	62.21	74.00	-11.79	51.96	3	Horizontal	349	2.12	-	33.60	7.58	30.93			
AV	5.1499G	47.72	54.00	-6.28	37.47	3	Horizontal	349	2.12	-	33.60	7.58	30.93			
PK	5.2666G	118.55	Inf	-Inf	108.04	3	Horizontal	349	2.12	-	33.73	7.64	30.86			
AV	5.2654G	107.55	Inf	-Inf	97.04	3	Horizontal	349	2.12	-	33.73	7.64	30.86			
PK	5.3584G	66.45	74.00	-7.55	55.65	3	Horizontal	349	2.12	-	33.90	7.71	30.81			
AV	5.3503G	53.82	54.00	-0.18	43.03	3	Horizontal	349	2.12	-	33.90	7.70	30.81			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5260MHz_TX

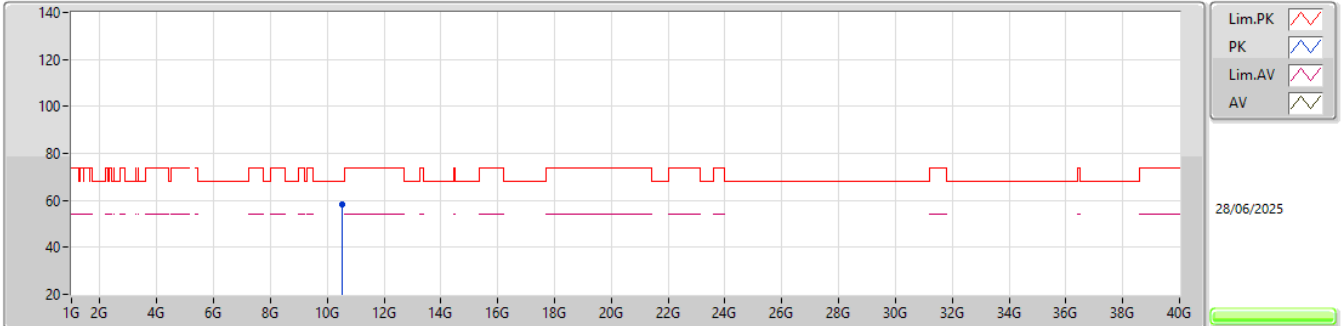


EUT_V_1TX
Setting 85
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.52001G	58.41	68.20	-9.79	38.56	3	Vertical	145	2.41	-	38.30	12.04	30.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5260MHz_TX

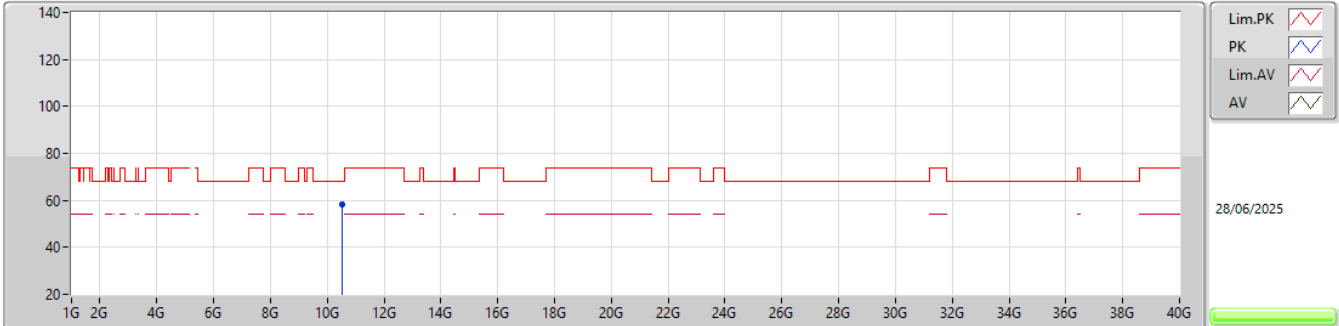


EUT_Y_1TX
Setting 85
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.51995G	58.44	68.20	-9.76	38.59	3	Horizontal	120	1.55	-	38.30	12.04	30.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5300MHz_TX

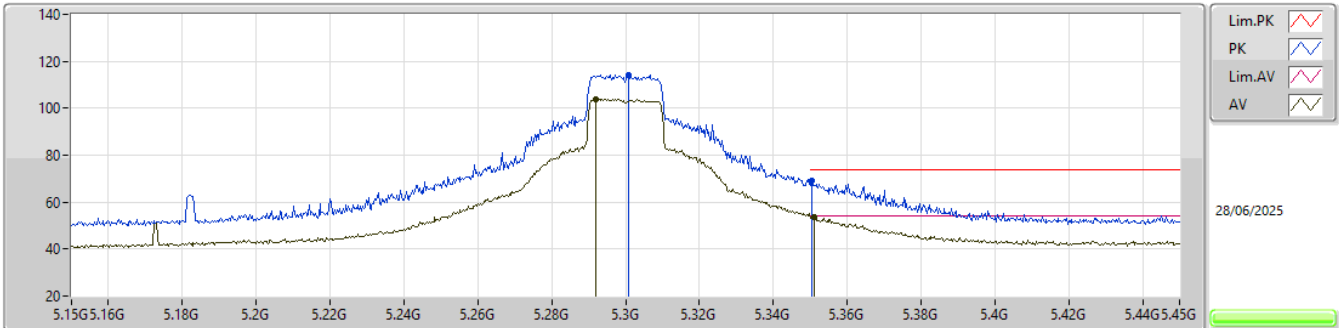EUT_Y_1TX
Setting 70
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3009G	114.29	Inf	-Inf	103.66	3	Horizontal	357	1.73	-	33.80	7.67	30.84				
AV	5.2919G	103.92	Inf	-Inf	93.33	3	Horizontal	357	1.73	-	33.78	7.66	30.85				
PK	5.3504G	68.95	74.00	-5.05	58.16	3	Horizontal	357	1.73	-	33.90	7.70	30.81				
AV	5.351G	53.76	54.00	-0.24	42.97	3	Horizontal	357	1.73	-	33.90	7.70	30.81				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

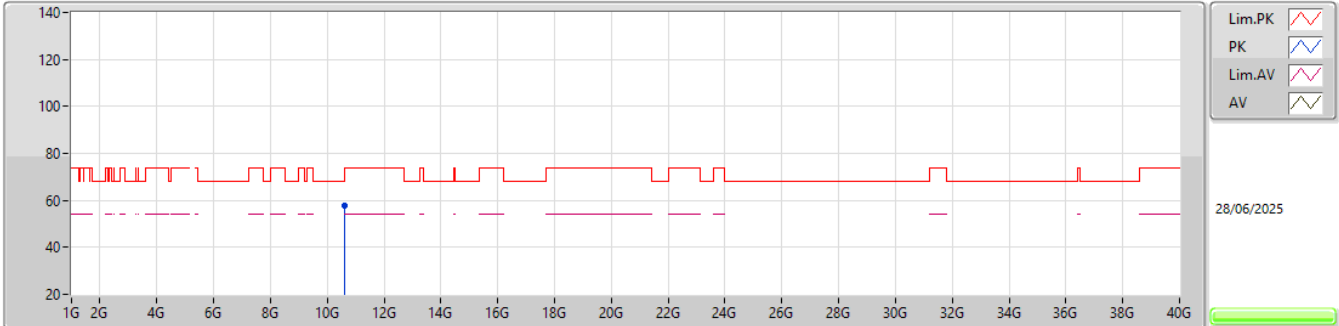


EUT_Y_1TX
Setting 70
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.60097G	57.80	74.00	-16.20	37.81	3	Vertical	288	1.83	-	38.40	12.08	30.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

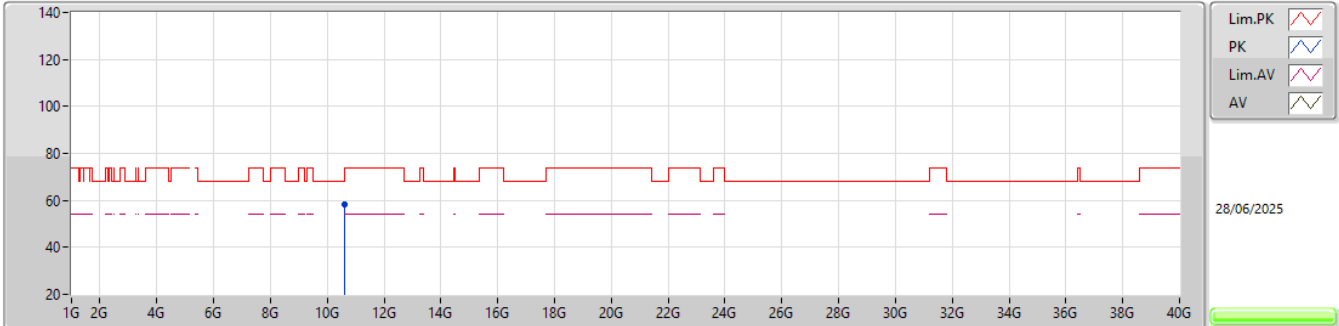


EUT_Y_1TX
Setting 70
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.60078G	58.02	74.00	-15.98	38.03	3	Horizontal	253	2.15	-	38.40	12.08	30.49				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5320MHz_TX

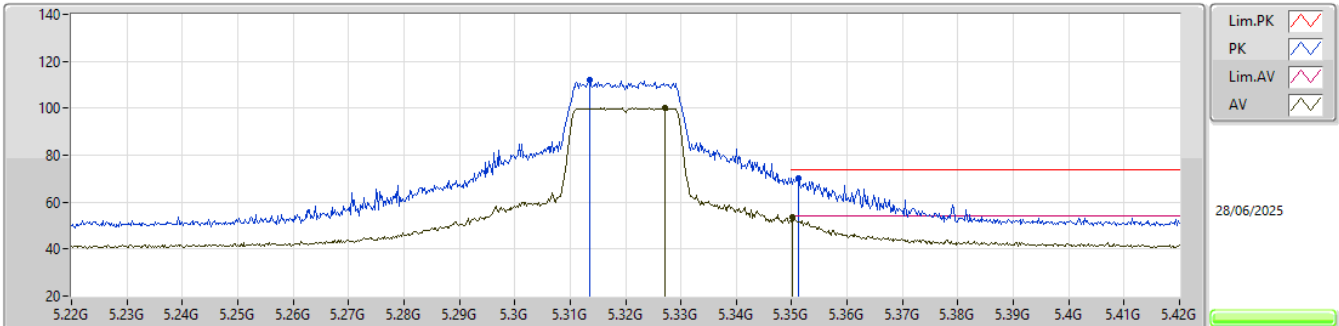EUT_Y_1TX
Setting 55
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3136G	112.10	Inf	-Inf	101.42	3	Horizontal	358	1.80	-	33.83	7.68	30.83			
AV	5.3272G	100.10	Inf	-Inf	89.39	3	Horizontal	358	1.80	-	33.85	7.69	30.83			
PK	5.3512G	70.36	74.00	-3.64	59.57	3	Horizontal	358	1.80	-	33.90	7.70	30.81			
AV	5.3502G	53.80	54.00	-0.20	43.01	3	Horizontal	358	1.80	-	33.90	7.70	30.81			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

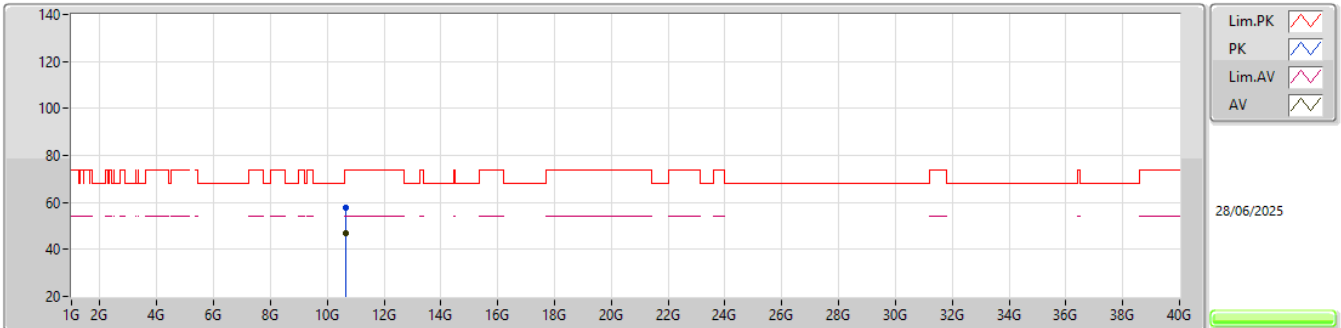


EUT_V_1TX
Setting 55
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.6396G	58.01	74.00	-15.99	38.00	3	Vertical	282	2.42	-	38.40	12.10	30.49			
AV	10.64066G	46.81	54.00	-7.19	26.80	3	Vertical	282	2.42	-	38.40	12.10	30.49			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

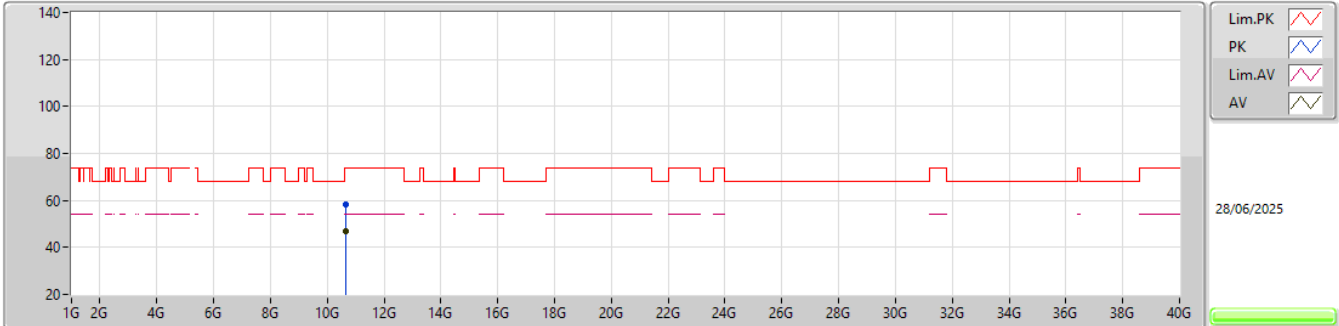


EUT_V_1TX
Setting 55
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.64087G	58.15	74.00	-15.85	38.14	3	Horizontal	214	2.11	-	38.40	12.10	30.49			
AV	10.6406G	46.79	54.00	-7.21	26.78	3	Horizontal	214	2.11	-	38.40	12.10	30.49			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

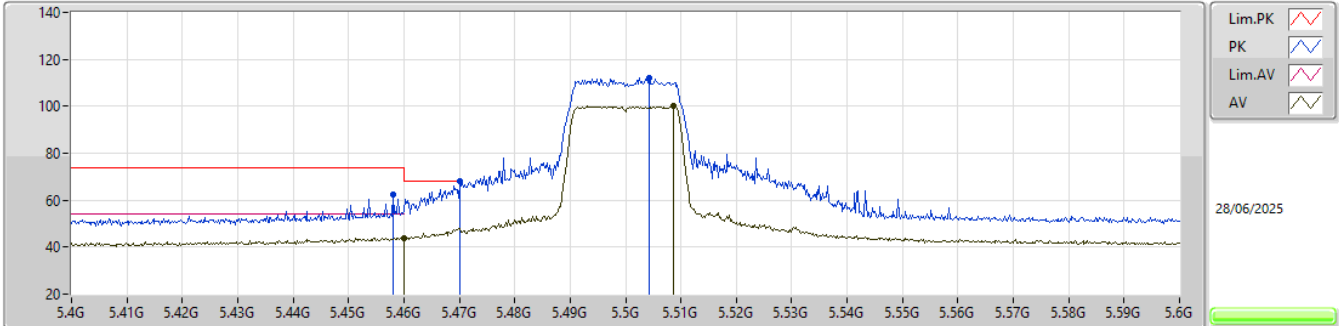


EUT_Y_1TX
Setting 48
02-D-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.458G	62.36	74.00	-11.64	51.42	3	Horizontal	352	1.79	-	33.92	7.77	30.75			
AV	5.46G	43.97	54.00	-10.03	33.02	3	Horizontal	352	1.79	-	33.92	7.78	30.75			
PK	5.47G	67.98	68.20	-0.22	57.01	3	Horizontal	352	1.79	-	33.94	7.78	30.75			
PK	5.5042G	112.14	Inf	-Inf	101.06	3	Horizontal	352	1.79	-	34.01	7.80	30.73			
AV	5.5086G	99.95	Inf	-Inf	88.85	3	Horizontal	352	1.79	-	34.02	7.81	30.73			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

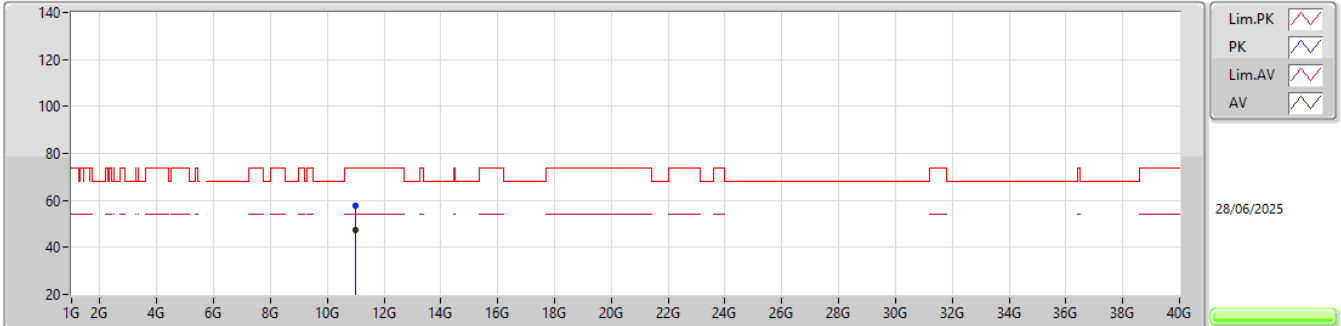


EUT_V_1TX
Setting 48
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0009G	57.94	74.00	-16.06	37.73	3	Vertical	150	1.35	-	38.40	12.29	30.48			
AV	10.99914G	47.32	54.00	-6.68	27.12	3	Vertical	150	1.35	-	38.40	12.28	30.48			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

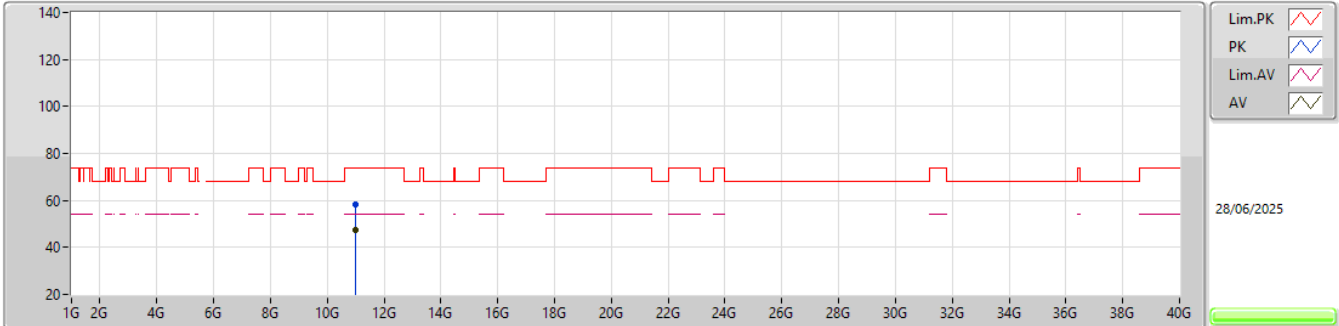


EUT_V_1TX
Setting 48
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00029G	58.33	74.00	-15.67	38.12	3	Horizontal	273	2.86	-	38.40	12.29	30.48			
AV	11.00098G	47.51	54.00	-6.49	27.30	3	Horizontal	273	2.86	-	38.40	12.29	30.48			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

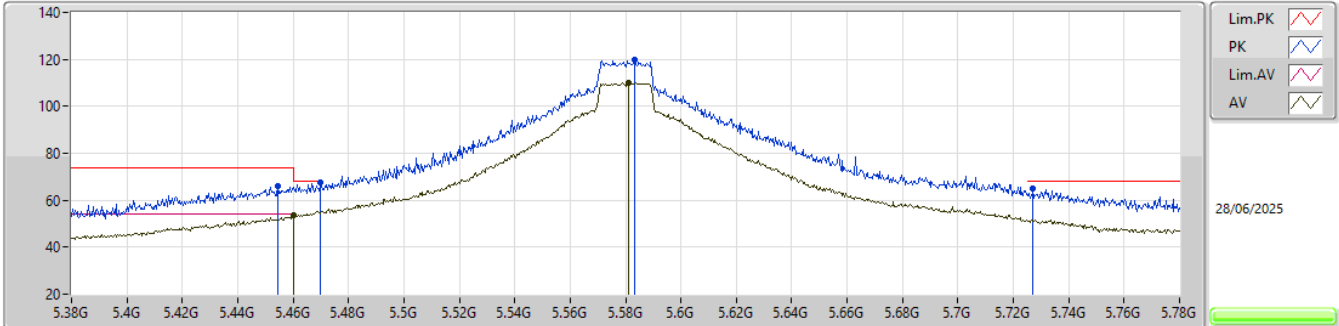


EUT_Y_1TX
Setting 107
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4544G	66.28	74.00	-7.72	55.36	3	Horizontal	354	2.02	-	33.91	7.77	30.76			
AV	5.46G	53.87	54.00	-0.13	42.92	3	Horizontal	354	2.02	-	33.92	7.78	30.75			
PK	5.47G	67.57	68.20	-0.63	56.60	3	Horizontal	354	2.02	-	33.94	7.78	30.75			
PK	5.5832G	119.74	Inf	-Inf	108.57	3	Horizontal	354	2.02	-	34.03	7.85	30.71			
AV	5.5812G	109.84	Inf	-Inf	98.66	3	Horizontal	354	2.02	-	34.04	7.85	30.71			
PK	5.7272G	65.16	68.20	-3.04	53.76	3	Horizontal	354	2.02	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

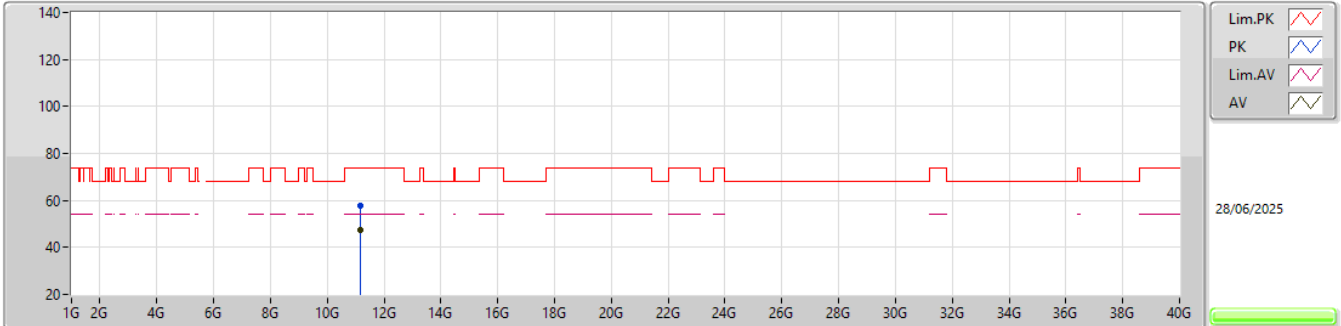


EUT_V_1TX
Setting 107
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.16092G	57.93	74.00	-16.07	37.61	3	Vertical	330	2.75	-	38.50	12.37	30.55			
AV	11.16071G	47.28	54.00	-6.72	26.96	3	Vertical	330	2.75	-	38.50	12.37	30.55			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

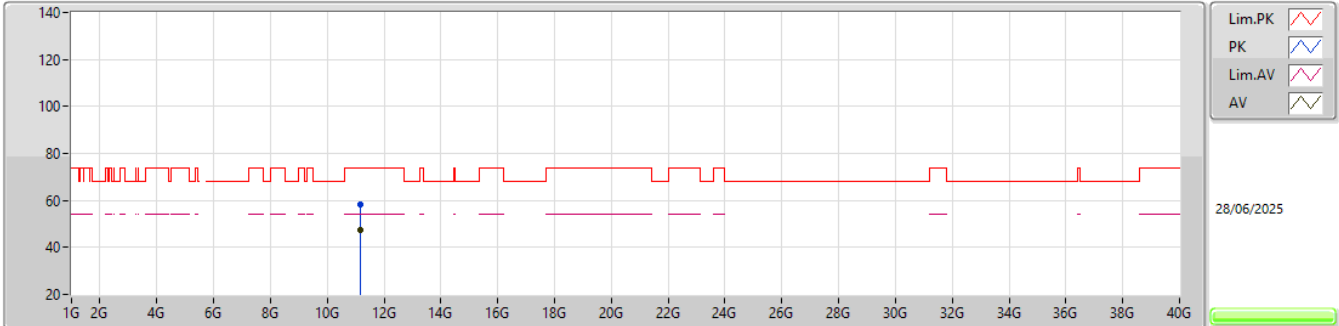


EUT_V_1TX
Setting 107
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.15943G	58.27	74.00	-15.73	37.95	3	Horizontal	306	1.70	-	38.50	12.37	30.55			
AV	11.15924G	47.19	54.00	-6.81	26.87	3	Horizontal	306	1.70	-	38.50	12.37	30.55			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5700MHz_TX

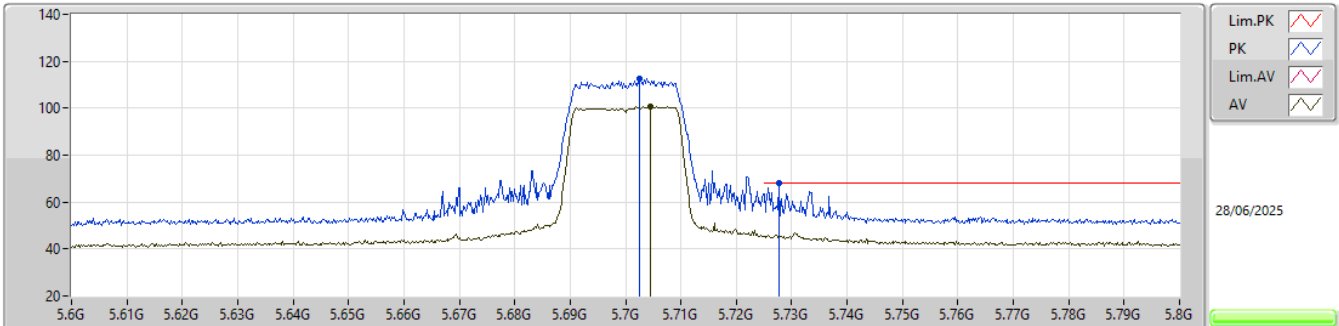EUT_Y_1TX
Setting 46
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7026G	112.75	Inf	-Inf	101.39	3	Horizontal	353	2.06	-	34.00	8.04	30.68			
AV	5.7046G	100.74	Inf	-Inf	89.38	3	Horizontal	353	2.06	-	34.00	8.04	30.68			
PK	5.7278G	67.97	68.20	-0.23	56.57	3	Horizontal	353	2.06	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TX

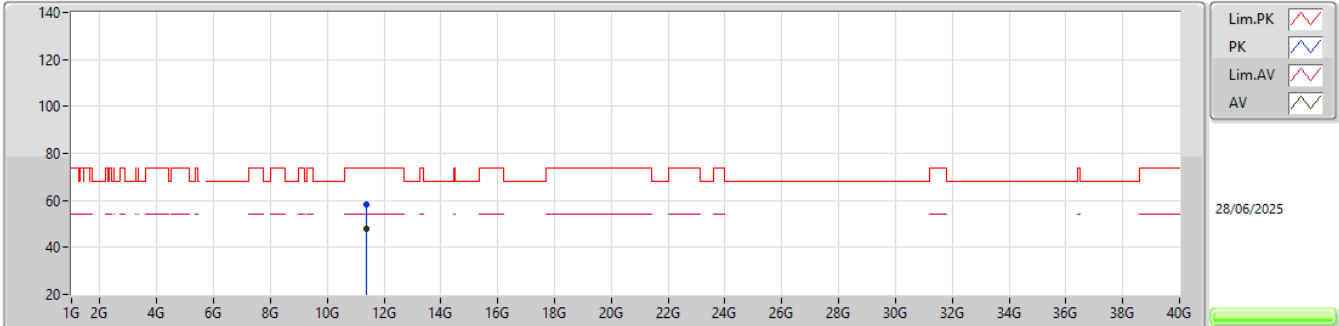


EUT_V_1TX
Setting 46
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39994G	58.44	74.00	-15.56	37.91	3	Vertical	222	2.74	-	38.70	12.49	30.66			
AV	11.4004G	47.84	54.00	-6.16	27.31	3	Vertical	222	2.74	-	38.70	12.49	30.66			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TX

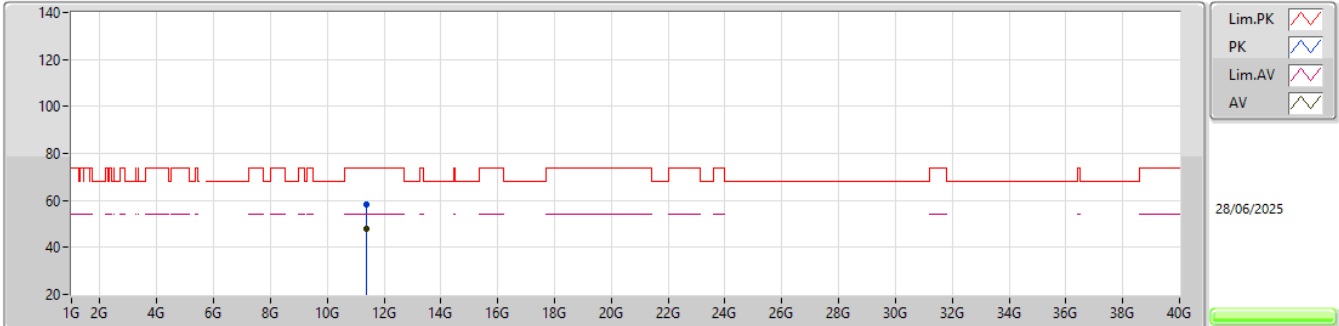


EUT_V_1TX
Setting 46
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39947G	58.34	74.00	-15.66	37.81	3	Horizontal	256	2.15	-	38.70	12.49	30.66			
AV	11.40026G	48.00	54.00	-6.00	27.47	3	Horizontal	256	2.15	-	38.70	12.49	30.66			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

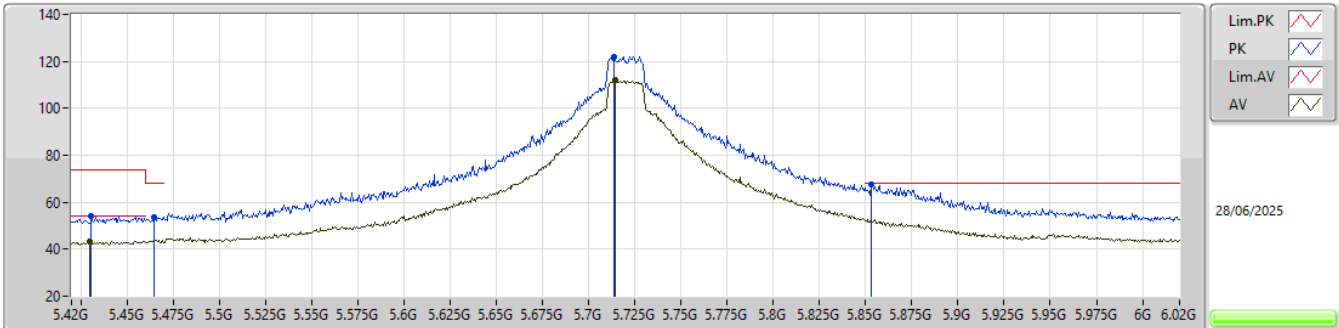EUT_Y_1TX
Setting 108
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4308G	53.94	74.00	-20.06	43.05	3	Horizontal	350	1.91	-	33.90	7.76	30.77			
AV	5.4296G	43.37	54.00	-10.63	32.48	3	Horizontal	350	1.91	-	33.90	7.76	30.77			
PK	5.465G	53.70	68.20	-14.50	42.74	3	Horizontal	350	1.91	-	33.93	7.78	30.75			
PK	5.714G	122.04	Inf	-Inf	110.66	3	Horizontal	350	1.91	-	34.00	8.06	30.68			
AV	5.7146G	111.87	Inf	-Inf	100.49	3	Horizontal	350	1.91	-	34.00	8.06	30.68			
PK	5.8532G	67.37	68.20	-0.83	55.92	3	Horizontal	350	1.91	-	33.91	8.19	30.65			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

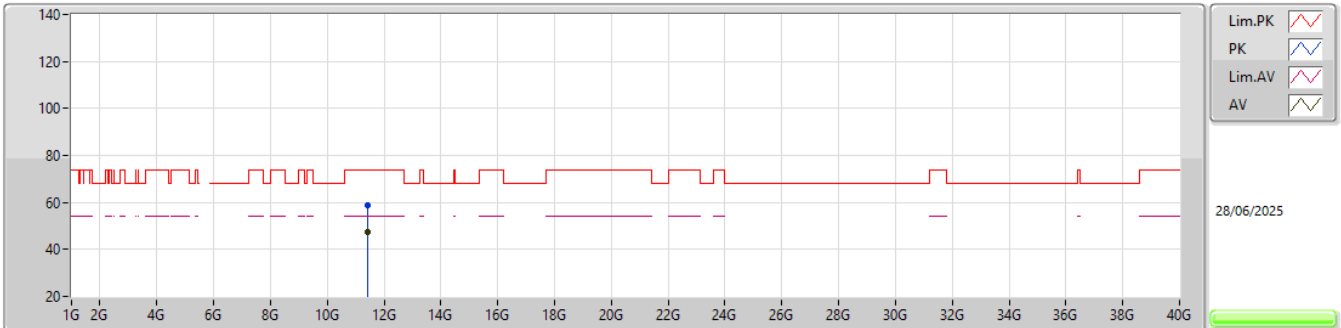


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43945G	58.84	74.00	-15.16	38.23	3	Vertical	280	2.45	-	38.78	12.51	30.68			
AV	11.43954G	47.41	54.00	-6.59	26.80	3	Vertical	280	2.45	-	38.78	12.51	30.68			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

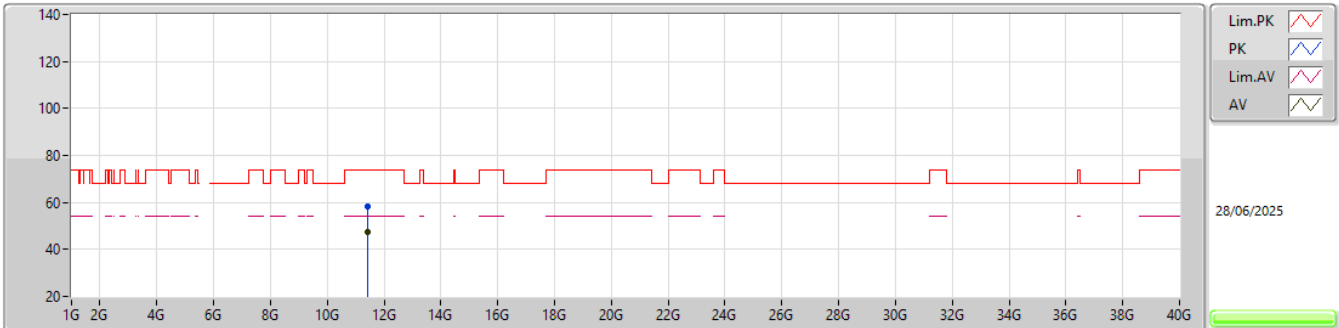


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.43986G	58.50	74.00	-15.50	37.89	3	Horizontal	186	1.79	-	38.78	12.51	30.68			
AV	11.44031G	47.63	54.00	-6.37	27.02	3	Horizontal	186	1.79	-	38.78	12.51	30.68			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5745MHz_TX

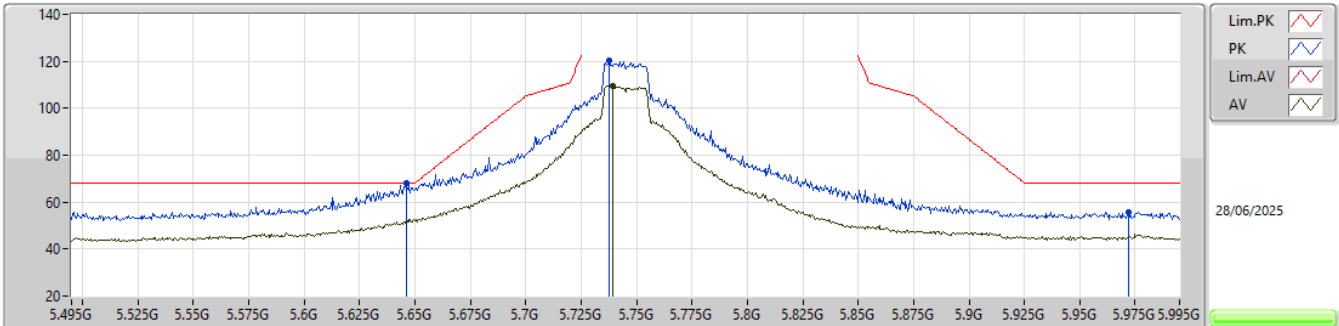EUT_Y_1TX
Setting 85
02-D-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.646G	68.01	68.20	-0.19	56.76	3	Horizontal	353	1.80	-	34.00	7.94	30.69			
PK	5.7375G	120.09	Inf	-Inf	108.66	3	Horizontal	353	1.80	-	34.00	8.10	30.67			
AV	5.7395G	109.52	Inf	-Inf	98.09	3	Horizontal	353	1.80	-	34.00	8.10	30.67			
PK	5.972G	55.90	68.20	-12.30	44.15	3	Horizontal	353	1.80	-	34.24	8.13	30.62			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TX

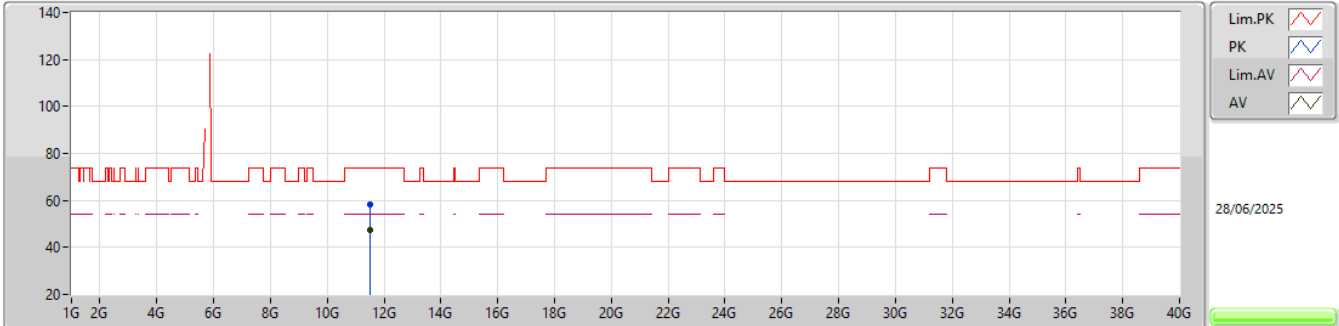


EUT_V_1TX
Setting 85
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4901G	58.17	74.00	-15.83	37.39	3	Vertical	95	2.15	-	38.96	12.53	30.71			
AV	11.48917G	47.53	54.00	-6.47	26.75	3	Vertical	95	2.15	-	38.96	12.53	30.71			

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5745MHz_TX

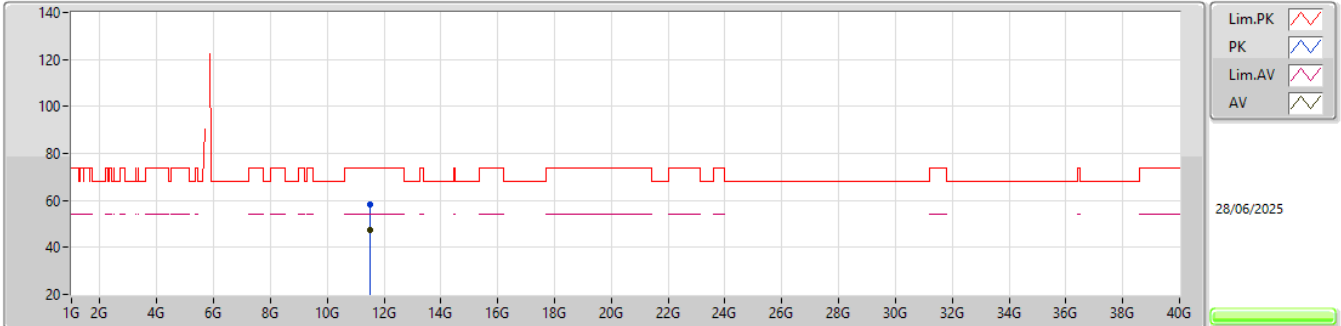


EUT_V_1TX
Setting 85
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.48993G	58.27	74.00	-15.73	37.49	3	Horizontal	244	2.38	-	38.96	12.53	30.71			
AV	11.49036G	47.33	54.00	-6.67	26.55	3	Horizontal	244	2.38	-	38.96	12.53	30.71			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

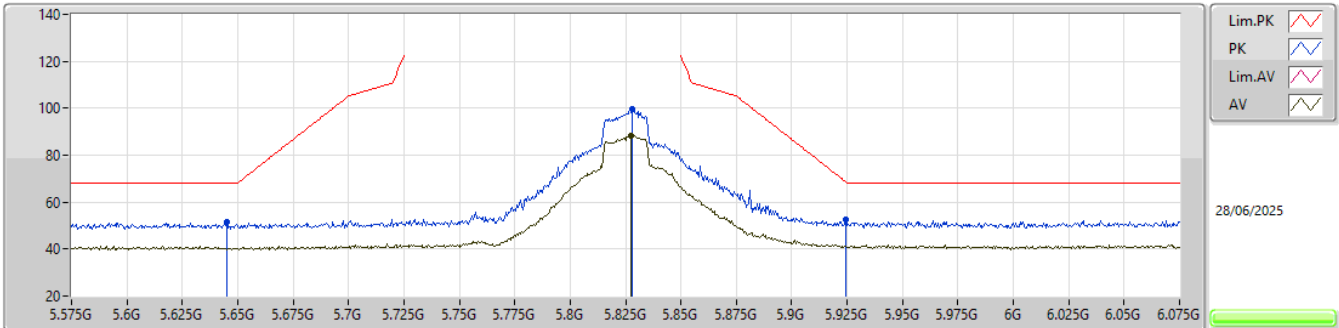


EUT Y_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.645G	51.35	68.20	-16.85	40.11	3	Vertical	355	1.80	-	34.00	7.94	30.70				
PK	5.828G	99.75	Inf	-Inf	88.26	3	Vertical	355	1.80	-	33.94	8.20	30.65				
AV	5.8275G	88.47	Inf	-Inf	76.97	3	Vertical	355	1.80	-	33.95	8.20	30.65				
PK	5.9245G	52.76	68.57	-15.81	41.09	3	Vertical	355	1.80	-	34.15	8.15	30.63				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5785MHz_TX

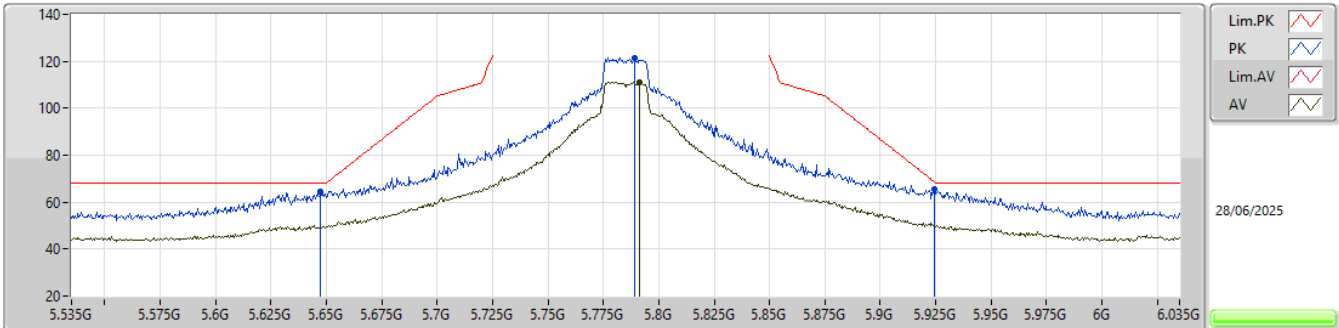EUT Y_1TX
Setting 108
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6475G	64.42	68.20	-3.78	53.17	3	Horizontal	358	2.13	-	34.00	7.94	30.69			
PK	5.789G	121.57	Inf	-Inf	110.04	3	Horizontal	358	2.13	-	34.00	8.19	30.66			
AV	5.7915G	111.08	Inf	-Inf	99.54	3	Horizontal	358	2.13	-	34.00	8.20	30.66			
PK	5.9245G	65.46	68.57	-3.11	53.79	3	Horizontal	358	2.13	-	34.15	8.15	30.63			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

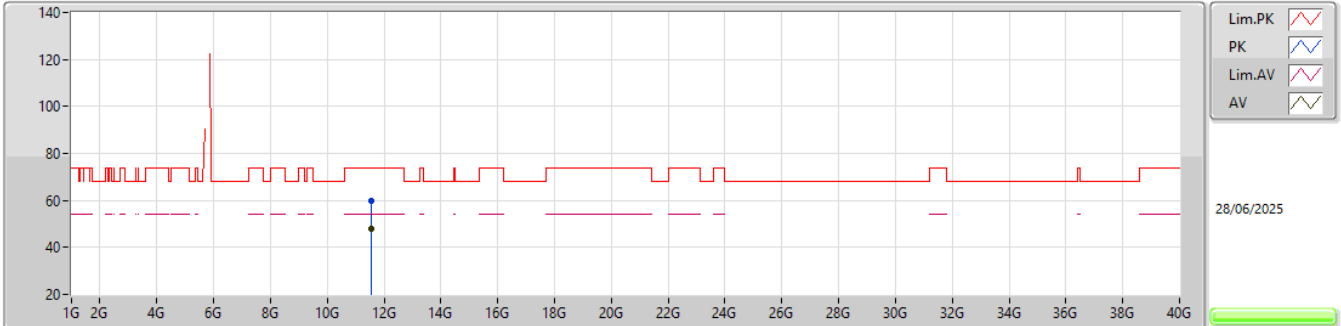


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56946G	59.87	74.00	-14.13	38.93	3	Vertical	60	1.37	-	39.14	12.57	30.77			
AV	11.56962G	48.07	54.00	-5.93	27.13	3	Vertical	60	1.37	-	39.14	12.57	30.77			

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

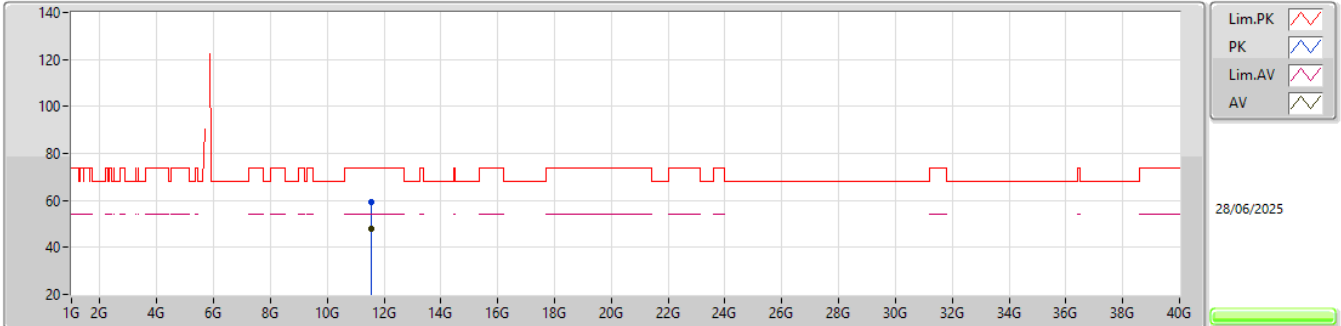


EUT_V_1TX
Setting 108
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56959G	59.15	74.00	-14.85	38.21	3	Horizontal	344	2.64	-	39.14	12.57	30.77			
AV	11.56954G	48.08	54.00	-5.92	27.14	3	Horizontal	344	2.64	-	39.14	12.57	30.77			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

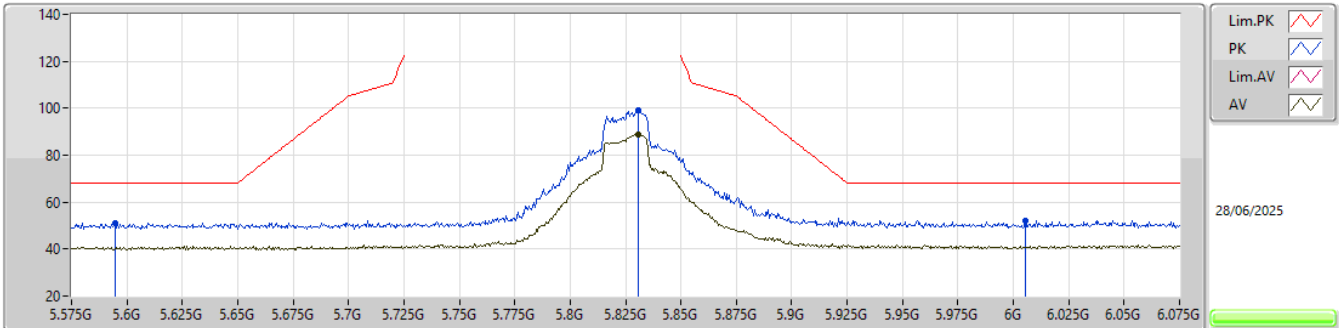


EUT_Y_1TX
Setting 88
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.5945G	51.24	68.20	-16.96	40.08	3	Vertical	354	1.60	-	34.01	7.86	30.71			
PK	5.8305G	99.24	Inf	-Inf	87.75	3	Vertical	354	1.60	-	33.94	8.20	30.65			
AV	5.8305G	88.65	Inf	-Inf	77.16	3	Vertical	354	1.60	-	33.94	8.20	30.65			
PK	6.0055G	52.09	68.20	-16.11	40.28	3	Vertical	354	1.60	-	34.31	8.12	30.62			

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5825MHz_TX

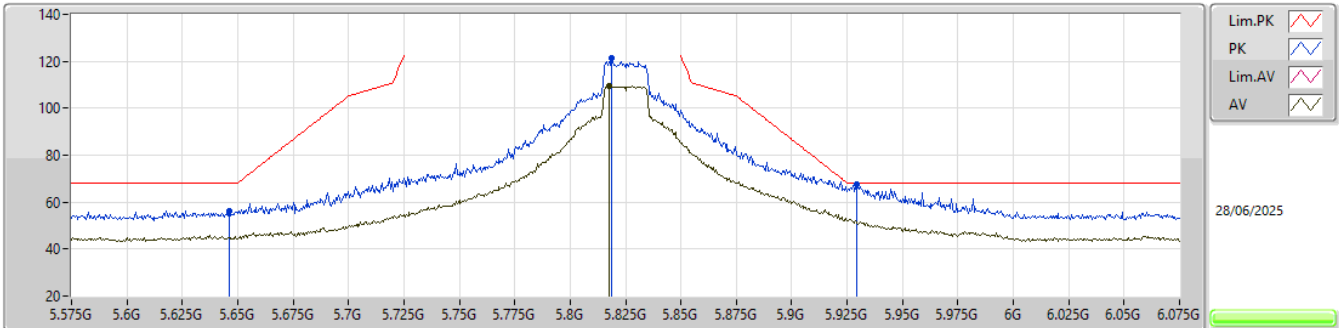EUT_Y_1TX
Setting 88
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.646G	56.27	68.20	-11.93	45.02	3	Horizontal	353	2.00	-	34.00	7.94	30.69			
PK	5.8185G	121.16	Inf	-Inf	109.65	3	Horizontal	353	2.00	-	33.96	8.20	30.65			
AV	5.8175G	109.28	Inf	-Inf	97.77	3	Horizontal	353	2.00	-	33.96	8.20	30.65			
PK	5.9295G	67.64	68.20	-0.56	55.96	3	Horizontal	353	2.00	-	34.16	8.15	30.63			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

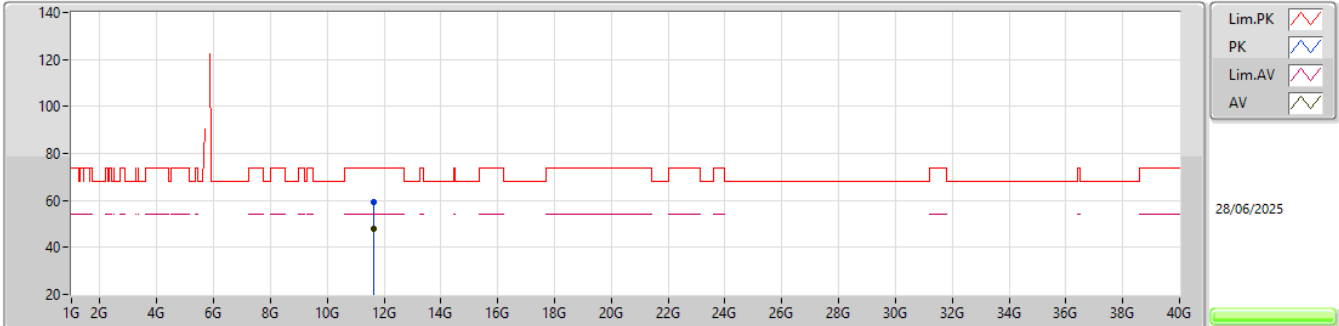


EUT_V_1TX
Setting 88
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.65046G	59.25	74.00	-14.75	38.18	3	Vertical	285	1.51	-	39.30	12.61	30.84			
AV	11.64908G	47.74	54.00	-6.26	26.67	3	Vertical	285	1.51	-	39.30	12.61	30.84			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

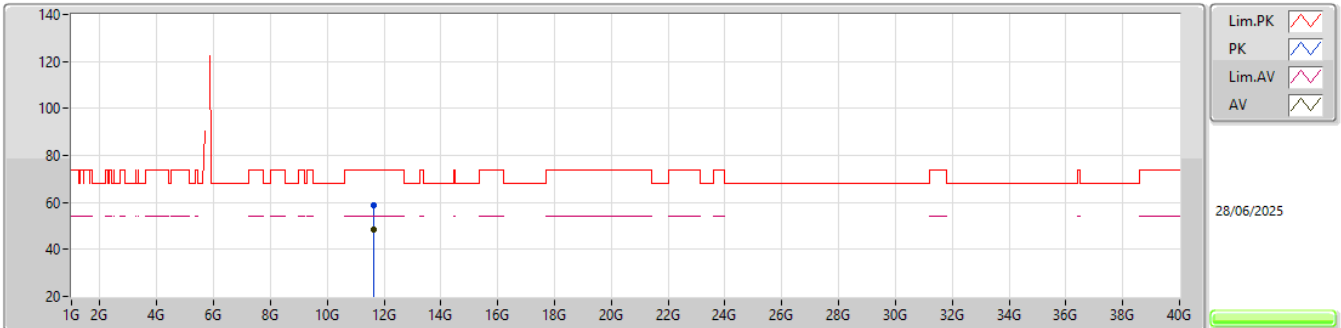


EUT_V_1TX
Setting 88
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.64962G	58.82	74.00	-15.18	37.75	3	Horizontal	150	1.30	-	39.30	12.61	30.84			
AV	11.6506G	48.25	54.00	-5.75	27.18	3	Horizontal	150	1.30	-	39.30	12.61	30.84			

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5190MHz_TX

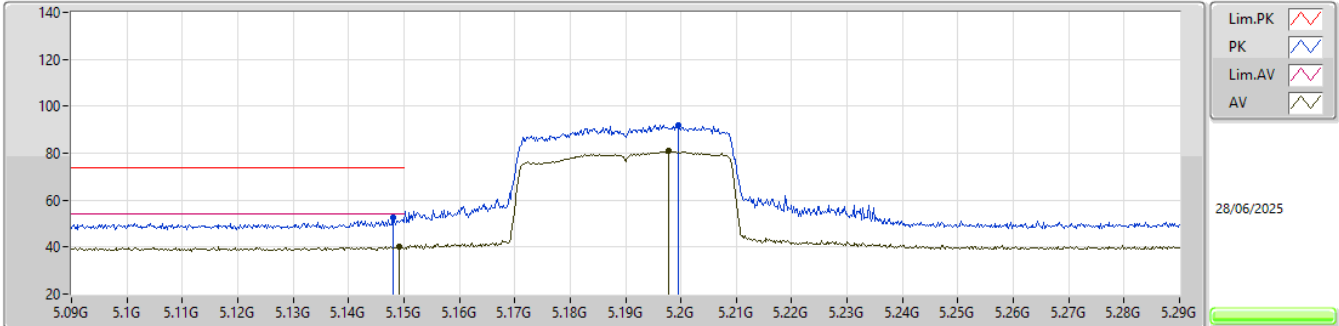


EUT_Y_1TX
Setting 51
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.148G	52.56	74.00	-21.44	42.31	3	Vertical	357	1.54	-	33.60	7.58	30.93				
AV	5.1492G	40.38	54.00	-13.62	30.13	3	Vertical	357	1.54	-	33.60	7.58	30.93				
PK	5.1996G	92.15	Inf	-Inf	81.76	3	Vertical	357	1.54	-	33.70	7.59	30.90				
AV	5.1978G	80.79	Inf	-Inf	70.40	3	Vertical	357	1.54	-	33.70	7.59	30.90				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5190MHz_TX

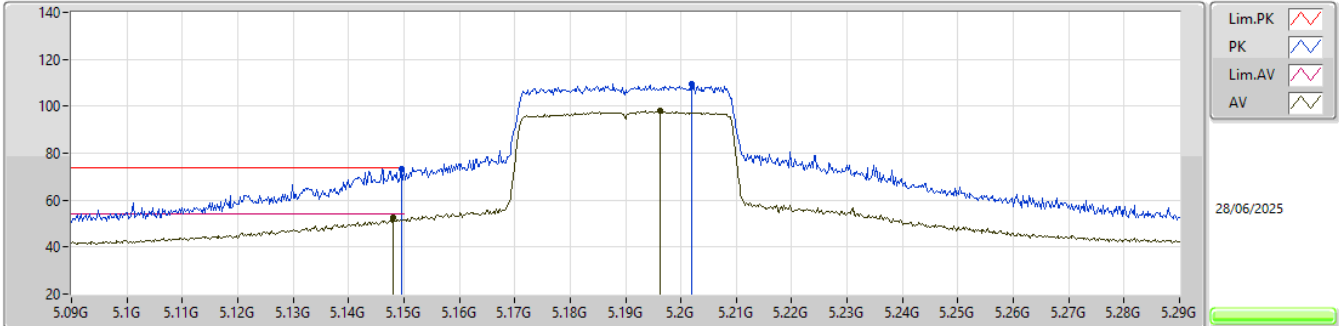


EUT_Y_1TX
Setting 51
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	73.49	74.00	-0.51	63.24	3	Horizontal	347	2.07	-	33.60	7.58	30.93			
AV	5.148G	52.46	54.00	-1.54	42.21	3	Horizontal	347	2.07	-	33.60	7.58	30.93			
PK	5.202G	109.57	Inf	-Inf	99.18	3	Horizontal	347	2.07	-	33.70	7.59	30.90			
AV	5.1962G	97.89	Inf	-Inf	87.51	3	Horizontal	347	2.07	-	33.69	7.59	30.90			

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5190MHz_TX

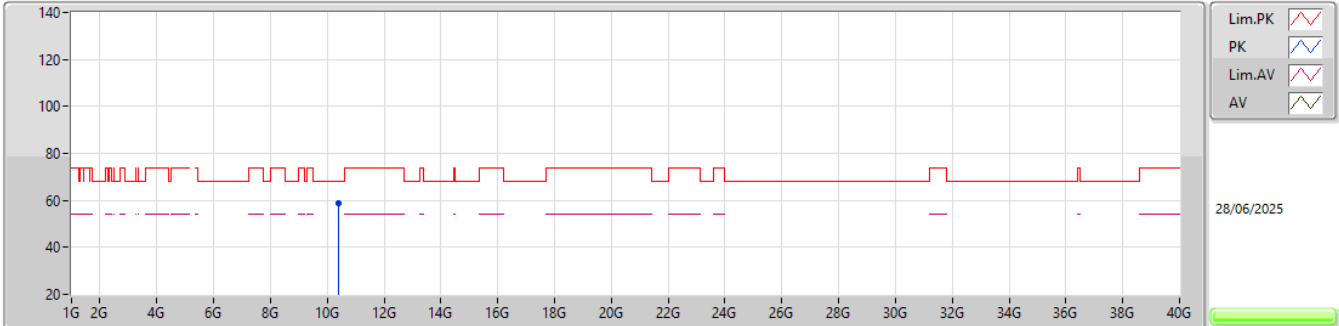


EUT_Y_1TX
Setting 51
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.38055G	58.99	68.20	-9.21	39.20	3	Vertical	31	1.38	-	38.34	11.97	30.52				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5190MHz_TX

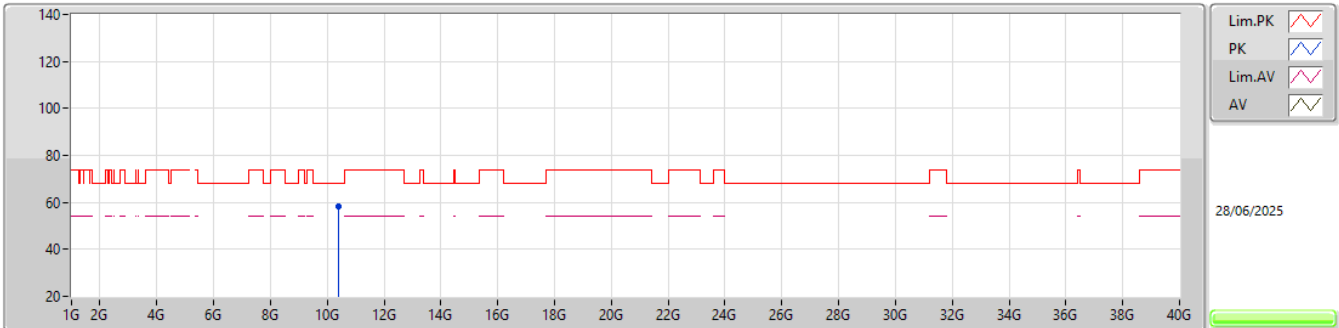


EUT_Y_1TX
Setting 51
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.37942G	58.31	68.20	-9.89	38.52	3	Horizontal	23	2.55	-	38.34	11.97	30.52				

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TX

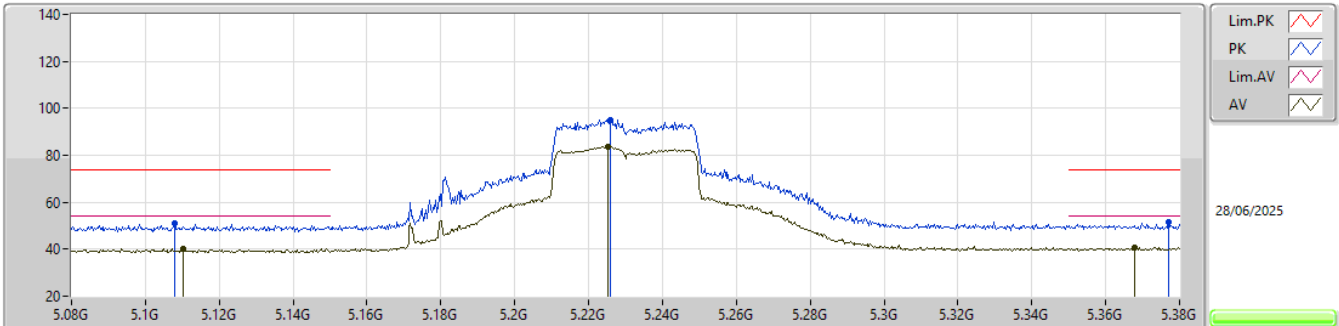


EUT_Y_1TX
Setting 67
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1079G	51.26	74.00	-22.74	41.12	3	Vertical	356	1.80	-	33.52	7.57	30.95			
AV	5.1103G	40.41	54.00	-13.59	30.27	3	Vertical	356	1.80	-	33.52	7.57	30.95			
PK	5.2258G	95.00	Inf	-Inf	84.57	3	Vertical	356	1.80	-	33.70	7.61	30.88			
AV	5.2252G	83.87	Inf	-Inf	73.44	3	Vertical	356	1.80	-	33.70	7.61	30.88			
PK	5.377G	51.47	74.00	-22.53	40.65	3	Vertical	356	1.80	-	33.90	7.72	30.80			
AV	5.3677G	40.87	54.00	-13.13	30.05	3	Vertical	356	1.80	-	33.90	7.72	30.80			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TX

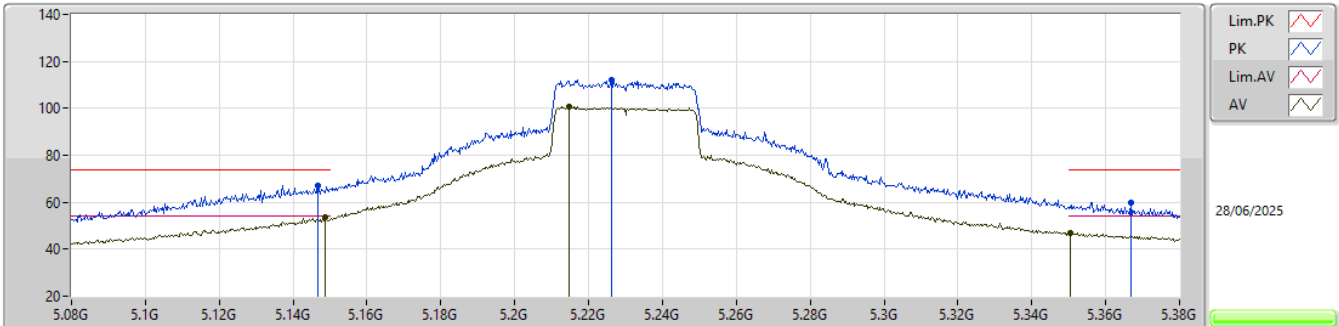


EUT_Y_1TX
Setting 67
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1466G	66.99	74.00	-7.01	56.75	3	Horizontal	345	1.72	-	33.59	7.58	30.93			
AV	5.1487G	53.84	54.00	-0.16	43.59	3	Horizontal	345	1.72	-	33.60	7.58	30.93			
PK	5.2261G	111.92	Inf	-Inf	101.49	3	Horizontal	345	1.72	-	33.70	7.61	30.88			
AV	5.2147G	100.70	Inf	-Inf	90.29	3	Horizontal	345	1.72	-	33.70	7.60	30.89			
PK	5.3668G	59.86	74.00	-14.14	49.04	3	Horizontal	345	1.72	-	33.90	7.72	30.80			
AV	5.3503G	46.73	54.00	-7.27	35.94	3	Horizontal	345	1.72	-	33.90	7.70	30.81			

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5230MHz_TX

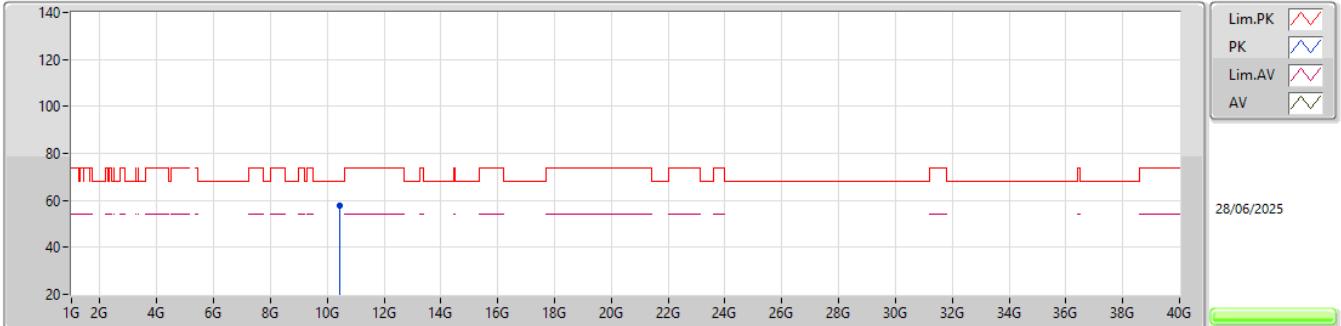


EUT_Y_1TX
Setting 67
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.45936G	57.88	68.20	-10.32	38.15	3	Vertical	216	1.48	-	38.22	12.01	30.50				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5230MHz_TX

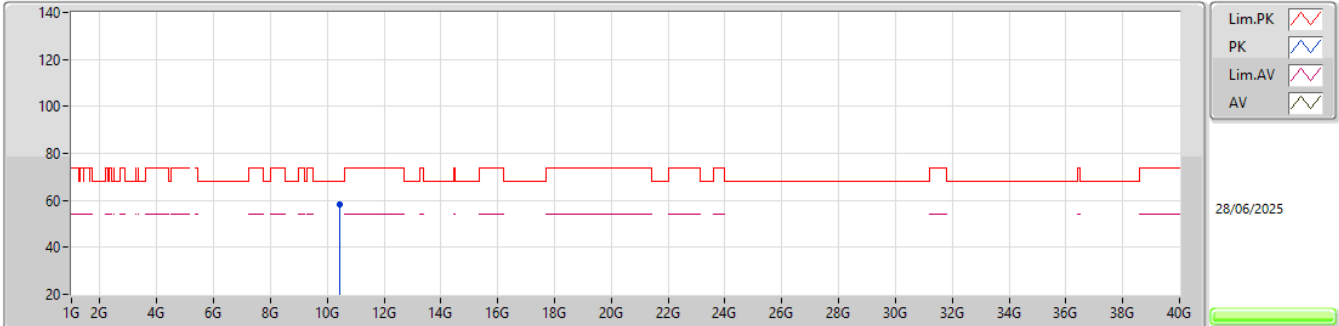


EUT_Y_1TX
Setting 67
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.46072G	58.25	68.20	-9.95	38.52	3	Horizontal	234	1.00	-	38.22	12.01	30.50				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX


5270MHz_TX

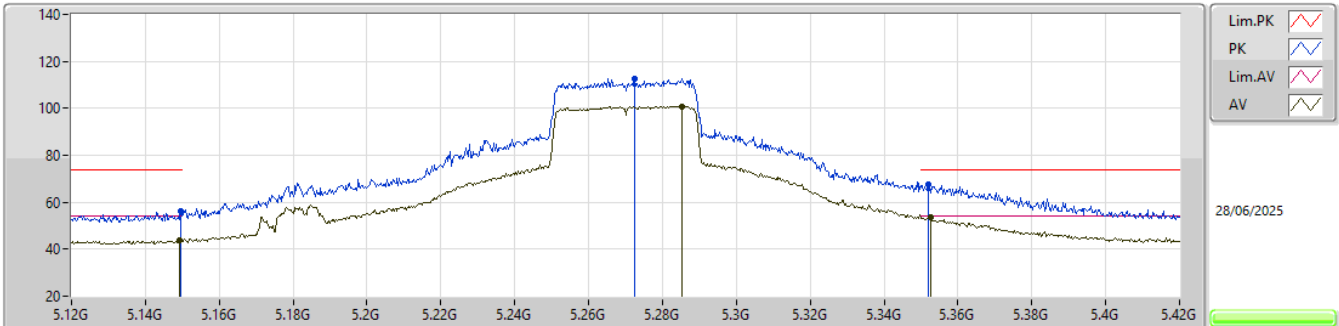EUT_Y_1TX
Setting 64
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1497G	56.03	74.00	-17.97	45.78	3	Horizontal	2	1.80	-	33.60	7.58	30.93			
AV	5.1491G	43.67	54.00	-10.33	33.42	3	Horizontal	2	1.80	-	33.60	7.58	30.93			
PK	5.2724G	112.46	Inf	-Inf	101.94	3	Horizontal	2	1.80	-	33.74	7.64	30.86			
AV	5.2853G	100.91	Inf	-Inf	90.34	3	Horizontal	2	1.80	-	33.77	7.65	30.85			
PK	5.3519G	67.34	74.00	-6.66	56.55	3	Horizontal	2	1.80	-	33.90	7.70	30.81			
AV	5.3525G	53.68	54.00	-0.32	42.89	3	Horizontal	2	1.80	-	33.90	7.70	30.81			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5270MHz_TX

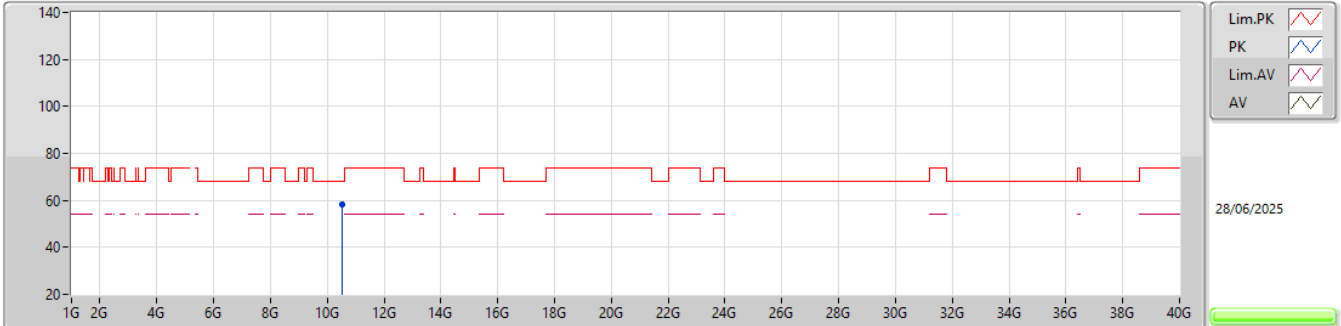


EUT_V_1TX
Setting 64
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.54069G	58.37	68.20	-9.83	38.51	3	Vertical	83	1.40	-	38.30	12.05	30.49				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5270MHz_TX

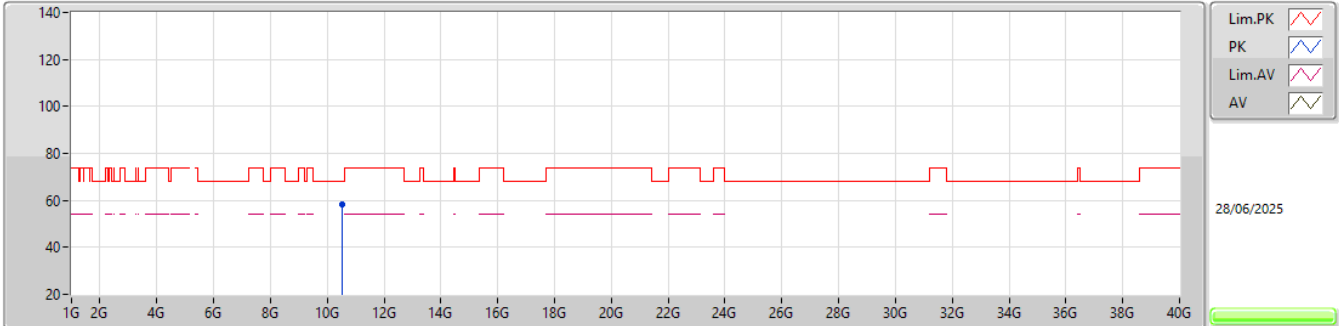


EUT_Y_1TX
Setting 64
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.54016G	58.31	68.20	-9.89	38.45	3	Horizontal	175	2.33	-	38.30	12.05	30.49				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX


5310MHz_TX

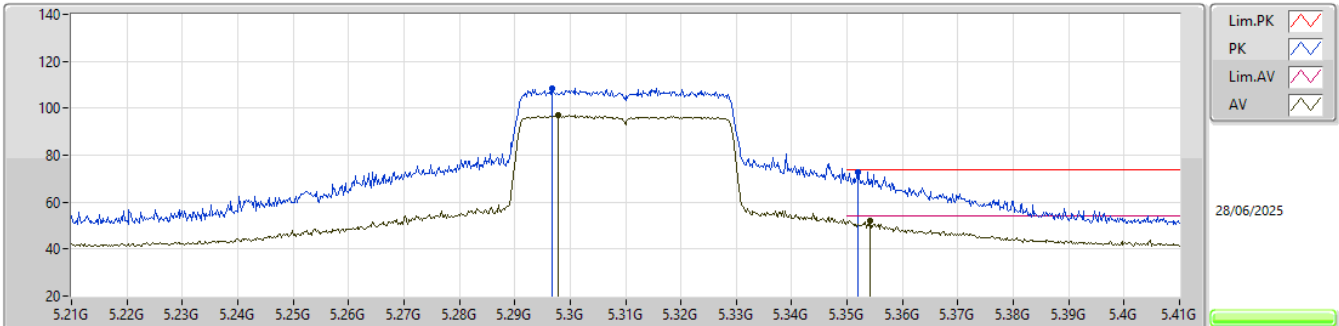EUT_Y_1TX
Setting 51
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2968G	108.63	Inf	-Inf	98.02	3	Horizontal	352	1.79	-	33.79	7.66	30.84			
AV	5.2978G	97.01	Inf	-Inf	86.39	3	Horizontal	352	1.79	-	33.80	7.66	30.84			
PK	5.352G	73.00	74.00	-1.00	62.21	3	Horizontal	352	1.79	-	33.90	7.70	30.81			
AV	5.3542G	51.88	54.00	-2.12	41.08	3	Horizontal	352	1.79	-	33.90	7.71	30.81			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5310MHz_TX

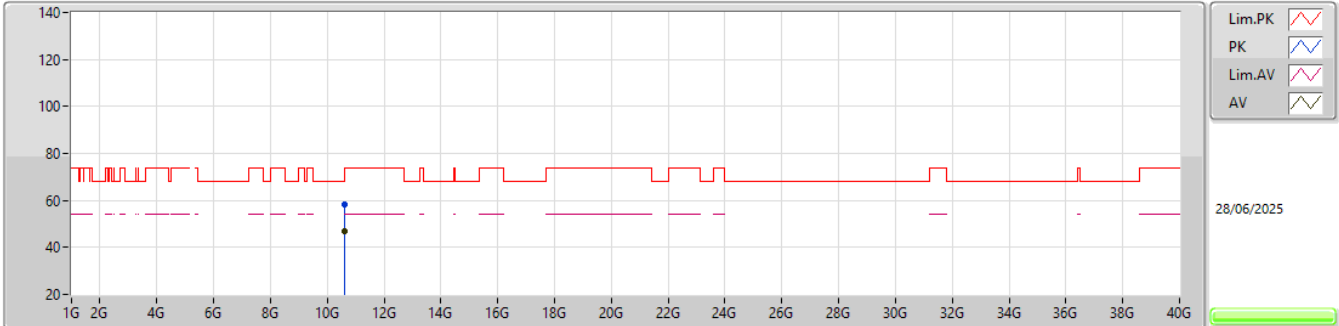


EUT_V_1TX
Setting 51
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.619777G	58.29	74.00	-15.71	38.29	3	Vertical	229	1.78	-	38.40	12.09	30.49			
AV	10.61968G	46.94	54.00	-7.06	26.94	3	Vertical	229	1.78	-	38.40	12.09	30.49			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5310MHz_TX

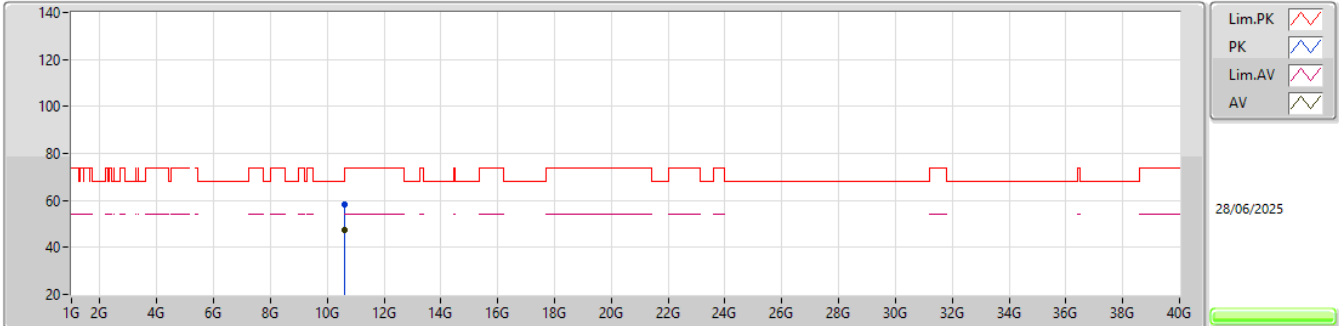


EUT_V_1TX
Setting 51
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.62079G	58.42	74.00	-15.58	38.42	3	Horizontal	265	2.79	-	38.40	12.09	30.49			
AV	10.61906G	47.51	54.00	-6.49	27.51	3	Horizontal	265	2.79	-	38.40	12.09	30.49			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TX

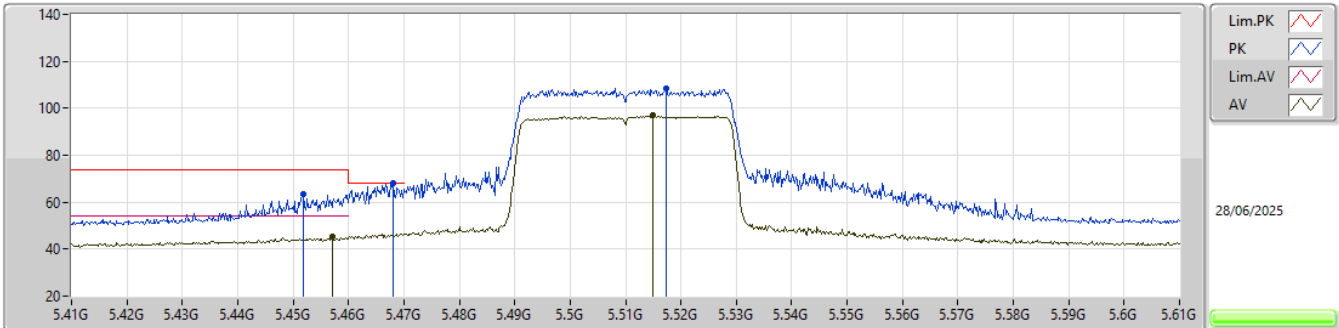


EUT_Y_1TX
Setting 47
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4518G	63.41	74.00	-10.59	52.50	3	Horizontal	2	2.17	-	33.90	7.77	30.76			
AV	5.457G	45.30	54.00	-8.70	34.37	3	Horizontal	2	2.17	-	33.91	7.77	30.75			
PK	5.468G	67.98	68.20	-0.22	57.01	3	Horizontal	2	2.17	-	33.94	7.78	30.75			
PK	5.5174G	108.53	Inf	-Inf	97.42	3	Horizontal	2	2.17	-	34.03	7.81	30.73			
AV	5.515G	96.88	Inf	-Inf	85.77	3	Horizontal	2	2.17	-	34.03	7.81	30.73			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TX

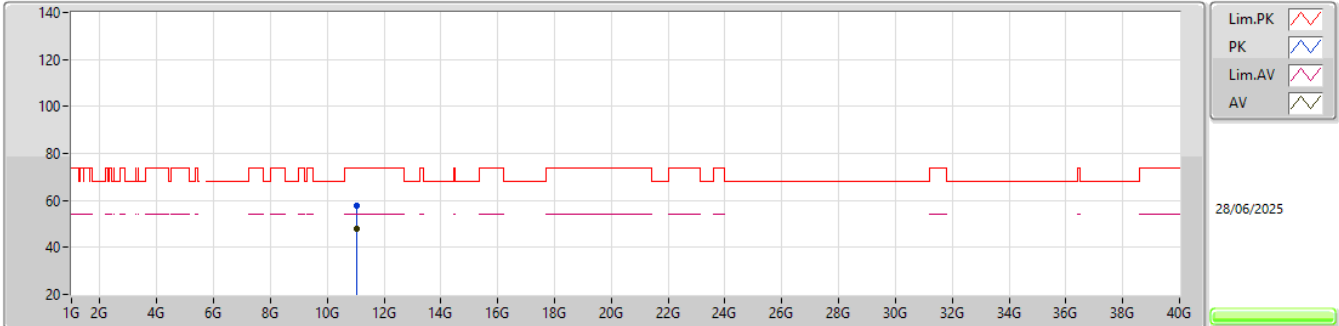


EUT_V_1TX
Setting 47
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.02029G	57.94	74.00	-16.06	37.69	3	Vertical	301	2.25	-	38.44	12.30	30.49			
AV	11.02019G	47.69	54.00	-6.31	27.44	3	Vertical	301	2.25	-	38.44	12.30	30.49			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TX

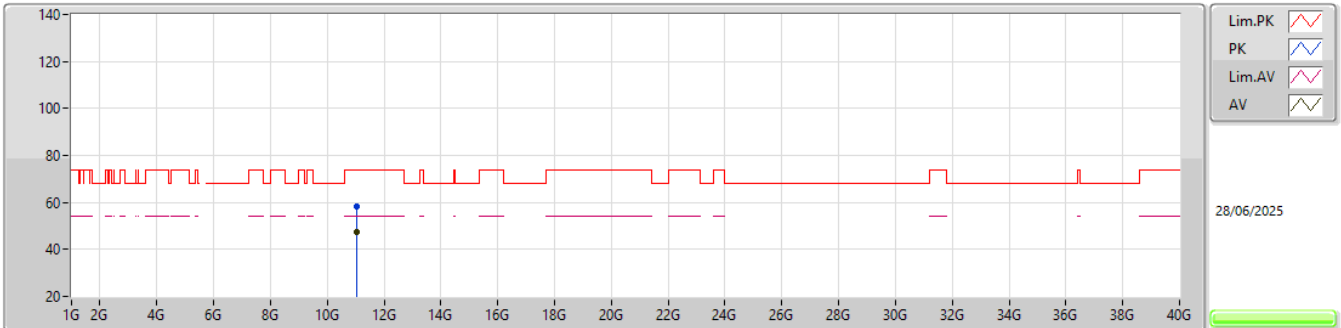


EUT_V_1TX
Setting 47
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.02016G	58.18	74.00	-15.82	37.93	3	Horizontal	162	2.23	-	38.44	12.30	30.49			
AV	11.02024G	47.28	54.00	-6.72	27.03	3	Horizontal	162	2.23	-	38.44	12.30	30.49			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TX

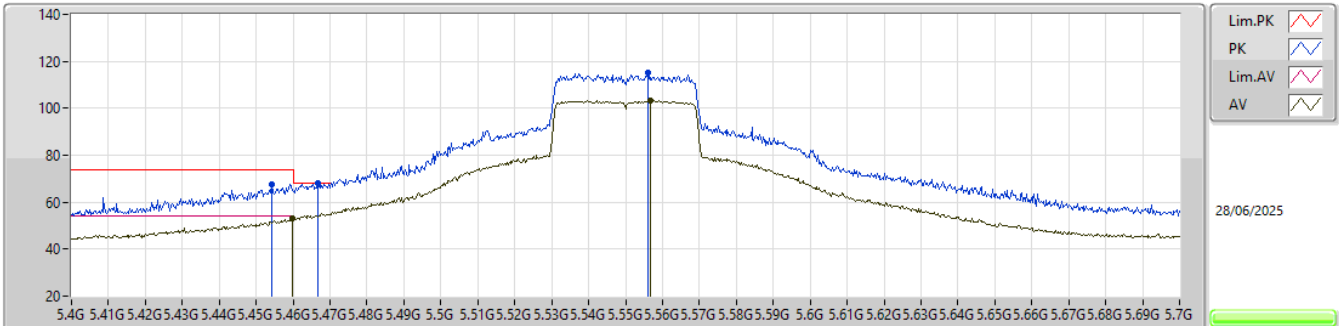


EUT_Y_1TX
Setting 68
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4543G	67.73	74.00	-6.27	56.81	3	Horizontal	352	2.22	-	33.91	7.77	30.76			
AV	5.4597G	53.13	54.00	-0.87	42.18	3	Horizontal	352	2.22	-	33.92	7.78	30.75			
PK	5.4666G	68.07	68.20	-0.13	57.11	3	Horizontal	352	2.22	-	33.93	7.78	30.75			
PK	5.556G	115.05	Inf	-Inf	103.85	3	Horizontal	352	2.22	-	34.09	7.83	30.72			
AV	5.5569G	103.17	Inf	-Inf	91.97	3	Horizontal	352	2.22	-	34.09	7.83	30.72			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TX

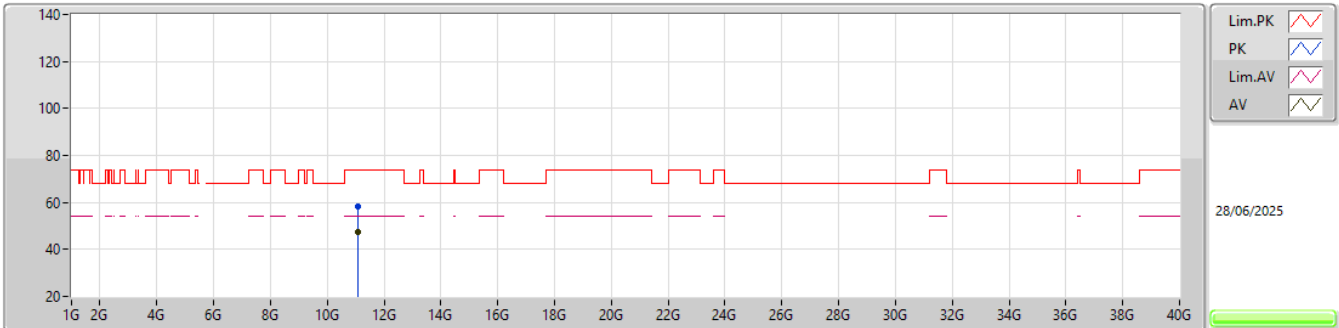


EUT_V_1TX
Setting 68
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.09988G	58.28	74.00	-15.72	37.87	3	Vertical	350	1.13	-	38.60	12.34	30.53			
AV	11.09961G	47.58	54.00	-6.42	27.17	3	Vertical	350	1.13	-	38.60	12.34	30.53			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TX

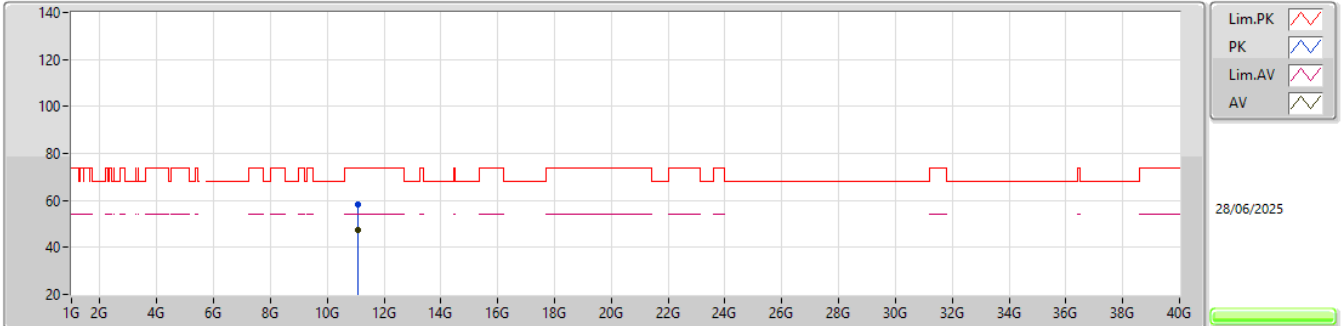


EUT_V_1TX
Setting 68
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0997G	58.19	74.00	-15.81	37.78	3	Horizontal	60	2.48	-	38.60	12.34	30.53			
AV	11.10041G	47.50	54.00	-6.50	27.09	3	Horizontal	60	2.48	-	38.60	12.34	30.53			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5670MHz_TX

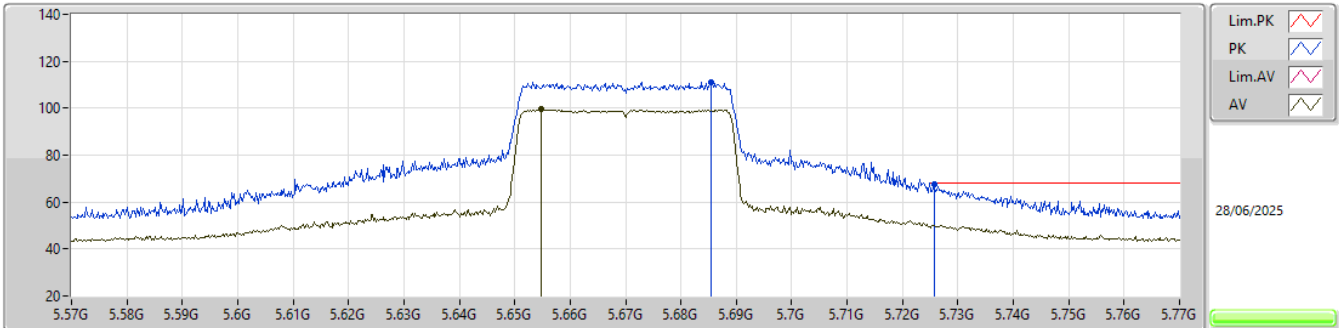EUT_Y_1TX
Setting 50
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6854G	111.07	Inf	-Inf	99.75	3	Horizontal	354	2.05	-	34.00	8.01	30.69			
AV	5.6548G	99.42	Inf	-Inf	88.15	3	Horizontal	354	2.05	-	34.00	7.96	30.69			
PK	5.7258G	67.56	68.20	-0.64	56.16	3	Horizontal	354	2.05	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5670MHz_TX

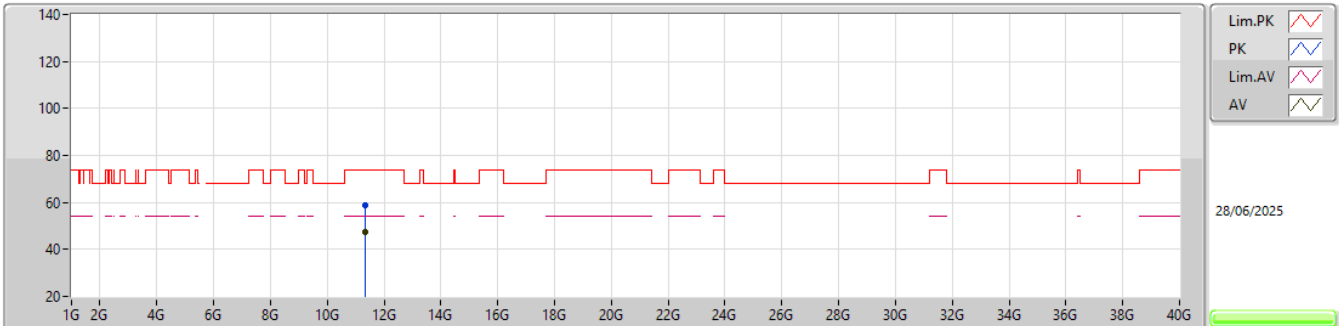EUT_V_1TX
Setting 50
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.34025G	58.54	74.00	-15.46	38.04	3	Vertical	263	2.17	-	38.68	12.46	30.64			
AV	11.33989G	47.59	54.00	-6.41	27.09	3	Vertical	263	2.17	-	38.68	12.46	30.64			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TX

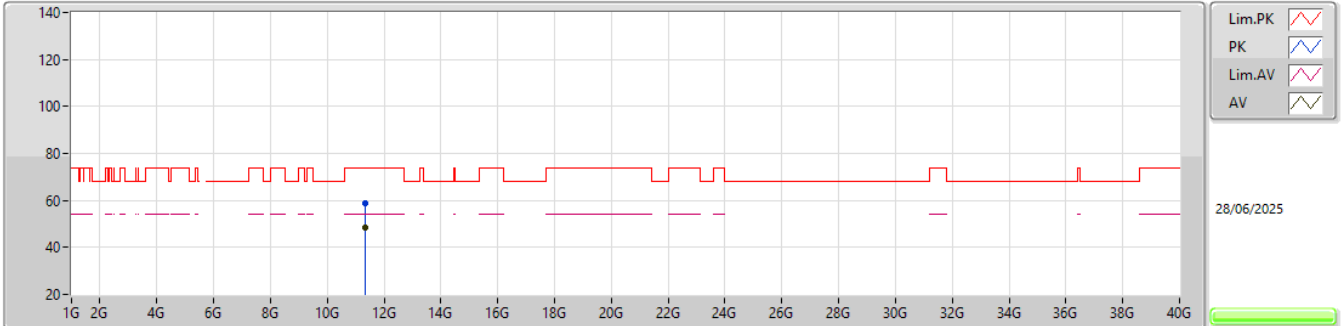


EUT Y_1TX
Setting 50
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.34016G	58.92	74.00	-15.08	38.42	3	Horizontal	104	2.80	-	38.68	12.46	30.64			
AV	11.33992G	48.25	54.00	-5.75	27.75	3	Horizontal	104	2.80	-	38.68	12.46	30.64			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5710MHz Straddle 5.47-5.725GHz_TX

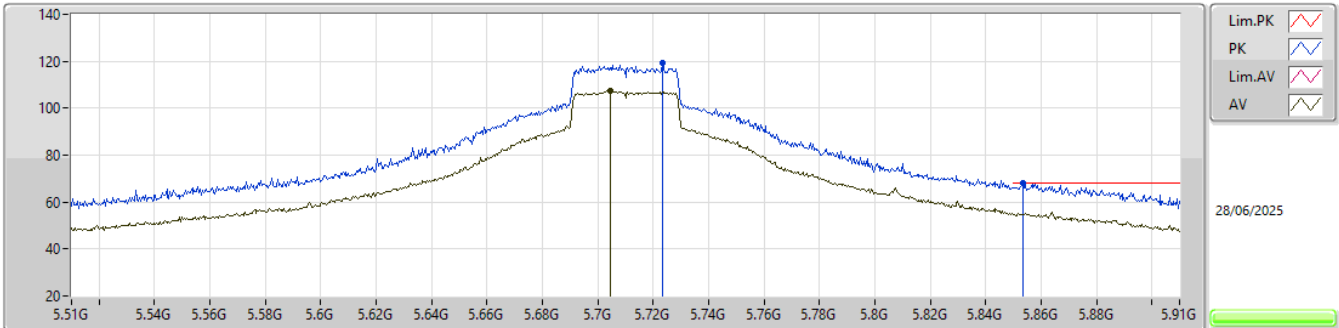EUT_Y_1TX
Setting 81
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7232G	119.06	Inf	-Inf	107.66	3	Horizontal	355	2.08	-	34.00	8.08	30.68			
AV	5.7044G	107.31	Inf	-Inf	95.95	3	Horizontal	355	2.08	-	34.00	8.04	30.68			
PK	5.8536G	67.92	68.20	-0.28	56.47	3	Horizontal	355	2.08	-	33.91	8.19	30.65			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TX

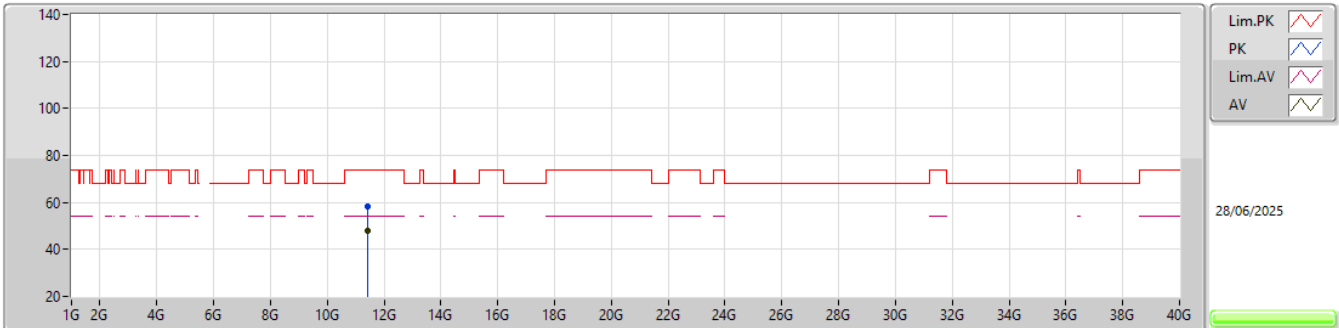


EUT_V_1TX
Setting 81
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.41991G	58.40	74.00	-15.60	37.83	3	Vertical	323	2.08	-	38.74	12.50	30.67			
AV	11.41985G	47.98	54.00	-6.02	27.41	3	Vertical	323	2.08	-	38.74	12.50	30.67			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TX

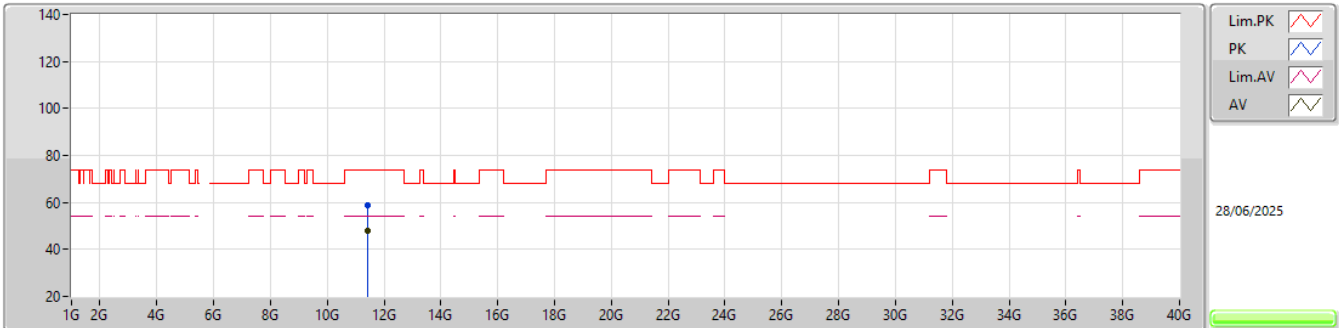


EUT_V_1TX
Setting 81
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.41901G	58.80	74.00	-15.20	38.23	3	Horizontal	29	2.01	-	38.74	12.50	30.67			
AV	11.41938G	48.18	54.00	-5.82	27.61	3	Horizontal	29	2.01	-	38.74	12.50	30.67			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX


5755MHz_TX

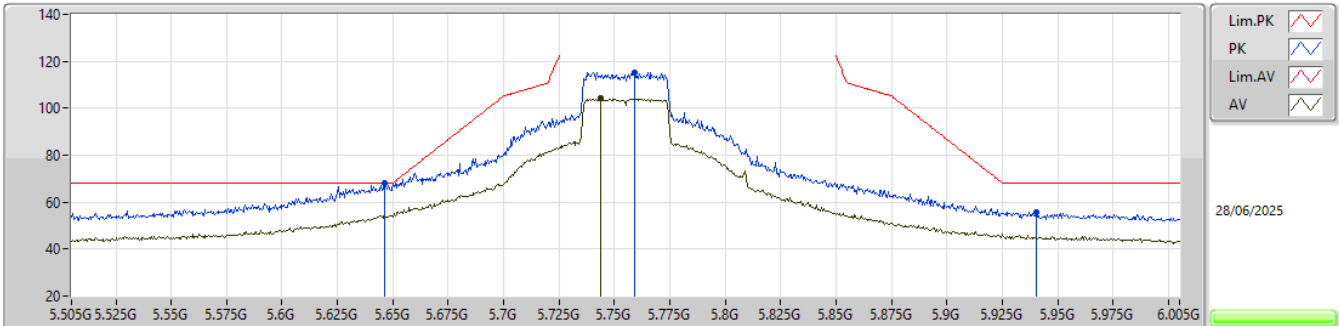EUT_Y_1TX
Setting 74
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.6465G	68.04	68.20	-0.16	56.79	3	Horizontal	353	2.14	-	34.00	7.94	30.69
PK	5.759G	115.34	Inf	-Inf	103.87	3	Horizontal	353	2.14	-	34.00	8.14	30.67
AV	5.744G	104.14	Inf	-Inf	92.70	3	Horizontal	353	2.14	-	34.00	8.11	30.67
PK	5.9405G	55.80	68.20	-12.40	44.09	3	Horizontal	353	2.14	-	34.18	8.15	30.62

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5755MHz_TX

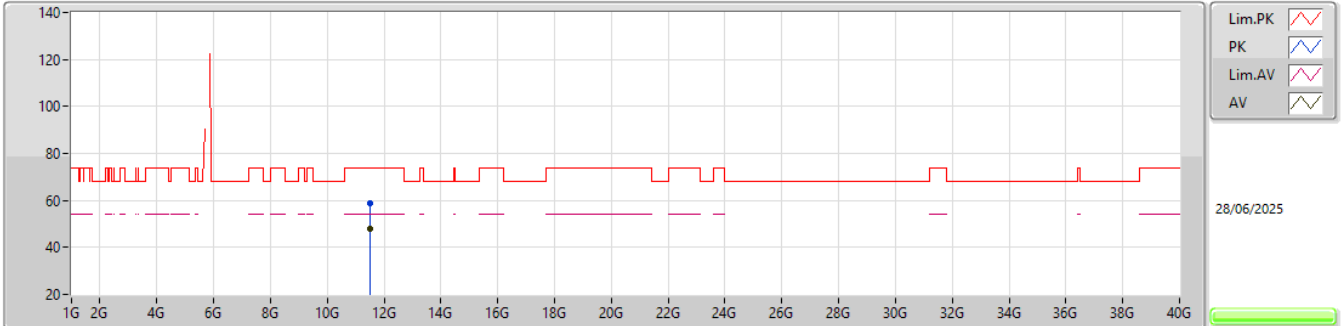


EUT_Y_1TX
Setting 74
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.50956G	59.01	74.00	-14.99	38.17	3	Vertical	244	2.09	-	39.02	12.54	30.72			
AV	11.51083G	48.17	54.00	-5.83	27.33	3	Vertical	244	2.09	-	39.02	12.54	30.72			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5755MHz_TX

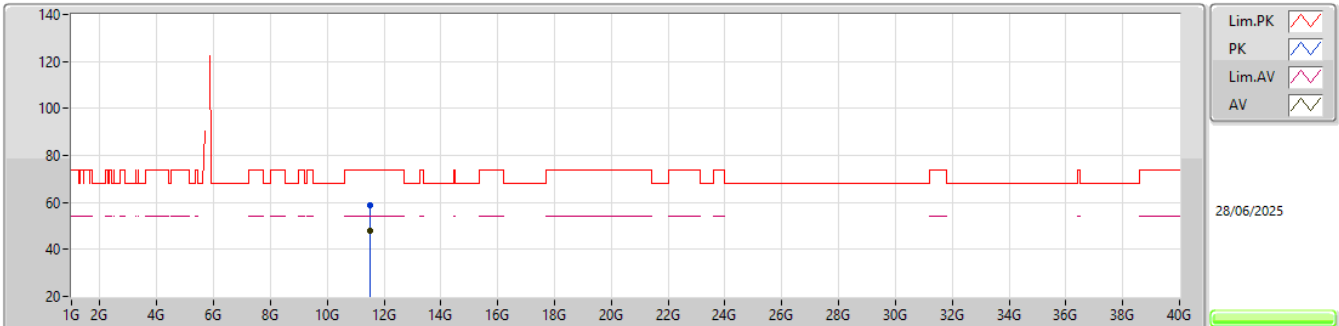EUT_Y_1TX
Setting 74
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.51045G	58.79	74.00	-15.21	37.95	3	Horizontal	6	2.45	-	39.02	12.54	30.72			
AV	11.51084G	47.88	54.00	-6.12	27.04	3	Horizontal	6	2.45	-	39.02	12.54	30.72			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX


5795MHz_TX

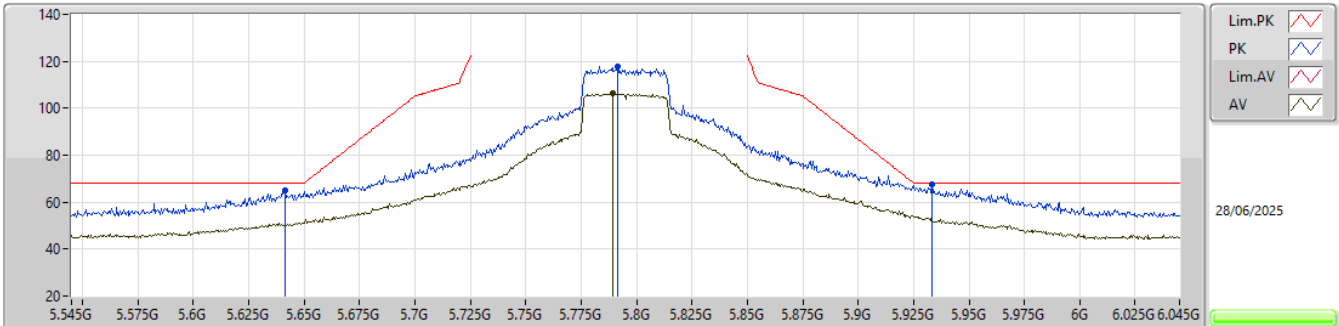EUT_Y_1TX
Setting 79
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6415G	64.82	68.20	-3.38	53.59	3	Horizontal	352	2.01	-	34.00	7.93	30.70			
PK	5.7915G	117.65	Inf	-Inf	106.11	3	Horizontal	352	2.01	-	34.00	8.20	30.66			
AV	5.789G	106.20	Inf	-Inf	94.67	3	Horizontal	352	2.01	-	34.00	8.19	30.66			
PK	5.9335G	67.33	68.20	-0.87	55.64	3	Horizontal	352	2.01	-	34.17	8.15	30.63			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TX

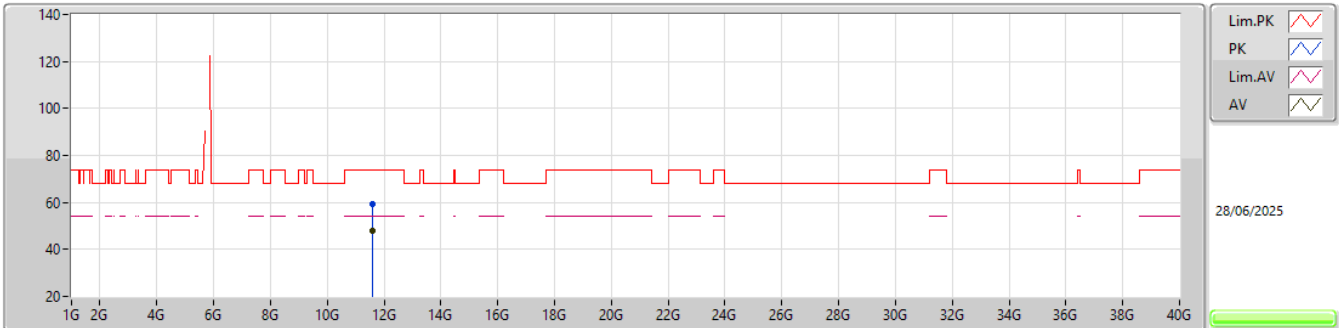


EUT_V_1TX
Setting 79
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.59039G	59.25	74.00	-14.75	38.28	3	Vertical	356	1.26	-	39.18	12.58	30.79			
AV	11.58983G	48.02	54.00	-5.98	27.05	3	Vertical	356	1.26	-	39.18	12.58	30.79			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5795MHz_TX

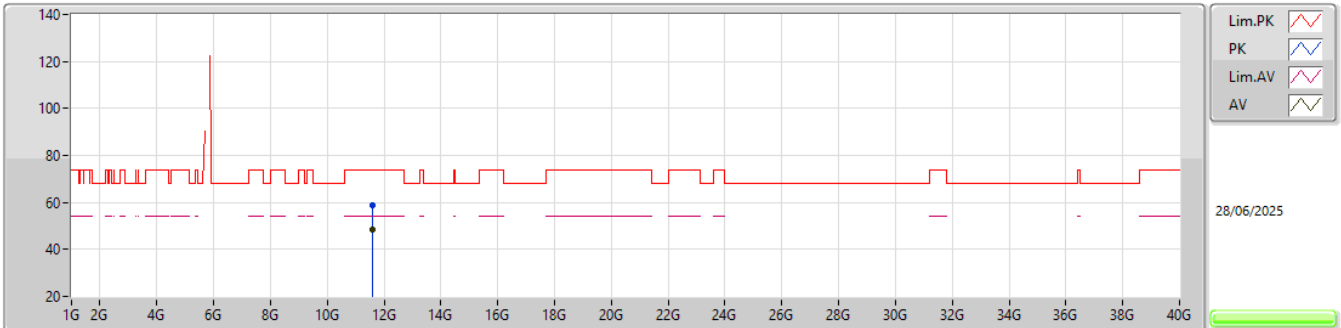


EUT_V_1TX
Setting 79
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.59075G	58.89	74.00	-15.11	37.92	3	Horizontal	230	1.07	-	39.18	12.58	30.79			
AV	11.59018G	48.56	54.00	-5.44	27.59	3	Horizontal	230	1.07	-	39.18	12.58	30.79			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX


5210MHz_TX

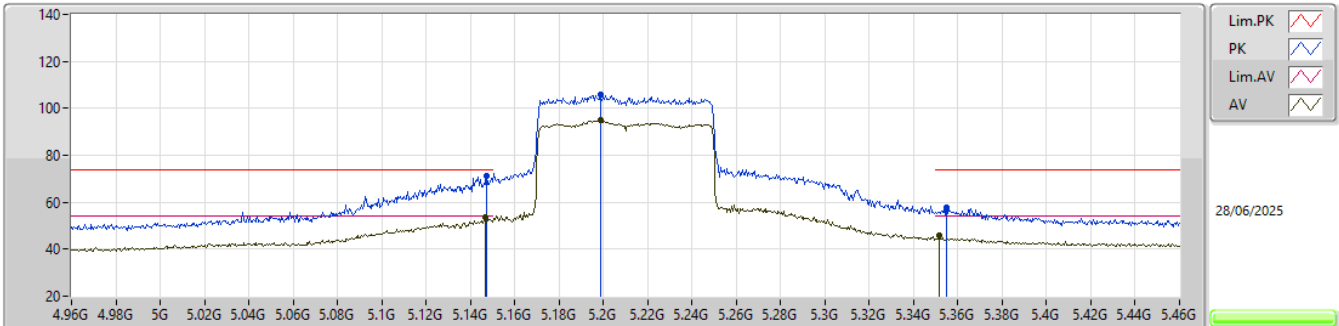EUT_Y_1TX
Setting 51
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	71.12	74.00	-2.88	60.88	3	Horizontal	357	1.93	-	33.59	7.58	30.93			
AV	5.1465G	53.84	54.00	-0.16	43.60	3	Horizontal	357	1.93	-	33.59	7.58	30.93			
PK	5.1985G	105.74	Inf	-Inf	95.35	3	Horizontal	357	1.93	-	33.70	7.59	30.90			
AV	5.199G	94.83	Inf	-Inf	84.44	3	Horizontal	357	1.93	-	33.70	7.59	30.90			
PK	5.355G	57.84	74.00	-16.16	47.04	3	Horizontal	357	1.93	-	33.90	7.71	30.81			
AV	5.3515G	45.82	54.00	-8.18	35.03	3	Horizontal	357	1.93	-	33.90	7.70	30.81			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX

5210MHz_TX

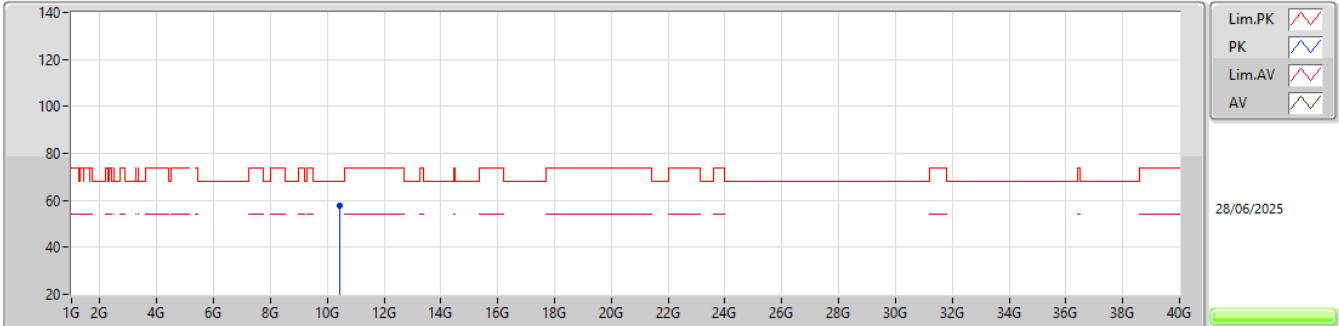


EUT_Y_1TX
Setting 51
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.42005G	57.91	68.20	-10.29	38.17	3	Vertical	181	2.50	-	38.26	11.99	30.51			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX

5210MHz_TX

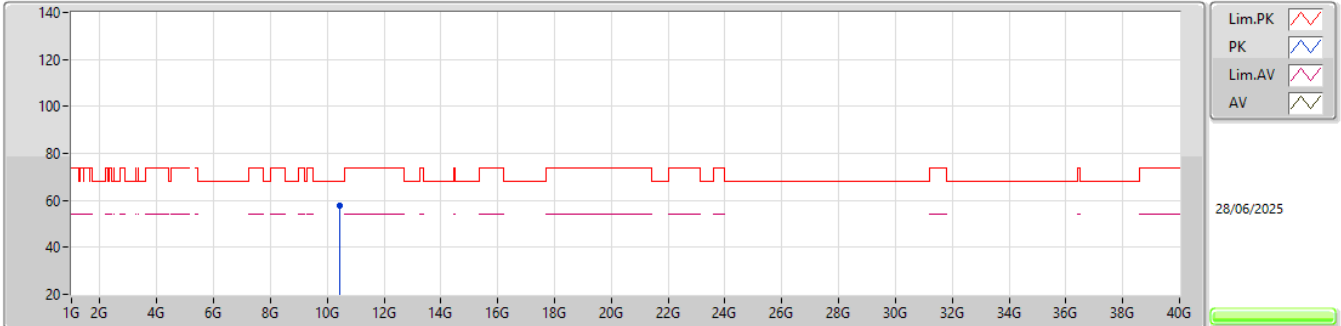


EUT_V_1TX
Setting 51
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.42005G	57.81	68.20	-10.39	38.07	3	Horizontal	64	2.81	-	38.26	11.99	30.51			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX


5290MHz_TX

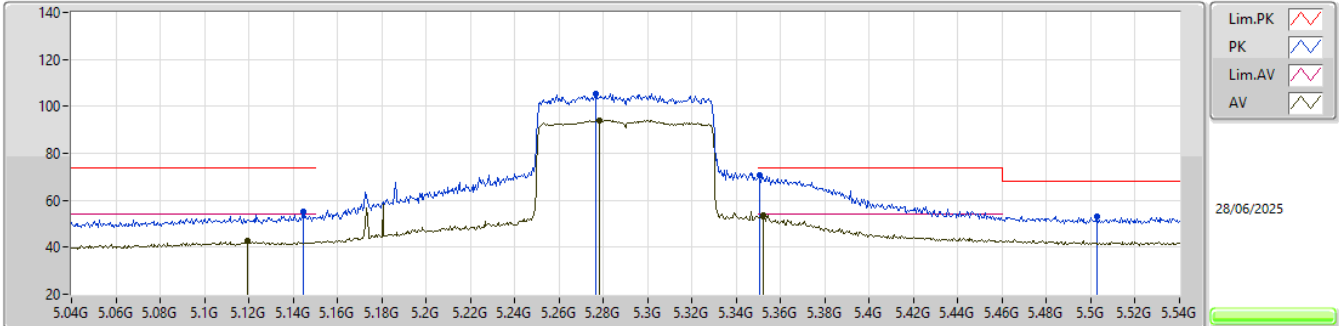EUT_Y_1TX
Setting 47
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1445G	54.95	74.00	-19.05	44.71	3	Horizontal	354	1.80	-	33.59	7.58	30.93			
AV	5.1195G	42.58	54.00	-11.42	32.41	3	Horizontal	354	1.80	-	33.54	7.57	30.94			
PK	5.2765G	105.41	Inf	-Inf	94.87	3	Horizontal	354	1.80	-	33.75	7.65	30.86			
AV	5.278G	94.18	Inf	-Inf	83.62	3	Horizontal	354	1.80	-	33.76	7.65	30.85			
PK	5.3505G	70.54	74.00	-3.46	59.75	3	Horizontal	354	1.80	-	33.90	7.70	30.81			
AV	5.352G	53.55	54.00	-0.45	42.76	3	Horizontal	354	1.80	-	33.90	7.70	30.81			
PK	5.5025G	53.31	68.20	-14.89	42.23	3	Horizontal	354	1.80	-	34.01	7.80	30.73			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX

5290MHz_TX

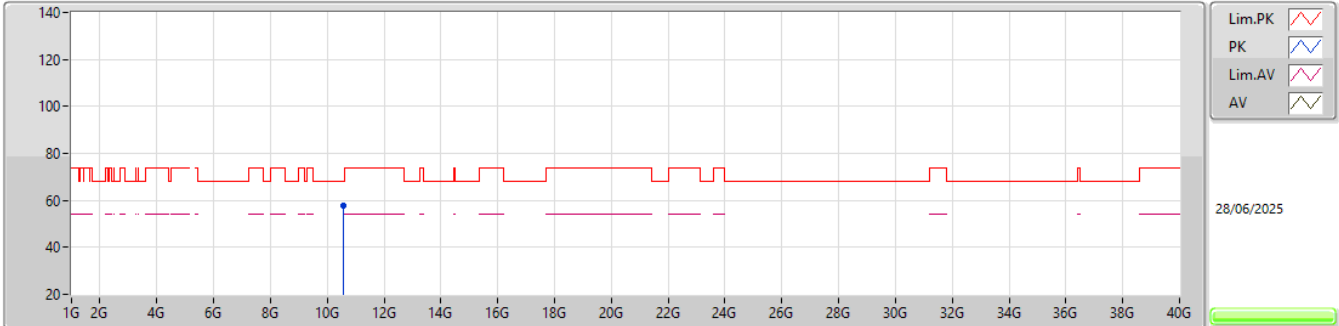


EUT_Y_1TX
Setting 47
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.58039G	57.98	68.20	-10.22	38.04	3	Vertical	254	2.09	-	38.36	12.07	30.49				

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX

5290MHz_TX

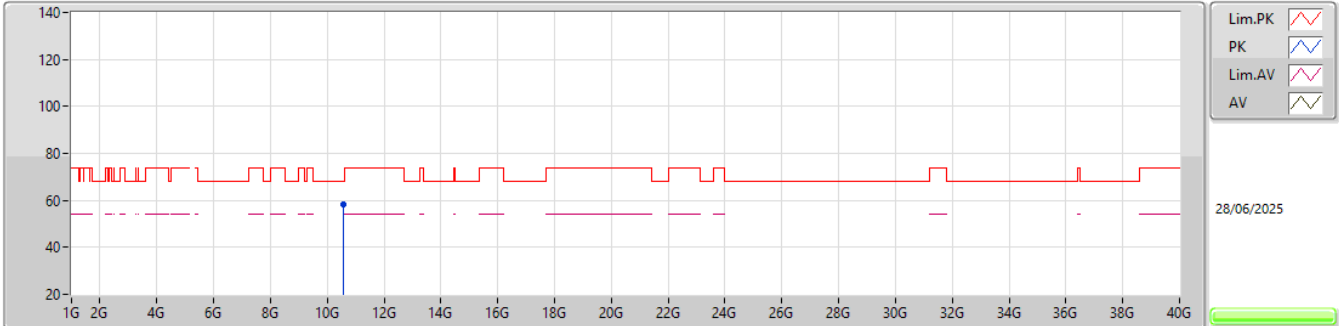


EUT_Y_1TX
Setting 47
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.58094G	58.32	68.20	-9.88	38.38	3	Horizontal	58	2.37	-	38.36	12.07	30.49				

5.47-5.725GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX

5530MHz_TX

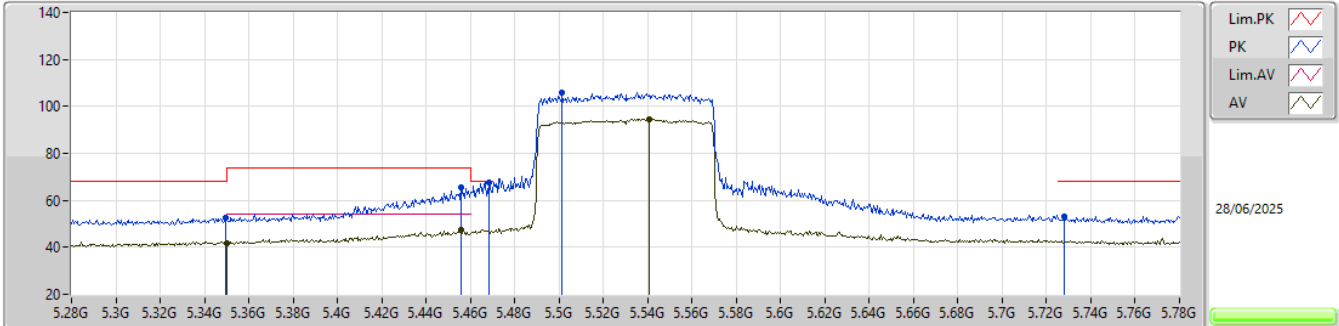


EUT_V_1TX
Setting 47
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3495G	52.33	68.20	-15.87	41.54	3	Horizontal	351	2.18	-	33.90	7.70	30.81			
AV	5.35G	41.82	54.00	-12.18	31.03	3	Horizontal	351	2.18	-	33.90	7.70	30.81			
PK	5.456G	65.51	74.00	-8.49	54.58	3	Horizontal	351	2.18	-	33.91	7.77	30.75			
AV	5.456G	47.21	54.00	-6.79	36.28	3	Horizontal	351	2.18	-	33.91	7.77	30.75			
PK	5.4685G	67.70	68.20	-0.50	56.73	3	Horizontal	351	2.18	-	33.94	7.78	30.75			
PK	5.5015G	105.79	Inf	-Inf	94.72	3	Horizontal	351	2.18	-	34.00	7.80	30.73			
AV	5.5405G	94.73	Inf	-Inf	83.55	3	Horizontal	351	2.18	-	34.08	7.82	30.72			
PK	5.728G	53.08	68.20	-15.12	41.68	3	Horizontal	351	2.18	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TX

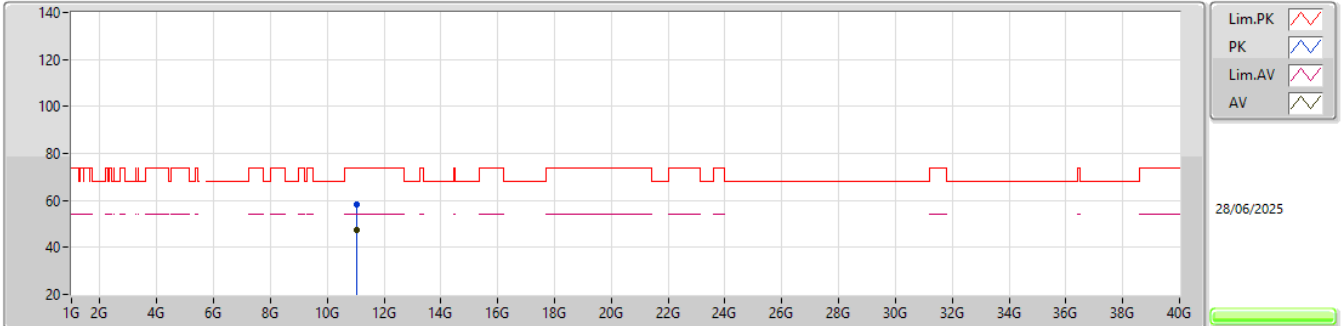


EUT_V_1TX
Setting 47
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.05918G	58.20	74.00	-15.80	37.88	3	Vertical	283	2.86	-	38.52	12.31	30.51			
AV	11.05906G	47.41	54.00	-6.59	27.09	3	Vertical	283	2.86	-	38.52	12.31	30.51			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TX

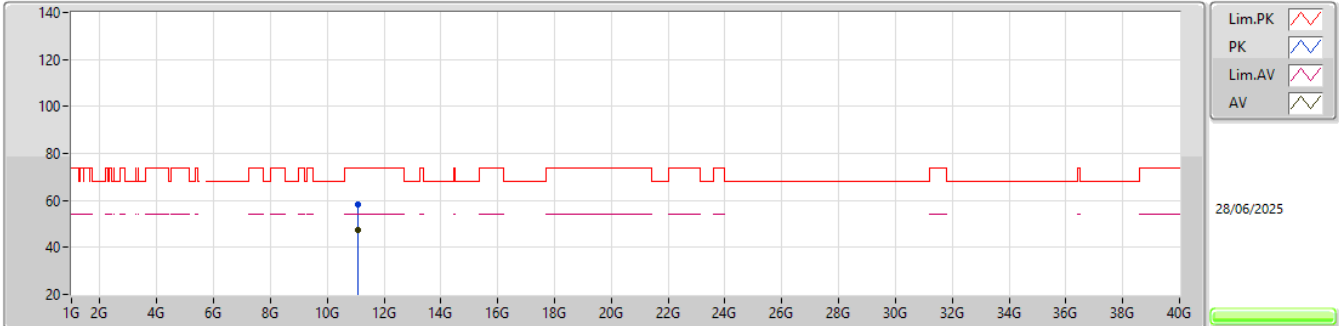


EUT_V_1TX
Setting 47
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.06059G	58.30	74.00	-15.70	37.97	3	Horizontal	136	2.42	-	38.52	12.32	30.51			
AV	11.06014G	47.44	54.00	-6.56	27.11	3	Horizontal	136	2.42	-	38.52	12.32	30.51			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TX

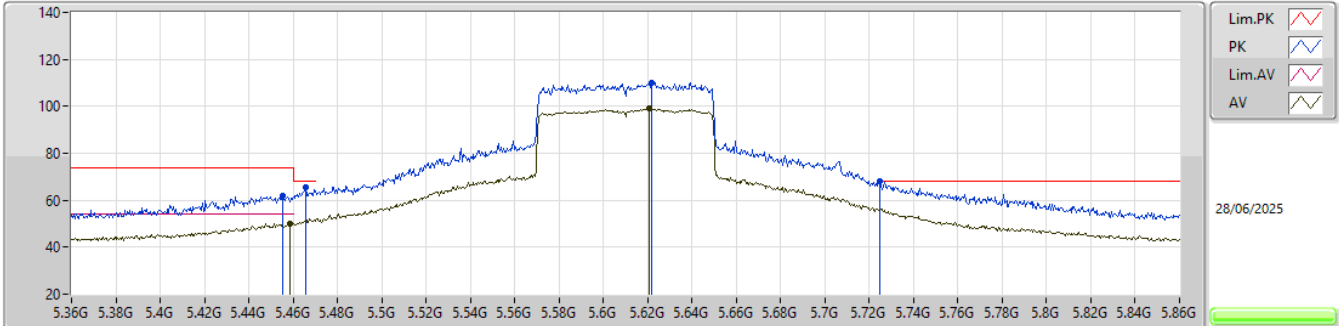


EUT_Y_1TX
Setting 58
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4555G	61.91	74.00	-12.09	50.98	3	Horizontal	348	2.02	-	33.91	7.77	30.75			
AV	5.4585G	49.99	54.00	-4.01	39.04	3	Horizontal	348	2.02	-	33.92	7.78	30.75			
PK	5.4655G	65.46	68.20	-2.74	54.50	3	Horizontal	348	2.02	-	33.93	7.78	30.75			
PK	5.622G	110.22	Inf	-Inf	99.02	3	Horizontal	348	2.02	-	34.00	7.90	30.70			
AV	5.6205G	98.88	Inf	-Inf	87.68	3	Horizontal	348	2.02	-	34.00	7.90	30.70			
PK	5.725G	68.11	68.20	-0.09	56.71	3	Horizontal	348	2.02	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TX

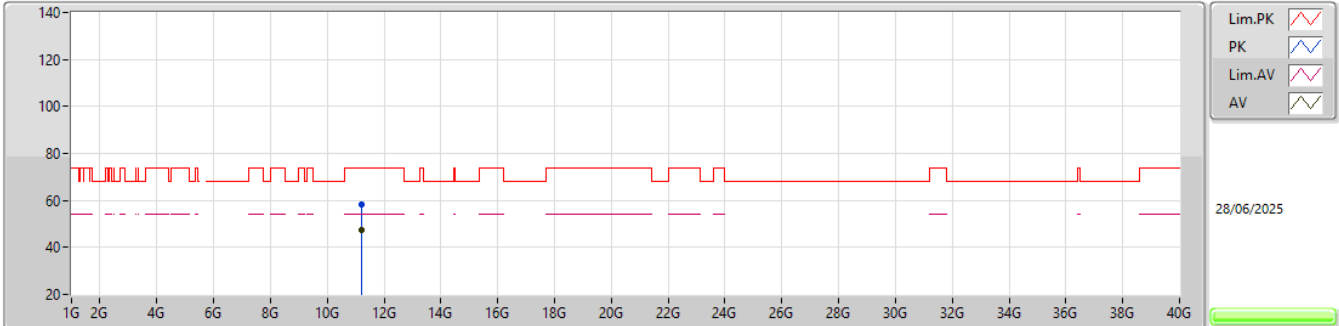


EUT_V_1TX
Setting 58
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.2196G	58.30	74.00	-15.70	37.98	3	Vertical	307	2.89	-	38.50	12.40	30.58			
AV	11.22004G	47.58	54.00	-6.42	27.26	3	Vertical	307	2.89	-	38.50	12.40	30.58			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TX

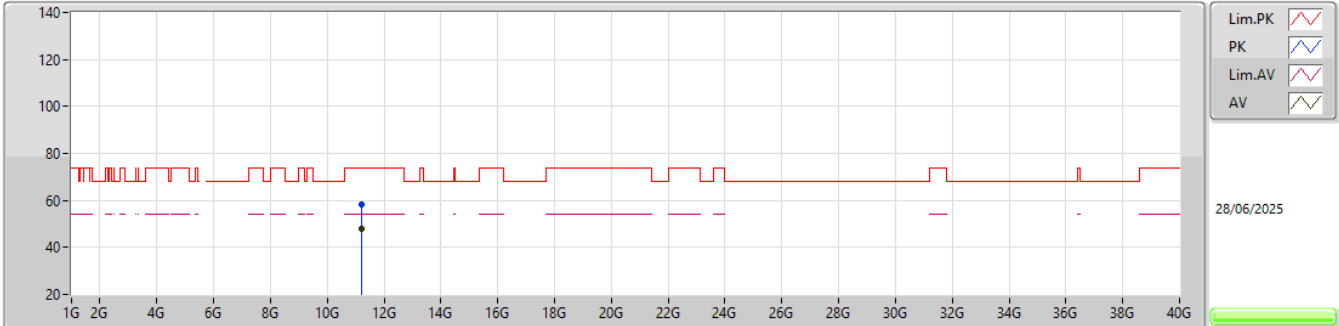


EUT_V_1TX
Setting 58
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.21936G	58.51	74.00	-15.49	38.19	3	Horizontal	205	1.79	-	38.50	12.40	30.58			
AV	11.21938G	47.72	54.00	-6.28	27.40	3	Horizontal	205	1.79	-	38.50	12.40	30.58			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TX

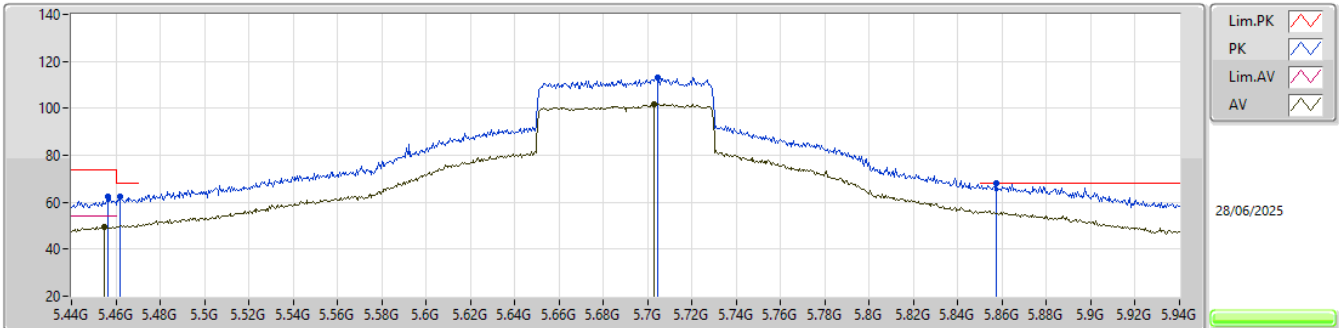


EUT Y_1TX
Setting 70
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4565G	62.21	74.00	-11.79	51.28	3	Horizontal	353	2.06	-	33.91	7.77	30.75
AV	5.455G	49.61	54.00	-4.39	38.69	3	Horizontal	353	2.06	-	33.91	7.77	30.76
PK	5.462G	62.39	68.20	-5.81	51.44	3	Horizontal	353	2.06	-	33.92	7.78	30.75
PK	5.7045G	112.88	Inf	-Inf	101.52	3	Horizontal	353	2.06	-	34.00	8.04	30.68
AV	5.703G	101.86	Inf	-Inf	90.50	3	Horizontal	353	2.06	-	34.00	8.04	30.68
PK	5.8575G	68.11	68.20	-0.09	56.64	3	Horizontal	353	2.06	-	33.93	8.18	30.64

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TX

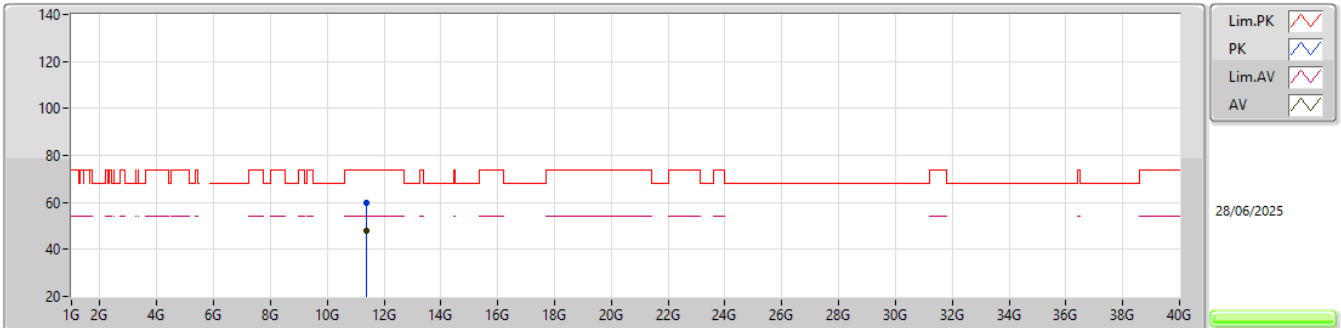


EUT_V_1TX
Setting 70
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.38017G	59.62	74.00	-14.38	39.09	3	Vertical	69	2.08	-	38.70	12.48	30.65			
AV	11.3807G	47.76	54.00	-6.24	27.24	3	Vertical	69	2.08	-	38.70	12.48	30.66			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TX

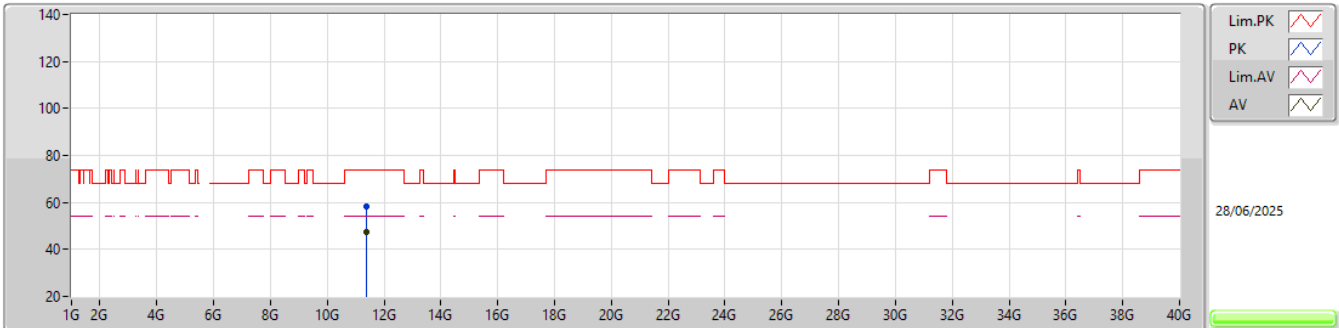


EUT_V_1TX
Setting 70
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.3829G	58.50	74.00	-15.50	37.98	3	Vertical	291	2.80	-	38.70	12.48	30.66			
AV	11.37388G	47.33	54.00	-6.67	26.81	3	Vertical	291	2.80	-	38.70	12.47	30.65			

5.725-5.85GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX


5775MHz_TX

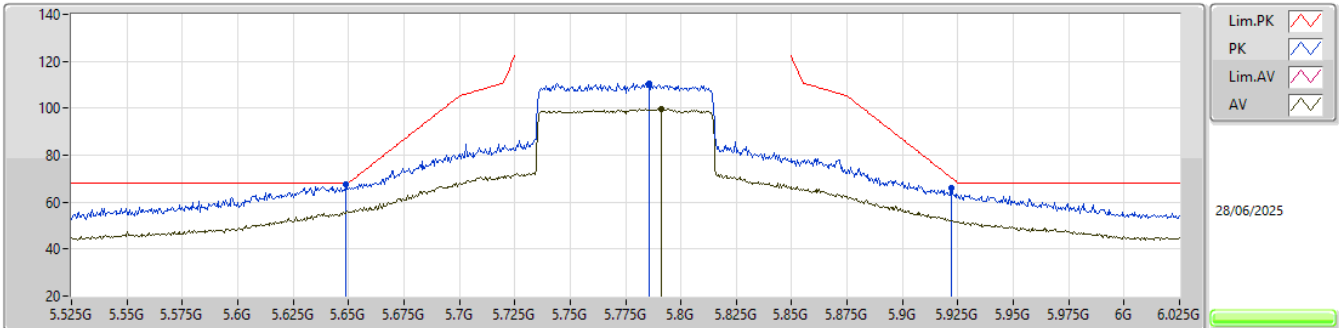EUT_Y_1TX
Setting 62
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.649G	67.33	68.20	-0.87	56.07	3	Horizontal	353	2.06	-	34.00	7.95	30.69			
PK	5.7855G	110.70	Inf	-Inf	99.18	3	Horizontal	353	2.06	-	34.00	8.18	30.66			
AV	5.791G	99.75	Inf	-Inf	88.22	3	Horizontal	353	2.06	-	34.00	8.19	30.66			
PK	5.922G	66.24	70.42	-4.18	54.57	3	Horizontal	353	2.06	-	34.14	8.16	30.63			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5775MHz_TX

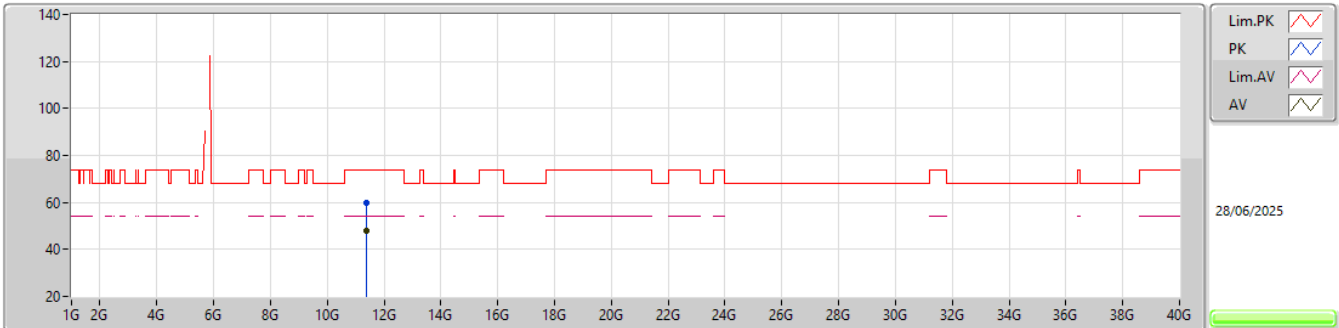EUT_V_1TX
Setting 62
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.38017G	59.62	74.00	-14.38	39.09	3	Vertical	69	2.08	-	38.70	12.48	30.65			
AV	11.3807G	47.76	54.00	-6.24	27.24	3	Vertical	69	2.08	-	38.70	12.48	30.66			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TX

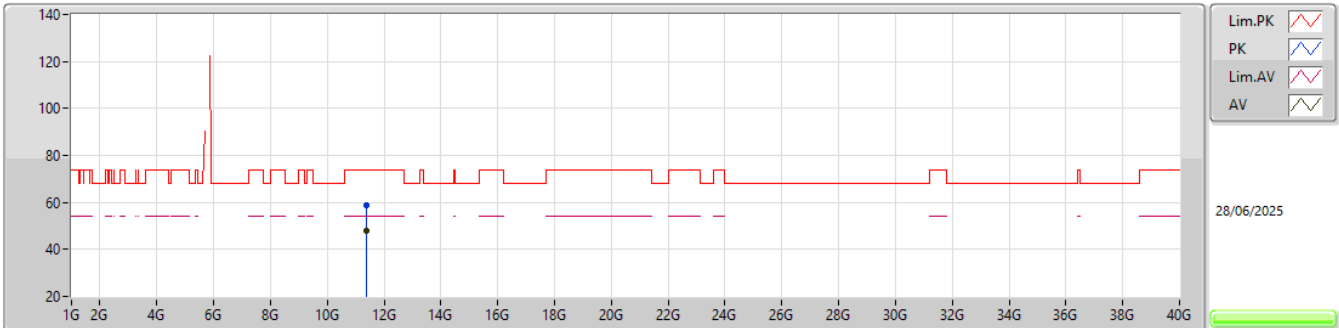


EUT_V_1TX
Setting 62
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.38002G	58.63	74.00	-15.37	38.10	3	Horizontal	232	1.93	-	38.70	12.48	30.65			
AV	11.38044G	47.91	54.00	-6.09	27.39	3	Horizontal	232	1.93	-	38.70	12.48	30.66			

5.25-5.35GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TX

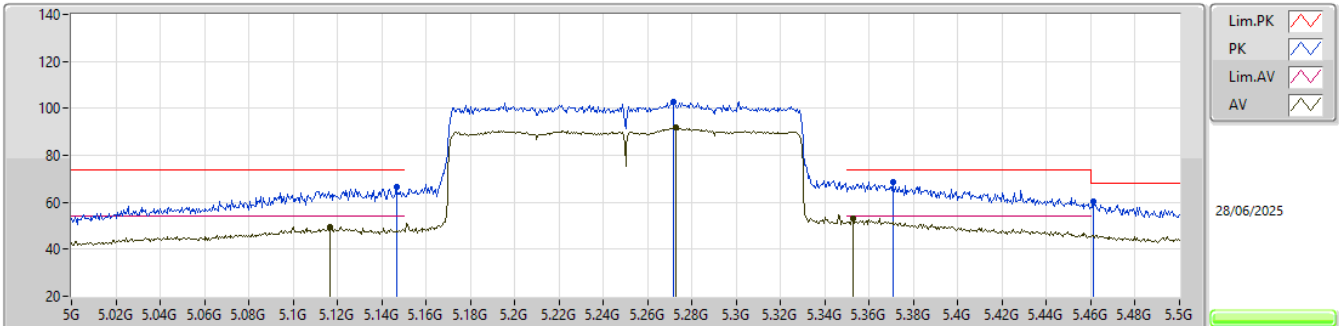


EUT_Y_1TX
Setting 49
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1465G	66.58	74.00	-7.42	56.34	3	Horizontal	354	2.13	-	33.59	7.58	30.93			
AV	5.1165G	49.48	54.00	-4.52	39.32	3	Horizontal	354	2.13	-	33.53	7.57	30.94			
PK	5.2715G	102.66	Inf	-Inf	92.14	3	Horizontal	354	2.13	-	33.74	7.64	30.86			
AV	5.2725G	91.89	Inf	-Inf	81.37	3	Horizontal	354	2.13	-	33.74	7.64	30.86			
PK	5.3705G	68.61	74.00	-5.39	57.79	3	Horizontal	354	2.13	-	33.90	7.72	30.80			
AV	5.3525G	52.98	54.00	-1.02	42.19	3	Horizontal	354	2.13	-	33.90	7.70	30.81			
PK	5.461G	60.26	68.20	-7.94	49.31	3	Horizontal	354	2.13	-	33.92	7.78	30.75			

5.25-5.35GHz_802.11ax_HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TX

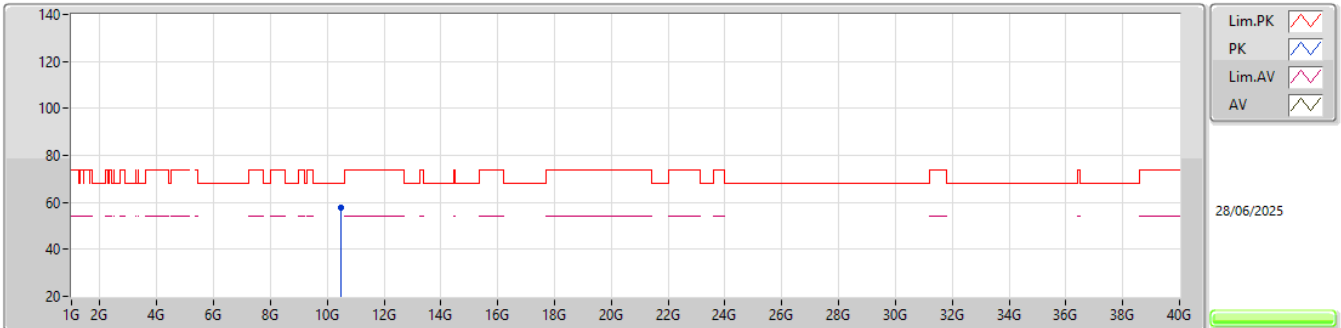


EUT_Y_1TX
Setting 49
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49988G	57.72	68.20	-10.48	37.88	3	Vertical	75	2.11	-	38.30	12.03	30.49			

5.25-5.35GHz_802.11ax_HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TX

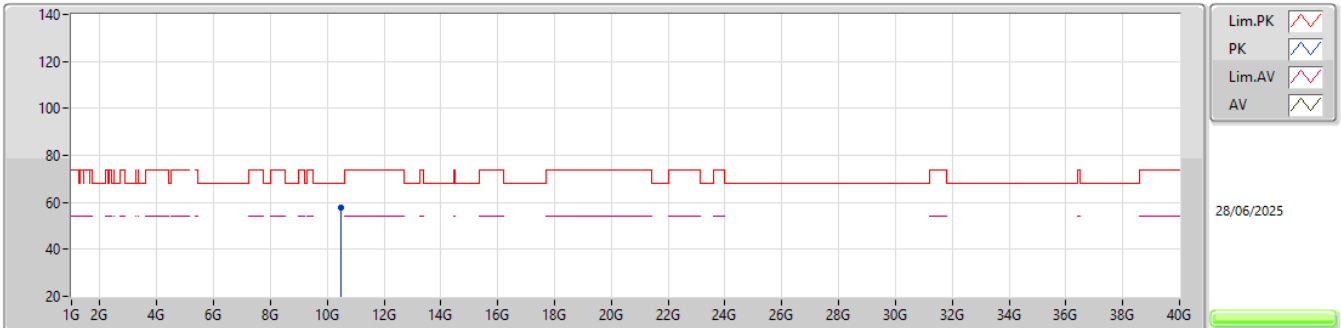


EUT_Y_1TX
Setting 49
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.49926G	57.96	68.20	-10.24	38.12	3	Horizontal	79	2.74	-	38.30	12.03	30.49				

5.47-5.725GHz_802.11ax HEW160_Nss1,(MCS0)_1TX


5570MHz_TX

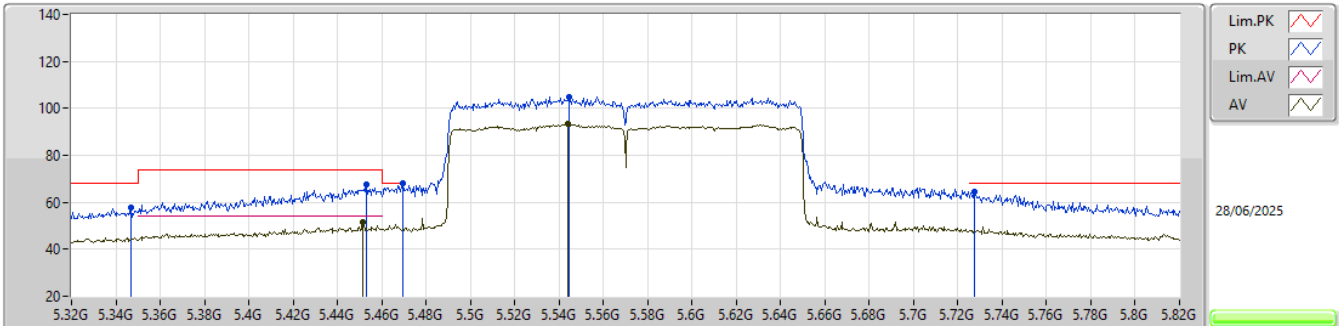EUT_Y_1TX
Setting 50
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.347G	57.71	68.20	-10.49	46.94	3	Horizontal	352	2.15	-	33.89	7.70	30.82			
PK	5.453G	67.35	74.00	-6.65	56.43	3	Horizontal	352	2.15	-	33.91	7.77	30.76			
AV	5.4515G	51.71	54.00	-2.29	40.80	3	Horizontal	352	2.15	-	33.90	7.77	30.76			
PK	5.4695G	67.98	68.20	-0.22	57.01	3	Horizontal	352	2.15	-	33.94	7.78	30.75			
PK	5.5445G	104.71	Inf	-Inf	93.51	3	Horizontal	352	2.15	-	34.09	7.83	30.72			
AV	5.544G	93.31	Inf	-Inf	82.11	3	Horizontal	352	2.15	-	34.09	7.83	30.72			
PK	5.7275G	64.67	68.20	-3.53	53.27	3	Horizontal	352	2.15	-	34.00	8.08	30.68			

5.47-5.725GHz_802.11ax HEW160_Nss1,(MCS0)_1TX


5570MHz_TX

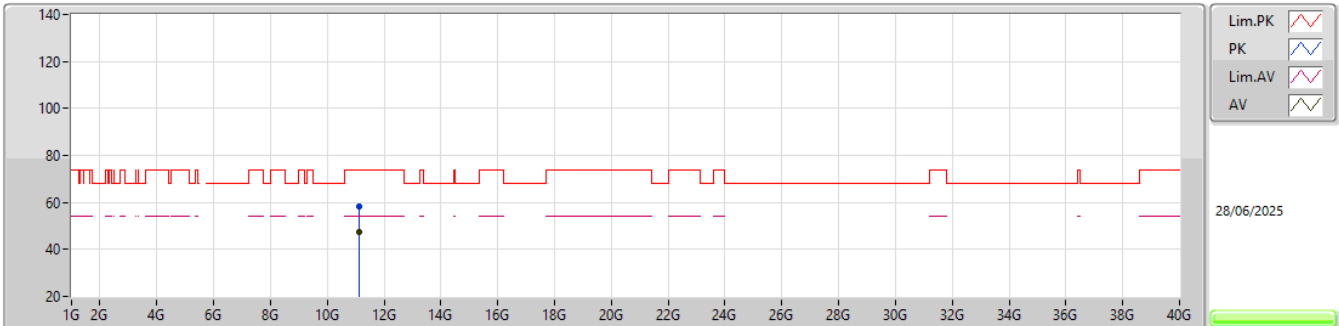EUT_V_1TX
Setting 50
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.14G	58.23	74.00	-15.77	37.89	3	Vertical	321	1.43	-	38.52	12.36	30.54			
AV	11.14024G	47.30	54.00	-6.70	26.96	3	Vertical	321	1.43	-	38.52	12.36	30.54			

5.47-5.725GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TX

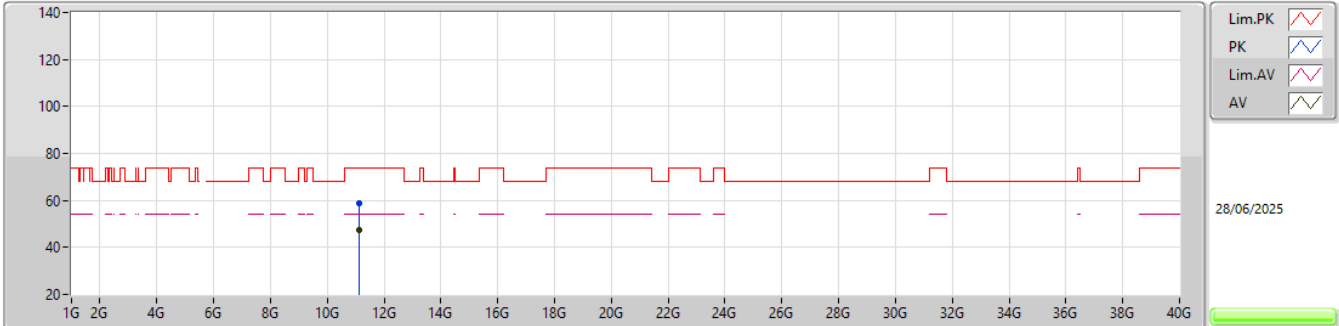

EUT V_1TX
Setting 50
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.13908G	58.56	74.00	-15.44	38.22	3	Horizontal	149	1.35	-	38.52	12.36	30.54			
AV	11.14081G	47.29	54.00	-6.71	26.95	3	Horizontal	149	1.35	-	38.52	12.36	30.54			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX	Pass	PK	5.469G	68.15	68.20	-0.05	3	Vertical	174	2.48	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

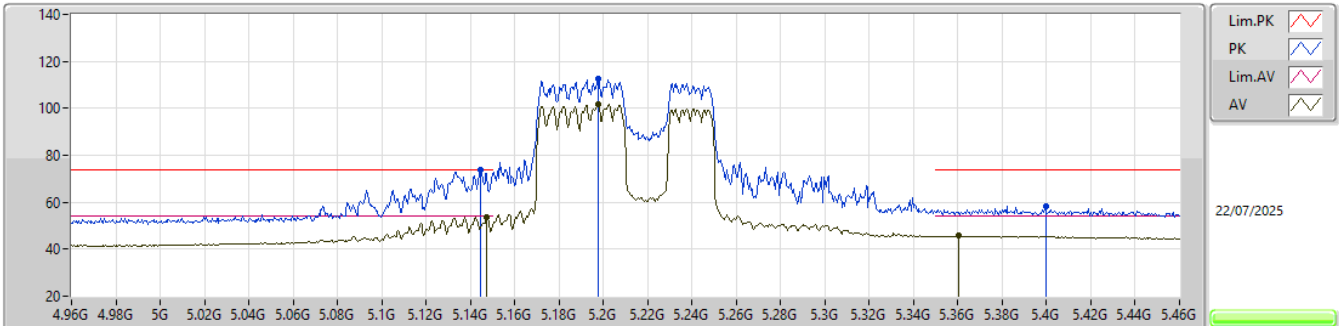EUT_Z_4TX
Setting 61
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1445G	73.89	74.00	-0.11	67.44	3	Vertical	293	2.39	-	33.90	7.48	34.93
AV	5.1475G	53.81	54.00	-0.19	47.35	3	Vertical	293	2.39	-	33.90	7.49	34.93
PK	5.1975G	112.61	Inf	-Inf	105.84	3	Vertical	293	2.39	-	34.09	7.60	34.92
AV	5.1975G	101.60	Inf	-Inf	94.83	3	Vertical	293	2.39	-	34.09	7.60	34.92
PK	5.3995G	58.38	74.00	-15.62	50.70	3	Vertical	293	2.39	-	34.70	7.86	34.88
AV	5.3605G	45.65	54.00	-8.35	38.19	3	Vertical	293	2.39	-	34.54	7.81	34.89

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

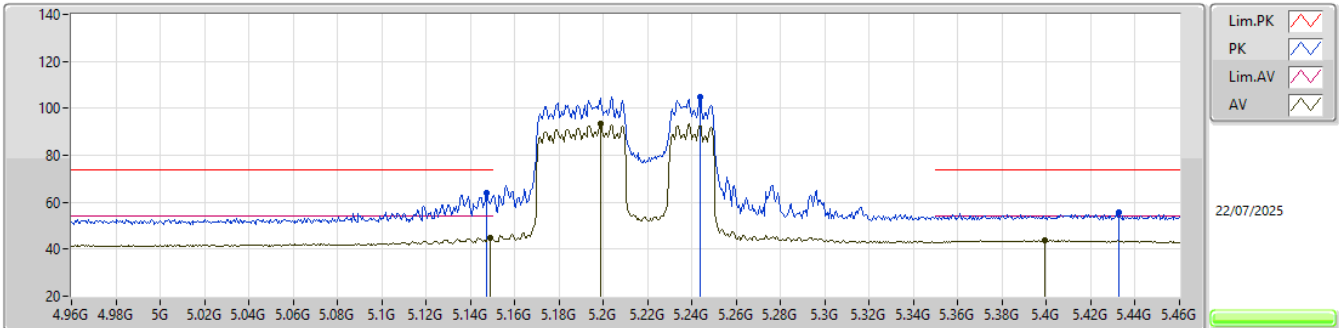EUT_Z_4TX
Setting 61
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	63.95	74.00	-10.05	57.49	3	Horizontal	294	2.22	-	33.90	7.49	34.93			
AV	5.149G	44.87	54.00	-9.13	38.41	3	Horizontal	294	2.22	-	33.90	7.49	34.93			
PK	5.2435G	104.96	Inf	-Inf	98.11	3	Horizontal	294	2.22	-	34.10	7.66	34.91			
AV	5.1985G	93.29	Inf	-Inf	86.51	3	Horizontal	294	2.22	-	34.09	7.61	34.92			
PK	5.4325G	55.68	74.00	-18.32	48.10	3	Horizontal	294	2.22	-	34.63	7.82	34.87			
AV	5.399G	43.61	54.00	-10.39	35.93	3	Horizontal	294	2.22	-	34.70	7.86	34.88			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

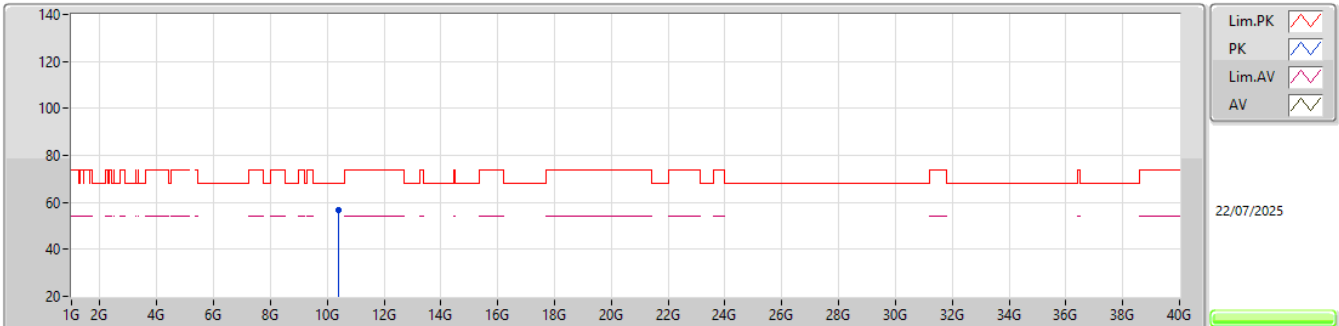


EUT_Z_4TX
Setting 61
03-I-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40716G	56.68	68.20	-11.52	42.58	3	Vertical	60	2.06	-	37.90	11.18	34.98			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

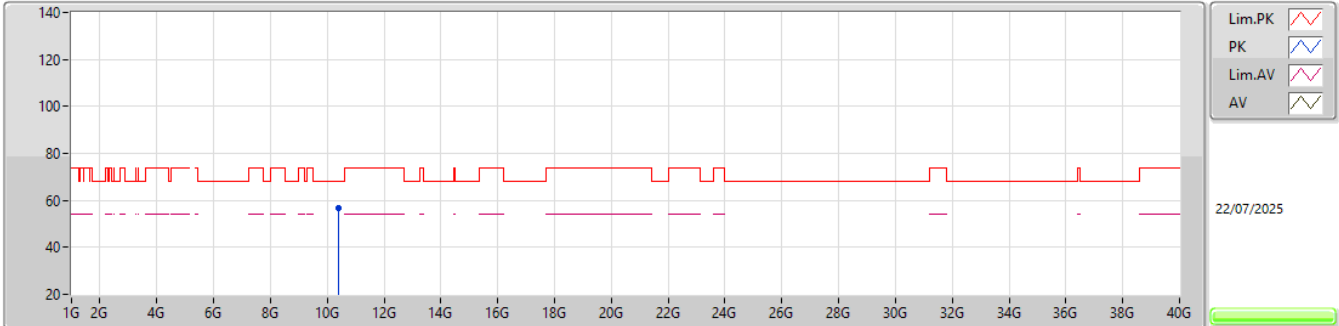


EUT_Z_4TX
Setting 61
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.40992G	56.57	68.20	-11.63	42.46	3	Horizontal	6	1.07	-	37.90	11.19	34.98				

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5290MHz_TX

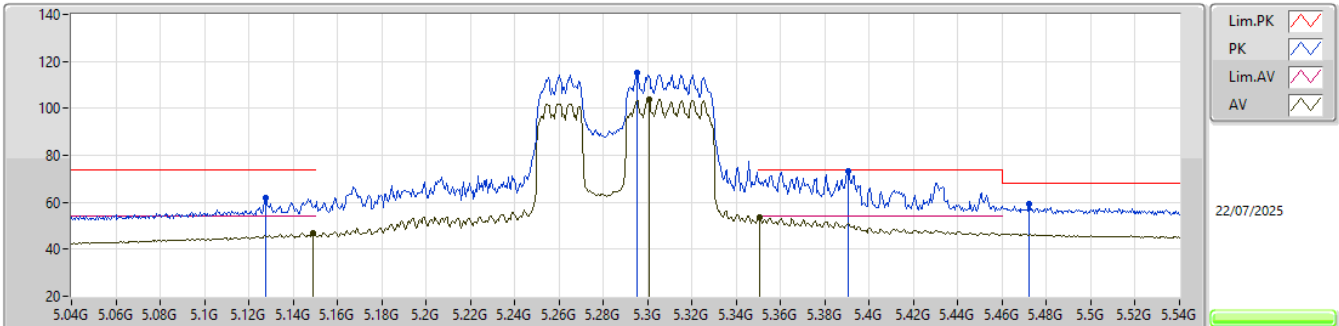EUT_Z_4TX
Setting 67
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1275G	61.77	74.00	-12.23	55.36	3	Vertical	330	2.24	-	33.90	7.44	34.93
AV	5.149G	46.78	54.00	-7.22	40.32	3	Vertical	330	2.24	-	33.90	7.49	34.93
PK	5.295G	115.37	Inf	-Inf	108.17	3	Vertical	330	2.24	-	34.37	7.73	34.90
AV	5.3005G	103.86	Inf	-Inf	96.62	3	Vertical	330	2.24	-	34.40	7.74	34.90
PK	5.3905G	73.46	74.00	-0.54	65.83	3	Vertical	330	2.24	-	34.66	7.85	34.88
AV	5.3505G	53.82	54.00	-0.18	46.41	3	Vertical	330	2.24	-	34.50	7.80	34.89
PK	5.472G	59.38	68.20	-8.82	51.88	3	Vertical	330	2.24	-	34.60	7.77	34.87

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5290MHz_TX

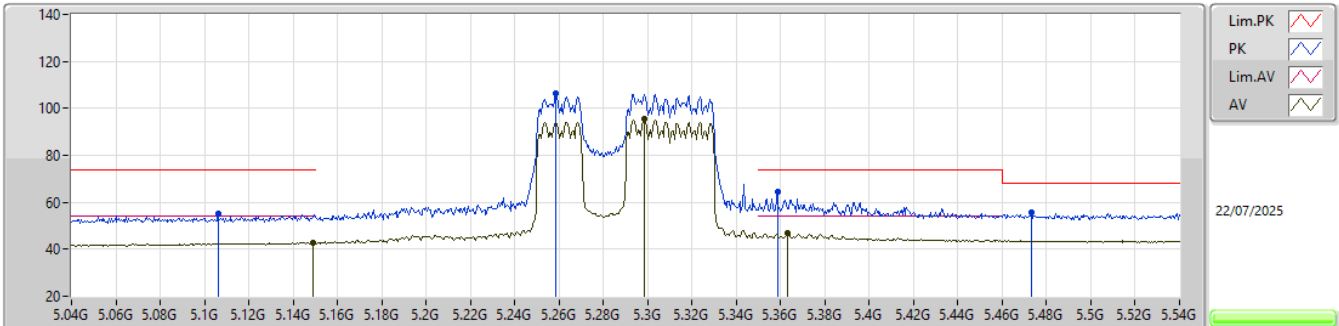EUT_Z_4TX
Setting 67
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.106G	55.16	74.00	-18.84	48.81	3	Horizontal	293	2.39	-	33.90	7.39	34.94			
AV	5.149G	42.97	54.00	-11.03	36.51	3	Horizontal	293	2.39	-	33.90	7.49	34.93			
PK	5.2585G	106.37	Inf	-Inf	99.45	3	Horizontal	293	2.39	-	34.15	7.68	34.91			
AV	5.2985G	95.30	Inf	-Inf	88.08	3	Horizontal	293	2.39	-	34.39	7.73	34.90			
PK	5.3585G	64.66	74.00	-9.34	57.21	3	Horizontal	293	2.39	-	34.53	7.81	34.89			
AV	5.363G	46.79	54.00	-7.21	39.32	3	Horizontal	293	2.39	-	34.55	7.81	34.89			
PK	5.473G	55.47	68.20	-12.73	47.97	3	Horizontal	293	2.39	-	34.60	7.77	34.87			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

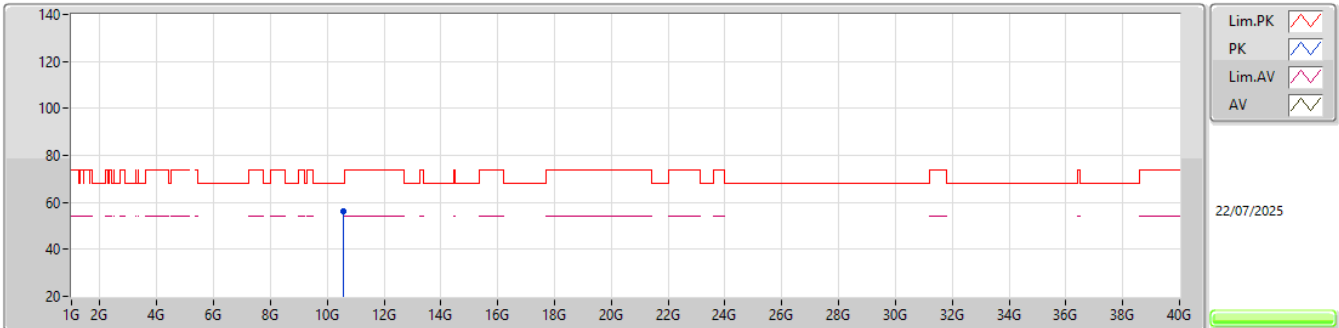


EUT_Z_4TX
Setting 67
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.5653G	56.29	68.20	-11.91	41.75	3	Vertical	262	2.05	-	38.20	11.25	34.91				

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

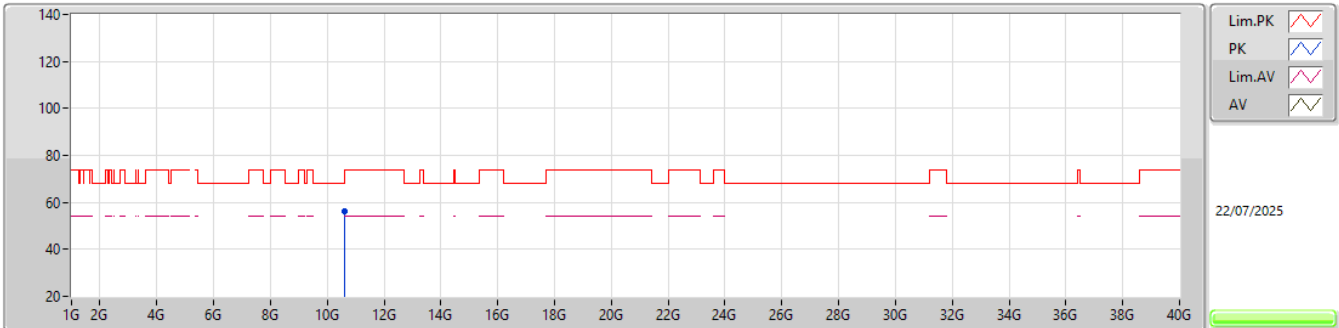


EUT_Z_4TX
Setting 67
03-I-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59287G	56.24	68.20	-11.96	41.70	3	Horizontal	9	1.42	-	38.20	11.26	34.92			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

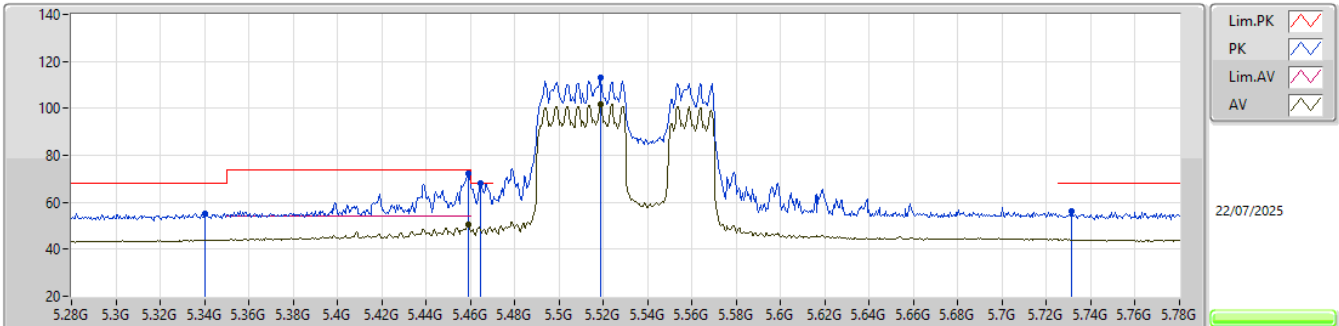EUT_Z_4TX
Setting 54
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.34G	55.32	68.20	-12.88	47.94	3	Vertical	176	2.46	-	34.48	7.79	34.89			
PK	5.459G	72.17	74.00	-1.83	64.65	3	Vertical	176	2.46	-	34.60	7.79	34.87			
AV	5.459G	50.31	54.00	-3.69	42.79	3	Vertical	176	2.46	-	34.60	7.79	34.87			
PK	5.4645G	68.14	68.20	-0.06	60.63	3	Vertical	176	2.46	-	34.60	7.78	34.87			
PK	5.5185G	113.36	Inf	-Inf	105.96	3	Vertical	176	2.46	-	34.56	7.71	34.87			
AV	5.5185G	101.71	Inf	-Inf	94.31	3	Vertical	176	2.46	-	34.56	7.71	34.87			
PK	5.7315G	55.95	68.20	-12.25	48.84	3	Vertical	176	2.46	-	34.20	7.84	34.93			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

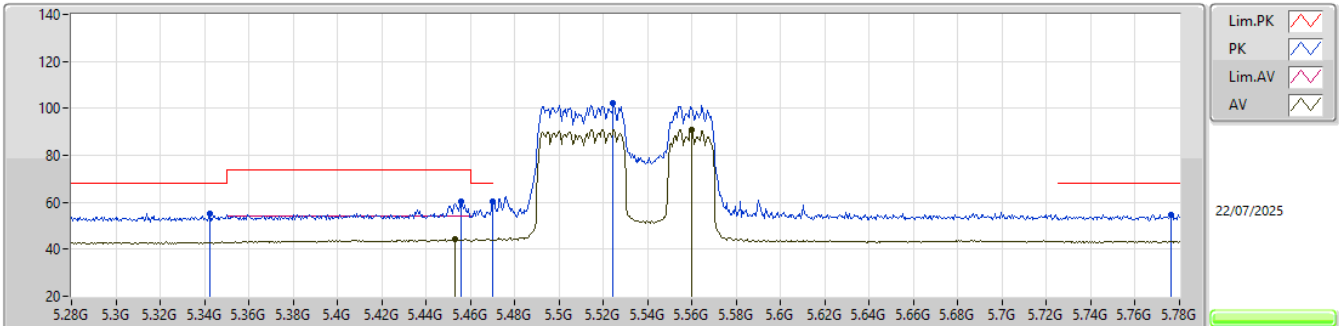EUT_Z_4TX
Setting 54
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3425G	55.14	68.20	-13.06	47.76	3	Horizontal	296	2.27	-	34.48	7.79	34.89
PK	5.456G	60.36	74.00	-13.64	52.84	3	Horizontal	296	2.27	-	34.60	7.79	34.87
AV	5.453G	44.48	54.00	-9.52	36.96	3	Horizontal	296	2.27	-	34.60	7.79	34.87
PK	5.47G	60.43	68.20	-7.77	52.93	3	Horizontal	296	2.27	-	34.60	7.77	34.87
PK	5.5245G	102.01	Inf	-Inf	94.63	3	Horizontal	296	2.27	-	34.55	7.70	34.87
AV	5.56G	90.93	Inf	-Inf	83.69	3	Horizontal	296	2.27	-	34.46	7.66	34.88
PK	5.776G	54.90	68.20	-13.30	47.72	3	Horizontal	296	2.27	-	34.20	7.92	34.94

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

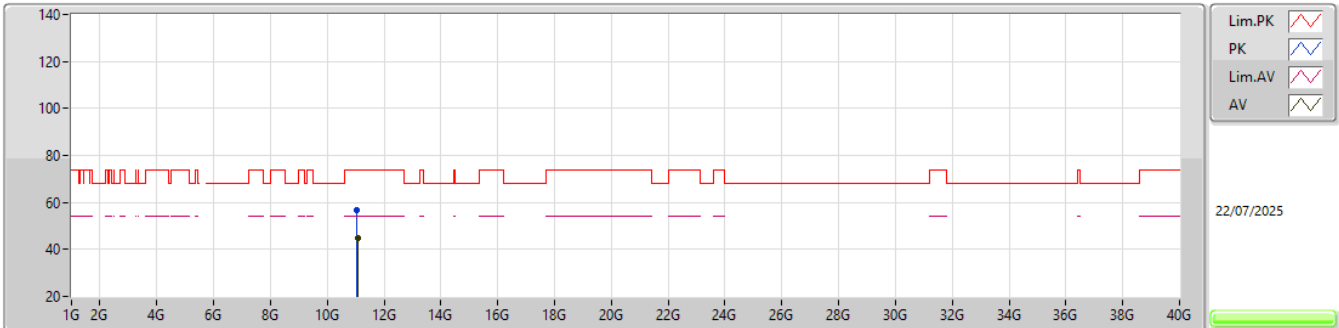


EUT_Z_4TX
Setting 54
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.05544G	56.54	74.00	-17.46	41.68	3	Vertical	149	2.68	-	38.41	11.45	35.00			
AV	11.06816G	44.93	54.00	-9.07	30.04	3	Vertical	149	2.68	-	38.44	11.45	35.00			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

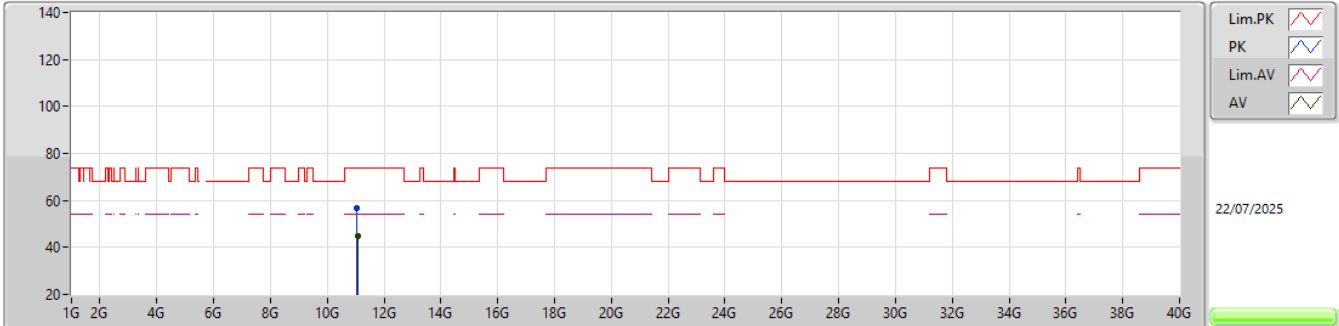


EUT_Z_4TX
Setting 54
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.04815G	56.90	74.00	-17.10	42.06	3	Horizontal	218	1.51	-	38.40	11.44	35.00			
AV	11.07386G	44.88	54.00	-9.12	29.99	3	Horizontal	218	1.51	-	38.45	11.45	35.01			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5610MHz_TX

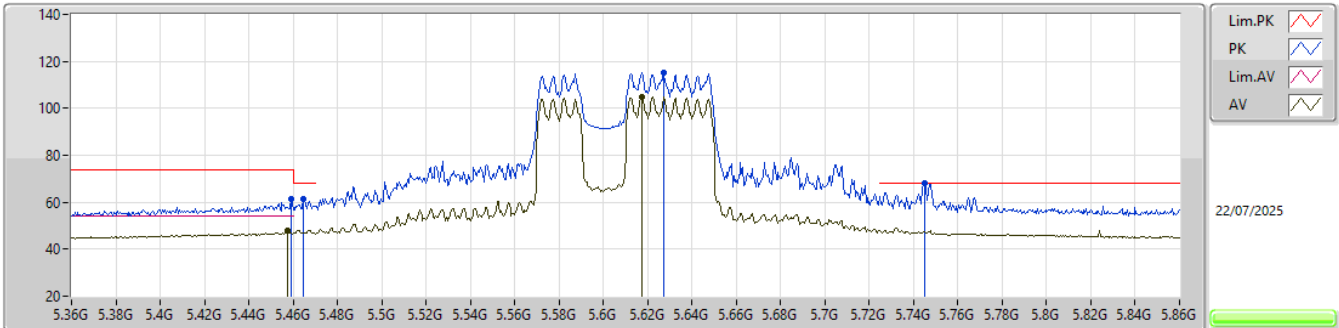


EUT_Z_4TX
Setting 65
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.459G	61.16	74.00	-12.84	53.64	3	Vertical	151	2.91	-	34.60	7.79	34.87
AV	5.4575G	47.70	54.00	-6.30	40.18	3	Vertical	151	2.91	-	34.60	7.79	34.87
PK	5.4645G	61.19	68.20	-7.01	53.68	3	Vertical	151	2.91	-	34.60	7.78	34.87
PK	5.627G	115.13	Inf	-Inf	108.07	3	Vertical	151	2.91	-	34.30	7.66	34.90
AV	5.6175G	104.89	Inf	-Inf	97.85	3	Vertical	151	2.91	-	34.30	7.64	34.90
PK	5.745G	68.02	68.20	-0.18	60.89	3	Vertical	151	2.91	-	34.20	7.86	34.93

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5610MHz_TX

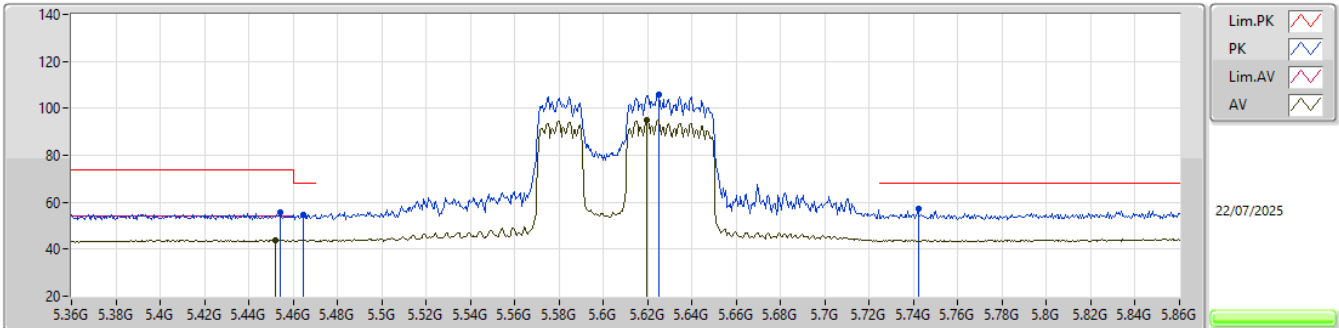EUT_Z_4TX
Setting 65
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.454G	55.86	74.00	-18.14	48.34	3	Horizontal	296	2.22	-	34.60	7.79	34.87
AV	5.452G	43.77	54.00	-10.23	36.25	3	Horizontal	296	2.22	-	34.60	7.79	34.87
PK	5.4645G	54.85	68.20	-13.35	47.34	3	Horizontal	296	2.22	-	34.60	7.78	34.87
PK	5.625G	105.65	Inf	-Inf	98.60	3	Horizontal	296	2.22	-	34.30	7.65	34.90
AV	5.6195G	95.04	Inf	-Inf	88.00	3	Horizontal	296	2.22	-	34.30	7.64	34.90
PK	5.742G	57.13	68.20	-11.07	50.00	3	Horizontal	296	2.22	-	34.20	7.86	34.93

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5610MHz_TX

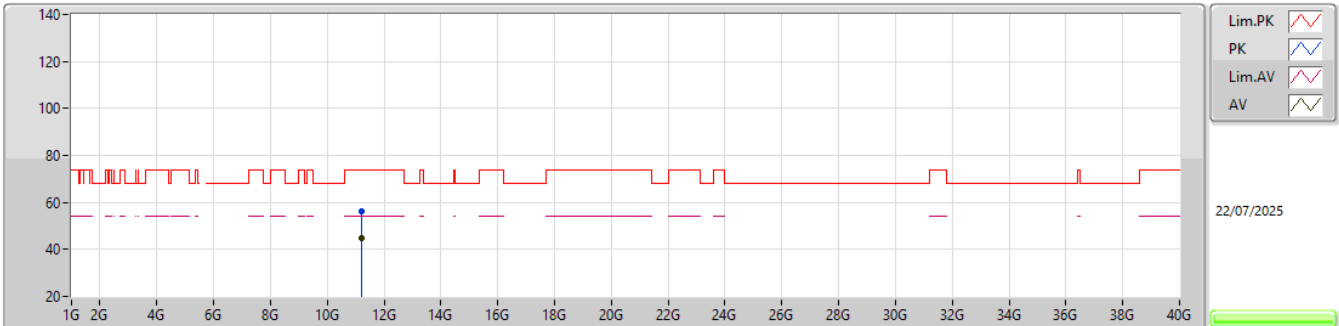EUT_Z_4TX
Setting 65
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.22402G	56.26	74.00	-17.74	41.28	3	Vertical	92	1.57	-	38.50	11.52	35.04			
AV	11.22572G	44.76	54.00	-9.24	29.78	3	Vertical	92	1.57	-	38.50	11.52	35.04			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5610MHz_TX

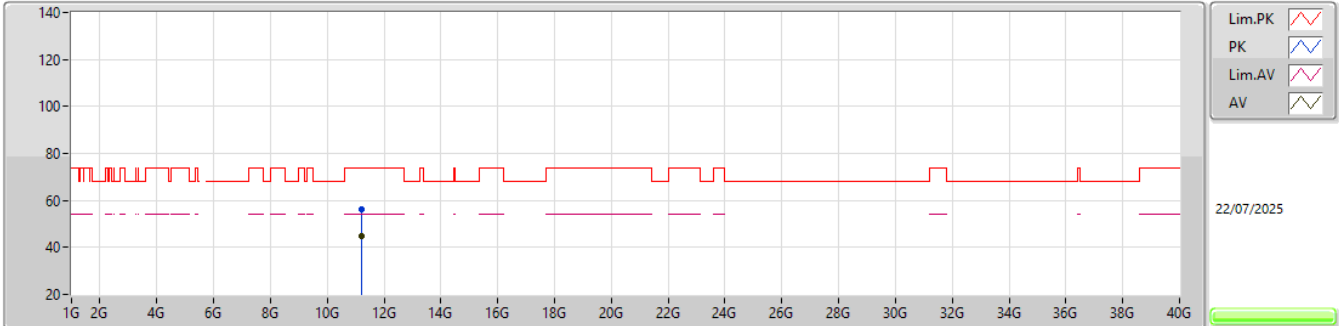


EUT_Z_4TX
Setting 65
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.22496G	56.18	74.00	-17.82	41.20	3	Horizontal	200	1.74	-	38.50	11.52	35.04			
AV	11.22536G	44.61	54.00	-9.39	29.63	3	Horizontal	200	1.74	-	38.50	11.52	35.04			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

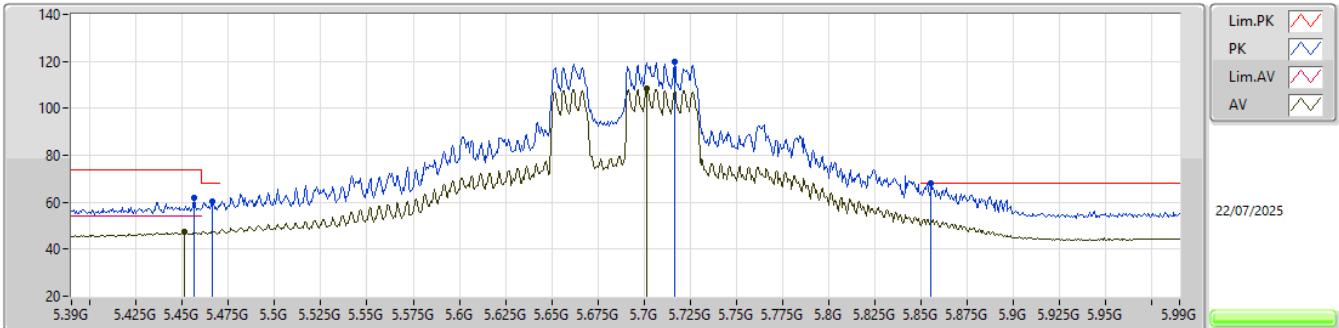


EUT_Z_4TX
Setting 83
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4566G	61.69	74.00	-12.31	54.17	3	Vertical	135	3.00	-	34.60	7.79	34.87
AV	5.4512G	47.36	54.00	-6.64	39.83	3	Vertical	135	3.00	-	34.60	7.80	34.87
PK	5.4662G	60.12	68.20	-8.08	52.61	3	Vertical	135	3.00	-	34.60	7.78	34.87
PK	5.7164G	119.65	Inf	-Inf	112.56	3	Vertical	135	3.00	-	34.20	7.81	34.92
AV	5.7014G	108.27	Inf	-Inf	101.20	3	Vertical	135	3.00	-	34.20	7.79	34.92
PK	5.8556G	68.11	68.20	-0.09	60.74	3	Vertical	135	3.00	-	34.32	8.02	34.97

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5690MHz Straddle 5.47-5.725GHz_TX

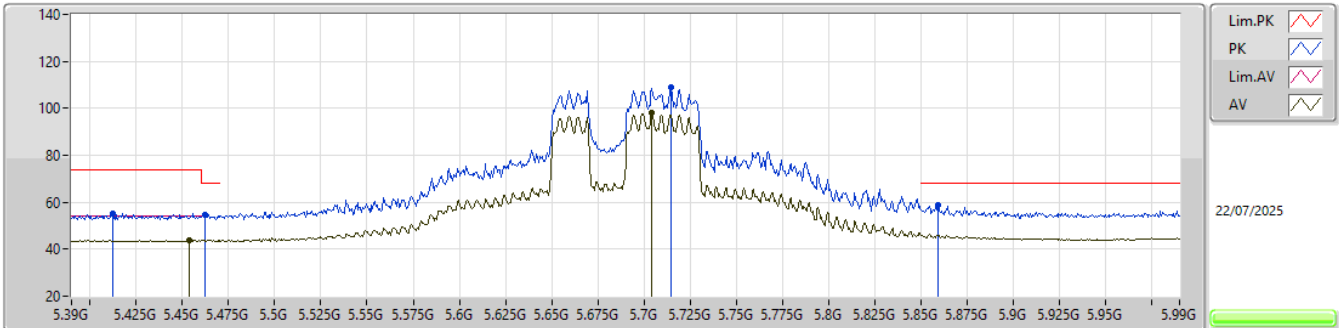EUT_Z_4TX
Setting 83
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4122G	55.39	74.00	-18.61	47.75	3	Horizontal	245	2.26	-	34.68	7.84	34.88			
PK	5.462G	54.73	68.20	-13.47	47.22	3	Horizontal	245	2.26	-	34.60	7.78	34.87			
AV	5.4536G	43.77	54.00	-10.23	36.25	3	Horizontal	245	2.26	-	34.60	7.79	34.87			
PK	5.7146G	109.04	Inf	-Inf	101.95	3	Horizontal	245	2.26	-	34.20	7.81	34.92			
AV	5.7044G	97.92	Inf	-Inf	90.85	3	Horizontal	245	2.26	-	34.20	7.79	34.92			
PK	5.8592G	58.71	68.20	-9.49	51.32	3	Horizontal	245	2.26	-	34.34	8.02	34.97			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

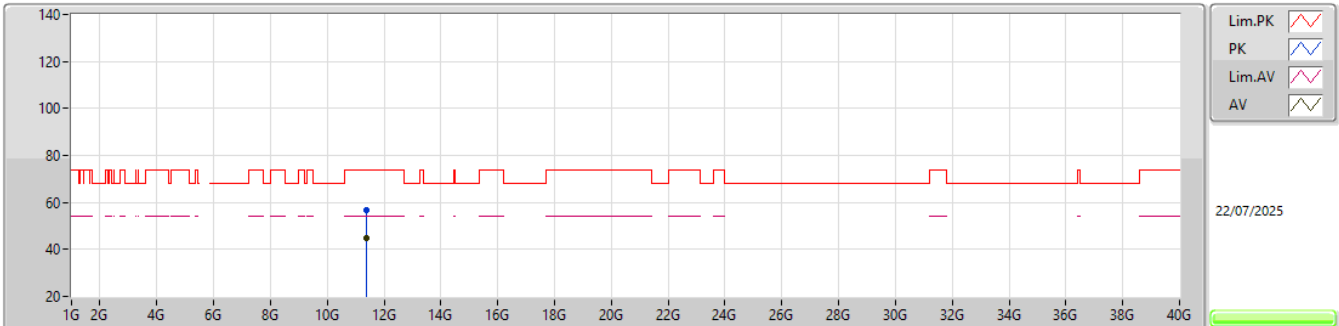


EUT_Z_4TX
Setting 83
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37922G	56.71	74.00	-17.29	41.54	3	Vertical	85	1.72	-	38.66	11.58	35.07			
AV	11.37649G	44.84	54.00	-9.16	29.68	3	Vertical	85	1.72	-	38.65	11.58	35.07			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5690MHz Straddle 5.47-5.725GHz_TX

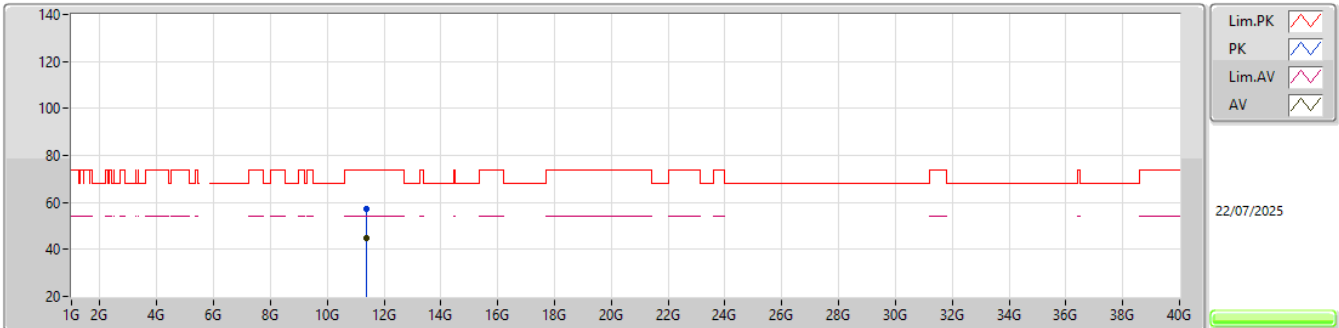


EUT_Z_4TX
Setting 83
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.37325G	57.02	74.00	-16.98	41.86	3	Horizontal	262	2.51	-	38.65	11.58	35.07			
AV	11.39467G	44.92	54.00	-9.08	29.73	3	Horizontal	262	2.51	-	38.69	11.58	35.08			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5775MHz_TX

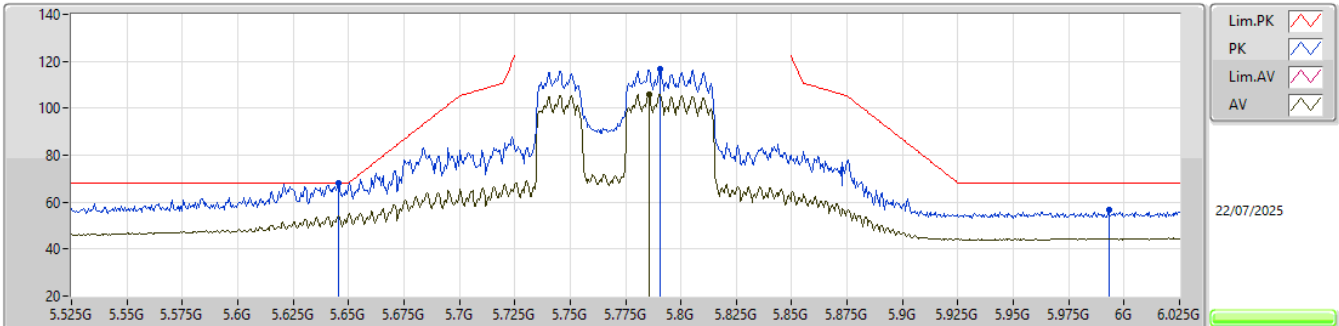EUT_Z_4TX
Setting 71
03-I-J-5-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6455G	68.14	68.20	-0.06	61.05	3	Vertical	144	2.24	-	34.30	7.69	34.90			
PK	5.7905G	116.77	Inf	-Inf	109.58	3	Vertical	144	2.24	-	34.20	7.94	34.95			
AV	5.7855G	106.10	Inf	-Inf	98.92	3	Vertical	144	2.24	-	34.20	7.93	34.95			
PK	5.993G	56.76	68.20	-11.44	48.91	3	Vertical	144	2.24	-	34.70	8.16	35.01			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5775MHz_TX

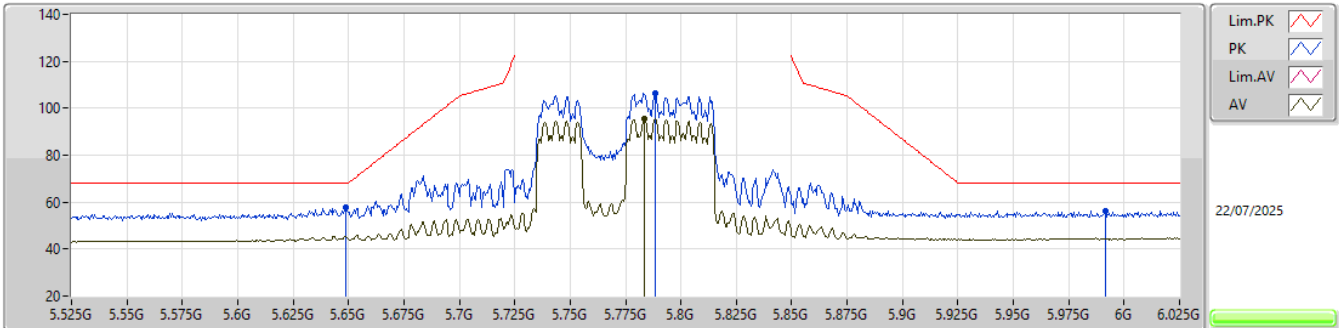EUT_Z_4TX
Setting 71
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6485G	57.63	68.20	-10.57	50.54	3	Horizontal	259	3.00	-	34.30	7.69	34.90			
PK	5.7885G	106.30	Inf	-Inf	99.11	3	Horizontal	259	3.00	-	34.20	7.94	34.95			
AV	5.7835G	95.56	Inf	-Inf	88.38	3	Horizontal	259	3.00	-	34.20	7.93	34.95			
PK	5.9915G	56.42	68.20	-11.78	48.57	3	Horizontal	259	3.00	-	34.70	8.16	35.01			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5775MHz_TX

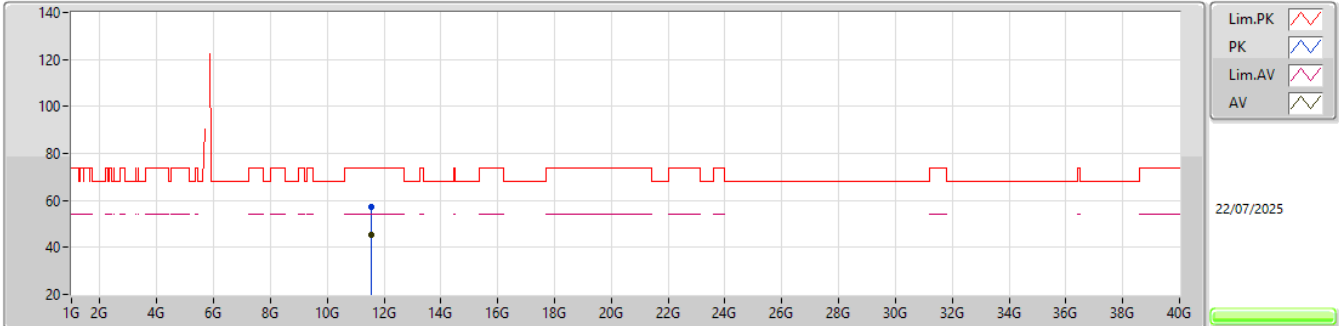


EUT_Z_4TX
Setting 71
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.54316G	57.45	74.00	-16.55	41.85	3	Vertical	238	1.23	-	39.07	11.64	35.11			
AV	11.54235G	45.57	54.00	-8.43	29.97	3	Vertical	238	1.23	-	39.07	11.64	35.11			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX


5775MHz_TX

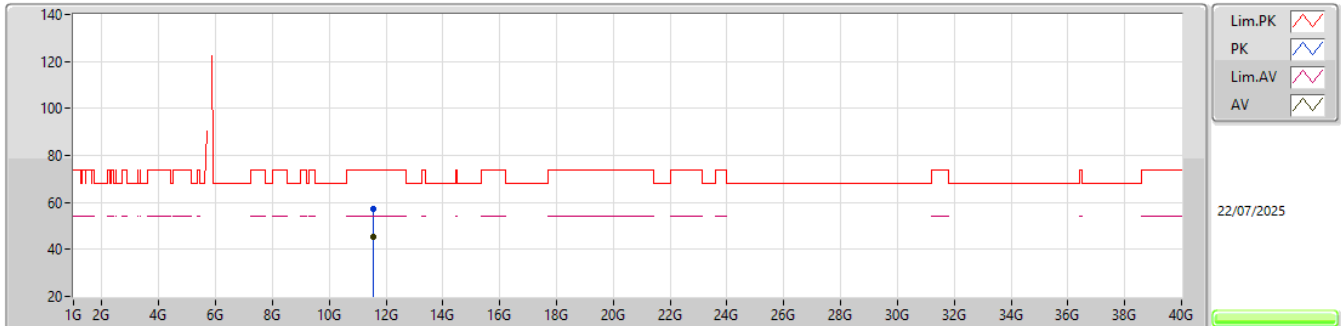EUT_Z_4TX
Setting 71
03-I-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56299G	57.03	74.00	-16.97	41.34	3	Horizontal	107	1.69	-	39.15	11.65	35.11			
AV	11.55759G	45.56	54.00	-8.44	29.89	3	Horizontal	107	1.69	-	39.13	11.65	35.11			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

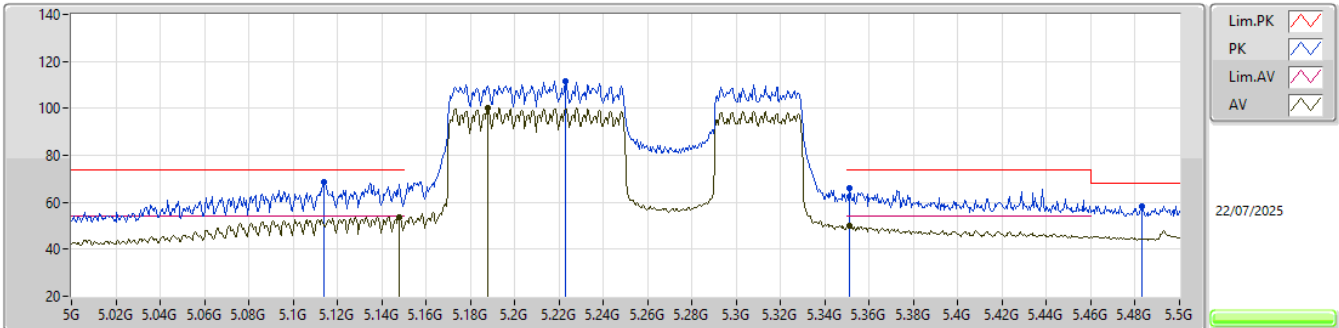


EUT_Z_4TX
Setting 64
03-I-J-5-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.114G	68.43	74.00	-5.57	62.06	3	Vertical	192	2.76	-	33.90	7.41	34.94			
AV	5.148G	53.85	54.00	-0.15	47.39	3	Vertical	192	2.76	-	33.90	7.49	34.93			
PK	5.223G	111.43	Inf	-Inf	104.61	3	Vertical	192	2.76	-	34.10	7.64	34.92			
AV	5.188G	100.14	Inf	-Inf	93.43	3	Vertical	192	2.76	-	34.05	7.58	34.92			
PK	5.351G	66.25	74.00	-7.75	58.84	3	Vertical	192	2.76	-	34.50	7.80	34.89			
AV	5.351G	49.91	54.00	-4.09	42.50	3	Vertical	192	2.76	-	34.50	7.80	34.89			
PK	5.483G	58.49	68.20	-9.71	50.99	3	Vertical	192	2.76	-	34.60	7.76	34.86			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5250MHz Straddle 5.25-5.35GHz_TX

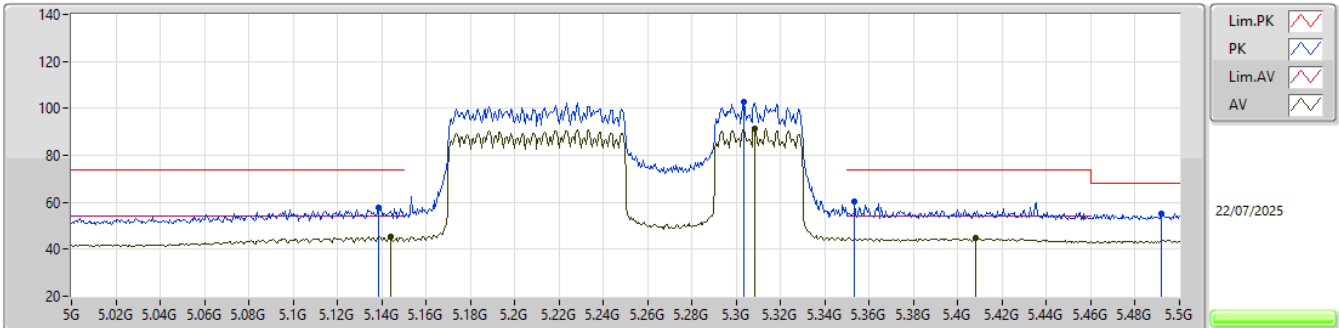EUT_Z_4TX
Setting 64
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1385G	57.91	74.00	-16.09	51.47	3	Horizontal	296	2.25	-	33.90	7.47	34.93			
AV	5.144G	45.36	54.00	-8.64	38.91	3	Horizontal	296	2.25	-	33.90	7.48	34.93			
PK	5.3035G	102.88	Inf	-Inf	95.63	3	Horizontal	296	2.25	-	34.41	7.74	34.90			
AV	5.3085G	91.38	Inf	-Inf	84.11	3	Horizontal	296	2.25	-	34.42	7.75	34.90			
PK	5.3535G	60.38	74.00	-13.62	52.96	3	Horizontal	296	2.25	-	34.51	7.80	34.89			
AV	5.408G	44.67	54.00	-9.33	37.02	3	Horizontal	296	2.25	-	34.68	7.85	34.88			
PK	5.492G	55.05	68.20	-13.15	47.56	3	Horizontal	296	2.25	-	34.60	7.75	34.86			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

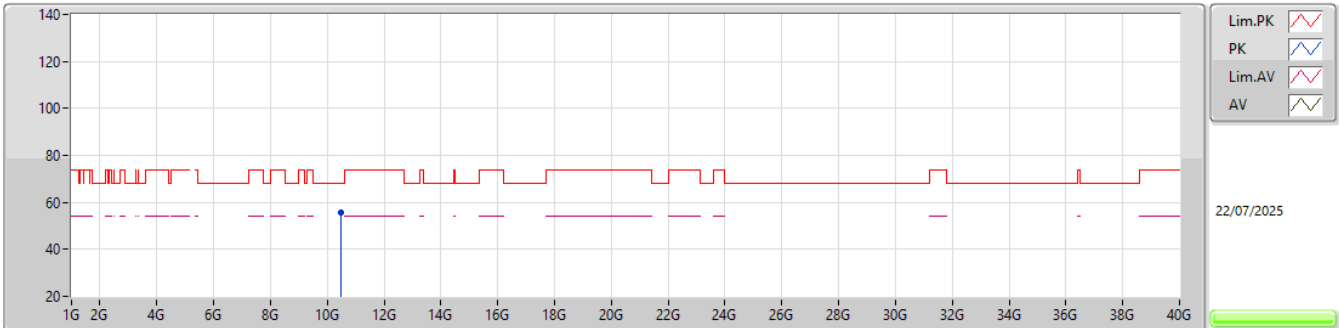


EUT_Z_4TX
Setting 64
03-I-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48878G	55.82	68.20	-12.38	41.45	3	Vertical	216	1.91	-	38.06	11.22	34.91			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5250MHz Straddle 5.25-5.35GHz_TX

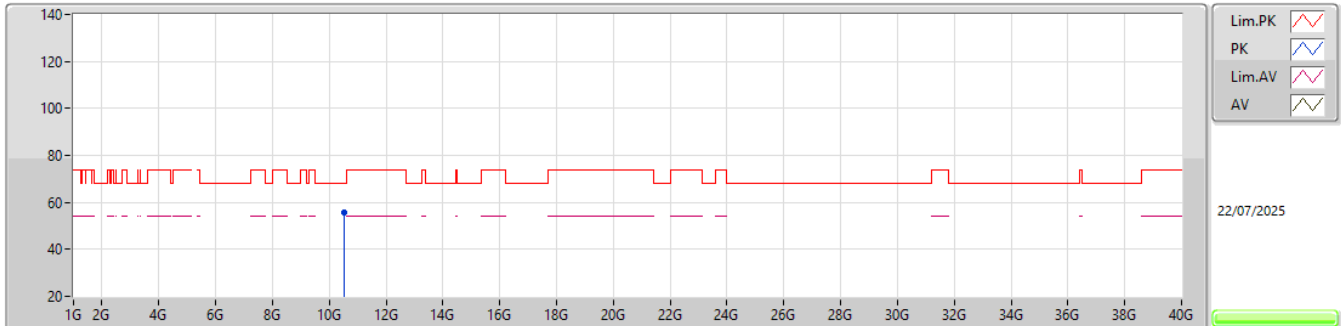EUT_Z_4TX
Setting 64
03-I-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51428G	55.63	68.20	-12.57	41.17	3	Horizontal	146	1.29	-	38.13	11.23	34.90			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


5250MHz Straddle 5.25-5.35GHz_TX

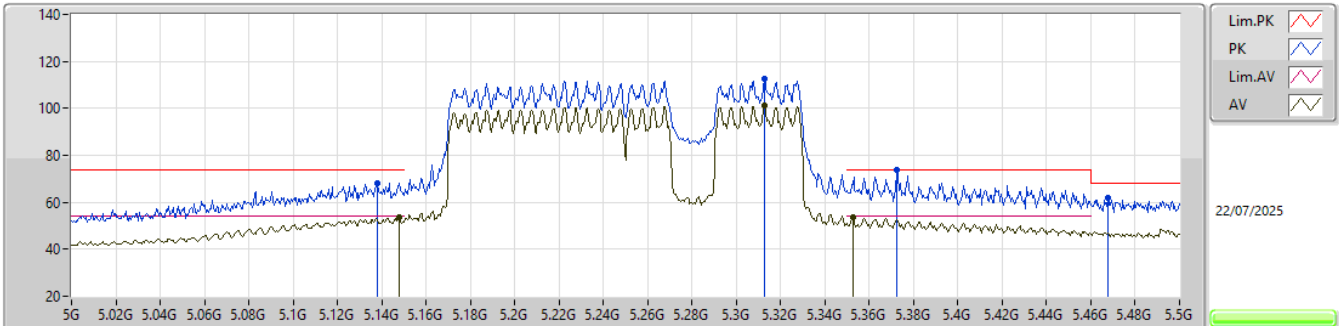EUT_Z_4TX
Setting 68
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.138G	68.33	74.00	-5.67	61.90	3	Vertical	282	2.28	-	33.90	7.46	34.93			
AV	5.148G	53.81	54.00	-0.19	47.35	3	Vertical	282	2.28	-	33.90	7.49	34.93			
PK	5.3125G	112.48	Inf	-Inf	105.21	3	Vertical	282	2.28	-	34.42	7.75	34.90			
AV	5.3125G	101.07	Inf	-Inf	93.80	3	Vertical	282	2.28	-	34.42	7.75	34.90			
PK	5.3725G	73.79	74.00	-0.21	66.26	3	Vertical	282	2.28	-	34.59	7.83	34.89			
AV	5.3525G	53.69	54.00	-0.31	46.27	3	Vertical	282	2.28	-	34.51	7.80	34.89			
PK	5.4675G	61.85	68.20	-6.35	54.34	3	Vertical	282	2.28	-	34.60	7.78	34.87			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


5250MHz Straddle 5.25-5.35GHz_TX

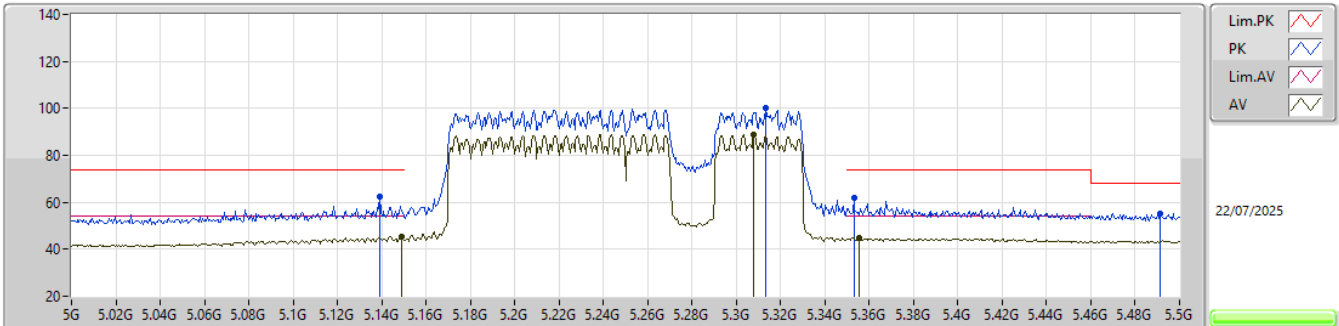EUT_Z_4TX
Setting 68
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.139G	62.24	74.00	-11.76	55.80	3	Horizontal	295	1.80	-	33.90	7.47	34.93			
AV	5.149G	45.42	54.00	-8.58	38.96	3	Horizontal	295	1.80	-	33.90	7.49	34.93			
PK	5.3135G	100.13	Inf	-Inf	92.85	3	Horizontal	295	1.80	-	34.43	7.75	34.90			
AV	5.308G	88.92	Inf	-Inf	81.65	3	Horizontal	295	1.80	-	34.42	7.75	34.90			
PK	5.353G	61.68	74.00	-12.32	54.26	3	Horizontal	295	1.80	-	34.51	7.80	34.89			
AV	5.3555G	44.63	54.00	-9.37	37.20	3	Horizontal	295	1.80	-	34.52	7.80	34.89			
PK	5.491G	55.10	68.20	-13.10	47.61	3	Horizontal	295	1.80	-	34.60	7.75	34.86			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


5250MHz Straddle 5.25-5.35GHz_TX

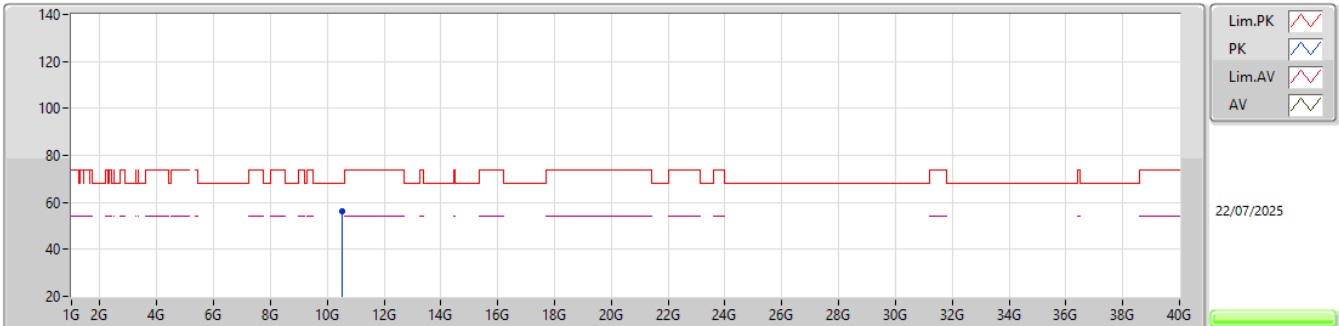EUT_Z_4TX
Setting 68
03-I-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51251G	56.20	68.20	-12.00	41.74	3	Vertical	44	1.71	-	38.13	11.23	34.90			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


5250MHz Straddle 5.25-5.35GHz_TX

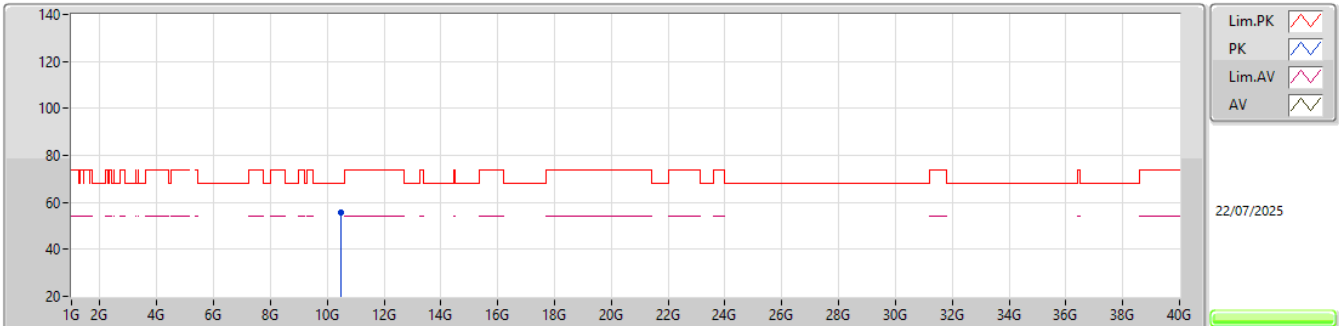EUT_Z_4TX
Setting 68
03-I-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.49091G	55.68	68.20	-12.52	41.31	3	Horizontal	353	1.91	-	38.06	11.22	34.91				

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5570MHz_TX

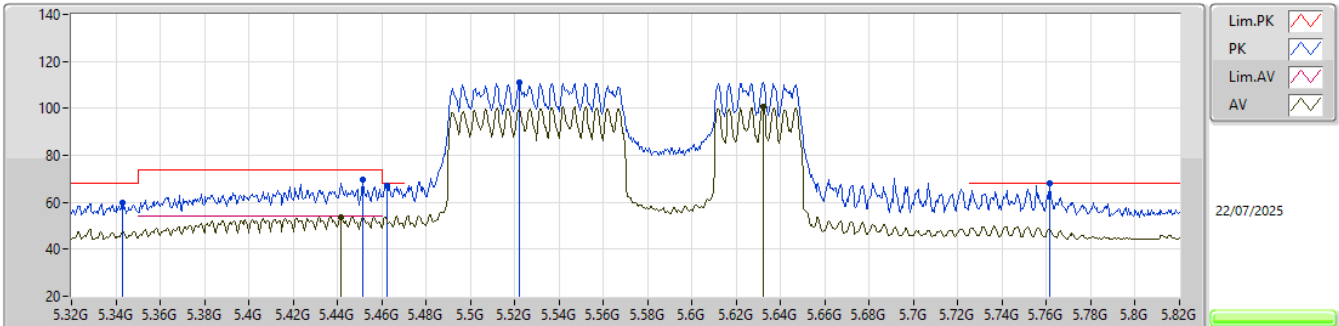EUT_Z_4TX
Setting 62
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.343G	60.00	68.20	-8.20	52.61	3	Vertical	303	2.30	-	34.49	7.79	34.89			
PK	5.4515G	69.67	74.00	-4.33	62.14	3	Vertical	303	2.30	-	34.60	7.80	34.87			
AV	5.4415G	53.81	54.00	-0.19	46.25	3	Vertical	303	2.30	-	34.62	7.81	34.87			
PK	5.4625G	67.04	68.20	-1.16	59.53	3	Vertical	303	2.30	-	34.60	7.78	34.87			
PK	5.522G	111.06	Inf	-Inf	103.66	3	Vertical	303	2.30	-	34.56	7.71	34.87			
AV	5.632G	100.73	Inf	-Inf	93.66	3	Vertical	303	2.30	-	34.30	7.67	34.90			
PK	5.7615G	67.89	68.20	-0.31	60.74	3	Vertical	303	2.30	-	34.20	7.89	34.94			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX


5570MHz_TX

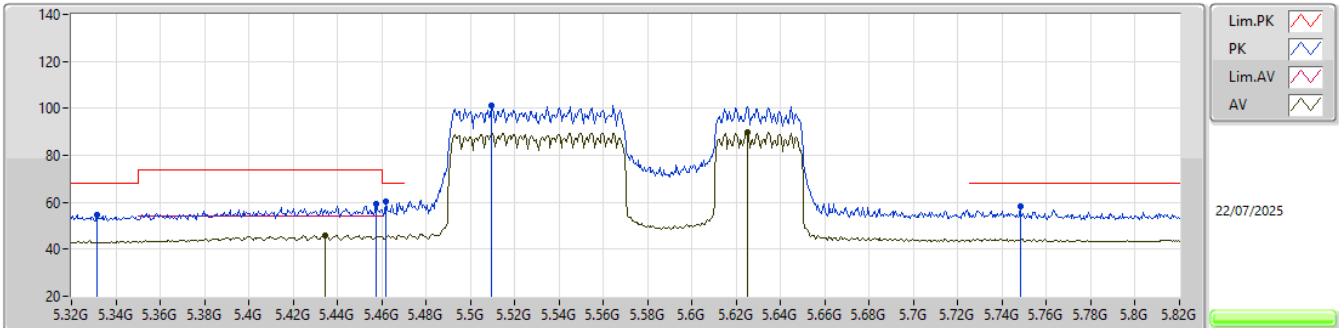EUT_Z_4TX
Setting 62
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3315G	54.73	68.20	-13.47	47.39	3	Horizontal	295	2.20	-	34.46	7.77	34.89			
PK	5.4575G	59.16	74.00	-14.84	51.64	3	Horizontal	295	2.20	-	34.60	7.79	34.87			
AV	5.4345G	46.01	54.00	-7.99	38.43	3	Horizontal	295	2.20	-	34.63	7.82	34.87			
PK	5.462G	60.59	68.20	-7.61	53.08	3	Horizontal	295	2.20	-	34.60	7.78	34.87			
PK	5.5095G	101.32	Inf	-Inf	93.88	3	Horizontal	295	2.20	-	34.58	7.72	34.86			
AV	5.625G	89.86	Inf	-Inf	82.81	3	Horizontal	295	2.20	-	34.30	7.65	34.90			
PK	5.748G	58.37	68.20	-9.83	51.23	3	Horizontal	295	2.20	-	34.20	7.87	34.93			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5570MHz_TX

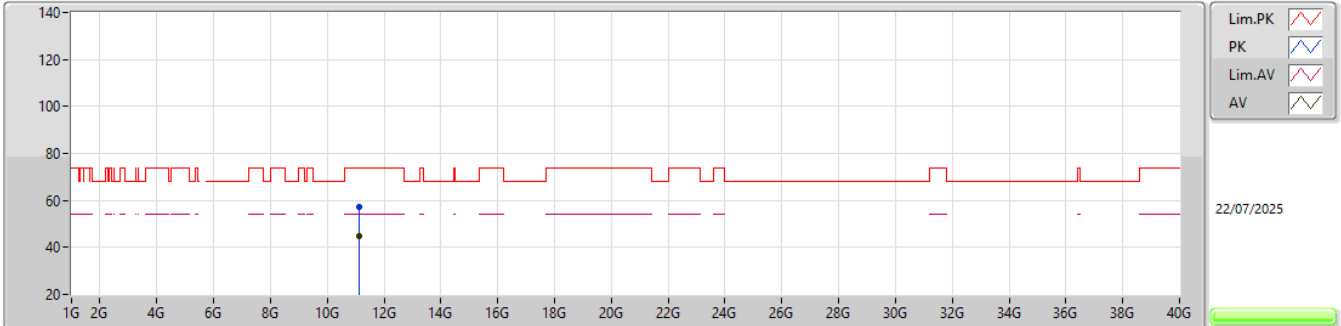


EUT_Z_4TX
Setting 62
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.1154G	56.99	74.00	-17.01	42.07	3	Vertical	49	1.54	-	38.47	11.47	35.02			
AV	11.1168G	44.78	54.00	-9.22	29.86	3	Vertical	49	1.54	-	38.47	11.47	35.02			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5570MHz_TX

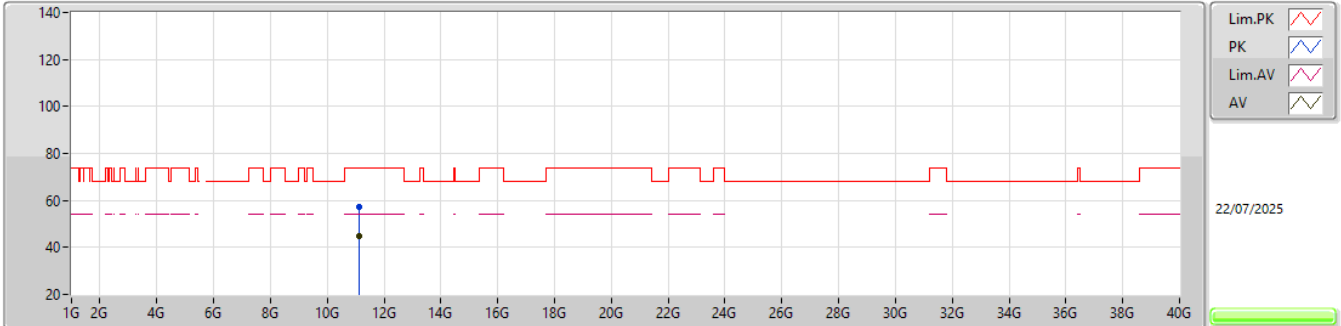


EUT_Z_4TX
Setting 62
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.14375G	57.38	74.00	-16.62	42.51	3	Horizontal	137	1.20	-	38.41	11.48	35.02			
AV	11.13095G	44.77	54.00	-9.23	29.87	3	Horizontal	137	1.20	-	38.44	11.48	35.02			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


5570MHz_TX

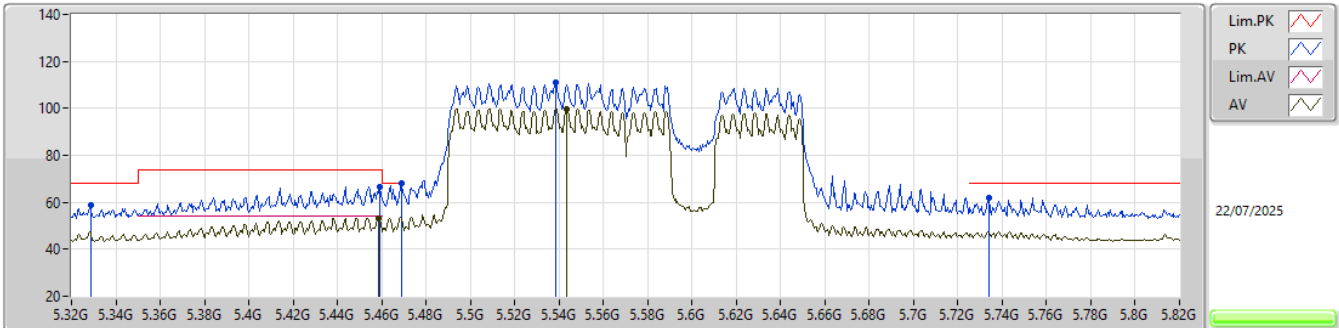EUT_Z_4TX
Setting 62
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3285G	58.72	68.20	-9.48	51.38	3	Vertical	174	2.48	-	34.46	7.77	34.89
PK	5.459G	66.62	74.00	-7.38	59.10	3	Vertical	174	2.48	-	34.60	7.79	34.87
AV	5.4585G	53.30	54.00	-0.70	45.78	3	Vertical	174	2.48	-	34.60	7.79	34.87
PK	5.469G	68.15	68.20	-0.05	60.65	3	Vertical	174	2.48	-	34.60	7.77	34.87
PK	5.5385G	110.90	Inf	-Inf	103.56	3	Vertical	174	2.48	-	34.52	7.69	34.87
AV	5.5435G	99.86	Inf	-Inf	92.54	3	Vertical	174	2.48	-	34.51	7.68	34.87
PK	5.734G	62.14	68.20	-6.06	55.03	3	Vertical	174	2.48	-	34.20	7.84	34.93

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX


5570MHz_TX

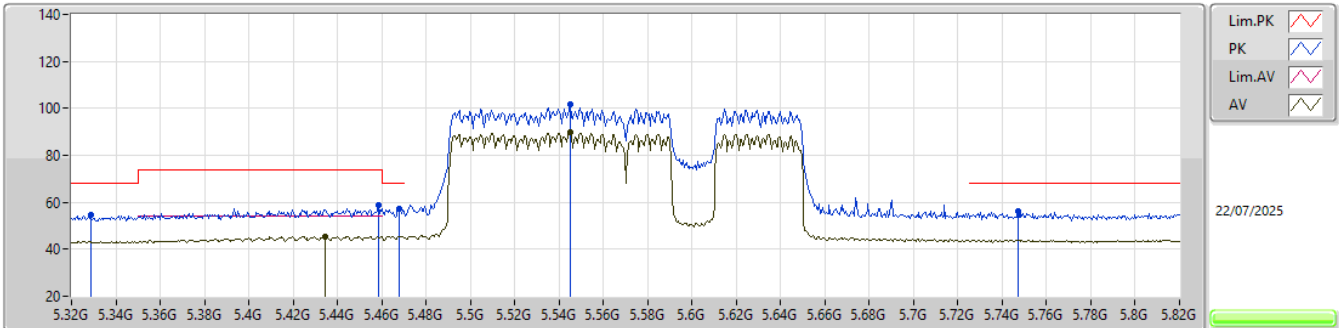EUT_Z_4TX
Setting 62
03-I-J-5-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3285G	54.45	68.20	-13.75	47.11	3	Horizontal	296	2.28	-	34.46	7.77	34.89
PK	5.4585G	58.74	74.00	-15.26	51.22	3	Horizontal	296	2.28	-	34.60	7.79	34.87
AV	5.4345G	45.57	54.00	-8.43	37.99	3	Horizontal	296	2.28	-	34.63	7.82	34.87
PK	5.468G	57.19	68.20	-11.01	49.68	3	Horizontal	296	2.28	-	34.60	7.78	34.87
PK	5.545G	101.73	Inf	-Inf	94.41	3	Horizontal	296	2.28	-	34.51	7.68	34.87
AV	5.545G	89.84	Inf	-Inf	82.52	3	Horizontal	296	2.28	-	34.51	7.68	34.87
PK	5.747G	56.15	68.20	-12.05	49.01	3	Horizontal	296	2.28	-	34.20	7.87	34.93

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5570MHz_TX

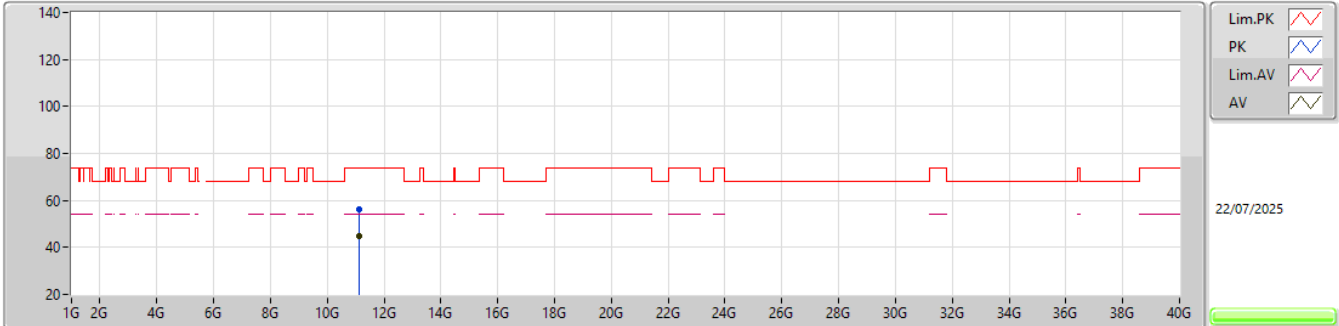


EUT_Z_4TX
Setting 62
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.14325G	56.44	74.00	-17.56	41.57	3	Vertical	284	1.59	-	38.41	11.48	35.02			
AV	11.13675G	44.84	54.00	-9.16	29.95	3	Vertical	284	1.59	-	38.43	11.48	35.02			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX

5570MHz_TX

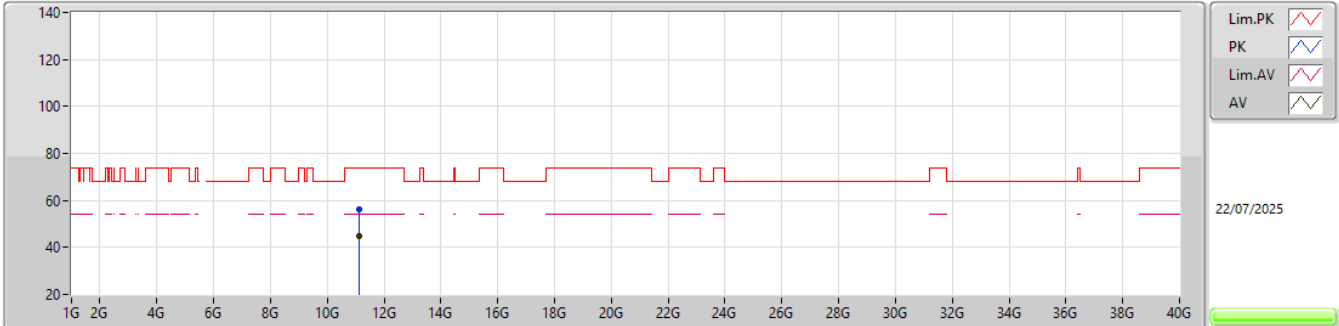

EUT_Z_4TX
Setting 62
03-I-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.13037G	56.22	74.00	-17.78	41.32	3	Horizontal	293	2.68	-	38.44	11.48	35.02			
AV	11.1326G	44.77	54.00	-9.23	29.88	3	Horizontal	293	2.68	-	38.43	11.48	35.02			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX	Pass	PK	5.7476G	68.13	68.20	-0.07	3	Horizontal	348	2.95	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

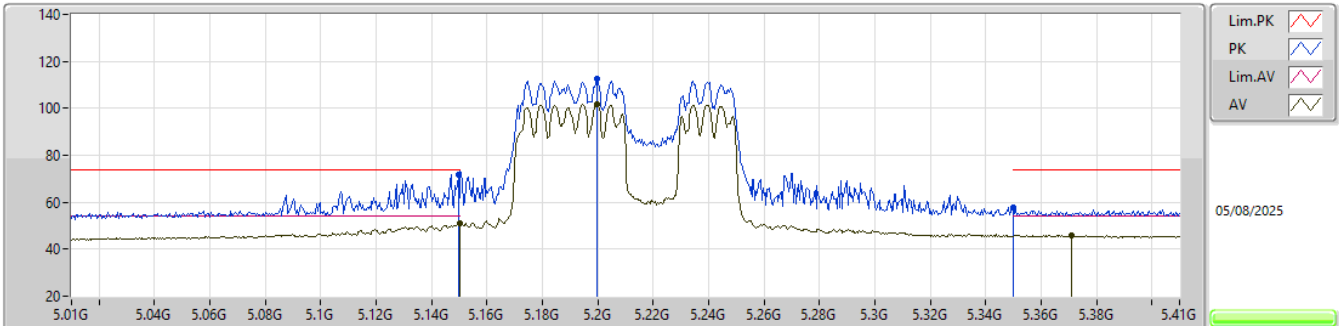EUT_Y_4TX
Setting 56
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1496G	71.87	74.00	-2.13	75.36	3	Vertical	12	1.06	-	32.00	8.39	43.88
AV	5.15G	51.03	54.00	-2.97	54.51	3	Vertical	12	1.06	-	32.00	8.39	43.87
PK	5.1996G	112.36	Inf	-Inf	116.09	3	Vertical	12	1.06	-	31.70	8.42	43.85
AV	5.1996G	101.64	Inf	-Inf	105.37	3	Vertical	12	1.06	-	31.70	8.42	43.85
PK	5.35G	57.67	74.00	-16.33	61.57	3	Vertical	12	1.06	-	31.40	8.47	43.77
AV	5.3708G	46.05	54.00	-7.95	49.93	3	Vertical	12	1.06	-	31.40	8.48	43.76

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5210MHz_TX

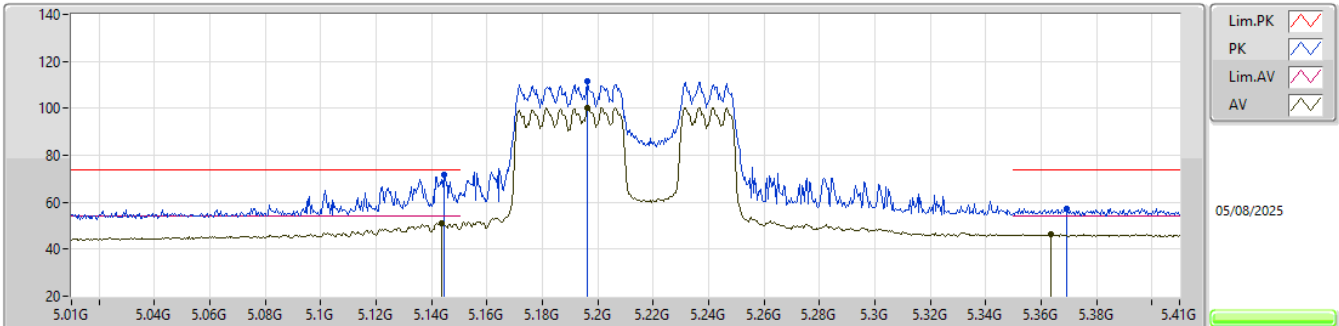EUT_Y_4TX
Setting 56
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1444G	71.51	74.00	-2.49	75.03	3	Horizontal	344	1.06	-	31.97	8.39	43.88
AV	5.1436G	51.07	54.00	-2.93	54.60	3	Horizontal	344	1.06	-	31.96	8.39	43.88
PK	5.1964G	111.44	Inf	-Inf	115.15	3	Horizontal	344	1.06	-	31.72	8.42	43.85
AV	5.1964G	100.31	Inf	-Inf	104.02	3	Horizontal	344	1.06	-	31.72	8.42	43.85
PK	5.3692G	57.27	74.00	-16.73	61.16	3	Horizontal	344	1.06	-	31.40	8.48	43.77
AV	5.3636G	46.53	54.00	-7.47	50.42	3	Horizontal	344	1.06	-	31.40	8.48	43.77

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

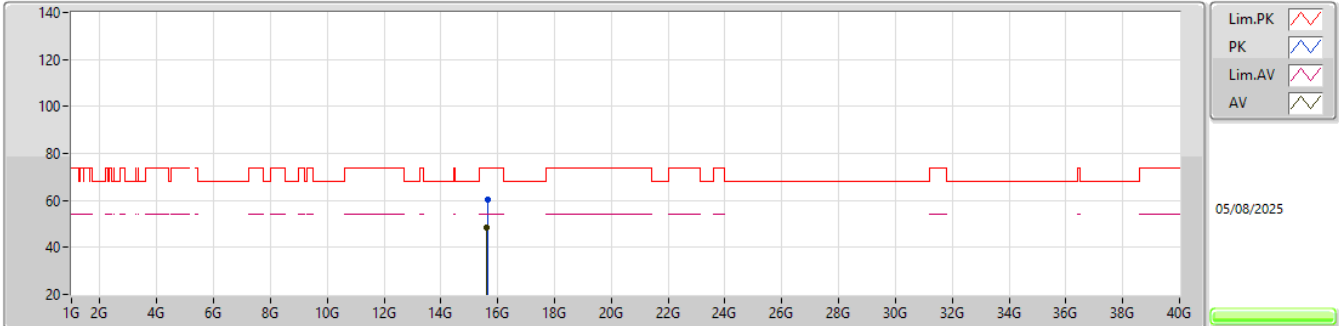


EUT_V_4TX
Setting 56
04-D-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.6463G	60.26	74.00	-13.74	49.09	3	Vertical	10	1.17	-	37.32	16.18	42.33			
AV	15.6038G	48.67	54.00	-5.33	37.21	3	Vertical	10	1.17	-	37.58	16.18	42.30			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

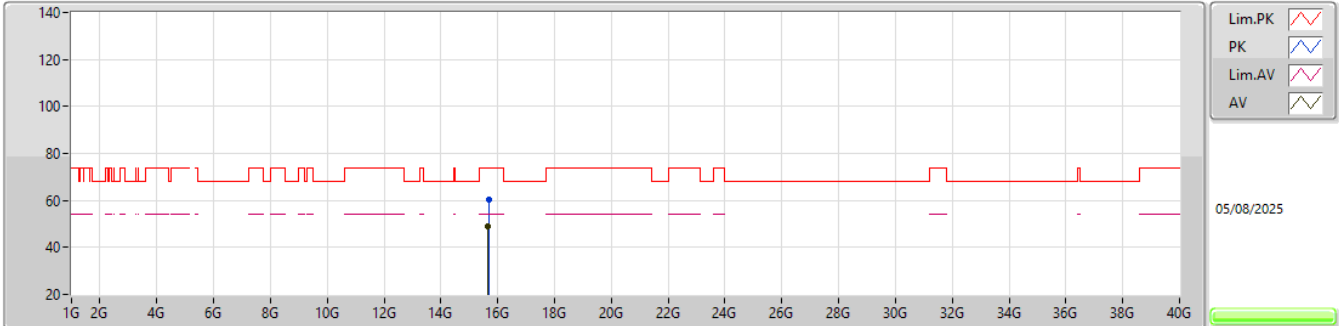


EUT_V_4TX
Setting 56
04-D-L-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.676G	60.49	74.00	-13.51	49.21	3	Horizontal	253	1.88	-	37.46	16.18	42.36			
AV	15.6571G	48.74	54.00	-5.26	37.56	3	Horizontal	253	1.88	-	37.34	16.18	42.34			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

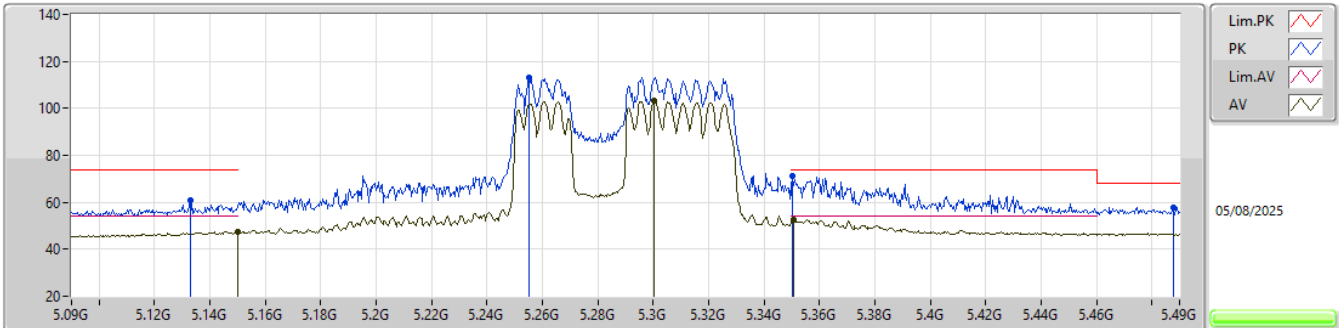


EUT_Y_4TX
Setting 64
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1328G	60.63	74.00	-13.37	64.23	3	Vertical	360	1.05	-	31.90	8.38	43.88			
AV	5.15G	47.53	54.00	-6.47	51.01	3	Vertical	360	1.05	-	32.00	8.39	43.87			
PK	5.2552G	113.28	Inf	-Inf	117.28	3	Vertical	360	1.05	-	31.38	8.44	43.82			
AV	5.3004G	103.10	Inf	-Inf	107.24	3	Vertical	360	1.05	-	31.20	8.46	43.80			
PK	5.3504G	71.46	74.00	-2.54	75.36	3	Vertical	360	1.05	-	31.40	8.47	43.77			
AV	5.3508G	52.75	54.00	-1.25	56.65	3	Vertical	360	1.05	-	31.40	8.47	43.77			
PK	5.488G	57.91	68.20	-10.29	61.29	3	Vertical	360	1.05	-	31.75	8.58	43.71			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

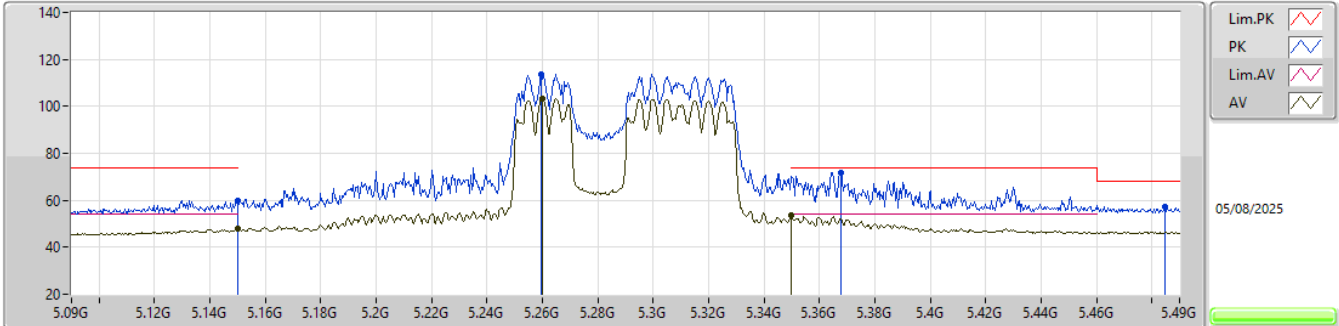


EUT_Y_4TX
Setting 64
04-D-L-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.15G	59.81	74.00	-14.19	63.29	3	Horizontal	6	1.05	-	32.00	8.39	43.87			
AV	5.15G	47.92	54.00	-6.08	51.40	3	Horizontal	6	1.05	-	32.00	8.39	43.87			
PK	5.2596G	113.80	Inf	-Inf	117.82	3	Horizontal	6	1.05	-	31.36	8.44	43.82			
AV	5.26G	103.03	Inf	-Inf	107.05	3	Horizontal	6	1.05	-	31.36	8.44	43.82			
PK	5.3676G	71.91	74.00	-2.09	75.80	3	Horizontal	6	1.05	-	31.40	8.48	43.77			
AV	5.35G	53.39	54.00	-0.61	57.29	3	Horizontal	6	1.05	-	31.40	8.47	43.77			
PK	5.4848G	57.09	68.20	-11.11	60.48	3	Horizontal	6	1.05	-	31.74	8.58	43.71			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

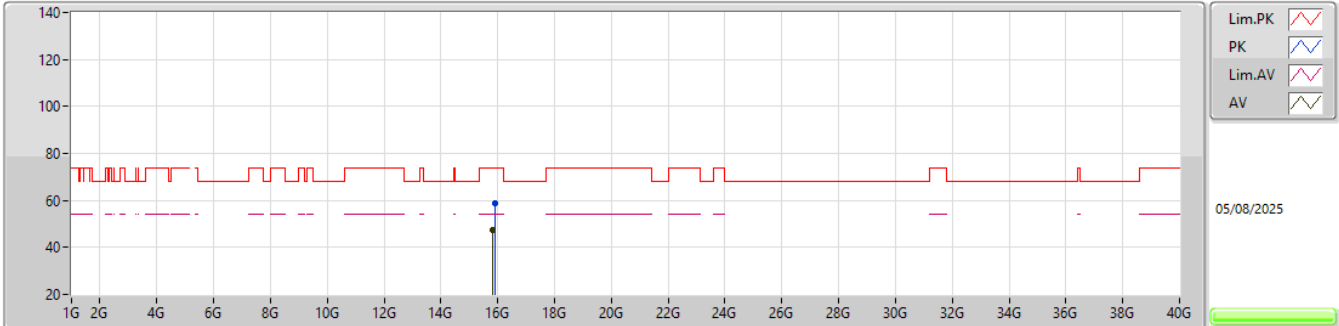


EUT_V_4TX
Setting 64
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.9132G	58.94	74.00	-15.06	48.04	3	Vertical	333	2.80	-	37.25	16.19	42.54			
AV	15.8247G	47.60	54.00	-6.40	36.53	3	Vertical	333	2.80	-	37.35	16.19	42.47			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5290MHz_TX

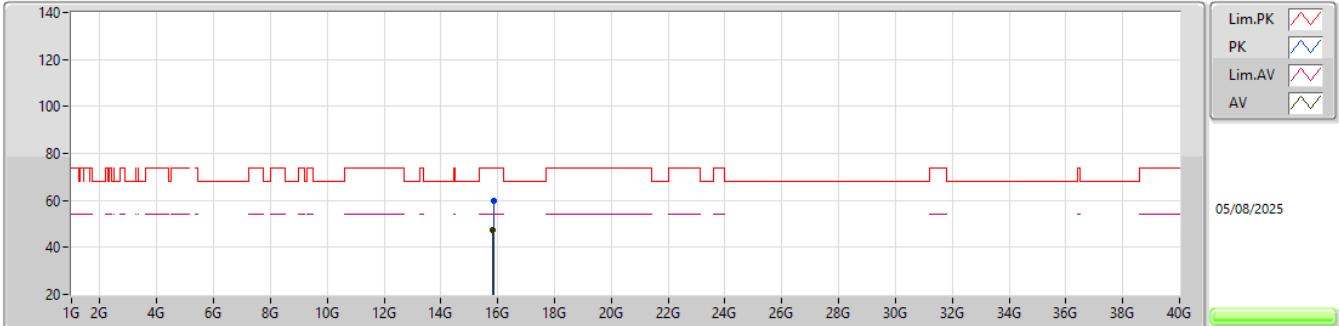


EUT_V_4TX
Setting 64
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.8466G	59.66	74.00	-14.34	48.74	3	Horizontal	243	2.76	-	37.22	16.19	42.49			
AV	15.8232G	47.66	54.00	-6.34	36.58	3	Horizontal	243	2.76	-	37.36	16.19	42.47			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

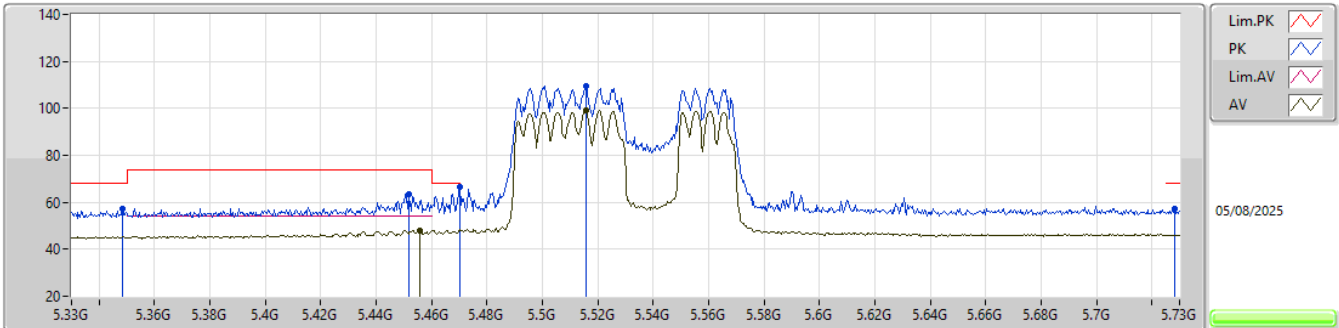


EUT_Y_4TX
Setting 49
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3484G	57.03	68.20	-11.17	60.95	3	Vertical	0	1.06	-	31.39	8.47	43.78
PK	5.4516G	63.66	74.00	-10.34	67.23	3	Vertical	0	1.06	-	31.61	8.54	43.72
AV	5.4556G	48.09	54.00	-5.91	51.64	3	Vertical	0	1.06	-	31.62	8.55	43.72
PK	5.47G	66.31	68.20	-1.89	69.79	3	Vertical	0	1.06	-	31.68	8.56	43.72
PK	5.5156G	109.55	Inf	-Inf	112.85	3	Vertical	0	1.06	-	31.77	8.61	43.68
AV	5.5156G	99.00	Inf	-Inf	102.30	3	Vertical	0	1.06	-	31.77	8.61	43.68
PK	5.7284G	57.01	68.20	-11.19	59.59	3	Vertical	0	1.06	-	32.06	8.83	43.47

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX


5530MHz_TX

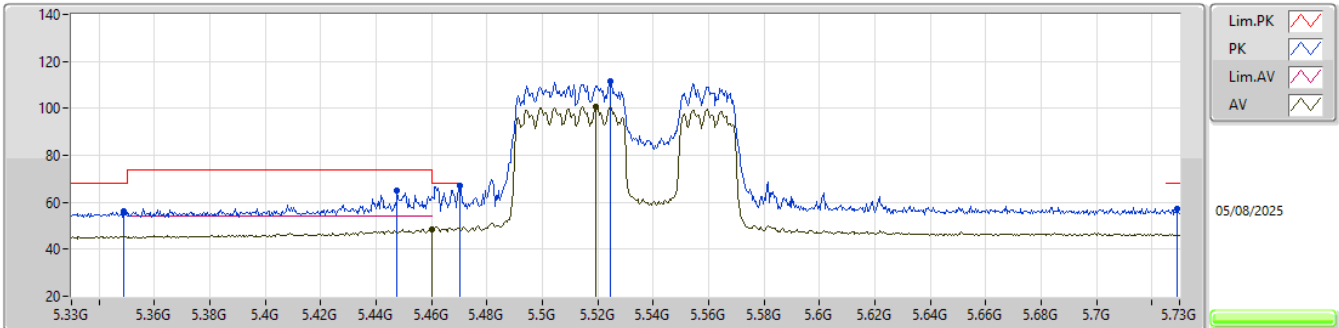EUT_Y_4TX
Setting 49
04-D-L-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3488G	56.37	68.20	-11.83	60.28	3	Horizontal	349	3.00	-	31.40	8.47	43.78			
PK	5.4476G	65.11	74.00	-8.89	68.71	3	Horizontal	349	3.00	-	31.59	8.54	43.73			
PK	5.47G	66.98	68.20	-1.22	70.46	3	Horizontal	349	3.00	-	31.68	8.56	43.72			
AV	5.46G	48.60	54.00	-5.40	52.13	3	Horizontal	349	3.00	-	31.64	8.55	43.72			
PK	5.5244G	111.43	Inf	-Inf	114.74	3	Horizontal	349	3.00	-	31.75	8.62	43.68			
AV	5.5192G	100.78	Inf	-Inf	104.08	3	Horizontal	349	3.00	-	31.76	8.62	43.68			
PK	5.7292G	57.21	68.20	-10.99	59.78	3	Horizontal	349	3.00	-	32.06	8.84	43.47			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

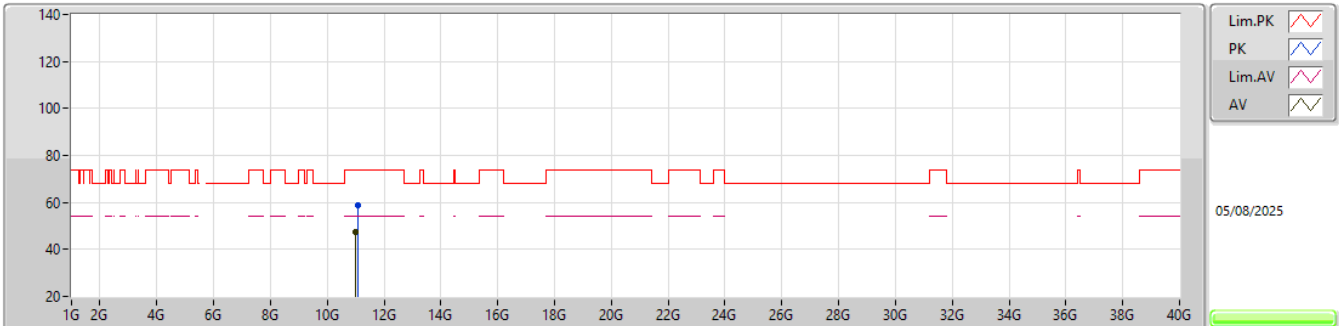


EUT_V_4TX
Setting 49
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0774G	58.67	74.00	-15.33	48.83	3	Vertical	354	1.64	-	39.79	12.93	42.88			
AV	11.0148G	47.32	54.00	-6.68	37.36	3	Vertical	354	1.64	-	39.97	12.89	42.90			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

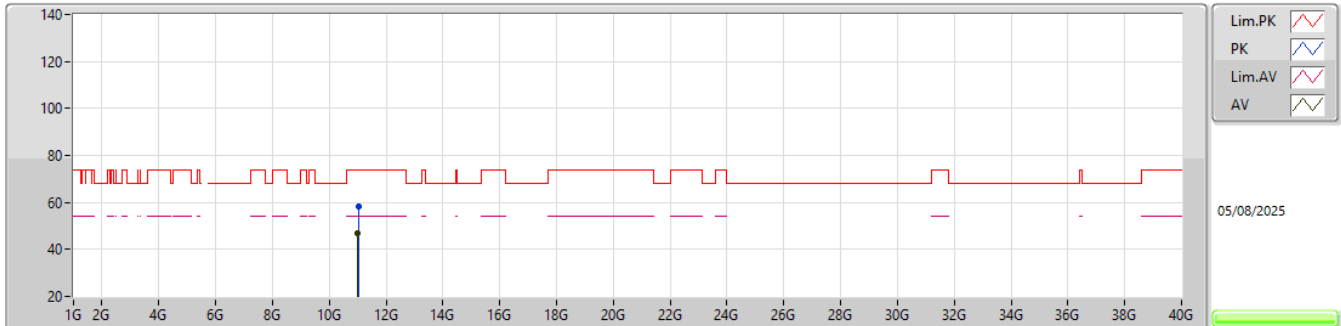EUT_V_4TX
Setting 49
04-I-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0248G	58.46	74.00	-15.54	48.52	3	Horizontal	347	2.26	-	39.95	12.89	42.90			
AV	11.0159G	46.86	54.00	-7.14	36.90	3	Horizontal	347	2.26	-	39.97	12.89	42.90			