

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

## Stereo bluetooth wireless headset

Model No.: 306B, 155B, 303B, 305B, 303BD, 305BD, 306BD

Trademark: MARROW

FCC ID: 2AHGI-306B

Report No.: ED160119001E2

Issue Date: February 24, 2016

Prepared for

LISONG ELECTRONICS CO.,LTD

Jiling Village, Lianping, Dalingshan Town, Dongguan City, Guang Dong

Province, China

Prepared by

EMTEK(DONGGUAN) CO., LTD.

No.281, Guantai Road, Nancheng District, Dongguan, Guangdong, China TEL: 86-769-22807078 FAX: 86-769-22807079

This report shall not be reproduced, except in full, without the written approval of EMTEK(DONGGUAN) CO., LTD.



## **VERIFICATION OF COMPLIANCE**

Applicant:	LISONG ELECTRONICS CO.,LTD
	Jiling Village, Lianping, Dalingshan Town, Dongguan City, Guang
	Dong Province, China
Manufacturer:	LISONG ELECTRONICS CO.,LTD
	Jiling Village, Lianping, Dalingshan Town, Dongguan City, Guang
	Dong Province, China
Product Description:	Stereo bluetooth wireless headset
Trade Mark:	<b>M</b> MARR□W
	306B, 155B, 303B, 305B, 303BD, 305BD, 306BD
Model Number:	(Note: The samples are the same except difference color of
	appearance and model number. So 306B was selected for full test.)

# We hereby certify that:

The above equipment was tested by EMTEK(DONGGUAN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2015).

Date of Test :	January 19, 2016 to February 24, 2016
Prepared by :	Ly Huarg
	Ivy Huang/Editor
Reviewer :	Alan He/Supervisor
Approved & Authorized Signer :	Sam Lv/Manager



# **Modified Information**

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	1	ED160119001E2



# **Table of Contents**

1. GENERAL INFORMATION	0
1.1 PRODUCT DESCRIPTION	6
2. TEST FACILITY	7
3. DESCRIPTION OF TEST MODES	8
4. TEST SYSTEM UNCERTAINTY	
5. CONDUCTED EMISSIONS TEST	
5.1 MEASUREMENT PROCEDURE:	10
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
5.3 MEASUREMENT EQUIPMENT USED:	
5.4 CONDUCTED EMISSION LIMIT	
5.5 MEASUREMENT RESULT:	11
5.6 CONDUCTED MEASUREMENT PHOTOS:	14
6. RADIATED EMISSION TEST	15
6.1 MEASUREMENT PROCEDURE	15
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
6.3 MEASUREMENT EQUIPMENT USED:	
6.4 RADIATED EMISSION LIMIT	19
6.5 MEASUREMENT RESULT	
6.6 RADIATED MEASUREMENT PHOTOS:	26
7. 6DB BANDWIDTH MEASUREMENT	27
7.1 MEASUREMENT PROCEDURE	27
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3 MEASUREMENT EQUIPMENT USED:	
7.4 LIMIT	
7.5 MEASUREMENT RESULTS:	
8. MAXIMUM PEAK OUTPUT POWER TEST	30
8.1 MEASUREMENT PROCEDURE	30
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
8.3 MEASUREMENT EQUIPMENT USED:	30
8.4PEAK POWER OUTPUT LIMIT	
8.5 MEASUREMENT RESULTS:	30
9. POWER SPECTRAL DENSITY MEASUREMENT	33
9.1MEASUREMENT PROCEDURE	33
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
9.3 MEASUREMENT EQUIPMENT USED:	33
9.4 MEASUREMENT PROCEDURE	
9.5 MEASUREMENT RESULTS:	34



10. BAND EDGE TEST	38
10.1 MEASUREMENT PROCEDURE	38
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	38
10.3 MEASUREMENT EQUIPMENT USED:	39
10.4 MEASUREMENT RESULTS:	40
11 ANTENNA APPLICATION	41
11.1 ANTENNA REQUIREMENT	41
11.2 RESULT	41



# 1. GENERAL INFORMATION

# 1.1 Product Description

Product Name	Stereo bluetooth wireless headset			
Model number	306B			
Power Supply	DC 3.7V, 360mA Lithium B	attery		
	Technical Description			
	Bluetooth 4.0	Bluetooth 2.1+EDR		
Operation Frequency	2402-2480MHz			
Modulation	GFSK	GFSK, π/4-DQPSK, 8DPSK		
Number of Channel	40	79		
Channel space	2MHz	1MHz		
Max RF Output Power	r 2.64dBm(0.001837W) 1.35dBm(0.001365W)			
Antenna Type	Internal PCB antenna			
Antenna Gain	-0.61dBi			



# 2. Test Facility

Site Description

EMC Lab. : Registered on FCC, June 18, 2014

The Certificate Number is 247565

Registered on Industry Canada, February 19, 2014

The Certificate Number is 9444A.

Name of Firm : EMTEK(DONGGUAN) CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,

Dongguan, Guangdong, China



# 3. Description of test modes

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

For Radiated: The EUT's antenna was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in Mode A. All the x/y/z orientation has been investigated, and only worst case is presented in this report.

The details of test channels and bandwidth were for RF conductive measurement.

#### Channel List:

aillei List.						
Channel	Frequency	Channel	Frequency	Channel	Frequency	
	(MHz)		(MHz)		(MHz)	
00	2402	14	2430	28	2458	
01	2404	15	2432	29	2460	
02	2406	16	2434	30	2462	
03	2408	17	2436	31	2464	
04	2410	18	2438	32	2466	
05	2412	19	2440	33	2468	
06	2414	20	2442	34	2470	
07	2416	21	2444	35	2472	
08	2418	22	2446	36	2474	
09	2420	23	2448	37	2476	
10	2422	24	2450	38	2478	
11	2424	25	2452	39	2480	
12	2426	26	2454			
13	2428	27	2456			

#### Note:

1. Test of channel was included the lowest 2402MHz, middle 2440MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.



# 4. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5℃
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%




## 5. Conducted Emissions Test

#### **5.1 Measurement Procedure:**

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured was complete.

# 5.2 Test SET-UP (Block Diagram of Configuration)



## 5.3 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Due date		
Test Receiver	Rohde & Schwarz	ESCS30	100018	06/24/2015	06/23/2016		
L.I.S.N	Rohde & Schwarz	ENV216	100017	06/24/2015	06/23/2016		
RF Switching Unit	CDS	RSU-M2	38401	06/24/2015	06/23/2016		
Coaxial Cable	CDS	79254	46107086	06/24/2015	06/23/2016		

#### **5.4 Conducted Emission Limit**

## (7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

#### Note:

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.



#### 5.5 Measurement Result:


Pass.

The data of the worst mode (GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.



55 %

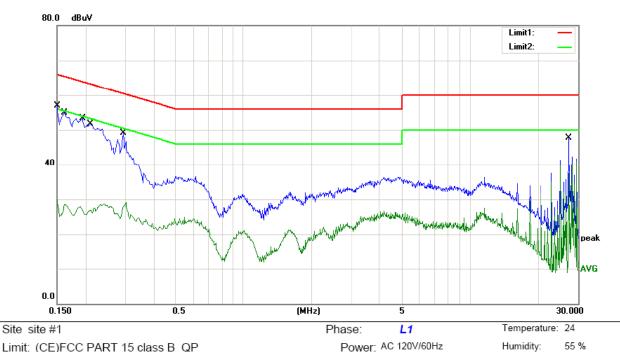

Power: AC 120V/60Hz

Limit: (CE)FCC PART 15 class B\_QP


Mode: TX2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	46.77	10.11	56.88	66.00	-9.12	QP	
2		0.1500	19.85	10.11	29.96	56.00	-26.04	AVG	
3		0.1620	44.76	10.11	54.87	65.36	-10.49	QP	
4		0.1620	18.46	10.11	28.57	55.36	-26.79	AVG	
5		0.1940	43.16	10.12	53.28	63.86	-10.58	QP	
6		0.1940	17.24	10.12	27.36	53.86	-26.50	AVG	
7		0.2100	41.56	10.12	51.68	63.21	-11.53	QP	
8		0.2100	16.52	10.12	26.64	53.21	-26.57	AVG	
9		0.2940	38.97	10.14	49.11	60.41	-11.30	QP	
10		0.2940	18.03	10.14	28.17	50.41	-22.24	AVG	
11		27.4060	37.15	10.55	47.70	60.00	-12.30	QP	
12		27.4060	26.86	10.55	37.41	50.00	-12.59	AVG	

<sup>\*:</sup>Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator:



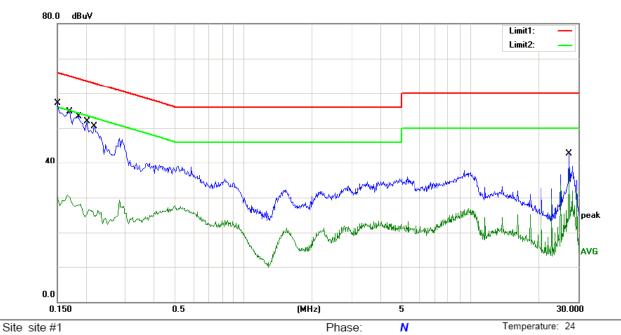

Power: AC 120V/60Hz

Limit: (CE)FCC PART 15 class B\_QP

Mode: TX2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	47.04	10.11	57.15	66.00	-8.85	QP	
2		0.1500	20.08	10.11	30.19	56.00	-25.81	AVG	
3		0.1700	44.58	10.11	54.69	64.96	-10.27	QP	
4		0.1700	19.97	10.11	30.08	54.96	-24.88	AVG	
5		0.1860	43.16	10.12	53.28	64.21	-10.93	QP	
6		0.1860	17.75	10.12	27.87	54.21	-26.34	AVG	
7		0.2020	41.84	10.12	51.96	63.53	-11.57	QP	
8		0.2020	15.49	10.12	25.61	53.53	-27.92	AVG	
9		0.2180	40.31	10.13	50.44	62.89	-12.45	QP	
10		0.2180	14.62	10.13	24.75	52.89	-28.14	AVG	
11		27.4060	32.19	10.55	42.74	60.00	-17.26	QP	
12		27.4060	27.58	10.55	38.13	50.00	-11.87	AVG	

Humidity:

55 %

<sup>\*:</sup>Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator:



# **5.6 Conducted Measurement Photos:**





#### 6. Radiated Emission Test

#### **6.1 Measurement Procedure**

- 1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
- 2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a Styrofoam table which is 1.5m above ground plane.
- 3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
- 7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.



Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold



## For Average Measurement:


VBW=10Hz, when duty cycle is no less than 98 percent.

VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T( μ s)	1/T(KHz)	Average Correction Factor	VBW Setting
2402-2480	100	-	-	0	10Hz

# 6.2 Test SET-UP (Block Diagram of Configuration)

## (A) Radiated Emission Test Set-Up, Frequency Below 30MHz

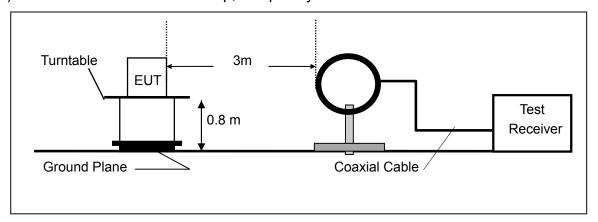


# (B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

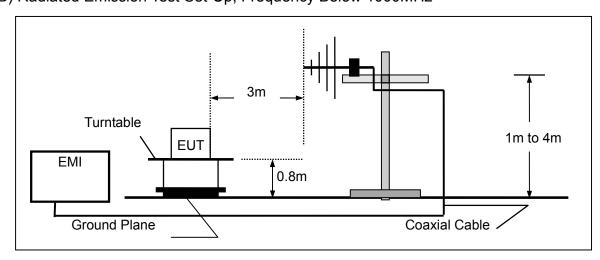



# (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

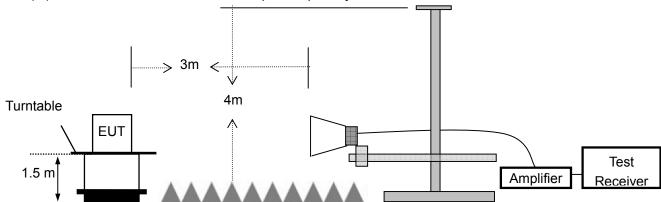

# 6.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	06/24/2015	1 Year
2.	Bilog Antenna	Schwarzbeck	VULB9163	000141	06/24/2015	1 Year
3.	Power Amplifier	CDS	RSU-M352	818	06/24/2015	1 Year
4.	Power Amplifier	HP	8447F	OPT H64	06/24/2015	1 Year
5.	Color Monitor	SUNSPO	SP-140A	N/A	06/24/2015	1 Year
6.	Single Line Filter	JIANLI	XL-3	N/A	06/24/2015	1 Year
7.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	06/24/2015	1 Year
8.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	06/24/2015	1 Year
9.	DC Power Filter	JIANLI	DL-2X50B	N/A	06/24/2015	1 Year
10.	Cable	Schwarzbeck	PLF-100	549489	06/24/2015	1 Year
11.	Cable	Rosenberger	CIL02	A0783566	06/24/2015	1 Year
12.	Cable	Rosenberger	RG 233/U	525178	06/24/2015	1 Year
13.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	06/24/2015	1 Year
14.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	06/24/2015	1 Year
15.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	06/24/2015	1 Year
16.	Cable	H+S	CBL-26	N/A	06/24/2015	1 Year
17.	Cable	H+S	CBL-26	N/A	06/24/2015	1 Year
18.	Cable	H+S	CBL-26	N/A	06/24/2015	1 Year



#### 6.4 Radiated emission limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

## 15.205 Restricted bands of operation

MHz MHz		MHz	GHz
0.090 - 0.110	0.090 - 0.110 16.42 - 16.423		4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205, and the emissions located in restricted bands also comply with 15.209 limit.



#### 6.5 Measurement Result

#### **Below 30MHz:**

Operation Mode: TX Test Date: February 18, 2016

Frequency Range: 9KHz~30MHz Temperature: 28°C Test Result: PASS Humidity: 65 % Measured Distance: 3m Test By: Andy

Freq.	Ant.Pol.	Emission	Limit 3m	Over
		Level		
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

## Below 1000MHz:

Pass.

All the data of the worst mode (GFSK 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.



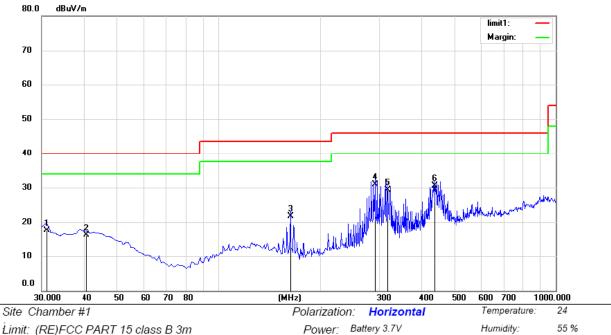


Limit: (RE)FCC PART 15 class B 3m Mode: TX2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dΒ	Detector	cm	degree	Comment
1		30.9700	32.39	-14.90	17.49	40.00	-22.51	QP			
2		40.7016	29.68	-13.63	16.05	40.00	-23.95	QP			
3		163.8600	40.15	-18.39	21.76	43.50	-21.74	QP			
4	*	291.9000	45.62	-14.69	30.93	46.00	-15.07	QP			
5		316.1500	42.69	-13.30	29.39	46.00	-16.61	QP			
6		436.4300	41.78	-11.29	30.49	46.00	-15.51	QP			

<sup>\*:</sup>Maximum data x:Over limit !:over margin Operator: Jack



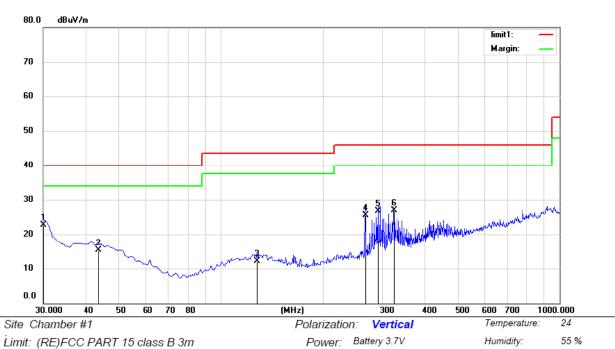

Mode: TX2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dΒ	dBuV/m	dBuV/m	dΒ	Detector	cm	degree	Comment
1	*	30.0000	37.85	-15.15	22.70	40.00	-17.30	QP			
2		43.5800	28.66	-13.37	15.29	40.00	-24.71	QP			
3		127.9700	28.47	-16.37	12.10	43.50	-31.40	QP			
4		266.6800	40.85	-15.29	25.56	46.00	-20.44	QP			
5		291.9000	41.38	-14.69	26.69	46.00	-19.31	QP			
6		323.9100	40.10	-13.24	26.86	46.00	-19.14	QP			

Operator: Jack

<sup>\*:</sup>Maximum data x:Over limit !:over margin



## Above 1000MHz

Operation Mode: TX Mode (CH00: 2402MHz) Test Date: February 18, 2016

Frequency Range: 1-25GHz Temperature: 25  $^{\circ}$ C Test Result: PASS Humidity: 50  $^{\circ}$ Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission Le	vel(dBuV/m)	Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4804	V	65.41	45.82	74	54	-8.59	-8.18
7206	V	64.33	44.17	74	54	-9.67	-9.83
9608	V	63.14	42.83	74	54	-10.86	-11.17
12010	V	62.96	41.52	74	54	-11.04	-12.48
14412	V	61.49	40.48	74	54	-12.51	-13.52
16814	V	59.35	38.31	74	54	-14.65	-15.69
4804	Н	66.63	45.59	74	54	-7.37	-8.41
7206	Н	65.26	44.57	74	54	-8.74	-9.43
9608	Н	63.34	43.94	74	54	-10.66	-10.06
12010	Н	62.17	41.98	74	54	-11.83	-12.02
14412	Н	60.86	40.37	74	54	-13.14	-13.63
16814	Н	59.51	38.64	74	54	-14.49	-15.36

#### Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.



Operation Mode: TX Mode (CH19: 2440MHz) Test Date: February 18, 2016

Frequency Range: 1-25GHz Temperature: 25  $^{\circ}$ C Test Result: PASS Humidity: 50  $^{\circ}$ Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission Le	vel(dBuV/m)	Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4884	V	66.03	45.74	74	54	-7.97	-8.26
7326	V	64.48	44.04	74	54	-9.52	-9.96
9768	V	63.43	43.17	74	54	-10.57	-10.83
12210	V	62.07	41.49	74	54	-11.93	-12.51
14652	V	61.11	40.37	74	54	-12.89	-13.63
17094	V	58.59	38.83	74	54	-15.41	-15.17
4884	Н	65.37	45.69	74	54	-8.63	-8.31
7326	Н	64.99	44.06	74	54	-9.01	-9.94
9768	Н	63.15	43.75	74	54	-10.85	-10.25
12210	Н	62.46	42.67	74	54	-11.54	-11.33
14652	Н	61.35	41.31	74	54	-12.65	-12.69
17094	Н	59.78	39.77	74	54	-14.22	-14.23

#### Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.



Operation Mode: TX Mode (CH39: 2480MHz) Test Date: February 18, 2016

Frequency Range: 1-25GHz Temperature: 25  $^{\circ}$ C Test Result: PASS Humidity: 50  $^{\circ}$ Measured Distance: 3m Test By: Andy

Freq.	Ant. Pol.	Emission Le	vel(dBuV/m)	Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4960	V	65.56	45.34	74	54	-8.44	-8.66
7440	V	64.34	44.68	74	54	-9.66	-9.32
9920	V	63.12	43.03	74	54	-10.88	-10.97
12400	V	62.78	42.26	74	54	-11.22	-11.74
14880	V	60.45	40.46	74	54	-13.55	-13.54
17360	V	57.63	39.42	74	54	-16.37	-14.58
4960	Н	65.23	44.26	74	54	-8.77	-9.74
7440	Н	64.36	43.58	74	54	-9.64	-10.42
9920	Н	63.89	42.34	74	54	-10.11	-11.66
12400	Н	62.19	41.59	74	54	-11.81	-12.41
14880	Н	59.76	39.43	74	54	-14.24	-14.57
17360	Н	58.67	38.31	74	54	-15.33	-15.69


#### Other harmonics emissions are lower than 20dB below the allowable limit.


Note: (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.



# 6.6 Radiated Measurement Photos:

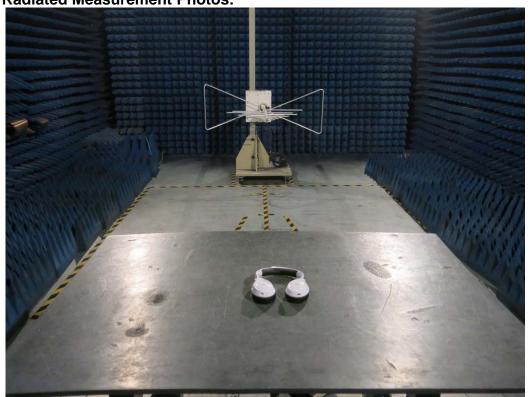

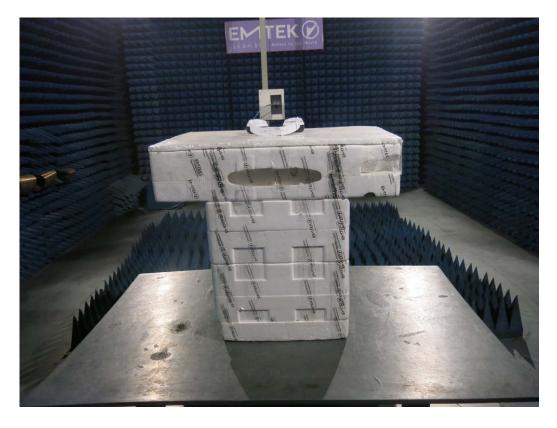



## 7. 6dB Bandwidth Measurement

#### 7.1 Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

# 7.2 Test SET-UP (Block Diagram of Configuration)

EUT Spectrum

# 7.3 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	06/24/2015	06/23/2016
Coaxial Cable	CDS	79254	46107086	06/24/2015	06/23/2016

## 7.4 Limit

The minimum 6dB bandwidth shall be at least 500kHz.

#### 7.5 Measurement Results:


Refer to attached data chart.


Spectrum Detector: PK Test Date: February 18, 2016

Test By: Andy Temperature : 25  $^{\circ}$ C Test Result: PASS Humidity : 50  $^{\circ}$ 


Channel number	Channel	Measurement level	Required Limit
	frequency (MHz)	(KHz)	(KHz)
00	2402	677	>500
19	2440	682	>500
39	2480	674	>500



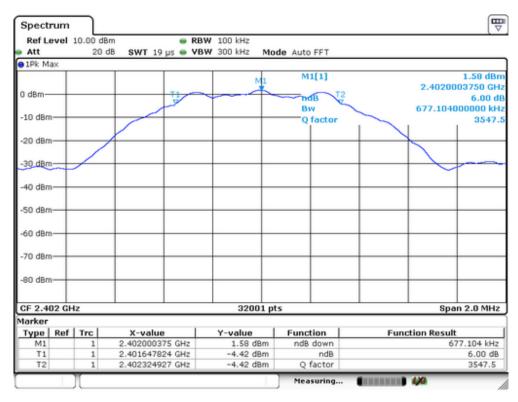

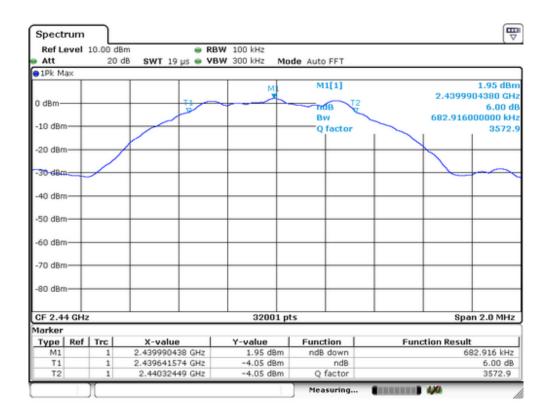



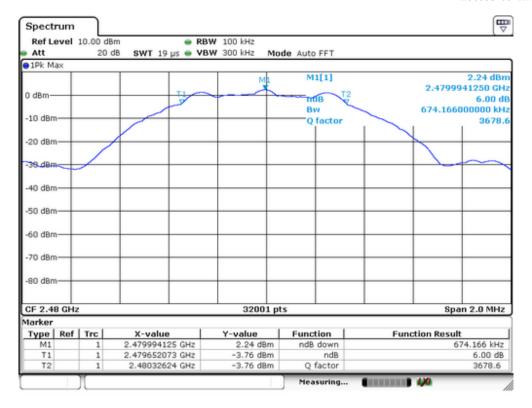



#### 8. MAXIMUM PEAK OUTPUT POWER TEST

#### 8.1 Measurement Procedure

- a. The Transmitter output (antenna port) was connected to the spectrum Analyzer.
- b. Turn on the EUT and then record the peak power value.
- c. Repeat above procedures on all channels needed to be tested.

# 8.2 Test SET-UP (Block Diagram of Configuration)

EUT Spectrum Analyzer

# 8.3 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	06/24/2015	06/23/2016
Coaxial Cable	CDS	79254	46107086	06/24/2015	06/23/2016

# 8.4Peak Power output limit

The maximum peak power shall be less 1Watt.

#### 8.5 Measurement Results:


Refer to attached data chart.


Spectrum Detector: PK Test Date: February 18, 2016

Test By: Andy Temperature : 25  $^{\circ}$ C Test Result: PASS Humidity : 50  $^{\circ}$ 


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(W)	Pass/Fail
0	2402	2.16	1.644	1W(30dBm)	PASS
19	2440	2.64	1.837	1W(30dBm)	PASS
39	2480	2.51	1.782	1W(30dBm)	PASS



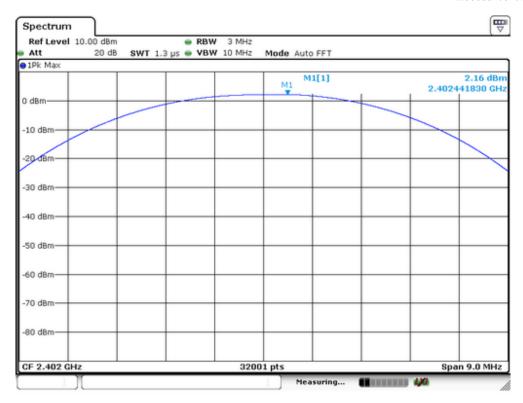

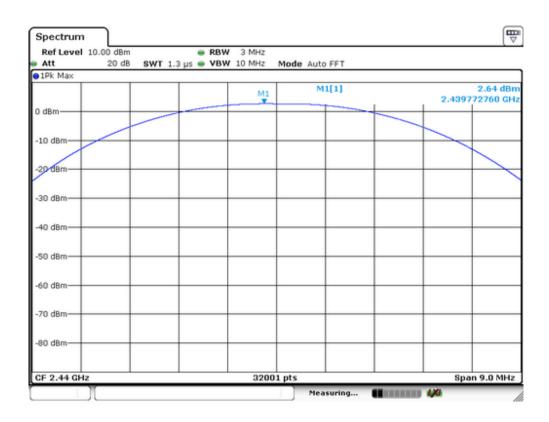



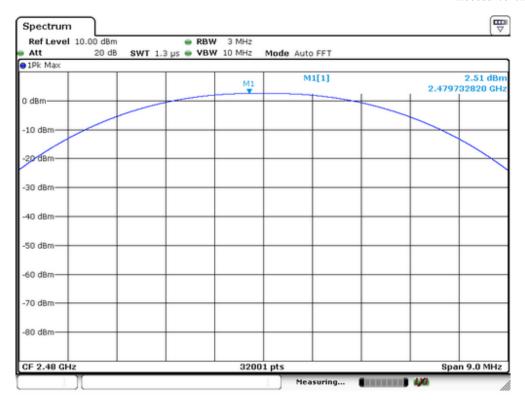



# 9. Power Spectral Density Measurement

#### 9.1Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

## 9.2 Test SET-UP (Block Diagram of Configuration)

EUI		Spectrum Analyzer
	l	

## 9.3 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	06/24/2015	06/23/2016
Coaxial Cable	CDS	79254	46107086	06/24/2015	06/23/2016

#### 9.4 Measurement Procedure

- 9.4.1 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
  - 9.4.2. Set to the maximum power setting and enable the EUT transmit continuously.
- 9.4.3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 9.4.4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
  - 9.4.5. Measure and record the results in the test report.
- 9.4.6. The Measured power density (dBm)/ 100KHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.



#### 9.5 Measurement Results:

The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	3KHz
VB	10KHz
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

Refer to attached data chart.

Spectrum Detector: PK Test Date: February 18, 2016

Test By: Andy Temperature : 25  $^{\circ}$ C Test Result: PASS Humidity : 50  $^{\circ}$ 


Channel number	Channel frequency	Measurement level (dBm)		Required Limit	Pass/Fail
	(MHz)	PSD/100kHz	PSD/3kHz	(dBm/3kHz)	
00	2402	0.97	-14.15	8	PASS
19	2440	1.38	-13.21	8	PASS
39	2480	1.11	-14.33	8	PASS

#### Note:


- 1. Measured power density(dBm) has offset with cable loss.
- 2. The measured power density(dBm)/100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



# PSD 100kHz Plot: Channel 00

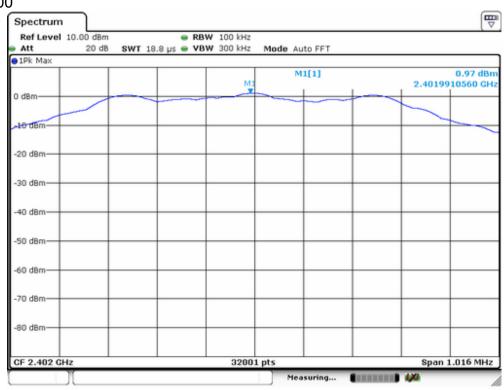

# Channel 19

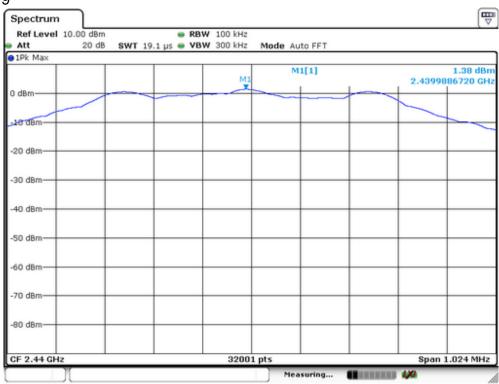




#### Channel 39




## PSD 3KHz Plot: Channel 00

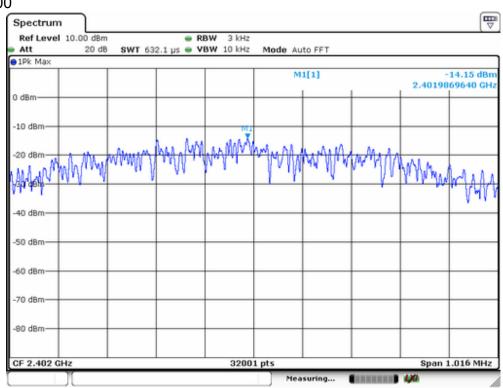




#### Channel 19

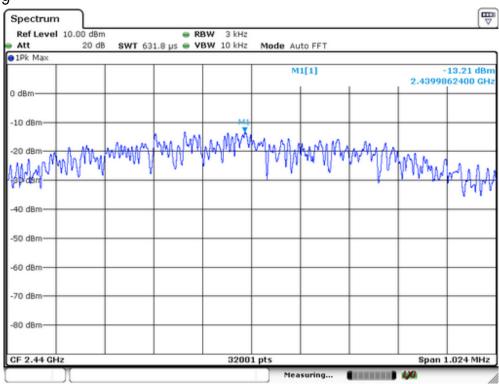

#### Channel 39

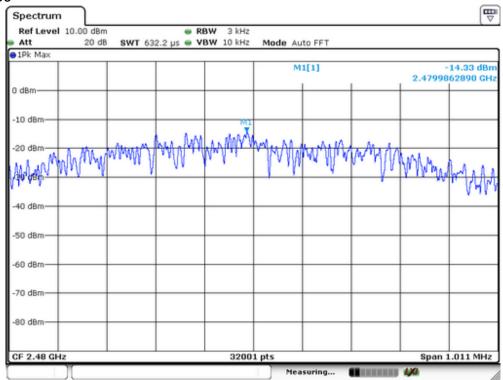



#### 10.Band EDGE test

#### **10.1 Measurement Procedure**

#### For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.

2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the

lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

### For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the ban edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band. Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold




# 10.2 Test SET-UP (Block Diagram of Configuration)

## For Conducted Test



## For Radiated emission Test

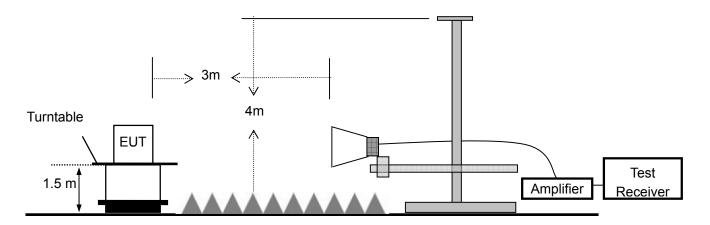

# 10.3 Measurement Equipment Used:

## For Conducted Test

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	06/24/2015	06/23/2016
Coaxial Cable	CDS	79254	46107086	06/24/2015	06/23/2016

## For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	03/15/2015	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-12 72	1GHz-18GHz	03/15/2015	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J1010000 0081	1GHz-26.5GHz	03/15/2015	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	03/15/2015	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	03/15/2015	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	03/15/2015	1 Year



## 10.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector: PK Test Date: February 18, 2016

Test By: Andy Temperature : 25  $^{\circ}$ C Test Result: PASS Humidity : 50  $^{\circ}$ 

## 1. Conducted Test

Frequency	Peak Power	Emission read	Result of Band	Band edge
(MHz)	Output(dBm)	Value(dBm)	edge(dBc)	Limit(dBc)
2399.99	1.28	-44.99	46.27	>20dBc
2483.99	1.12	-54.09	55.21	>20dBc

## 2. Radiated emission Test

Frequency	Antenna	Emission		Band edge Limit		Margin	
(MHz)	polarization	(dBuV/m)		(dBuV/m)		(dB)	
	(H/V)	PK AV		PK	AV	PK	AV
2398.04	Н	63.05	44.13	74	54	-10.95	-9.87
2399.48	V	60.72	40.28	74	54	-13.28	-13.72
2484.13	Н	64.85	45.82	74	54	-9.15	-8.18
2485.18	V	59.33	39.76	74	54	-14.67	-14.24



## 11 Antenna Application

## 11.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

#### 11.2 Result

The EUT's antenna, permanent attached antenna, used a PCB antenna and integrated on PCB, The antenna's gain is -0.61 dBi and meets the requirement.



# APPENDIX I (PHOTOS OF EUT)






M/N: 306B



M/N: 306B






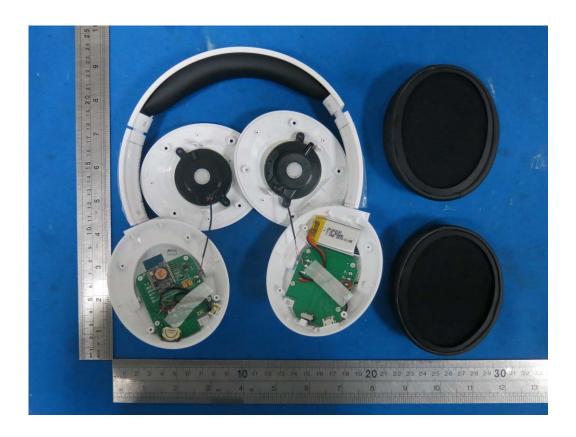







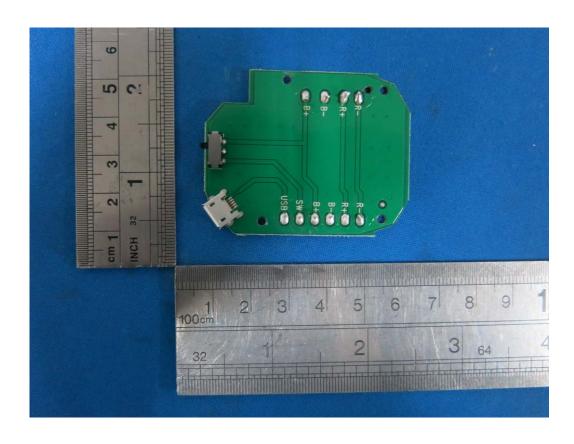





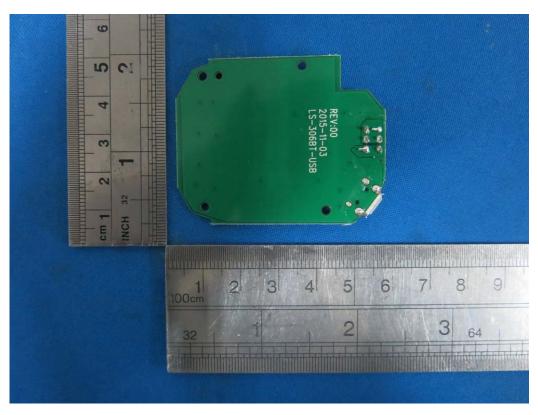

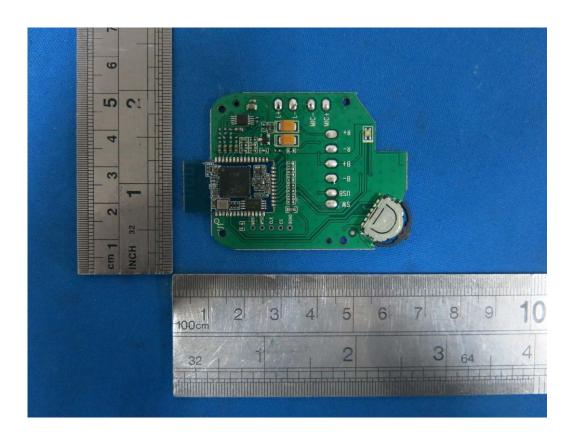



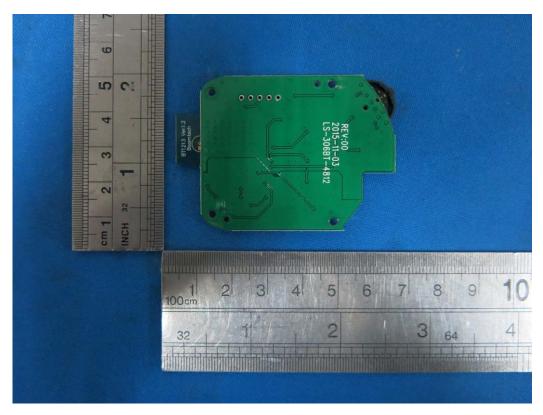

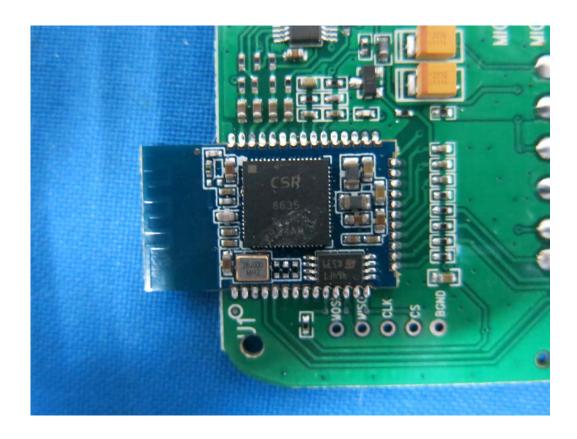





M/N: 155B



M/N: 155B





M/N: 303B



M/N: 303B





M/N: 305B



M/N: 305B





M/N: 303BD



M/N: 303BD





M/N: 305BD



M/N: 305BD





M/N: 306BD



M/N: 306BD