

FCC RADIO TEST REPORT-BT FCC ID:2AHMF-SW5200

Product: ShockWave

Trade Name: Retouch Power

Model No.: SW5200

Serial Model: N/A

Report No.: NTEK-2016NT01304171F2

Issue Date: 26 Feb. 2016

Prepared for

RETOUCH LIMITED
UNIT 7, 9TH FLOOR, BLOCK B, MIDLAND CENTRE,
328 QUEEN'S ROAD CENTRAL, SHEUNG WAN,
HONG KONG SAR CHINA

Prepared by

NTEK TESTING TECHNOLOGY CO., LTD.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen, P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599 Website: www.ntek.org.cn



TABLE OF CONTENTS

1	TES	ST RESULT CERTIFICATION	3
2	SUI	MMARY OF TEST RESULTS	4
3	FAC	CILITIES AND ACCREDITATIONS	5
	3.1	FACILITIES	5
	3.2 3.3	LABORATORY ACCREDITATIONS AND LISTINGS	
4	GE	NERAL DESCRIPTION OF EUT	6
5	DE	SCRIPTION OF TEST MODES	8
6	SET	TUP OF EQUIPMENT UNDER TEST	9
	6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	
	6.2	SUPPORT EQUIPMENT EQUIPMENTS LIST FOR ALL TEST ITEMS	10
	6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS	11
7	TES	ST REQUIREMENTS	12
	7.1	CONDUCTED EMISSIONS TEST	12
	7.2	RADIATED SPURIOUS EMISSION	13
	7.3	6DB BANDWIDTH	25
	7.4	DUTY CYCLE	28
	7.5	PEAK OUTPUT POWER	30
	7.6	POWER SPECTRAL DENSITY	
	7.7	CONDUCTED BAND EDGE MEASUREMENT	
	7.8	ANTENNA APPLICATION	38



1 TEST RESULT CERTIFICATION

Applicant's name:	Retouch Limited
Address	Unit 7, 9th Floor, Block B, Midland Centre, 328 Queen's Road Central, Sheung Wan, Hong Kong SAR China
Manufacture's Name:	Retouch Limited
Address	Unit 7, 9th Floor, Block B, Midland Centre, 328 Queen's Road Central, Sheung Wan, Hong Kong SAR China
Product description	
Product name:	ShockWave
Model and/or type reference:	SW5200
Serial Model	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J:2015	
FCC 47 CFR Part 15, Subpart C:2015	
KDB 174176 D01 Line Conducted FAQ v01r01	Complied
ANSI C63.10-2013	
FCC KDB 558074 D01 DTS Meas Guidance v03r04	

This device described above has been tested by NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK Testing Technology Co., Ltd., this document may be altered or revised by NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test	:	30 Jan. 2016 ~ 26 Feb. 2016
Testing Engineer	: <u> </u>	Julu lin
		(Allen Liu)
Technical Manager	:	Brown Ln
		(Brown Lu)
Authorized Signatory	:	Sam. Chan
		(Sam Chen)



2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

- 1. "N/A" denotes test is not applicable in this Test Report.
- 2. All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2014.09.04

The certificate is valid until 2017.09.03

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012 The Certificate Registration Number is 9270A-1.

Name of Firm : NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty	
1	Conducted Emission Test	±1.38dB	
2	RF power, conducted	±0.16dB	
3	Spurious emissions, conducted	±0.21dB	
4	All emissions, radiated(<1G)	±4.68dB	
5	All emissions, radiated(>1G)	±4.89dB	
6	Temperature	±0.5°C	
7	Humidity	±2%	



4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification		
Equipment	ShockWave	
Trade Name	Retouch Power	
FCC ID	2AHMF-SW5200	
Model No.	SW5200	
Serial Model	N/A	
Model Difference	N/A	
Operating Frequency	2402MHz~2480MHz	
Modulation	GFSK	
Number of Channels	40 Channels	
Antenna Type	PCB Antenna	
Antenna Gain	1 dBi	
	⊠DC supply: DC 3.7/2200mAh from Li-ion Battery or DC 5V from USB Port.	
Power supply	☐Adapter supply: Model: Input: Output:	
HW Version	BOEU-SZ-SG012CSR V1.2	
SW Version	Bluetooth 4.0+EDR	

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.



Revision History

Report No.	Version	Description	Issued Date
NTEK-2016NT01304171F2	Rev.01	Initial issue of report	Feb 26, 2016



5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2404
	112
19	2440
20	2442
	112
38	2478
39	2480

Note: fc=2402MHz+k×2MHz k=0 to 39

The following summary table is showing all test modes to demonstrate in compliance with the standard.

For AC Conducted Emission	
Final Test Mode	Description
Mode 4	normal link mode

Note: AC power line Conducted Emission was tested under maximum output power.

For Radiated Test Cases		
Final Test Mode	Description	
Mode 1	CH00(2402MHz)	
Mode 2	CH19(2440MHz)	
Mode 3	CH39(2480MHz)	

Note: For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.

For Conducted Test Cases		
Final Test Mode	Description	
Mode 1	CH00(2402MHz)	
Mode 2	CH19(2440MHz)	
Mode 3	CH39(2480MHz)	

Note: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.



6 SETUP OF	EQUIPMENT UNDER TES	ST	
0.4 DI 001/ DIA 0		OT OVOTEM	
6.1 BLOCK DIAG	RAM CONFIGURATION OF TE	SISYSIEM	
For AC Conducted	Emission Mode		
1 or 7 to conductor	Linioden Mode	EUT C1 Adapter	
		C1 Adapter	
Familia 17 17	0		
For Radiated Test (Cases		1
		_	
	EUT		
<u> </u>			.;
For Conducted Tes	st Cases		1
	Measurement	C3	
	Instrument Attenuator	EUT	



6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
1	ShockWave	Retouch Power	SW5200	2AHMF-SW5200	EUT
2	Adapter	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C1	USB Cable	NO	NO	0.8m
C3	RF Cable	NO	NO	0.3m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2015.07.06	2016.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2016.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.07	2016.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.07	2016.06.06	1 year
6	Horn Antenna	EM	EM-AH-1018 0	2011071402	2015.07.06	2016.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2015.07.06	2016.07.05	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.08	2016.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.0 5	2015.07.06	2016.07.05	1 year
12	Test Cable	N/A	R-01	N/A	2015.07.06	2016.07.05	1 year
13	Test Cable	N/A	R-02	N/A	2015.07.06	2016.07.05	1 year
14	Test Receiver	R&S	ESCI	101160	2015.06.06	2016.06.05	1 year
15	LISN	R&S	ENV216	101313	2015.08.24	2016.08.23	1 year
16	LISN	EMCO	3816/2	00042990	2015.08.24	2016.08.23	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2015.06.07	2016.06.06	1 year
19	Absorbing clamp	R&S	MOS-21	100423	2015.06.08	2016.06.07	1 year
20	Test Cable	N/A	C01	N/A	2015.06.08	2016.06.07	1 year
21	Test Cable	N/A	C02	N/A	2015.06.08	2016.06.07	1 year
22	Test Cable	N/A	C03	N/A	2015.06.08	2016.06.07	1 year
23	Attenuation	MCE	24-10-34	BN9258	2015.06.08	2016.06.07	1 year

Page 11 of 38

Note: Each piece of equipment is scheduled for calibration once a year.



7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

7.1.2 Conformance Limit

Fraguanov(MHz)	Conducted Emission Limit				
Frequency(MHz)	Quasi-peak	Average			
0.15-0.5	66-56*	56-46*			
0.5-5.0	56	46			
5.0-30.0	60	50			


Note: 1. *Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

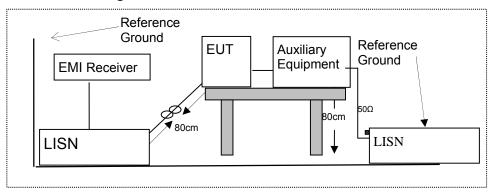


7.1.5 Test Procedure


According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- 9. For the actual test configuration, please refer to the related Item -EUT Test Photos.

Humidity:





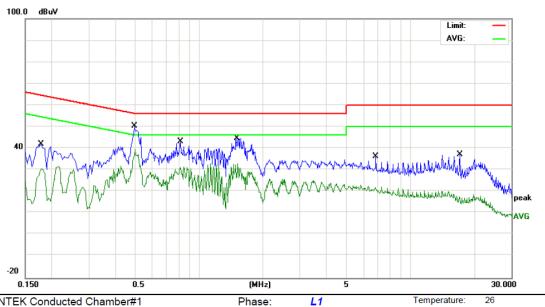

AC 120V/60Hz

Site NTEK Conducted Chamber#1

Limit: FCC Part 15B_(0.15-30MHz) _Main_QP


Mode: BT3.0 Note: Adapter

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1780	31.77	10.13	41.90	64.57	-22.67	QP	
2		0.1780	16.23	10.13	26.36	54.57	-28.21	AVG	
3	*	0.4940	40.56	9.81	50.37	56.10	-5.73	QP	
4		0.4940	29.83	9.81	39.64	46.10	-6.46	AVG	
5		0.8139	33.24	9.81	43.05	56.00	-12.95	QP	
6		0.8139	17.33	9.81	27.14	46.00	-18.86	AVG	
7		1.5100	34.93	9.79	44.72	56.00	-11.28	QP	
8		1.5100	23.06	9.79	32.85	46.00	-13.15	AVG	
9		6.8539	26.49	9.77	36.26	60.00	-23.74	QP	
10		6.8539	13.88	9.77	23.65	50.00	-26.35	AVG	
11		17.1180	27.27	9.89	37.16	60.00	-22.84	QP	
12		17.1180	10.33	9.89	20.22	50.00	-29.78	AVG	

Power:

^{*:}Maximum data x:Over limit !:over margin



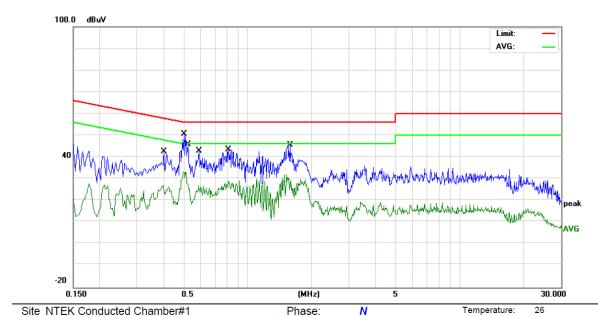

Power:

Limit: FCC Part 15B_(0.15-30MHz) _Main_QP

AC 120V/60Hz

Temperature:

Humidity: 56 %

Mode: BT3.0 Note: Adapter


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBu∀	dBu∨	dB	Detector	Comment
1		0.4020	32.42	10.05	42.47	57.81	-15.34	QP	
2		0.4020	17.97	10.05	28.02	47.81	-19.79	AVG	
3	*	0.5020	40.81	9.82	50.63	56.00	-5.37	QP	
4		0.5020	23.42	9.82	33.24	46.00	-12.76	AVG	
5		0.5220	36.01	9.82	45.83	56.00	-10.17	QP	
6		0.5220	17.31	9.82	27.13	46.00	-18.87	AVG	
7		0.5899	33.10	9.82	42.92	56.00	-13.08	QP	
8		0.5899	14.87	9.82	24.69	46.00	-21.31	AVG	
9		0.8100	33.70	9.83	43.53	56.00	-12.47	QP	
10		0.8100	20.18	9.83	30.01	46.00	-15.99	AVG	
11		1.5820	35.72	9.80	45.52	56.00	-10.48	QP	
12		1.5820	20.18	9.80	29.98	46.00	-16.02	AVG	

^{*:}Maximum data x:Over limit !:over margin

Humidity:

56 %



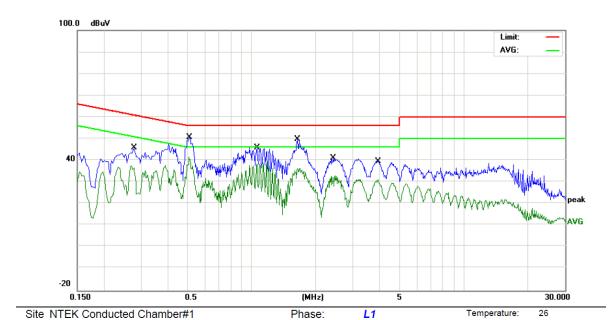

Power:

AC 240V/50Hz

Limit: FCC Part 15B_(0.15-30MHz) _Main_QP


Mode: BT3.0 Note: Adapter

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBu∀	dBu∨	dB	Detector	Comment
1		0.2779	35.66	10.14	45.80	60.88	-15.08	QP	
2		0.2779	18.11	10.14	28.25	50.88	-22.63	AVG	
3		0.5100	40.97	9.80	50.77	56.00	-5.23	QP	
4	*	0.5100	31.97	9.80	41.77	46.00	-4.23	AVG	
5		1.0580	35.87	9.84	45.71	56.00	-10.29	QP	
6		1.0580	17.31	9.84	27.15	46.00	-18.85	AVG	
7		1.6380	40.03	9.77	49.80	56.00	-6.20	QP	
8		1.6380	26.63	9.77	36.40	46.00	-9.60	AVG	
9		2.4219	31.43	9.73	41.16	56.00	-14.84	QP	
10		2.4219	16.96	9.73	26.69	46.00	-19.31	AVG	
11		3.9260	29.81	9.75	39.56	56.00	-16.44	QP	
12		3.9260	15.83	9.75	25.58	46.00	-20.42	AVG	

^{*:}Maximum data x:Over limit !:over margin

Humidity:



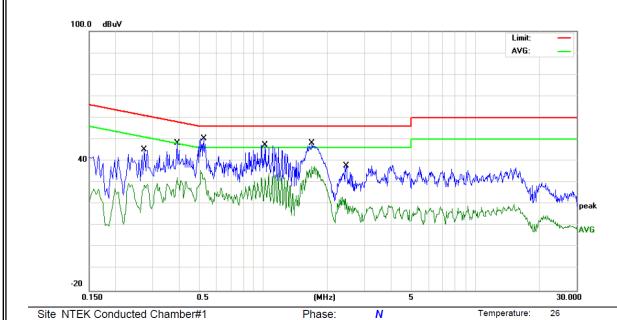

: : : FOO Dest 45D (0.45 00MHz) - Mail: OD

Limit: FCC Part 15B_(0.15-30MHz) _Main_QP Mode: BT3.0

Note: Adapter

11

12

Reading Correct Measure-Limit Over No. Mk. Freq. Level Factor ment dBuV dB dBu∀ dBu∨ dB MHz Detector Comment 0.2740 35.16 10.10 45.26 60.99 -15.73 QP 1 2 0.2740 16.02 10.10 26.12 50.99 -24.87 AVG 3 0.3899 38.10 10.06 48.16 58.06 -9.90 QP 4 0.3899 19.96 10.06 30.02 48.06 -18.04 AVG 5 0.5220 40.66 9.82 50.48 56.00 -5.52 QP 0.5220 25.77 9.82 35.59 46.00 -10.41 AVG 6 37.55 47.42 56.00 -8.58 QP 7 1.0180 9.87 46.00 -14.55 1.0180 21.58 9.87 31.45 AVG 8 QP 1.6900 38.58 48.37 56.00 -7.63 9 9.79 27.58 9.79 37.37 AVG 10 1.6900 46.00 -8.63

56.00 -18.14

46.00 -21.42

Power:

AC 240V/50Hz

QP

AVG

28.12

14.84

9.74

9.74

37.86

24.58

2.4500

2.4500

^{*:}Maximum data x:Over limit !:over margin



7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and DA 00-705

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

tooliding to 1 00 1 dilitio:200; iteotricied barido						
MHz	MHz	GHz				
16.42-16.423	399.9-410	4.5-5.15				
16.69475-16.69525	608-614	5.35-5.46				
16.80425-16.80475	960-1240	7.25-7.75				
25.5-25.67	1300-1427	8.025-8.5				
37.5-38.25	1435-1626.5	9.0-9.2				
73-74.6	1645.5-1646.5	9.3-9.5				
74.8-75.2	1660-1710	10.6-12.7				
123-138	2200-2300	14.47-14.5				
149.9-150.05	2310-2390	15.35-16.2				
156.52475-156.52525	2483.5-2500	17.7-21.4				
156.7-156.9	2690-2900	22.01-23.12				
162.0125-167.17	3260-3267	23.6-24.0				
167.72-173.2	3332-3339	31.2-31.8				
240-285	3345.8-3358	36.43-36.5				
322-335.4	3600-4400	(2)				
	MHz 16.42-16.423 16.69475-16.69525 16.80425-16.80475 25.5-25.67 37.5-38.25 73-74.6 74.8-75.2 123-138 149.9-150.05 156.52475-156.52525 156.7-156.9 162.0125-167.17 167.72-173.2 240-285	MHz MHz 16.42-16.423 399.9-410 16.69475-16.69525 608-614 16.80425-16.80475 960-1240 25.5-25.67 1300-1427 37.5-38.25 1435-1626.5 73-74.6 1645.5-1646.5 74.8-75.2 1660-1710 123-138 2200-2300 149.9-150.05 2310-2390 156.52475-156.52525 2483.5-2500 156.7-156.9 2690-2900 162.0125-167.17 3260-3267 167.72-173.2 3332-3339 240-285 3345.8-3358				

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

	()/	\ /	
Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Eroquonov(MHz)	Class B (dBuV/m) (at 3M)			
Frequency(MHz)	PEAK	AVERAGE		
Above 1000	74	54		

Remark: 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.


7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.




7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

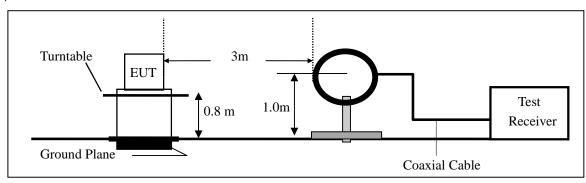

(b) For radiated emissions from 30MHz to 1000MHz

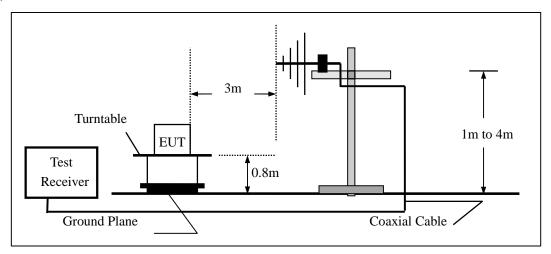

(c) For radiated emissions above 1000MHz

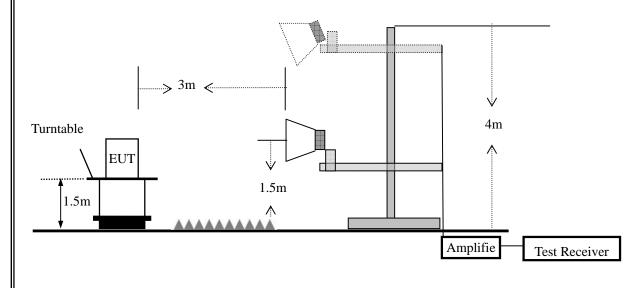



7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

	Spectrum Parameter	Setting		
	Attenuation	Auto		
Start Frequency Stop Frequency		1000 MHz		
		10th carrier harmonic		
	RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average		

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
Above 1000	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.



7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	ShockWave	Model No.:	SW5200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3	Test By:	Allen Liu

Freq.	Ant.Pol.	Emission L	evel(dBuV/m)	Limit 3	m(dBuV/m)	Over(dB)		
(MHz)	H/V	PK `AV ´		PK	AV	PK	AV	
				-	-			


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =20log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor





All the modulation modes have been tested, and the worst result was report as below:

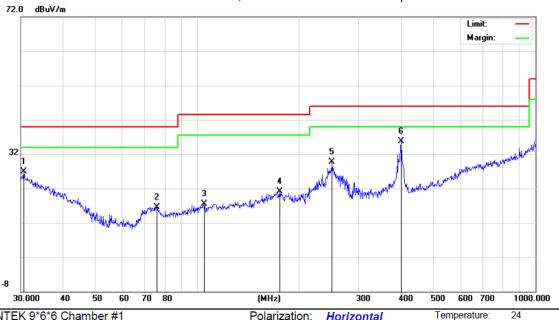

Site NTEK 9*6*6 Chamber #1

Polarization: Horizontal

Temperature:

50 %

Humidity:

Limit: FCC_PART15_B_03m_QP Mode: BT 4.0

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		30.6375	7.50	19.34	26.84	40.00	-13.16	peak			
2		75.9770	7.03	9.57	16.60	40.00	-23.40	peak			
3	,	104.9033	7.31	10.28	17.59	43.50	-25.91	peak			
4	•	175.0364	8.84	12.31	21.15	43.50	-22.35	peak			
5	2	250.3009	18.85	10.88	29.73	46.00	-16.27	peak			
6	* 4	400.4318	20.95	14.84	35.79	46.00	-10.21	peak			


Power:

^{*:}Maximum data x:Over limit !:over margin

Humidity:

50 %



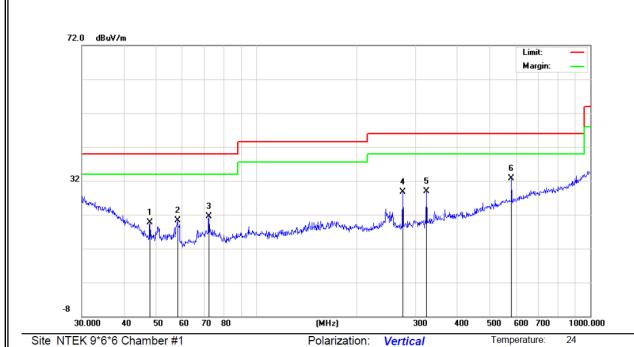

Site INTER 9 0 0 Chamber #1

580.7024

Limit: FCC_PART15_B_03m_QP

Mode: BT 4.0

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	47.9938	9.86	9.88	19.74	40.00	-20.26	peak			
2	57.9992	14.05	6.19	20.24	40.00	-19.76	peak			
3	72.0841	11.86	9.66	21.52	40.00	-18.48	peak			
4	274.1938	17.06	11.67	28.73	46.00	-17.27	peak			
5	323.3204	15.51	13.35	28.86	46.00	-17.14	peak			

32.77 46.00 -13.23 peak

Power:

13.95

18.82

^{*:}Maximum data x:Over limit !:over margin



■ Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	ShockWave	Model No.:	SW5200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3	Test By:	Allen Liu

All the modulation modes have been tested, and the worst result was report as below:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark	Comment						
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Remaik	Comment						
	Low Channel (2402 MHz)-Above 1G												
4804.225	55.36	-3.64	59.00	74.00	-15.00	Pk	Vertical						
4804.225	39.36	-3.64	43.00	54.00	-11.00	AV	Vertical						
7206.177	60.25	-0.95	61.20	74.00	-12.80	Pk	Vertical						
7206.177	41.36	-0.95	42.31	54.00	-11.69	AV	Vertical						
4804.336	58.58	-3.64	62.22	74.00	-11.78	Pk	Horizontal						
4804.336	41.69	-3.64	45.33	54.00	-8.67	AV	Horizontal						
7206.258	57.15	-0.95	58.10	74.00	-15.90	Pk	Horizontal						
7206.258	41.33	-0.95	42.28	54.00	-11.72	AV	Horizontal						
	T	Mid Chanr	nel (2441 MHz)-Abo	ve 1G		1							
4880.274	60.25	-3.68	63.93	74.00	-10.07	Pk	Vertical						
4880.274	38.58	-3.68	42.26	54.00	-11.74	AV	Vertical						
7320.175	58.58	-0.82	59.40	74.00	-14.60	Pk	Vertical						
7320.175	41.25	-0.82	42.07	54.00	-11.93	AV	Vertical						
4880.258	58.33	-3.68	62.01	74.00	-11.99	Pk	Horizontal						
4880.258	41.02	-3.68	44.70	54.00	-9.30	AV	Horizontal						
7320.102	57.36	-0.82	58.18	74.00	-15.82	Pk	Horizontal						
7320.102	41.25	-0.82	42.07	54.00	-11.93	AV	Horizontal						
	_	High Chani	nel (2480 MHz)- Abo	ove 1G									
4960.584	57.15	-3.59	60.74	74.00	-13.26	Pk	Vertical						
4960.584	40.02	-3.59	43.61	54.00	-10.39	AV	Vertical						
7440.299	57.33	-0.68	58.01	74.00	-15.99	Pk	Vertical						
7440.299	39.33	-0.68	40.01	54.00	-13.99	AV	Vertical						
4960.175	57.58	-3.59	61.17	74.00	-12.83	Pk	Horizontal						
4960.175	39.66	-3.59	43.25	54.00	-10.75	AV	Horizontal						
7440.332	61.02	-0.68	61.70	74.00	-12.30	Pk	Horizontal						
7440.332	40.47	-0.68	41.15	54.00	-12.85	AV	Horizontal						





■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz									
EUT: ShockWave Model No.: SW5200									
Temperature:	Temperature: 20 ℃ Relative Humidity: 48%								
Test Mode:	Mode1/Mode3	Test By:	Allen Liu						

All the modulation modes were tested, the data of the worst mode are described in the following table

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Commont			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	Comment			
	1Mbps									
2390	60.14	-13.06	47.08	74.00	-26.92	peak	Vertical			
2390	59.28	-13.06	46.22	74.00	-27.78	peak	Horizontal			
2483.5	60.85	-12.78	48.07	74.00	-25.93	peak	Vertical			
2483.5	60.37	-12.78	47.59	74.00	-26.41	peak	Horizontal			



7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r04

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

 $VBW \geq 3^*RBW$

Sweep = auto

Detector function = peak


Trace = max hold

7.3.6 Test Results


EUT:	ShockWave	Model No.:	SW5200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3	Test By:	Allen Liu

Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2402	663.239	500	Pass
Middle	2440	694.093	500	Pass
High	2480	692.264	500	Pass



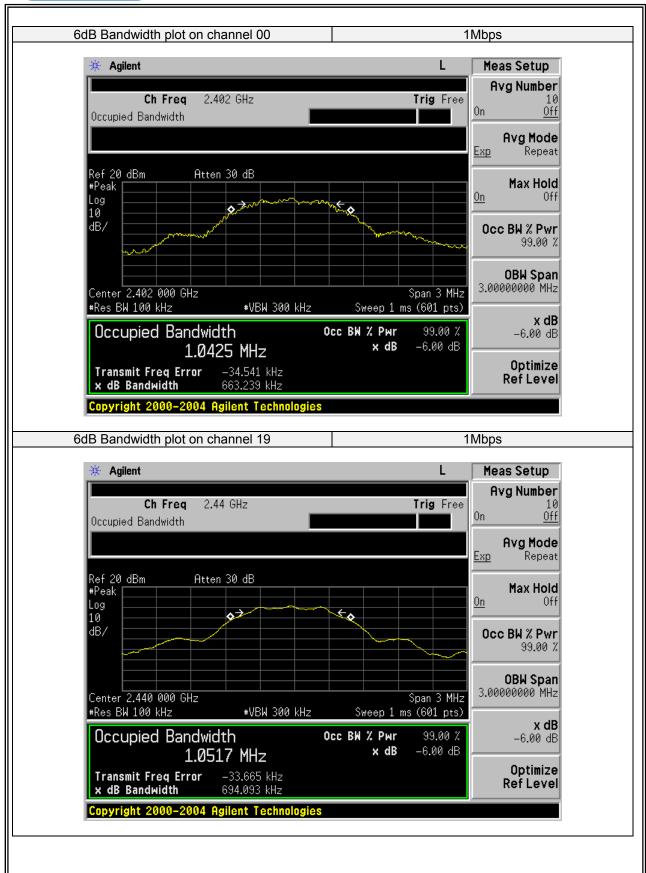



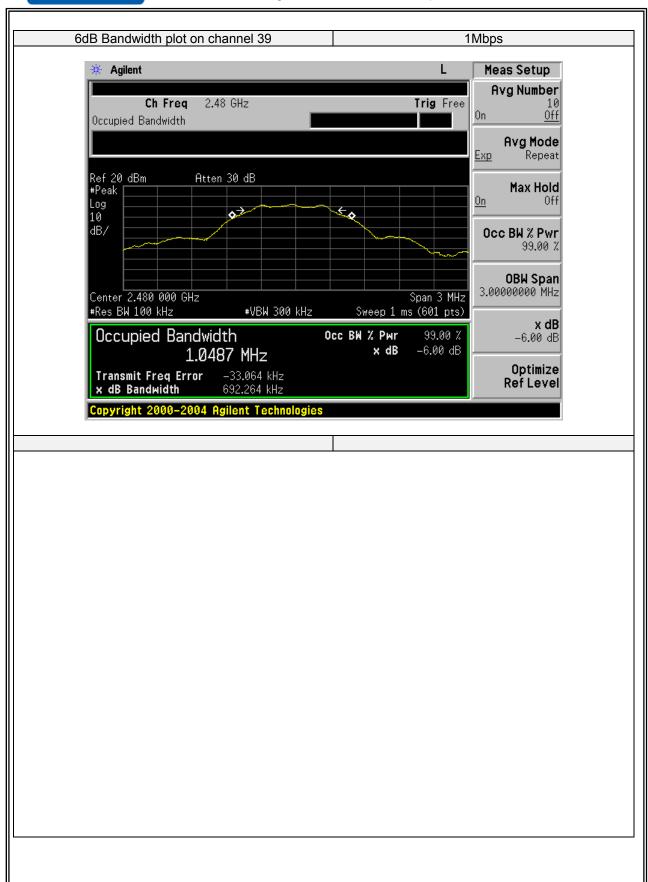



7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074)6)b), issued 06/09/2015

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T \leq 16.7 microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested accroding to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/09/2015)

The largest availble value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \le 6.25$ microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/T.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz(the largest available value)

VBW = 8MHz (≥ RBW)

Number of points in Sweep >100

Detector function = peak

Trace = Clear write

Measure T_{total} and T_{on}


Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor=10*log(1/Duty Cycle)



7.4.6 Test Results

EUT:	ShockWave	Model No.:	SW5200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode5	Test By:	Allen Liu

Modulation Mode	Data rate	Ton	T _{total}	Duty Cycle	Duty Cycle Factor (dB)
GFSK	1Mbps	410.4	643.5	0.6378	1.953

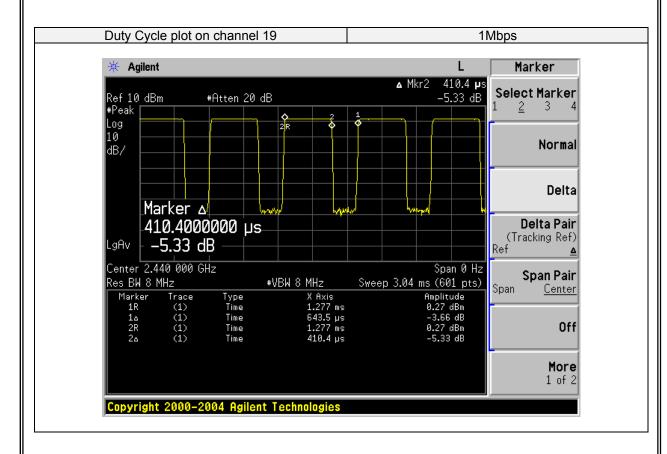



7.5 PEAK OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r04

7.5.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set the RBW \geq DTS bandwidth(about 1MHz).

Set VBW = 3*RBW(about 3MHz)

Set the span ≥3*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize.


Use peak marker function to determine the peak amplitude level.

7.5.6 Test Results

EUT:	ShockWave	Model No.:	SW5200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3	Test By:	Allen Liu


Test Channel	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	LIMIT (dBm)	Verdict
1Mbps					
00	2402	MAXIMUM	3.01	30	PASS
19	2440	MAXIMUM	3.08	30	PASS
39	2480	MAXIMUM	3.94	30	PASS



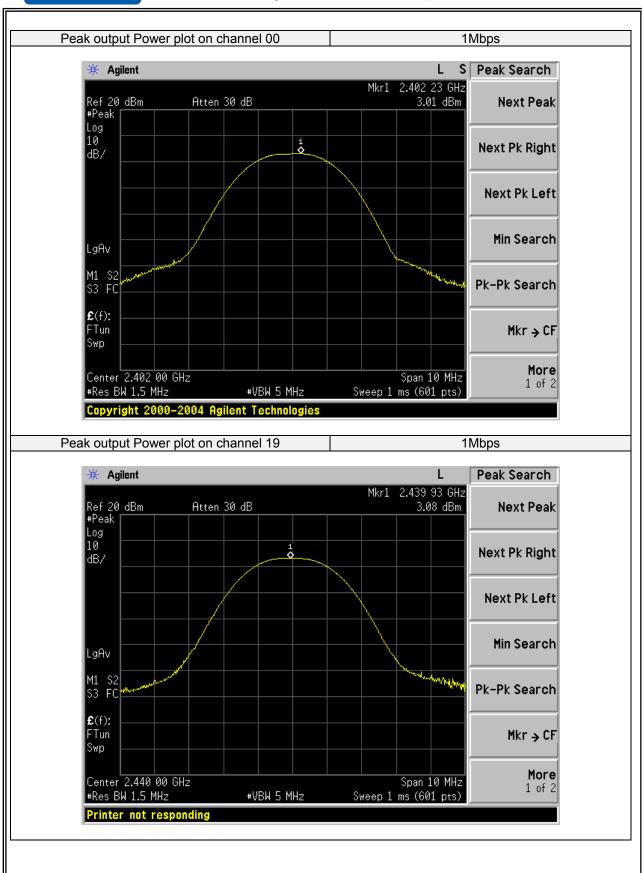

Page 31 of 38



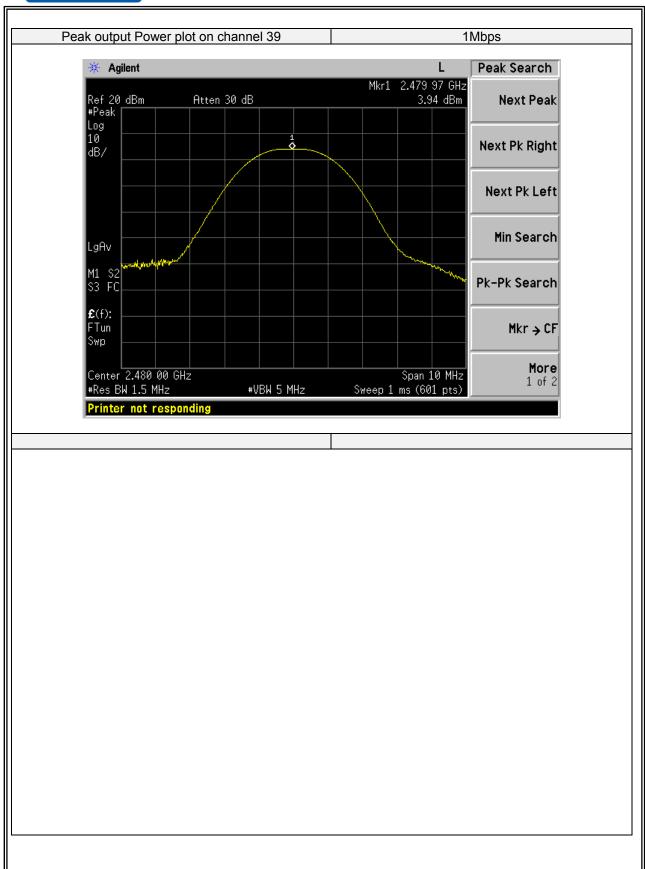



7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r04

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set RBW =3KHz

Set VBW =10KHz

Set the span =1.5 times the DTS bandwidth

Set Sweep time = auto couple.

Set Detector = peak.


Set Trace mode = max hold.

7.6.6 Test Results


EUT:	ShockWave	Model No.:	SW5200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3	Test By:	Allen Liu

Test Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Verdict		
	1Mbps					
00	2402	-14.49	8	PASS		
19	2440	-13.09	8	PASS		
39	2480	-12.13	8	PASS		



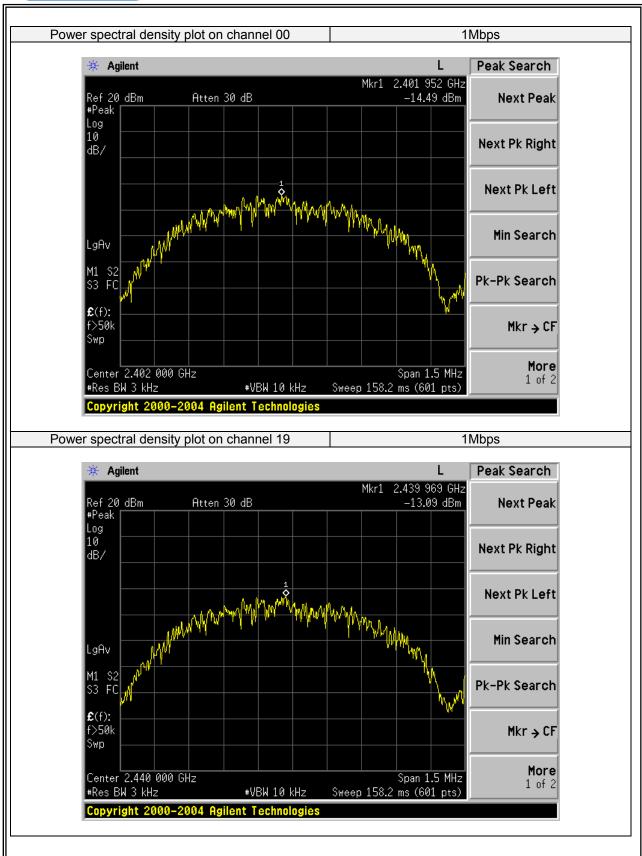



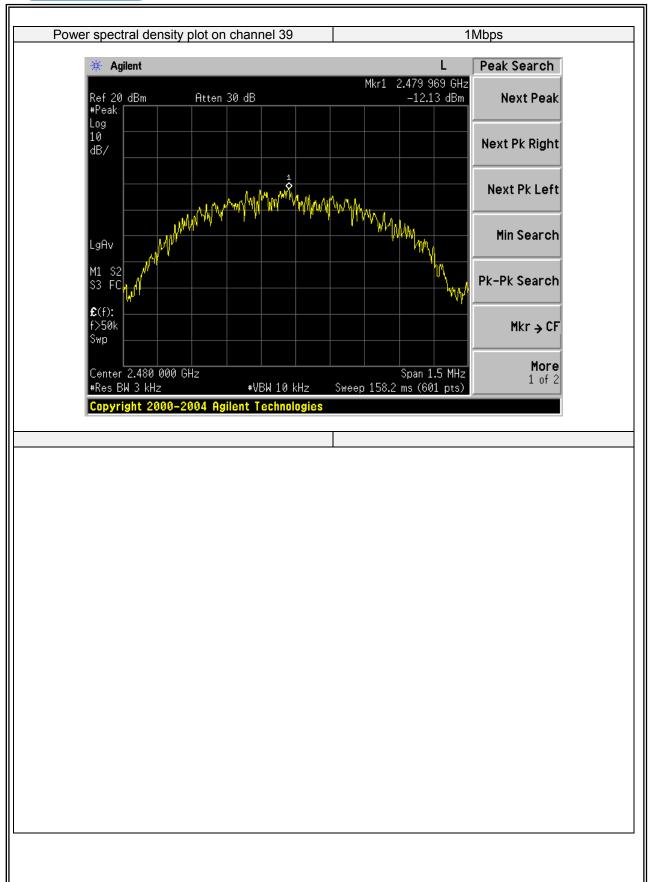



7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r04

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.


Repeat above procedures until all measured frequencies were complete.

7.7.6 Test Results

EUT:	ShockWave	Model No.:	SW5200
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode5/Mode7	Test By:	Allen Liu

Frequency Band	Delta Peak to band emission(dBc)	>Limit(dBc)	Verdict
Left-band	35.83	20	Pass
Right-band	51.01	20	Pass



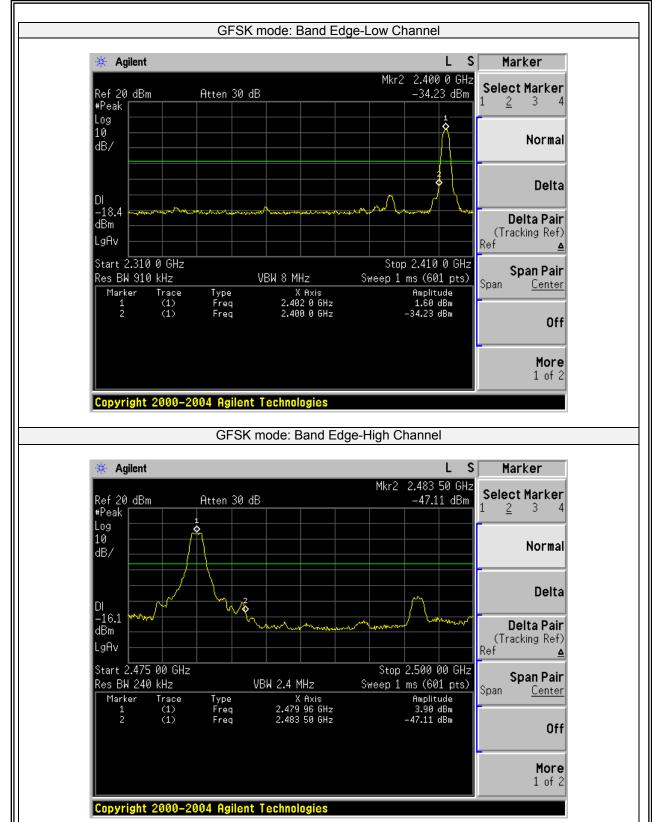



7.8 ANTENNA APPLICATION

7.8.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.8.2 **Result**

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

END OF REPORT