# **SAR TEST REPORT**

Reference No. ..... WTS16S173763E FCC ID..... 2AHN7VS08 Shenzhen Viota Technology Co., Ltd Applicant ..... Rm.308-311,3rd Floor,Blog 5,Internet Industrial Park,Xixiang Address ..... Town, Baoyuan Road, Baoan District, Shenzhen, Guangdong, China Shenzhen Viota Technology Co., Ltd Manufacturer ..... Rm.308-311, 3rd Floor, Blog 5, Internet Industrial Park ,Xixiang Town, Address ..... Baoyuan Road, Baoan District, Shenzhen, Guangdong, China Product Name ..... Samrt Watch VS08/GT08 Model No. ..... A1, U8/VS07, U9/VS06, DZ09/VS09, VS19, VS20, VS20 plus, VS21, VS36, VS65 Trademark..... N/A FCC 47 CFR Part2(2.1093) ANSI/IEEE C95.1-2006 Standards..... ANSI/IEEE C95.3:2002 IEEE 1528-2013 & Published RF Exposure KDB Procedures Date of Receipt sample.... Mar.21,2016 Date of Test ..... May 05,2016 Date of Issue ..... May 05,2016 Test Result ..... Pass

#### Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel:+86-755-83551033 Fax:+86-755-83552400

Compiled by:	Approved by:
On 2	Thelo zhoul
Zero Zhou / Project Engineer	Philo Zhong / Manager

Reference No.: WTS16S173763E Page 2 of 75

## 1 Laboratory Introduction

Waltek Service Co., Ltd. is a professional third-party testing and certification organization with multi-year product testing and certification experience. Established strictly in accordance with ISO/IEC Guide 65 and ISO/IEC 17025, our company has got recognition from <a href="CNAS">CNAS</a> (China National Accreditation Service for Conformity Assessment) and International Laboratory Accreditation Cooperation (ILAC). At the same time, our company has been approved by some authoritative organizations, such as <a href="EMSD">EMSD</a> of Hongkong, UL, Intertek-ETL SEMKO, CSA, MET, TÜV Rheinland, TÜV SÜD, SGS, Nemko, FCC, IC of Canada, <a href="CPSC">CPSC</a>, TMICO and <a href="California Energy Commission">California Energy Commission</a> (CEC). Since the set-up of our company, we sincerely help our customers to improve their products to achieve relative international standards. We are accepted by various clients in international market and well-known in the same industry.



There are several laboratories in our company which are equipped with advanced equipments for fully testing. It can provide testing and certification services for products exported around the world, also it can ensure that the products reach international standards in aspects of safety, electromagnetic compatibility, virulence, energy efficiency, reliability and so on. To enable our customers can get local services more directly and conveniently, and to realize our promise to provide more high quality services. Our company has set up product testing labs in South China and East China (Shenzhen, Dongguan, Foshan, Suzhou and Ningbo). We can provide our clients with accurate test and technical support services in good faith, and actively follow customer demand. These can fully demonstrate Waltek Services concept -- "One-stop Services".

Our company has many experienced engineers and customer service representatives to meet our customer's demand for a number of tests and provide superb technical guidance and modification service; At the same time we can provide global certification services by our global partners to help our customer's products to successfully extend to the global market.

# 2 Contents

1	LABORATORY INTRODUCTION	2
2	CONTENTS	3
3	GENERAL INFORMATION	4
4	INTRODUCTION	5
5	SAR MEASUREMENT SETUP	6
6	EXPOSURE LIMIT	15
7	SYSTEM AND LIQUID VALIDATION	16
8	TYPE A MEASUREMENT UNCERTAINTY	25
9	TEST INSTRUMENT	28
10	OUTPUT POWER VERIFICATION	29
11	EXPOSURE CONDITIONS CONSIDERATION	31
12	SAR TEST RESULTS	32
13	SAR MEASUREMENT REFERENCES	34
14	CALIBRATION REPORTS-PROBE	41
15	SAR SYSTEM PHOTOS	74
16	SETUP PHOTOS	75

Reference No.: WTS16S173763E Page 4 of 75

## 3 **General Information**

## 3.1 General Description of E.U.T.

Product Name: Samrt Watch
Model No.: VS08/GT08

A1, U8/VS07, U9/VS06, DZ09/VS09, VS19, VS20, VS20 plus,

VS21, VS36, VS65

Model Description: Model name is different.

GSM Band(s): GSM 850/1900MHz

GPRS Class: 12

Bluetooth Version: Support

3.2 **Details of E.U.T.** 

Operation Frequency GSM/GPRS 850: 824~849MHz

PCS/GPRS 1900: 1850~1910MHz

Bluetooth: 2402-2480MHz

Type of Modulation: GSM,GPRS: GMSK

Bluetooth: GFSK, Pi/4 DQPSK,8DPSK

Antenna installation GSM: internal permanent antenna

Bluetooth: internal permanent antenna

Antenna Gain GSM 850: 1.2dBi

PCS1900: 1.2dBi Bluetooth: 0.5dBi

Technical Data DC 3.7V

DC 5V from PC

#### 3.3 **Max. SAR**

Near to Mouth(10mm Gap)

Frequency Band	Maximum SAR1 (W/kg)	SAR1g Limit (W/kg)
GSM850	0.08	1.6
GSM1900	0.12	1.6

Wrist-worn(0mm Gap)

Frequency Band	Maximum SAR10g (W/kg)	SAR10g Limit (W/kg)
GSM850	3.10	4.0
GSM1900	0.32	4.0

## 4 INTRODUCTION

### Introduction

This measurement report shows compliance of the EUT with ANSI/IEEE C95.1-2006 and FCC 47 CFR Part2 (2.1093)

.

The test procedures, as described in IEEE 1528-2013 Standard for IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques(300MHz~6GHz) and Published RF Exposure KDB Procedures

## **SAR Definition**

SAR : Specific Absorption Rate

The SAR characterize the absorption of energy by a quantity of tissue

This is related to a increase of the temperature of these tissues during a time period.

DAS = 
$$\frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

DAS =  $\frac{\sigma E^2}{\rho}$ 

DAS =  $\frac{d}{dt} \left( \frac{dW}{dt} \right)$ 

$$SAR = \frac{\sigma E^2}{\rho}$$

SAR : Specific Absorption Rate

σ : Liquid conductivity

$$oe_r = e' - je''$$
 (complex permittivity of liquid)

$$\circ \sigma = \frac{\varepsilon'' \omega}{\varepsilon_0}$$


ρ: Liquid density
 ο ρ = 1000 g/L = 1000Kg/m³

where:

 $\sigma$  = conductivity of the tissue (S/m)  $\rho$  = mass density of the tissue (kg/m3) E = rms electric field strength (V/m)

## 5 SAR MEASUREMENT SETUP

# SAR bench sub-systems

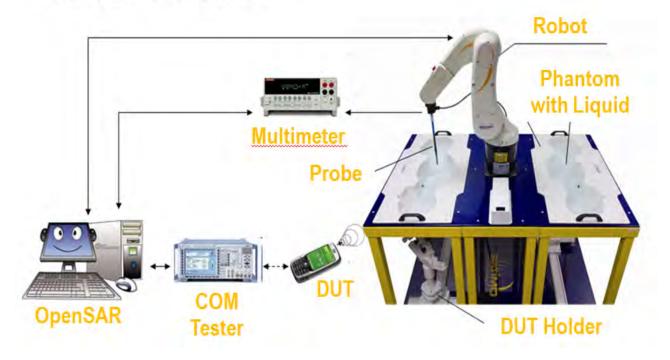


# Scanning System (robot)

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom (±30°).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.




# SAM Phantom (Specific Anthropomorphic Mannequin)


- The probe scanning of the E-Field is done in the 2 half of the normalized head.
- The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size.
- The materials for the phantom should not affect the radiation of the device under test (DUT)
  - Permittivity < 5</li>
- The head is filled with tissue simulating liquid.
- The hand holding the DUT does not have to be modeled.



Blustration du l'antônse donnant les points de référence des preilles, RE et LE, le point de référence de la bouche, M, la ligne de référence M-F et la bande centrale



Bi-section sagittale du fantôme avec périmètre étendu (montrée sur le côté comme fors des essais de DAS de l'appareit)

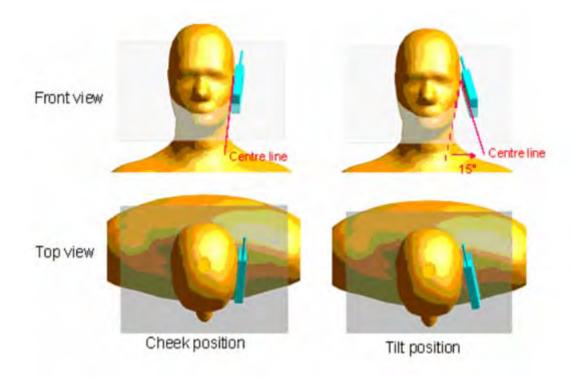

Reference No.: WTS16S173763E Page 8 of 75

# The OPENSAR system for performing compliance tests consist of the following items:

- 1. A standard high precision 6-axis robot (KUKA) with controller and software.
- 2. KUKA Control Panel (KCP).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 4. The functions of the PC plug-in card are to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.
- 5. A computer operating Windows 7.
- 6. OPENSAR software.
- 7. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- 8. The SAM phantom enabling testing left-hand right-hand and body usage.
- 9. The Position device for handheld EUT.
- 10. Tissue simulating liquid mixed according to the given recipes (see Application Note).
- 11. System validation dipoles to validate the proper functioning of the system.

### **Data Evaluation**

The OPENSAR software automatically executes the following procedure to calculate the field units from the microvolt readings at the probe connector. The parameters used in the valuation are stored in the configuration modules of the software:

Probe	- Sensitivity	Norm <sub>i</sub>
Parameters	- Conversion factor	ConvFi
	- Diode compression point	
	Dcpi	
Device	- Frequency	f
Parameter	- Crest factor	cf
Media Parametrs	- Conductivity	σ
i aramens	- Density	ρ

These parameters must be set correctly in the software. They can either be found in the component documents or be imported into the software from the configuration files issued for the OPENSAR components.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Where  $V_i$  = Compensated signal of channel i (i = x, y, z)

 $U_i$  = Input signal of channel i (i = x, y, z)

cf = Crest factor of exciting field(DASY parameter)

 $dcp_i = Diode\ compression\ point\ (DASY\ parameter)$ 

Reference No.: WTS16S173763E

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$ 

H-field probes:  $H_i = \sqrt{Vi} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$ 

Where  $V_i$  = Compensated signal of channel i (i = x, y, z)

 $Norm_i$  = Sensor sensitivity of channel i (i = x, y, z)

 $\mu V/(V/m)$ 2 for E0field Probes

ConvF= Sensitivity enhancement in solution

a<sub>ij</sub> = Sensor sensitivity factors for H-field probes

f = Carrier frequency (GHz)

E<sub>i</sub> = Electric field strength of channel i in V/m H<sub>i</sub> = Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} - \sqrt{E_z^2 + E_z^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

 $SAR - E_{\text{\tiny MM}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$ 

where SAR = local specific absorption rate in mW/g

E<sub>tot</sub> = total field strength in V/m

σ = conductivity in [mho/m] or [siemens/m]

ρ = equivalent tissue density in q/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

 $P_{per} = \frac{E_{ver}^2}{3770}$  or  $P_{per} = H_{ver}^2 \cdot 37.7$ 

where  $P_{pwe}$  = Equivalent power density of a plane wave in mW/cm2

E<sub>tot</sub> = total electric field strength in V/m H<sub>tot</sub> = total magnetic field strength in A/m Reference No.: WTS16S173763E Page 11 of 75

## SAR Evaluation - Peak Spatial - Average

The procedure for assessing the peak spatial-average SAR value consists of the following steps

#### Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

#### Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

#### Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

#### Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

#### SAR Evaluation – Peak SAR

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g. The OPENSAR system allows evaluations that combine measured data and robot positions, such

as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

#### Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

#### **Definition of Reference Points**

#### Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

#### **Device Reference Points**

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is than located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at it's top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point [5].




Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

## Test Configuration – Positioning for Cheek / Touch

Position the device close to the surface of the phantom such that point A is on the (virtual) extension
of the line passing through points RE and LE on the phantom (see Figure below), such that the plane
defined by the vertical center line and the horizontal line of the device is approximately parallel to the
sagittal plane of the phantom



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

- 2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
- 3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
- 5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




Figure 7.2 Side view w/ relevant markings

## Test Configuration - Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position":

- 1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
- 2. Rotate the device around the horizontal line by 15 degrees.
- 3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).

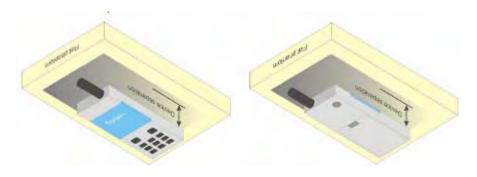


Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

## **Test Position – Body Configurations**

**Body Worn Position** 

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.5 cm or holster surface and the flat phantom to 0 cm.



# **EXPOSURE LIMIT**

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

## **Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

## **Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1 Human Exposure Limits** 

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Brain	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>&</sup>lt;sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. <sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>&</sup>lt;sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Reference No.: WTS16S173763E Page 16 of 75

# 7 SYSTEM AND LIQUID VALIDATION

## **System Validation**

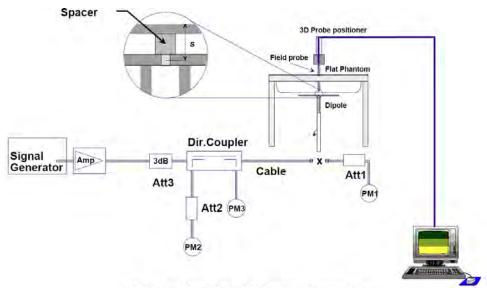


Fig 8.1 System Setup for System Evaluation

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

- 1. Signal Generator
- 2. Amplifier
- 3. Directional Coupler
- 4. Power Meter
- 5. Calibrated Dipole

The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.

# Numerical reference SAR values (W/kg) for reference dipole and flat phantom

Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) <sup>a</sup>
300	3.0	2.0	4.4	2.1
450	4.9	3.3	7.2	3.2
835	9.5	6.2	4.1	4.9
900	10.8	6.9	16.4	5.4
1450	29.0	16.0	50.2	6.5
1800	38.1	19.8	69.5	6.8
1900	39.7	20.5	72.1	6.6
2000	41.1	21.1	74.6	6.5
2450	52.4	24.0	104.2	7.7
3000	63.8	25.7	140.2	9.5

Table 1: system validation (1g)

Measurement Date	Frequency (MHz)	Liquid Type (head/body)	Target SAR1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR1g (W/kg)	Deviation (%)
May 05,2016	835	head	9.53	0.0971	9.71	1.9
May 05,2016	835	body	9.44	0.0938	9.38	-0.6
May 05,2016	1900	head	39.37	0.3992	39.92	1.4
May 05,2016	1900	body	38.58	0.3912	39.12	1.4

Note: system check input power: 10mW

## **Liquid Validation**

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

## **KDB 865664 recommended Tissue Dielectric Parameters**

The head and body tissue parameters given in this below table should be used to measure the SAR of transmitters operating in 100 MHz to 6 GHz frequency range. The tissue dielectric parameters of the tissue medium at the test frequency should be within the tolerance required in this document. The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

The head tissue dielectric parameters recommended by IEEE Std 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in 1528.

Target Frequency	Head Tissue		Body	Tissue
MHz	εr	O' (S/m)	εr	O' (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

## <u>Tissue Dielectric Parameters for Head and Body Phantoms</u>

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

**Table 2: Recommended Dielectric Performance of Tissue** 

Recommended Dielectric Performance of Tissue					
Ingredients					
(% by weight )	83	5	19	00	
Tissue Type	Head	Body	Head	Body	
Water	41.46	52.4	54.9	40.4	
Salt (Nacl)	1.45	1.4	0.18	0.5	
Sugar	56.0	45.0	0.0	58.0	
HEC	1.0	1.0	0.0	1.0	
Bactericide	0.1	0.1	0.0	0.1	
Triton x-100	0.0	0.0	0.0	0.0	
DGBE	0.0	0.0	44.92	0.0	
Dielectric Constant	42.54	56.1	39.9	54.0	
Conductivity (s/m)	0.91	1 0.95	1.42	1.45	

Reference No.: WTS16S173763E

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 21°C , Relative humidity: 57%						
Frequency(MHz) Measured Date Description			Dielectric Parameters			
1 requericy(wiriz)	Measured Date	Description	εr	σ(s/m)		
835	May 05,2016	Target Value ±5% window	41.50 39.43 — 43.58	0.90 0.855 — 0.945		
		Measurement Value	41.67	0.91		
1900	May 05,2016	Target Value ±5% window	40.00 38.00 — 42.00	1.40 1.33 — 1.47		
1000		Measurement Value	40.28	1.42		

Table 4: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 21°C , Relative humidity: 57%							
Frequency(MHz) Measured Date Description Dielectric Parameter							
1 requericy(Wiriz)	Measured Date	Description	εr	σ(s/m)			
835	May 05,2016	Target Value ±5% window	55.2 52.25 — 57.75	0.97 0.922 — 1.018			
300	, 55,25	Measurement Value	55.61	0.98			
1900	May 05,2016	Target Value ±5% window	53.30 50.64 — 55.97	1.52 1.44 — 1.60			
		Measurement Value	53.44	1.51			

# System Verification Plots Product Description: Dipole Model: SID835

Test Date: May 05,2016

Medium(liquid type)	HSL_835
Frequency (MHz)	835.000000
Relative permittivity (real part)	41.67
Conductivity (S/m)	0.91
Input power	10mW
E-Field Probe	SN 07/15 EP246
Duty cycle	1:1
Conversion Factor	4.66
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.72
SAR 10g (W/Kg)	0.064018
SAR 1g (W/Kg)	0.097125
SURFACE SAR	VOLUME SAR
0 000000 90 - 0 000000 00 - 0 00000 00 00 00 00 00	0 009442 0 0094

Reference No.: WTS16S173763E

**Product Description: Dipole** 

Model: SID835 Test Date: May 05,2016

Medium(liquid type)	MSL_835
Frequency (MHz)	835.000000
Relative permittivity (real part)	55.61
Conductivity (S/m)	0.98
Input power	10mW
E-Field Probe	SN 07/15 EP246
Duty cycle	1:1
Conversion Factor	4.80
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.27
SAR 10g (W/Kg)	0.062044
SAR 1g (W/Kg)	0.093849
SURFACE SAR	VOLUME SAR
0 000213 0 000203 0 000000 0 00000 0 00000 0 000000 0 00000 0 00000 0 00000 0 00000 0 000000 0 00000 0 00000 0 00000 0 00000 0 00000 0 00000 0 000	2 0 0 0 0 1 1

Product Description: Dipole Model: SID1900

**Test Date: May 05,2016** 

Medium(liquid type)	HSL_1900
Frequency (MHz)	1900.000
Relative permittivity (real part)	40.28
Conductivity (S/m)	1.42
Input power	10mW
E-Field Probe	SN 07/15 EP246
Duty cycle	1:1
Conversion Factor	4.45
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.24
SAR 10g (W/Kg)	0.210583
SAR 1g (W/Kg)	0.399210
SURFACE SAR	VOLUME SAR
Calum Scale	Colors Scale  Over
20 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	0 (1950) 0 (

Reference No.: WTS16S173763E

Product Description: Dipole Model: SID1900 Test Date: May 05,2016

Medium(liquid type)	MSL_1900
Frequency (MHz)	1900.000
Relative permittivity (real part)	53.44
Conductivity (S/m)	1.51
Input power	10mW
E-Field Probe	SN 07/15 EP246
Duty cycle	1:1
Conversion Factor	4.57
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.52
SAR 10g (W/Kg)	0.203320
SAR 1g (W/Kg)	0.391205
SURFACE SAR	VOLUME SAR
20 Visitativa inglasi interior  Sirian interior limits - Lee 1994	206 Visualization Studies Laterface  Volume Laterface Internative Zeon Int Date
1	0 42100 0 354100 0 354100 0 31000 0 31000 0 31000 0 17000 0 17000 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

Reference No.: WTS16S173763E Page 25 of 75

# **8 TYPE A MEASUREMENT UNCERTAINTY**

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below:

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor <sup>(a)</sup>	1/K <sup>(b)</sup>	1 / √3	1 / √6	1 / √2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sumby taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:

UNCERTAINTY F	OR S	YST	EM F	PERF	ORMA	ANCE	CHEC	K
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	ci (1 g)	ci (10 g)	1 g ui (± %)	10 g ui (± %)	vi
Measurement System								
Probe Calibration	5,8	N	1	1	1	5,8	5,8	∞
Axial Isotropy	3,5	R	√3	(1- cp)1/2	(1- cp)1/2	1,42887	1,42887	∞
Hemispherical Isotropy	5,9	R	√3	√Ср	√Ср	2,40866	2,40866	∞
Boundary Effect	1	R	√3	1	1	0,57735	0,57735	∞
Linearity	4,7	R	√3	1	1	2,71355	2,71355	∞
System Detection Limits	1	R	√3	1	1	0,57735	0,57735	∞
Readout Electronics	0,5	N	1	1	1	0,5	0,5	∞
Response Time	0	R	√3	1	1	0	0	8
Integration Time	1,4	R	√3	1	1	0,80829	0,80829	8
RF Ambient Conditions	3	R	√3	1	1	1,73205	1,73205	8
Probe Positioner Mechanical Tolerance	1,4	R	√3	1	1	0,80829	0,80829	∞
Probe Positioning with respect to Phantom Shell	1,4	R	√3	1	1	0,80829	0,80829	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	2,3	R	√3	1	1	1,32791	1,32791	∞
Dipole		•			•			
Dipole Axis to Liquid Distance	2	N	√3	1	1	1,1547	1,1547	N-1
Input Power and SAR drift measurement	5	R	√3	1	1	2,88675	2,88675	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	√3	1	1	2,3094	2,3094	∞
Liquid Conductivity - deviation from target values	5	R	√3	0,64	0,43	1,84752	1,2413	∞
Liquid Conductivity - measurement uncertainty	4	N	1	0,64	0,43	2,56	1,72	М
Liquid Permittivity - deviation from target values	5	R	√3	0,6	0,49	1,73205	1,41451	∞
Liquid Permittivity - measurement uncertainty	5	N	1	0,6	0,49	3	2,45	М
Combined Standard Uncertainty		RSS				9.6671	9.1646	
Expanded Uncertainty (95% CONFIDENCE INTERVAL)		k				19.3342	18.3292	

UNCERTAINTY EVALUATION FOR HANDSET SAR TEST									
	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> (1 g)	c <sub>i</sub> (10 g)	1 g u <sub>i</sub> (± %)	10 g u <sub>i</sub> (± %)		
Uncertainty Component						(± /0)	(± /0)	Vi	
Measurement System	<b>5</b> 0	N.	4	4	4	<b>5</b> 0	<b>5</b> 0		
Probe Calibration	5,8	N	1	1	1	5,8	5,8	8	
Axial Isotropy	3,5	R	√3	$(1-c_p)^{1/2}$		1,43	1,43	8	
Hemispherical Isotropy	5,9	R	√3	$\sqrt{C_p}$	√C <sub>p</sub>	2,41	2,41	8	
Boundary Effect	1	R	√3	1	1	0,58	0,58	8	
Linearity	4,7	R	√3	1	1	2,71	2,71	8	
System Detection Limits	1	R	√3	1	1	0,58	0,58	8	
Readout Electronics	0,5	N	1	1	1	0,50	0,50	8	
Response Time	0	R	√3	1	1	0,00	0,00	∞	
Integration Time	1,4	R	√3	1	1	0,81	0,81	∞	
RF Ambient Conditions	3	R	√3	1	1	1,73	1,73	8	
Probe Positioner Mechanical Tolerance	1,4	R	√3	1	1	0,81	0,81	8	
Probe Positioning with respect to Phantom Shell	1,4	R	√3	1	1	0,81	0,81	8	
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	2,3	R	√3	1	1	1,33	1,33	8	
Test sample Related									
Test Sample Positioning	2,6	N	1	1	1	2,60	2,60	N-1	
Device Holder Uncertainty	3	N	1	1	1	3,00	3,00	N-1	
Output Power Variation - SAR drift measurement	5	R	√3	1	1	2,89	2,89	8	
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (shape and thickness tolerances)	4	R	√3	1	1	2,31	2,31	8	
Liquid Conductivity - deviation from target values	5	R	√3	0,64	0,43	1,85	1,24	8	
Liquid Conductivity - measurement uncertainty	4	N	1	0,64	0,43	2,56	1,72	M	
Liquid Permittivity - deviation from target values	5	R	√3	0,6	0,49	1,73	1,41	8	
Liquid Permittivity - measurement uncertainty	5	N	1	0,6	0,49	3,00	2,45	М	
Combined Standard Uncertainty	_	RSS				10.39	9.92		
Expanded Uncertainty (95% CONFIDENCE INTERVAL)		k				20.78	19.84		

# 9 TEST INSTRUMENT

Name of Equipment	Manufacturer	Type/Mod el	Serial Number	Calibratio n Date	Calibration Due
6 AXIS ROBOT	KUKA	KR6 R900 SIXX	502635	N/A	N/A
SATIMO Test Software	MVG	OPENSAR	OPENSAR V_4_02_27	N/A	N/A
PHANTOM TABLE	MVG	N/A	SAR_1215_01	N/A	N/A
SAM PHANTOM	MVG	SAM118	SN 11/15 SAM118	N/A	N/A
MultiMeter	Keithley	MiltiMeter 2000	4073942	2016-03-16	2017-03-15
Data Acquisition Electronics	MVG	DAE4	915	2016-03-16	2017-03-15
S-Parameter Network Analyzer	Agilent	8753E	JP38160684	2016-04-02	2017-04-01
Universal Radio Communication Tester	ROHDE&SCH W ARZ	CMU200	112461	2016-03-23	2017-03-22
E-Field Probe	MVG	SSE5	SN 07/15 EP246	2016-03-16	2017-03-15
DIPOLE 835	MVG	SID835	SN 09/15 DIP 0G835-358	2016-03-16	2017-03-15
DIPOLE 1900	MVG	SID1900	SN 09/15 DIP 1G900-361	2016-03-16	2017-03-15
Limesar Dielectric Probe	MVG	SCLMP	SN 11/15 OCPG 69	2016-03-16	2017-03-15
Power Amplifier	BONN	BLWA 0830 -160/100/40D	128740	2015-09-14	2016-09-14
Signal Generator	R&S	SMB100A	105942	2015-09-14	2016-09-14
Power Meter	R&S	NRP2	102031	2015-09-14	2016-09-14

# **10 OUTPUT POWER VERIFICATION**

#### **Test Condition:**

Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The base station simulator was connected to the antenna terminal.

2 Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.

3 Environmental Conditions

Temperature 23°C
Relative Humidity 53%
Atmospheric Pressure 1019mbar

4 Test Date: May 05,2016 Tested By: Jeff Deng

#### **Test Procedures:**

#### Mobile Phone radio output power measurement

1. The transmitter output port was connected to base station emulator.

- 2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
- 3. Select lowest, middle, and highest channels for each band and different possible test mode.
- 4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

#### Other radio output power measurement

The output power was measured using power meter at low, mid, and hi channels.

#### **Source-based Time Averaged Burst Power Calculation:**

For TDMA, the following duty cycle factor was used to calculate the source-based time average power

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Duty cycle factor	-9.03 dB	-6.02 dB	-4.26 dB	-3.01 dB
Crest Factor	8	4	2.66	2

**Remark:** <u>Time slot duty cycle factor = 10 \* log (1 / Time Slot Duty Cycle)</u>

Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9.03 dB Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6.02 dB Source based time averaged power = Maximum burst averaged power (3 Uplink) - 4.26 dB Source based time averaged power = Maximum burst averaged power (4 Uplink) - 3.01 dB

## Reference No.: WTS16S173763E

### **Test Result:**

Burst Average Power (dBm);											
Band		GS	M850			PCS19	900				
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant			
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/			
GSM Voice	32.17	32.25	32.60	32±1	30.17	30.32	30.45	30±1			
GPRS Slot 1	31.21	31.18	31.52	32±1	30.04	30.5	30.46	30±1			
GPRS Slot 2	30.25	30.43	30.77	31±1	29.27	29.33	29.28	29±1			
GPRS Slot 3	28.3	28.49	28.32	29±1	28.32	27.31	27.25	27±1			
GPRS Slot 4	27.3	27.39	27.63	28±1	27.63	25.26	25.2	26±1			

Remark:

GPRS, CS1 coding scheme.

Multi-Slot 1, Support Max 4 downlink, 1 uplink, 5 working link

Multi-Slot 2, Support Max 4 downlink, 2 uplink, 5 working link

Multi-Slot 3, Support Max 4 downlink, 3 uplink, 5 working link

Multi-Slot 4, Support Max 4 downlink, 4 uplink, 5 working link

Source Based time Average Power (dBm)										
Band		G	SM850			P	CS1900			
Channel	128 190		251	Time 251 Average factor		661	810	Time Average factor		
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/		
GSM Voice	23.14	23.22	23.57	-9.03	21.14	21.29	21.42	-9.03		
GPRS Slot 1	22.18	22.15	22.49	-9.03	21.01	21.47	21.43	-9.03		
GPRS Slot 2	24.23	24.41	24.75	-6.02	23.25	23.31	23.26	-6.02		
GPRS Slot 3	24.04	24.23	24.06	-4.26	24.06	23.05	22.99	-4.26		
GPRS Slot 4	24.29	24.38	24.62	-3.01	24.62	22.25	22.19	-3.01		

#### Remark:


Time average factor = 1 uplink , 10\*log(1/8)=-9.03dB , 2 uplink , 10\*log(2/8)=-6.02dB , 3 uplink , 10\*log(3/8)=-4.26dB , 4 uplink , 10\*log(4/8)=-3.01dB

Source based time average power = Burst Average power + Time Average factor

Note: DUT was set in GPRS(4Tx slots) due to the Maximum source-base time average output power for body SAR.

# 11 EXPOSURE CONDITIONS CONSIDERATION

#### **EUT** antenna location:

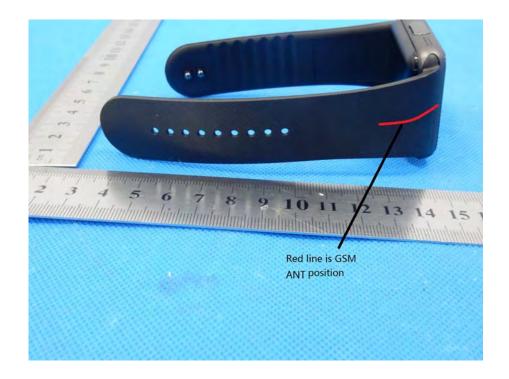

Reference No.: WTS16S173763E Page 32 of 75

# 12SAR TEST RESULTS

#### **Test Condition:**

1. SAR Measurement

The distance between the EUT and the antenna of the emulator is more than 50 cm and the output power radiated from the emulator antenna is at least 30 dB less than the output power of EUT.

2 Environmental Conditions Temperature 23°C

Relative Humidity 57%

Atmospheric Pressure 1019mbar

3 Test Date: May 05,2016

#### **Test Procedures:**

1. Establish communication link between EUT and base station emulation by air link.

- 2. Consider the SAR test reduction per FCC KDB guide line. For GSM/GPRS, set EUT into highest output power channel with test mode which has the maximum source-based time-averaged burst power listed in power table.
- 3. Place the EUT in the selected test position. (Cheek, tilt or flat)
- 4. Perform SAR testing at highest output power channel under the selected test mode. If the measured 1-g SAR is ≤ 0.8 W/kg, then testing for the other channel will not be performed.
- 5. When SAR is<0.8W/kg, no repeated SAR measurement is required

SAR measurement system will proceed the following basic steps:

- 1. Initial power reference measurement
- 2. Area Scan
- 3. Zoom Scan
- 4. Power drift measurement

# **SAR Summary Test Result:**

**Table 5: Near to Mouth SAR** 

	GSM850 — Head SAR Test (Gap: 10mm)																			
Plot		Test Position	Frequency		Frequency		Output	Rated	Scaling	SAR1g	Scaled									
	Mode		CH.	MHz	Power	Limit	Factor		SAR1g											
No.		Body	CH. WINZ	CII. IVINZ		Cn. IVINZ		CH. IVIHZ		CH. WITZ		CH. WINZ		CH. WINZ		(dBm)	(dBm)	Factor	(W/kg)	(W/kg)
1	GSM	Front side	251	848.8	32.60	33.00	1.0715	0.0717	0.08											
		GSM:	1900 – Hea	ad SAR Tes	t (Gap: 10n	nm)														
Plot		Test Position	Frequency		Frequency		Output	Rated	Cooling	CAD1~	Scaled									
	Mode		CII	NA11-	Power	Limit	Scaling	SAR1g	SAR1g											
No.		Body	CH.	MHz	(dBm)	(dBm)	Factor	(W/kg)	(W/kg)											
2	GSM	Front side	810	1909.8	30.45	30.00	0.90157	0.1298	0.12											

**Remark:** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position  $\leq$  0.8 W/kg other channels SAR tests are not necessary.

**Table 6: Wrist-worn SAR** 

GSM850 – Body SAR Test (Gap: 0mm)									
Plot		Test Position	Frequency		Output	Rated	Scaling	SAR <sub>10g</sub>	Scaled
No.	Mode	Body	CH.	MHz	Power	Limit	Factor	(W/kg)	SAR <sub>10g</sub>
NO.		body	CII.	141112	(dBm)	(dBm)	i actor	(vv/kg)	(W/kg)
3	GPRS_2TX	Back side	251	824.2	30.25	31.00	1.1885	1.4376	1.71
4	GPRS_2TX	Back side	128	824.6	30.43	31.00	1.1402	2.7172	3.10
5	GPRS_2TX	Back side	190	848.8	30.77	31.00	1.0543	2.2245	2.35
GSM1900 – Body SAR Test (Gap: 0mm)									
Plot		Tost Dosition	Freq	uency	Output	Rated	Caalina	CAD	Scaled
	Mode	Test Position Body	CH.	MHz	Power	Limit	Scaling	SAR <sub>10g</sub>	SAR <sub>10g</sub>
No.					(dBm)	(dBm)	Factor	(W/kg)	(W/kg)
6	GPRS_3TX	Back side	810	1909.8	27.25	28.00	1.18852	0.2728	0.32

**Remark:** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position  $\leq$  0.8 W/kg other channels SAR tests are not necessary.

# 13 SAR MEASUREMENT REFERENCES

#### References

- 1. FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- 2. IEEE Std. C95.1-2005, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz", 2005
- 3. IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices:Measurement Techniques", June 2013
- 4. IEC 62209-2, "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices—Human models, instrumentation, and procedures Part 2: Procedure to determine the specific absorption rate(SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30MHz to 6GHz)", April 2010
- 5. FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 23<sup>th</sup>, 2015
- 6. FCC KDB 941225 D01 v03r01, "3G SAR Measurement Procedures", Oct 23th, 2015
- 7. FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 23<sup>th</sup>, 2015
- 8. FCC KDB865664 D01 v01r04, "SAR Measurement Requirements 100MHz to 6GHz", Aug 7<sup>th</sup>, 2015
- 9. FCC KDB865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations", Oct 23<sup>th</sup>, 2015
- 10.FCC KDB648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 23<sup>th</sup>", 2015
- 11.FCC KDB 248227 D01 v01r02, SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters, Oct 23<sup>th</sup>, 2015.

## **Maximum SAR measurement Plots**

Plot 1: Flat Plane with Front side(Near to Mouth) device	position on High Channel in GSM mode				
Medium(liquid type)	HSL_850				
Frequency (MHz)	848.800000				
Relative permittivity (real part)	41.67				
Conductivity (S/m)	0.91				
Signal	GSM (Duty cycle: 1:8)				
E-Field Probe	SN 07/15 EP246				
Conversion Factor	4.66				
Area Scan	dx=8mm dy=8mm				
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm				
Variation (%)	-0.64				
SAR 10g (W/Kg)	0.040359				
SAR 1g (W/Kg)	0.071684				
SURFACE SAR	VOLUME SAR				
SAR Vaualaston Graphical Interface	SAR Vaculation Graphical Interface				
Sustance   Rodeted Interesty   Zoom In/Out	Volume   Radisted Priently   Zoom In/Out				

Plot 2: Flat Plane with Front side(Near to Mouth) device position on High Channel in GSM mode

Medium(liquid type)	HSL_1900					
Frequency (MHz)	1909.800000					
Relative permittivity (real part)	40.28					
Conductivity (S/m)	1.42					
Signal	GSM (Duty cycle: 1:8)					
E-Field Probe	SN 07/15 EP246					
Conversion Factor	4.45					
Sensor-Surface	4mm					
Area Scan	dx=8mm dy=8mm					
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm					
Variation (%)	-0.23					
SAR 10g (W/Kg)	0.072654					
SAR 1g (W/Kg)	0.129765					
SURFACE SAR	VOLUME SAR					
SAR Vaualisation Graphical Interface	SAR Vaualisation Graphical Interface					
0 1892/56 120 120 120 120 120 120 120 120 120 120	119661 0 119681 0 005729 0 0001779 0 002294 0 005603 0 0041202 0 0033050 0 0041202 0 0033050 0 0041202 0 0033050 0 0017949 0 0017949 0 0017949 0 0010771 0 0000771 0 00000771 0 0000771 0 00000771 0 0000771 0 0000771 0 0000771 0 0000771 0 0000771 0 0000771 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0					

Plot 3: Right Head with Back side device position on High Channel in GSM mode

Medium(liquid type)	MSL_850
Frequency (MHz)	848.800000
Relative permittivity (real part)	55.61
Conductivity (S/m)	0.98
Signal	GPRS (Duty cycle: 1:4)
E-Field Probe	SN 07/15 EP246
Conversion Factor	4.80
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.27
SAR 10g (W/Kg)	1.437582
SAR 1g (W/Kg)	2.665237
SURFACE SAR	VOLUME SAR
(IV Italian Japo) talor	Int Venezar States Incom
7-49	10 10 10 10 10 10 10 10 10 10 10 10 10 1

Plot 4: Right Head with Back side device position on Low Channel in GSM mode

Medium(liquid type)	MSL_850				
Frequency (MHz)	824.200000				
Relative permittivity (real part)	55.61				
Conductivity (S/m)	0.98				
Signal	GPRS (Duty cycle: 1:4)				
E-Field Probe	SN 07/15 EP246				
Conversion Factor	4.80				
Sensor-Surface	4mm				
Area Scan	dx=8mm dy=8mm				
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm				
Variation (%)	1.23				
SAR 10g (W/Kg)	2.717238				
SAR 1g (W/Kg)	4.813926				
SURFACE SAR	VOLUME SAR				
	100 (100 (100 (100 (100 (100 (100 (100				
The state of the s					

Plot 5: Right Head with Back side device position on Middle Channel in GSM mode

Medium(liquid type)	MSL_850			
Frequency (MHz)	836.600000			
Relative permittivity (real part)	55.61			
Conductivity (S/m)	0.98			
Signal	GPRS (Duty cycle: 1:4)			
E-Field Probe	SN 07/15 EP246 4.80			
Conversion Factor				
Sensor-Surface	4mm			
Area Scan	dx=8mm dy=8mm			
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm			
Variation (%)	1.20			
SAR 10g (W/Kg)	2.224501			
SAR 1g (W/Kg)	4.128131			
SURFACE SAR	VOLUME SAR			
	TO As Grand To As a Line State			

Plot 6: Right Head with Back side device position on High Channel in GSM mode

Medium(liquid type)	MSL_1900
Frequency (MHz)	1909.800000
Relative permittivity (real part)	53.44
Conductivity (S/m)	1.51
Signal	GPRS (Duty cycle: 1:2.66)
E-Field Probe	SN 07/15 EP246
Conversion Factor	4.57
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.62
SAR 10g (W/Kg)	0.272831
SAR 1g (W/Kg)	0.489306
SURFACE SAR	VOLUME SAR
Control   Cont	Section   Sect

# 14 Calibration reports-Probe



# **COMOSAR E-Field Probe Calibration Report**

Ref: ACR.307.1.15.SATU.A

WALTEK SERVICES (SHENZHEN) CO., LTD 1/F., FUKANGTAI BUILDING, WEST BAIMA ROAD, SONGGANG STREET BAOAN DISTRICT, SHENZHEN GUANGDONG 518105, CHINA

MVG COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 07/15 EP249

Calibrated at MVG US 2105 Barrett Park Dr. - Kennesaw, GA 30144





Calibration Date: 10/19/2015

#### Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



Ref: ACR.307.1.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	11/3/2015	JES
Checked by:	Jérôme LUC	Product Manager	11/3/2015	JES
Approved by :	Kim RUTKOWSKI	Quality Manager	11/3/2015	him theathmental

	Customer Name
Distribution:	Waltek Services (Shenzhen) Co., Ltd

Issue	Date	Modifications
A	11/3/2015	Initial release
		1] [

Page: 2/9



Ref: ACR.307.1.15.SATU.A

### TABLE OF CONTENTS

1	De	vice Under Test4	
2	Pro	duct Description4	
	2.1	General Information	4
3	Me	asurement Method	
	3.1	Linearity	4
	3.2	Sensitivity	5
	3.3	Lower Detection Limit	5
	3.4	Isotropy	5
	3.5	Boundary Effect	5
4		asurement Uncertainty	
5	Cal	ibration Measurement Results	
	5.1	Sensitivity in air	6
	5.2	Linearity	7
	5.3	Sensitivity in liquid	7
	5.4	Isotropy	8
6	Lis	t of Equipment9	

Page: 3/9



Ref: ACR.307.1.15.SATU.A

#### 1 DEVICE UNDER TEST

Device Under Test				
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE			
Manufacturer	MVG			
Model	SSE5			
Serial Number	SN 07/15 EP249			
Product Condition (new / used)	New			
Frequency Range of Probe	0.7 GHz-3GHz			
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.178 MΩ			
	Dipole 2: R2=0.179 MΩ			
	Dipole 3: R3=0.167 MΩ			

A yearly calibration interval is recommended.

#### 2 PRODUCT DESCRIPTION

### 2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

### 3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

## 3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/9



Ref: ACR.307.1.15.SATU.A

#### 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

#### 3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

### 3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis  $(0^{\circ}-180^{\circ})$  in  $15^{\circ}$  increments. At each step the probe is rotated about its axis  $(0^{\circ}-360^{\circ})$ .

#### 3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

#### 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide						
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)	
Incident or forward power	3,00%	Rectangular	$\sqrt{3}$	1	1.732%	
Reflected power	3,00%	Rectangular	$-\sqrt{3}$	1	1.732%	
Liquid conductivity	5,00%	Rectangular	$-\sqrt{3}$	1	2.887%	
Liquid permittivity	4.00%	Rectangular	$-\sqrt{3}$	1	2.309%	
Field homogeneity	3.00%	Rectangular	$-\sqrt{3}$	ī	1.732%	
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%	

Page: 5/9



Ref: ACR.307.1.15.SATU.A

Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Combined standard uncertainty					5.831%
Expanded uncertainty 95 % confidence level k = 2					12.0%

### 5 CALIBRATION MEASUREMENT RESULTS

	Calibration Parameters	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	


## 5.1 <u>SENSITIVITY IN AIR</u>

Normx dipole		
$1 \left( \mu V/(V/m)^2 \right)$	$2 (\mu V/(V/m)^2)$	$3 (\mu V/(V/m)^2)$
6.81	6.65	6.62

DCP dipole 1	DCP dipole 2	DCP dipole 3
(mV)	(mV)	(mV)
95	91	91

Calibration curves ei=f(V) (i=1,2,3) allow to obtain H-field value using the formula:

$$E = \sqrt{{E_1}^2 + {E_2}^2 + {E_3}^2}$$

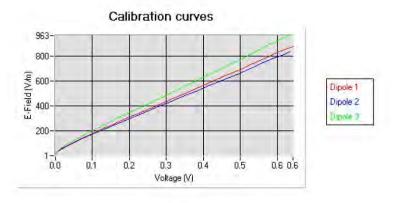


Page: 6/9



Ref: ACR.307.1.15.SATU.A

### 5.2 LINEARITY

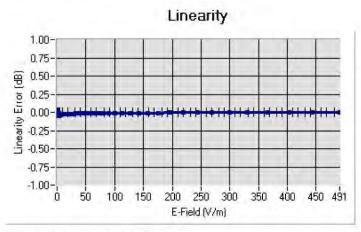

Linearity: II+/-1.21% (+/-0.05dB)

## 5.3 <u>SENSITIVITY IN LIQUID</u>

<u>Liquid</u>	Frequency (MHz +/- 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL750	750	42.24	0.90	4.97
BL750	750	56.85	0.99	5.11
HL850	835	43.02	0.90	5.26
BL850	835	53.72	0.98	5.46
HL900	900	42.47	0.99	5.03
BL900	900	56.97	1.09	5.22
HL1800	1800	42.24	1.40	4.23
BL1800	1800	53.53	1.53	4.37
HL1900	1900	40.79	1.42	4.95
BL1900	1900	54.47	1.57	5.05
HL2000	2000	40.52	1.44	4.44
BL2000	2000	54.18	1.56	4.57
HL2450	2450	38.73	1.81	4.32
BL2450	2450	53.23	1.96	4.49
HL2600	2600	38.54	1.95	4.26
BL2600	2600	52.07	2.23	4.40

LOWER DETECTION LIMIT: 8mW/kg

Page: 7/9




Ref: ACR.307.1.15.SATU.A

## 5.4 ISOTROPY


## HL900 MHz

- Axial isotropy: 0.04 dB - Hemispherical isotropy: 0.05 dB



### HL1800 MHz

- Axial isotropy: 0.04 dB - Hemispherical isotropy: 0.06 dB



Page: 8/9



Ref: ACR.307.1.15.SATU.A

## 6 LIST OF EQUIPMENT

Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016
Reference Probe	MVG	EP 94 SN 37/08	10/2015	10/2016
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.

Page: 9/9



## **SAR Reference Dipole Calibration Report**

Ref: ACR.92.3.15.SATU.A

# WALTEK SERVICES (SHENZHEN) CO., LTD 1/F., FUKANGTAI BUILDING, WEST BAIMA ROAD, SONGGANG STREET BAOAN DISTRICT, SHENZHEN GUANGDONG 518105, CHINA

## MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 835 MHZ

SERIAL NO.: SN 09/15 DIP 0G835-358

Calibrated at MVG US 2105 Barrett Park Dr. - Kennesaw, GA 30144





03/16/2015

#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



Ref: ACR.92.3.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	4/2/2015	JES
Checked by:	Jérôme LUC	Product Manager	4/2/2015	JES
Approved by :	Kim RUTKOWSKI	Quality Manager	4/2/2015	Kim Buthman (1)

	Customer Name
Distribution:	Waltek Services (Shenzhen) Co., Ltd

Issue	Date	Modifications
A	4/2/2015	Initial release
- 1		

Page: 2/12



Ref: ACR.92.3.15.SATU.A

## TABLE OF CONTENTS

1	Inti	oduction4	
2	De	vice Under Test4	
3	Pro	duct Description	
	3.1	General Information	4
4	Me	asurement Method	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty	
	5.1	Return Loss	5
	5.2	Dimension Measurement	5
	5.3	Validation Measurement	5
6	Cal	ibration Measurement Results	
	6.1	Return Loss and Impedance In Head Liquid	6
	6.2	Return Loss and Impedance In Body Liquid	6
	6.3	Mechanical Dimensions	7
7	Val	idation measurement	
	7.1	Head Liquid Measurement	7
	7.2	SAR Measurement Result With Head Liquid	8
	7.3	Body Liquid Measurement	9
	7.4	SAR Measurement Result With Body Liquid	10
8	Lis	of Equipment 12	

Page: 3/12



Ref: ACR.92.3.15.SATU.A

#### 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

#### 2 DEVICE UNDER TEST

<b>Device Under Test</b>		
Device Type	COMOSAR 835 MHz REFERENCE DIPOLE	
Manufacturer	MVG	
Model	SID835	
Serial Number	SN 09/15 DIP 0G835-358	
Product Condition (new / used)	New	

A yearly calibration interval is recommended.

#### 3 PRODUCT DESCRIPTION

## 3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/12



Ref: ACR.92.3.15.SATU.A

#### 4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

## 4.1 <u>RETURN LOSS REQUIREMENTS</u>

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

#### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

## 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

#### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

#### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Page: 5/12




Ref: ACR.92.3.15.SATU.A

Scan Volume	Expanded Uncertainty
1 g	20.3 %
10 g	20.1 %


## 6 CALIBRATION MEASUREMENT RESULTS

## 6.1 <u>RETURN LOSS AND IMPEDANCE IN HEAD LIQUID</u>

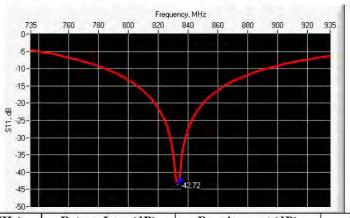

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-42.72	-20	$50.7 \Omega + 0.3 j\Omega$

## 6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

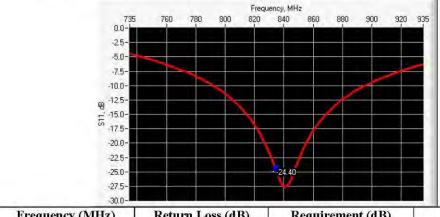

	Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
- [	835	-24.40	-20	$45.3 \Omega + 3.7 i\Omega$

Page: 6/12



Ref: ACR.92.3.15.SATU.A

#### 6.3 MECHANICAL DIMENSIONS

Frequency MHz	L'n	nm	h mm		d r	nm
	required	measured	required	measured	required	measured
300	420.0 ±1 %.		250.0 ±1 %.		6.35 ±1 %.	
450	290.0 ±1 %.		166.7 ±1 %,		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.	PASS	89.8 ±1 %.	PASS	3.6 ±1 %.	PASS
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %,		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3,6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7±1 %.		26.4 ±1 %.		3.6 ±1 %.	

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

## 7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative per	mittivity (ε <sub>r</sub> ')	Conductiv	ity (σ) S/m
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	++-
450	43.5 ±5 %		0.87 ±5 %	

Page: 7/12



Ref: ACR.92.3.15.SATU.A

750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %	PASS	0.90 ±5 %	PASS
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	
1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1,49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	-

## 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps': 42.1 sigma: 0.92
Distance between dipole center and liquid	15,0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


Frequency MHz	1 g SAR (W/kg/W)		10 g SAR	(W/kg/W)
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49	1	5.55	


Page: 8/12



Ref: ACR.92.3.15.SATU.A

835	9.56	9.53 (0.95)	6.22	6.20 (0.62)
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	
1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	





## 7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative per	mittivity (ε <sub>r</sub> ')	Conductiv	ity (σ) S/m
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %	PASS	0.97 ±5 %	PASS
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	

Page: 9/12



Ref: ACR.92.3.15.SATU.A


0 8 3 3	The second of	The state of the s
1450	54.0 ±5 %	1.30 ±5 %
1610	53.8 ±5 %	1.40 ±5 %
1800	53.3 ±5 %	1.52 ±5 %
1900	53.3 ±5 %	1.52 ±5 %
2000	53.3 ±5 %	1,52 ±5 %
2100	53.2 ±5 %	1.62 ±5 %
2450	52.7 ±5 %	1.95 ±5 %
2600	52.5 ±5 %	2.16 ±5 %
3000	52.0 ±5 %	2.73 ±5 %
3500	51.3 ±5 %	3.31 ±5 %
5200	49.0 ±10 %	5.30 ±10 %
5300	48.9 ±10 %	5.42 ±10 %
5400	48.7 ±10 %	5.53 ±10 %
5500	48.6 ±10 %	5.65 ±10 %
5600	48.5 ±10 %	5.77 ±10 %
5800	48.2 ±10 %	6.00 ±10 %

## 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4		
Phantom	SN 20/09 SAM71		
Probe	SN 18/11 EPG122		
Liquid	Body Liquid Values: eps': 53.8 sigma: 0.98		
Distance between dipole center and liquid	15.0 mm		
Area scan resolution	dx=8mm/dy=8mm		
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm		
Frequency	835 MHz		
Input power	20 dBm		
Liquid Temperature	21 °C		
Lab Temperature	21 °C		
Lab Humidity	45 %		

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
835	9.44 (0.94)	6.25 (0.62)

Page: 10/12

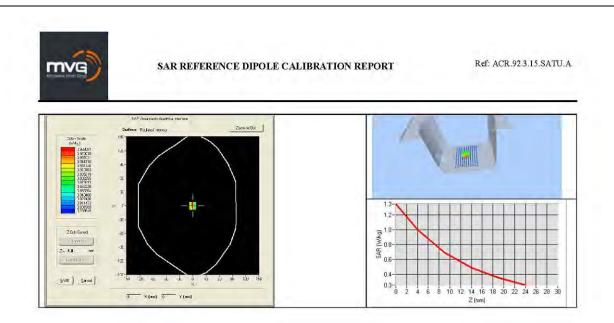

Page: 11/12



Ref: ACR.92.3.15.SATU.A

## 8 LIST OF EQUIPMENT

Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date	
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.	
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016	
Calipers	Carrera	CALIPER-01	12/2013	12/2016	
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015	
Multimeter	Keithley 2000	1188656	12/2013	12/2016	
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Power Meter	HP E4418A	US38261498	12/2013	12/2016	
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015	

Page: 12/12



# **SAR Reference Dipole Calibration Report**

Ref: ACR.92.6.15.SATU.A

# WALTEK SERVICES (SHENZHEN) CO., LTD 1/F., FUKANGTAI BUILDING, WEST BAIMA ROAD, SONGGANG STREET BAOAN DISTRICT, SHENZHEN GUANGDONG 518105, CHINA

## MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 1900 MHZ SERIAL NO.: SN 09/15 DIP 1G900-361

Calibrated at MVG US 2105 Barrett Park Dr. - Kennesaw, GA 30144





03/16/2015

### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



Ref: ACR.92.6.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	4/2/2015	JES
Checked by:	Jérôme LUC	Product Manager	4/2/2015	JES
Approved by :	Kim RUTKOWSKI	Quality Manager	4/2/2015	Kim Buthman (1)

	Customer Name
Distribution:	Waltek Services (Shenzhen) Co., Ltd

Issue	Date	Modifications
A	4/2/2015	Initial release
- 1		

Page: 2/12



Ref: ACR.92.6.15.SATU.A

### TABLE OF CONTENTS

1	Inti	oduction4	
2	De	vice Under Test4	
3	Pro	duct Description4	
	3.1	General Information	4
4	Me	asurement Method	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Me	asurement Uncertainty5	
	5.1	Return Loss	5
	5.2	Dimension Measurement	5
	5.3	Validation Measurement	5
6	Cal	ibration Measurement Results6	
	6.1	Return Loss and Impedance In Head Liquid	6
	6.2	Return Loss and Impedance In Body Liquid	6
	6.3	Mechanical Dimensions	7
7	Val	idation measurement	
	7.1	Head Liquid Measurement	7
	7.2	SAR Measurement Result With Head Liquid	8
	7.3	Body Liquid Measurement	9
	7.4	SAR Measurement Result With Body Liquid	10
8	Lis	t of Equipment	

Page: 3/12



Ref: ACR.92.6.15.SATU.A

#### 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

#### 2 DEVICE UNDER TEST

Device Under Test				
Device Type	COMOSAR 1900 MHz REFERENCE DIPOLE			
Manufacturer	MVG			
Model	SID1900			
Serial Number	SN 09/15 DIP 1G900-361			
Product Condition (new / used)	New			

A yearly calibration interval is recommended.

#### 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/12



Ref: ACR.92.6.15.SATU.A.

#### 4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

## 4.1 <u>RETURN LOSS REQUIREMENTS</u>

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

#### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

## 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

#### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

#### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Page: 5/12




Ref: ACR.92.6.15.SATU.A

Scan Volume	Expanded Uncertainty
1 g	20.3 %
10 g	20.1 %

### 6 CALIBRATION MEASUREMENT RESULTS


## 6.1 <u>RETURN LOSS AND IMPEDANCE IN HEAD LIQUID</u>

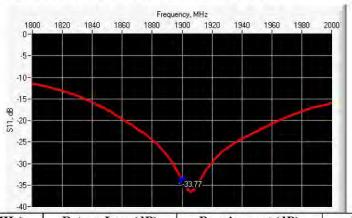

 Frequency (MHz)
 Return Loss (dB)
 Requirement (dB)
 Impedance

 1900
 -33.77
 -20
 49.9 Ω - 2.0 jΩ

#### 6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

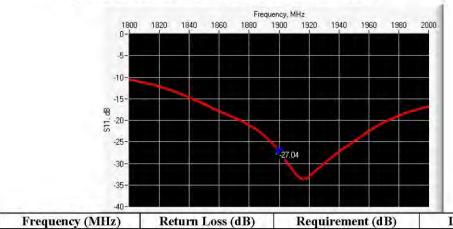

Frequency (MHz)Return Loss (dB)Requirement (dB)Impedance1900-27.04-20 $45.8 \Omega - 1.5 j\Omega$ 

Page: 6/12



Ref: ACR.92.6.15.SATU.A

#### 6.3 MECHANICAL DIMENSIONS

Frequency MHz	Ln	nm	h m	im	d r	nm
	required	measured	required	measured	required	measured
300	420.0 ±1 %.		250.0 ±1 %.		6.35 ±1 %.	
450	290.0 ±1 %,		166.7 ±1 %,		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %,		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3,6 ±1 %.	L
1900	68.0 ±1 %.	PASS	39.5 ±1 %.	PASS	3.6 ±1 %.	PASS
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55,5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34,7±1 %.		26.4 ±1 %.		3.6 ±1 %.	

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

## 7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε <sub>r</sub> ')		Conductiv	ity (σ) S/m
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	++-
450	43.5 ±5 %		0.87 ±5 %	

Page: 7/12



Ref: ACR.92.6.15.SATU.A

750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	
1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %	PASS	1.40 ±5 %	PASS
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1,49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

## 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4	
Phantom	SN 20/09 SAM71	
Probe	SN 18/11 EPG122	
Liquid	Head Liquid Values: eps': 40.9 sigma: 1.43	
Distance between dipole center and liquid	10.0 mm	
Area scan resolution	dx=8mm/dy=8mm	
Zoon Scan Resolution dx=8mm/dy=8m/dz=5mm		
Frequency	1900 MHz	
Input power	20 dBm	
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	


Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49	1	5.55	


Page: 8/12



Ref: ACR.92.6.15.SATU.A

835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	
1900	39.7	39.37 (3.94)	20.5	20.51 (2.05
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	





## 7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (&r')		Conductivity (a) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %	1	0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	-

Page: 9/12



Ref: ACR.92.6.15.SATU.A


1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %	PASS	1.52 ±5 %	PASS
2000	53.3 ±5 %		1,52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1,95 ±5 %	
2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

## 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4		
Phantom	SN 20/09 SAM71		
Probe	SN 18/11 EPG122		
Liquid	Body Liquid Values: eps': 53.9 sigma: 1.55		
Distance between dipole center and liquid	10.0 mm		
Area scan resolution	dx=8mm/dy=8mm		
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm		
Frequency 1900 MHz			
Input power	20 dBm		
Liquid Temperature	21 °C		
Lab Temperature	21 °C		
Lab Humidity	45 %		

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)	
	measured	measured	
1900	38.58 (3.86)	20.37 (2.04)	

Page: 10/12

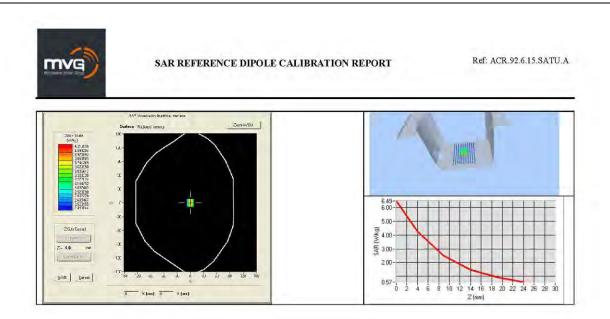

Page: 11/12




Ref: ACR.92.6.15.SATU.A

### 8 LIST OF EQUIPMENT

Equipment	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration	
Description				Date	
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No ca required.	
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No ca required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2013	02/2016	
Calipers	Carrera	CALIPER-01	12/2013	12/2016	
Reference Probe	MVG	EPG122 SN 18/11	10/2014	10/2015	
Multimeter	Keithley 2000	1188656	12/2013	12/2016	
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Power Meter	HP E4418A	US38261498	12/2013	12/2016	
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Temperature and Humidity Sensor	Control Company	11-661-9	8/2012	8/2015	


Page: 12/12

# 15 **SAR System Photos**

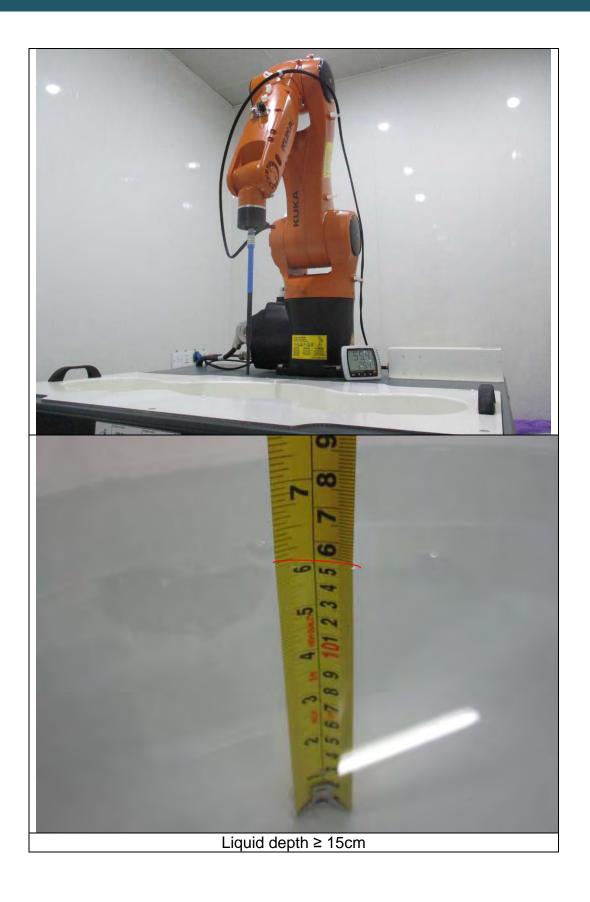


# 16 Setup Photos

Near to Mouth-Front side

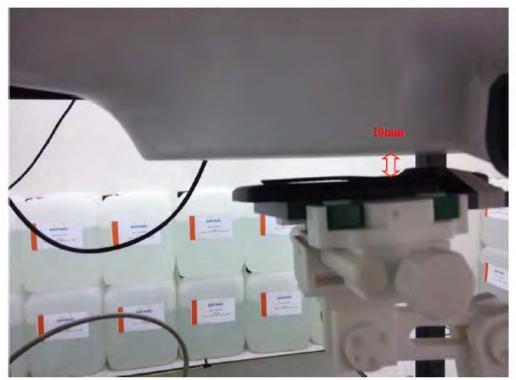

Wrist-worn-Back side

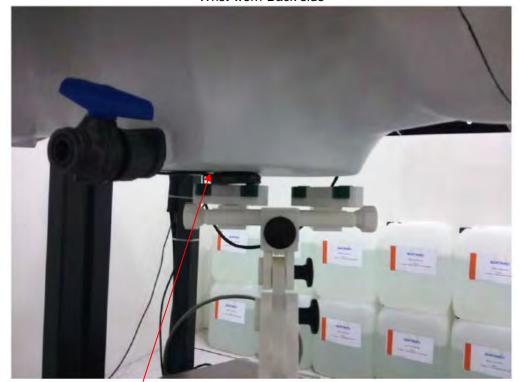

The gap between the watch and strap is less than 1.5mm.

===END===