





BUREAU  
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

# Test Report

Report No	ER2499-4
Client	Harman International Industries, Inc. Mark Bowman
Address	30001 Cabot Drive Novi, MI 48377
Phone	248-254-7751
Items tested	G31 BASE+
FCC ID	2AHPN-BE2832
IC	6434C-BE2832
FRN	0026894154
Equipment Type	Part 15 Spread Spectrum Transmitter
Equipment Code	DSS
FCC/IC Rule Parts	CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2
Test Dates	September 22 - October 17, 2017
Results	As detailed within this report
Prepared by	 Zachary Johnson – Test Engineer
Authorized by	 Yunus Faziloglu – Sr. EMC Engineer
Issue Date	<u>10/26/2017</u>
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 16 of this report.

## Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation .....	5
Statement of Conformity.....	6
Test Results .....	7
Radiated Spurious Emissions .....	7
AC Line Conducted Emissions .....	14
Measurement Uncertainty.....	15
Conditions Of Testing .....	16
Appendix A:.....	18

Report REV Sep-08-2017 - YF



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 2 of 41

## **Summary**

This test report supports an application for certification of a transmitter operating pursuant to:  
CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2

The product is the G31 BASE+. It is a frequency hopping spread spectrum transmitter that operates in the 2402 – 2483.5MHz frequency range. This report covers the Bluetooth portion of the device.

Antenna Type: Switching PCB trace antenna

Gain: Maximum 1.18dBi in 2.4GHz - 2.5GHz range

We found that the product met the above requirements without modification.

Test samples were received in good condition.



---

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 3 of 41

## **Test Methodology**

All testing was performed according to the following rules/procedures/documents; CFR 47 Part 15.247, RSS-247 Issue 2, RSS-Gen Issue 4 and ANSI C63.10-2013.

Radiated emissions were maximized by measuring the device in normal operating position, as well as varying the test antenna's height and polarity.

EUT operating voltage is 11-16V DC

The following bandwidths were used during radiated spurious and AC line conducted emissions testing.

<b>Frequency</b>	<b>RBW</b>	<b>VBW</b>
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz



**Product Tested - Configuration Documentation**

EUT Configuration										
Work Order:	R2499									
Company:	Harman International Industries, Incorporated									
Company Address:	30001 Cabot Drive									
	Novi, MI, 48377									
Contact:	Mark Bowman									
EUT:	MN	G31 BASE+			PN	--			SN	--
EUT Description:	Car Stereo System									
EUT Components	MN							SN		
Back up camera	--							--		
FM/AM antenna	--							--		
Support Equipment	MN							SN		
13.5Vdc Power Supply	--							--		
CS Supplied Laptop.	--							--		
USB to Ethernet Converter	--							--		
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrites	length (m)	in/out	under test	comment
DC main	Power DC	2	2	Power DC	No	No	1.2	in	yes	
Audio		1	1		Yes	No	1.2	in	yes	
USB	USB	3	1	USB	Yes	No	1	in	yes	
Dab/XM Radio		1	1	Coaxial	Yes	No	1.2	in	yes	
FM/AM antenna	-	1	1	-	Yes	No	0.4	in	yes	
Back up camera	-	1	1	-	Yes	No	0.3	in	yes	
Next Gen port	-	1	0	-				in	no	
<b>Software Operating Mode Description:</b>										
EUT will be operating in a test mode for Immunity tests, RX for non intentional REMI, and Constant TX internal mode for Spurious.										
<b>Performance Criteria:</b>										
EUT will connect to CMW and preform less than 10% PER during test.BT- EUT will connect to tablet or CMW over bluetooth and stay connected at appropriate distance.										



**Statement of Conformity**

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	4		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	EUT employs single switching PCB trace antenna with maximum 1.18dBi gain.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	N/A. Unit is powered by a vehicle battery only.

Refer to Appendix A of this report for antenna port conducted measurements.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

page 6 of 41



## Test Results

### Radiated Spurious Emissions

#### LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

[15.247(d)]

Device was measured in normal operating position.

### MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company			Work Order - R2499					
Radiated Emissions Electric Field 3m Distance			EUT Power Input - 13.8V DC					
30-1000MHz Vertical Data			Test Site - CH1					
Operator: CCH®			Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar					
Bluetooth mode								
Frequency	Raw QP Reading	Correction Factor	Adjusted QP	Lim1: FCC_pt15	Margin to Lim1	Test Results	Worst Margin	Margin Lim1
			Amplitude	_109_Cla ss_B		Lim1		
MHz	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	
477.661	28.3	-9	19.4	46	-26.6	PASS	-26.6	
477.694	26.6	-9	17.6	46	-28.4	PASS		
477.661	28.3	-9	19.4	46	-26.6	PASS	-26.6	
479.576	24.6	-8.9	15.7	46	-30.3	PASS		
482.565	26.9	-8.9	18	46	-28	PASS		
720.624	24.7	-5.8	19	46	-27.1	PASS		
959.315	22.2	-2.9	19.3	46	-26.8	PASS		



Curtis Straus - a Bureau Veritas Company				Work Order - R2499			
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC			
30-1000MHz Horizontal Data				Test Site - CH1			
Operator: CCH®				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar			
Bluetooth mode							
Frequency	Raw QP Reading	Correction Factor	Adjusted QP Amplitude	Lim1: FCC_pt15_109_Cla ss_B	Margin to Lim1	Test Results Lim1	Worst Margin Lim1
MHz	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)
165.7	23.8	-17.2	6.6	43.5	-36.9	PASS	
166.466	25	-17.2	7.8	43.5	-35.7	PASS	
478.394	26	-8.9	17.1	46	-29	PASS	
480.492	22.9	-8.9	14	46	-32.1	PASS	
719.912	23	-5.8	17.3	46	-28.7	PASS	
959.997	24.4	-2.9	21.5	46	-24.6	PASS	-24.6

## 30-1000MHz Mid Channel

Curtis Straus - a Bureau Veritas Company				Work Order - R2499			
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC			
1-6GHz Vertical Data				Test Site - CH1			
Operator: CCH®				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar			
Bluetooth mode							
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_Cla ssB_Peak	Peak Results	Worst Peak Margin
MHz	(dB $\mu$ V)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)
1437.3	34.3	24.6	5.6	39.8	74	-34.1	PASS
1597.3	35.3	25.3	5.1	40.4	74	-33.6	PASS
5752.3	33.8	24.9	15.9	49.7	74	-24.3	PASS
						-24.3	
						40.8	
						54	
						-13.2	
						-13.2	
						217	281
						(cm)	(degrees)
						125	305
						175	160



Curtis Straus - a Bureau Veritas Company				Work Order - R2499										
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC										
1-6GHz Horizontal Data				Test Site - CH1										
Operator: CCH@				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar										
Bluetooth mode														
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak	Pk Lim: FCC_pt15			Worst	Adjusted Avg	Av Lim: FCC_pt15				
				Amplitud	109_Cla	Peak Margin	Peak Results	Peak Margin	Amplitud	109_Cla	Avg Margin	Avg Results		

## 1-6GHz Low Channel

Curtis Straus - a Bureau Veritas Company			Work Order - R2499																		
Radiated Emissions Electric Field 3m Distance			EUT Power Input - 13.8V DC																		
1-6GHz Vertical Data			Test Site - CH1																		
Operator: CCH2			Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar																		
Bluetooth mode																					
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109_ClassB_AVG	Avg Margin	Worst Avg Results	Antenna Height	EUT Azimuth							
				dB $\mu$ V	dB $\mu$ V				dB $\mu$ V	dB $\mu$ V											
MHz																					
1437.3													125								
1597.3													175								
5752.3													160								

Curtis Straus - a Bureau Veritas Company				Work Order - R2499													
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC													
1-6GHz Horizontal Data				Test Site - CH1													
Operator: CCH2				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar													
Bluetooth mode																	
Frequency	Raw Peak Reading			Raw Avg Reading			Correctio n Factor			Adjusted Peak Amplitud e			Pk Lim: FCC_pt15				
	109_Cla ssB_Peak	Peak Margin	Peak Results	109_Cla ssB_Avg	Avg Margin	Avg Results	109_Cla ssB_Avg	Avg Margin	Avg Results	109_Cla ssB_Avg	Avg Margin	Avg Results	Worst Average Margin	Antenna Height	EUT Azimuth		
MHz	(dB $\mu$ V)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(Pass/Fail)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
1437.8	33.6	24.3	5.6	39.2	74	-34.8	PASS			29.9	54	-24.1	PASS		275	0	
5676.1	34.8	25.2	15.8	50.6	74	-23.4	PASS		-23.4	41	54	-13	PASS	-13	206	13	

### 1-6GHz Mid Channel

Curtis Straus - a Bureau Veritas Company				Work Order - R2499											
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC											
1-6GHz Vertical Data				Test Site - CH1											
Operator: CCH				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar											
Bluetooth mode															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_Cla ssB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: Cispr_Cla ssB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
MHz	(dB $\mu$ V)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
1595.3	37	27.2	5.1	42.1	74	-31.9	PASS		32.4	50	-17.6	PASS		178	69
5995.4	34.3	25.4	16.2	50.5	74	-23.5	PASS	-23.5	41.6	54	-12.4	PASS	-12.4	184	125

Curtis Straus - a Bureau Veritas Company				Work Order - R2499											
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC											
1-6GHz Horizontal Data				Test Site - CH1											
Operator: CCH				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar											
Bluetooth mode															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_Cla ssB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: Cispr_Cla ssB_AVG	Avg Margin	Avg Results	Worst Average Margin	Antenna Height	EUT Azimuth
MHz	(dB $\mu$ V)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
1440.9	37.2	24.4	5.5	42.7	74	-31.3	PASS		30	50	-20	PASS		125	0
1595.8	34	24.8	5.1	39.1	74	-34.9	PASS		30	50	-20	PASS		217	313
5746.4	35.2	24.9	15.9	51.1	74	-22.9	PASS	-22.9	40.8	54	-13.2	PASS	-13.2	213	260

### 1-6GHz High Channel

Curtis Straus - a Bureau Veritas Company				Work Order - R2499											
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 13.8V DC											
6-18GHz Vertical Data				Test Site - CH1											
Operator: CCH				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar											
Bluetooth mode															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109_Cla ssB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109_Cla ssB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
MHz	(dB $\mu$ V)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
14112.6	27.3	17.2	29.9	57.2	83.5	-26.3	PASS		47.1	63.5	-16.4	PASS		171	121
16969.1	27.3	17.7	31.5	58.7	83.5	-24.8	PASS		49.1	63.5	-14.4	PASS		100	0
17979.4	27.9	18.4	37.5	65.4	83.5	-18.1	PASS	-18.1	55.9	63.5	-7.6	PASS	-7.6	200	261



Curtis Straus - a Bureau Veritas Company				Work Order - R2499												
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 13.8V DC												
6-18GHz Horizontal Data				Test Site - CH1												
Operator: CCH				Temp; Humid; Pres - 24.2°C; 42%RH; 1010mBar												
Bluetooth mode																
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	FCC_pt15	Peak Test Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15	Worst Avg Margin	Avg Test Results	Antenna Height	EUT Azimuth			
MHz	(dB $\mu$ V)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)	
14122.9	26.4	17.2	29.9	56.3	83.5	-27.2	PASS		47.1	63.5	-16.4	PASS		125	309	
15912.5	27.6	18.7	24.7	52.3	83.5	-31.2	PASS		43.4	63.5	-20.1	PASS		118	108	
16976.4	27.1	17.9	31.5	58.5	83.5	-25	PASS		49.3	63.5	-14.2	PASS		200	9	
17987.4	26.5	18.5	37.6	64.1	83.5	-19.4	PASS		-19.4	56.1	63.5	-7.4	PASS	-7.4	106	162

Rev. 10/17/2017	Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Rental MXE EMI Receiver(1170725)		20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I		12/22/2017
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	
EMI Chamber 2		719150	2762A-7	A-0015	30-1000MHz	1686	I		12/21/2018
EMI Chamber 2		719150	2762A-7	A-0015	1-18GHz	1686	I		12/21/2018
Preamps/Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	
2311 PA		1-1000MHz	PAM-103	COM-POWER	441174	2311	II		
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	
Red-Black Biolog		30-2000MHz	JB1	Sunol	A091604-2	1106	I		2/28/2019
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due		
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I			4/28/2018
TH A#2084		HTC-1	HDE		2084	II			3/23/2018
Cables		Range	Mfr			Cat	Calibration Due		
Asset #1509		9kHz - 18GHz	Florida RF			II			10/2/2018
Asset #1522		9kHz - 18GHz	Florida RF			II			2/11/2018
Asset #2052		9kHz - 18GHz	Florida RF			II			3/5/2018
Asset #2053		9kHz - 18GHz	Florida RF			II			10/30/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

1-18GHz

Rev. 10/17/2017	Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Rental MXE EMI Receiver(1170725)		20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I		12/22/2017
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	
EMI Chamber 2		719150	2762A-7	A-0015	30-1000MHz	1686	I		12/21/2018
EMI Chamber 2		719150	2762A-7	A-0015	1-18GHz	1686	I		12/21/2018
Preamps/Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	
2444 PA		9kHz-6GHz	BBV9744	SCWARZBECK	67	2444	I		10/2/2018
2463 HF PA		5-18GHz	PAM-118A	COM-POWER	443005	2463	II		10/9/2018
2111 HF Preamp		0.5-18GHz	PAM-118A	COM-POWER	551063	2111	II		
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	
Orange Horn		1-18GHz	3115	EMCO	0004-6123	390	I		10/13/2018
Blue Horn		1-18GHz	3117	ETS	157647	1861	I		2/14/2019
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due		
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I			4/28/2018
TH A#2084		HTC-1	HDE		2084	II			3/23/2018
Cables		Range	Mfr			Cat	Calibration Due		
Asset #1509		9kHz - 18GHz	Florida RF			II			10/2/2018
Asset #1522		9kHz - 18GHz	Florida RF			II			2/11/2018
Asset #2052		9kHz - 18GHz	Florida RF			II			3/5/2018
Asset #2054		9kHz - 18GHz	Florida RF			II			10/30/2017

6-18GHz Mid Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 11 of 41

Testing Cert. No. 1627-01

**Radiated Emissions Table**

Date: 21-Sep-17	Company: Harman International	Work Order: R2499												
Engineer: Chris Hamel	EUT Desc: G31 BASE+	EUT Operating Voltage/Frequency: 13.8V DC												
Temp: 24.2°C	Humidity: 42%	Pressure: 1010mbar												
<b>Frequency Range:</b> 18-26.5GHz														
<b>Notes:</b> No emissions Found														
<b>EUT Max Freq:</b>														
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dB $\mu$ V)	Average Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB $\mu$ V/m)	Adjusted Avg Reading (dB $\mu$ V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)
No Emissions Found			---	---	---	---	---	---	---	---	---	---	---	---
<b>Table Result:</b> Pass by N/A dB			<b>Worst Freq:</b> N/A MHz											
Test Site: EMI Chamber 2			Cable 1: Asset #2324			Cable 2: ---			Cable 3: ---					
Analyzer: Gold			Preamp: 18-26.5GHz			Antenna: 18-26.5GHz Horn			Preselector: ---					
CSsoft Radiated Emissions Calculator v 1.017.188												Copyright Curtis-Straus LLC 2000		
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														

Rev. 9/20/2017

Spectrum Analyzers / Receivers /Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Gold	100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	2/28/2018	2/28/2017
<b>Radiated Emissions Sites</b>	<b>FCC Code</b>	<b>IC Code</b>	<b>VCCI Code</b>	<b>Range</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
EMI Chamber 2	719150	2762A-7	A-0015	30-1000MHz	1686	I	12/21/2018	12/21/2016
EMI Chamber 2	719150	2762A-7	A-0015	1-18GHz	1686	I	12/21/2018	12/21/2016
<b>Preamps/Couplers Attenuators / Filters</b>	<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
HF (Yellow)	18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	10/16/2017	9/16/2016
<b>Antennas</b>	<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
HF (White) Horn	18-26.5GHz	801-WLM	Waveline	758	758	III	Verify before Use	date of test
<b>Meteorological Meters</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>	
Weather Clock (Pressure Only)	BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016	
TH A#2084	HTC-1	HDE		2084	II	3/23/2018	3/23/2017	
<b>Cables</b>	<b>Range</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>	
Asset 2324	1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 001	2324	II	8/19/2018	8/19/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

**18-26.5GHz Mid Channel****Radiated Emissions Table**

Date: 21-Sep-17	Company: Harman International	Work Order: R2499												
Engineer: Chris Hamel	EUT Desc: G31 BASE+	EUT Operating Voltage/Frequency: 13.8V DC												
Temp: 24.2°C	Humidity: 42%	Pressure: 1010mbar												
<b>Frequency Range:</b> 26.5-40GHz														
<b>Notes:</b> No emissions Found														
<b>EUT Max Freq:</b>														
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dB $\mu$ V)	Average Reading (dB $\mu$ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB $\mu$ V/m)	Adjusted Avg Reading (dB $\mu$ V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB $\mu$ V/m)	Margin (dB)	Result (Pass/Fail)
No Emissions Found	---	---	---	---	---	---	---	---	---	---	---	---	---	---
<b>Table Result:</b> Pass by N/A dB			<b>Worst Freq:</b> N/A MHz											
Test Site: EMI Chamber 1			Cable 1: Asset #2323			Cable 2: Asset #2324			Cable 3: ---					
Analyzer: Gold			Preamp: 40GHz Mixer			Antenna: 40GHz Mixer			Preselector: ---					
CSsoft Radiated Emissions Calculator v 1.017.195												Copyright Curtis-Straus LLC 2000		
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														

Rev. 10/18/2017

Spectrum Analyzers / Receivers /Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Gold	100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	2/28/2018	2/28/2017
<b>Radiated Emissions Sites</b>	<b>FCC Code</b>	<b>IC Code</b>	<b>VCCI Code</b>	<b>Range</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
EMI Chamber 1	719150	2762A-6	A-0015	1-18GHz	1685	I	12/21/2018	12/21/2016
<b>Mixers/Diplexers</b>	<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
Mixer / Horn	26.5-40 GHz	11970A	Agilent	3003A10230	2154	I	3/12/2019	3/12/2016
<b>Meteorological Meters/Chambers</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>	
Weather Clock (Pressure Only)	BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016	
TH A#2084	HTC-1	HDE		2084	II	3/23/2018	3/23/2017	
<b>Cables</b>	<b>Range</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>	
Asset 2323	1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 002	2323	II	8/19/2018	8/19/2017
Asset 2324	1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 001	2324	II	8/19/2018	8/19/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

**26.5-40GHz Mid Channel**

**Curtis-Straus LLC, a wholly owned subsidiary of BV CPS**  
**One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828**



## Radiated Band Edge

Radiated Emissions Table														
Date: 11-Oct-17		Company: Harman		Work Order: R2499										
Engineer: Chris Hamel		EUT Desc: G31 BASE+		EUT Operating Voltage/Frequency: 13.8V DC										
Temp: 24.1°C		Humidity: 40%		Pressure: 1011mBar										
Frequency Range:										Measurement Distance: 3 m				
Notes: Bluetooth mode DH1, and 3DH3 no pulsing emissions found.										EUT Max Freq:				
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dB <sub>µ</sub> V)	Average Reading (dB <sub>µ</sub> V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB <sub>µ</sub> V/m)	Adjusted Avg Reading (dB <sub>µ</sub> V/m)	FCC Class B High Frequency - Peak	FCC Class B High Frequency - Average				
									Limit (dB <sub>µ</sub> V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB <sub>µ</sub> V/m)	Margin (dB)	Result (Pass/Fail)
DH 1		---	---	---	---	---	---	---	---	---	---	---	---	---
Low		---	---	---	---	---	---	---	---	---	---	---	---	---
H MAX	2402.0	47.7		0.0	28.0	3.2	---	---	74.0	---	---	54.0	---	---
V MAX	2401.9	50.7		0.0	28.0	3.2	---	---	74.0	---	---	54.0	---	---
V	2310.0	11.08	11.1	0.0	27.9	3.2	42.2	42.2	74.0	-31.8	Pass	54.0	-11.8	Pass
V	2331.7	14.4	14.4	0.0	27.9	3.2	45.5	45.5	74.0	-28.5	Pass	54.0	-8.5	Pass
High		---	---	---	---	---	---	---	---	---	---	---	---	---
H Max	2480.1	44.4		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V MAX	2479.94	47.2		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V	2483.5	11.3	11.3	0.0	28.2	3.2	42.7	42.7	74.0	-31.3	Pass	54.0	-11.3	Pass
V avg	2483.6	18.4	7.1	0.0	28.2	3.2	49.8	38.5	74.0	-24.2	Pass	54.0	-15.5	Pass
3DH3		---	---	---	---	---	---	---	---	---	---	---	---	---
Low		---	---	---	---	---	---	---	---	---	---	---	---	---
H MAX	2401.0	45.3		0.0	28.0	3.2	---	---	74.0	---	---	54.0	---	---
V MAX	2401.9	50.4		0.0	28.0	3.2	---	---	74.0	---	---	54.0	---	---
V	2390.0	9.1	9.1	0.0	28.0	3.2	40.3	40.3	74.0	-33.7	Pass	54.0	-13.7	Pass
V	2356.3	14.6	14.6	0.0	27.9	3.2	45.7	45.7	74.0	-28.3	Pass	54.0	-8.3	Pass
High		---	---	---	---	---	---	---	---	---	---	---	---	---
H MAX	2480.1	45.1		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V MAX	2480.0	48.0		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V	2483.5	12.1	12.1	0.0	28.2	3.2	43.5	43.5	74.0	-30.5	Pass	54.0	-10.5	Pass
V avg	2484.0	17.2	6.6	0.0	28.2	3.2	48.6	38.0	74.0	-25.4	Pass	54.0	-16.0	Pass
Table Result:		Pass	by	-8.3	dB						Worst Freq: 2356.3 MHz			
Test Site: EMI Chamber 1	Cable 1: Asset #2051			Cable 2: Asset #2054			Cable 3: ---			Antenna: Orange Horn			Preselector: ---	
Analyzer: Rental SA#3	Preamp: None			Antenna: Orange Horn			Preselector: ---			Copyright Curtis-Straus LLC 2000				
CSSoft Radiated Emissions Calculator v 1.017.192														
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														

Rev. 10/22/2017											
Spectrum Analyzers / Receivers /Presselectors			Range	MN	Mfr	SN	Asset	Cat	Calibration Due		
Rental MXE EMI Receiver(1170725)			20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	12/22/2017		
Radiated Emissions Sites			FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due		
EMI Chamber 1			719150	2762A-6	A-0015	1-18GHz	1685	I	12/21/2018		
Antennas			Range	MN	Mfr	SN	Asset	Cat	Calibration Due		
Orange Horn			1-18GHz	3115	EMCO	0004-6123	390	I	10/13/2018		
Meteorological Meters/Chambers			MN	Mfr	SN	Asset	Cat	Calibration Due			
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	4/28/2018			
TH A#2084			HTC-1	HDE		2084	II	3/23/2018			
Cables			Range	Mfr			Cat		Calibration Due		
Asset #2051			9kHz - 18GHz	Florida RF			II		3/5/2018		
Asset #2054			9kHz - 18GHz	Florida RF			II		10/30/2017		

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



## **AC Line Conducted Emissions**

### **LIMITS**

Frequency of emission (MHz)	Quasi-peak limit (dB $\mu$ V)	Average limit (dB $\mu$ V)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

### **MEASUREMENTS / RESULTS**

\*\*EUT is vehicle battery powered only



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



## Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz) NIST CISPR	5.6dB 4.6dB	N/A 5.2dB (Ucispr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions NIST CISPR	3.9dB 3.6dB	N/A 3.6dB (Ucispr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	$3.23 \times 10^{-8}$	$1 \times 10^{-7}$
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



## Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "**BUREAU VERITAS**," "**BUREAU VERITAS CONSUMER PRODUCTS SERVICES**," "**BVCPs**," "**MTL**," "**ACTS**," "**MTL-ACTS**" and **CURTIS-STRAUS** (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

BUREAU  
VERITAS



page 16 of 41

Testing Cert. No. 1627-01

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request. Rev.160009121(2)\_#684340 v14CS



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



**Appendix A:****CFR Title 47 FCC Part §15.247 and ISED Canada RSS-247 Issue 2****DUT Information**

DUT Name: G31 BASE+  
 Manufacturer: Harman International Industries, Inc.  
 Serial Number: 078

**Frequencies**

BT CH 0 (2402 MHz)	BT CH 2 (2404 MHz)	BT CH 3 (2405 MHz)
BT CH 1 (2403 MHz)	BT CH 5 (2407 MHz)	BT CH 6 (2408 MHz)
BT CH 4 (2406 MHz)	BT CH 8 (2410 MHz)	BT CH 9 (2411 MHz)
BT CH 7 (2409 MHz)	BT CH 11 (2413 MHz)	BT CH 12 (2414 MHz)
BT CH 10 (2412 MHz)	BT CH 14 (2416 MHz)	BT CH 15 (2417 MHz)
BT CH 13 (2415 MHz)	BT CH 17 (2419 MHz)	BT CH 18 (2420 MHz)
BT CH 16 (2418 MHz)	BT CH 20 (2422 MHz)	BT CH 21 (2423 MHz)
BT CH 19 (2421 MHz)	BT CH 23 (2425 MHz)	BT CH 24 (2426 MHz)
BT CH 22 (2424 MHz)	BT CH 26 (2428 MHz)	BT CH 27 (2429 MHz)
BT CH 25 (2427 MHz)	BT CH 29 (2431 MHz)	BT CH 30 (2432 MHz)
BT CH 28 (2430 MHz)	BT CH 32 (2434 MHz)	BT CH 33 (2435 MHz)
BT CH 31 (2433 MHz)	BT CH 35 (2437 MHz)	BT CH 36 (2438 MHz)
BT CH 34 (2436 MHz)	BT CH 38 (2440 MHz)	BT CH 39 (2441 MHz)
BT CH 37 (2439 MHz)	BT CH 41 (2443 MHz)	BT CH 42 (2444 MHz)
BT CH 40 (2442 MHz)	BT CH 44 (2446 MHz)	BT CH 45 (2447 MHz)
BT CH 43 (2445 MHz)	BT CH 47 (2449 MHz)	BT CH 48 (2450 MHz)
BT CH 46 (2448 MHz)	BT CH 50 (2452 MHz)	BT CH 51 (2453 MHz)
BT CH 49 (2451 MHz)	BT CH 53 (2455 MHz)	BT CH 54 (2456 MHz)
BT CH 52 (2454 MHz)	BT CH 56 (2458 MHz)	BT CH 57 (2459 MHz)
BT CH 55 (2457 MHz)	BT CH 59 (2461 MHz)	BT CH 60 (2462 MHz)
BT CH 58 (2460 MHz)	BT CH 62 (2464 MHz)	BT CH 63 (2465 MHz)
BT CH 61 (2463 MHz)	BT CH 65 (2467 MHz)	BT CH 66 (2468 MHz)
BT CH 64 (2466 MHz)	BT CH 68 (2470 MHz)	BT CH 69 (2471 MHz)
BT CH 67 (2469 MHz)	BT CH 71 (2473 MHz)	BT CH 72 (2474 MHz)
BT CH 70 (2472 MHz)	BT CH 74 (2476 MHz)	BT CH 75 (2477 MHz)
BT CH 73 (2475 MHz)	BT CH 77 (2479 MHz)	BT CH 78 (2480 MHz)

**DUT Settings**

No. of transmission chains 1  
 Equipment Type Frequency Hopping Spread Spectrum

**Antenna Gain**

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-4.35	36.70	0.94	5000	-5.17	30.40	2.38
2410	-4.40	36.33	0.93	5100	-4.64	34.38	1.53
2420	-4.43	36.06	0.92	5200	-5.31	29.44	1.20
2430	-4.46	35.78	1.18	5300	-4.23	37.74	3.20
2440	-4.44	35.94	0.95	5400	-4.53	35.27	2.78
2450	-4.50	35.47	0.87	5500	-6.30	23.46	0.01
2460	-4.61	34.60	0.88	5600	-5.00	31.62	2.00
2470	-4.80	33.13	0.71	5700	-4.98	31.75	1.19
2480	-4.90	32.38	0.93	5800	-4.78	33.30	1.35
2490	-5.06	31.18	0.85	5900	-4.66	34.21	0.55
2500	-5.33	29.32	0.24	6000	-4.61	34.56	1.57

**Test Equipment Used:**

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
FSV40 Signal Generator	10Hz-40GHz	FSV40	ROHDE & SCHWARZ	101551	2200	I	6/30/2018	6/30/2017
<b>Signal Generators</b>								
SMBV100A Vector Signal Generator	9KHz-6GHz	SMBV100A	ROHDE & SCHWARZ	261919	2201	I	6/26/2018	6/26/2017
SMB100A Signal Generator	100KHz-40GHz	SMB100A	ROHDE & SCHWARZ	179846	2434	I	5/30/2018	5/30/2017
R&S®OSP120 with R&S®OSP-B157	30MHz-18GHz	OSP120	ROHDE & SCHWARZ	101674		I	6/1/2018	6/1/2017
<b>Cables</b>								
Asset #2052	9kHz - 18GHz		Florida RF			II	3/5/2018	3/5/2017
DUT1	30MHz-26GHz		Micro-Coax			II	6/21/2018	6/21/2017
<b>Attenuators</b>								
10dB Attenuator-01 Brown	30MHz-26GHz		Mini Circuits			II	7/13/2018	7/14/2017
10dB Attenuator-02 Yellow	30MHz-26GHz		Mini Circuits			II	7/13/2018	7/14/2017
<b>Wideband Radio Communication Tester</b>								
(Rental)CMW500	DC to 6GHz	CMW500	ROHDE & SCHWARZ	155905		I	6/2/2018	6/2/2017



**Summary**

Test	Frequency (MHz)	DH1 Result	DH3 Result	DH5 Result	2-DH1 Result	2-DH3 Result	2-DH5 Result	3-DH1 Result	3-DH3 Result	3-DH5 Result
Hopping Frequencies	--- (hopping)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Band Edge (during hopping)	--- (hopping)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Carrier Frequency Separation	2402.000 (hopping)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Carrier Frequency Separation	2480.000 (hopping)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Time of Channel Occupancy	2402.000 (hopping)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Time of Channel Occupancy	2441.000 (hopping)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Time of Channel Occupancy	2480.000 (hopping)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Emission Bandwidth 20 dB	2402.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Band Edge low	2402.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Peak output power	2402.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Conducted Spurious Emissions	2402.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Emission Bandwidth 20 dB	2441.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Peak output power	2441.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Conducted Spurious Emissions	2441.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Emission Bandwidth 20 dB	2480.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Band Edge high	2480.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Peak output power	2480.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Conducted Spurious Emissions	2480.000 (single)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS





## Number of Hopping Frequencies

Test procedure in accordance with ANSI C63.10-2013

### Channels

Channels	Limit Min	Result
79	15	PASS

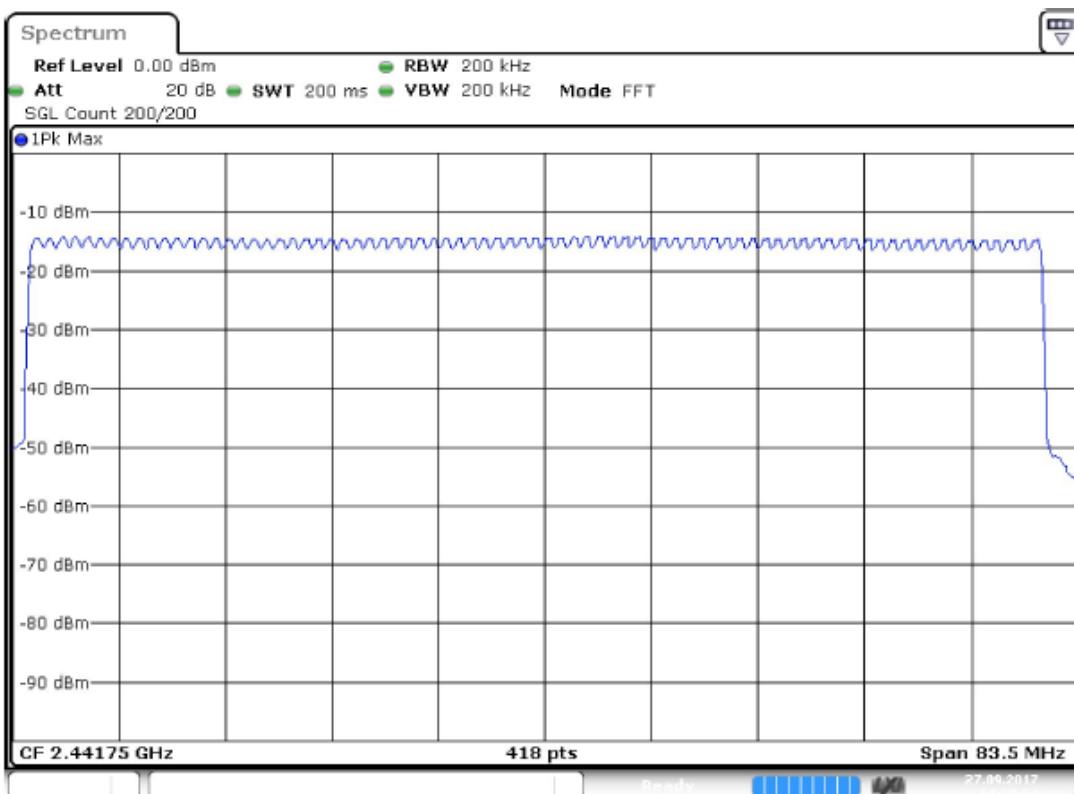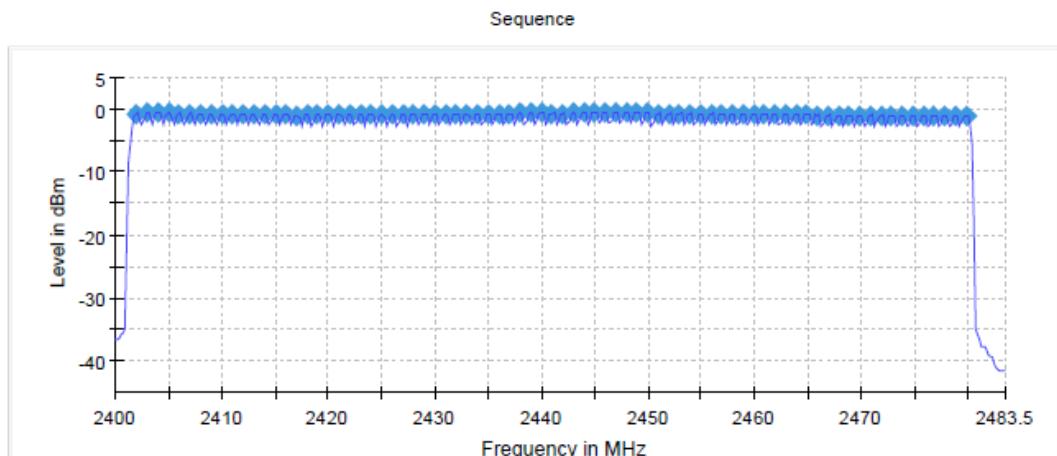

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



**Band Edge (during hopping)**

Test procedure in accordance with ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) &lt; 0.8 dB


**Inband Peak**


Data Rate	Frequency (MHz)	Level (dBm)
DH1	2447.800550	-0.7
DH3	2447.800550	-0.6
DH5	2447.800550	-0.6
2-DH1	2445.951012	-0.6
2-DH3	2446.950762	-0.7
2-DH5	2447.100725	-0.7
3-DH1	2448.950262	-0.6
3-DH3	2447.950512	-0.7
3-DH5	2446.100975	-0.7

Plots for packet type 3-DH3 shown below.

**Measurements**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2503.936516	-50.5	29.9	-20.7	PASS
2503.986503	-51.0	30.4	-20.7	PASS
2498.937766	-51.2	30.5	-20.7	PASS
2505.936016	-51.2	30.6	-20.7	PASS
2505.986003	-51.3	30.6	-20.7	PASS
2377.968008	-51.3	30.7	-20.7	PASS
2498.987753	-51.3	30.7	-20.7	PASS
2504.786303	-51.4	30.8	-20.7	PASS
2490.939765	-51.4	30.8	-20.7	PASS
2393.964009	-51.5	30.8	-20.7	PASS
2504.736316	-51.6	30.9	-20.7	PASS
2378.017996	-51.7	31.1	-20.7	PASS
2503.886528	-51.8	31.1	-20.7	PASS
2504.136466	-51.8	31.1	-20.7	PASS
2394.013997	-51.8	31.1	-20.7	PASS

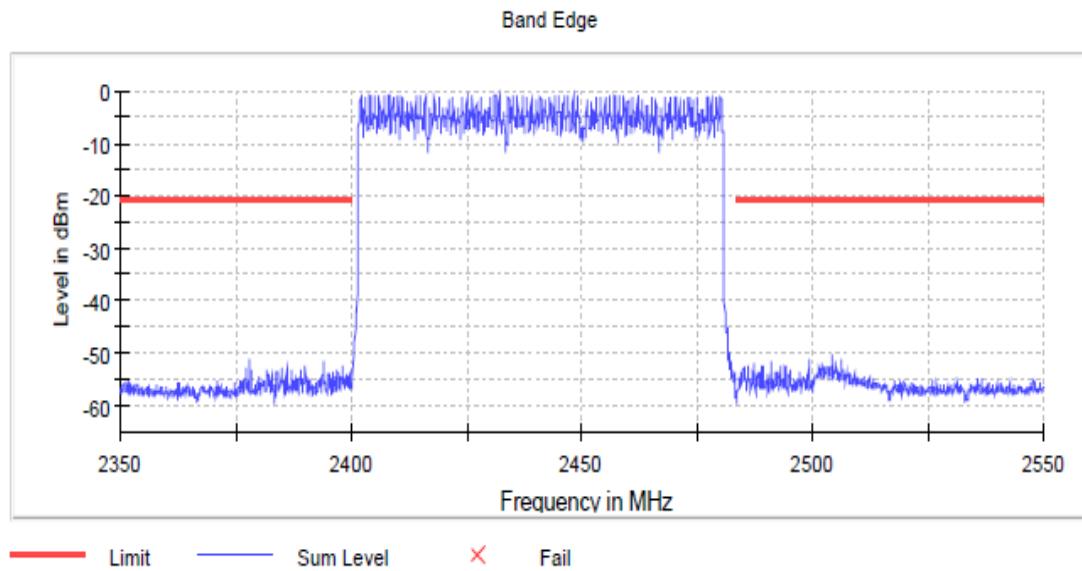

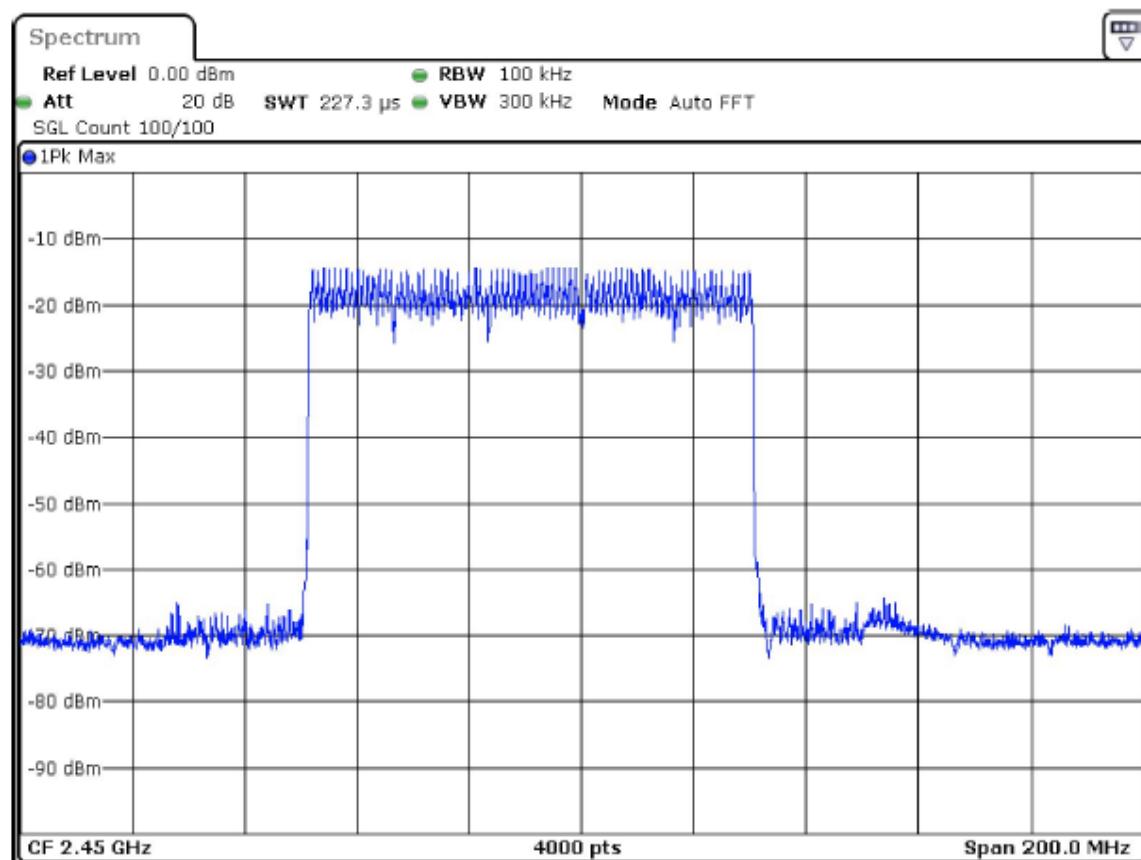

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 24 of 41

Testing Cert. No. 1627-01

## Carrier Frequency Separation

Test procedure in accordance with ANSI C63.10-2013.



Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty( $k = 2$ ) < 1%

### 2402 MHz

Limit is 2/3 of the widest 20dB bandwidth measured for worst case.

Packet Type	DUT Frequency (MHz)	Frequency Separation (MHz)	Minimum Limit (MHz)	Result
DH1	2402.000000	0.980393	0.86275	PASS
DH3	2402.000000	0.980393	0.86275	PASS
DH5	2402.000000	0.980393	0.86275	PASS
2-DH1	2402.000000	0.980392	0.86275	PASS
2-DH3	2402.000000	0.980392	0.86275	PASS
2-DH5	2402.000000	0.980392	0.86275	PASS
3-DH1	2402.000000	0.980392	0.86275	PASS
3-DH3	2402.000000	0.931373	0.86275	PASS
3-DH5	2402.000000	0.931373	0.86275	PASS

Plots for packet type 3-DH3 shown below.

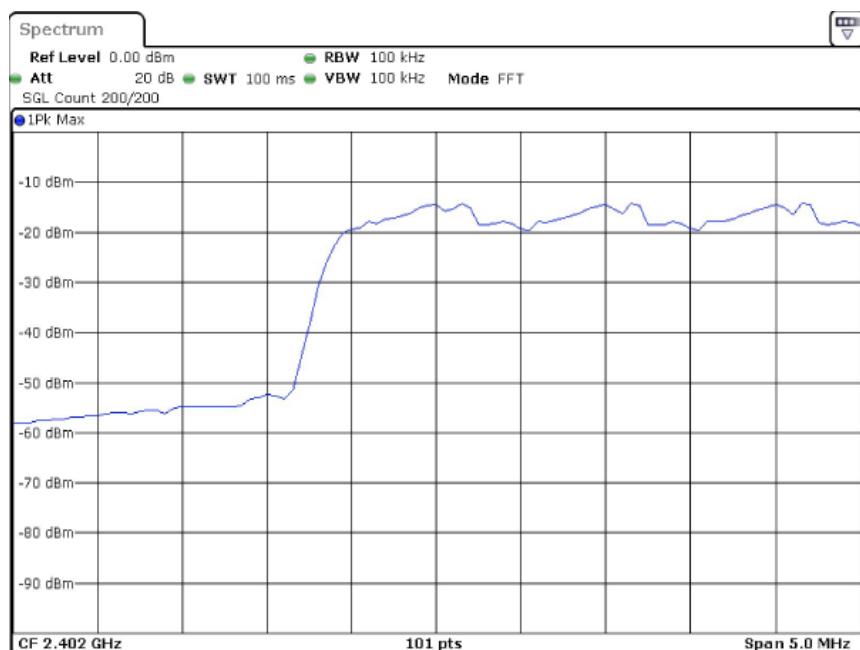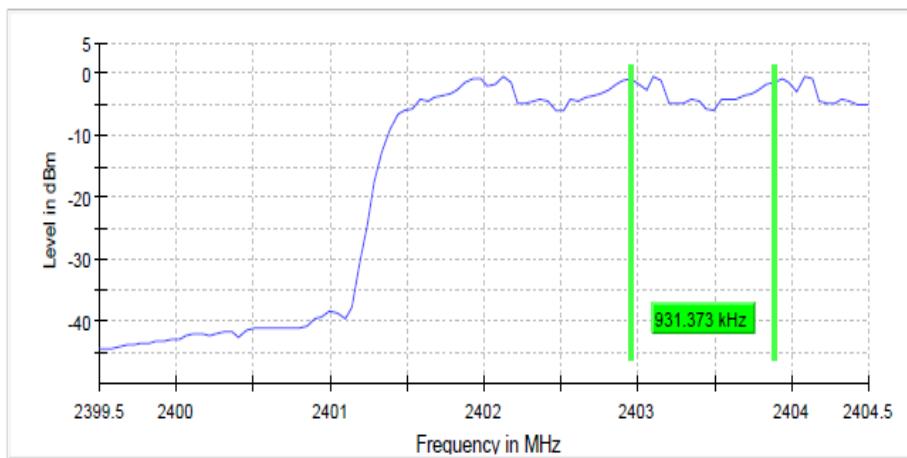

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 25 of 41

Testing Cert. No. 1627-01



**2480 MHz**

Limit is 2/3 of the widest 20dB bandwidth measured for worst case.

Packet Type	DUT Frequency (MHz)	Frequency Separation (MHz)	Minimum Limit (MHz)	Result
DH1	2480.000000	0.980392	0.86275	PASS
DH3	2480.000000	0.980392	0.86275	PASS
DH5	2480.000000	0.980392	0.86275	PASS
2-DH1	2480.000000	0.980392	0.86275	PASS
2-DH3	2480.000000	0.980392	0.86275	PASS
2-DH5	2480.000000	0.980392	0.86275	PASS
3-DH1	2480.000000	0.980392	0.86275	PASS
3-DH3	2480.000000	0.980392	0.86275	PASS
3-DH5	2480.000000	0.980392	0.86275	PASS

Plots for packet type 3-DH3 shown below.

CFS

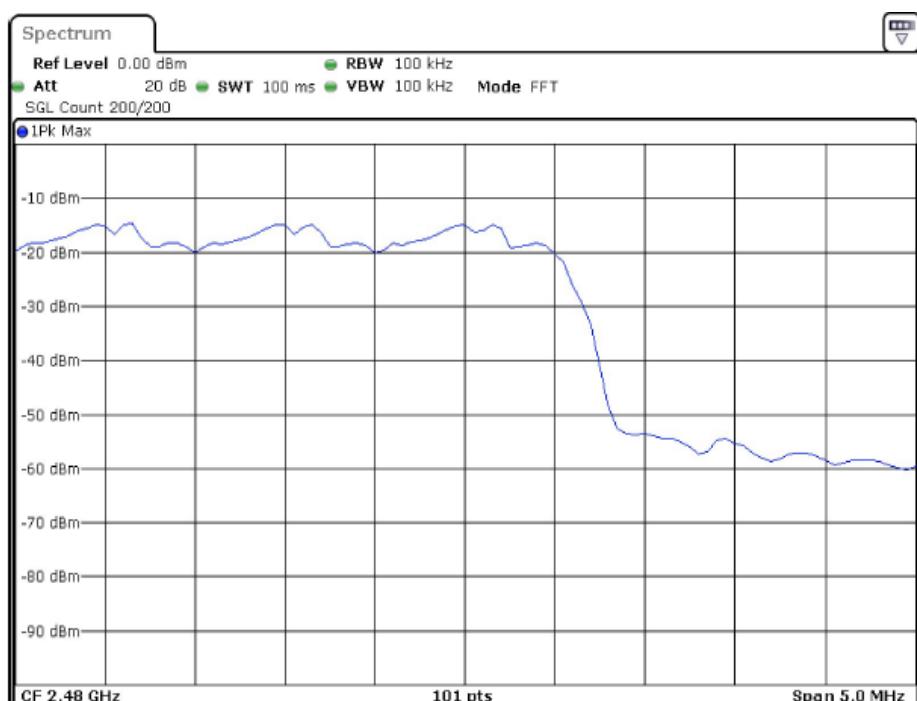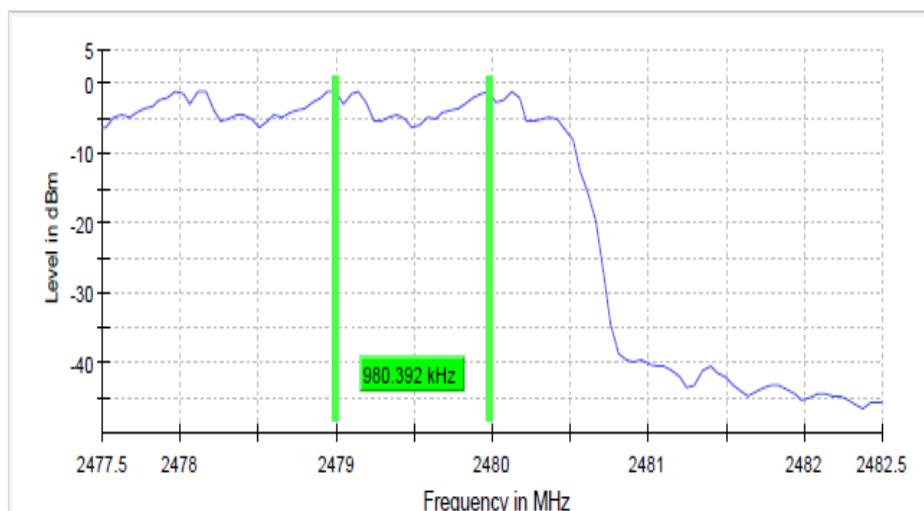

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



## Time of Channel Occupancy (Dwell Time)

Test procedure in accordance with ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1%

### 2402 MHz

Data Rate	Time (ms)	Limit Max (ms)	Result
DH1	144.150	400.000	PASS
DH3	271.400	400.000	PASS
DH5	316.120	400.000	PASS
2-DH1	128.920	400.000	PASS
2-DH3	250.890	400.000	PASS
2-DH5	276.900	400.000	PASS
3-DH1	129.190	400.000	PASS
3-DH3	240.290	400.000	PASS
3-DH5	259.980	400.000	PASS

Plots for packet type 3-DH3 shown below.

Time of Channel Occupancy

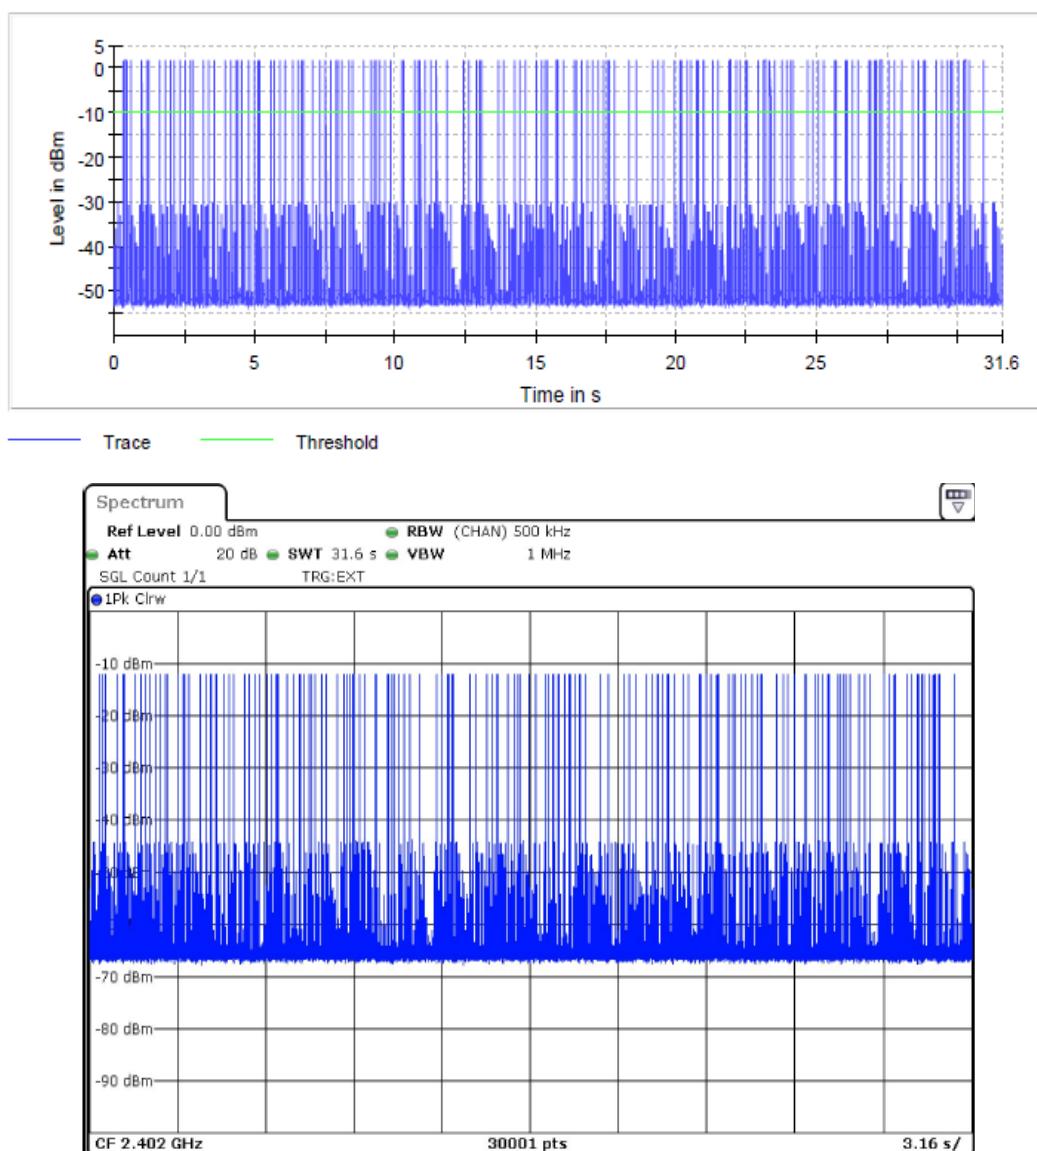

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 27 of 41



ACREDITED  
Testing Cert. No. 1627-01

**2441 MHz**

Data Rate	Time (ms)	Limit Max (ms)	Result
DH1	144.170	400.000	PASS
DH3	264.510	400.000	PASS
DH5	301.390	400.000	PASS
2-DH1	127.350	400.000	PASS
2-DH3	221.820	400.000	PASS
2-DH5	279.310	400.000	PASS
3-DH1	129.340	400.000	PASS
3-DH3	212.970	400.000	PASS
3-DH5	223.480	400.000	PASS

Plots for packet type 3-DH3 shown below.

Time of Channel Occupancy

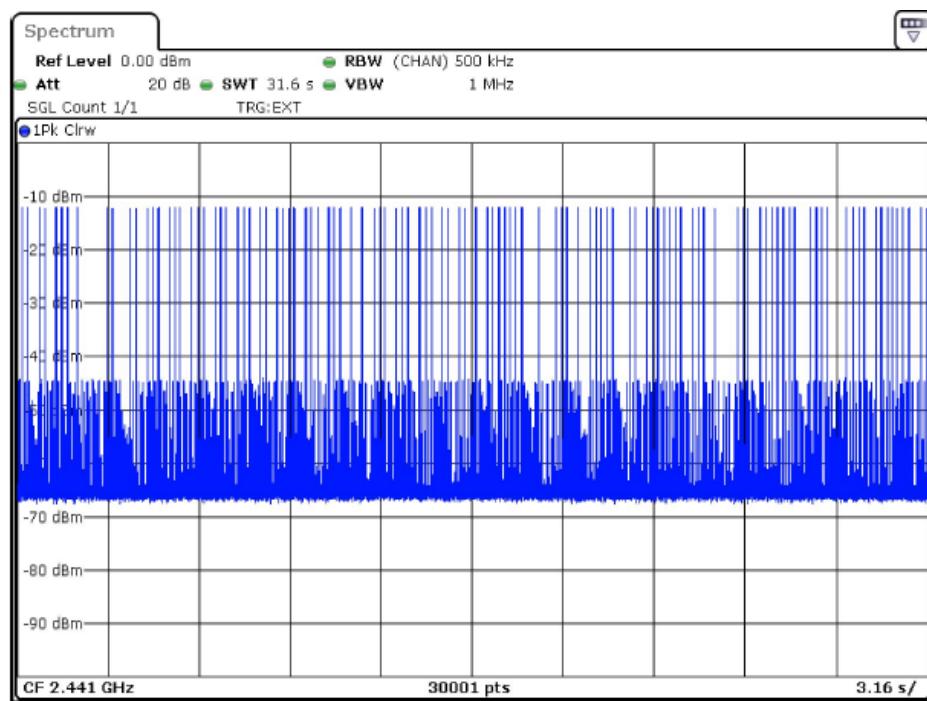
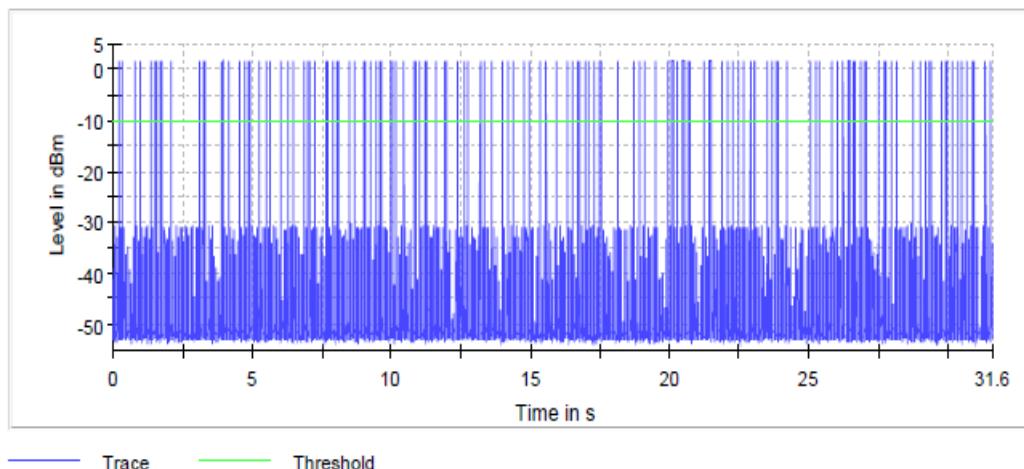


**2480 MHz**

Data Rate	Time (ms)	Limit Max (ms)	Result
DH1	144.080	400.000	PASS
DH3	272.990	400.000	PASS
DH5	313.130	400.000	PASS
2-DH1	127.350	400.000	PASS
2-DH3	207.160	400.000	PASS
2-DH5	228.260	400.000	PASS
3-DH1	127.750	400.000	PASS
3-DH3	235.690	400.000	PASS
3-DH5	241.940	400.000	PASS

Plots for packet type 3-DH3 shown below.

Time of Channel Occupancy

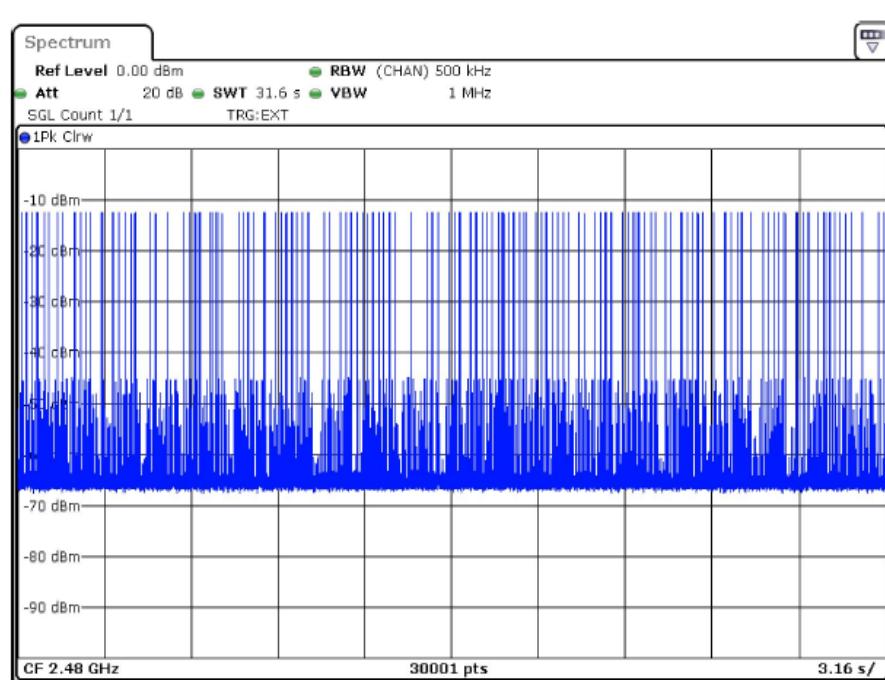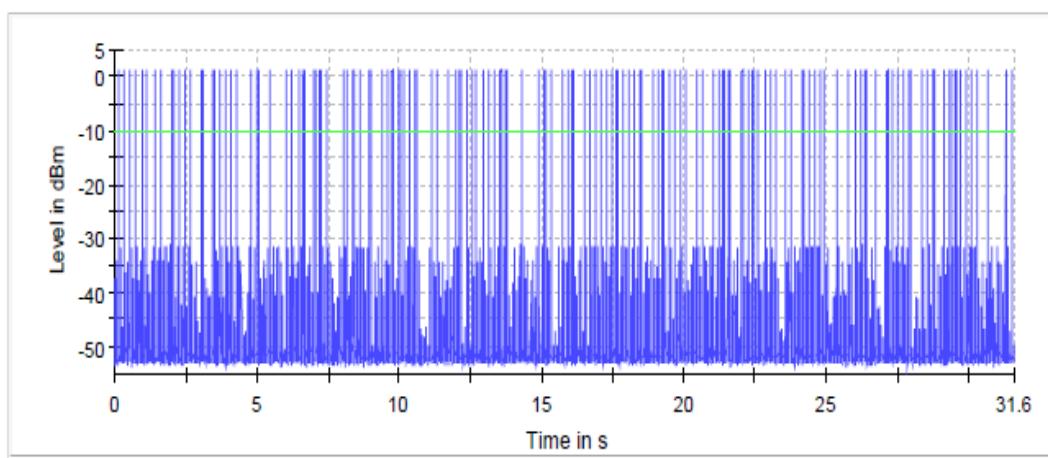


**Peak Output Power**

Test procedure in accordance with ANSI C63.10-2013

Data Rate	2402MHz	2441MHz	2480MHz	Limit dBm
DH1	-0.36	-0.463	-1.04	30
DH3	-0.56	-0.639	-1.027	30
DH5	-0.593	-0.639	-1.027	30
2-DH1	0.785	0.699	0.295	30
2-DH3	0.874	0.794	0.479	30
2-DH5	0.942	0.891	0.418	30
3-DH1	0.946	1.1	0.619	30
3-DH3	1.23	1.26	0.802	30
3-DH5	1.21	1.079	0.765	30

Plot for packet type 3-DH3 shown below.

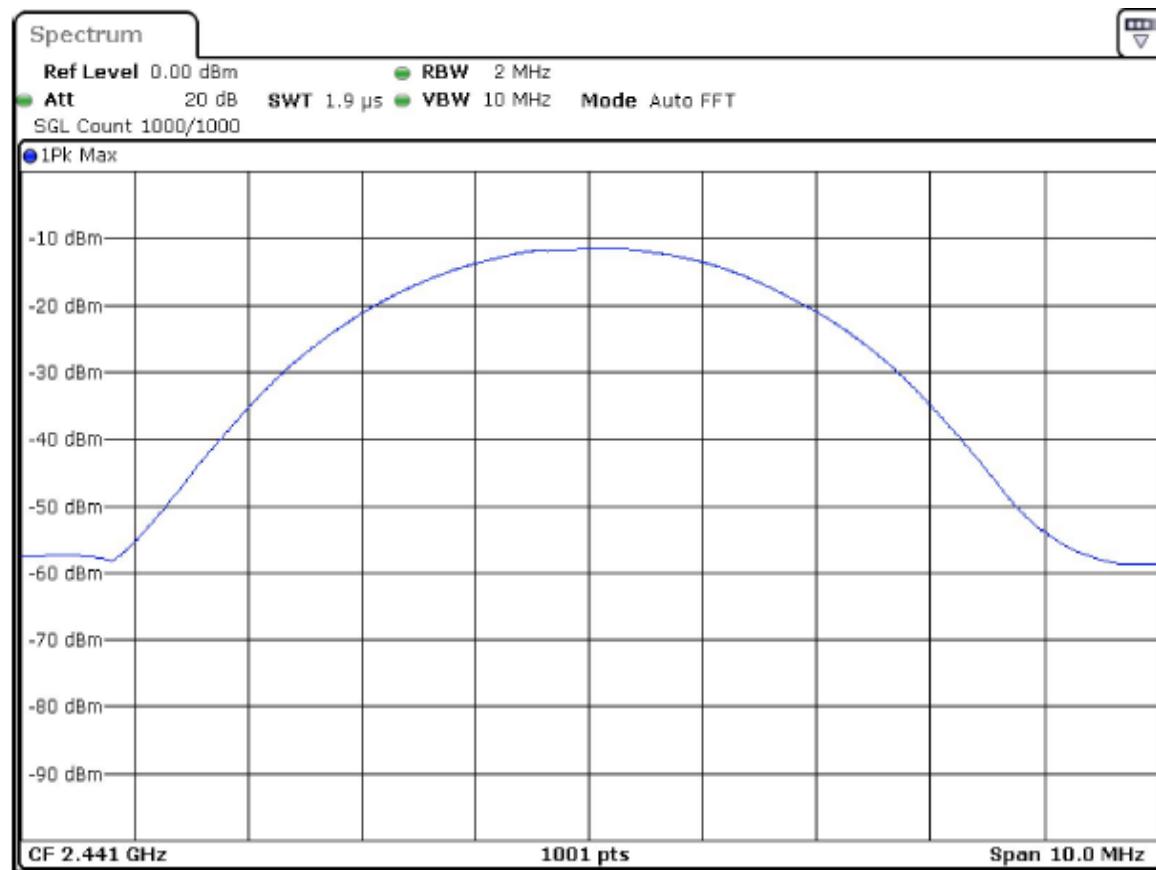

**Emission Bandwidth 20 dB**

Test procedure in accordance with ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) &lt; 2%

**2402 MHz**

Data Rate	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
DH1	0.882353	2401.514706	2402.397059	PASS
DH3	0.911765	2401.485294	2402.397059	PASS
DH5	0.911765	2401.485294	2402.397059	PASS
2-DH1	1.235294	2401.338235	2402.573529	PASS
2-DH3	1.294118	2401.338235	2402.632353	PASS
2-DH5	1.264706	2401.338235	2402.602941	PASS
3-DH1	1.235294	2401.367647	2402.602941	PASS
3-DH3	1.294117	2401.308824	2402.602941	PASS
3-DH5	1.294117	2401.308824	2402.602941	PASS

Plots for packet type 3-DH3 shown below.

20 dB Bandwidth

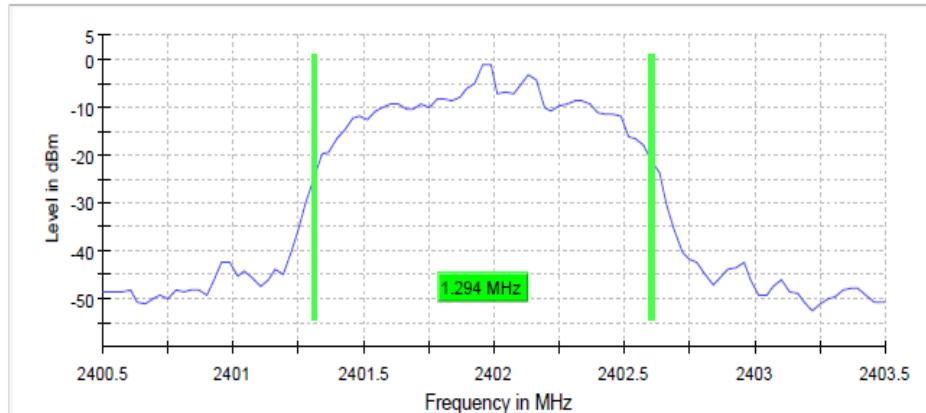


Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



**2441 MHz**

Data Rate	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
DH1	0.852941	2440.514706	2441.367647	PASS
DH3	0.911765	2440.485294	2441.397059	PASS
DH5	0.970588	2440.485294	2441.455882	PASS
2-DH1	1.264706	2440.338235	2441.602941	PASS
2-DH3	1.294118	2440.338235	2441.632353	PASS
2-DH5	1.264706	2440.338235	2441.602941	PASS
3-DH1	1.235294	2440.367647	2441.602941	PASS
3-DH3	1.294117	2440.308824	2441.602941	PASS
3-DH5	1.294117	2440.308824	2441.602941	PASS



Plots for packet type 3-DH3 shown below.

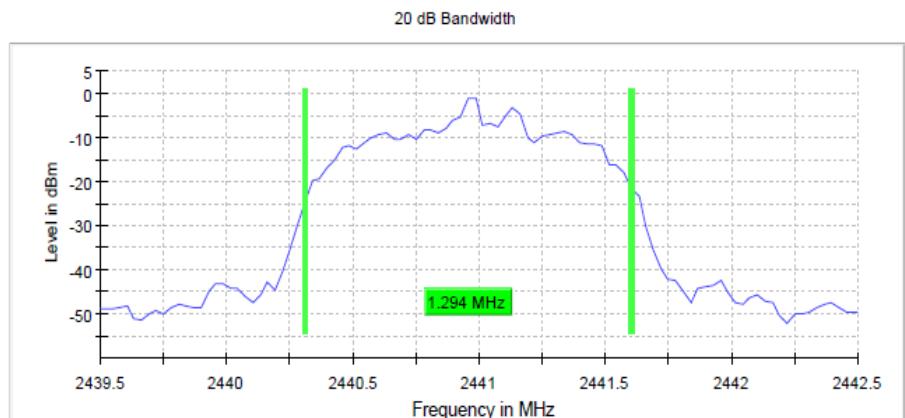

**2480 MHz**

Data Rate	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
DH1	0.882353	2479.514706	2480.397059	PASS
DH3	0.970588	2479.485294	2480.455882	PASS
DH5	0.911765	2479.485294	2480.397059	PASS
2-DH1	1.264706	2479.338235	2480.602941	PASS
2-DH3	1.294118	2479.338235	2480.632353	PASS
2-DH5	1.264706	2479.338235	2480.602941	PASS
3-DH1	1.235294	2479.367647	2480.602941	PASS
3-DH3	1.294117	2479.308824	2480.602941	PASS
3-DH5	1.294117	2479.308824	2480.602941	PASS

Plots for packet type 3-DH3 shown below.

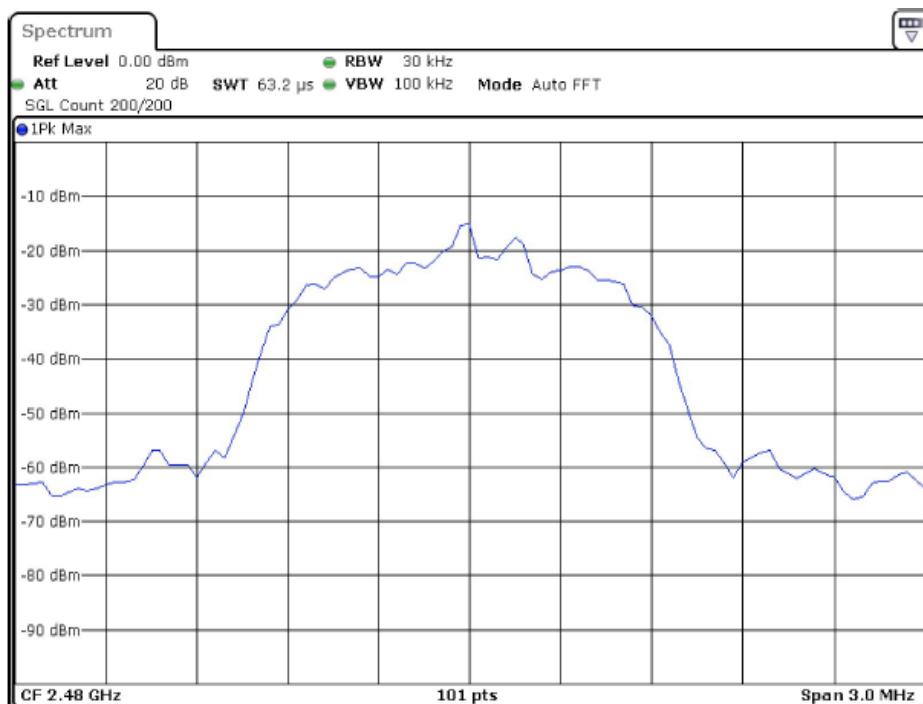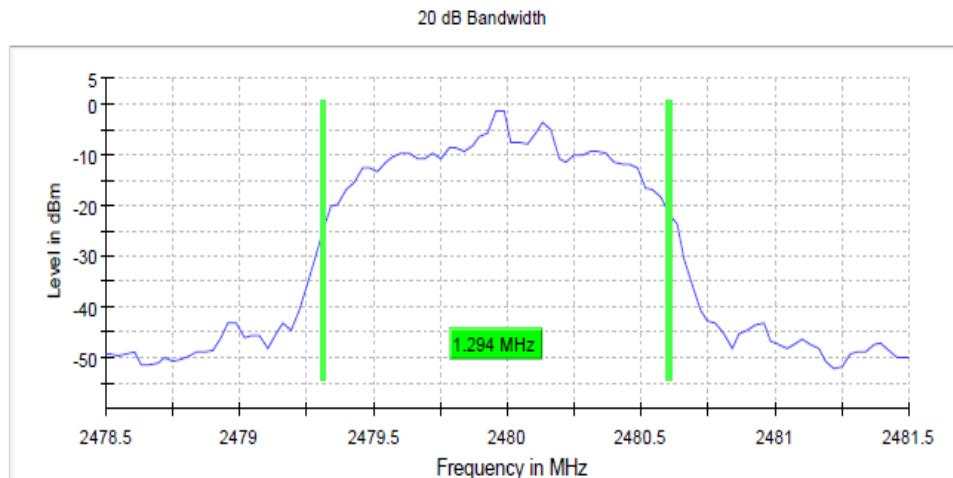

## Band Edge Low (2402 MHz)

Test procedure in accordance with ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB


### Inband Peak


Data Rate	Frequency (MHz)	Level (dBm)
DH1	2401.778737	-0.8
DH3	2401.778737	-0.6
DH5	2401.778737	-0.6
2-DH1	2401.928669	-0.7
2-DH3	2401.928669	-0.8
2-DH5	2401.928669	-0.8
3-DH1	2401.778737	-0.7
3-DH3	2401.928669	-0.7
3-DH5	2402.078601	-0.7

Plots for packet type 3-DH3 shown below.

### Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.879600	-44.1	23.4	-20.7	PASS
2399.929577	-44.2	23.4	-20.7	PASS
2399.829623	-44.5	23.7	-20.7	PASS
2399.979555	-45.0	24.3	-20.7	PASS
2399.779646	-45.2	24.4	-20.7	PASS
2399.479782	-45.7	24.9	-20.7	PASS
2399.729668	-45.8	25.0	-20.7	PASS
2399.279873	-45.8	25.1	-20.7	PASS
2399.429805	-45.9	25.2	-20.7	PASS
2399.229896	-45.9	25.2	-20.7	PASS
2399.629714	-45.9	25.2	-20.7	PASS
2399.679691	-46.0	25.2	-20.7	PASS
2399.529759	-46.0	25.3	-20.7	PASS
2399.579736	-46.1	25.4	-20.7	PASS
2399.329850	-46.4	25.6	-20.7	PASS

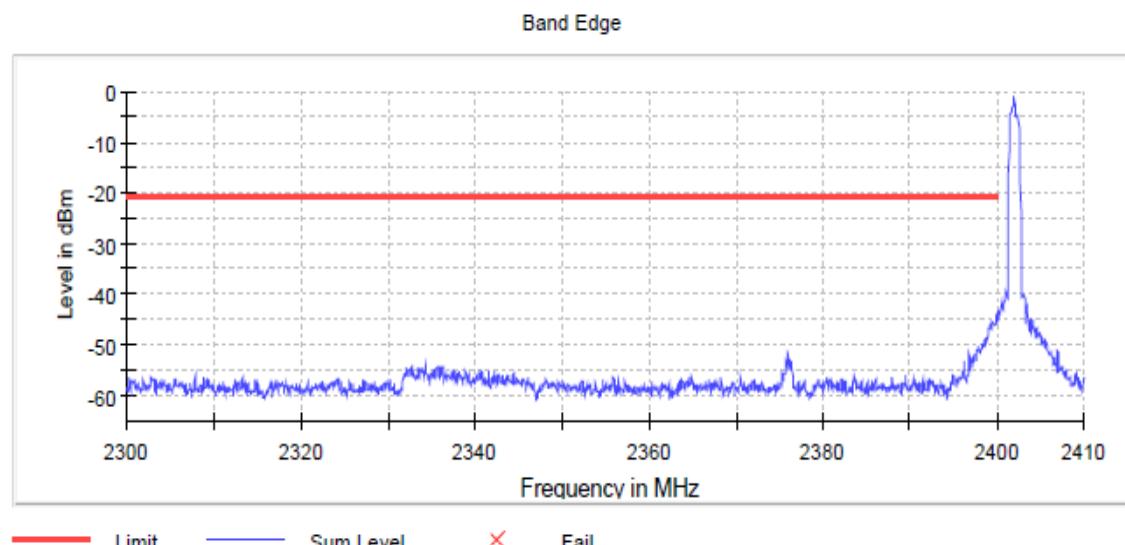

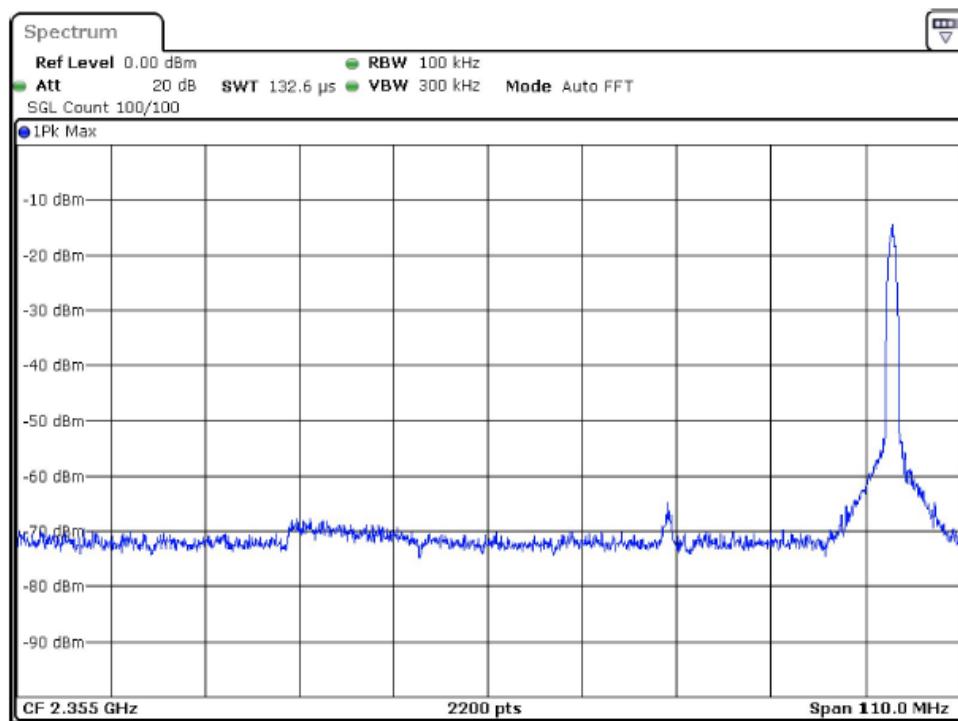

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



**Band Edge High (2480 MHz)**

Test procedure in accordance with ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) &lt; 0.8 dB

**Inband Peak**


Data Rate	Frequency (MHz)	Level (dBm)
DH1	2479.820536	-1.3
DH3	2479.820536	-1.1
DH5	2479.820536	-1.1
2-DH1	2479.970468	-1.2
2-DH3	2479.970468	-1.2
2-DH5	2479.970468	-1.2
3-DH1	2479.970468	-1.2
3-DH3	2479.970468	-1.2
3-DH5	2479.970468	-1.2


Plots for packet type 3-DH3 shown below.

**Measurements**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.568832	-49.4	28.2	-21.2	PASS
2483.618810	-49.4	28.3	-21.2	PASS
2483.518855	-49.6	28.4	-21.2	PASS
2483.668787	-49.6	28.4	-21.2	PASS
2483.718764	-50.3	29.2	-21.2	PASS
2483.968651	-50.7	29.5	-21.2	PASS
2483.918673	-50.7	29.5	-21.2	PASS
2505.958655	-50.8	29.6	-21.2	PASS
2483.868696	-51.1	29.9	-21.2	PASS
2483.768741	-51.2	30.0	-21.2	PASS
2484.018628	-51.2	30.0	-21.2	PASS
2505.858701	-51.3	30.1	-21.2	PASS
2505.908678	-51.4	30.2	-21.2	PASS
2506.008632	-51.4	30.2	-21.2	PASS
2506.108587	-51.5	30.3	-21.2	PASS

Band Edge

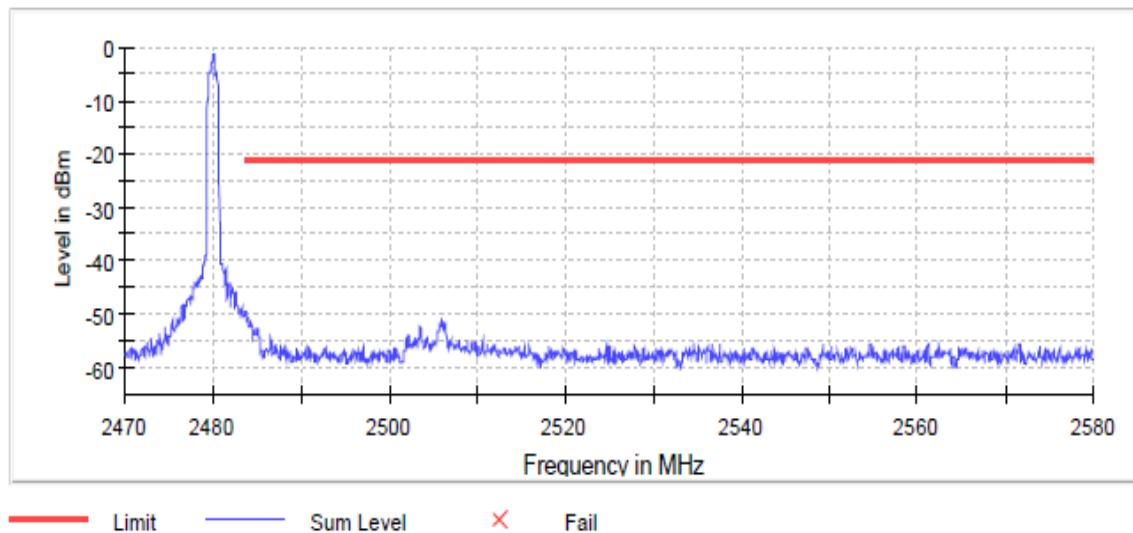

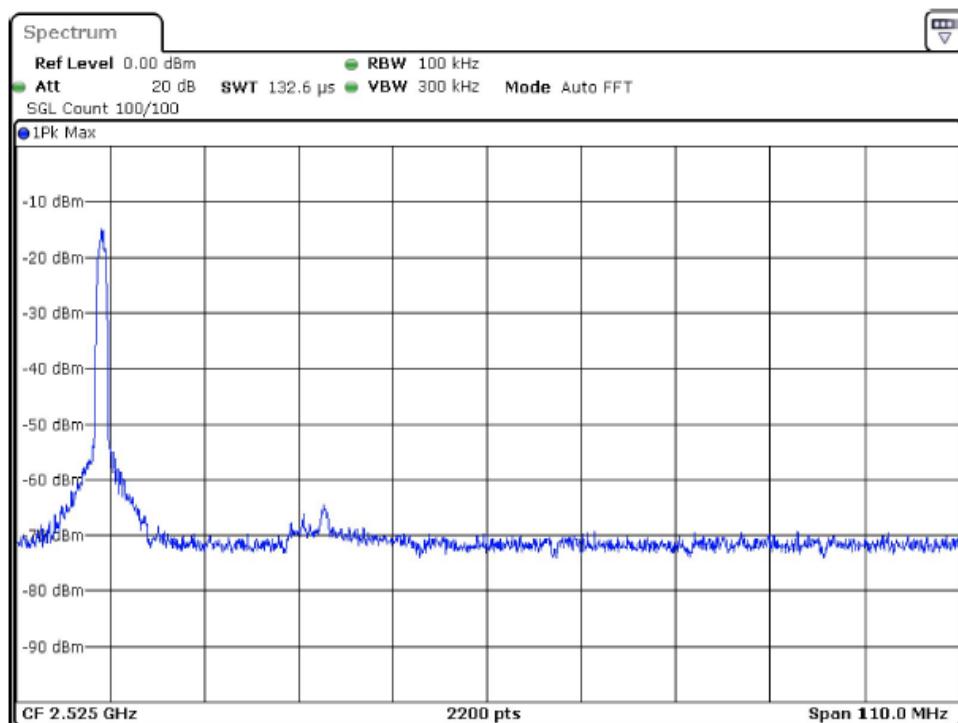

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 37 of 41

Testing Cert. No. 1627-01

## Conducted Spurious Emissions

Test procedure in accordance with ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB



### 2402 MHz

Plots for packet type 3-DH3 shown below.

#### Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
7205.695425	-31.7	11.0	-20.7
7206.475689	-42.8	22.2	-20.7
4804.043654	-44.4	23.8	-20.7
2399.270827	-45.3	24.6	-20.7
2398.490563	-46.2	25.5	-20.7
20301.641929	-46.9	26.3	-20.7
19784.327073	-47.0	26.3	-20.7
19774.963909	-47.0	26.4	-20.7
19800.712612	-47.1	26.4	-20.7
19761.699425	-47.1	26.5	-20.7
16442.457503	-47.2	26.5	-20.7
19766.381007	-47.4	26.7	-20.7
19799.932348	-47.4	26.7	-20.7
19951.303512	-47.4	26.8	-20.7
19799.152084	-47.5	26.8	-20.7

Spurious

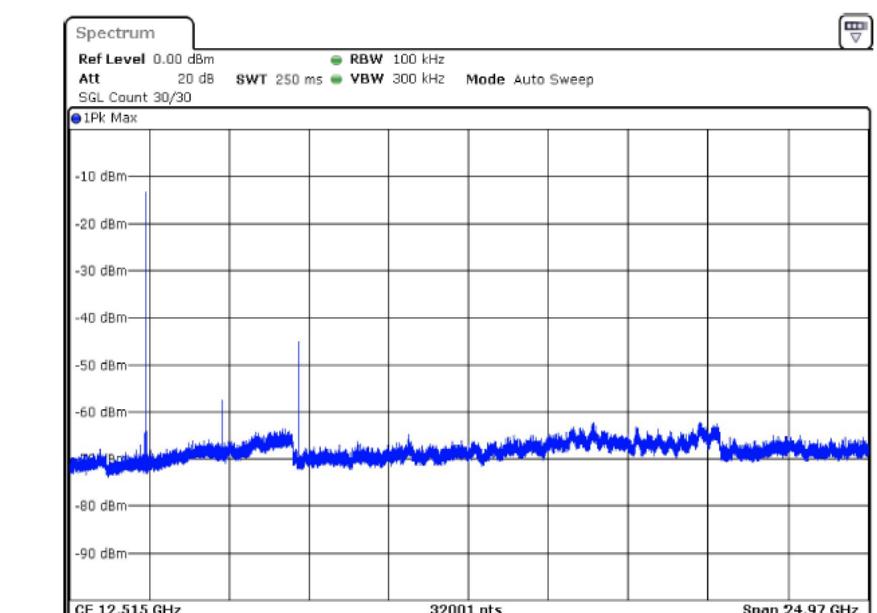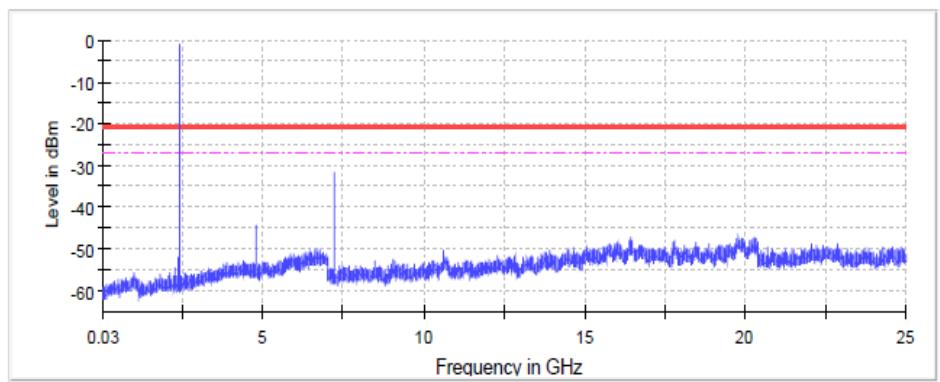

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 38 of 41



Testing Cert. No. 1627-01

**2441 MHz**

Plots for packet type 3-DH3 shown below.

**Pre Measurements**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
7322.734985	-32.9	12.1	-20.8
4882.070027	-43.9	23.0	-20.8
7323.515249	-46.4	25.6	-20.8
7321.954722	-47.3	26.5	-20.8
20284.476126	-47.3	26.5	-20.8
16492.394382	-47.3	26.5	-20.8
20256.386632	-47.4	26.6	-20.8
19742.192832	-47.4	26.6	-20.8
19903.707425	-47.6	26.8	-20.8
19757.798106	-47.6	26.8	-20.8
20177.579995	-47.7	26.8	-20.8
19789.008656	-47.7	26.9	-20.8
19827.241579	-47.8	27.0	-20.8
19798.371821	-47.8	27.0	-20.8
19739.071777	-47.8	27.0	-20.8

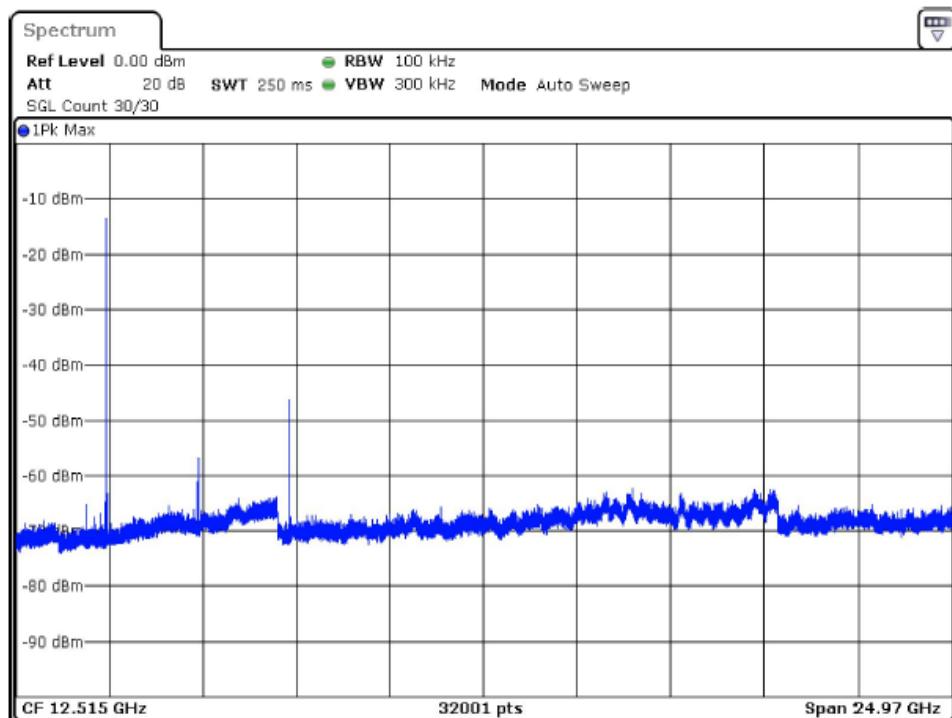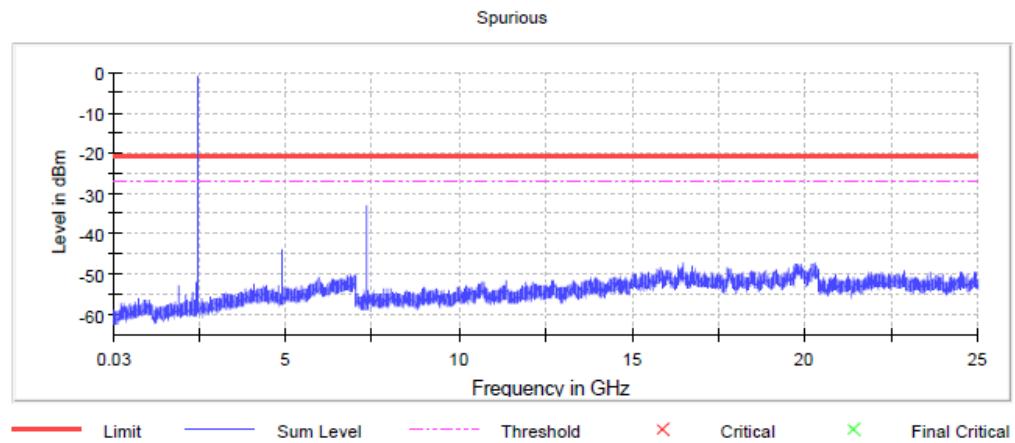

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828





**2480 MHz**

Plots for packet type 3-DH3 shown below.

**Pre Measurements**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
7439.774545	-33.6	12.6	-21.0
19806.174458	-45.7	24.6	-21.0
4960.096400	-45.8	24.8	-21.0
7438.994282	-46.3	25.3	-21.0
19837.385007	-47.1	26.1	-21.0
20228.297138	-47.1	26.1	-21.0
19929.456128	-47.3	26.3	-21.0
19743.753359	-47.4	26.4	-21.0
19809.295513	-47.5	26.5	-21.0
19766.381007	-47.6	26.6	-21.0
19781.206018	-47.7	26.7	-21.0
20275.112962	-47.7	26.7	-21.0
19764.820480	-47.8	26.7	-21.0
19778.084963	-47.8	26.7	-21.0
19820.999469	-47.8	26.8	-21.0

Spurious

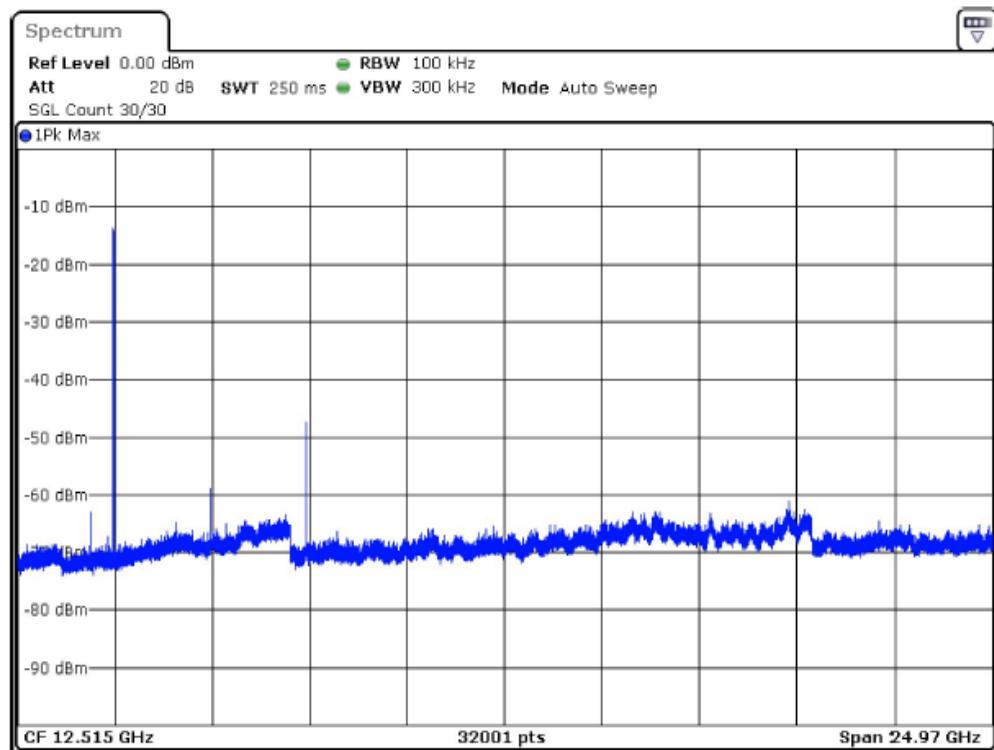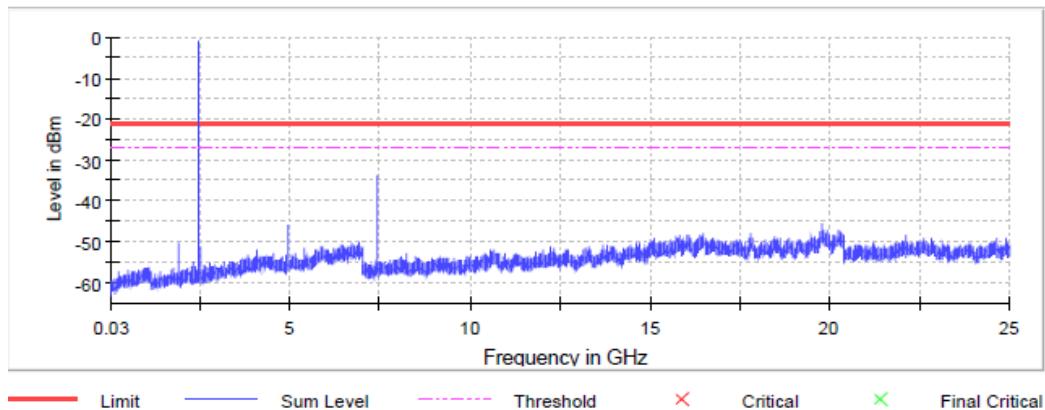



---

**Curtis-Straus LLC, a wholly owned subsidiary of BV CPS**  
**One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828**



page 41 of 41