

TEST REPORT

Report Number: 102689370MPK-012

Project Number: G102689370

September 08, 2016

**Testing performed on
Sevena Breast Pump**

Model: 07A

FCC ID: 2AHRJ-07A

to

FCC Part 15 Subpart C (15.247)

Industry Canada RSS-247 Issue 1

FCC Part 15, Subpart B

Industry Canada ICES-003

For

Exploramed NC7, Inc.

Test Performed by:

Intertek

1365 Adams Court

Menlo Park, CA 94025 USA


Test Authorized by:

Exploramed NC7, Inc.

201 San Antonio Circle #172

Mountain View, CA 94040 USA

Prepared by:


Aaron Chang

Date: September 08, 2016

Reviewed by:


Krishna K Vemuri


Date: September 08, 2016

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

Report No. 102689370MPK-012

Equipment Under Test:	Sevena Breast Pump
Trade Name:	Sevena Breast Pump
Model Number:	07A
Serial Number:	P00464 (conducted sample) P00463 (conducted sample with 50 Ohm termination)
Applicant:	Exploramed NC7, Inc.
Contact:	Keri Ng
Address:	Exploramed NC7, Inc. 201 San Antonio Circle #172 Mountain View, CA 94040
Country	USA
Telephone:	(650) 550-0089
Email:	kng@exploramed.com
Applicable Regulation:	FCC Part 15 Subpart C (15.247) Industry Canada RSS-247 Issue 1 FCC Part 15, Subpart B Industry Canada ICES-003
Date of Test:	August 15 – August 26, 2016

We attest to the accuracy of this report:



Aaron Chang
Project Engineer



Krishna K Vemuri
Engineering Team Lead

TABLE OF CONTENTS

1.0	Summary of Tests	5
2.0	General Information.....	6
2.1	Product Description	6
2.2	Related Submittal(s) Grants.....	7
2.3	Test Facility	7
2.4	Test Methodology.....	7
2.5	Measurement Uncertainty.....	7
3.0	System Test Configuration.....	8
3.1	Support Equipment	8
3.2	Block Diagram of Test Setup.....	8
3.3	Justification.....	9
3.4	Software Exercise Program.....	9
3.5	Mode of Operation during Test.....	9
3.5	Modifications Required for Compliance	9
3.6	Additions, Deviations and Exclusions from Standards.....	9
4.0	Measurement Results.....	10
4.1	6-dB Bandwidth and Occupied Bandwidth	10
4.1.1	Requirement.....	10
4.1.2	Procedure	10
4.1.3	Test Result	11
4.2	Maximum Peak Conducted Output Power at Antenna Terminals	24
4.2.1	Requirement.....	24
4.2.2	Procedure	24
4.3.3	Test Result	25
4.3	Maximum Power Spectral Density	32
4.3.1	Requirement.....	32
4.3.2	Procedure	32
4.3.3	Test Result	33
4.4	Unwanted Conducted Emissions	40
4.4.1	Requirement.....	40
4.4.2	Procedure	40
4.4.3	Test Result	40
4.5	Transmitter Radiated Emissions	49
4.5.1	Requirement.....	49
4.5.2	Procedure	49
4.5.3	Field Strength Calculation	50
4.5.4	Antenna-port conducted measurements	51
4.5.6	General Procedure for conducted measurements in restricted bands.....	51
4.5.7	Test Results.....	51
4.5.8	Test setup photographs	78
4.6	Radiated Emissions.....	82
4.6.1	Requirement.....	82
4.6.2	Procedures.....	83
4.6.3	Test Results.....	84

4.6.4	Test Configuration Photographs	88
4.7	AC Line Conducted Emission	90
4.7.1	Requirement.....	90
4.7.2	Procedure	90
4.7.3	Test Result	91
4.7.4	Test Configuration Photographs	92
5.0	List of Test Equipment	93
6.0	Document History	94
Annex A	Duty Cycle Measurement.....	95

1.0 Summary of Tests

Test	Reference FCC	Reference Industry Canada	Result
Radiated Emissions	15.109	ICES-003	Complies
AC Line Conducted Emission	15.107	ICES-003	Complies
RF Output Power	15.247(b)(3)	RSS-247, 5.4.4	Complies
6 dB Bandwidth	15.247(a)(2)	RSS-247, 5.2.1	Complies
Power Density	15.247(e)	RSS-247, 5.2.2	Complies
Out of Band Antenna Conducted Emission	15.247(d)	RSS-247, 5.5	Complies
Transmitter Radiated Emissions	15.247(d), 15.209, 15.205	RSS-247, 5.5	Complies
AC Line Conducted Emission	15.207	RSS-GEN	Complies
Antenna Requirement	15.203	RSS-GEN	Complies (Internal Antenna & Unique connector)
RF Exposure	15.247(i), 2.1093(d)	RSS-102	Complies

EUT receive date:

August 15, 2016

EUT receive condition:

The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date:

August 15, 2016

Test completion date:

August 26, 2016

The test results in this report pertain only to the item tested.

2.0 General Information

2.1 Product Description

Exploramed NC7, Inc. supplied the following description of the EUT:

As described by the manufacturer, the Exploramed NC7 Breast Pump is intended to express milk from lactating women in order to collect milk from their breasts. The device is intended for a single user.

This test report covers only the Bluetooth radio.

Information about the Bluetooth radio is presented below:

Applicant	Exploramed NC7, Inc.
Model No.	07A
FCC Identifier	2AHRJ-07A
Type of transmission	Digital Transmission System (DTS)
Rated RF Output	2.43 dBm (1.75 mW)
Antenna(s) & Gain	Ceramic Chip Antenna, 1.7 dBi peak gain
EIRP	2.43 dBm + 1.7 dBi = 4.13 dBm (2.59 mW)
Frequency Range	2402 - 2480 MHz
Type of modulation/data rate	GFSK / 1Mbps
Number of Channel(s)	40
Applicant Name & Address	Exploramed NC7, Inc. 201 San Antonio Circle #172 Mountain View, CA 94040 USA

2.2 Related Submittal(s) Grants

None.

2.3 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.4 Test Methodology

Antenna conducted measurements were performed according to the FCC documents “Guidance for Performing Compliance Measurement on Digital Transmission Systems (DTS) Operating under §15.247” (KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016), and RSS-247, RSS-GEN.

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10-2013 & ANSI C63.4-2014. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Data Sheet" of this report.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions - antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 30MHz	30 MHz – 1 GHz	1 GHz – 18 GHz
Radiated emissions	-	4.5	5.9 dB
AC mains conducted emissions	2.1 dB	-	-

3.0 System Test Configuration


3.1 Support Equipment

Description	Manufacturer	Model No./ Part No.
Laptop	HP	EliteBook 840


3.2 Block Diagram of Test Setup

AC Mode:

Antenna was removed and co-axial connector with a cable was installed for Conducted Measurements.
50Ohm load was used for Radiated Measurements.

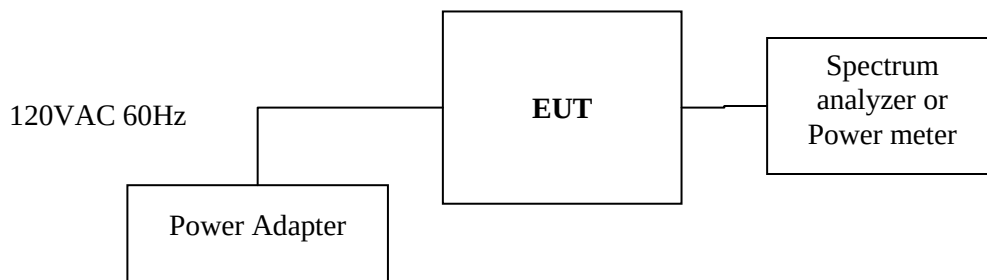

Battery Mode:

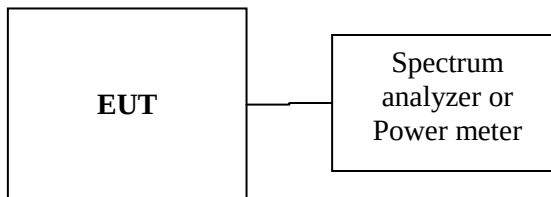

S = Shielded	F = With Ferrite
U = Unshielded	m = Length in Meters

3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT is programmed to transmit full power.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was provided by Exploramed NC7, Inc.

3.5 Mode of Operation during Test

During transmitter testing, the transmitter was setup to transmit at maximum RF power on low, middle and high frequencies/channels.

3.5 Modifications Required for Compliance

Intertek installed no modifications during compliance testing in order to bring the product into compliance.

3.6 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

4.0 Measurement Results

4.1 6-dB Bandwidth and Occupied Bandwidth FCC Rule: 15.247(a)(2); RSS-247 A8.2 and RSS-GEN;

4.1.1 Requirement

The minimum 6-dB bandwidth shall be at least 500 kHz

4.1.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

For FCC 6dB Channel Bandwidth the Procedure described in the FCC Publication 558074 D01 DTS Meas Guidance v03r05 April 8, 2016 was used to determine the DTS occupied bandwidth. Section 8.1 Option 1 was used.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

For 99% power bandwidth measurement, the bandwidth was determined by using the built-in 99% occupied bandwidth function of the spectrum analyzer. The resolution bandwidth is set to 1% of the selected span as is without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.

4.1.3 Test Result

AC Mode:


Frequency (MHz)	6-dB bandwidth FCC 15.247 & RSS-GEN, MHz	Occupied bandwidth, RSS-GEN, MHz	Plot
2402	0.697	--	1.1
	--	1.038	1.4
2440	0.706	--	1.2
	--	1.048	1.5
2480	0.730	--	1.3
	--	1.057	1.6

Battery Mode:

Frequency (MHz)	6-dB bandwidth FCC 15.247 & RSS-GEN, MHz	Occupied bandwidth, RSS-GEN, MHz	Plot
2402	0.629	--	1.7
	--	1.043	1.10
2440	0.629	--	1.8
	--	1.043	1.11
2480	0.634	--	1.9
	--	1.057	1.12


Date of Test:	August 15 - 16, 2016
Results	Complies

Plot 1. 1

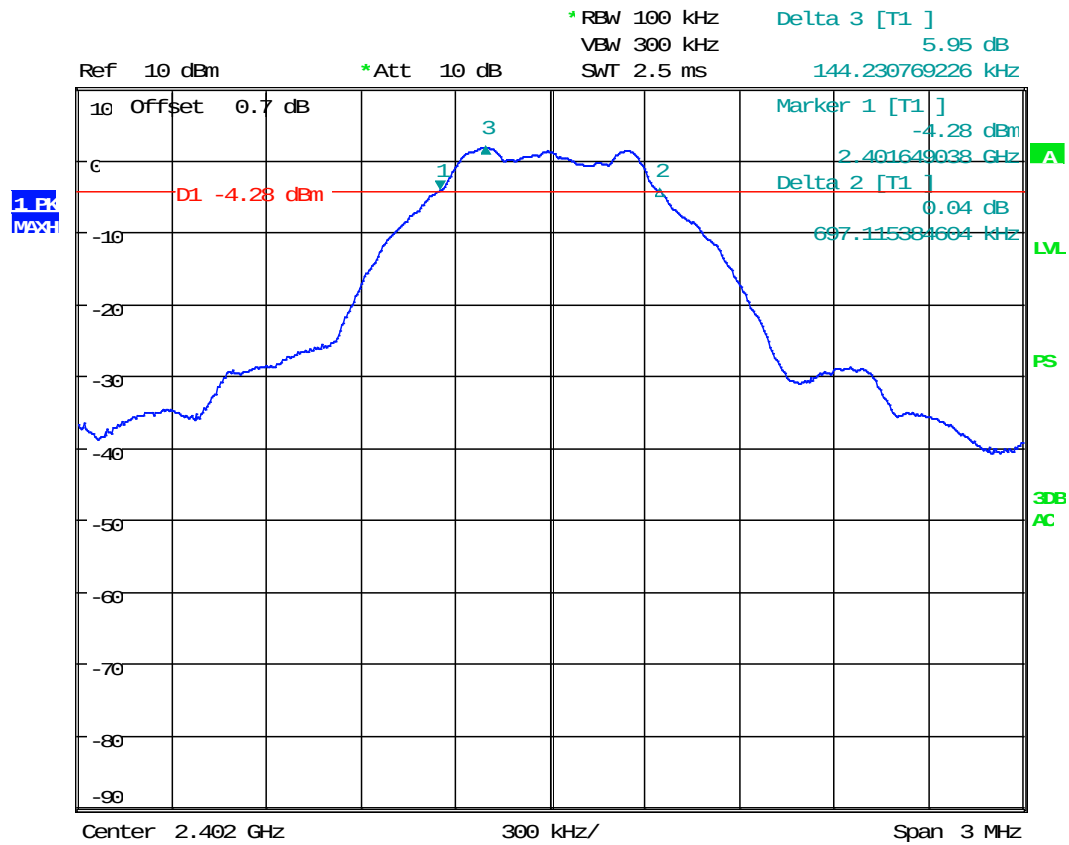


Date: 16.AUG.2016 13:40:58

Plot 1. 2

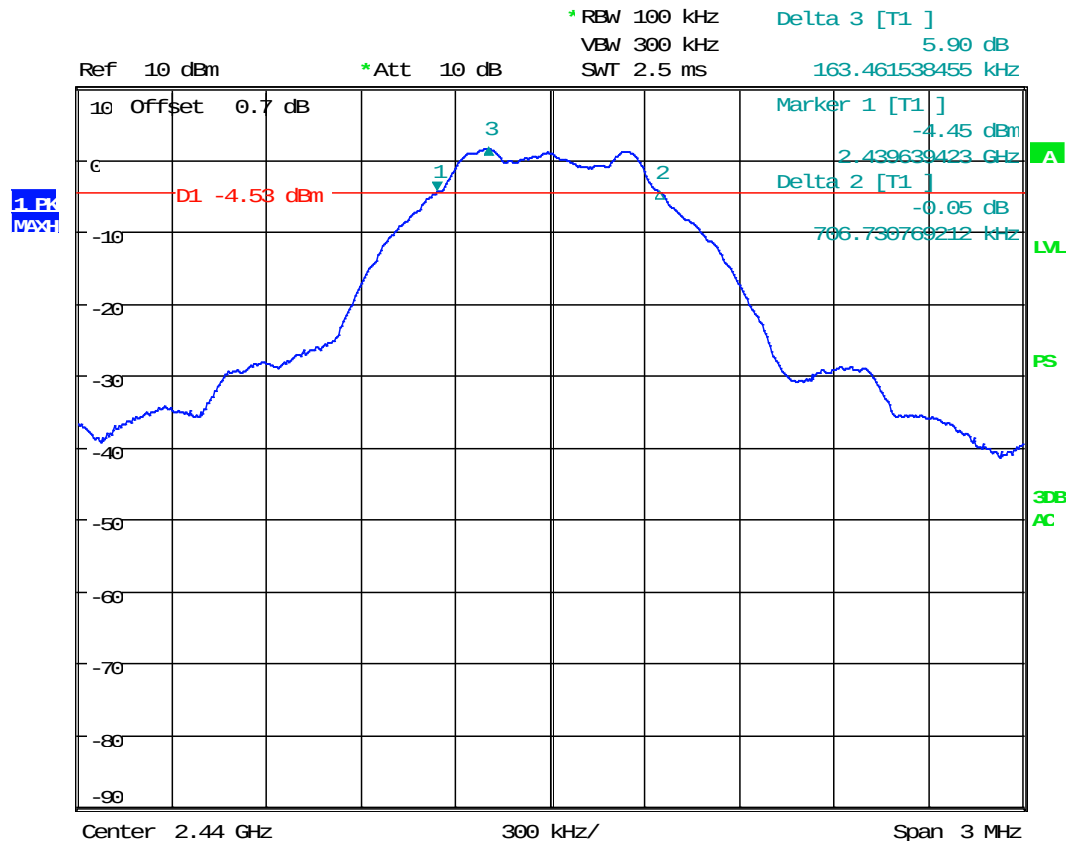


Date: 16.AUG.2016 13:43:15

Plot 1. 3

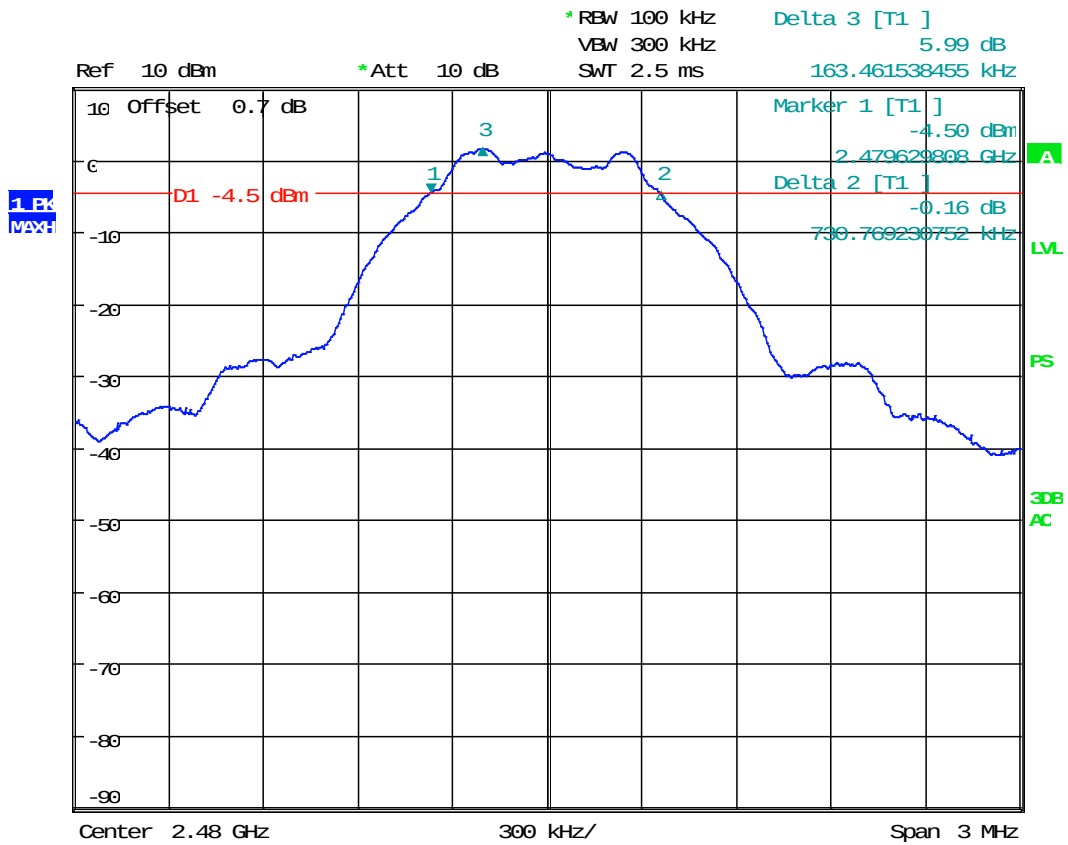


Date: 16.AUG.2016 13:44:54

Plot 1. 4

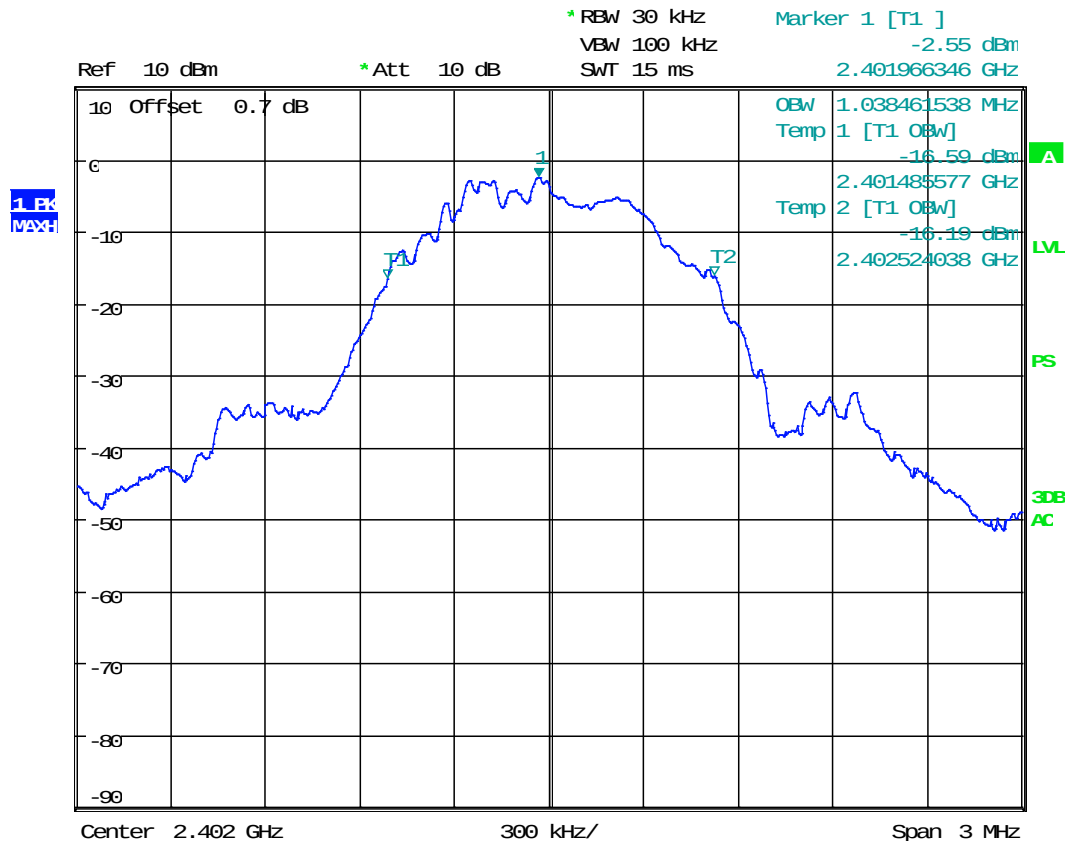


Date: 16.AUG.2016 13:49:51

Plot 1.5

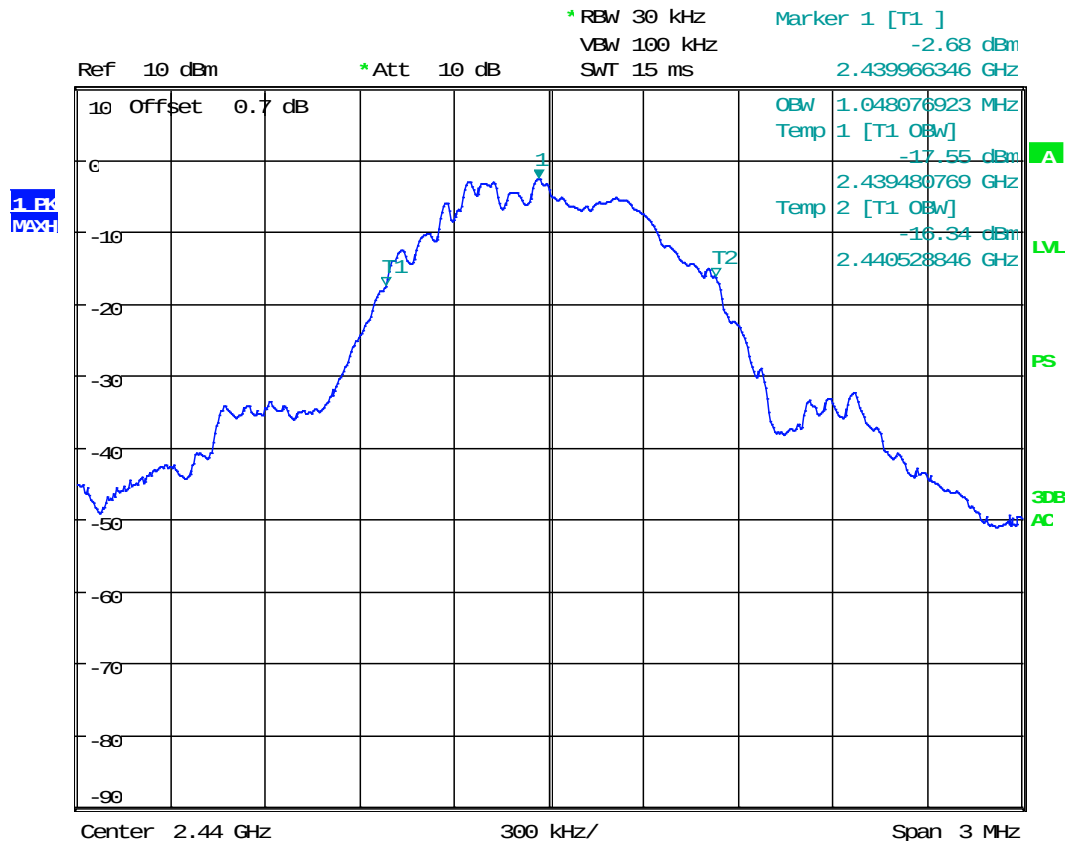


Date: 16.AUG.2016 13:48:41

Plot 1.6

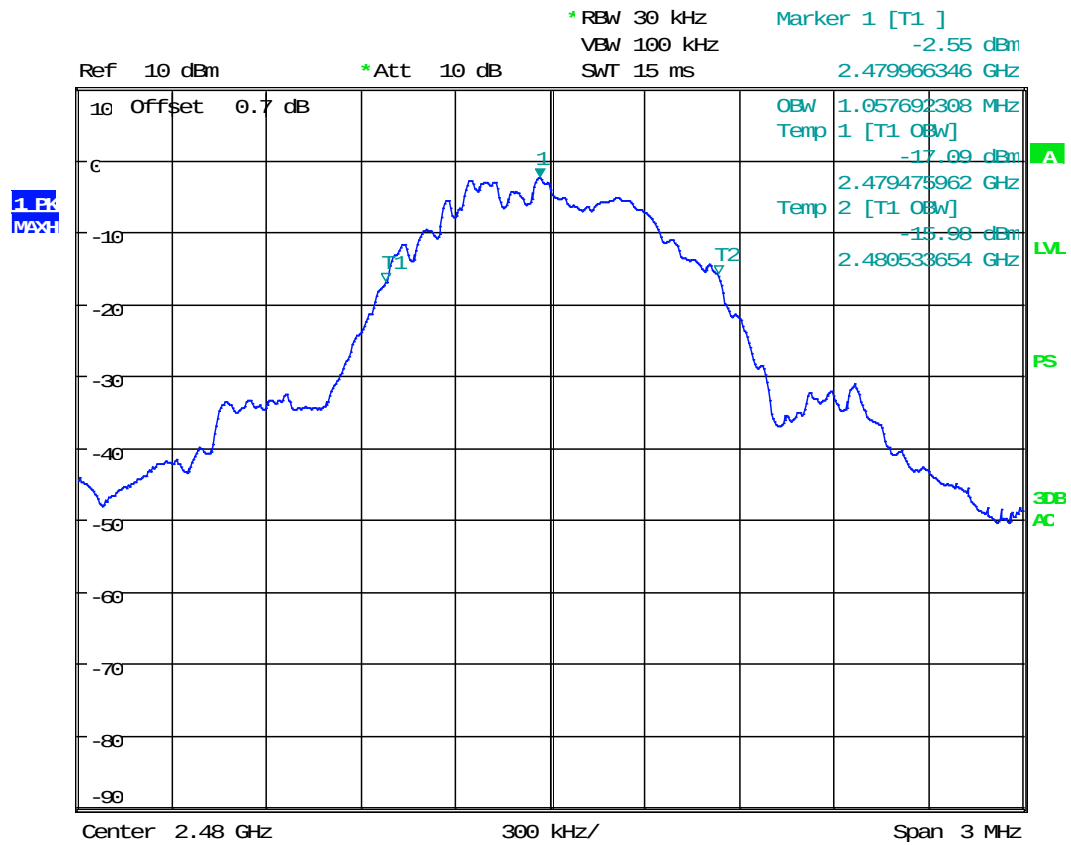


Date: 16.AUG.2016 13:48:02

Plot 1.7

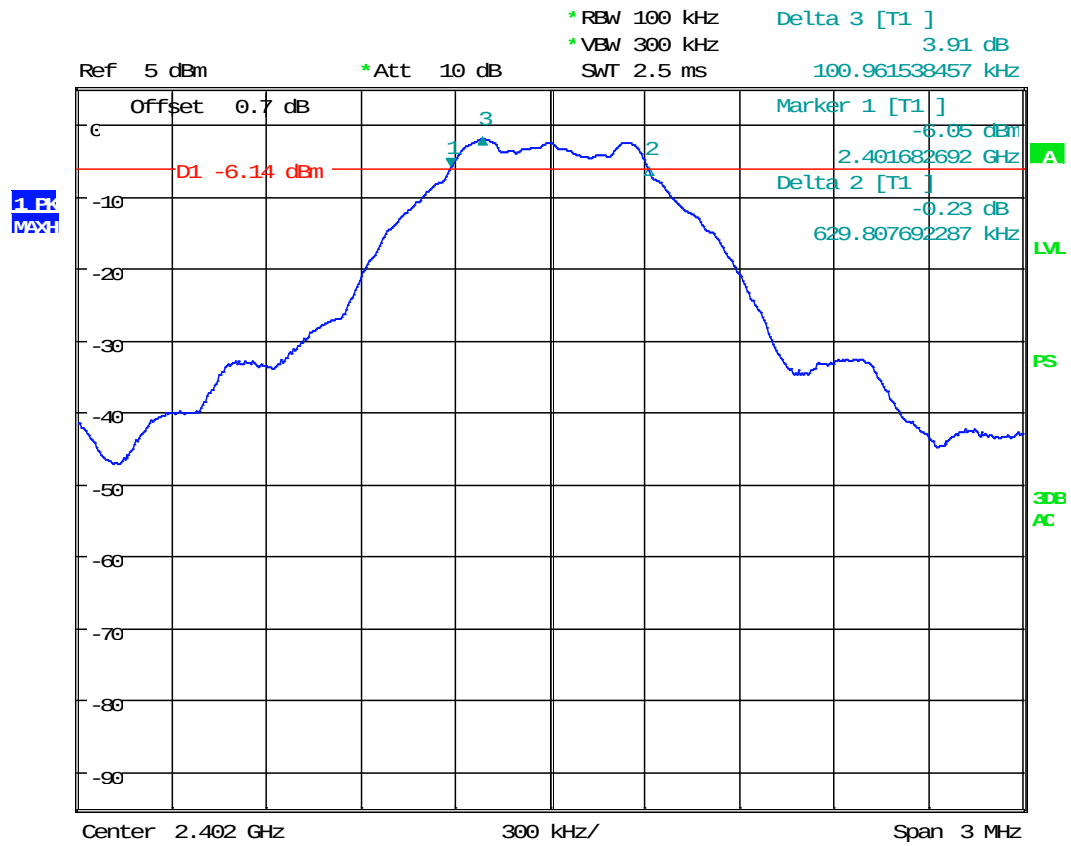


Date: 15.AUG.2016 14:06:03

Plot 1.8

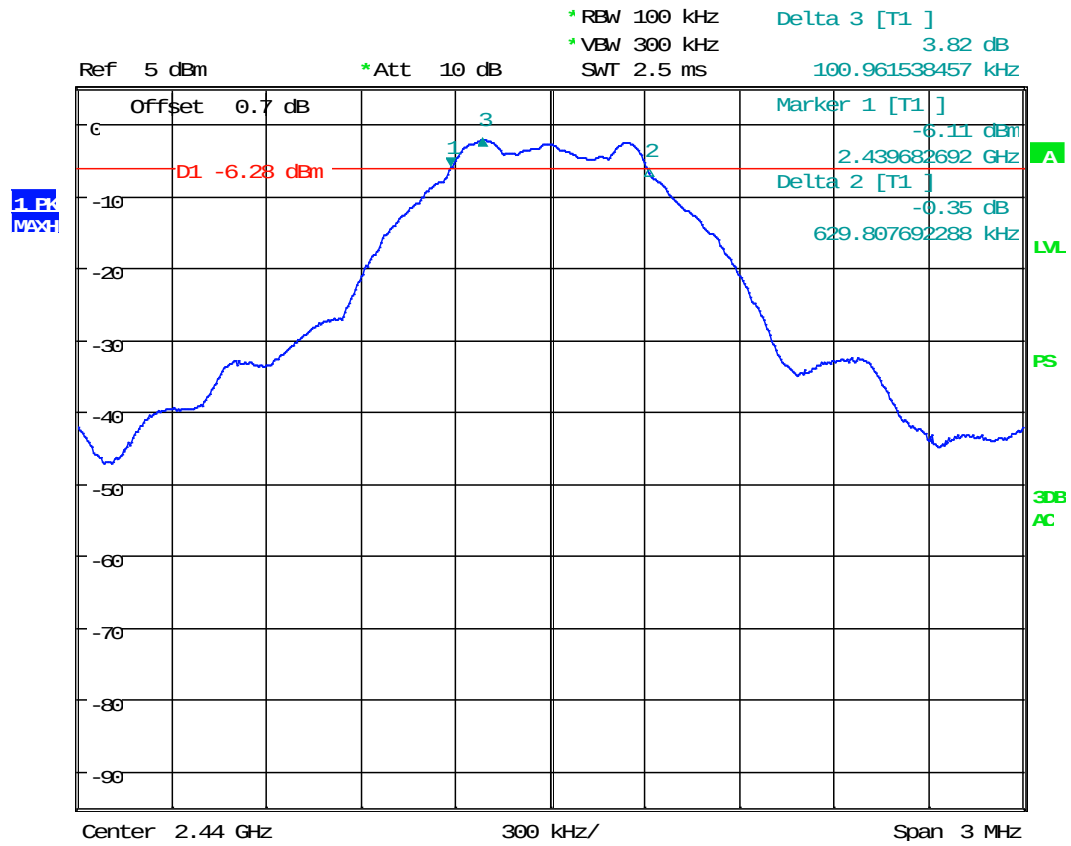


Date: 15.AUG.2016 14:03:35

Plot 1. 9

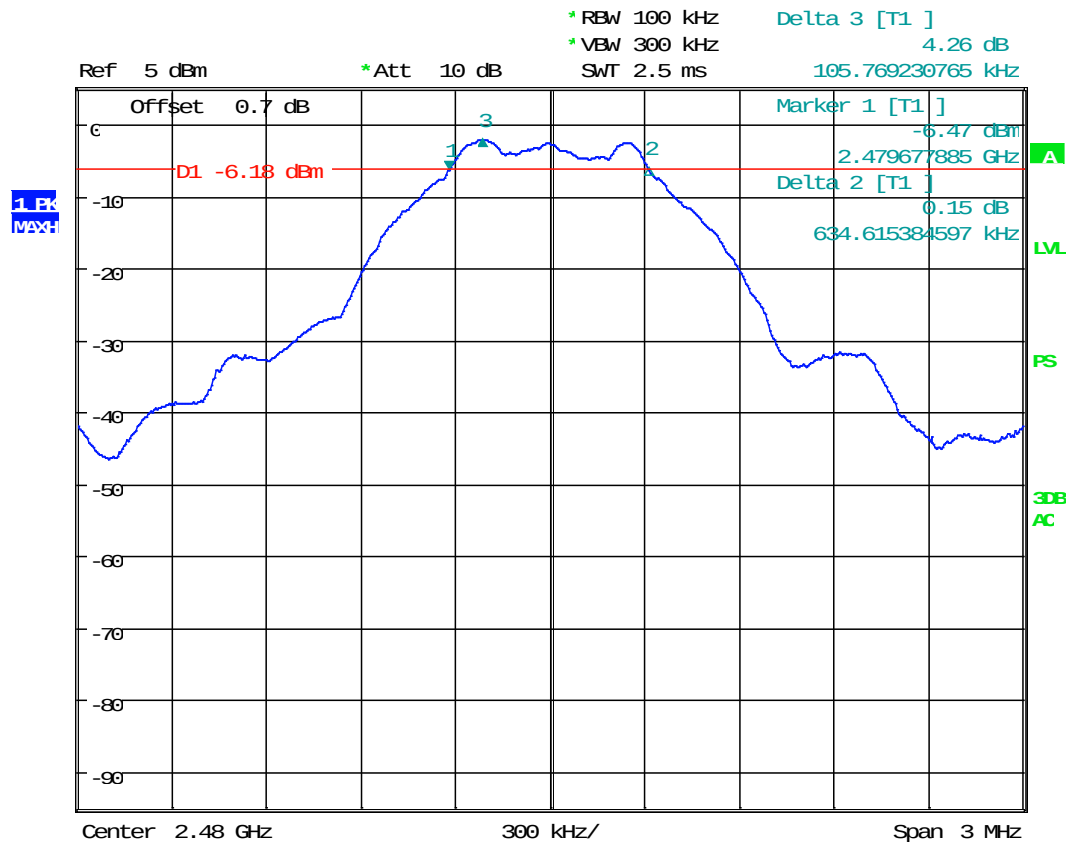


Date: 15.AUG.2016 14:01:50

Plot 1. 10

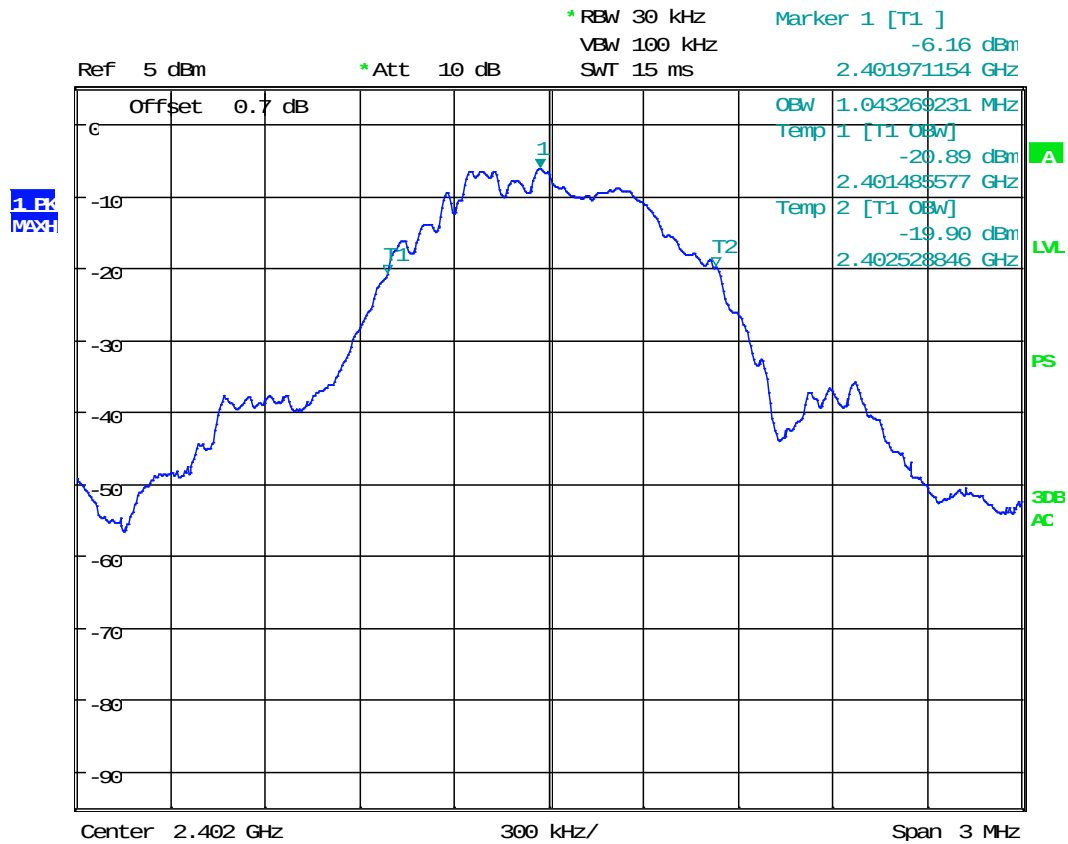


Date: 15.AUG.2016 14:09:38

Plot 1.11

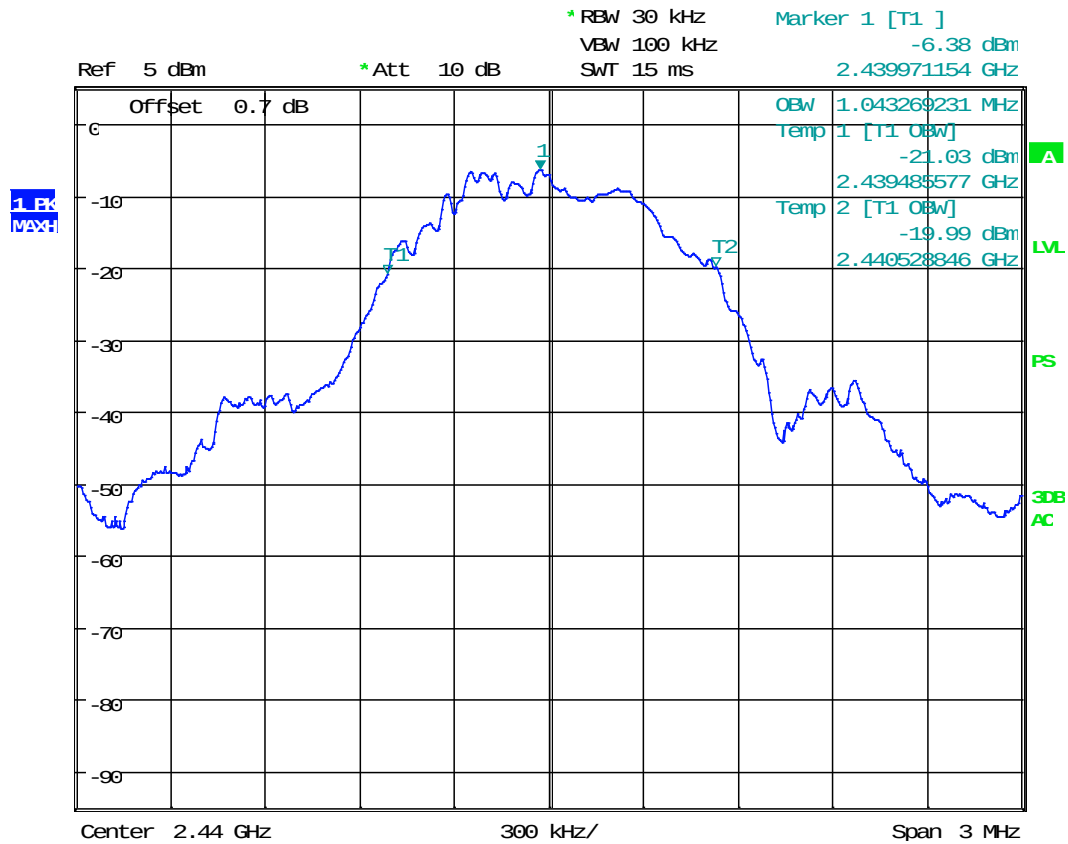

Date: 15.AUG.2016 14:10:31

Plot 1.12

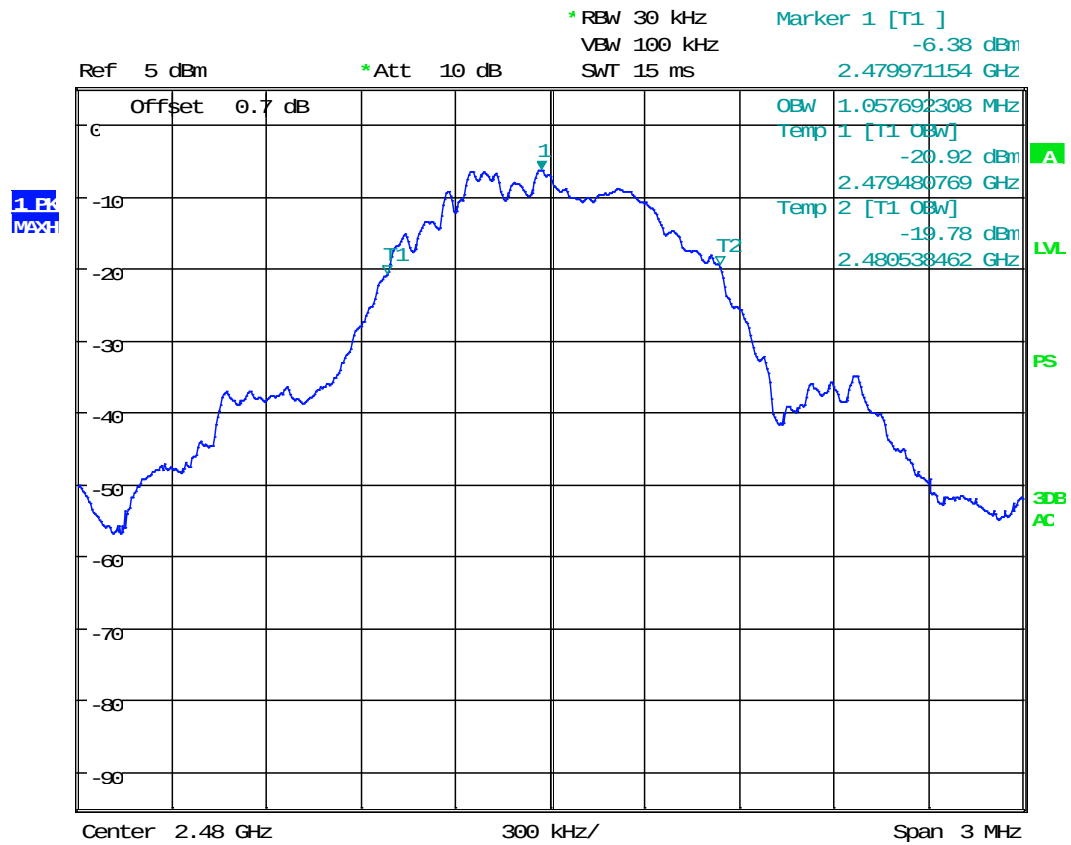

Date: 15.AUG.2016 14:11:47

4.2 Maximum Peak Conducted Output Power at Antenna Terminals FCC Rule: 15.247(b)(3); RSS-247 A8.4;

4.2.1 Requirement

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt or 30 dBm. For antennas with gains greater than 6 dBi, transmitter output level must be decreased appropriately, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Procedure

The procedure described in FCC Publication 558074 D01 DTS Meas Guidance v03r05 April 8, 2016 was used. Specifically, section 9.1.1 RBW $\geq$ DTS Bandwidth was utilized as the spectrum analyzer's resolution bandwidth was greater than the DTS bandwidth.

1. Set the RBW $\geq$ DTS Bandwidth
2. Set the VBW $\geq 3 \times$ RBW
3. Set the span $\geq 3 \times$ RBW
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max Hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

A spectrum analyzer was connected to the antenna port of the transmitter.

4.3.3 Test Result

Refer to the following plots 2.1 – 2.6 for the test details.

AC Power:


Frequency, MHz	Conducted Power (peak), dBm	Conducted Power (peak), mW	Plot
2402	2.39	1.73	2.1
2440	2.26	1.68	2.2
2480	2.36	1.72	2.3

Battery Power:

Frequency, MHz	Conducted Power (peak), dBm	Conducted Power (peak), mW	Plot
2402	2.43	1.75	2.4
2440	2.28	1.69	2.5
2480	2.38	1.73	2.6


Date of Test:	August 15, 2016
Results	Complies

Plot 2.1

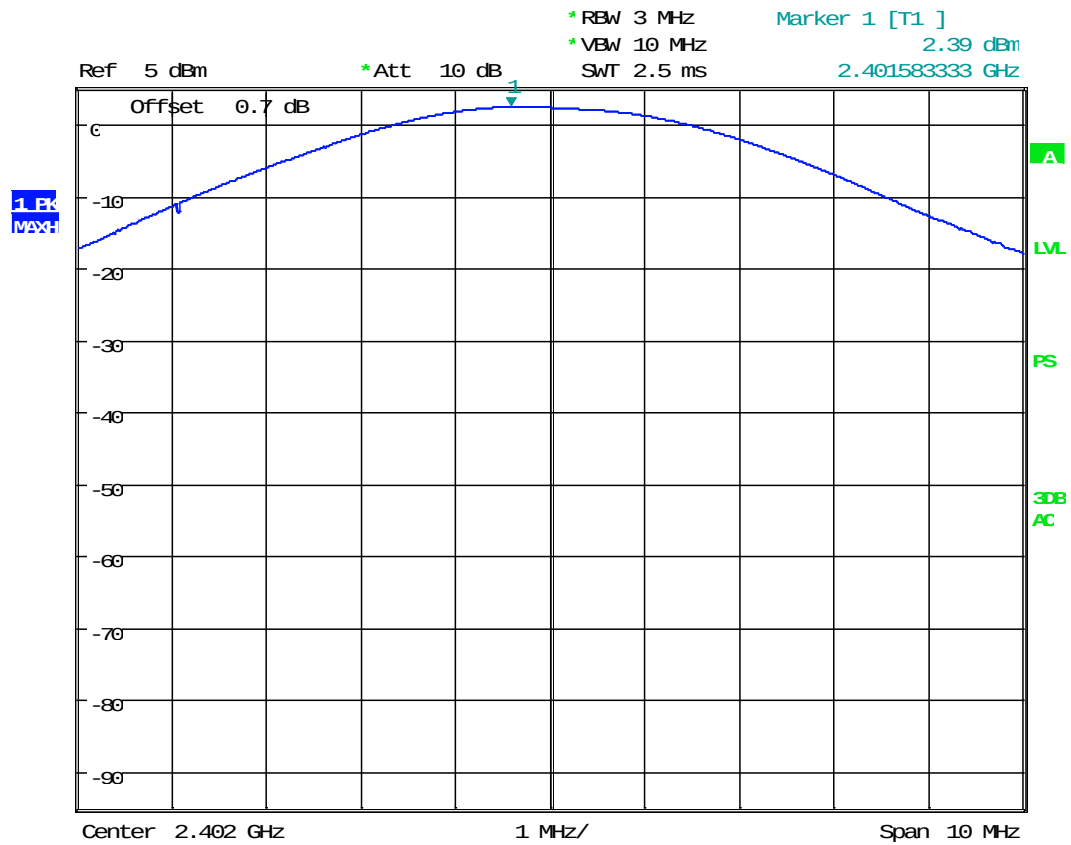


Date: 15.AUG.2016 16:58:51

Plot 2.2

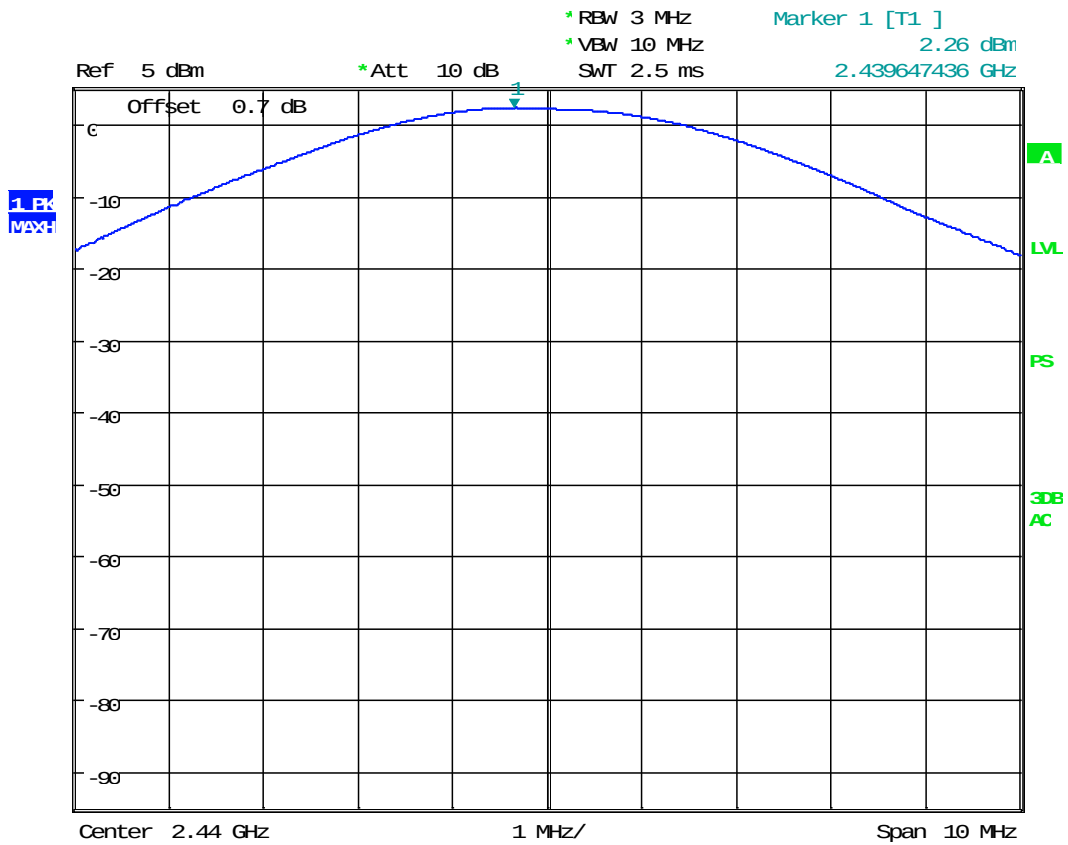


Date: 15.AUG.2016 16:59:42

Plot 2.3

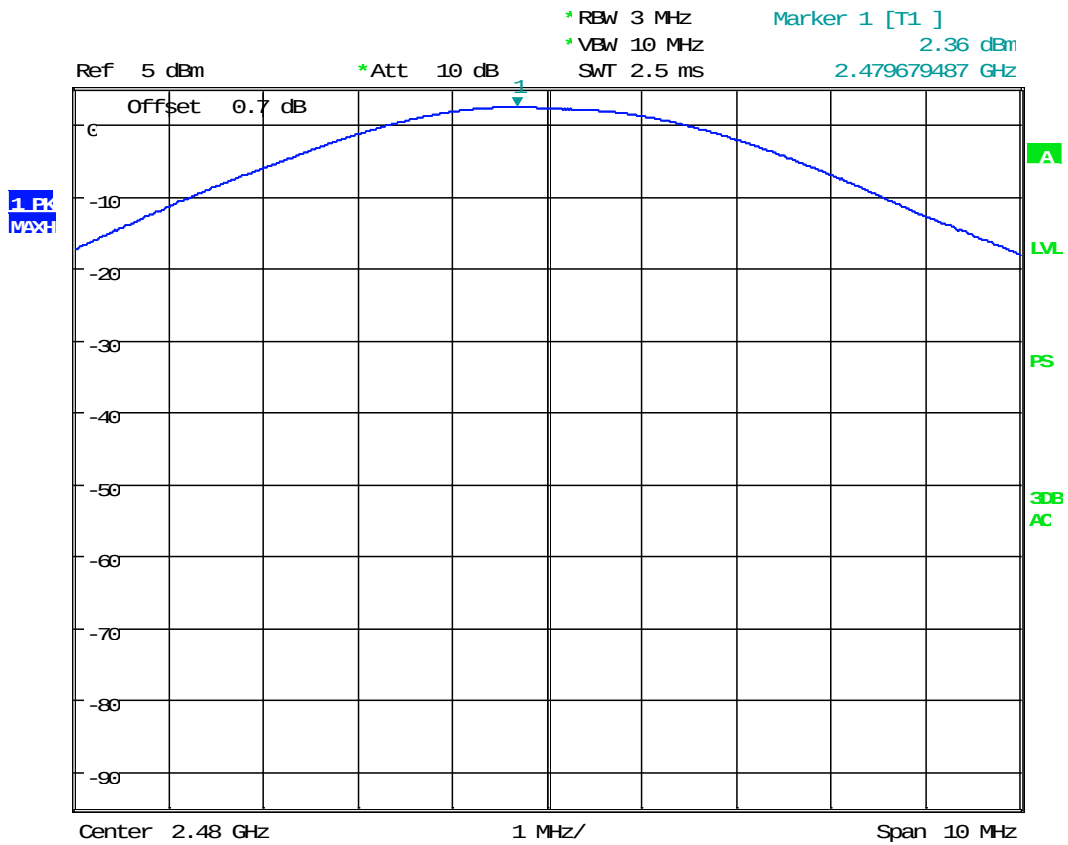


Date: 15.AUG.2016 17:00:21

Plot 2.4

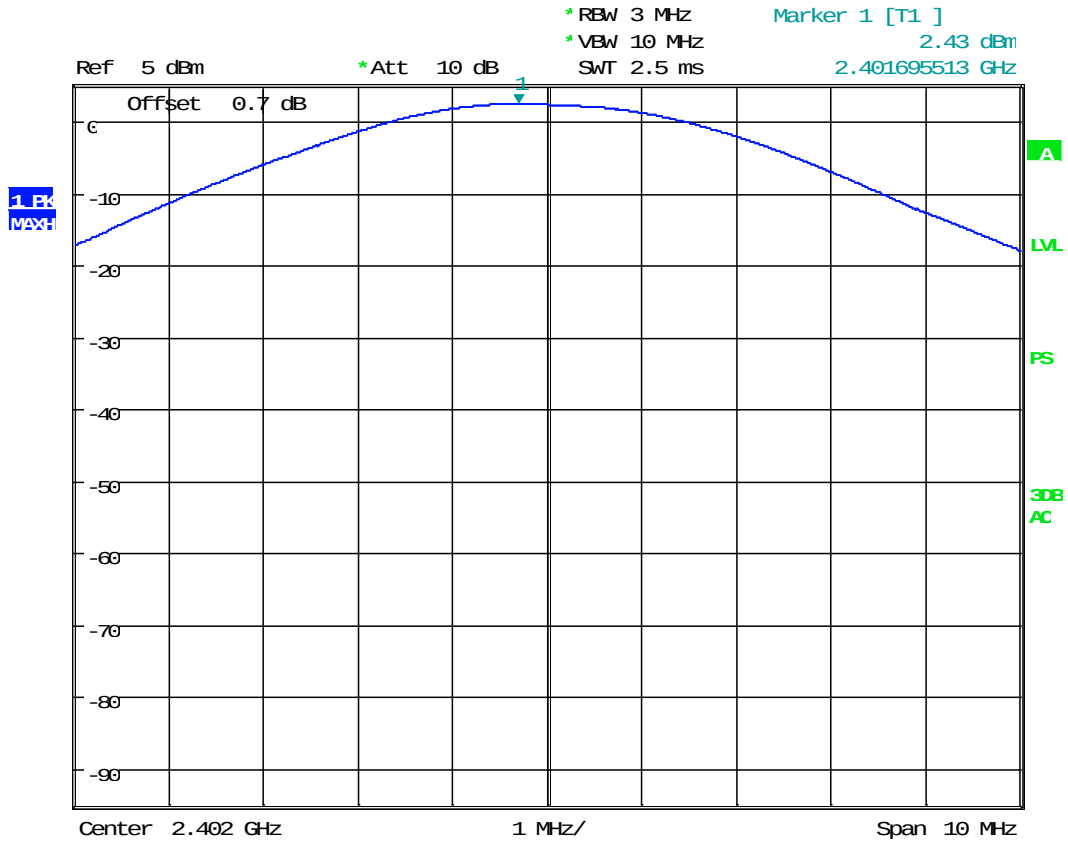


Date: 15.AUG.2016 16:46:03

Plot 2.5

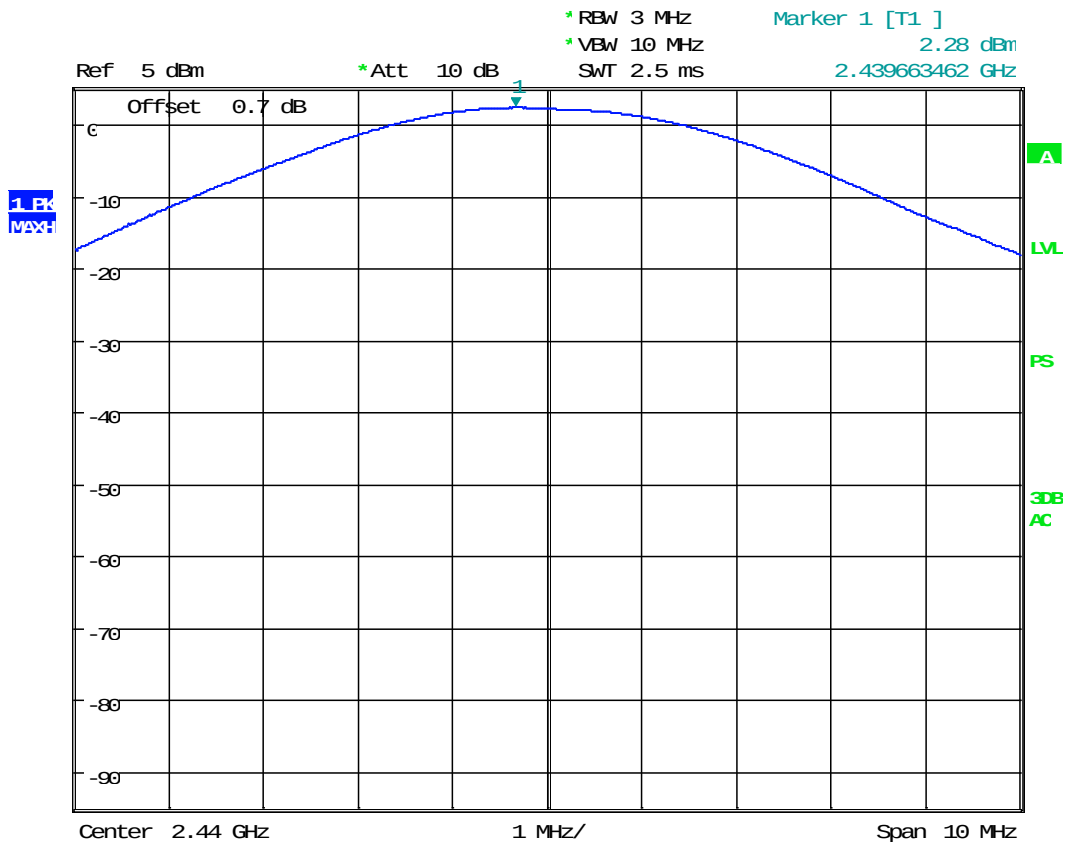

Date: 15.AUG.2016 16:47:16

Plot 2.6

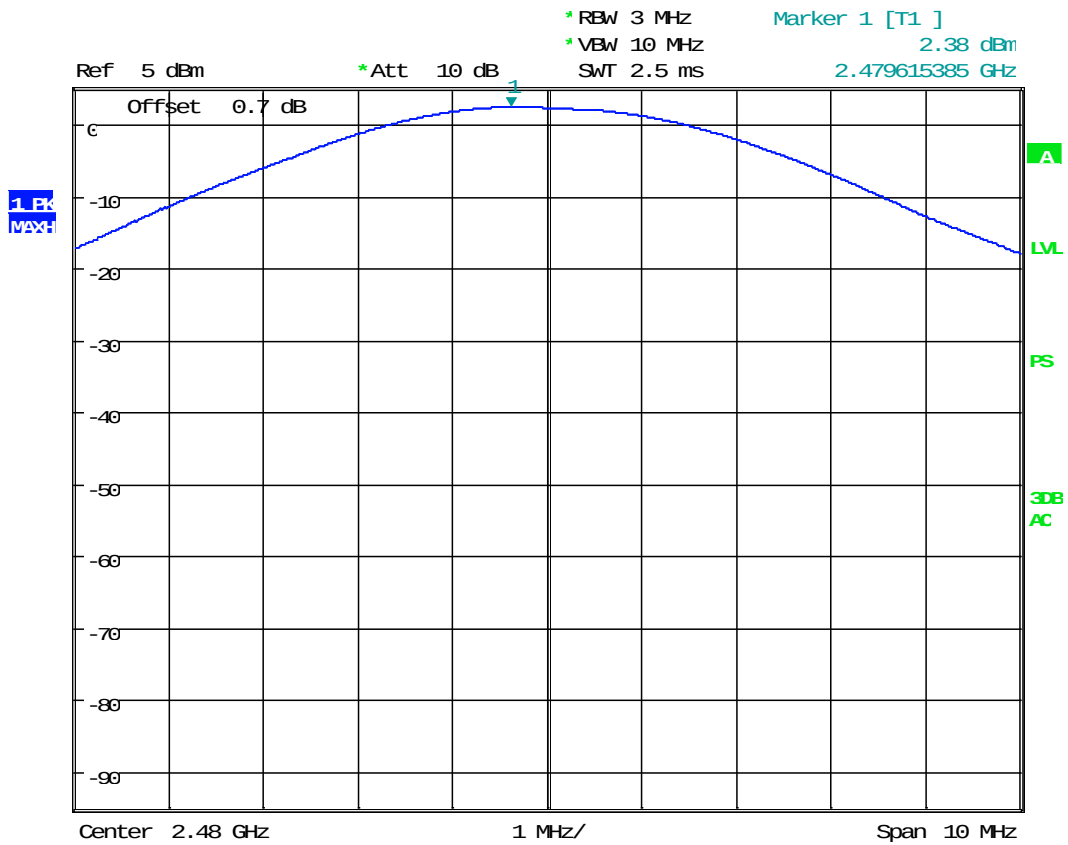

Date: 15.AUG.2016 16:48:04

4.3 Maximum Power Spectral Density FCC: 15.247 (e); RSS-247 A8.2b;

4.3.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna should not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

The procedure described in FCC Publication 558074 D01 DTS Meas Guidance v03r05 April 8, 2016, specifically section 10.2 Method PKPSD (peak PSD).

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.3.3 Test Result

Refer to the following plots 3.1 – 3.6 for the test result

AC Power:


Frequency, MHz	Maximum Power Spectral Density, dBm	Maximum Power Spectral Density Limit, dBm	Margin, dB	Plot
2402	-2.34	8.0	-10.34	3.1
2440	-2.55	8.0	-10.55	3.2
2480	-2.41	8.0	-10.41	3.3

Battery Power:

Frequency, MHz	Maximum Power Spectral Density, dBm	Maximum Power Spectral Density Limit, dBm	Margin, dB	Plot
2402	-2.24	8.0	-10.24	3.4
2440	-2.42	8.0	-10.42	3.5
2480	-2.46	8.0	-10.46	3.6


Date of Test:	August 16, 2016
Results	Complies

Plot 3.1

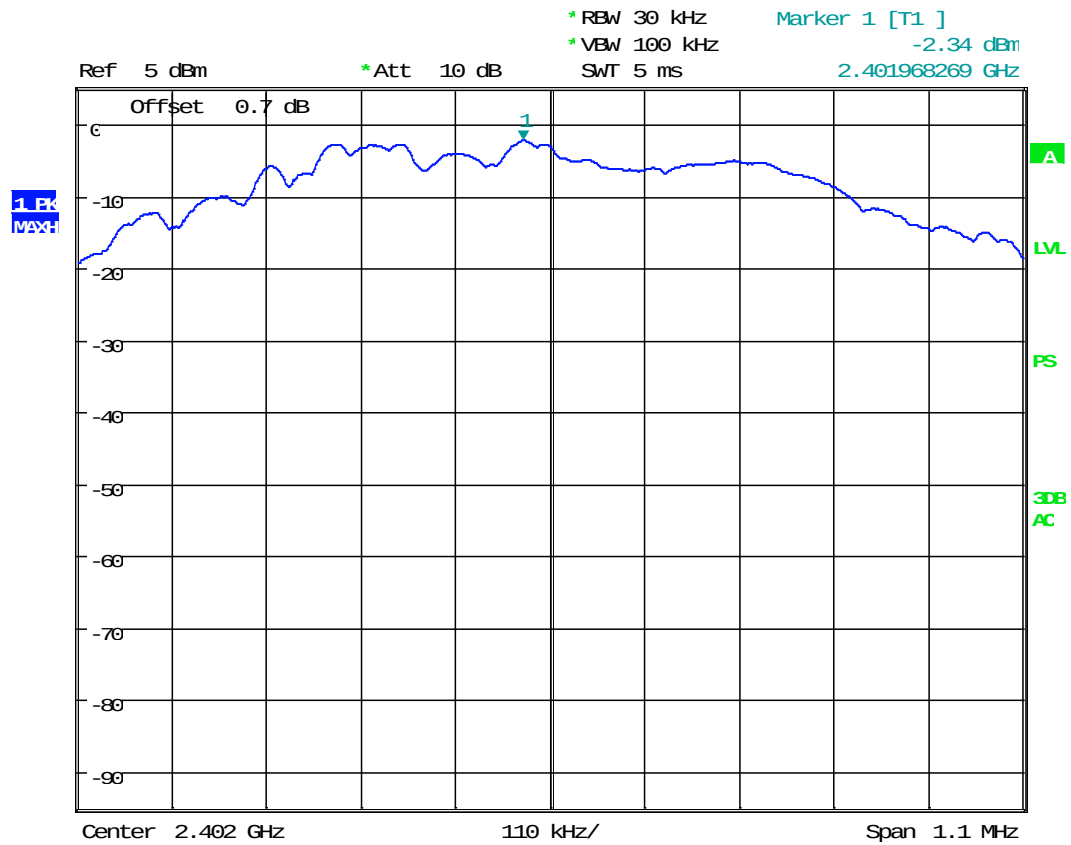


Date: 16.AUG.2016 13:37:29

Plot 3.2

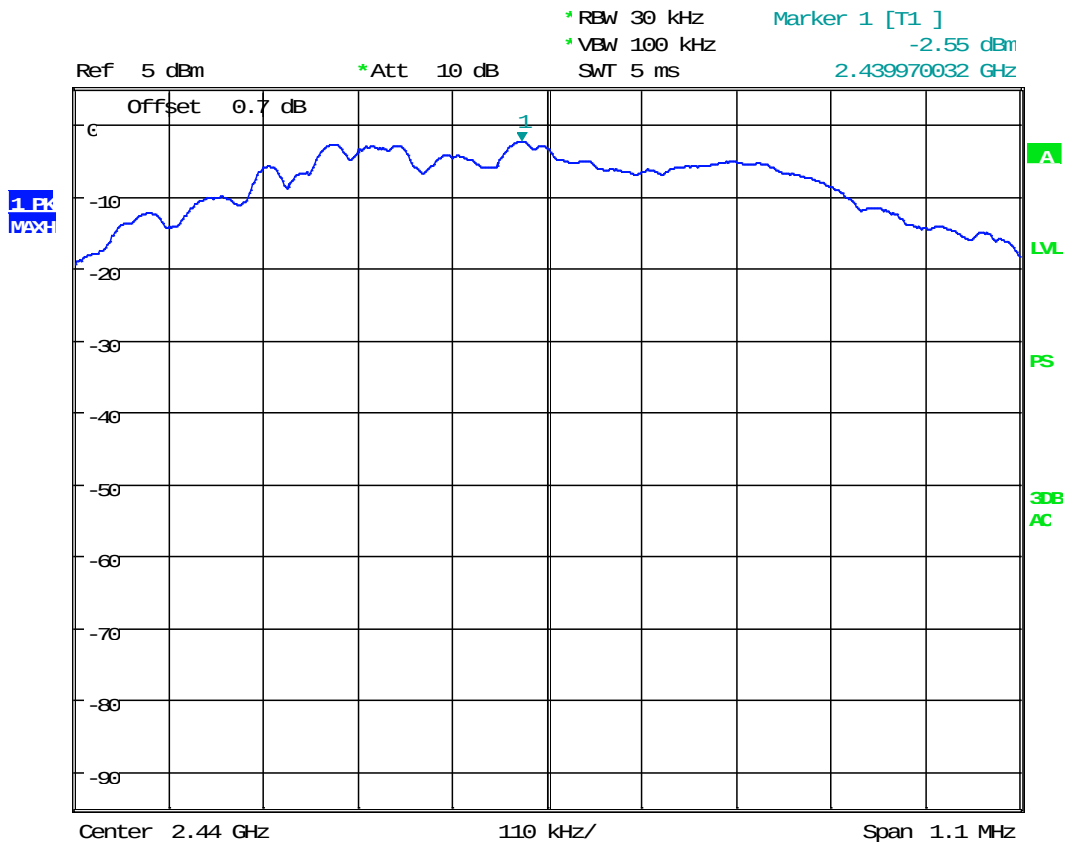


Date: 16.AUG.2016 13:36:46

Plot 3.3

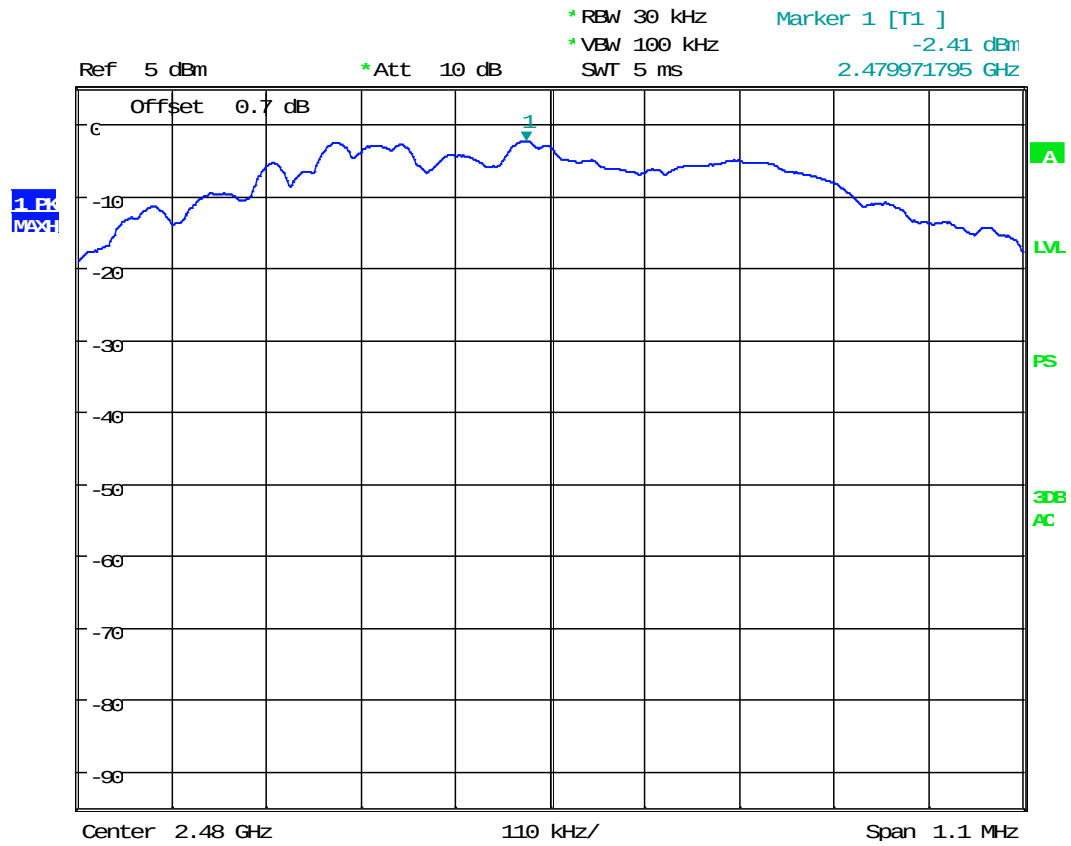


Date: 16.AUG.2016 13:35:57

Plot 3.4

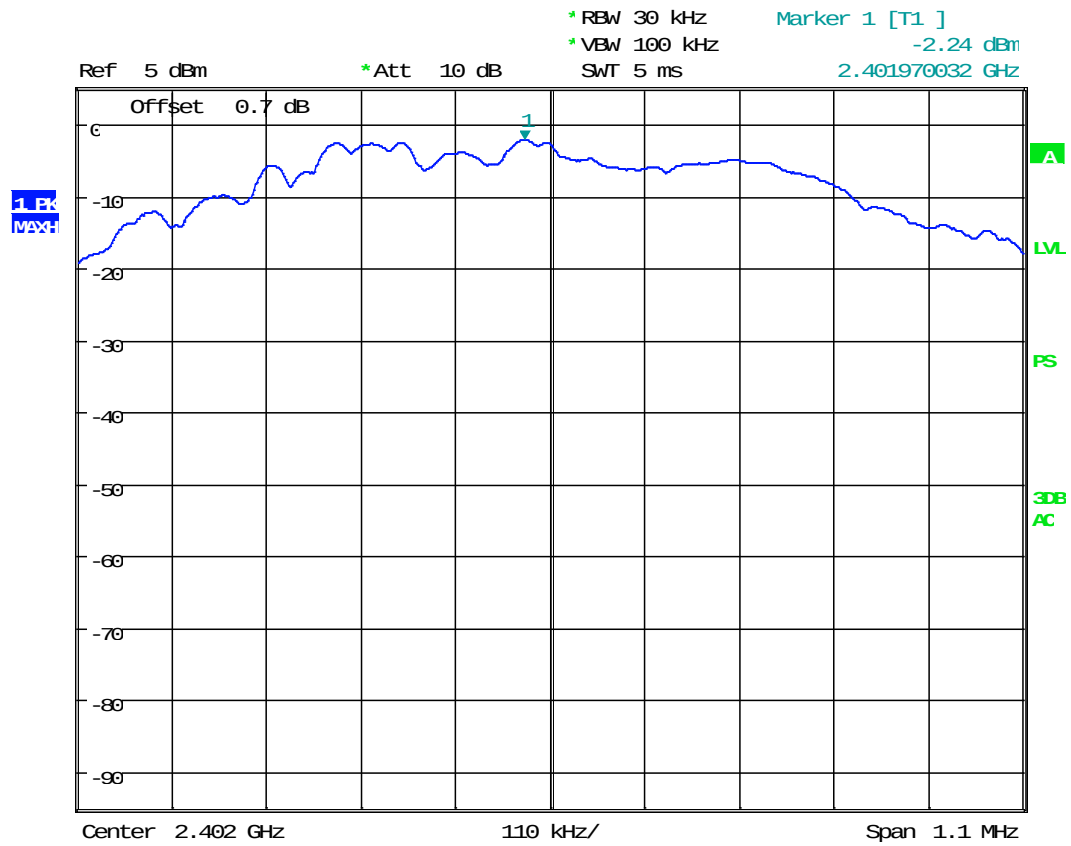


Date: 16.AUG.2016 13:33:46

Plot 3.5

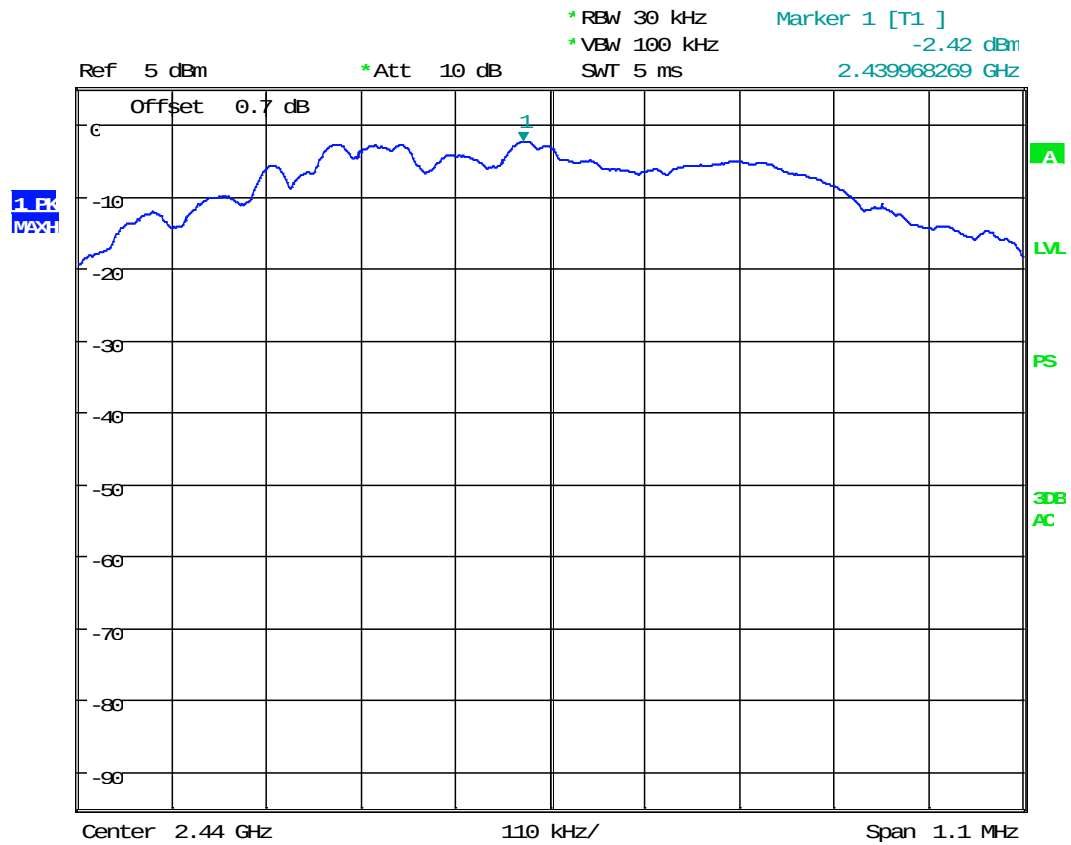

Date: 16.AUG.2016 13:34:28

Plot 3.6

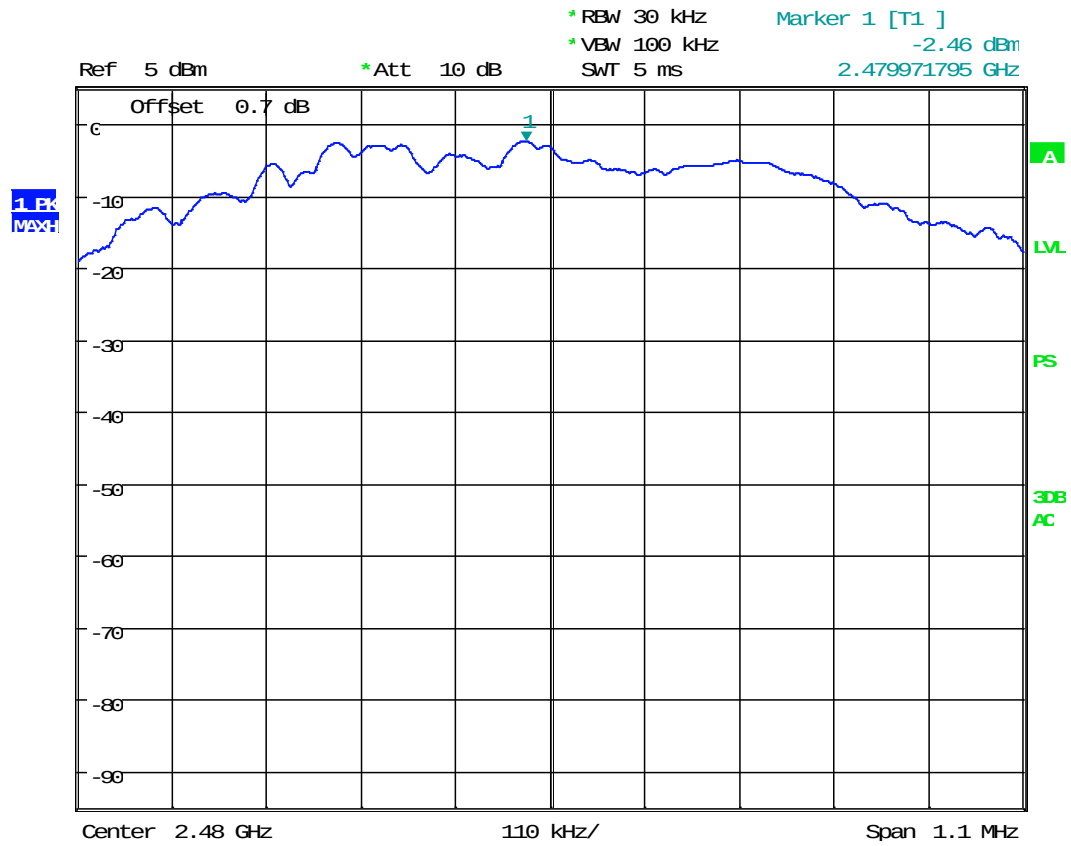

Date: 16.AUG.2016 13:35:06

4.4 Unwanted Conducted Emissions

FCC: 15.247(d); RSS-247 A8.5;

4.4.1 Requirement

In any 100 kHz bandwidth outside the EUT pass-band, the RF power shall be below the maximum in-band 100 kHz emissions by at least 20 dB (if peak power of in-band emission is measured) or 30 dB (if average power of in-band emission is measured).

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

4.4.2 Procedure

The procedure described in FCC Publication 558074 D01 DTS Meas Guidance v03r05 April 8, 2016, specifically section 11.0 Emissions in non-restricted frequency bands.

A spectrum analyzer was connected to the antenna port of the transmitter.

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


The unwanted emissions were measured from 30 MHz to 25 GHz. Plots below are corrected for cable loss and then compared to the limits.

4.4.3 Test Result

Refer to the following plots 4.1 – 4.10 for unwanted conducted emissions. The plot shows -20dB attenuation limit line.

Date of Test:	August 16, 2016
Results	Complies

Tx @ Low Channel, 2400 MHz Band Edge, AC Power
Plot 4.1

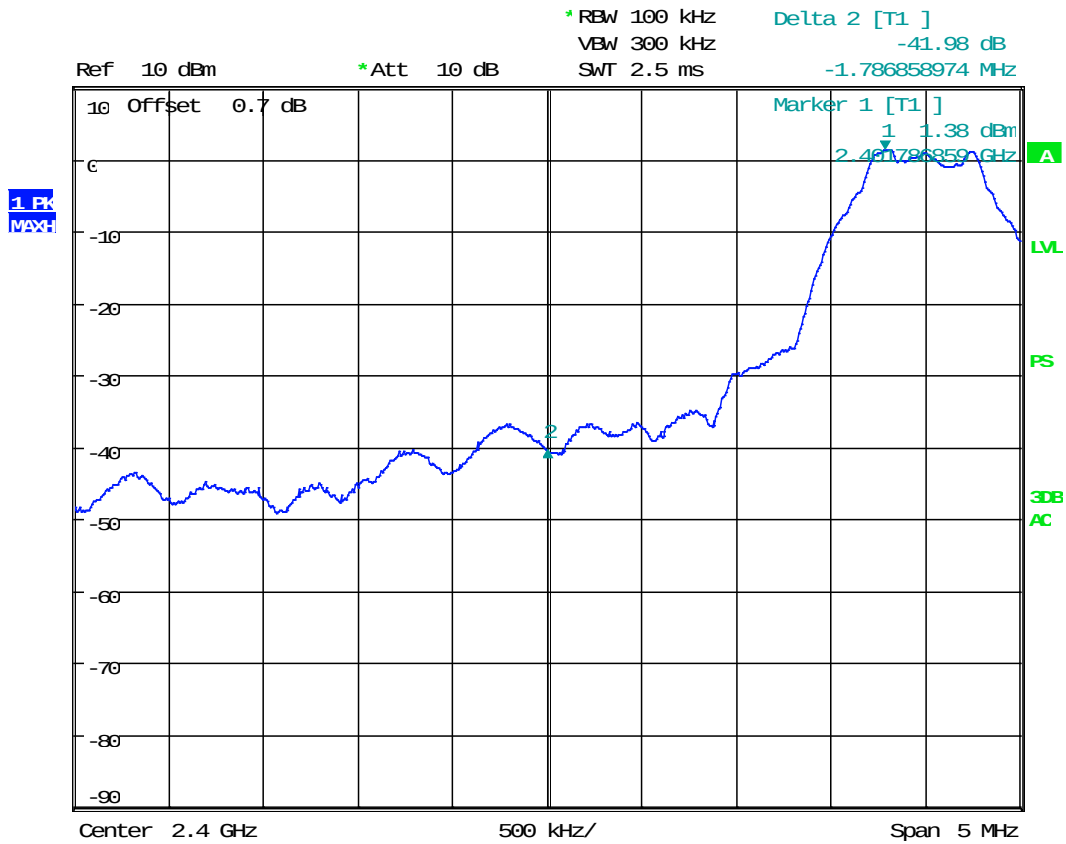


Date: 16.AUG.2016 13:59:29

Tx @ Low Channel, 2483.5 MHz Band Edge, AC Power
Plot 4.2




Date: 16.AUG.2016 13:58:08


Tx @ Low Channel, 2402 MHz, AC Power
30MHz -26GHz Conducted Spurious
Plot 4.3

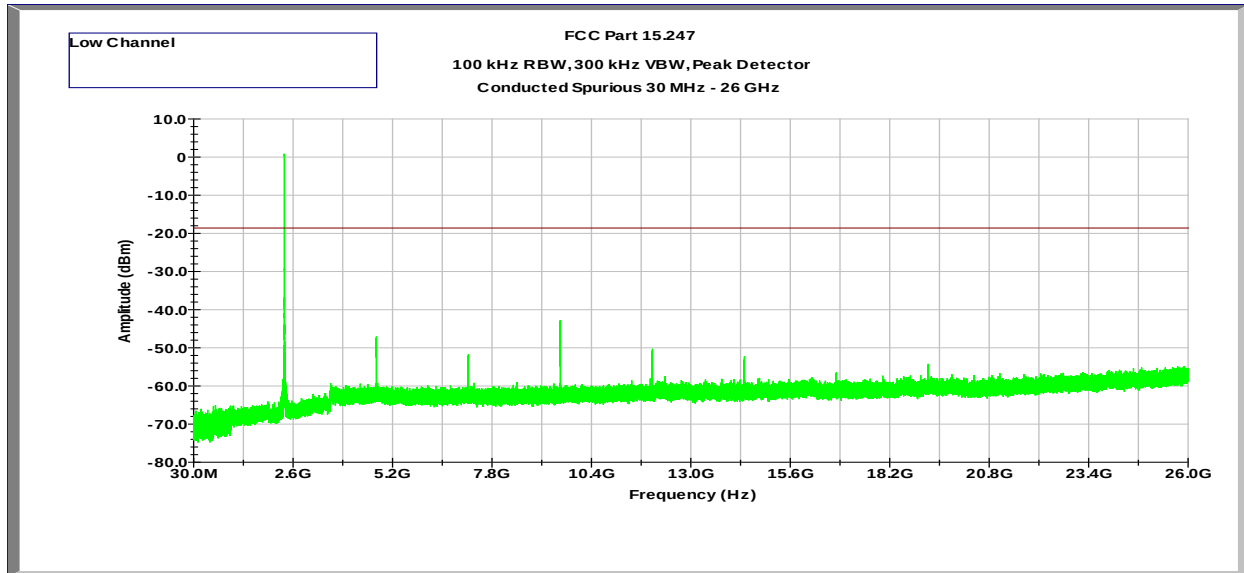


Tx @ Mid Channel, 2440 MHz, AC Power
30MHz -26GHz Conducted Spurious
Plot 4.4

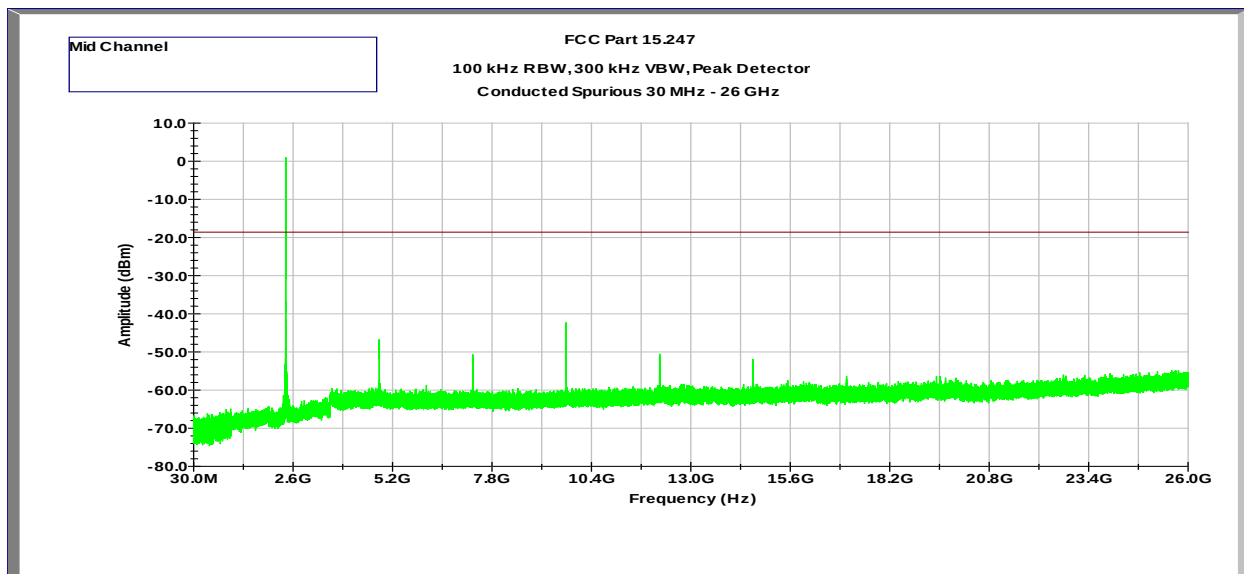

Tx @ High Channel, 2480 MHz, AC Power
30MHz -26GHz Conducted Spurious
Plot 4.5

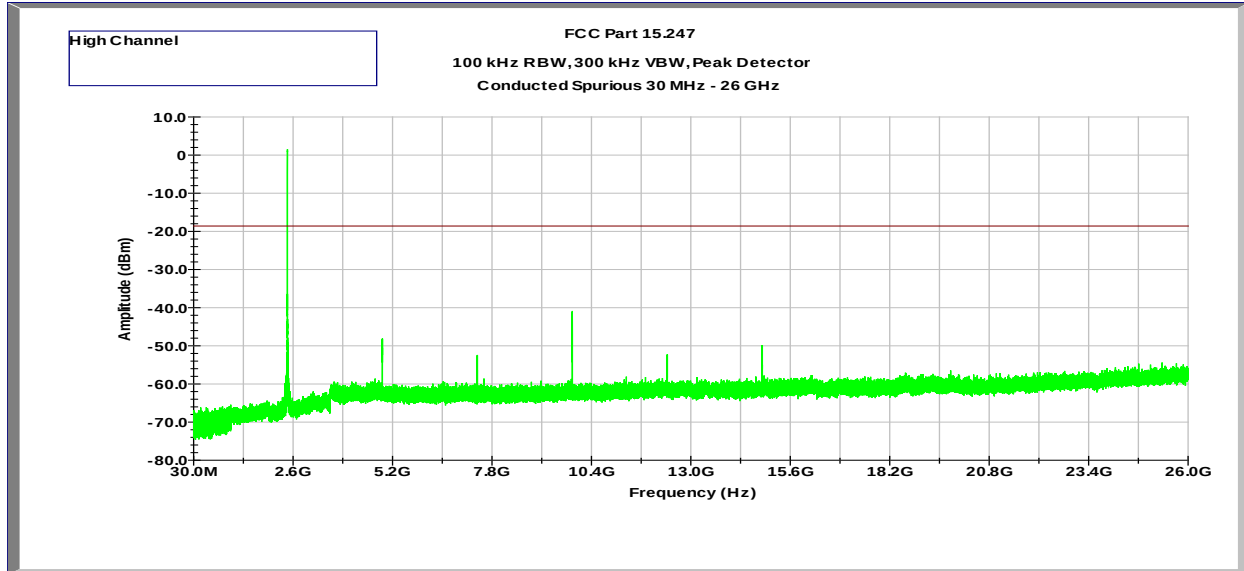

Tx @ Low Channel, 2400 MHz Band Edge, Battery Power
Plot 4.6

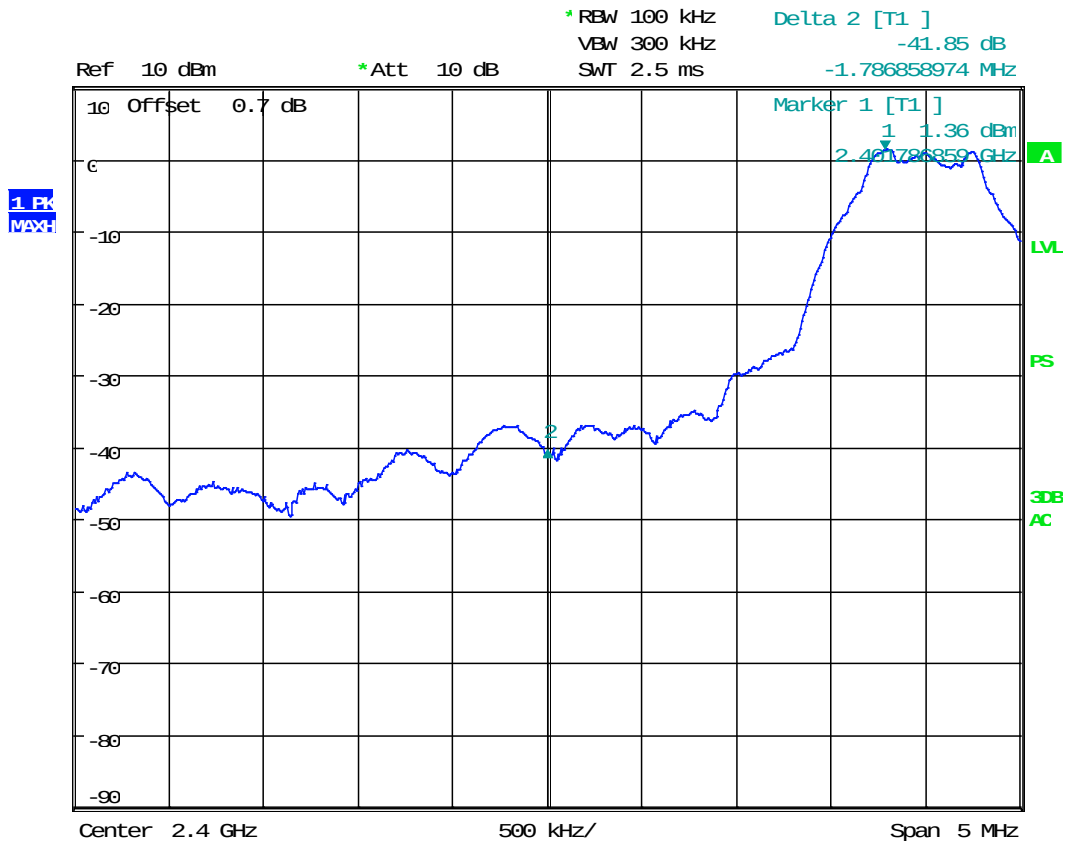


Date: 16.AUG.2016 14:00:00

Tx @ Low Channel, 2483.5 MHz Band Edge, Battery Power
Plot 4.7




Date: 16.AUG.2016 13:57:39


Tx @ Low Channel, 2402 MHz, Battery Power
30MHz -26GHz Conducted Spurious
Plot 4.8

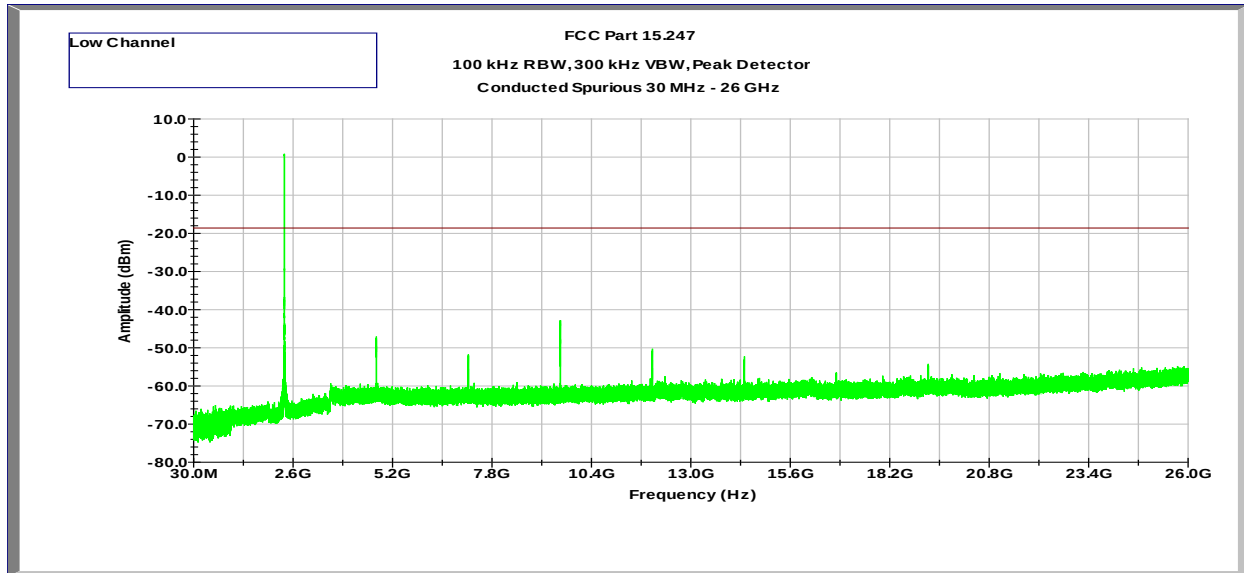

Tx @ Mid Channel, 2440 MHz, Battery Power
30MHz -26GHz Conducted Spurious
Plot 4.9

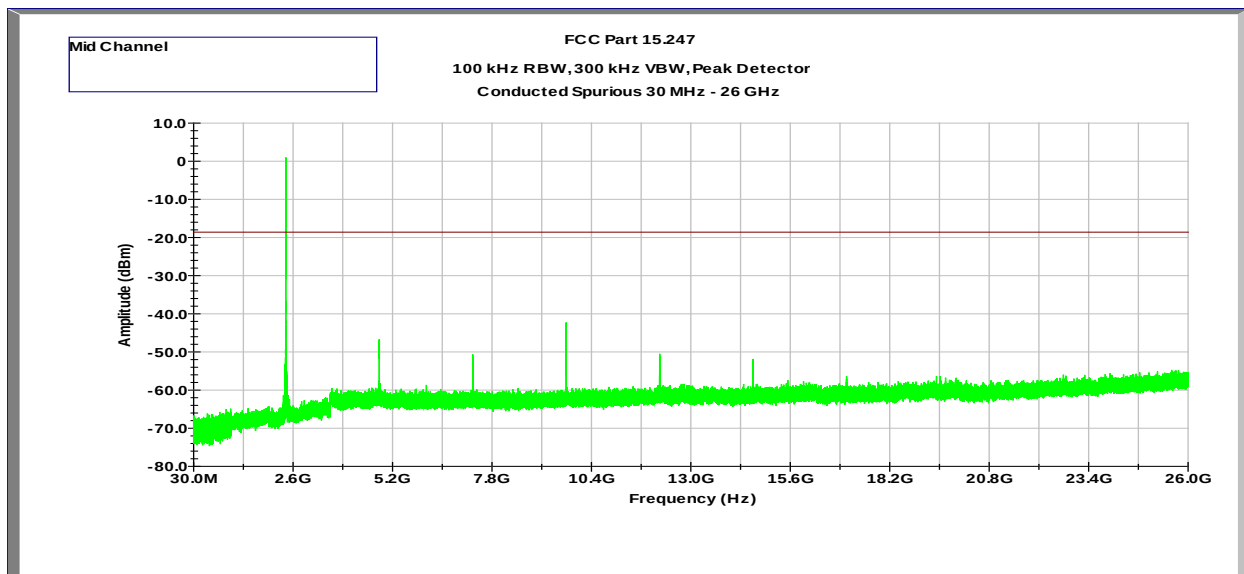

Tx @ High Channel, 2480 MHz, Battery Power
30MHz -26GHz Conducted Spurious
Plot 4.10

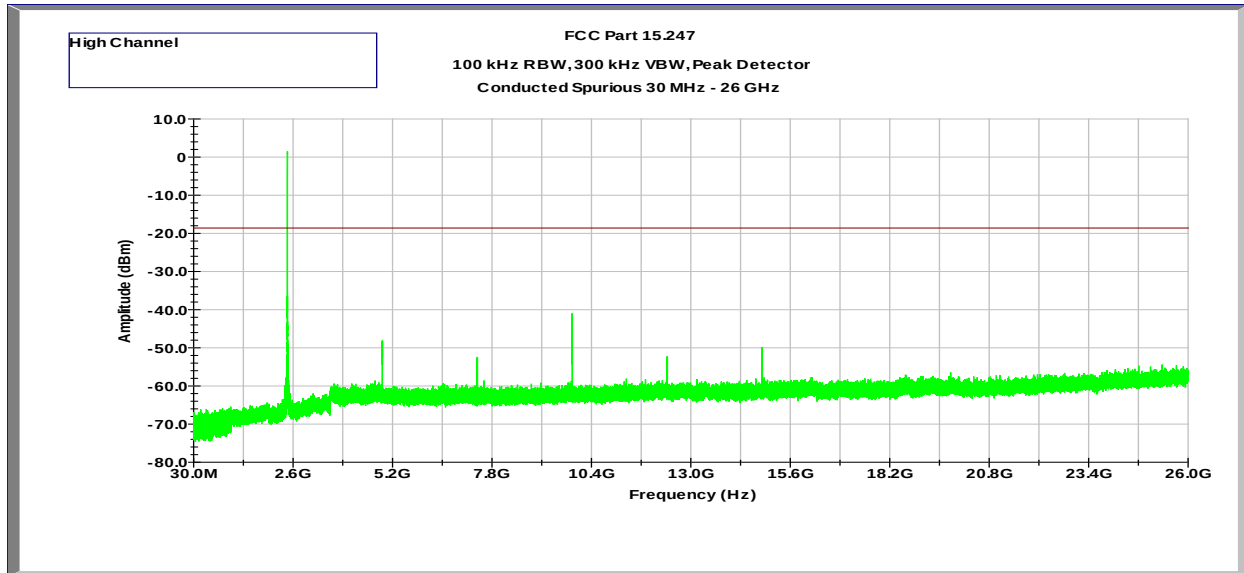

4.5 Transmitter Radiated Emissions

FCC Rules: 15.247(d), 15.209, 15.205; RSS-247;

4.5.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.5.2 Procedure

Radiated emission measurements were performed from 30 MHz to 18 GHz according to the procedure described in ANSI C64.10. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

A preamp was used from 30MHz to 26GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 26GHz.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).

4.5.3 Field Strength Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

RA = 52.0 dB(μ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32$ dB(μ V/m).

Level in μ V/m = Common Antilogarithm $[(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$.

4.5.4 Antenna-port conducted measurements

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

4.5.6 General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified for determining quasi-peak, peak, and average conducted output power, respectively.
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20\log D + 104.8$$
where:
E = electric field strength in dB μ V/m,
EIRP = equivalent isotropic radiated power in dBm
D = specified measurement distance in meters.
- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test

4.5.7 Test Results


The data on the following pages list the significant emission frequencies, the limit and the margin of compliance where emissions are within 3dB of the limit.

All conducted antenna port plots are corrected with the consideration of a 2 dBi Antenna Gain.

Radiated emission measurements were performed up to 26GHz. No Emissions were identified when scanned from 18-25 GHz.


Test Results: 15.209/15.205 Restricted Band Emissions at Antenna Port

Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2402 MHz, AC Power

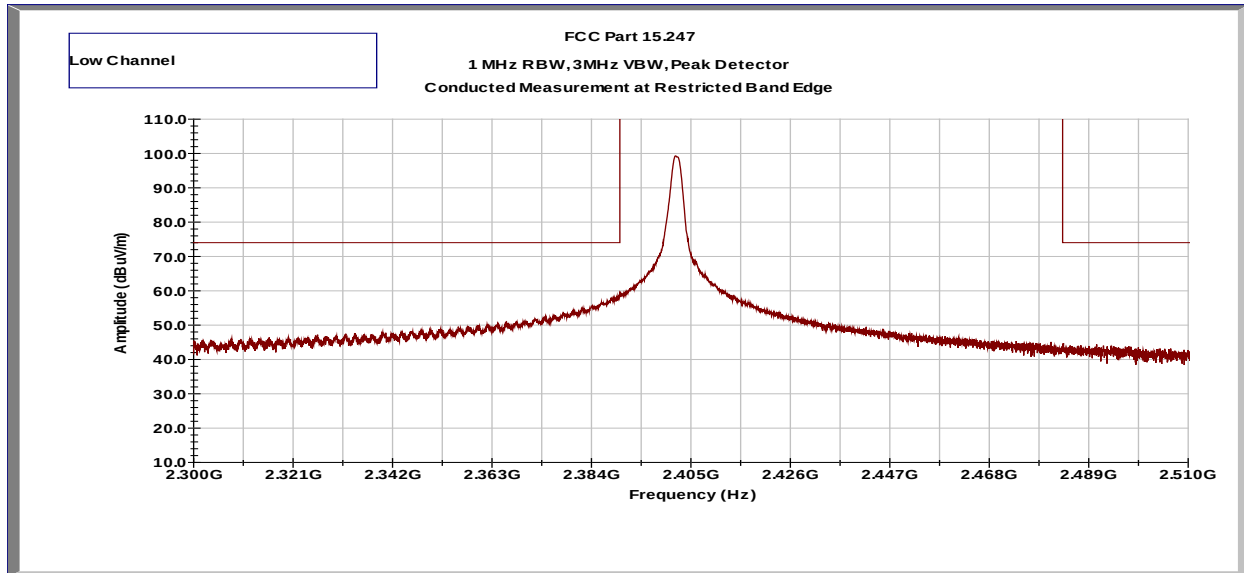


Frequency	Corrected Amplitude	Peak Limit	Margin	Detector	Results
GHz	dBµV/m	dBµV/m	dB		
2.390	60.3	74	-13.7	Peak	Pass

Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2402 MHz, AC Power

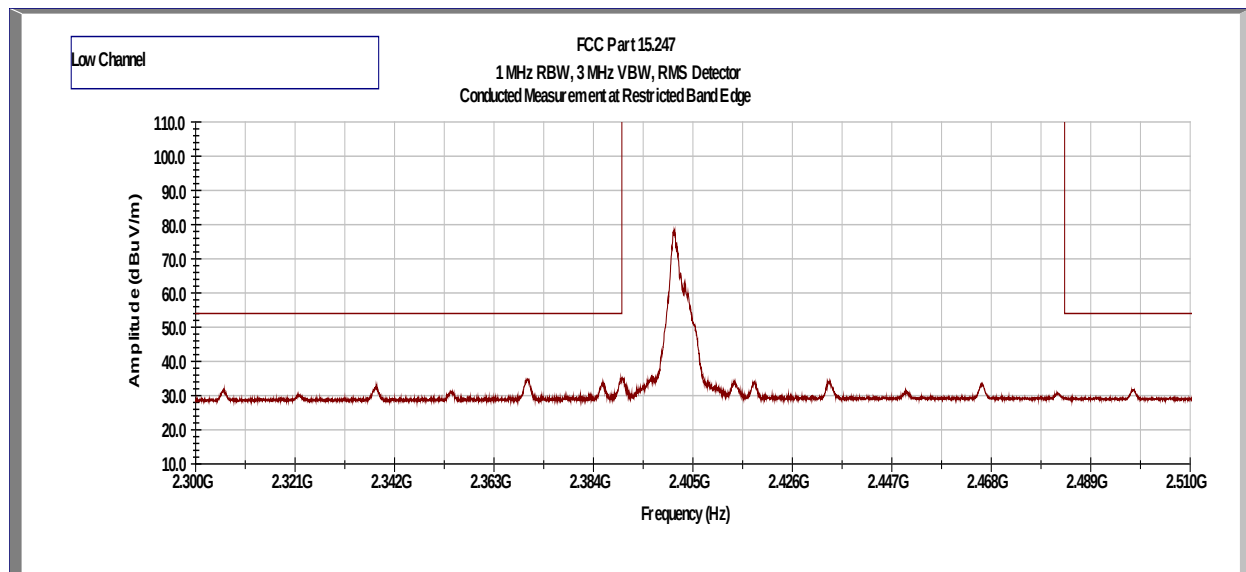


Frequency	Corrected Amplitude	Average Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
2.390	35.0	54.0	-19.0	RMS	Pass

Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2480 MHz, AC Power

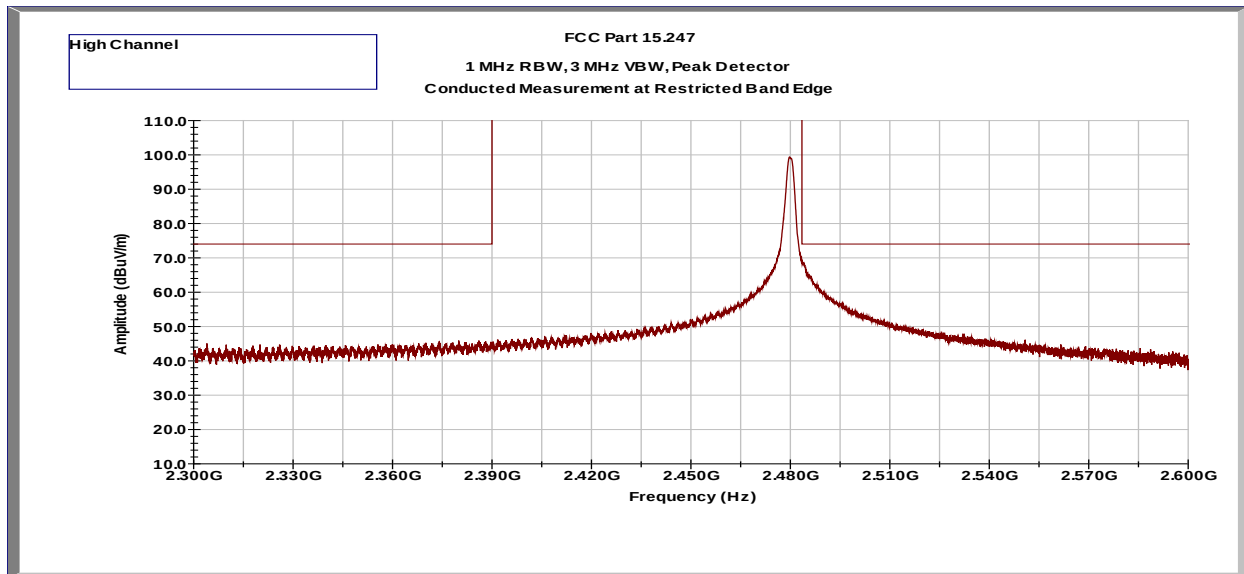

Frequency	Corrected Amplitude	Peak Limit	Margin	Detector	Results
GHz	dB μ V/m	dB μ V/m	dB		
2.4835	68.7	74.0	-5.3	Peak	Pass

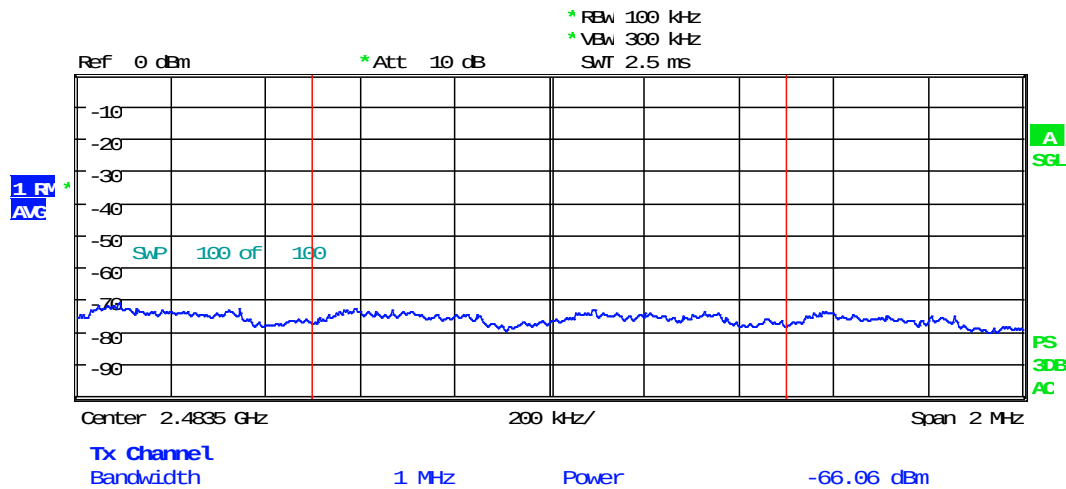

Frequency	Detector	Corrected Amplitude	Raw Amplitude	Antenna Factor	Cable Loss	EIRP	$\delta(\text{dB})^*$	Corr. Factor at 3 m	Average Limit	Margin
MHz	Peak / Avg	dB(uV)	dBm	dB	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
2483.5	Avg	33.7	-66.06	1.8	0.7	-63.6	2.0	9.5	54	-20.3

* $\delta(\text{dB})$ - Duty Cycle Correction Factor. See Appendix A for Duty Cycle measurement and calculation. Duty cycle Correction Factor was applied for Average Field Strength (FS).

Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} + \delta(\text{dB}) - 20\log D + 104.8$$


where:

E = electric field strength in $\text{dB}\mu\text{V}/\text{m}$,

EIRP = equivalent isotropic radiated power in dBm


D = specified measurement distance in meters.

Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2402 MHz, Battery Power

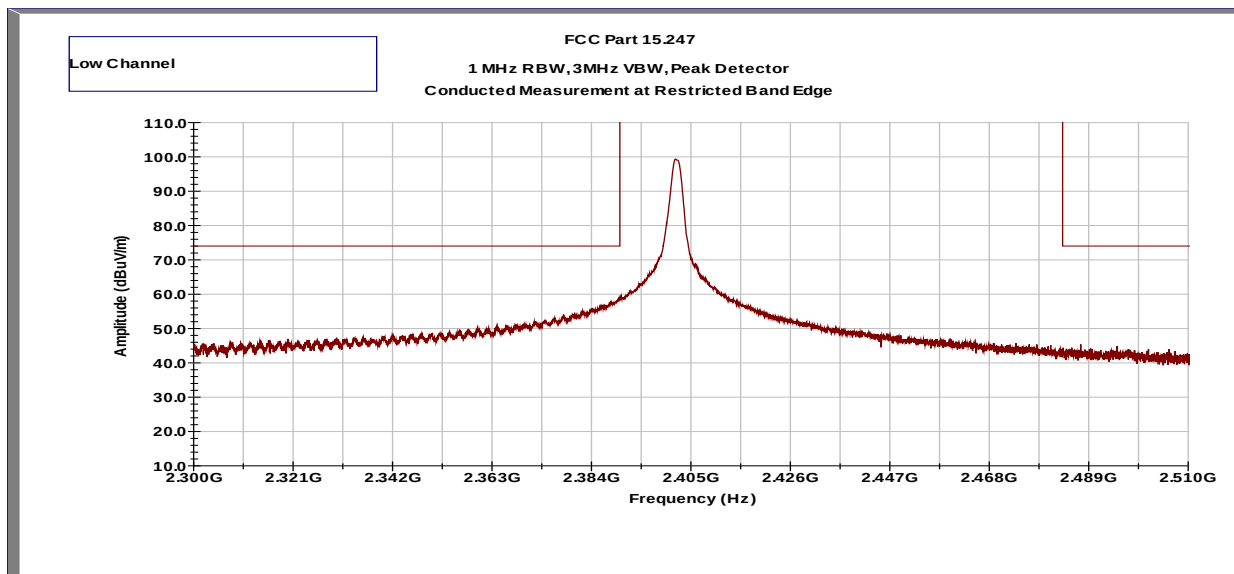


Frequency	Corrected Amplitude	Peak Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
2.390	59.3	74	-14.7	Peak	Pass

Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2402 MHz, Battery Power

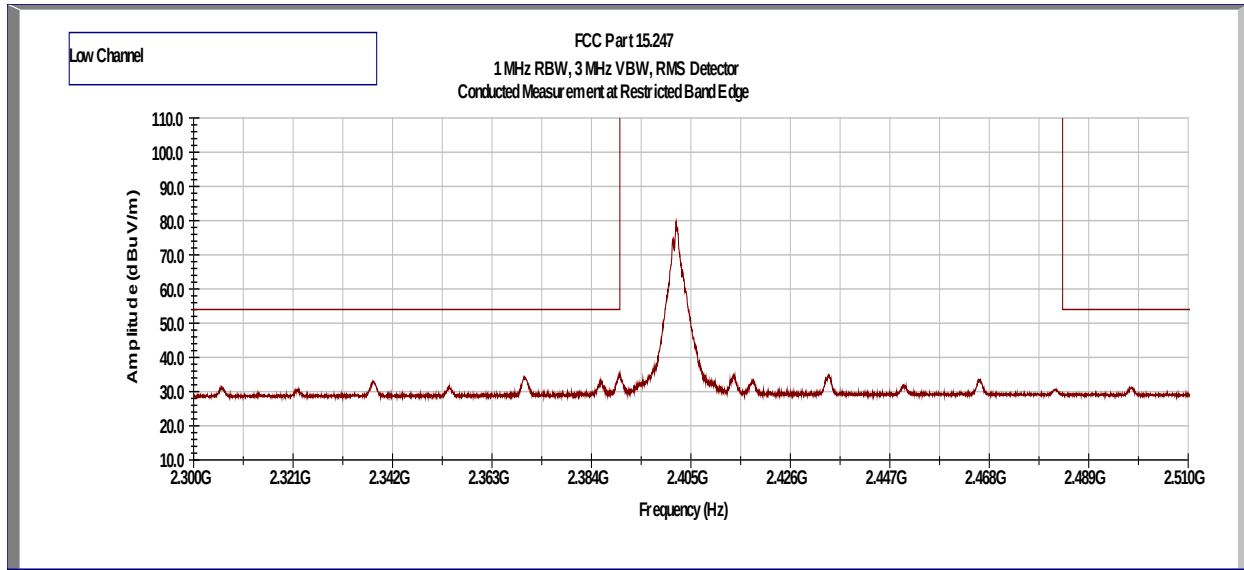


Frequency	Corrected Amplitude	Average Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
2.390	34.9	54.0	-19.1	RMS	Pass

Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2480 MHz, Battery Power

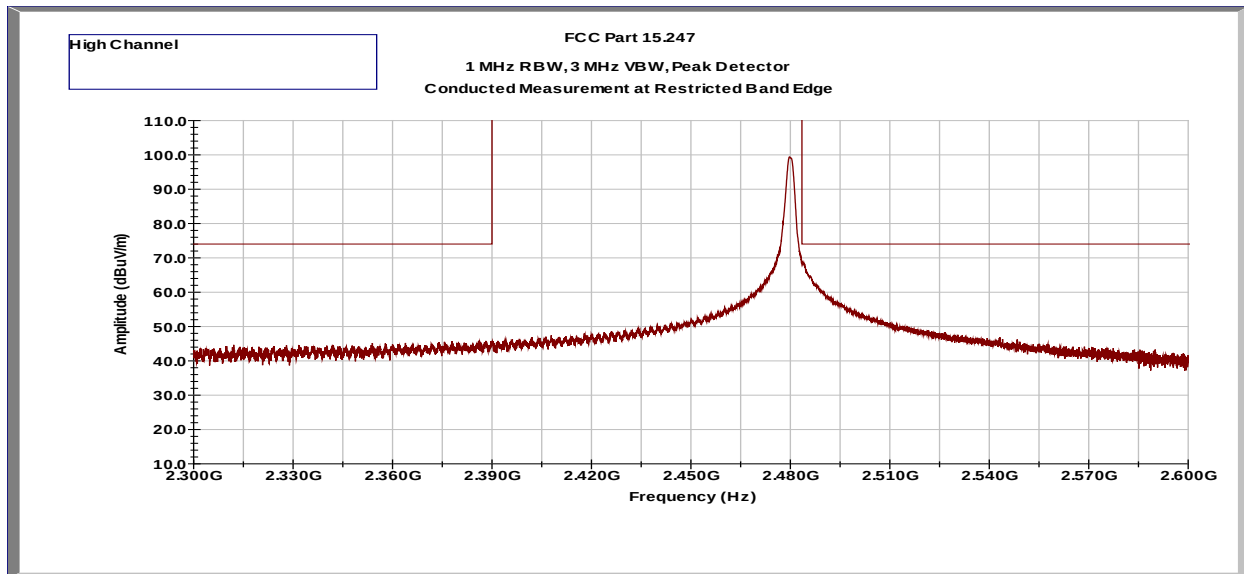

Frequency	Corrected Amplitude	Peak Limit	Margin	Detector	Results
GHz	dB μ V/m	dB μ V/m	dB		
2.4835	67.6	74	-6.4	Peak	Pass

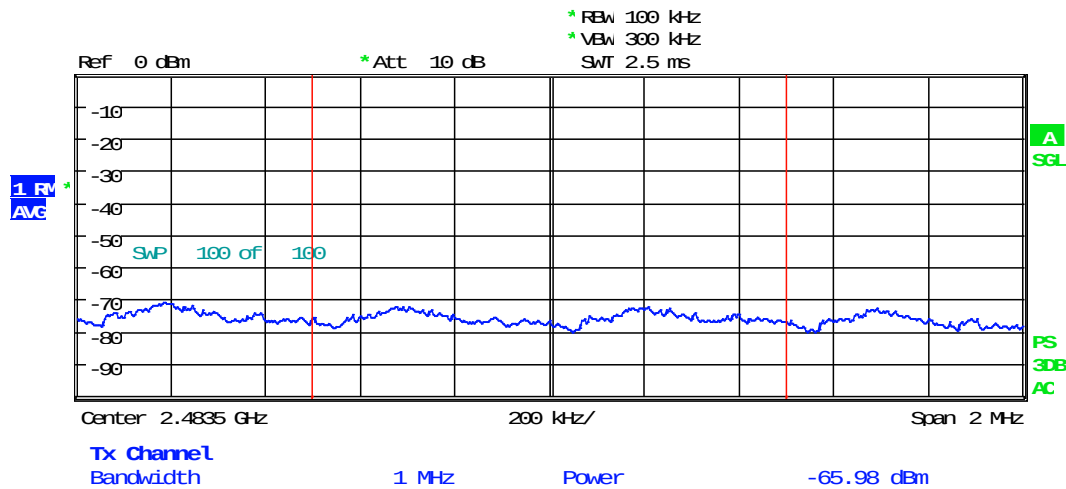

Frequency	Detector	Corrected Amplitude	Raw Amplitude	Antenna Factor	Cable Loss	EIRP	$\delta(\text{dB})^*$	Corr. Factor at 3 m	Average Limit	Margin
MHz	Peak / Avg	dB(uV)	dBm	dB	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
2483.5	Avg	33.8	-65.98	1.8	0.7	-63.5	2.0	9.5	54	-20.2

* $\delta(\text{dB})$ - Duty Cycle Correction Factor. See Appendix A for Duty Cycle measurement and calculation. Duty cycle Correction Factor was applied for Average Field Strength (FS).

Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} + \delta(\text{dB}) - 20\log D + 104.8$$

where:

E = electric field strength in $\text{dB}\mu\text{V/m}$,



EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

Out-of-Band Conducted Spurious Emissions (at Antenna Port)

Tx @ 2402MHz, AC Power



Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

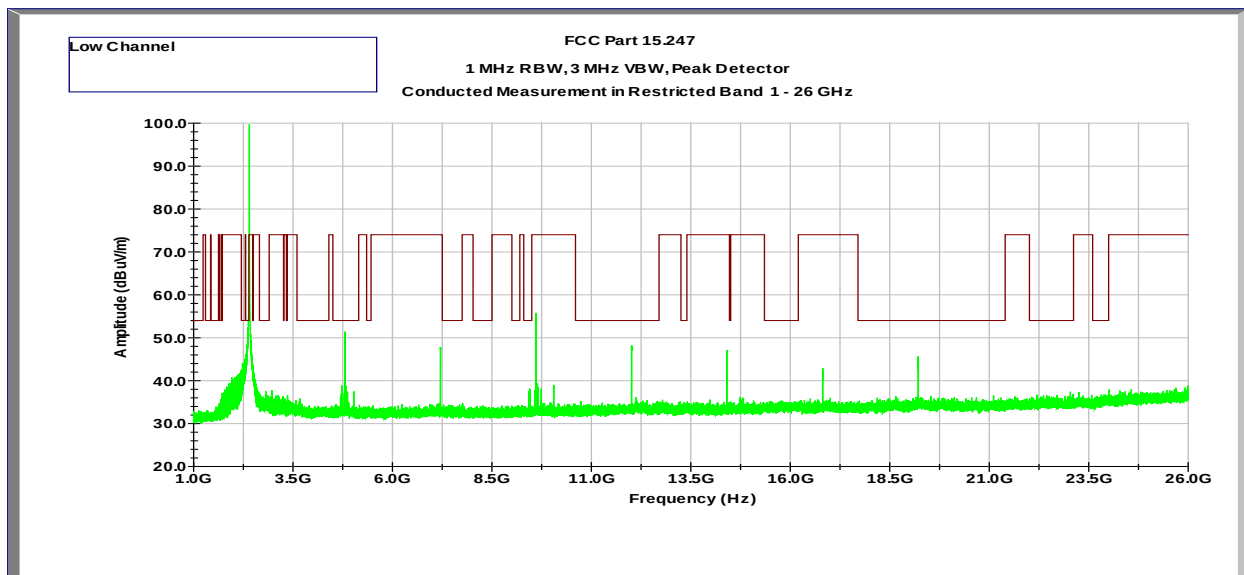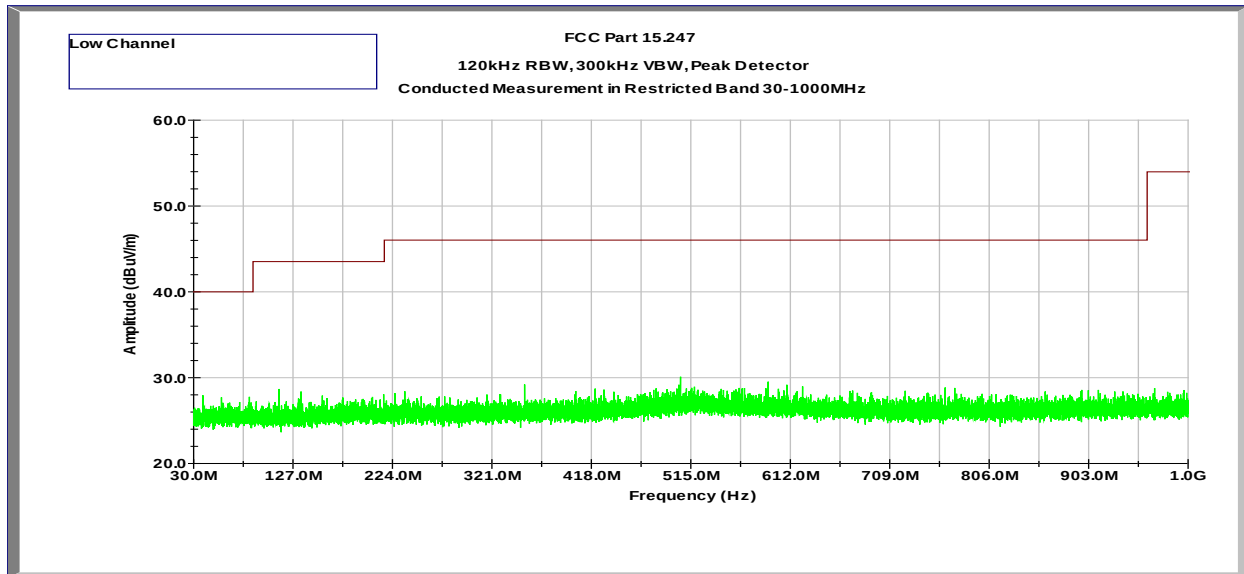

Frequency	Corrected Amplitude	Average Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
4.804	51.4	54	-2.6	Peak	Pass

Tx @ 2402MHz, Battery Power



Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

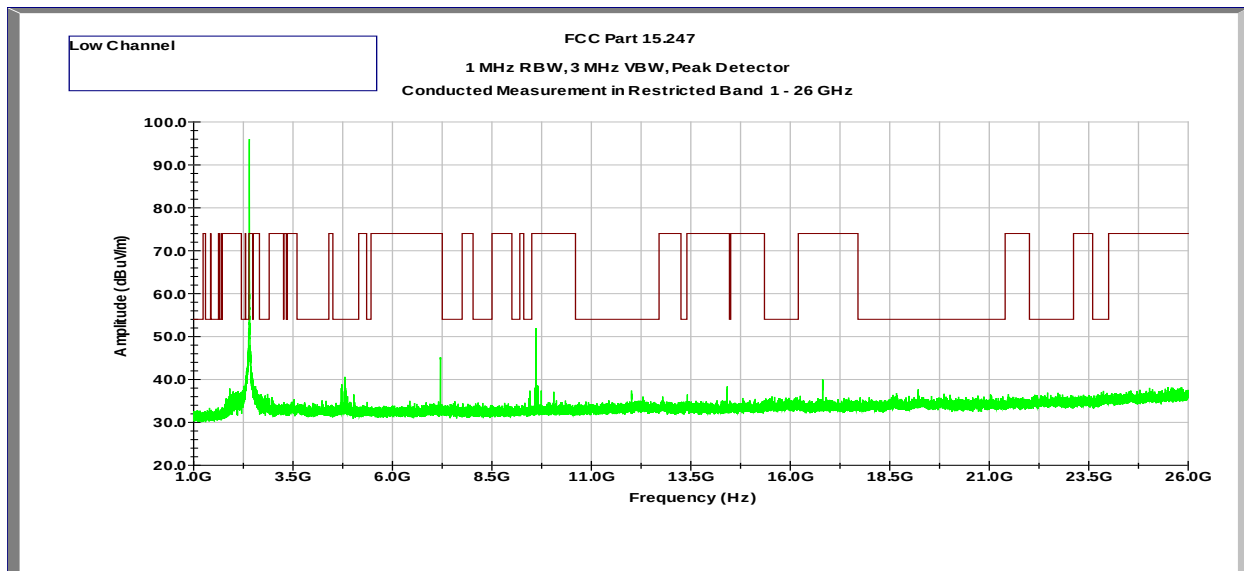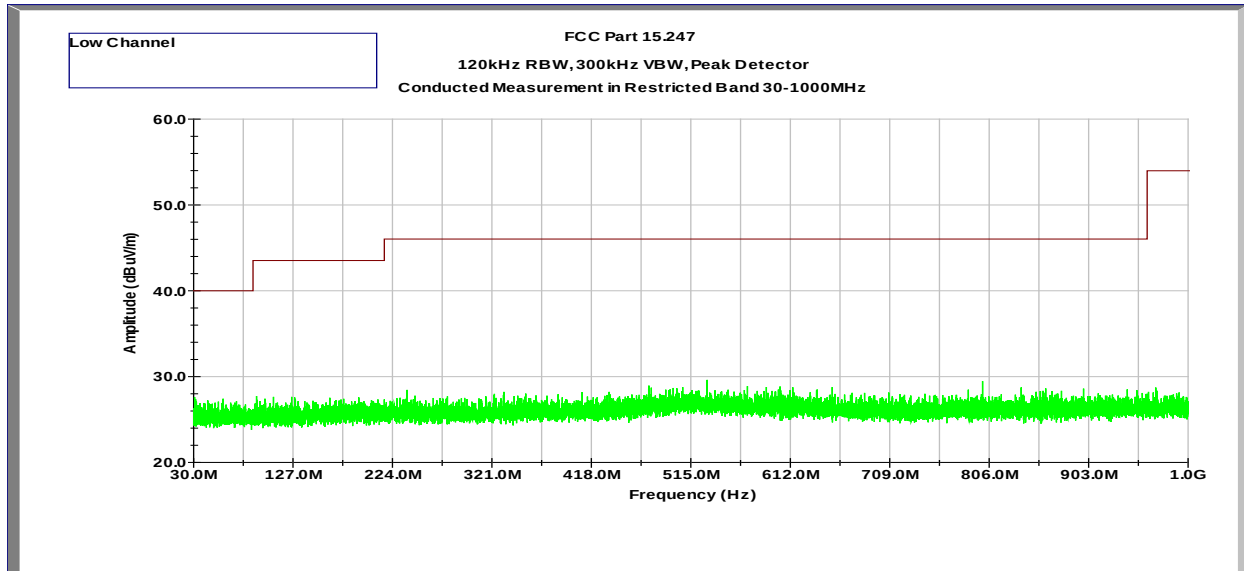

Out-of-Band Conducted Spurious Emissions (at Antenna Port)

Tx @ 2440MHz, AC Power



Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

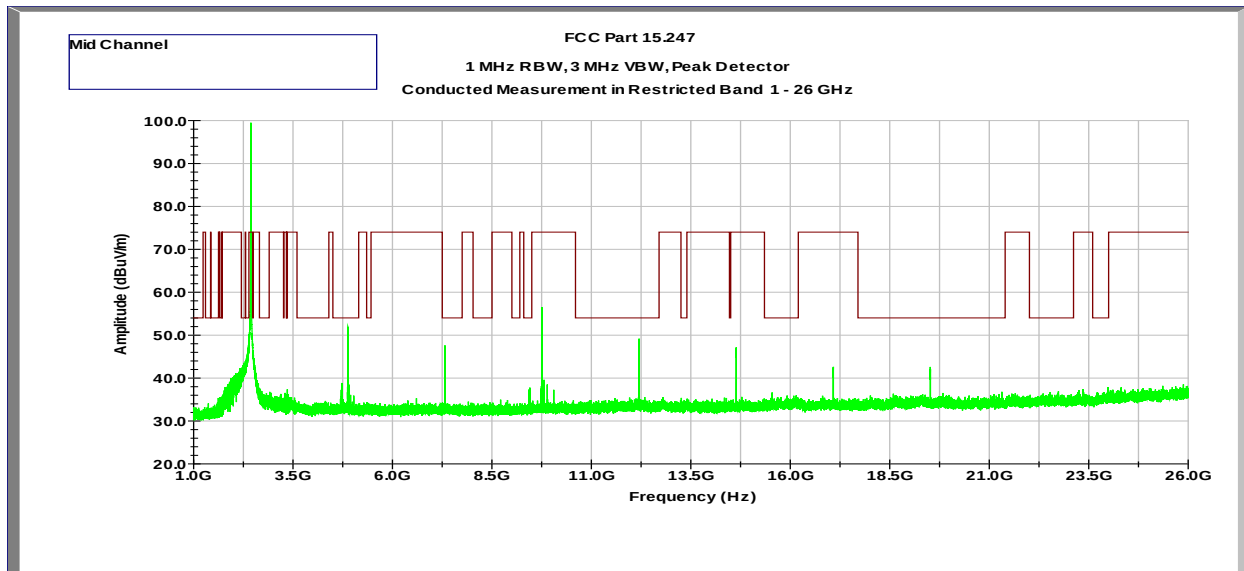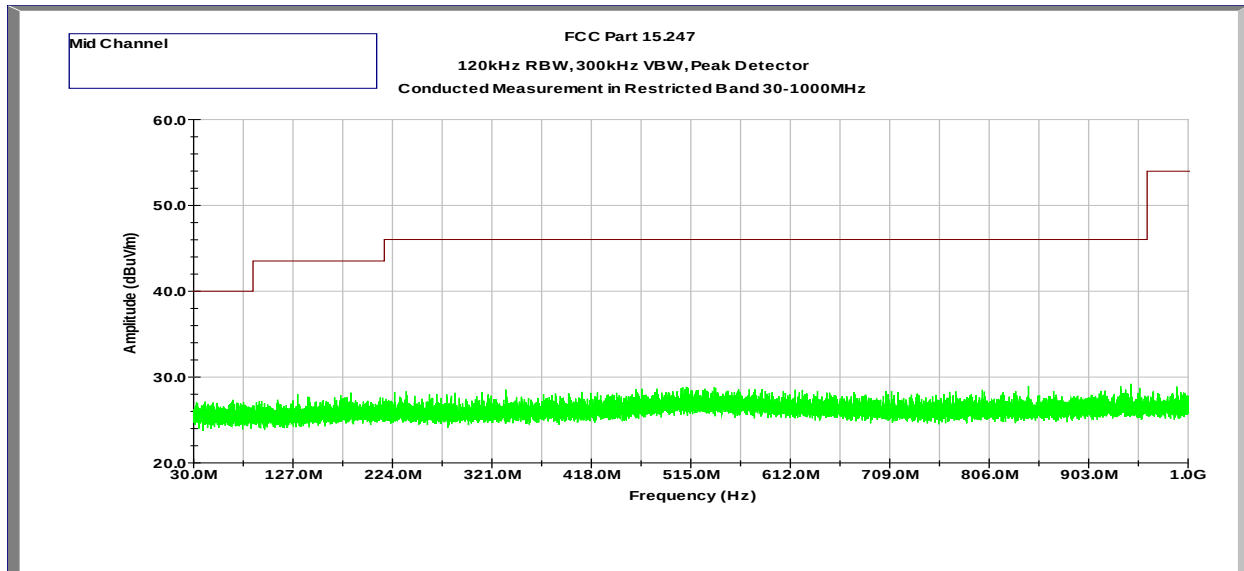

Frequency	Corrected Amplitude	Average Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
4.88	51.9	54	-2.1	Peak	Pass

Tx @ 2440MHz, Battery Power



Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

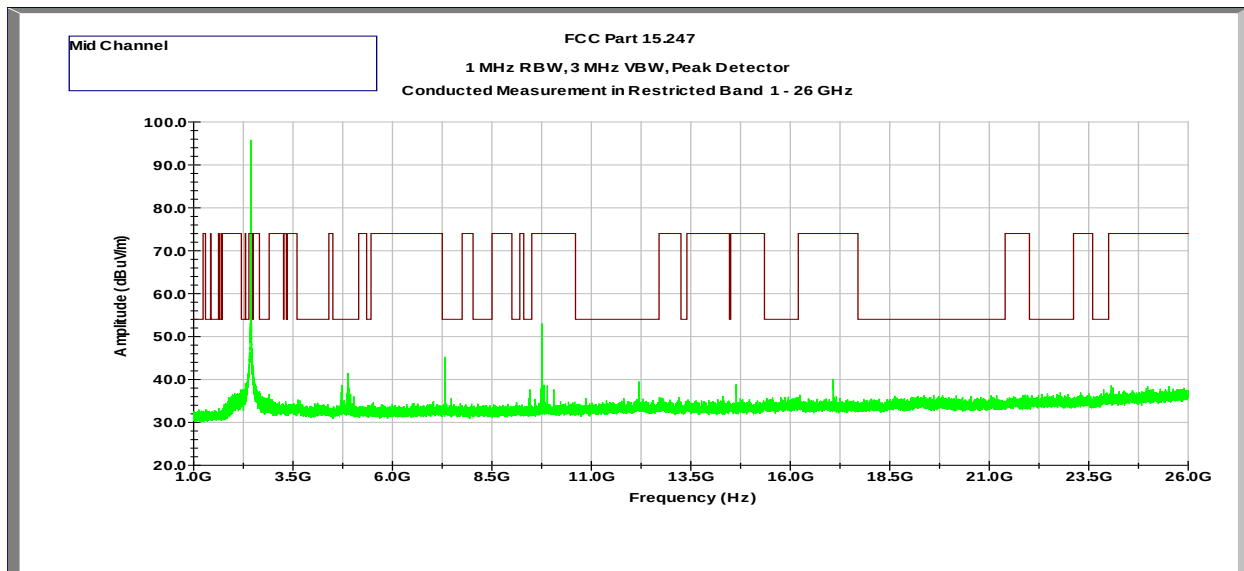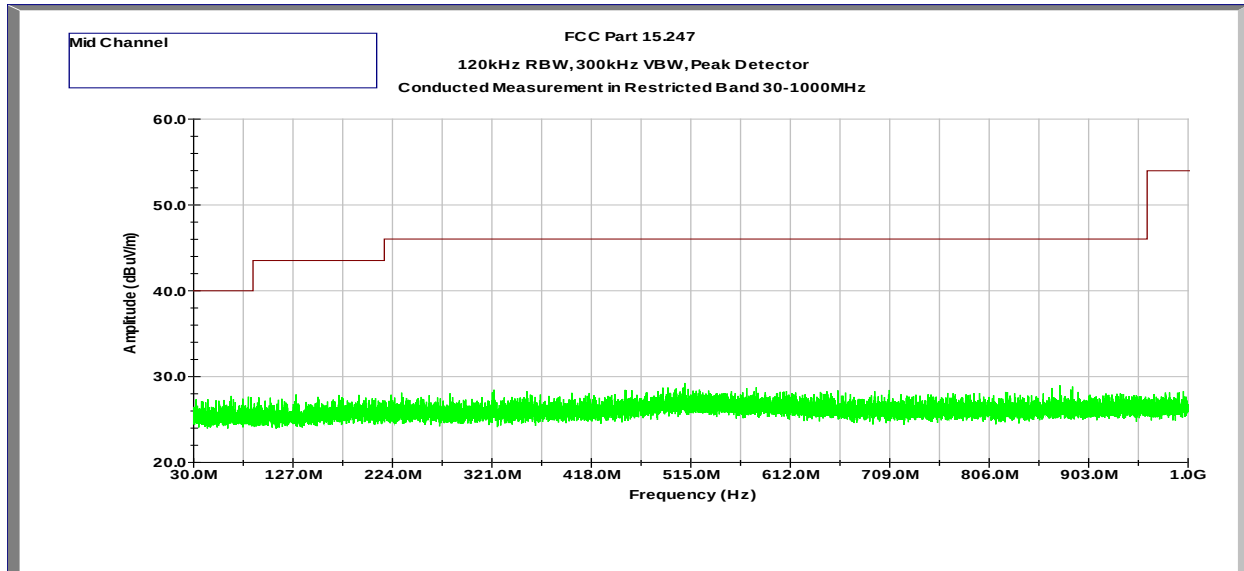

Out-of-Band Conducted Spurious Emissions (at Antenna Port)

Tx @ 2480MHz, AC Power



Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

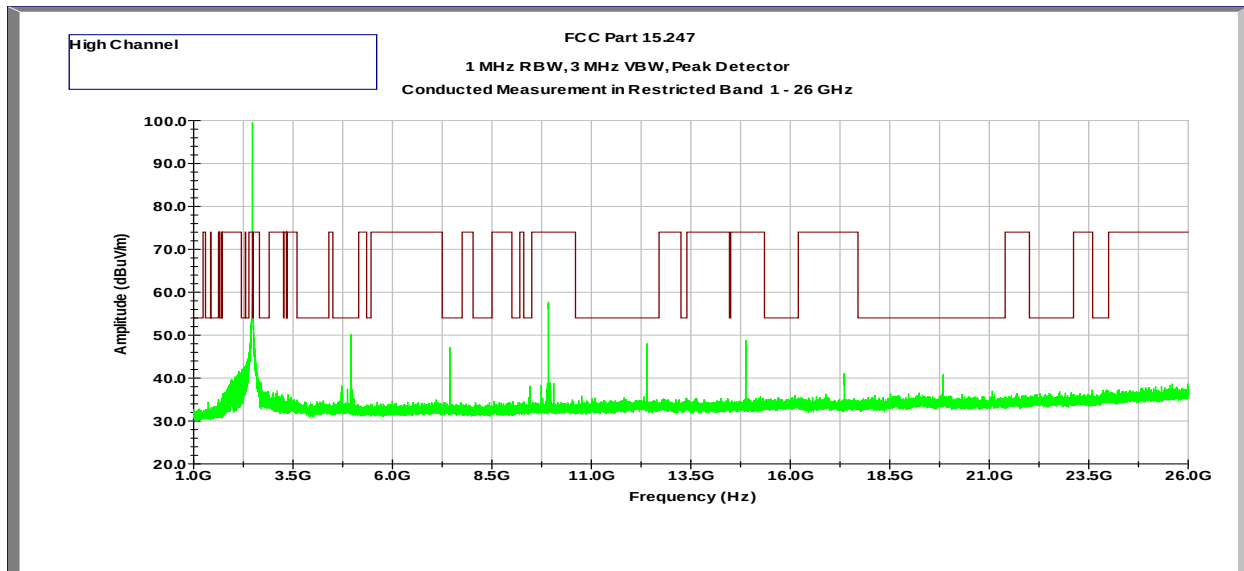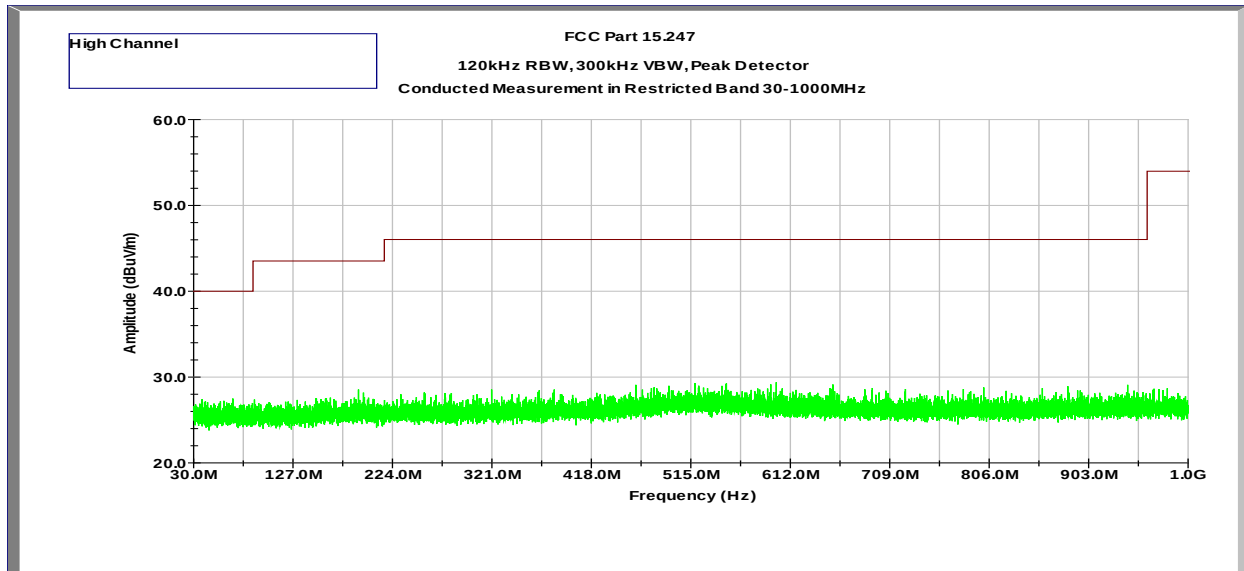

Frequency	Corrected Amplitude	Average Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
4.96	50.2	54	-3.8	Peak	Pass

Tx @ 2480MHz, Battery Power


Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

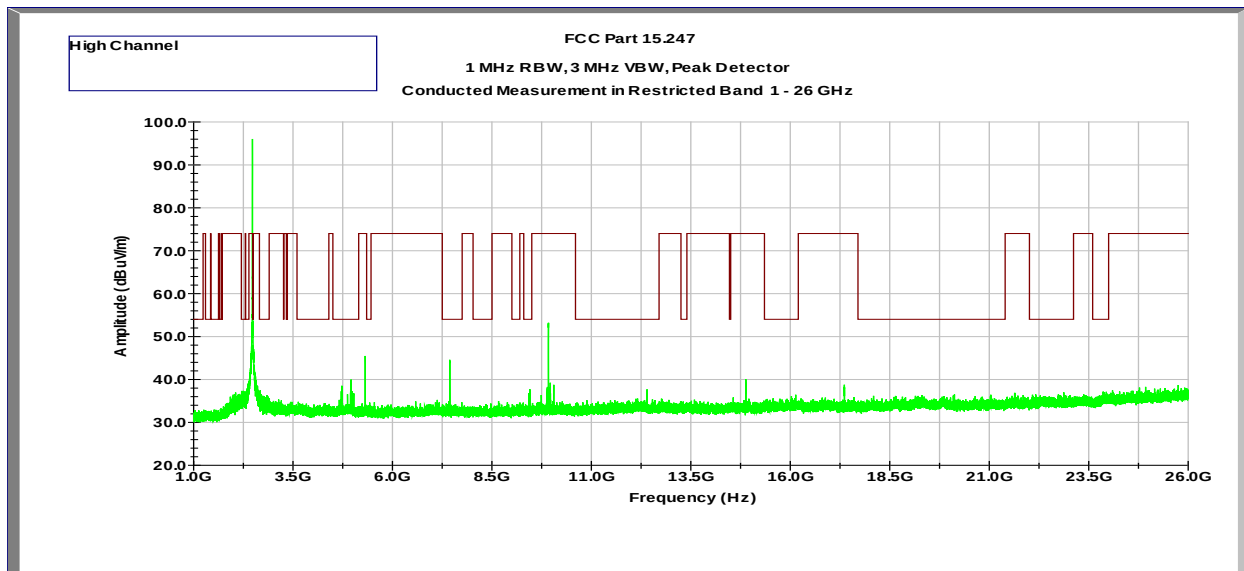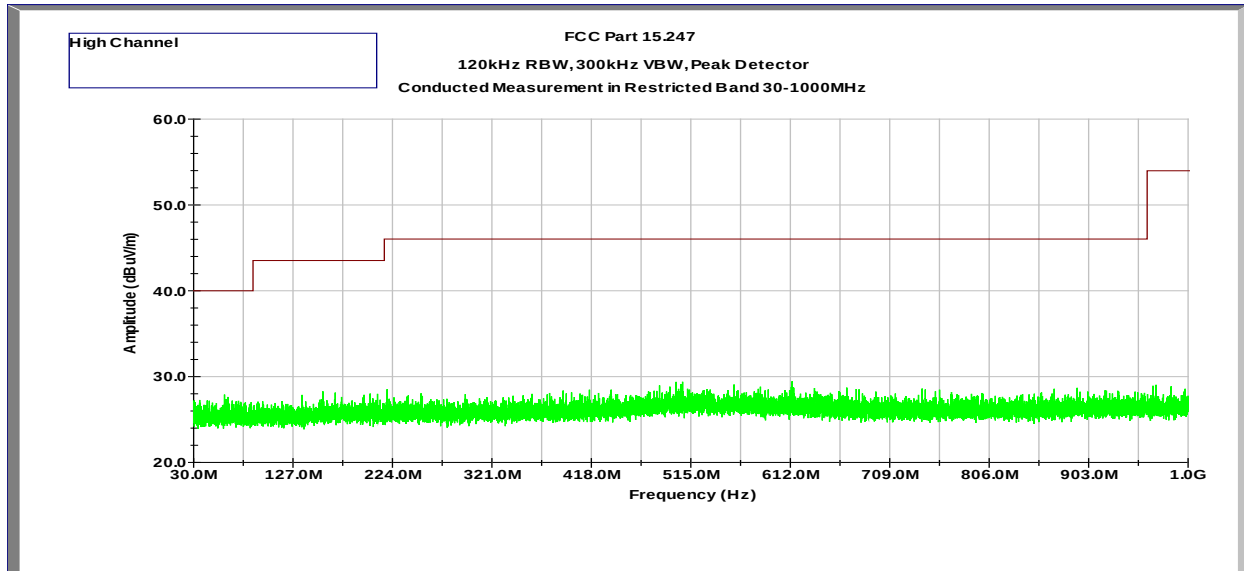


Out-of-Band Radiated Spurious Emissions (Cabinet Radiation)

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2402MHz, AC Power

Radiated Spurious Emissions 30 MHz - 1000 MHz

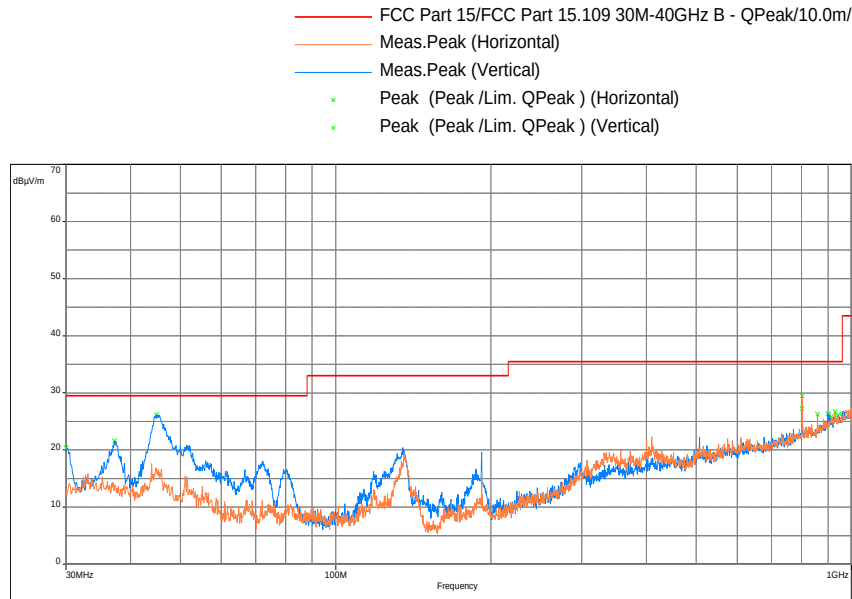


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan

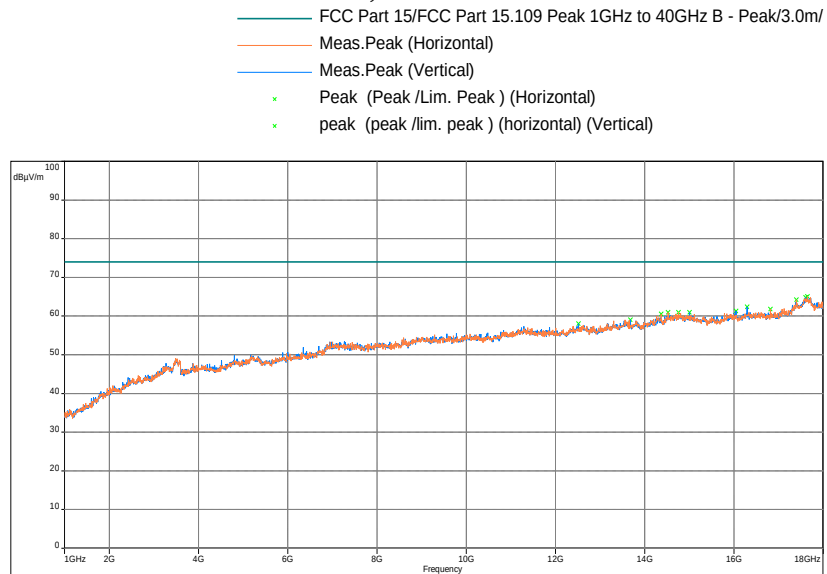

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Radiated Spurious Emissions 1000 - 18000 MHz, Average Scan

- FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/
- Meas.Peak (Horizontal)
- Meas.Peak (Vertical)
- ✕ Peak (Peak /Lim. Average) (Horizontal)
- ✕ Peak (Peak /Lim. Average) (Vertical)

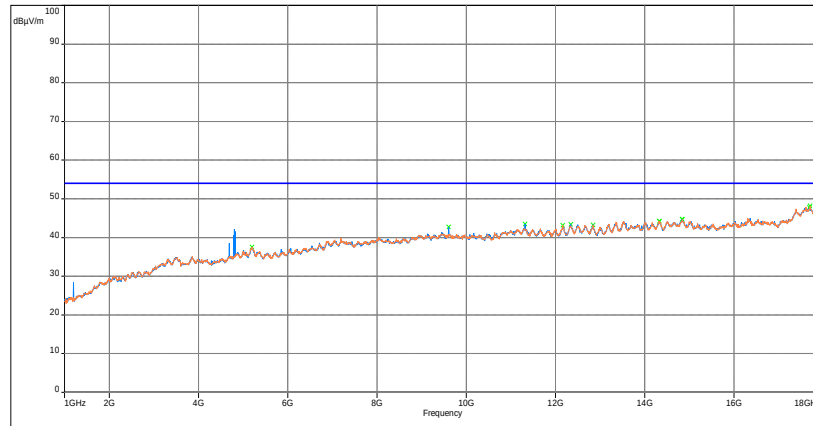


Model: ; Client: ; Comments: Low Channel
AC Power; Test Date: 08/17/2016 18:02


Note: $FS@3m = RA + AF + CF - \text{Preamp, (Average)}$

Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2440MHz, AC Power

Radiated Spurious Emissions 30 MHz - 1000 MHz

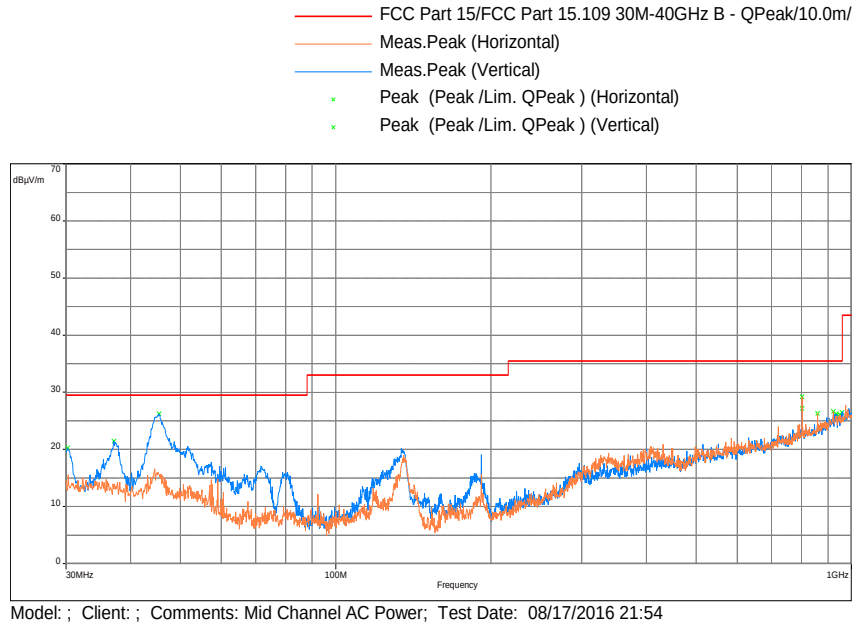


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan

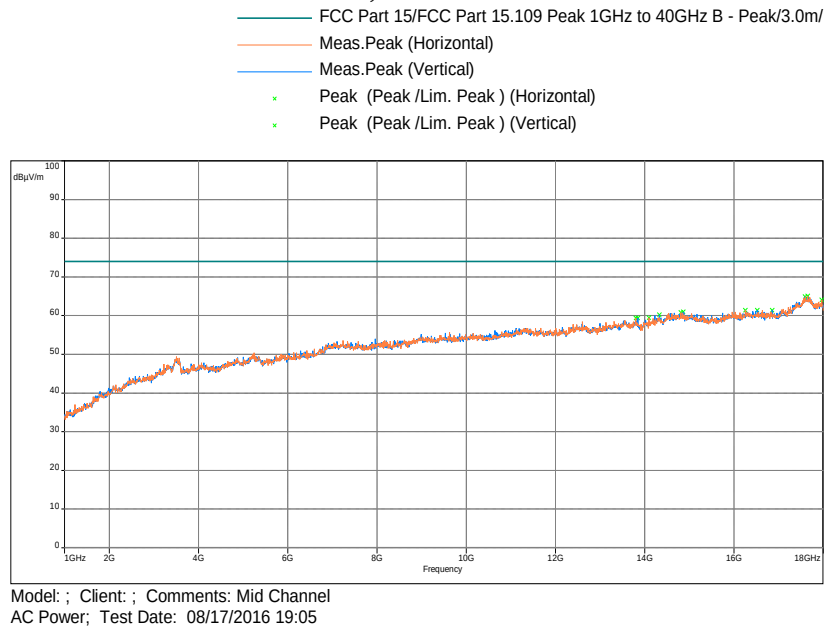

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Radiated Spurious Emissions 1000 - 18000 MHz, Average Scan

- FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/
- Meas.Peak (Horizontal)
- Meas.Peak (Vertical)
- ✕ Peak (Peak /Lim. Average) (Horizontal)
- ✕ Peak (Peak /Lim. Average) (Vertical)

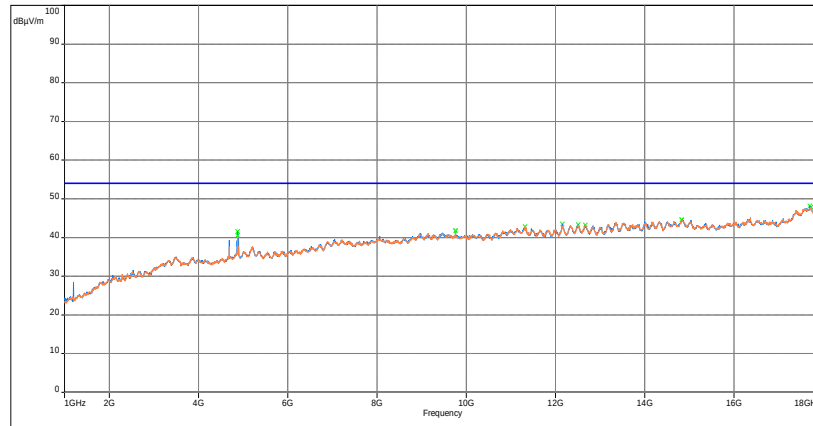


Model: ; Client: ; Comments: Mid Channel
AC Power; Test Date: 08/17/2016 18:52

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Average)}$


Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2480MHz, AC Power

Radiated Spurious Emissions 30 MHz - 1000 MHz

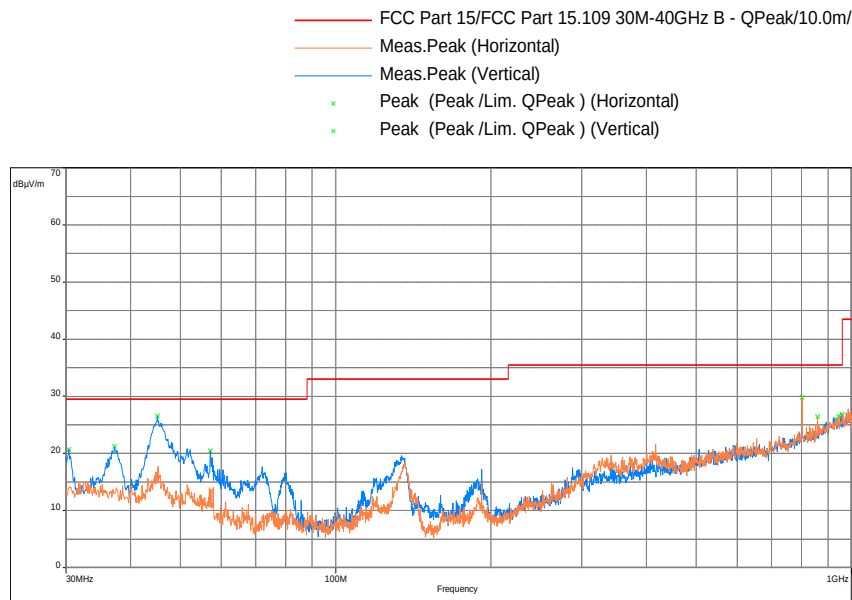

Model: ; Client: ; Comments: High Channel AC Power; Test Date: 08/17/2016 22:02

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan

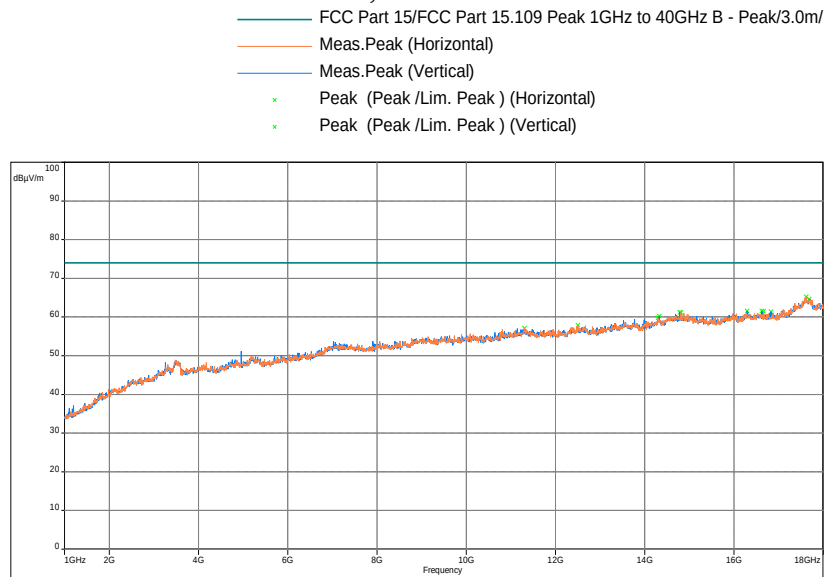


Model: ; Client: ; Comments: High Channel
AC Power; Test Date: 08/17/2016 19:40

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Radiated Spurious Emissions 1000 - 18000 MHz, Average Scan

- FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/
- Meas.Peak (Horizontal)
- Meas.Peak (Vertical)
- ✱ Peak (Peak /Lim. Average) (Horizontal)
- ✱ Peak (Peak /Lim. Average) (Vertical)

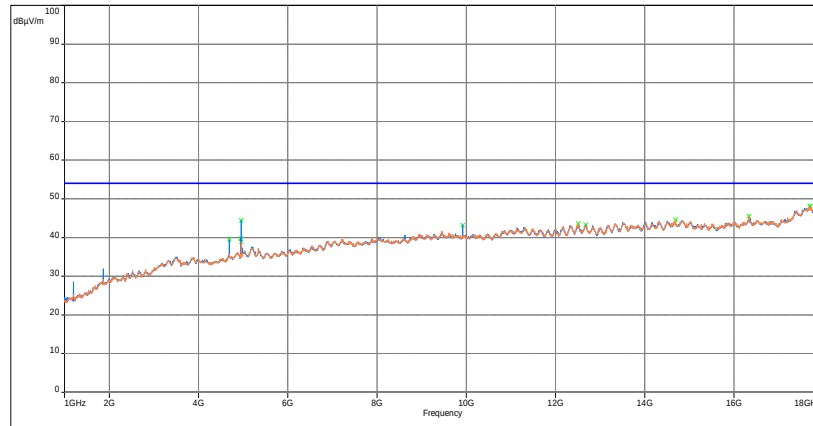


Model: ; Client: ; Comments: High Channel
AC Power; Test Date: 08/17/2016 19:27


Note: $FS@3m = RA + AF + CF - \text{Preamp, (Average)}$

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2402MHz, Battery Power

Radiated Spurious Emissions 30 MHz - 1000 MHz

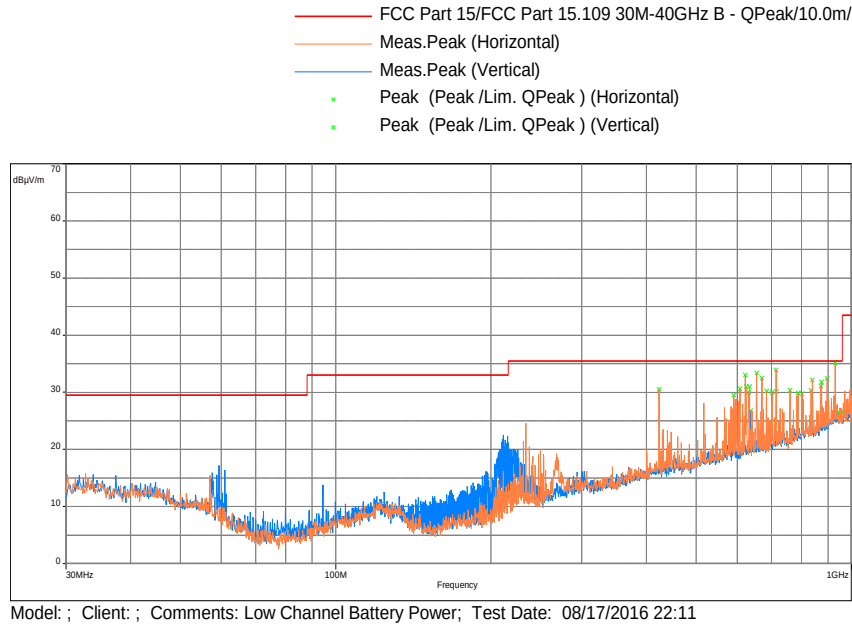


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan

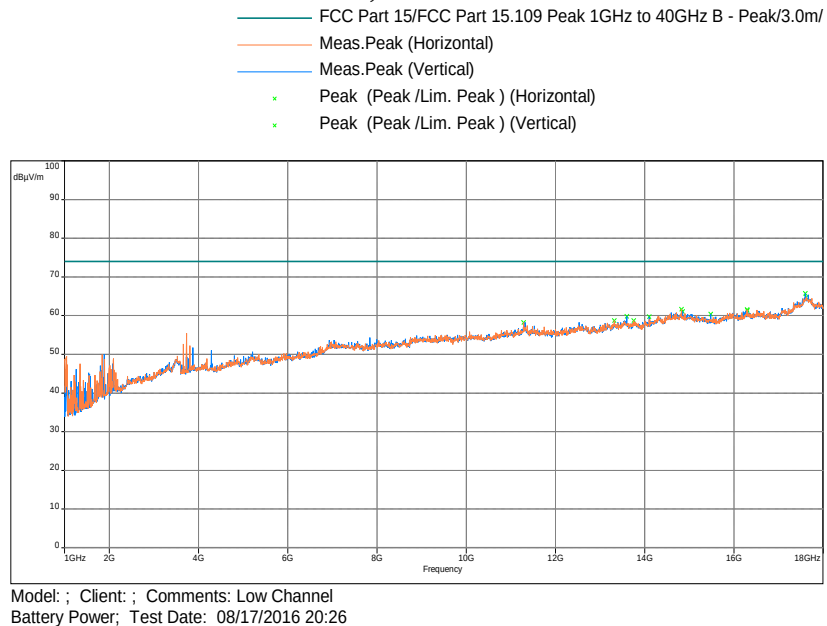

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Radiated Spurious Emissions 1000 - 18000 MHz, Average Scan

- FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/
- Meas.Peak (Horizontal)
- Meas.Peak (Vertical)
- ✱ Peak (Peak /Lim. Average) (Horizontal)
- ✱ Peak (Peak /Lim. Average) (Vertical)

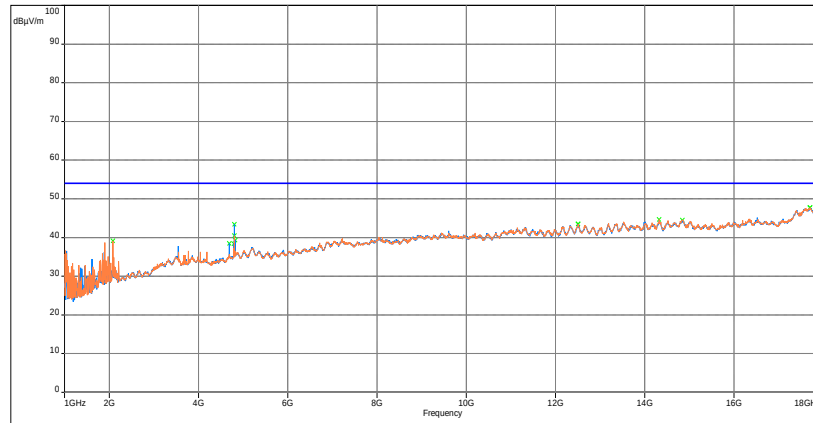


Model: ; Client: ; Comments: Low Channel
Battery Power; Test Date: 08/17/2016 20:13


Note: $FS@3m = RA + AF + CF - \text{Preamp, (Average)}$

Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2440MHz, Battery Power

Radiated Spurious Emissions 30 MHz - 1000 MHz

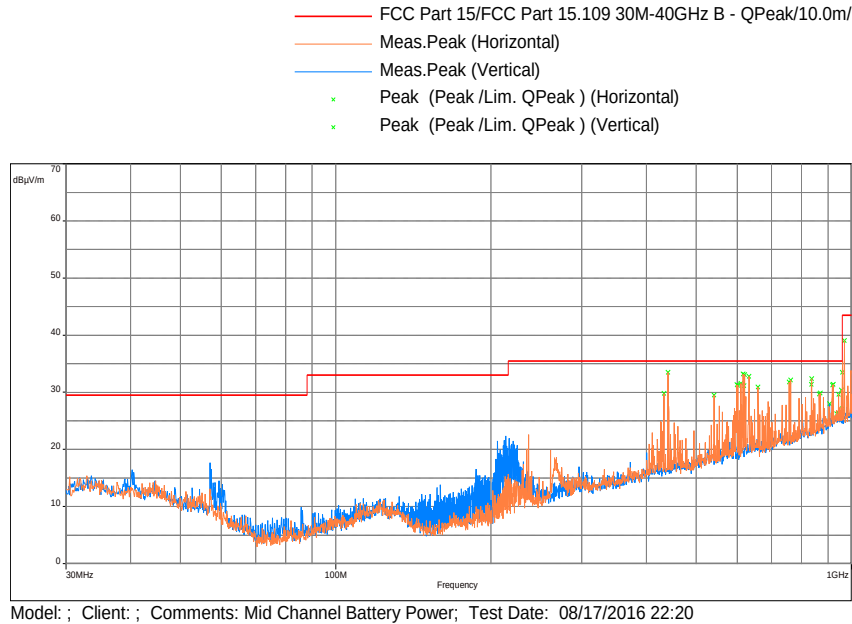


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan

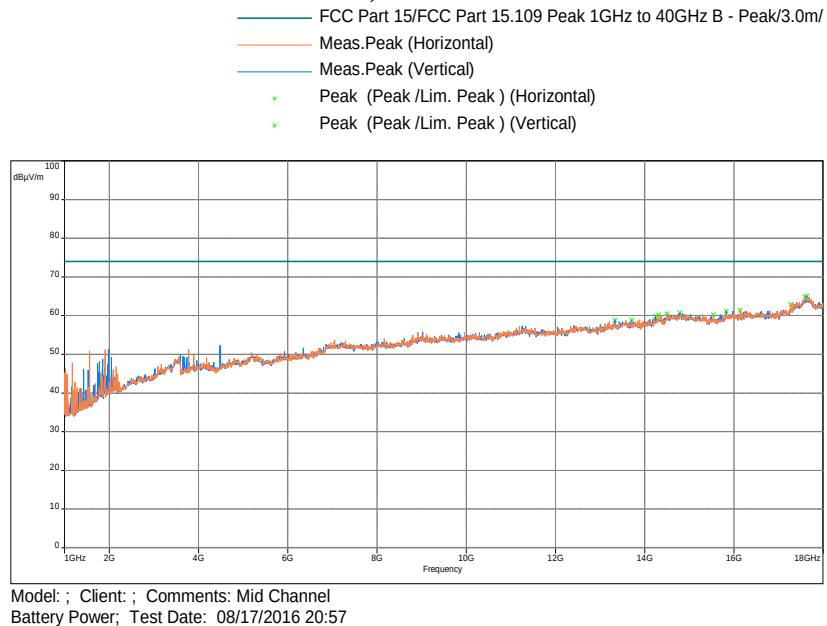

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Radiated Spurious Emissions 1000 - 18000 MHz, Average Scan

- FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/
- Meas.Peak (Horizontal)
- Meas.Peak (Vertical)
- ✱ Peak (Peak /Lim. Average) (Horizontal)
- ✱ Peak (Peak /Lim. Average) (Vertical)

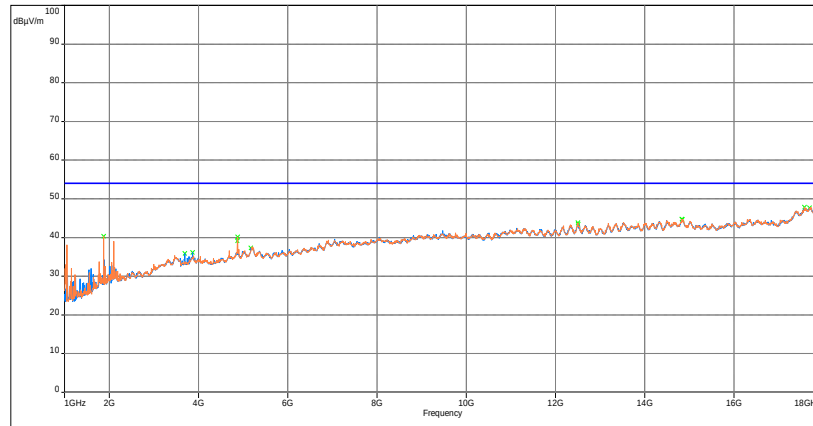


Model: ; Client: ; Comments: Mid Channel
Battery Power; Test Date: 08/17/2016 20:44


Note: $FS@3m = RA + AF + CF - \text{Preamp, (Average)}$

Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2480MHz, Battery Power

Radiated Spurious Emissions 30 MHz - 1000 MHz

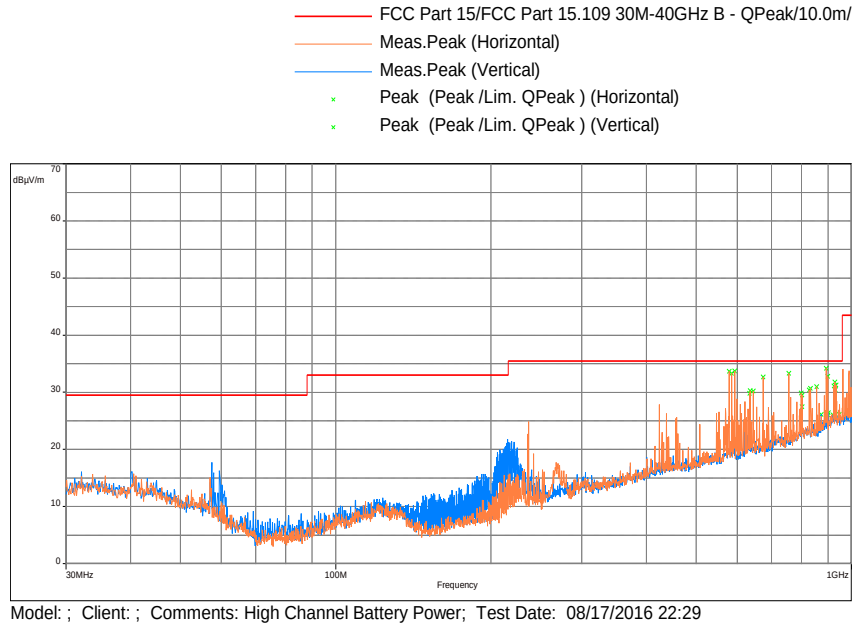


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan

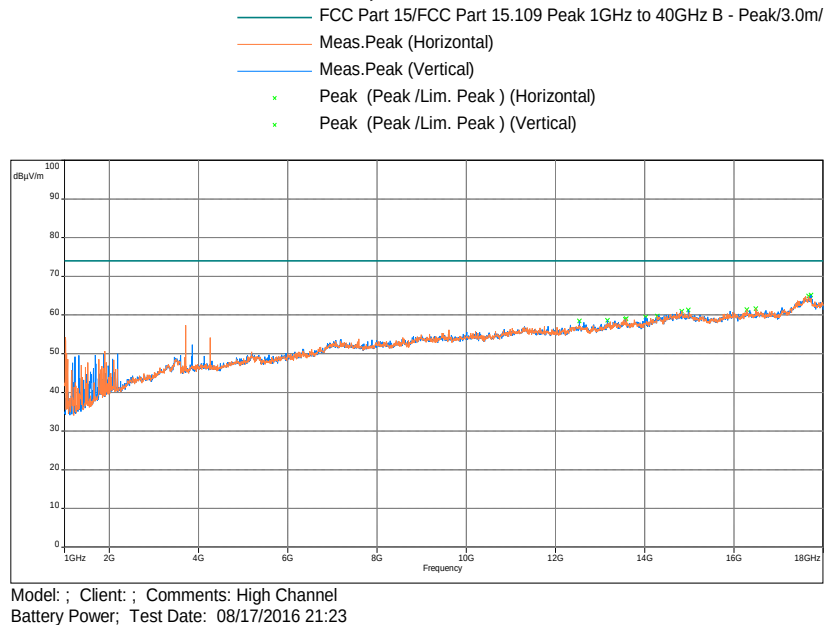

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Radiated Spurious Emissions 1000 - 18000 MHz, Average Scan

- FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/
- Meas.Peak (Horizontal)
- Meas.Peak (Vertical)
- ✱ Peak (Peak /Lim. Average) (Horizontal)
- ✱ Peak (Peak /Lim. Average) (Vertical)

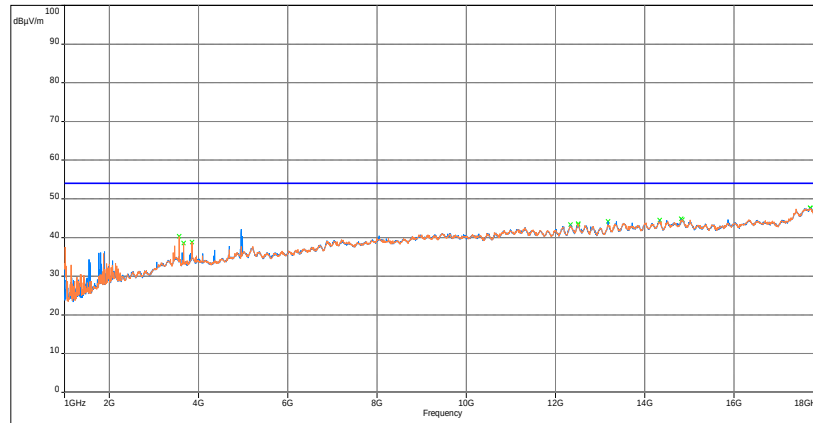

Model: ; Client: ; Comments: High Channel
Battery Power; Test Date: 08/17/2016 21:10

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Average)}$

Results

Complies



4.5.8 Test setup photographs

The following photographs show the testing configurations used.

Not included in the report. Refer to Test Setup photos exhibit.



4.5.5 Test setup photographs (Continued)

Not included in the report. Refer Test Setup photos exhibit.



4.5.5 Test setup photographs (Continued)

Not included in the report. Refer Test Setup photos exhibit.



4.5.8 Test setup photographs (Continued)

Not included in the report. Refer Test Setup photos exhibit.

4.6 Radiated Emissions

FCC Ref: 15.109, ICES 003

4.6.1 Requirement

Limits for Electromagnetic Radiated Emissions FCC Section 15.109(b), ICES 003*, RSS GEN

Frequency (MHz)	Class A at 10m dB(μV/m)	Class B at 3m dB(μV/m)
30-88	39	40.0
88-216	43.5	43.5
216-960	46.4	46.0
Above 960	49.5	54.0

* According to FCC Part 15.109(g) an alternative to the radiated emission limits shown above, digital devices may be shown to comply with the limit of CISPR Pub. 22

4.6.2 Procedures

Measurements are conducted with a quasi-peak detector instrument in the frequency range of 30 MHz to 1000 MHz and with the average detector instrument in the frequency range above 1000 MHz. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.

Measurements of the radiated field are made with the antenna located at a distance of 10 meters from the EUT. If the field-strength measurements at 10m cannot be made because of high ambient noise level or for other reasons, measurements of Class B equipment may be made at a closer distance, for example 3m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for a larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material.


Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4 and EN 55022.

4.6.3 Test Results

Radiated emission measurements were performed from 30 MHz to 18000 MHz. The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.


Date of Test:	August 22 & 26, 2016
Results	Complies

Test Results: Radiated Emissions 30 MHz – 1000 MHz, Battery mode

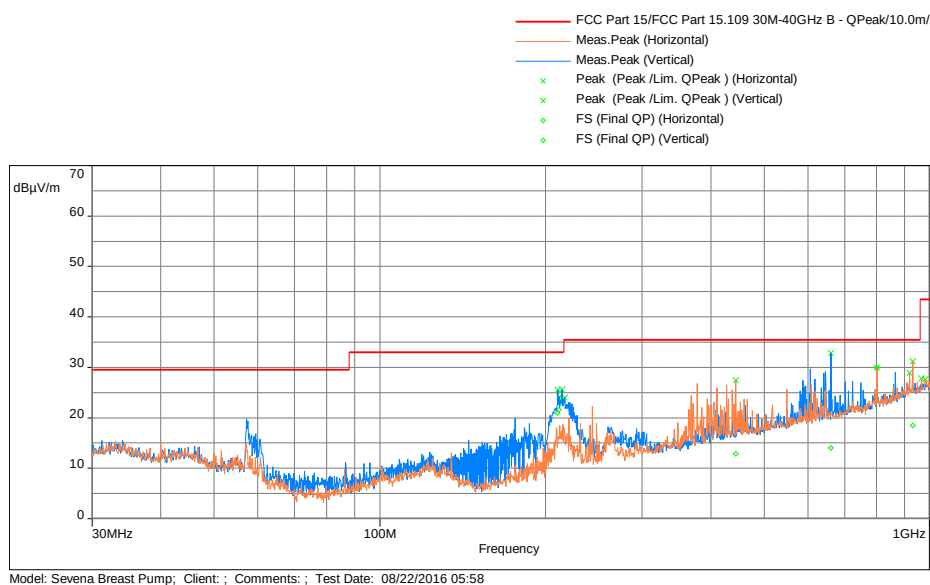


Frequency	Quasi Pk FS	Limit@3m	Margin	Azimuth	Height	Polarity	Raw	Correction
MHz	dB(uV/m)	dB(uV/m)	dB	deg	cm		dB(uV/m)	dB
443.997	12.85	36	-23.15	191.25	2.09	Horizontal	25.39	-12.54
801.818	29.91	36	-6.09	240	1.04	Horizontal	36.76	-6.85
932.049	18.48	36	-17.52	100.5	1	Horizontal	22.76	-4.28
210.519	20.94	34	-13.06	21	1.28	Vertical	41.2	-20.26
211.744	21.64	34	-12.36	356	1.31	Vertical	41.8	-20.16
214.284	23	34	-11	38	1	Vertical	42.98	-19.98

Test Results: Radiated Emissions 1000 MHz – 18000 MHz Peak, Battery mode

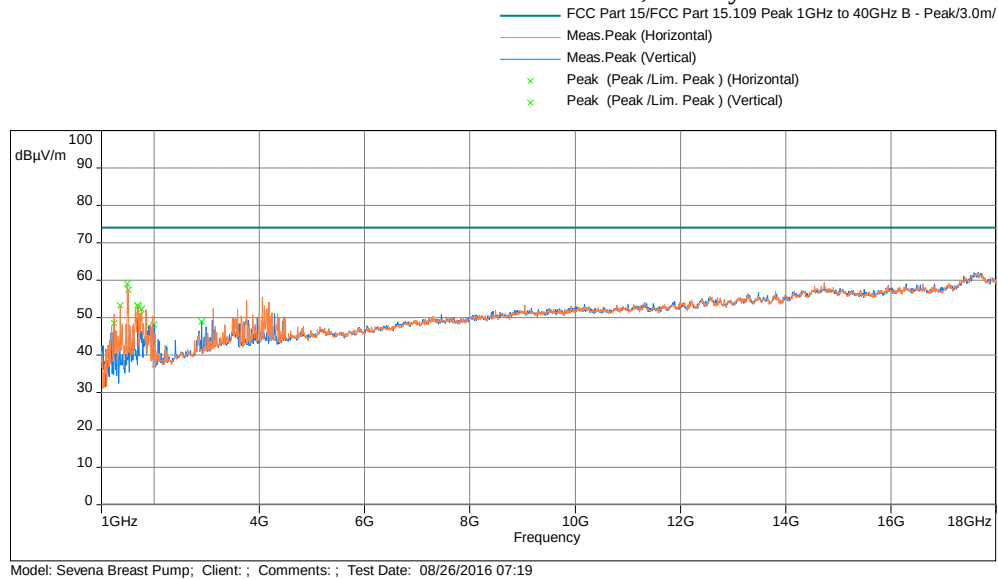


Test Results: Radiated Emissions 1000 MHz – 18000 MHz Average, Battery mode

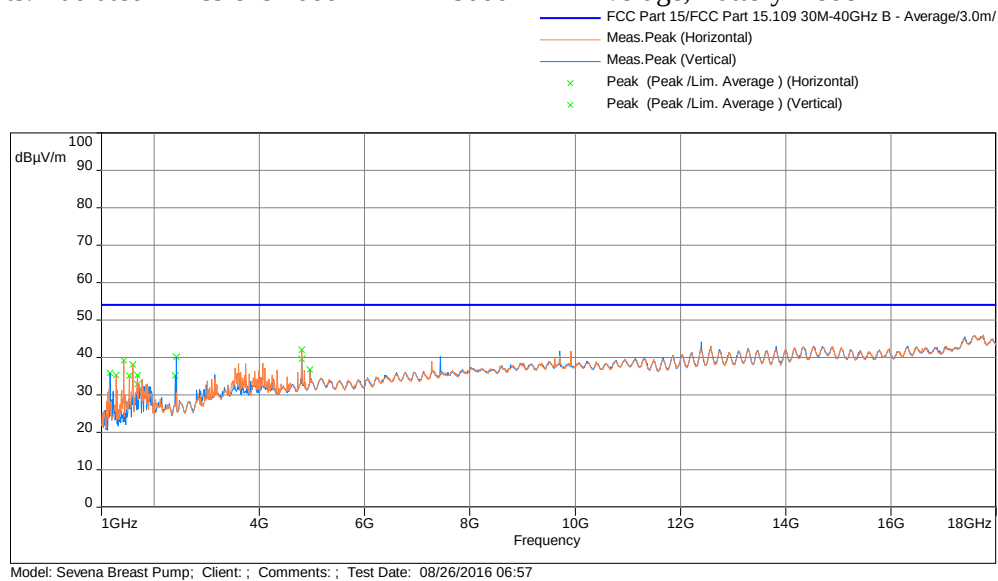


Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Test Results: Radiated Emissions 30 MHz – 1000 MHz, AC mode

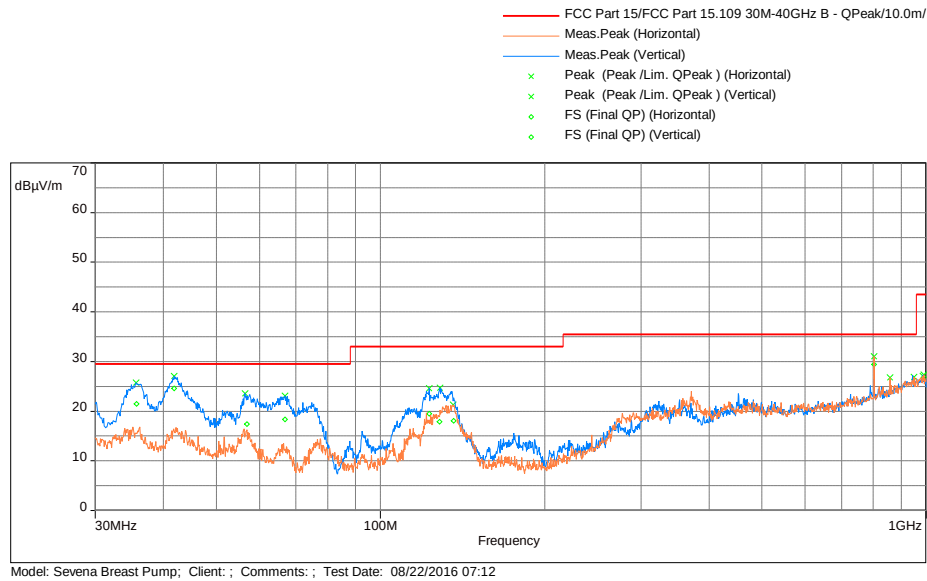


Frequency	Quasi Pk FS	Limit@3m	Margin	Azimuth	Height	Polarity	Raw	Correction
MHz	dB(uV/m)	dB(uV/m)	dB	deg	cm		dB(uV/m)	dB
135.9817	18.02	34	-15.98	245.5	3.54	Horizontal	38.74	-20.72
801.8178	29.47	36	-6.53	95.25	2.14	Horizontal	36.32	-6.85
35.73497	21.44	30	-8.56	286.25	1.04	Vertical	36.44	-15
41.82599	24.65	30	-5.35	197.25	4	Vertical	40.28	-15.63
56.90888	17.26	30	-12.74	216.75	1	Vertical	36.48	-19.22
66.74537	18.39	30	-11.61	110.25	1.63	Vertical	41.23	-22.84
122.7689	19.47	34	-14.53	215.75	1	Vertical	38.53	-19.06
128.2979	17.91	34	-16.09	240	1.16	Vertical	37.2	-19.29

Test Results: Radiated Emissions 1000 MHz – 18000 MHz Peak, AC mode

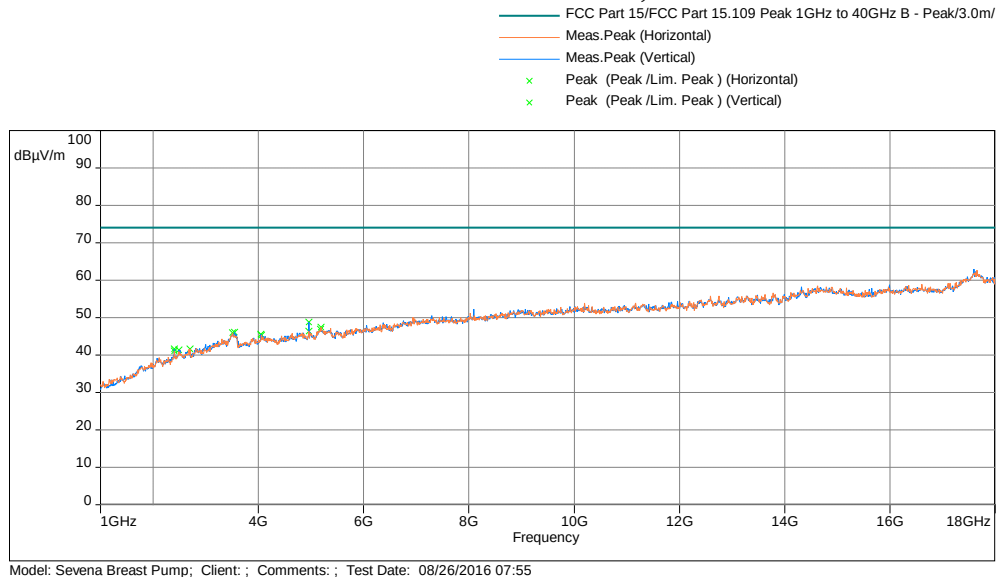

Test Results: Radiated Emissions 1000 MHz – 18000 MHz Average, AC mode

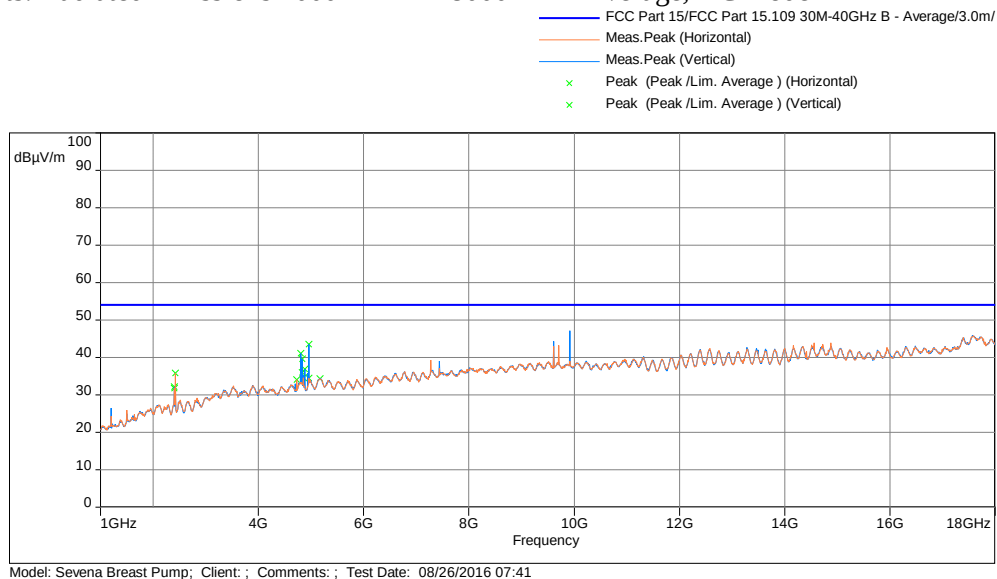

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Result:	Complies by 5.35 dB
----------------	----------------------------



4.6.4 Test Configuration Photographs

The following photographs show the testing configurations used.

Not included in the report. Refer Test Setup photos exhibit.



4.6.4 Test Configuration Photographs (continued)

Not included in the report. Refer Test Setup photos exhibit.

4.7 AC Line Conducted Emission FCC: 15.207, 15.107; RSS-GEN;

4.7.1 Requirement

Frequency Band MHz	Class B Limit dB(μ V)		Class A Limit dB(μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: *Decreases linearly with the logarithm of the frequency. At the transition frequency the lower limit applies.*

4.7.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.


Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4.

4.7.3 Test Result

Date of Test:	August 19, 2016
Results	Complies

AC Line Conducted Emission Data

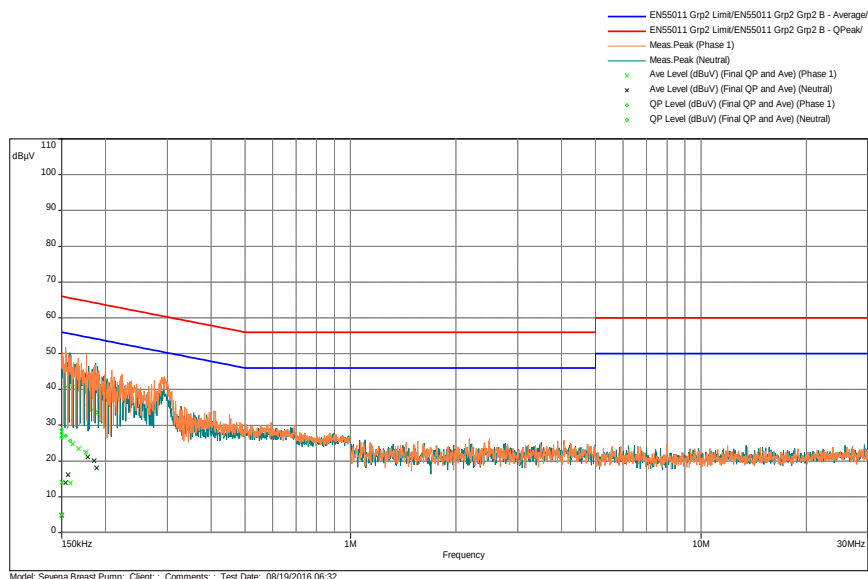

Intertek Testing Services

Line Conducted Emissions 150 kHz - 30 MHz

Operator: KR

Model Number: Sevena

Company: Exploramed NC7, Inc.

Frequency	Av Level	QP Level	Av Limit	QP Limit	Av Margin	QP Margin	Line
MHz	dBuV	dBuV	dBuV	dBuV	dB	dB	
0.150	14.05	26.62	56	66	-41.94	-39.37	Phase 1
0.159	13.84	25.66	55.53	65.53	-41.69	-39.88	Phase 1
0.161	24.8	41.22	55.41	65.41	-30.61	-24.19	Phase 1
0.167	23.38	40.03	55.09	65.09	-31.7	-25.06	Phase 1
0.176	22.36	39.67	54.68	64.68	-32.32	-25.01	Phase 1
0.150	4.82	27.79	56	66	-51.18	-38.21	Neutral
0.154	13.95	27.06	55.8	65.8	-41.85	-38.73	Neutral
0.156	16.16	40.85	55.65	65.65	-39.49	-24.8	Neutral
0.178	21.1	35.64	54.57	64.57	-33.47	-28.93	Neutral
0.186	20.04	34.35	54.23	64.23	-34.19	-29.89	Neutral
0.189	18.04	33.61	54.09	64.09	-36.05	-30.48	Neutral

Results	Complies by 24.19 dB
----------------	-----------------------------



4.7.4 Test Configuration Photographs

The following photographs show the testing configurations used.

Not included in the report. Refer Test Setup photos exhibit.

5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
EMI Receiver	Rohde and Schwarz	ESU	ITS 00961	12	12/11/16
BI-Log Antenna	Antenna Research	LPB 2513	ITS 00355	12	09/11/16
Pre-Amplifier	Sonoma Instrument	310N	ITS 00942	12	01/07/17
Pre-Amplifier (1-18GHz)	Miteq	AMF-4D-001180-24-10P	ITS 00526	12	10/06/16
Horn Antenna	ETS Lindgren	3115	ITS 00982	12	12/16/16

No Calibration required


6.0 Document History

Revision/ Job Number	Writer Initials	Reviewers Initials	Date	Change
1.0 / G102689370	AC	KV	September 07, 2016	Original document

Annex A - Duty Cycle Measurement

Date of Test: August 15-16, 2016

Low Channel @ 2402 MHz, AC Power

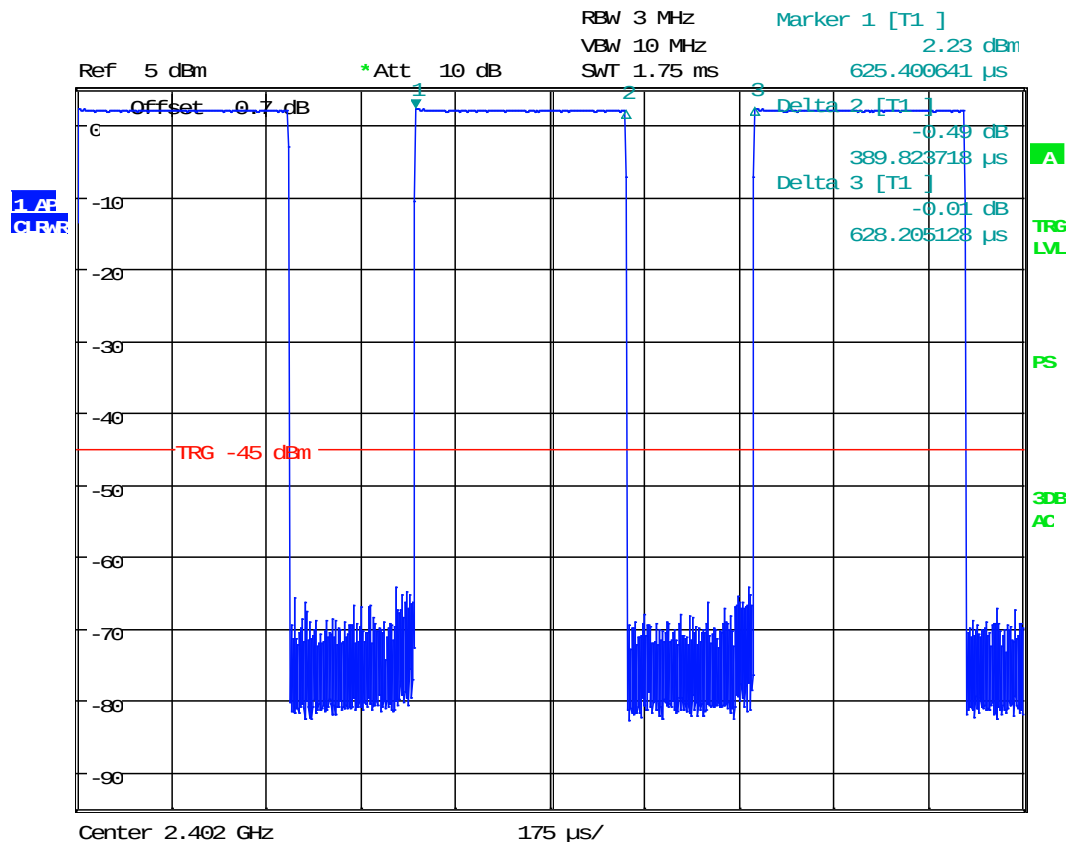


Date: 15.AUG.2016 16:23:31

Duty Cycle: $DC = 389.8 / 628.2 = 0.62$ or 62.0%

Duty Cycle Correction Factor δ (dB) = $10 \log (389.8 / 628.2) = 2.0\text{dB}$

Mid Channel @ 2440 MHz, AC Power

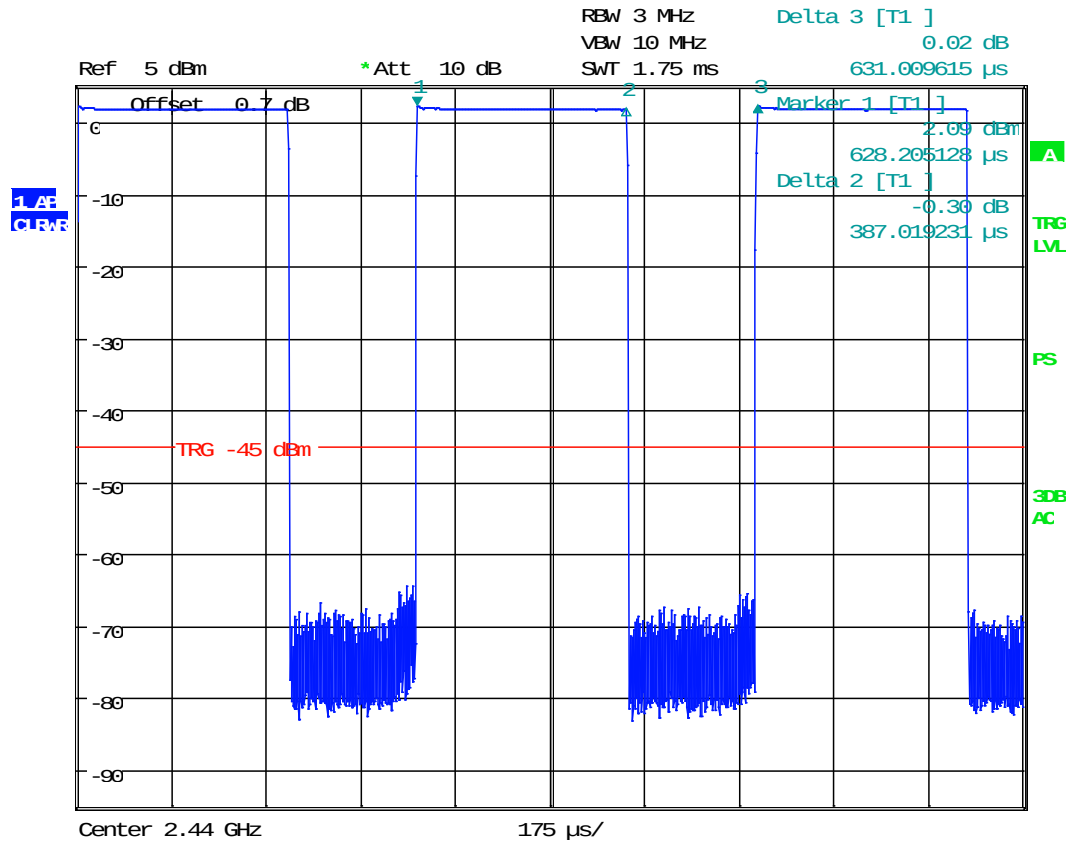


Date: 15.AUG.2016 16:18:41

Duty Cycle: DC = $387.0 / 628.2 = 0.62$ or 62%

Duty Cycle Correction Factor δ (dB) = $10 \log (387.0 / 628.2) = 2.0\text{dB}$

High Channel @ 2480 MHz, AC Power

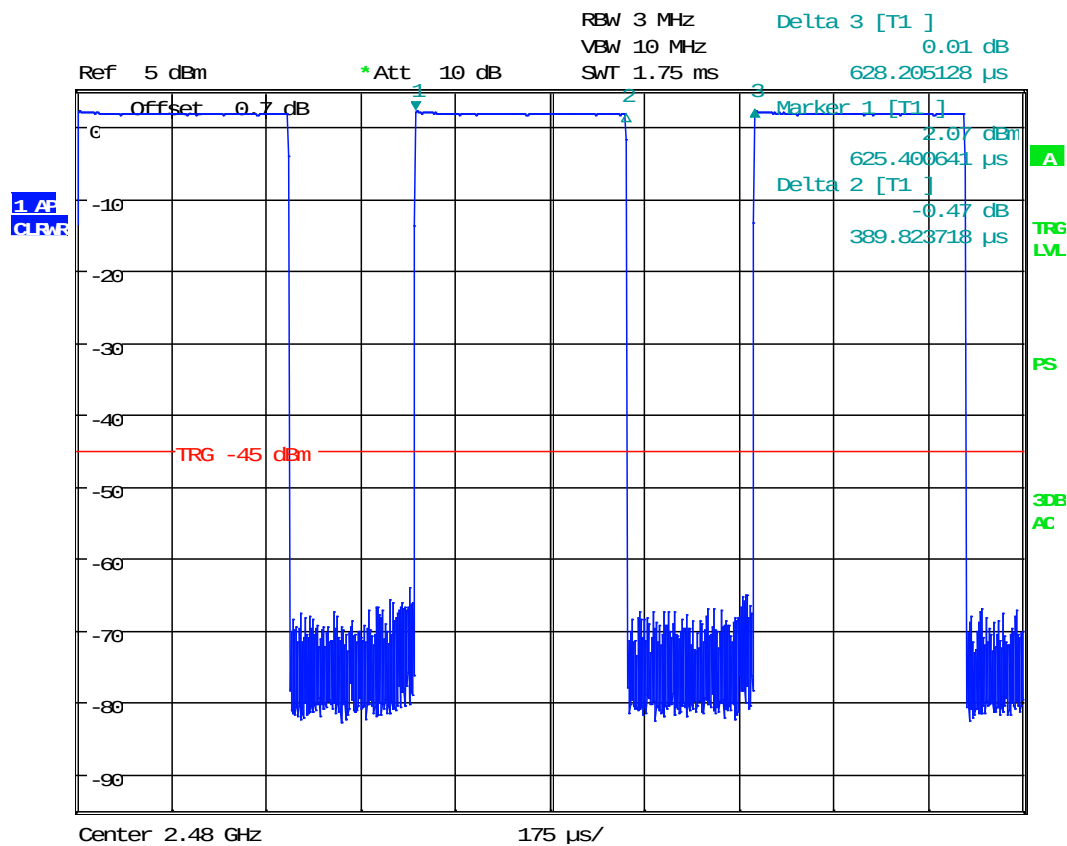


Date: 15.AUG.2016 16:24:10

Duty Cycle: $DC = 389.8 / 625.4 = 0.62$ or 62.0%

Duty Cycle Correction Factor δ (dB) = $10 \log (389.8 / 625.4) = 2.0\text{dB}$

Low Channel @ 2402 MHz, Battery Power

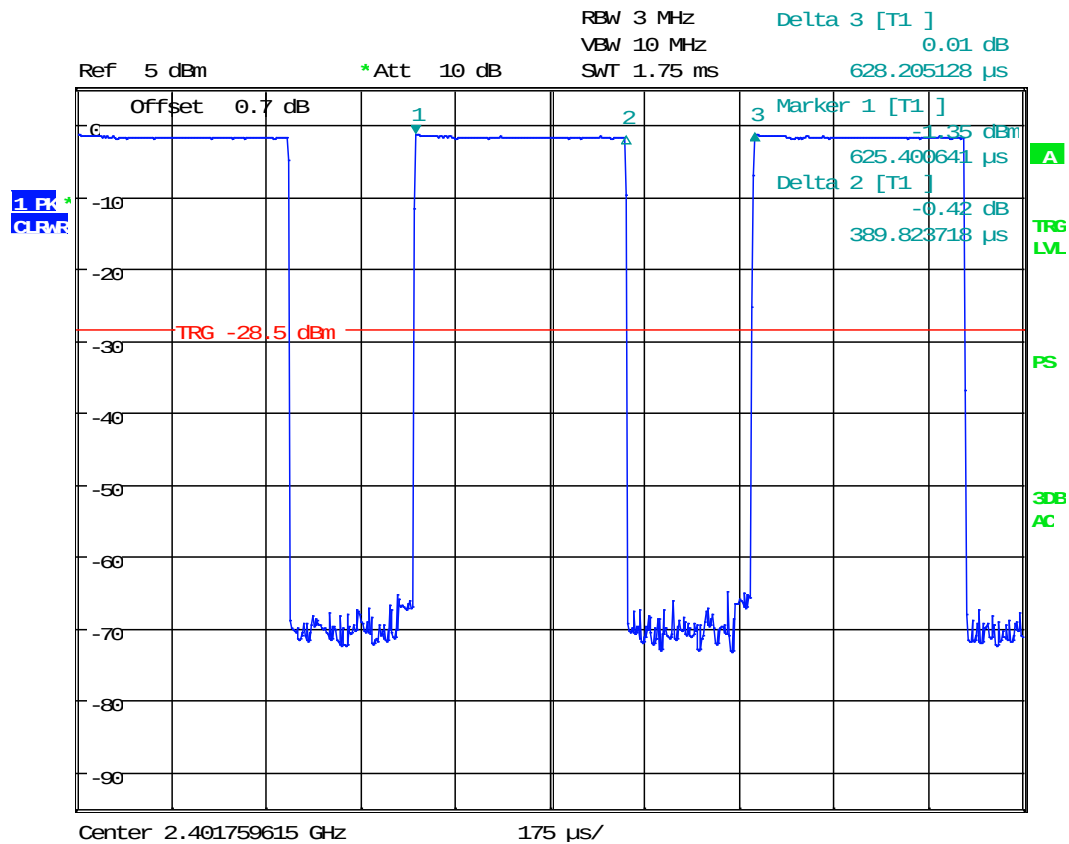


Date: 15.AUG.2016 14:23:31

Duty Cycle: $DC = 389.8 / 625.4 = 0.62$ or 62.0%

Duty Cycle Correction Factor δ (dB) = $10 \log (389.8 / 625.4) = 2.0\text{dB}$

Mid Channel @ 2440 MHz, Battery Power

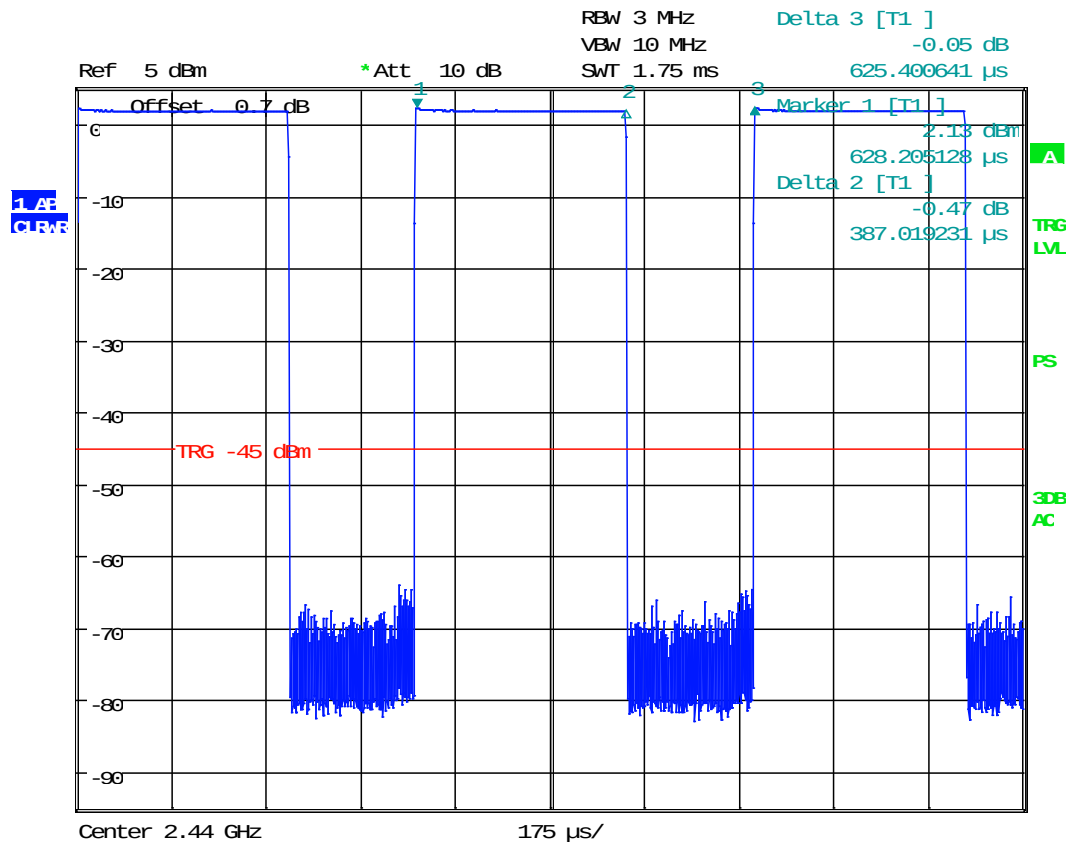


Date: 15.AUG.2016 16:09:38

Duty Cycle: DC = $387.0 / 628.2 = 0.62$ or 62%

Duty Cycle Correction Factor δ (dB) = $10 \log (397.7 / 631.4) = 2.0\text{dB}$

High Channel @ 2480 MHz, AC Power

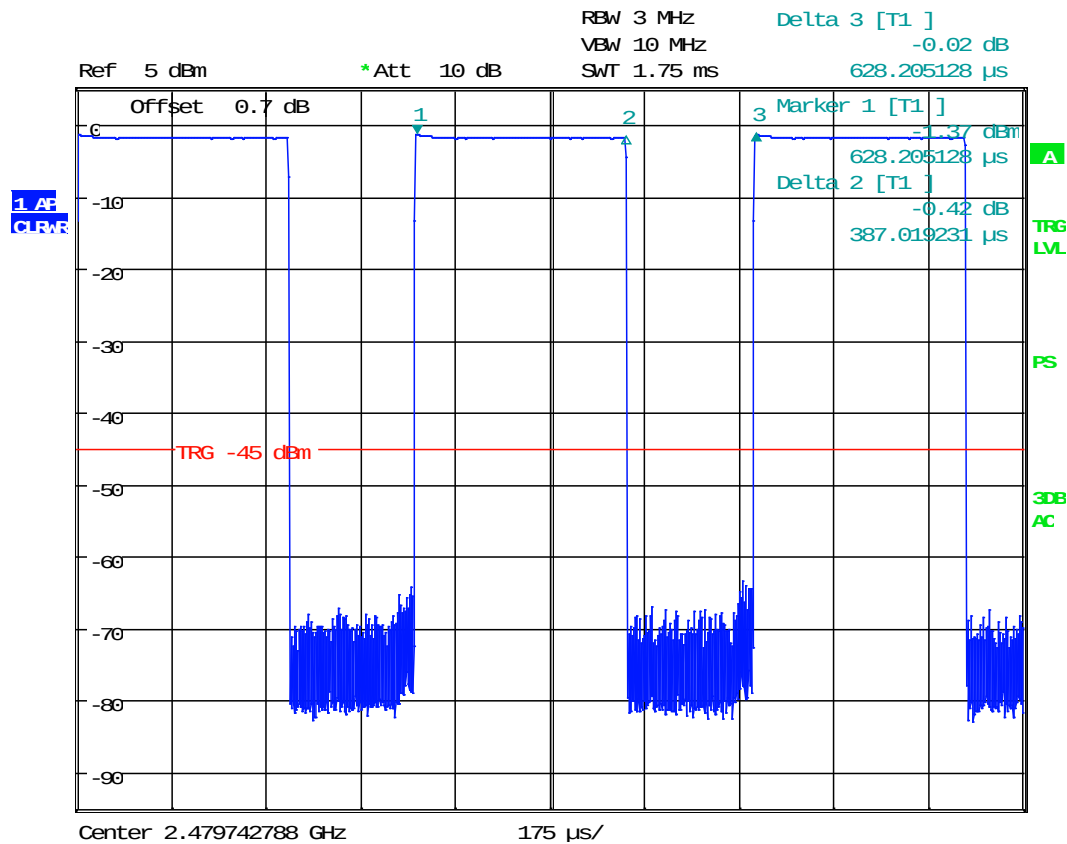

Date: 15.AUG.2016 16:04:00

Duty Cycle: DC = 387.0 / 628.2 = 0.62 or 62.0%

Duty Cycle Correction Factor δ (dB) = $10 \log (387.0 / 628.2) = 2.0\text{dB}$