

Shenzhen Toby Technology Co., Ltd.

Report No.: TB-FCC147368 1 of 40 Page:

FCC Radio Test Report FCC ID: 2AEMJSB5-SLAVE

Original Grant

Report No. TB-FCC147368

Applicant Digitech Asia Ltd

Equipment Under Test (EUT)

EUT Name Baby Safety-slave unit

Model No. SB-5

Brand Name N/A

2016-03-23 **Receipt Date**

Test Date 2016-03-24 to 2016-03-28

2016-03-29 **Issue Date**

FCC Part 15: 2015, Subpart C(15.247) **Standards**

ANSI C63.10: 2013 **Test Method**

Conclusions PASS

In the configuration tested, the EUT complied with the standards specified above

Test/Witness

Engineer

Approved&

Authorized

LVAN SU fuglai.

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

Tel: +86 75526509301



Page: 2 of 40

Contents

CON	NTENTS	2
1.	GENERAL INFORMATION ABOUT EUT	4
	1.1 Client Information	4
	1.2 General Description of EUT (Equipment Under Test)	4
	1.3 Block Diagram Showing the Configuration of System Tested	5
	1.4 Description of Support Units	5
	1.5 Description of Test Mode	5
	1.6 Description of Test Software Setting	6
	1.7 Measurement Uncertainty	
	1.8 Test Facility	7
2.	TEST SUMMARY	8
3.	TEST EQUIPMENT	9
4.	CONDUCTED EMISSION TEST	10
	4.1 Test Standard and Limit	10
	4.2 Test Setup	10
	4.3 Test Procedure	10
	4.4 EUT Operating Mode	11
	4.5 Test Data	11
5.	RADIATED EMISSION TEST	12
	5.1 Test Standard and Limit	12
	5.2 Test Setup	13
	5.3 Test Procedure	14
	5.4 EUT Operating Condition	15
	5.5 Test Data	15
6.	RESTRICTED BANDS REQUIREMENT	24
	6.1 Test Standard and Limit	24
	6.2 Test Setup	
	6.3 Test Procedure	24
	6.4 EUT Operating Condition	25
	6.5 Test Data	25
7.	BANDWIDTH TEST	31
	7.1 Test Standard and Limit	31
	7.2 Test Setup	31
	7.3 Test Procedure	
	7.4 EUT Operating Condition	31
	7.5 Test Data	32
8.	PEAK OUTPUT POWER TEST	34
	8.1 Test Standard and Limit	34
	8.2 Test Setup	



Page: 3 of 40

	8.3 Test Procedure	34
	8.4 EUT Operating Condition	
	8.5 Test Data	35
9.	POWER SPECTRAL DENSITY TEST	37
	9.1 Test Standard and Limit	37
	9.2 Test Setup	37
	8.3 Test Procedure	
	9.4 EUT Operating Condition	37
	9.5 Test Data	38
10.	ANTENNA REQUIREMENT	40
	10.1 Standard Requirement	40
	10.2 Antenna Connected Construction	40
	10.3 Result	40



Page: 4 of 40

1. General Information about EUT

1.1 Client Information

Applicant : Digitech Asia Ltd

Address : Suite 61, 76 Macdonnell Road Hong Kong

Manufacturer : Xunlei Yuanda Technology (Shenzhen) Co., Limited

Address: 3rd Floor, Baicai Technology Park, Beihuan Road, Shiyan Street,

Baoan District, Shenzhen, PRC

1.2 General Description of EUT (Equipment Under Test)

EUT Name	÷	Baby Safety - slave unit		
Models No.	:	SB-5		
Model Difference	Š	N/A		
1000		Operation Frequency: 2402MHz~2480MHz		
33	ā	Number of Channel:	Bluetooth 4.0 (BLE): 40 channels see note(3)	
Product Description		RF Output Power:	4.26 dBm Conducted Power	
2 coonpact	Ġ	Antenna Gain:	1 dBi Integral Antenna	
		Modulation Type:	GFSK	
	1	Bit Rate of Transmitter:	1Mbps(GFSK)	
Power Supply	:	DC power by battery		
Power Rating	:	DC 3V by 2*1.5V AAA B	attery.	
Connecting I/O Port(S)	ŀ	Please refer to the User	's Manual	

Note:

- (1) This Test Report is FCC Part 15.247 for Bluetooth BLE, the test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v03r04.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (3) Antenna information provided by the applicant.

(4) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462



Page: 5 of 40

03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

1.3 Block Diagram Showing the Configuration of System Tested

TX Mode

EUT

1.4 Description of Support Units

The EUT has been tested as an independent unit.

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For (Conducted Test
Final Test Mode	Description
Mode 1	TX Mode



Page: 6 of 40

For	Radiated Test
Final Test Mode	Description
Mode 2	TX Mode
Mode 3	TX Mode (Channel 00/20/39)

Note:

(1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

Bluetooth BLE Mode: GFSK Modulation Transmitting mode.

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software Version	Bluetooth Test.exe		
Frequency	2402 MHz	2442MHz	2480 MHz
BLE GFSK	DEF	DEF	DEF



Page: 7 of 40

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U _{Lab})
	Level Accuracy:	
Conducted Emission	9kHz~150kHz	±3.42 dB
	150kHz to 30MHz	±3.42 dB
Dadiated Emission	Level Accuracy:	. 4 CO dD
Radiated Emission	9kHz to 30 MHz	±4.60 dB
Dadiated Emission	Level Accuracy:	.4.40 dD
Radiated Emission	30MHz to 1000 MHz	±4.40 dB
Padiated Emission	Level Accuracy:	±4.20 dB
Radiated Emission	Above 1000MHz	±4.20 UD

1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at:

1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.



Page: 8 of 40

2. Test Summary

	FCC Par	t 15 Subpart C(15.247)/RSS 247	Issue 1	
Standa	rd Section	Tool Hom	ludam ont	Domonic
FCC	IC	Test Item	Judgment	Remark
15.203	1	Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.4	Conducted Emission	N/A	(1)
15.205	RSS-GEN 7.2.2	Restricted Bands	PASS	N/A
15.247(a)(2)	RSS 247 5.2 (1)	6dB Bandwidth	PASS	N/A
15.247(b)	RSS 247 5.4 (4)	Peak Output Power	PASS	N/A
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	PASS	N/A
15.247(d)	RSS 247 5.5	Transmitter Radiated Spurious Emission	PASS	N/A

Note (1)The EUT is powered by DC battery, no requirement for this test item. N/A is an abbreviation for Not Applicable.





Page: 9 of 40

3. Test Equipment

Conducted	d Emission Te	est			
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Aug. 07, 2015	Aug. 06, 2016
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Aug. 07, 2015	Aug. 06, 2016
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Aug. 07, 2015	Aug. 06, 2016
LISN	Rohde & Schwarz	ENV216	101131	Aug. 07, 2015	Aug. 06, 2016
	Manadotarer	model No.	Oction 140.	Lust Vai.	Date
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due
Spectrum	Agilent	E4407B	MY45106456	Aug. 29, 2015	Aug. 28, 2016
Analyzer	Agiletit	L4407B	101143100430	Aug. 29, 2015	Aug. 20, 2010
EMI Test Receiver	Rohde & Schwarz	ESCI	100010/007	Aug. 07, 2015	Aug. 06, 2016
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 26, 2016	Mar. 25, 2017
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 26, 2016	Mar. 25, 2017
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 26, 2016	Mar. 25, 2017
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 26, 2016	Mar. 25, 2017
Pre-amplifier	Sonoma	310N	185903	Mar. 26, 2016	Mar. 25, 2017
Pre-amplifier	HP	8447B	3008A00849	Mar. 26, 2016	Mar. 25, 2017
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 26, 2016	Mar. 25, 2017
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A



Page: 10 of 40

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1Test Standard FCC Part 15.207

4.1.2 Test Limit


Conducted Emission Test Limit

Eroguenov	Maximum RF Line Voltage (dBμV)		
Frequency	Quasi-peak Level	Average Level	
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

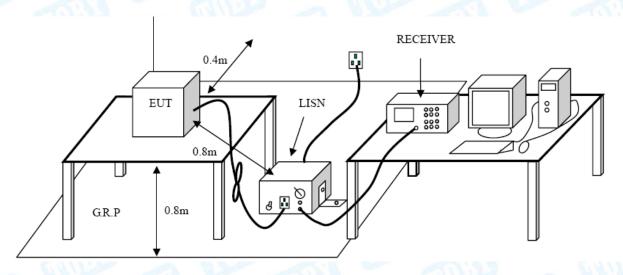

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.



Page: 11 of 40

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

The test is not applicable.



Page: 12 of 40

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard FCC Part 15.209

5.1.2 Test Limit

Radiated Emission Limits (9kHz~1000MHz)

Frequency (MHz	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Emission Limit (Above 1000MHz)

Frequency	Class A (dBuV	/m)(at 3 M)	Class B (dBuV/m)(at 3 M)		
(MHz)	Peak	Average	Peak	Average	
Above 1000	80	60	74	54	


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)




Page: 13 of 40

5.2 Test Setup

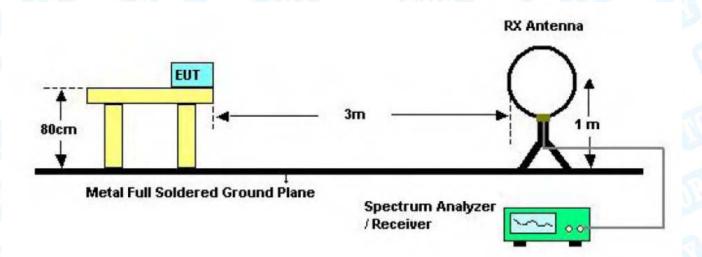

Below 30MHz Test Setup

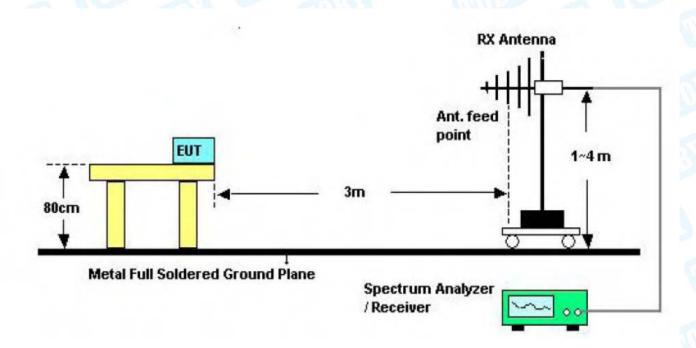

Below 1000MHz Test Setup





Antenna tower

Horn antenna

Spectrum analyzer

Turntable 1.5m A 30cm

Pre-amp

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.



Page: 15 of 40

5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=1 kHz with Peak Detector for Average Values.


Test data please refer the following pages.





Page: 16 of 40

EUT:	Baby Safety–slave unit	SB-5					
Temperature:	25 ℃ Relative Humidity: 55%						
Test Voltage:	DC 3V						
Ant. Pol.	Horizontal						
Test Mode:	BLE TX 2402 Mode						
Remark:	Only worse case is reported						

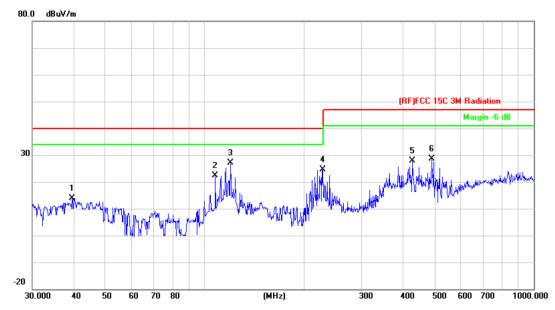

No	. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		39.5756	33.85	-19.89	13.96	40.00	-26.04	peak
2		107.8876	44.22	-21.86	22.36	40.00	-17.64	peak
3	*	119.8555	49.70	-22.50	27.20	40.00	-12.80	peak
4		228.4901	43.86	-19.15	24.71	40.00	-15.29	peak
5		428.0192	40.62	-12.86	27.76	47.00	-19.24	peak
6		489.0269	40.33	-11.65	28.68	47.00	-18.32	peak

^{*:}Maximum data x:Over limit !:over margin





Page: 17 of 40


	ave unit M	odel:		SB-5	
25 ℃	R	elative Humid	dity:	55%	111111111111111111111111111111111111111
DC 3V		88	6		
Vertical	I DITT		1		
BLE TX 2402 N	lode	COUNTY OF	2		
Only worse cas	e is reported	1		38	
2 × 1	Halaman Market Commencer of the Commence	4 Julians	(RF)FCC	Margin -6 d	IB Januarya
60 70 80	(MHz)	300	400	500 600 700	1000.000
Reading eq. Level	Correct Factor	Measure- ment	Limit	Over	
Hz dBu∨	dB/m	dBuV/m	dBuV/	m dB	Detecto
147 41.56	-24.47	17.09	40.0	0 -22.91	peal
8876 47.86	-21.86	26.00	40.0	0 -14.00	peal
1320 52.54	-22.26	30.28	40.0	0 -9.72	peal
3447 38.10	-19.54	18.56	40.0	0 -21.44	peal
318 42.89	-12.80	30.09	47.0		peal
	-10.17	34.15	47.0		peal
	BLE TX 2402 M Only worse cas Reading Level day 41.56 8876 47.86 320 52.54	BLE TX 2402 Mode Only worse case is reported A 2 2 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	BLE TX 2402 Mode Only worse case is reported Reading Correct Measure- Factor Ment dB/m dBuV/m 147 41.56 -24.47 17.09 8876 47.86 -21.86 26.00 320 52.54 -22.26 30.28	BLE TX 2402 Mode Only worse case is reported REFIFCE Measure- Eq. Level Factor Measure- Hz dBuV dB/m dBuV/m dBuV/m 147 41.56 -24.47 17.09 40.0 Re7	BLE TX 2402 Mode Only worse case is reported (REJECC 15C 3M Radiation Margin 6 is 60 70 80 (MHz) 300 400 500 600 700 Reading Correct Measure- eq. Level Factor ment Limit Over dz dBuV dB/m dBuV/m dBuV/m dB 147 41.56 -24.47 17.09 40.00 -22.91 1876 47.86 -21.86 26.00 40.00 -14.00 320 52.54 -22.26 30.28 40.00 -9.72





Page: 18 of 40

Baby Safety-slave unit	Model:	SB-5				
25 ℃	Relative Humidity:	55%				
DC 3V						
Horizontal						
BLE Mode TX 2402 MHz						
No report for the emission which more than 10 dB below the prescribed limit.						
	25 °C DC 3V Horizontal BLE Mode TX 2402 MHz No report for the emission w	25 °C Relative Humidity: DC 3V Horizontal BLE Mode TX 2402 MHz No report for the emission which more than 10 dB b				

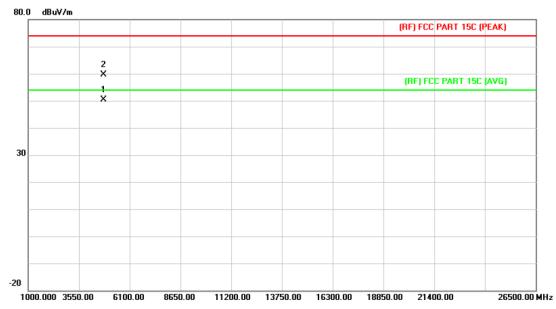


No	. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4803.913	36.93	13.44	50.37	54.00	-3.63	AVG
2		4804.480	46.19	13.44	59.63	74.00	-14.37	peak





Page: 19 of 40

EUT:	Baby Safety-slave unit	Model:	SB-5					
Temperature:	25 ℃	Relative Humidity:	55%					
Test Voltage:	DC 3V	DC 3V						
Ant. Pol.	Vertical							
Test Mode:	BLE Mode TX 2402 MHz	BLE Mode TX 2402 MHz						
Remark:	No report for the emissio	No report for the emission which more than 10 dB below the						
	prescribed limit.	2 m 13						

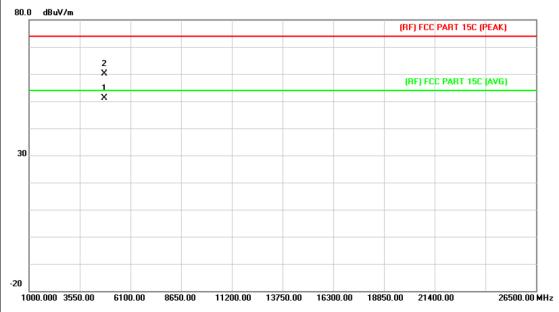


No	. Mk	. Freq.	_	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4803.979	37.58	13.44	51.02	54.00	-2.98	AVG
2		4804.432	46.80	13.44	60.24	74.00	-13.76	peak





Page: 20 of 40

EUT:	Poby Cafety, clave unit	Model:	SB-5				
EU1:	Baby Safety-slave unit	woder:	3B-3				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V						
Ant. Pol.	Horizontal						
Test Mode:	BLE Mode TX 2442 MHz						
Remark:	No report for the emissio	n which more than 10 o	dB below the				
	prescribed limit.						

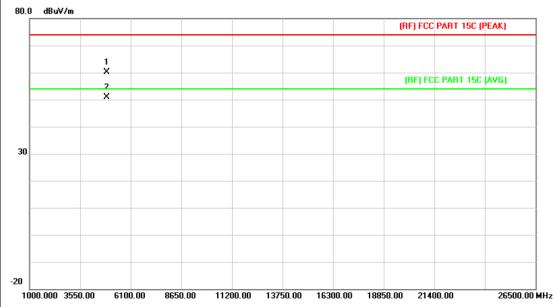


No.	Mk.	Freq.	Reading Level		Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4883.892	46.12	13.92	60.04	74.00	-13.96	peak
2	*	4884.078	36.95	13.92	50.87	54.00	-3.13	AVG





Page: 21 of 40

EUT:	Baby Safety-slave unit	Model:	SB-5				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V						
Ant. Pol.	Vertical	Vertical					
Test Mode:	BLE Mode TX 2442 MHz	BLE Mode TX 2442 MHz					
Remark:	No report for the emissio	No report for the emission which more than 10 dB below the					
	prescribed limit.						

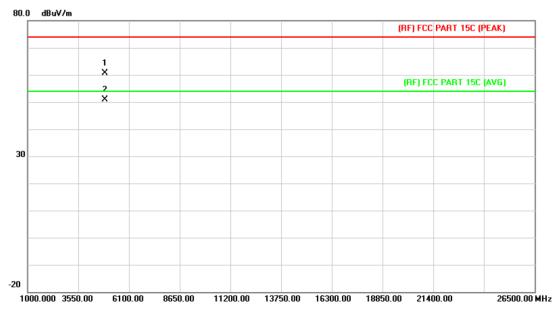


No	. Mk	. Freq.	_	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4883.838	46.61	13.92	60.53	74.00	-13.47	peak
2	*	4883.988	36.97	13.92	50.89	54.00	-3.11	AVG





Page: 22 of 40

EUT:	Baby Safety-slave unit	Model:	SB-5				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V	01					
Ant. Pol.	Horizontal						
Test Mode:	BLE Mode TX 2480 MHz		THE PARTY OF THE P				
Remark:	No report for the emission which more than 10 dB below the						
	prescribed limit.						

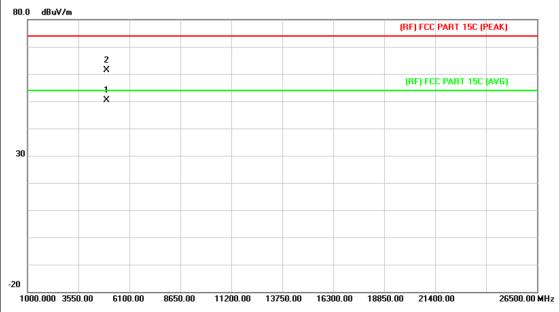

No	э. M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.904	35.96	14.36	50.32	54.00	-3.68	AVG
2		4959.961	47.13	14.36	61.49	74.00	-12.51	peak





Page: 23 of 40

EUT:	Baby Safety-slave unit	Model:	SB-5				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V	01 - 6					
Ant. Pol.	Vertical						
Test Mode:	BLE Mode TX 2480 MHz		The same				
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						



No	o. Mk	. Freq.	_	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.934	35.29	14.36	49.65	54.00	-4.35	AVG
2		4960.162	45.75	14.36	60.11	74.00	-13.89	peak



Page: 24 of 40

6. Restricted Bands Requirement


6.1 Test Standard and Limit

6.1.1 Test Standard FCC Part 15.209 FCC Part 15.205

6.1.2 Test Limit

Restricted Frequency	Class B (dBuV/m)(at 3 M)		
Band (MHz)	Peak	Average	
2310 ~2390	74	54	
2483.5 ~2500	74	54	

6.2 Test Setup

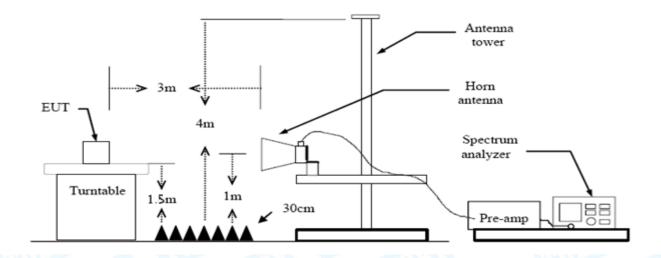

6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked



Page: 25 of 40

and then Quasi Peak detector mode re-measured.

- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=1 kHz with Peak Detector for Average Values.

Test data please refer the following pages.





Page: 26 of 40

(1) Radiation Test

EUT:	Baby Safety-slave unit	SB-5					
Temperature:	25 ℃	Relative Humidity: 55%					
Test Voltage:	DC 3V	DC 3V					
Ant. Pol.	Horizontal		A HALL				
Test Mode:	BLE Mode TX 2402 MHz						
Remark:	N/A						




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	42.85	0.77	43.62	74.00	-30.38	peak
2		2390.000	33.21	0.77	33.98	54.00	-20.02	AVG
3	*	2401.800	88.36	0.82	89.18	Fundamental	Frequency	AVG
4	Χ	2402.200	92.73	0.82	93.55	Fundamental	Frequency	peak





Page: 27 of 40

EUT:	Baby Safety–slave unit	Model:	SB-5
Temperature:	25 ℃	Relative Humidity:	55%
Test Voltage:	DC 3V		39
Ant. Pol.	Vertical		
Test Mode:	BLE Mode TX 2402 MHz		ABILL
Remark:	N/A	(M)3	

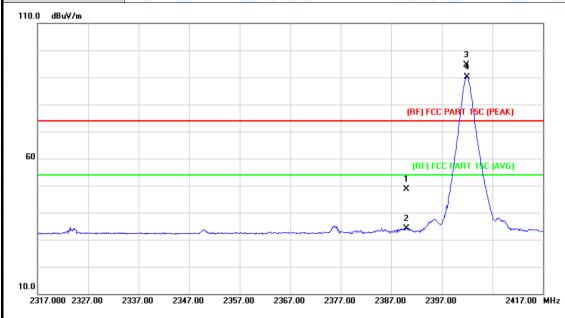


No	. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	47.88	0.77	48.65	74.00	-25.35	peak
2		2390.000	33.26	0.77	34.03	54.00	-19.97	AVG
3	Χ	2401.900	93.75	0.82	94.57	Fundamental	Frequency	peak
4	*	2402.000	89.42	0.82	90.24	Fundamental	Frequency	AVG





Page: 28 of 40

EUT:	Baby Safety-slave unit	Model:	SB-5				
Temperature:	25 ℃	Relative Humidity:	55%				
Test Voltage:	DC 3V	DC 3V					
Ant. Pol.	Horizontal						
Test Mode:	BLE Mode TX 2480 MHz	BLE Mode TX 2480 MHz					
Remark:	N/A		[13]				

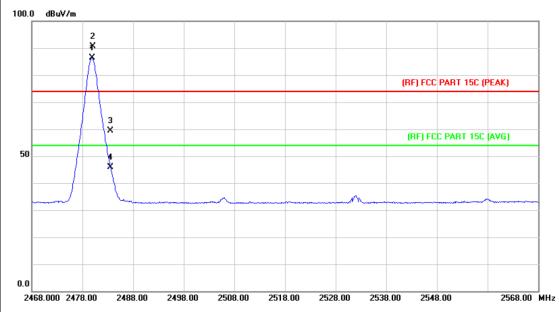


No	. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2479.900	85.29	1.15	86.44	Fundamental	Frequency	AVG
2	Χ	2480.100	89.49	1.15	90.64	Fundamental	Frequency	peak
3		2483.500	58.10	1.17	59.27	74.00	-14.73	peak
4		2483.500	44.77	1.17	45.94	54.00	-8.06	AVG





Page: 29 of 40

EUT:	Baby Safety-slave unit	Model:	SB-5
Temperature:	25 ℃	Relative Humidity:	55%
Test Voltage:	DC 3V	01 - 6	THE STATE OF
Ant. Pol.	Vertical		
Test Mode:	BLE Mode TX 2480 MHz		
Remark:	N/A		(:13)

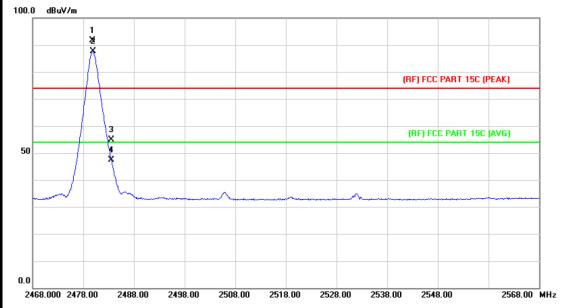


No.	. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	Χ	2479.800	90.55	1.15	91.70	Fundamental F	requency	peak
2	*	2479.900	86.39	1.15	87.54	Fundamental F	requency	AVG
3		2483.500	53.61	1.17	54.78	74.00	-19.22	peak
4		2483.500	46.11	1.17	47.28	54.00	-6.72	AVG





Page: 30 of 40

(2) Conducted Test

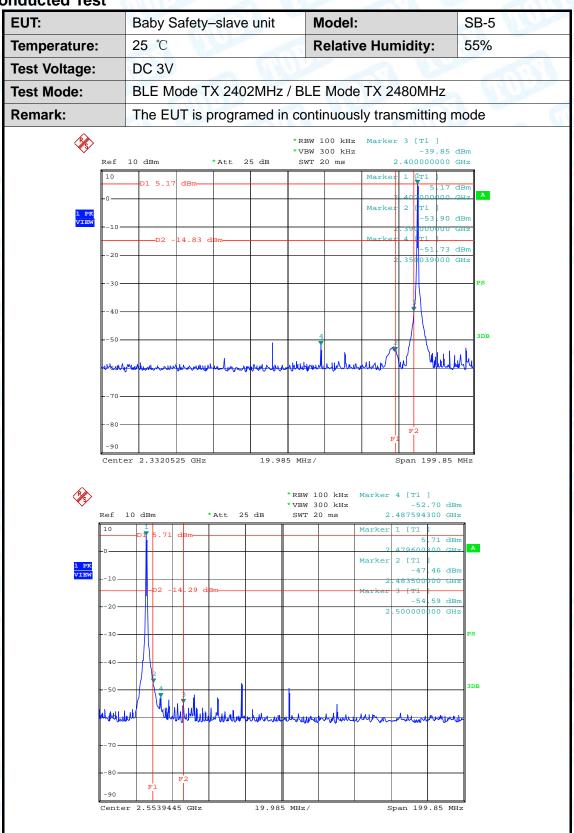



Page: 31 of 40

7. Bandwidth Test


7.1 Test Standard and Limit

7.1.1 Test Standard FCC Part 15.247 (a)(2)

7.1.2 Test Limit

FCC P	FCC Part 15 Subpart C(15.247)/RSS-247					
Test Item	Limit	Frequency Range(MHz)				
Bandwidth	>=500 KHz (6dB bandwidth)	2400~2483.5				

7.2 Test Setup



7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3)Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

7.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.






Page: 32 of 40

7.5 Test Data

EUT:	Ba	aby Safety-slave unit	Model:	SB-5		
emperature:	25	°C	Relative Humidity:	: 55%		
Test Voltage:	DO	C 3V				
Test Mode:	ode: BLE TX Mode					
Channel frequence (MHz)		6dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)		
2402		714.00	1032.00	(KHZ)		
2442		696.00	1032.00	>=500		
2480		714.00	1032.00			
			E Mode			
Ref	Offset D1 -1	*Att 25 dB :	RBW 100 kHz Delta 1 [T1] 7BW 300 kHz 0.1- SWT 2.5 ms 714.000000000 OBW 1.032000000 Marker 1 [T1] 9 22 401634000 Temp 1 [T1 OBW]	O MHZ O GHZ		
10	Offset D1 -3	*Att 25 dB .	78W 300 kHz 0.1- SWT 2.5 ms 714.000000000 OBW 1.032000000 Marker 1 [T1] 2.40163400 Temp 1 [T1 OBW]	0 kHz 0 MHz 2 dBm A 0 GHZ 1 dBm 0 GHZ LVL 5 dBm		



Page: 33 of 40

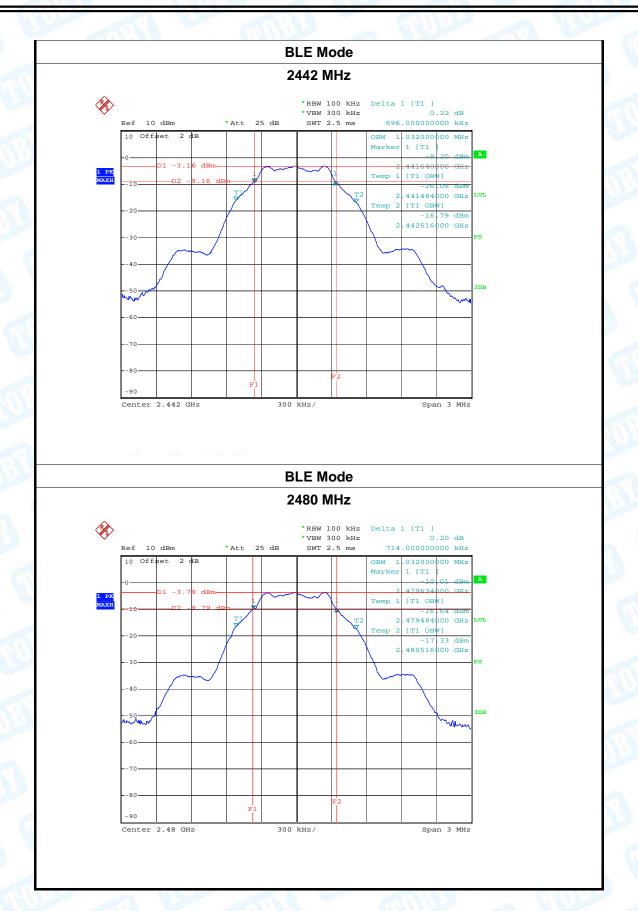



Page: 34 of 40

8. Peak Output Power Test


8.1 Test Standard and Limit

8.1.1 Test Standard FCC Part 15.247 (b)

8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-247				
Test Item	Limit	Frequency Range(MHz)		
Peak Output Power	1 Watt or 30 dBm	2400~2483.5		

8.2 Test Setup



8.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to section 9.1.1 of KDB 558074 D01 DTS Meas Guidance v03r04.

- (1) Set the RBW≥DTS Bandwidth
- (2) Set VBW≥3*RBW
- (3) Set Span≥3*RBW
- (4) Sweep time=auto
- (5) Detector= peak
- (6) Trace mode= maxhold.
- (7) Allow trace to fully stabilize, and then use peak marker function to determine the peak amplitude level.

8.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.






Page: 35 of 40

8.5 Test Data

EUT:		Baby Safety-slave u			nıt	Model:			SB-5		
Temperatur	e:	25 ℃				Relative Humidity:				55%	
Test Voltage) :	DC 3V				THE PARTY OF THE P					
Test Mode:		BLE TX Mode			nn m				333		
Channel fre	equen	iency (MHz) Test			Test	Resul	esult (dBm)			Limit (dBm)	
2	402					4.26	3				
	2442					4.09	9			30	
	2480					4.10)				
					В	LE M					
						402 N					
						* DDW -	1 MHz	Marker	r 1 [T1	1	
\$											
		dBm		*Att 2	5 dB	* VBW				.26 dBm	
	10	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	
v		dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	
1 PK MAXH	10	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	
v	-0	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	
v	-0	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	
v	10	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	À
v	-20 -30	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	À
v	10 -0 -10 20 30	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	PS
v	-20 -30	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	PS
v	10 -0 -20 -30 -40	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	PS
v		dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	PS
v	10 -0 -20 -30 -40 50 60	dBm		*Att 2	5 dB	* VBW	3 MHz		4	.26 dBm	PS



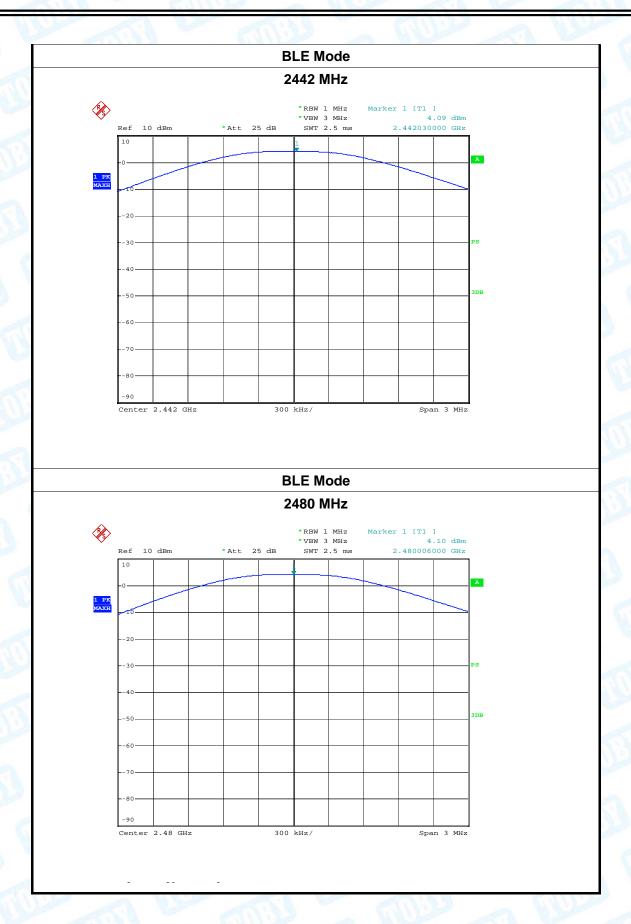



Page: 37 of 40

9. Power Spectral Density Test


9.1 Test Standard and Limit

9.1.1 Test Standard FCC Part 15.247 (e)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)					
Test Item	Limit	Frequency Range(MHz)			
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5			

9.2 Test Setup



8.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v03r04.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz(5) Set the VBW to: 10 kHz
- (6) Detector: peak(7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

9.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Midle and high channel for the test.





Page: 38 of 40

9.5 Test Data

Test Voltage: DC 3V DC 3V Test Mode: BLE TX Mode BLE TX Mode Channel Frequency Power Density (3 kHz/dBm) (3 kHz/dBm) 2402 -10.12 2442 -11.65 8 2480 -12.05 BLE Mode 2402 MHz	Ba	UT:
Channel Frequency	ure: 25	emperatur
Channel Frequency	ge: De	est Voltage
(MHz) (3 kHz/dBm) 2402 -10.12 2442 -11.65 8 2480 -12.05 BLE Mode 2402 MHz *RBM 3 kHz Marker 1 [T] *VBM 10 kHz -10.12 dBm	: BI	est Mode:
2402 -10.12 2442 -11.65 2480 -12.05 BLE Mode 2402 MHz *RBW 3 kHz Marker 1 [T1] *VBW 10 kHz -10.12 dbm -10.12 dbm 2.401868000 GHz -10 off feet 1 dB -10 o	el Frequen	Channel
2442 -11.65 2480 -12.05 BLE Mode 2402 MHz *RBW 3 KHz Marker 1 (T1 1 -10.12 dBm -10.12 dBm -10.12 dBm -10.12 dBm -10.00	(MHz)	(1
#RBW 3 kHz	2402	2
#RBW 3 kHz	2442	2
#RBW 3 kHz	2480	2
*RBW 3 kHz Marker 1 [T1] *VBW 10 kHz -10.12 dBm *Att 25 dB SWT 125 ms 2.401868000 GHz 10 Offset 1 dB -0 -10 -40 -40 -50 -60 -90		
*RBW 3 kHz Marker 1 [T1] *VBW 10 kHz -10.12 dBm Ref 10 dBm *Att 25 dB SWT 125 ms 2.401868000 GHz 10 Offset 1 dB -0 -10 -10 -10 -10 -10 -10 -10 -10 -10		
*VBW 10 kHz -10.12 dBm Ref 10 dBm *Att 25 dB SWT 125 ms 2.401868000 GHz 10 Offset 1 dB		
-10 EVL -30405060708090		V \$
-10 LVL -30 -40 -50 -60 -70 -80 -90	10 Offset	
-30 -40 -5060708090	PK	1 PK
40 50 60 70 80 90		
40 50 60 70 80 90	- APT-MUT JAV	
40 50 60 70 80 90	-30	
60 70 80 90	-40	
60 70 80 90	50	
70 80 90	-50	
80	60	
-90	-70	
	-80	
Center 2.402 GHz 110 kHz/ Span 1.1 MHz	-90	
	Center 2.40	
Date: 31.MAR.2016 17:18:13	te: 31.MAR.20	Date



BLE Mode 2442 MHz Marker 1 [T1] -11.65 dBm 2.441711800 GHz *RBW 3 kHz *VBW 10 kHz SWT 125 ms *Att 25 dB Ref 10 dBm 10 Offset Kny Munumun na na mana Center 2.442 GHz 110 kHz/ Span 1.1 MHz Date: 31.MAR.2016 17:18:51 **BLE Mode** 2480 MHz Marker 1 [T1] -12.05 dBm 2.479711800 GHz *RBW 3 kHz *VBW 10 kHz SWT 125 ms Ref 10 dBm *Att 25 dB hajalla haran alla mana al Span 1.1 MHz Center 2.48 GHz 110 kHz/ Date: 31.MAR.2016 17:19:27



Page: 40 of 40

10. Antenna Requirement

10.1 Standard Requirement

10.1.1 Standard FCC Part 15.203

10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

10.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 1 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

10.3 Result

The EUT antenna is a Dipole Integral Antenna. It complies with the standard requirement.

	Antenna Type
	▼ Permanent attached antenna
0.03	□ Unique connector antenna
	□ Professional installation antenna