

#### IXIN GLOBAL TRADE

Application For Certification

FCC ID: 2AHXQ1

**PINK Mini Dog Bluetooth Speaker** 

Model: 23594293

**Brand name: PINK** 

2.4GHz Transceiver

Report No.: 170913008SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-16]

Sign on file		

Approved by:

Rode Liu Kidd Yang
Engineer Senior Project Engineer
Date: October 10, 2017

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample
  may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_TX\_c

Prepared and Checked by:

#### LIST OF EXHIBITS

#### INTRODUCTION

EXHIBIT 1: General Description

EXHIBIT 2: System Test Configuration

EXHIBIT 3: Emission Results

EXHIBIT 4: Equipment Photographs

EXHIBIT 5: Product Labelling

EXHIBIT 6: Technical Specifications

EXHIBIT 7: Instruction Manual

EXHIBIT 8: Miscellaneous Information

EXHIBIT 9: Confidentiality request

EXHIBIT10: Test Equipment List

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# **MEASUREMENT/TECHNICAL REPORT**

## IXIN GLOBAL TRADE

Model: 23594293

FCC ID: 2AHXQ1

This report concerns (check one:) Original Grant X Class II Change
Equipment Type: DSS - Part 15 Spread Spectrum Transmitter
Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No _X If yes, defer until: date
Company Name agrees to notify the Commission by: date
of the intended date of announcement of the product so that the grant can be issued on the date.
Transition Rules Request per 15.37? Yes No _X
If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-1 Edition] provision.
Report prepared by:
Rode Liu Intertek Testing Services Shenzhen Ltd. Longhua Branch 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China Tel / Fax: 86-755-8601 6288/86-755-8601 6751

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# **Table of Contents**

1.0	General Description	
1.1	Product Description	
1.2	Related Submittal(s) Grants	
1.3	Test Methodology	2
1.4	Test Facility	2
2.0	System Test Configuration	4
2.1	Justification	
2.2	EUT Exercising Software	
2.3	Special Accessories	
2.4	Equipment Modification	
2.5	Measurement Uncertainty	
2.6	Support Equipment List and Description	5
3.0	Test Results	7
3.1	Radiated Test Result	
3.1.		
3.1.		
3.1.		
3.1.		
3.2	Conducted Emission at Mains Terminal	
3.2.		
3.2.		
3.3	Peak Power	
3.4	20dB Bandwidth	
3.5	Channel Number (Number of Hopping Frequencies)	
3.6	Channel Separation (Carrier Frequency Separation)	
3.7	Dwell Time (Time of Occupancy)	
3.8	Band Edge	
3.9	Transmitter Spurious Emission (Conducted)	34
4.0	Equipment Photographs	39
5.0	Product Labelling	
6.0	<u>Technical Specifications</u>	43
7.0	Instruction Manual	45
8.0	Miscellaneous Information	47
8.1	Discussion of Pulse Desensitization	
8.2	Transmitter Duty Cycle Calculation	49
8.3	Emissions Test Procedures	
9.0	Confidentiality Request	53
	<u> </u>	
10.0	Test Equipment List	55

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## List of attached file

Exhibit type	File Description	filename
Test Report	Test Report	report.pdf
Operational Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photos	External Photo	external photos.pdf
Internal Photos	Internal Photo	internal photos.pdf
ID Label/Location Info	Label Artwork and Location	label.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Users Manual	User Manual	manual.pdf
Cover Letter	Letter of Agency	agency.pdf
Cover Letter	Confidentiality Letter	request.pdf

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# EXHIBIT 1 GENERAL DESCRIPTION

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 1.0 **General Description**

#### 1.1 Product Description

The equipment under test (EUT) is a PINK Mini Dog Bluetooth Speaker with Bluetooth FHSS technology operating in 2402-2480MHz. The EUT is powered by Rechargeable battery (DC 3.7V) which can be charged by USB port (DC 5V, 0.5A). For more detail information pls. refer to the user manual.

Bluetooth Version: 4.2 without BLE Antenna Type: Integral antenna

Antenna Gain: 0 dBi

Modulation Type: GFSK,  $\pi/4$ -DQPSK and 8-DPSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is an application for certification of transceiver for the PINK Mini Dog Bluetooth Speaker which has Bluetooth function (BT4.2 without BLE), and there is no corresponding unit for certification.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10: 2013 and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application.

#### 1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are Intertek Testing Services Shenzhen Ltd. Longhua Branch and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# EXHIBIT 2 SYSTEM TEST CONFIGURATION

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 2.0 System Test Configuration

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10: 2013.

The EUT was powered by rechargeable battery (DC 3.7V, 300mAh) which was charged by adapter or PC with 120V/60Hz input during the test.

All packets DH1, DH3 & DH5 mode in modulation type GFSK,  $\pi$ /4-DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit was flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

## 2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

#### 2.3 Special Accessories

No special accessory attached.

#### 2.4 Equipment Modification

Any modifications installed previous to testing by IXIN GLOBAL TRADE will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

# 2.6 Support Equipment List and Description

Description	Manufacturer	Model No.	
iPod	Apple	A1446	
USB Cable	N/A	Unshielded, Length 100cm	
PC	HP	430	
AC Adapter	TP	TP50050	

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# **EXHIBIT 3**

# **TEST RESULTS**

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# 3.0 <u>Test Results</u>

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

## 3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where  $FS = Field Strength in dB\mu V/m$ 

RA = Receiver Amplitude (including preamplifier) in  $dB\mu V$ 

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

 $RA = 62.0 dB\mu V$ 

AF = 7.4 dB

CF = 1.6 dB

 $AG = 29.0 \, dB$ 

PD = 0 dB

AV = -10 dB

 $FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 dB\mu V/m$ 

Level in  $\mu V/m = Common Antilogarithm [(32 dB<math>\mu V/m)/20] = 39.8 \mu V/m$ 

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

#### 3.1.3 Radiated Emissions- FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 58.000 MHz

Judgement: Passed by 14.2 dB

#### **TEST PERSONNEL:**

Sign on file

Rode Liu, Engineer Typed/Printed Name

September 22, 2017
Date

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Date of Test: September 22, 2017

Applicant: IXIN GLOBAL TRADE


Model:23594293 Sample: 1/1

Worst-case operating Mode: BT link

Modulation type: GFSK


## ANT Polarity: Horizontal

FCC Part 15

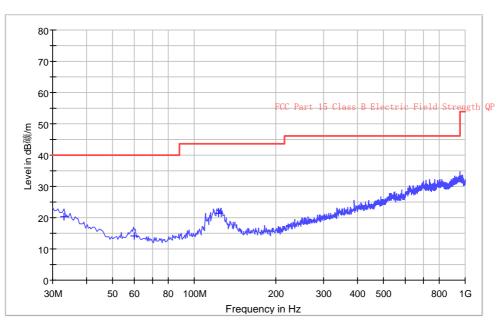

# ANT Polarity: Vertical

FCC Part 15

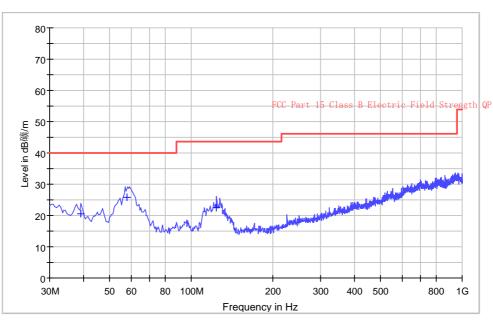

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Applicant: IXIN GLOBAL TRADE Date of Test: September 22, 2017

Model: 23594293 Sample: 1/1

Worst-case operating Mode: BT link

Modulation type: GFSK

Table 1

## **Radiated Emissions**

Polarization	Frequency	Reading	Pre-	Antenna	Net	Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	33.000	29.7	20.0	10.7	20.4	40.0	-19.6
Horizontal	60.000	19.1	20.0	15.0	14.1	40.0	-25.9
Horizontal	123.000	23.0	20.0	18.5	21.5	43.5	-22.0
Vertical	39.215	29.4	20.0	11.1	20.5	40.0	-19.5
Vertical	58.000	34.5	20.0	11.3	25.8	40.0	-14.2
Vertical	124.090	17.2	20.0	25.3	22.5	43.5	-21.0

NOTES: 1. Quasi-Peak detector is used except for others stated.

- 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. All emissions are below the QP limit.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Report No.: 170913008SZN-001

#### 3.1.4 Transmitter Spurious Emissions (Radiated) - FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 7440.000 MHz

Judgement: Passed by 18.1 dB

### **TEST PERSONNEL:**

Sign on file

Rode Liu, Engineer Typed/Printed Name

September 22, 2017
Date

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Applicant: IXIN GLOBAL TRADE Date of Test: September 22, 2017

Model: 23594293 Sample: 1/1

Worst-case operating Mode: Transmit (2402 MHz)

Modulation type: GFSK

Table 2

#### **Radiated Emissions**

Polarization	Frequency	Reading	Pre-	Antenna	Net	Peak Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	**2402.000	85.1	36.7	28.1	76.5		
Horizontal	*4804.000	52.5	36.1	35.5	51.9	74.0	-22.1

P	olarization	Frequency	Reading	Pre-	Antenna	Average	Net	Average Limit	Margin
		(MHz)	(dBµV)	Amp	Factor	Factor	at 3m	at 3m	(dB)
				Gain	(dB)	(-dB)	(dBµV/m)	(dBµV/m)	
				(dB)					
ŀ	Horizontal	**2402.000	85.1	36.7	28.1	22.5	54.0	-	-
H	Horizontal	*4804.000	52.5	36.1	35.5	22.5	29.4	54.0	-24.6

NOTES: 1. Peak detector is used except for others stated.

- 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- \*\* Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Report No.: 170913008SZN-001

Applicant: IXIN GLOBAL TRADE Date of Test: September 22, 2017

Model: 23594293 Sample: 1/1

Worst-case operating Mode: Transmit (2441 MHz)

Modulation type: GFSK

Table 3

#### **Radiated Emissions**

	Polarization	Frequency	Reading	Pre-	Antenna	Net	Peak Limit	Margin
		(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
				Gain	(dB)	(dBµV/m)	(dBµV/m)	
				(dB)				
ĺ	Horizontal	*4882.000	52.4	36.1	35.5	51.8	74.0	-22.2
	Horizontal	*7323.000	54.0	36.2	37.9	55.7	74.0	-18.3

Polarization	Frequency	Reading	Pre-	Antenna	Average	Net	Average Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	Factor	at 3m	at 3m	(dB)
	·		Gain	(dB)	(-dB)	(dBµV/m)	(dBµV/m)	-
			(dB)	, ,		,	` ' '	
Horizontal	*4882.000	52.4	36.1	35.5	22.5	29.3	54.0	-24.7
Horizontal	*7323.000	54.0	36.2	37.9	22.5	33.2	54.0	-20.8

NOTES: 1. Peak detector is used except for others stated.

- 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Report No.: 170913008SZN-001

Applicant: IXIN GLOBAL TRADE Date of Test: September 22, 2017

Model: 23594293 Sample: 1/1

Worst-case operating Mode: Transmit (2480 MHz)

Modulation type: GFSK

Table 4

#### **Radiated Emissions**

Polarization	Frequency	Reading	Pre-	Antenna	Net	Peak Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	**2480.000	85.4	36.7	28.1	76.8	-	-
Horizontal	*4960.000	52.6	36.1	35.5	52.0	74.0	-22.0
Horizontal	*7440.000	53.9	36.2	38.2	55.9	74.0	-18.1

Polarization	Frequency	Reading	Pre-	Antenna	Average	Net	Average Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(-dB)	(dBµV/m)	(dBµV/m)	
			(dB)					
Horizontal	**2480.000	85.4	36.7	28.1	22.5	54.3		
Horizontal	*4960.000	52.6	36.1	35.5	22.5	29.5	54.0	-24.5
Horizontal	*7440.000	53.9	36.2	38.2	22.5	33.4	54.0	-20.6

NOTES: 1. Peak detector is used except for others stated.

- 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- \*\* Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Report No.: 170913008SZN-001

#### 3.2 Conducted Emission at Mains Terminal

## 3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

#### 3.2.2 Conducted Emissions

Worst Case Conducted Configuration

at 1.034 MHz

Judgement: Passed by 8.4 dB margin

#### **TEST PERSONNEL:**

Sign on file

Rode Liu, Engineer Typed/Printed Name

September 22, 2017

Date

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Applicant: IXIN GLOBAL TRADE Date of Test: September 22, 2017


Model: 23594293 Sample: 1/1

Worst-case operating Mode: Transmit (CH00)

Modulation type: GFSK

Phase: Live

#### **Conducted Emission Test - FCC**

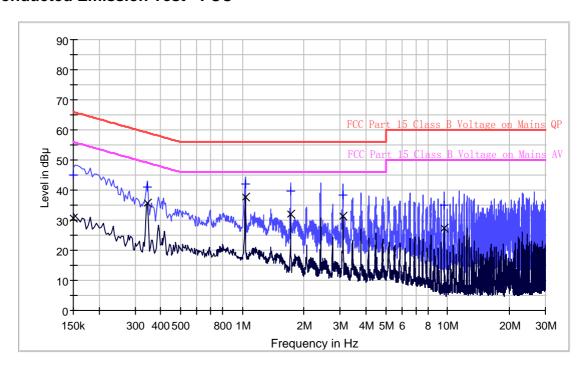

# Result Table QP

Frequency (MHz)	QuasiPeak (dB¦ÌV)	Line	Corr. (dB)	Margin (dB)	Limit (dB¦ÌV)
0.150000	45.1	L1	9.6	20.9	66.0
0.346000	41.1	L1	9.7	18.0	59.1
1.034000	41.9	L1	9.7	14.1	56.0
1.718000	39.7	L1	9.7	16.3	56.0
3.098000	38.5	L1	9.8	17.5	56.0
9.666000	35.0	L1	9.9	25.0	60.0

## Result Table AV

Frequency (MHz)	Average (dB¦ÌV)	Line	Corr. (dB)	Margin (dB)	Limit (dB¦ÌV)
0.150000	30.7	L1	9.6	25.3	56.0
0.346000	35.8	L1	9.7	13.3	49.1
1.034000	37.6	L1	9.7	8.4	46.0
1.718000	31.9	L1	9.7	14.1	46.0
3.098000	31.3	L1	9.8	14.7	46.0
9.666000	27.2	L1	9.9	22.8	50.0

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

Applicant: IXIN GLOBAL TRADE Date of Test: September 22, 2017


Model: 23594293 Sample: 1/1

Worst-case operating Mode: Transmit (CH00)

Modulation type: GFSK

Phase: Neutral

#### **Conducted Emission Test - FCC**

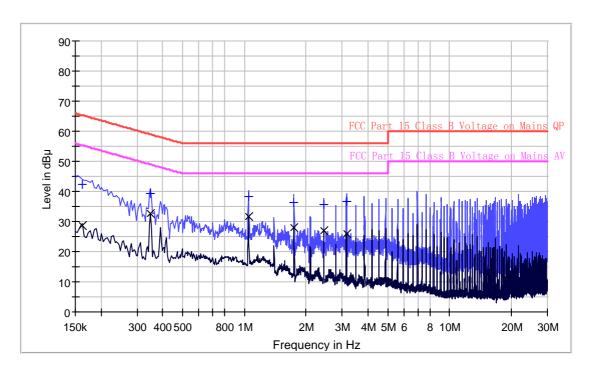

# Result Table QP

Frequency (MHz)	QuasiPeak (dB¦ÌV)	Line	Corr. (dB)	Margin (dB)	Limit (dB¦ÌV)
0.162000	42.3	N	9.6	23.1	65.4
0.350000	39.2	N	9.7	19.8	59.0
1.050000	38.4	N	9.7	17.6	56.0
1.746000	36.5	N	9.7	19.5	56.0
2.446000	35.7	N	9.7	20.3	56.0
3.146000	36.6	N	9.8	19.4	56.0

# Result Table AV

Frequency (MHz)	Average (dB¦ÌV)	Line	Corr. (dB)	Margin (dB)	Limit (dB¦ÌV)
0.162000	28.7	N	9.6	26.7	55.4
0.350000	32.5	N	9.7	16.5	49.0
1.050000	31.6	N	9.7	14.4	46.0
1.746000	28.1	N	9.7	17.9	46.0
2.446000	26.9	N	9.7	19.1	46.0
3.146000	26.0	N	9.8	20.0	46.0

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 3.3 Peak Power

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1). The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm.

For antenna with gains of 6dBi or less, and frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, the systems operate with an output power no greater than 125 mW.

Antenna Gain = 0dBi							
Modulation Type Frequency (MHz) Output Power Output Power (mW)							
GFSK	2402	-11.40	0.0724				
	GFSK 2441		0.0719				
	2480	-11.56	0.0698				


Cable loss: 0.5 dB External Attenuation: 0 dB

TRF No.: FCC 15C\_TX\_c


FCC ID: 2AHXQ1

Modulation Type: GFSK

#### **CH00**

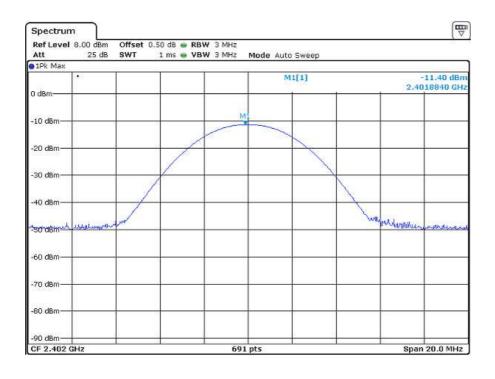


#### **CH39**

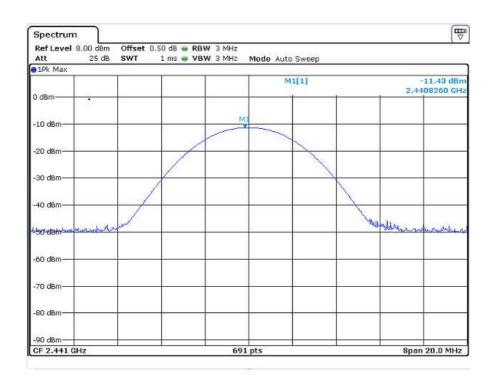

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### **CH78**

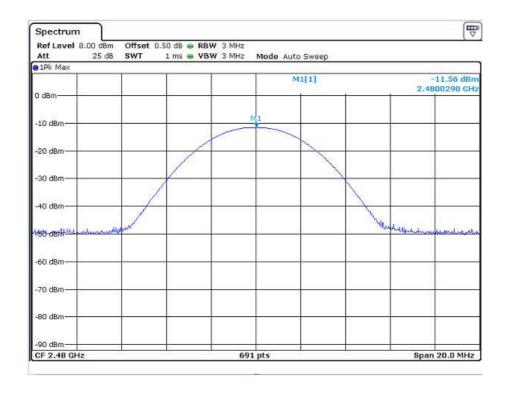

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 3.4 20dB Bandwidth


Maximum 20dB RF Bandwidth, FCC Rule 15.247(a) (1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

Frequency (MHz)	20 dB Bandwidth (MHz)
2402	1.337
2441	1.337
2480	1.342

Modulation Type: 8DPSK


#### **CH00**

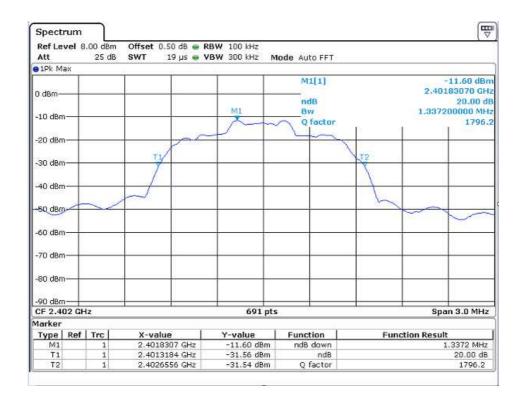


TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### **CH39**

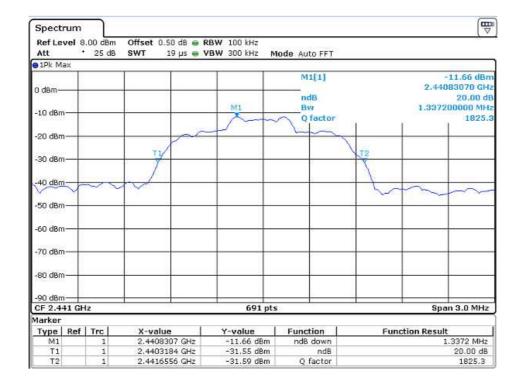

#### **CH78**

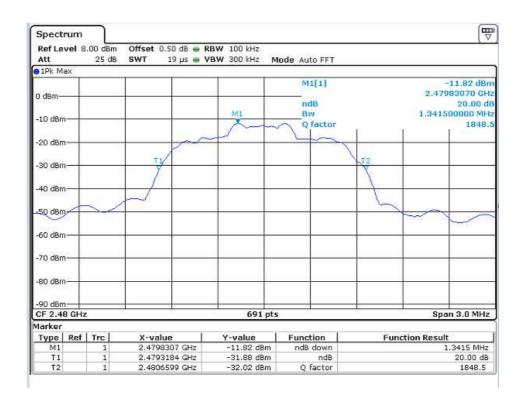

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 3.5 Channel Number (Number of Hopping Frequencies)

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a) (1) (iii):


The RF passband of the EUT was divided into 3 approximately equal bands. With the analyzer set to MAX HOLD readings were taken for 2-3 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

Number of hopping channels =	79
------------------------------	----

Note: In AFH mode, this device operates using 20 channels and it's satisfied the requirement of limit of minimum of 15 hopping channels.

Modulation Type: GFSK


#### CH00-CH78

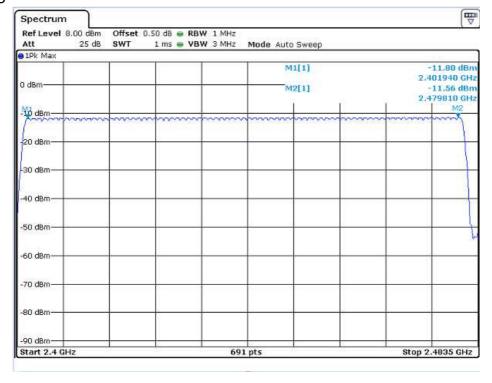


TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### CH00-CH24

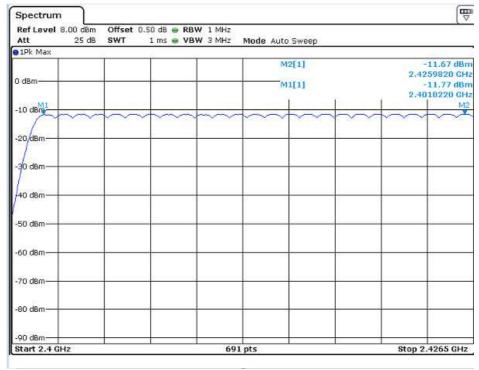


## CH25-CH52

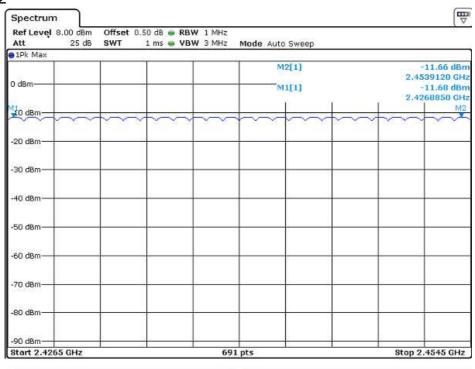

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### CH53-CH78

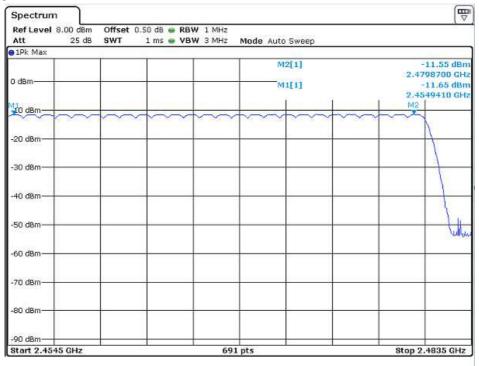

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 3.6 Channel Separation (Carrier Frequency Separation)

Minimum Hopping Channel Carrier Frequency Separation, FCC Ref: 15.247(a)(1):


Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and compared against the limit:

Not less than 2/3 of 20dB bandwidth of hopping channel:  $1.342 \times 2/3 = 0.895 \text{MHz}$ 

Minimum Channel Separation	0.999 MHz

Modulation Type: 8DPSK


#### Low Channel

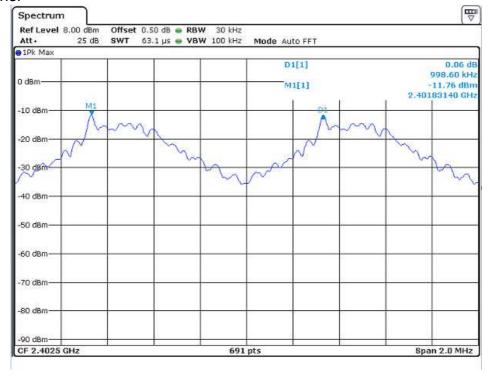

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### Middle Channel

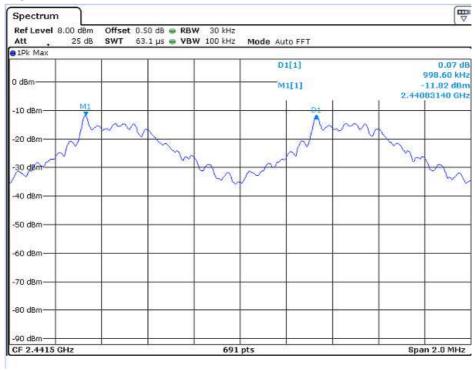

## High Channel



TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 3.7 Dwell Time (Time of Occupancy)

Average Channel Occupancy Time, FCC Ref: 15.247(a) (1)(iii):

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 10ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmissions so captured was measured with the MARKER DELTA function.

The maximum number of hopping channels in 31.6s for DH1 =1600 / 2 / 79 \*31.6=320

The maximum number of hopping channels in 31.6s for DH3 =1600 / 4 / 79 \*31.6=160

The maximum number of hopping channels in 31.6s for DH5 =1600 / 6 / 79 \*31.6=107

Modulation Type	Packet	Max Dwell Time				Limit (s)	Result
	DH1	0.454	ms * 320=	145.28	ms	0.4	Pass
GFSK	DH3	1.707	ms * 160=	273.12	ms	0.4	Pass
GFSK	DH5	2.957	ms * 107=	316.40	ms	0.4	Pass

#### AFH mode:

The maximum number of hopping channels in 8s for DH1 =800 / 2 / 20 \*8=160

The maximum number of hopping channels in 8s for DH3 =800 / 4 / 20 \*8=80

The maximum number of hopping channels in 8s for DH5 =800/6/20 \*8=53.33


Modulation Type	Packet		Max Dwell 1	Limit (s)	Result		
	3DH1	0.454	ms * 160=	72.64	ms	0.4	Pass
8DPSK	3DH3	1.707	ms * 80=	136.56	ms	0.4	Pass
ODPSK	3DH5	2.957	ms * 53.33=	157.70	ms	0.4	Pass

TRF No.: FCC 15C\_TX\_c


FCC ID: 2AHXQ1

Modulation Type: 8DPSK

Packet: 3DH1

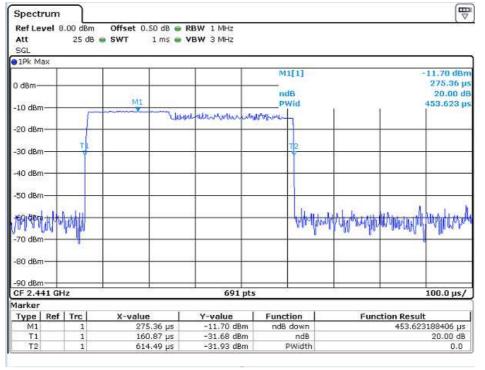


Packet: 3DH3

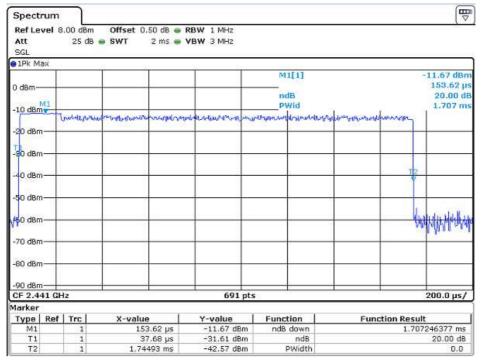

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### Packet: 3DH5

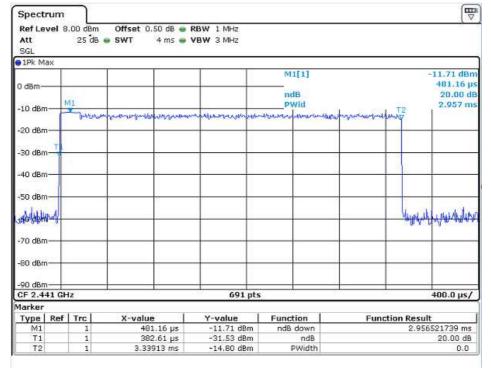

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 3.8 Band Edge

Out of Band Conducted Emissions, FCC Rule 15.247(d):

In any 100 KHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum inband 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation.

Furthermore, delta measurement technique for measuring bandage emissions was shown as below:

#### (i) Lower channel 2402MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot  $= 76.5 dB\mu v/m-42.6 dB$  $= 33.9 dB\mu v/m$ 

#### (ii) Upper channel 2480MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot  $= 76.8 dB\mu v/m-49.0 dB$  $= 27.8 dB\mu v/m$ 

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74 dBµv/m (Peak Limit) and 54dBµv/m (Average Limit).


TRF No.: FCC 15C\_TX\_c


FCC ID: 2AHXQ1

Report No.: 170913008SZN-001

32

Modulation Type: 8DPSK

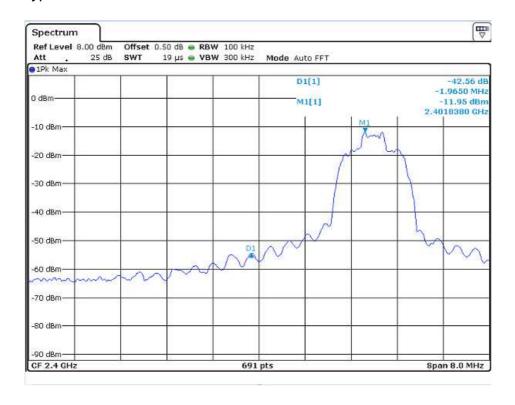

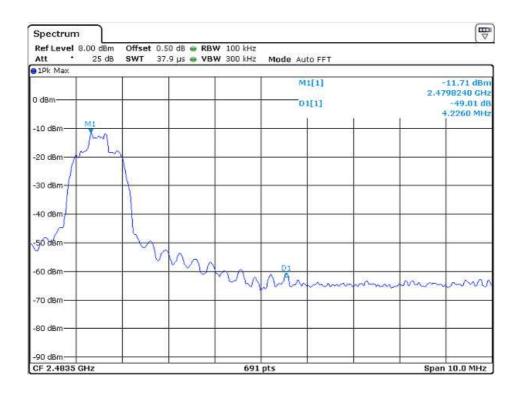

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 3.9 Transmitter Spurious Emissions (Conducted)


Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

TRF No.: FCC 15C\_TX\_b FCC ID: Z8M-CD750

Modulation Type: GFSK


#### **CH00**

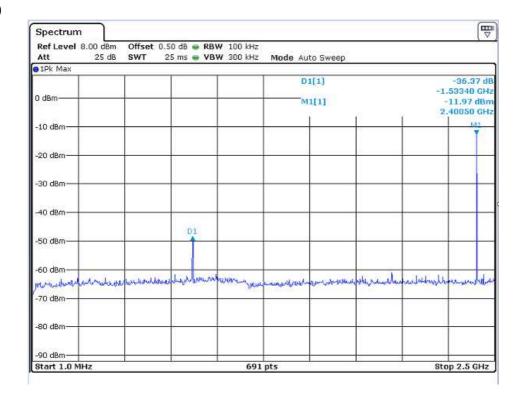


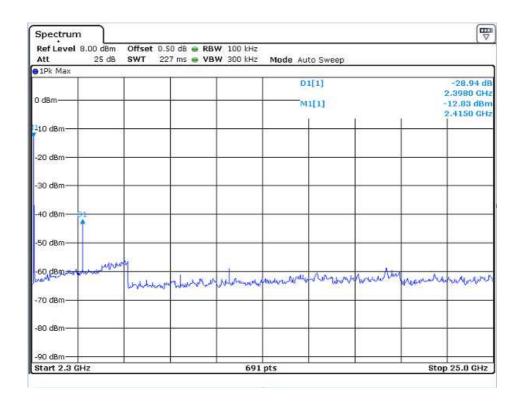

TRF No.: FCC 15C\_TX\_b FCC ID: Z8M-CD750


#### **CH39**

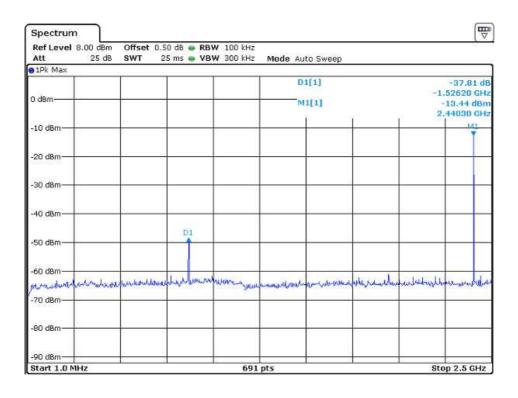


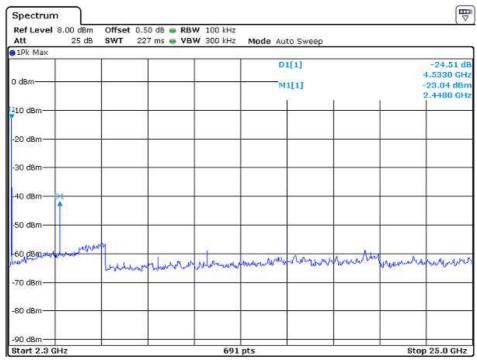

TRF No.: FCC 15C\_TX\_b FCC ID: Z8M-CD750

#### **CH78**

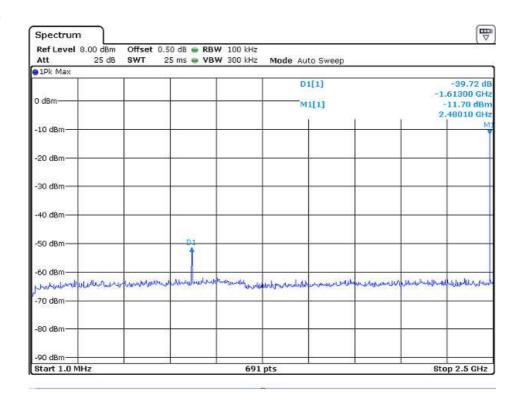

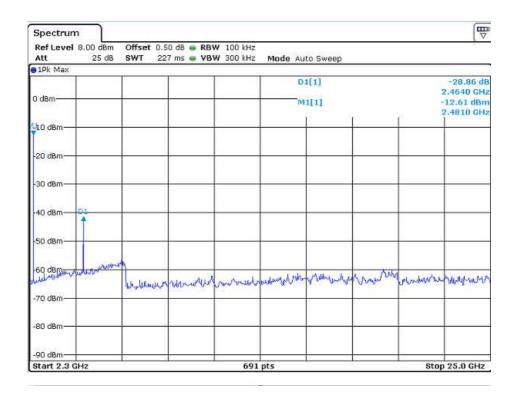

TRF No.: FCC 15C\_TX\_b FCC ID: Z8M-CD750

# EXHIBIT 4 EQUIPMENT PHOTOGRAPHS

TRF No.: FCC 15C\_TX\_b FCC ID: Z8M-CD750

## 4.0 **Equipment Photographs**

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

TRF No.: FCC 15C\_TX\_b FCC ID: Z8M-CD750

# EXHIBIT 5 PRODUCT LABELLING

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# EXHIBIT 6 TECHNICAL SPECIFICATIONS

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 6.0 <u>Technical Specifications</u>

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# EXHIBIT 7

# **INSTRUCTION MANUAL**

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 7.0 <u>Instruction Manual</u>

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# EXHIBIT 8 MISCELLANEOUS INFORMATION

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 8.0 <u>Miscellaneous Information</u>

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 8.1 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period ( $T_{\rm eff}$ ) is approximately 625µs for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 8.2 Transmitter Duty Cycle Calculation, FCC Rule 15.35(b, c)

Based on the Bluetooth Specification, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length (single-slot and multi-slot). The maximum transmitter ON time for the Bluetooth is 625µs.

Each TX and RX time slot is 625µs in length. A TDD scheme is used where master and slave alternately transmit. For one period for a pseudo-random hopping through all 79 RF channels, for DH5:

#### Normal Mode:

Channel hop rate=1600 hops/second Time of 1 hopset (5 TX slots + 1 RX slot) = 0.625 ms x 6 = 3.75 ms Time of 1 cycle =3.75 ms x 79 = 296.25 ms Average factor =  $20 \log (3.125 / 100) = -30.1$  dB

#### AFH Mode:

Channel hop rate = 800 hops/second (AFH Mode)
Adjusted channel hop rate for DH5 mode = 133.33 hops/second
Time per channel hop = 1 / 133.33 hops/second = 7.5 ms
Time to cycle through all channels = 7.5 x 20 channels = 150 ms
Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)
Worst case dwell time = 7.5 ms
Duty cycle connection factor = 20log10(7.5ms / 100ms) = -22.5 dB

TRF No.: FCC 15C\_TX\_c FCC ID: 2AHXQ1

Report No.: 170913008SZN-001

49

#### 8.3 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10: 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz with RBW 9KHz used.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

#### 8.3 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10: 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# EXHIBIT 9 CONFIDENTIALITY REQUEST

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

## 9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# **EXHIBIT 10**

## **TEST EQUIPMENT LIST**

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1

# 10 <u>Test Equipment List</u>

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00078828	12-Oct-2016	12-Oct-2017
SZ185-01	EMI Receiver	R&S	ESCI	100547	09-Feb-2017	09-Feb-2018
SZ061-08	Horn Antenna	ETS	3115	00092346	12-Oct-2016	12-Oct-2017
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	26-May-2017	26-May-2018
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	01-Jun-2017	01-Jun-2018
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	07-Jul-2017	07-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	09-Feb-2017	09-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A- 100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIALL	RG 213U		16-Jun-2017	16-Jun-2018
SZ062-05	RF Cable	RADIALL	0.04- 26.5GHz		16-Jun-2017	16-Jun-2018
SZ062-12	RF Cable	RADIALL	0.04- 26.5GHz	1	16-Jun-2017	16-Jun-2018
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	1	14-Jun-2017	14-Jun-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	01-Nov-2016	01-Nov-2017
SZ187-01	Two-Line V- Network	R&S	ENV216	100072	01-Nov-2016	01-Nov-2017
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019

TRF No.: FCC 15C\_TX\_c

FCC ID: 2AHXQ1