
FCC Test Report

Report No.: AGC05606160601FE03

FCC ID : 2AI2YCOULAXCX04
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Bluetooth Headset
BRAND NAME : COULAX
MODEL NAME : COULAX CX04
CLIENT : Shenzhen Jimeilang Technology Development Co., LTD.
DATE OF ISSUE : July 05, 2016
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S) :
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 05, 2016	Valid	Original Report

TABLE OF CONTENTS


1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7. ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	11
8.1 TEST LIMIT	11
8.2. MEASUREMENT PROCEDURE	12
8.3. TEST SETUP	14
8.4. TEST RESULT	16
9. BAND EDGE EMISSION	44
9.1. MEASUREMENT PROCEDURE	44
9.2 TEST SETUP	44
9.3 RADIATED TEST RESULT	45
10. 20DB BANDWIDTH	53
10.1. MEASUREMENT PROCEDURE	53
10.2. TEST SET-UP	53
10.3. LIMITS AND MEASUREMENT RESULTS	53
11. FCC LINE CONDUCTED EMISSION TEST	62
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	62
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	62
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	63
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	63
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	64
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	68
APPENDIX B: PHOTOGRAPHS OF EUT	70
APPENDIX B: PHOTOGRAPHS OF EUT	70

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Jimeilang Technology Development Co., LTD.
Address	No.2, Lane 5,Longtang Village West, Longhua Street, Longhua New District, Baoan District, Shenzhen,China
Manufacturer	Shenzhen Hong Hui Digital Technology Co., Ltd.
Address	Floor 2, Building 1, Zaimao Industrial Park , Baoji Road, Xuexiang Community, Bantian, Longgang District, Shenzhen,China
Product Designation	Bluetooth Headset
Brand Name	COULAX
Test Model	COULAX CX04
Date of test	Jun.20, 2016 to Jun.22, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.



Tested By

Steve Liang(Liang Faqiang) July 05, 2016



Reviewed By

Forrest Lei(Lei Yonggang) July 05, 2016



Approved By

Solger Zhang(Zhang Hongyi)
Authorized Officer July 05, 2016

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	0.79dBm
Bluetooth Version	V4.1
Modulation	GFSK, π/4-DQPSK, 8DPSK for BR/EDR, GFSK for BLE
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	HH930-8635-main-V6
Software Version	HV-930_KV1
Antenna Designation	PCB Antenna
Antenna Gain	1.6dBi
Power Supply	DC 3.7V

Note: The USB port only used for charging and can't be used to transfer data with PC.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link


Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

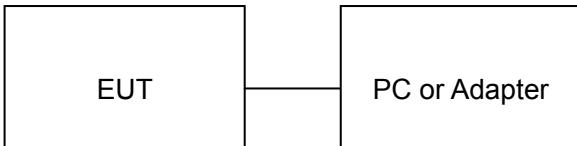

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Headset	COULAX	COULAX CX04	EUT
2	Battery	N/A	601035	Accessory
3	PC	Sony	E1412AYCW	A.E
4	Control box	CSR	USB-SPI	A.E
5	Adapter	ETPCA	ETPCA-050100U3W	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road 2, Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013.

7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2016	June 5, 2017
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		µ V/m	dB(µV)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Remark: (1) Emission level dB µ V = 20 log Emission level µ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

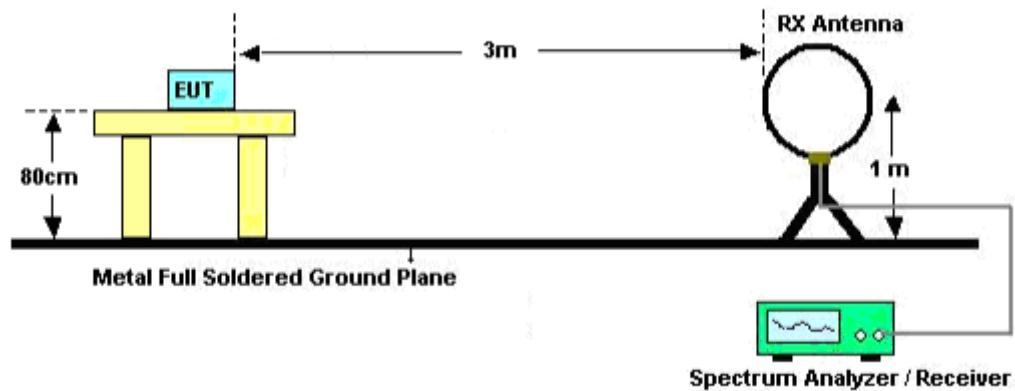

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

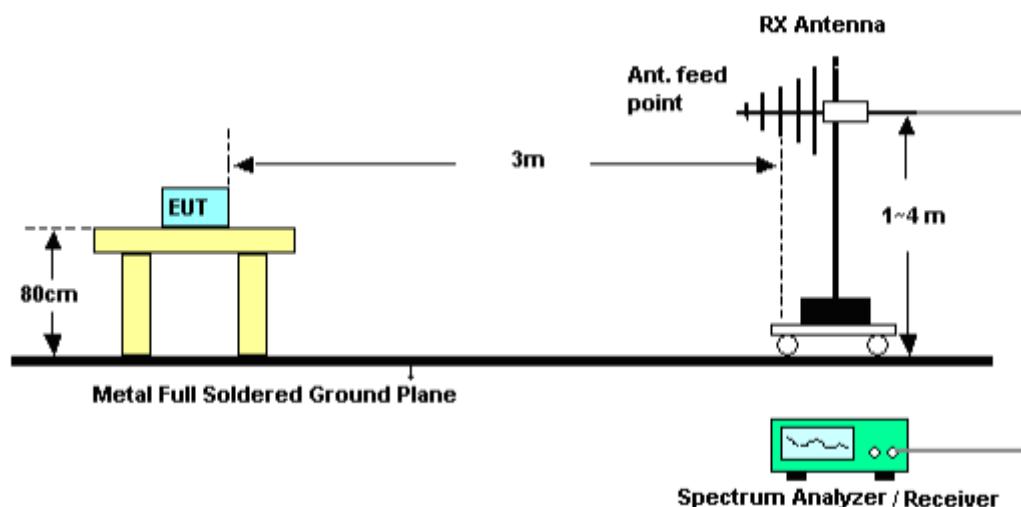

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

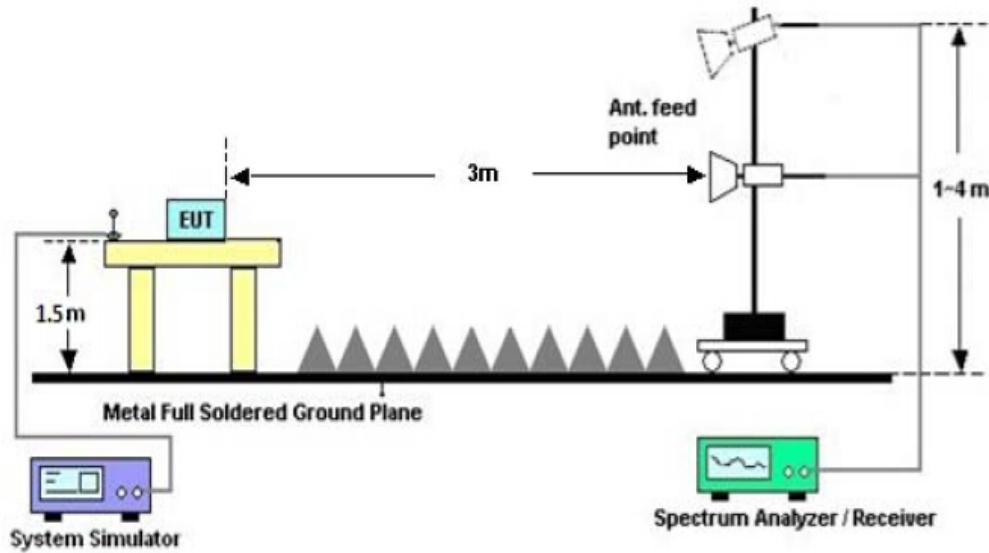

8.4. TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL



Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headset
M/N:COULAX CX04
Mode:Low Channel TX
Note:

Polarization: **Horizontal**

Temperature: 23.5

Power:


Humidity: 54.5 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0166	21.75	13.25	35.00	43.50	-8.50	peak			
2		204.5997	25.03	11.53	36.56	43.50	-6.94	peak			
3		280.5833	25.28	12.11	37.39	46.00	-8.61	peak			
4	*	380.8167	22.11	18.94	41.05	46.00	-4.95	peak			
5	!	435.7832	20.82	20.16	40.98	46.00	-5.02	peak			
6		717.0833	9.46	25.68	35.14	46.00	-10.86	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

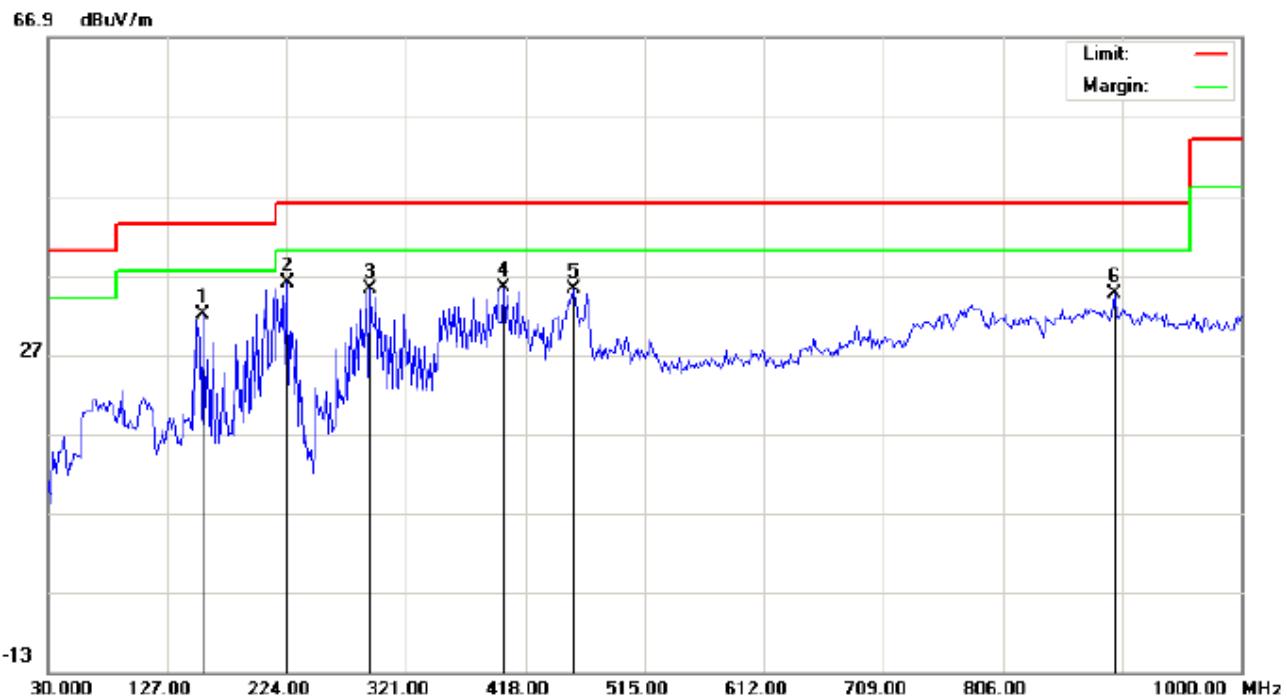

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N:COULAX CX04

Mode:Low Channel TX

Note:

Polarization: Vertical

Power:

Temperature: 23.5

Humidity: 54.5 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		156.0997	16.67	15.30	31.97	43.50	-11.53	peak			
2	*	224.0000	24.69	11.35	36.04	46.00	-9.96	peak			
3		291.8999	20.05	15.17	35.22	46.00	-10.78	peak			
4		400.2167	16.42	19.08	35.50	46.00	-10.50	peak			
5		456.8000	14.64	20.66	35.30	46.00	-10.70	peak			
6		896.5333	6.07	28.52	34.59	46.00	-11.41	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL



Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headset
M/N:COULAX CX04
Mode:Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		148.0166	24.25	13.25	37.50	43.50	-6.00	peak			
2	*	207.8333	28.36	11.20	39.56	43.50	-3.94	peak			
3		296.7500	24.82	14.86	39.68	46.00	-6.32	peak			
4	!	351.7167	22.63	18.75	41.38	46.00	-4.62	peak			
5		460.0332	18.63	20.70	39.33	46.00	-6.67	peak			
6		717.0833	9.46	25.68	35.14	46.00	-10.86	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL -VERTICAL



Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headset
M/N:COULAX CX04
Mode:Middle Channel TX
Note:

Polarization: *Vertical*

Temperature: 23.5

Power:

Humidity: 54.5 %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		156.0998	21.17	15.30	36.47	43.50	-7.03	peak			
2	*	215.9165	27.58	10.56	38.14	43.50	-5.36	peak			
3		319.3833	19.73	16.70	36.43	46.00	-9.57	peak			
4		456.8000	12.14	20.66	32.80	46.00	-13.20	peak			
5		687.9832	5.18	24.87	30.05	46.00	-15.95	peak			
6		896.5333	8.57	28.52	37.09	46.00	-8.91	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

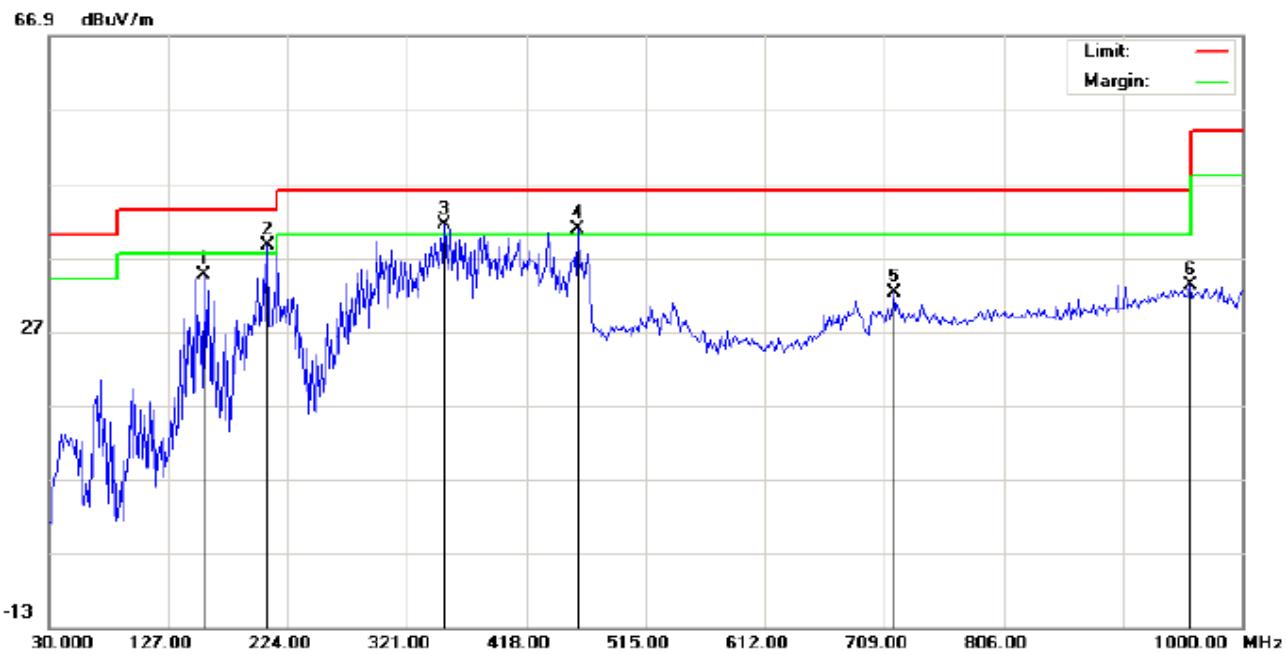

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headset

M/N:COULAX CX04

Mode:High Channel TX

Note:

Polarization: Horizontal

Temperature: 23.5

Power:

Humidity: 54.5 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		156.0999	23.36	11.28	34.64	43.50	-8.86	peak			
2	!	207.8333	27.36	11.20	38.56	43.50	-4.94	peak			
3	*	351.7167	22.63	18.75	41.38	46.00	-4.62	peak			
4	!	460.0332	20.13	20.70	40.83	46.00	-5.17	peak			
5		717.0833	6.46	25.68	32.14	46.00	-13.86	peak			
6		957.9666	3.24	29.92	33.16	46.00	-12.84	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headset
M/N:COULAX CX04
Mode:High Channel TX
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature: 23.5
Humidity: 54.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	156.1000	17.17	15.30	32.47	43.50	-11.03	peak			
2		215.9167	20.58	10.56	31.14	43.50	-12.36	peak			
3		291.9000	18.05	15.17	33.22	46.00	-12.78	peak			
4		400.2167	11.92	19.08	31.00	46.00	-15.00	peak			
5		456.8000	9.64	20.66	30.30	46.00	-15.70	peak			
6		896.5333	6.07	28.52	34.59	46.00	-11.41	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL



Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 23.5
Limit: FCC Class B 3M Radiation	Power:	Humidity: 54.5 %
EUT:Bluetooth Headset	Distance:	
M/N:COULAX CX04		
Mode:Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		156.0997	22.36	11.28	33.64	43.50	-9.86	peak			
2	!	215.9165	28.27	10.38	38.65	43.50	-4.85	peak			
3		296.7500	22.82	14.86	37.68	46.00	-8.32	peak			
4	*	411.5332	21.90	19.42	41.32	46.00	-4.68	peak			
5		537.6331	15.62	22.15	37.77	46.00	-8.23	peak			
6		717.0833	10.46	25.68	36.14	46.00	-9.86	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL



Site: site #1 Polarization: **Vertical** Temperature: 23.5
Limit: FCC Class B 3M Radiation Power: Humidity: 54.5 %
EUT:Bluetooth Headset Distance:
M/N:COULAX CX04
Mode:Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		151.2500	15.98	15.27	31.25	43.50	-12.25	peak			
2		224.0000	24.19	11.35	35.54	46.00	-10.46	peak			
3		291.8999	21.05	15.17	36.22	46.00	-9.78	peak			
4	*	387.2832	18.30	18.99	37.29	46.00	-8.71	peak			
5		456.8000	15.64	20.66	36.30	46.00	-9.70	peak			
6		828.6331	6.98	27.31	34.29	46.00	-11.71	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL



Site: site #1 Polarization: *Horizontal* Temperature: 23.5
 Limit: FCC Class B 3M Radiation Power: Humidity: 54.5 %
 EUT:Bluetooth Headset Distance:
 M/N:COULAX CX04
 Mode:Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0166	23.25	13.25	36.50	43.50	-7.00	peak			
2		207.8333	25.36	11.20	36.56	43.50	-6.94	peak			
3	!	296.7500	25.82	14.86	40.68	46.00	-5.32	peak			
4	!	384.0500	21.92	18.96	40.88	46.00	-5.12	peak			
5	*	460.0332	21.13	20.70	41.83	46.00	-4.17	peak			
6		717.0833	10.46	25.68	36.14	46.00	-9.86	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL -VERTICAL



Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headset
M/N:COULAX CX04
Mode:Middle Channel TX
Note:

Polarization: **Vertical**

Temperature: 23.5

Power:

Humidity: 54.5 %

Distance:

Mode Notes

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		156.0997	21.67	15.30	36.97	43.50	-6.53	peak			
2	*	215.9165	28.08	10.56	38.64	43.50	-4.86	peak			
3		319.3833	22.73	16.70	39.43	46.00	-6.57	peak			
4		456.8000	14.14	20.66	34.80	46.00	-11.20	peak			
5		687.9832	7.68	24.87	32.55	46.00	-13.45	peak			
6		896.5333	8.57	28.52	37.09	46.00	-8.91	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL



Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headset
M/N:COULAX CX04
Mode:High Channel TX
Note:

Polarization: *Horizontal*

Temperature: 23.5

Power:


Humidity: 54.5 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0166	23.75	13.25	37.00	43.50	-6.50	peak			
2	!	204.5999	27.03	11.53	38.56	43.50	-4.94	peak			
3	!	296.7500	25.32	14.86	40.18	46.00	-5.82	peak			
4	!	351.7167	23.13	18.75	41.88	46.00	-4.12	peak			
5	*	460.0332	21.63	20.70	42.33	46.00	-3.67	peak			
6		717.0833	7.46	25.68	33.14	46.00	-12.86	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

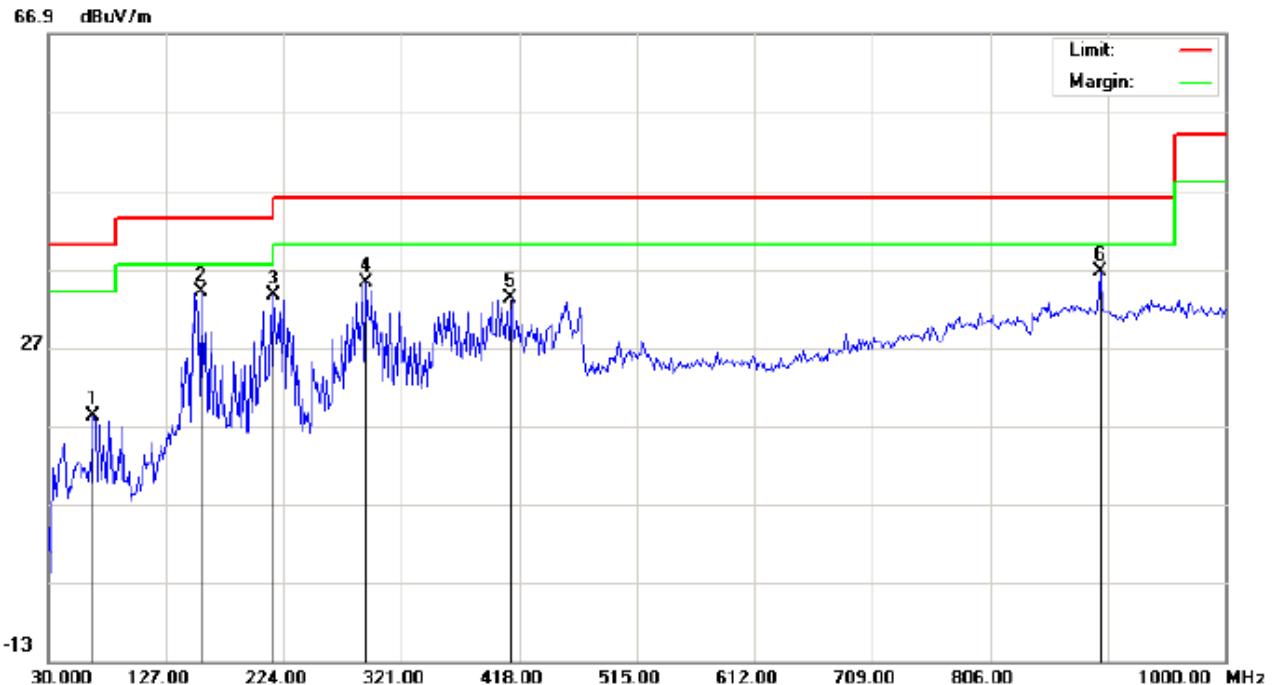

Site: site #1 Polarization: **Vertical** Temperature: 23.5
Limit: FCC Class B 3M Radiation Power: Humidity: 54.5 %
EUT:Bluetooth Headset Distance:
M/N:COULAX CX04
Mode:High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		67.1833	12.84	5.36	18.20	40.00	-21.80	peak			
2		156.0999	18.67	15.30	33.97	43.50	-9.53	peak			
3		215.9166	23.08	10.56	33.64	43.50	-9.86	peak			
4		291.8999	20.05	15.17	35.22	46.00	-10.78	peak			
5		411.5332	13.83	19.42	33.25	46.00	-12.75	peak			
6	*	896.5333	8.07	28.52	36.59	46.00	-9.41	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The “Factor” value can be calculated automatically by software of measurement system.
3. All modes have been tested and only the worst mode test data recorded in the test report.

RADIATED EMISSION ABOVE 1GHZ

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

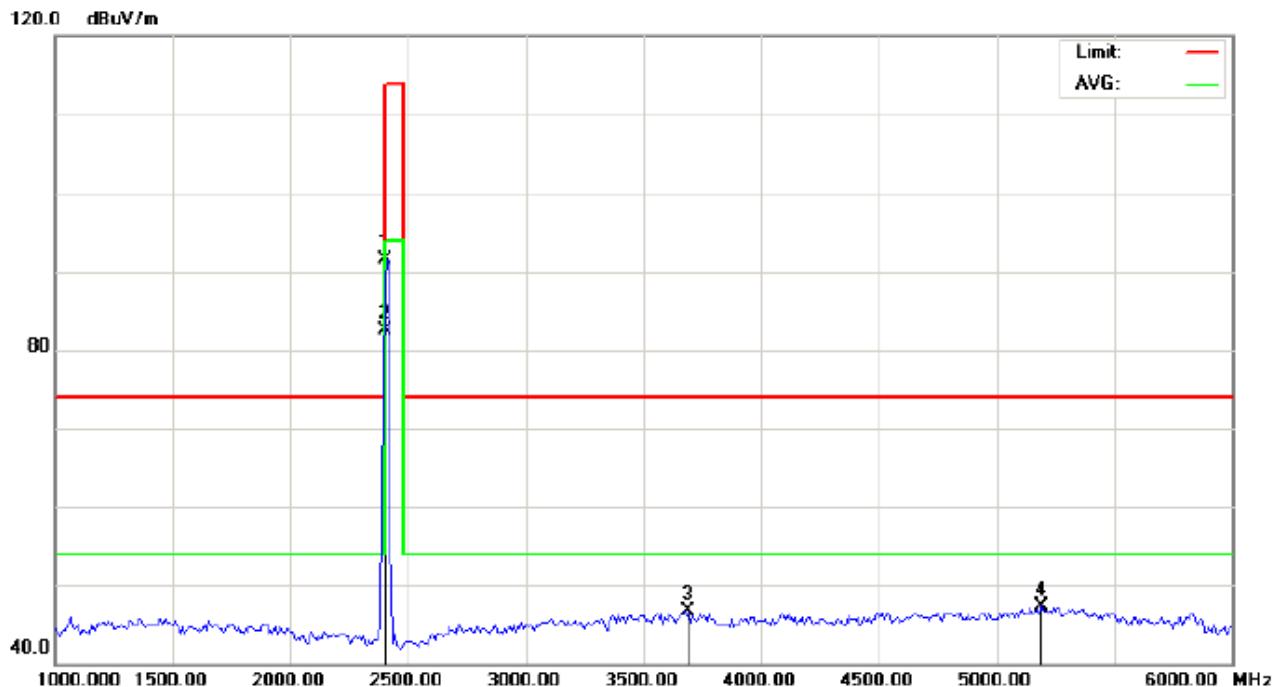

Site: site #1 Polarization: *Horizontal* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:COULAX CX04


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	101.15	-9.68	91.47	114.00	-22.53	peak			
2	*	2402.000	92.26	-9.68	82.58	94.00	-11.42	AVG	100	58	
3		3691.667	53.40	-6.71	46.69	74.00	-27.31	peak			
4		5191.667	49.08	-1.80	47.28	74.00	-26.72	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

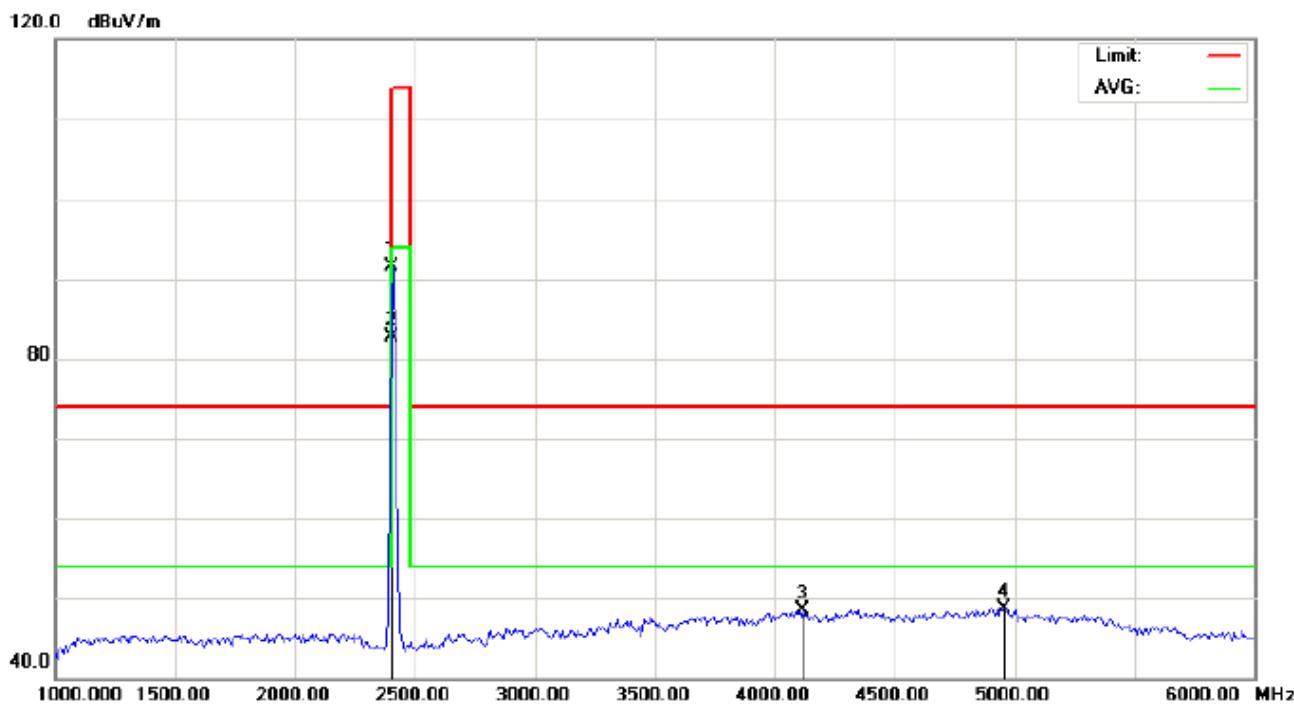

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

ver:

Humidity: 60 %

FUT-Bluetooth Headset

Distance: 3m

M/N: GOU1 AX CX04


Mode: Low Channel TX

Note:-

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	101.21	-9.68	91.53	114.00	-22.47	peak			
2	*	2402.000	92.31	-9.68	82.63	94.00	-11.37	AVG	150	67	
3		4116.667	52.93	-4.41	48.52	74.00	-25.48	peak			
4		4958.333	50.59	-1.91	48.68	74.00	-25.32	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

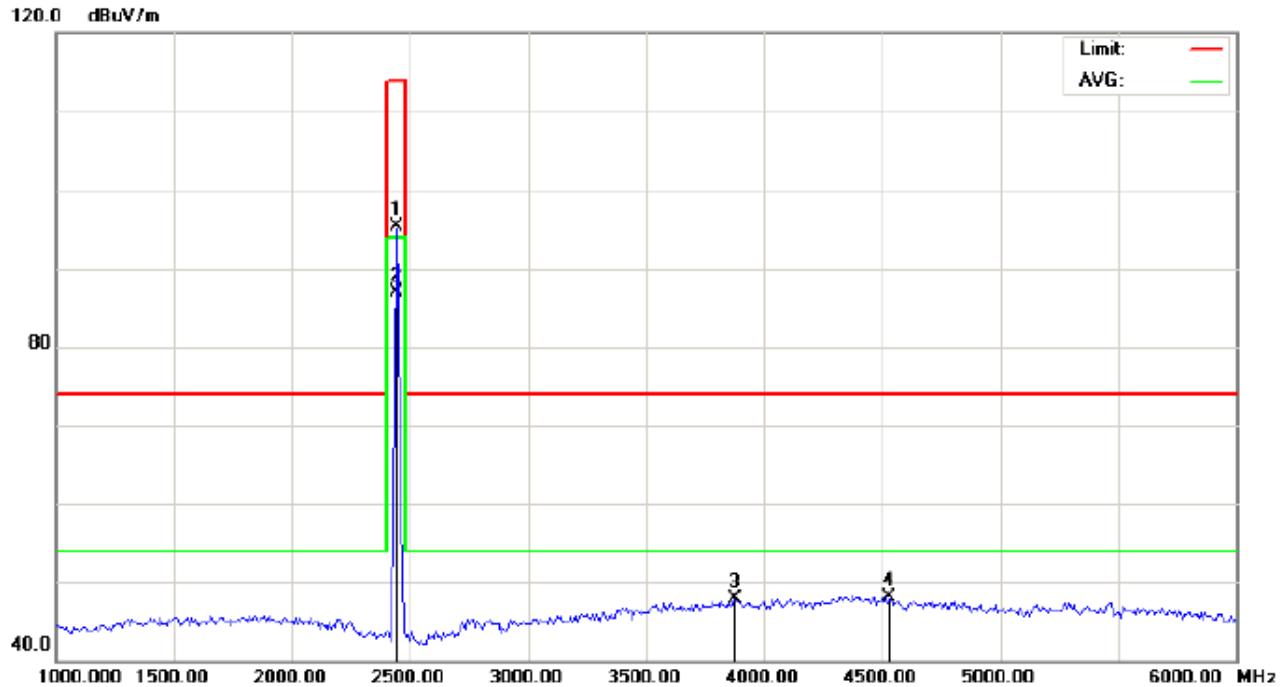


Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Bluetooth Headset Distance: 3m
 M/N:COULAX CX04
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	104.84	-9.63	95.21	114.00	-18.79	peak			
2	*	2441.000	96.46	-9.63	86.83	94.00	-7.17	AVG	150	178	
3		3875.000	53.55	-5.58	47.97	74.00	-26.03	peak			
4		4533.333	51.11	-3.02	48.09	74.00	-25.91	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

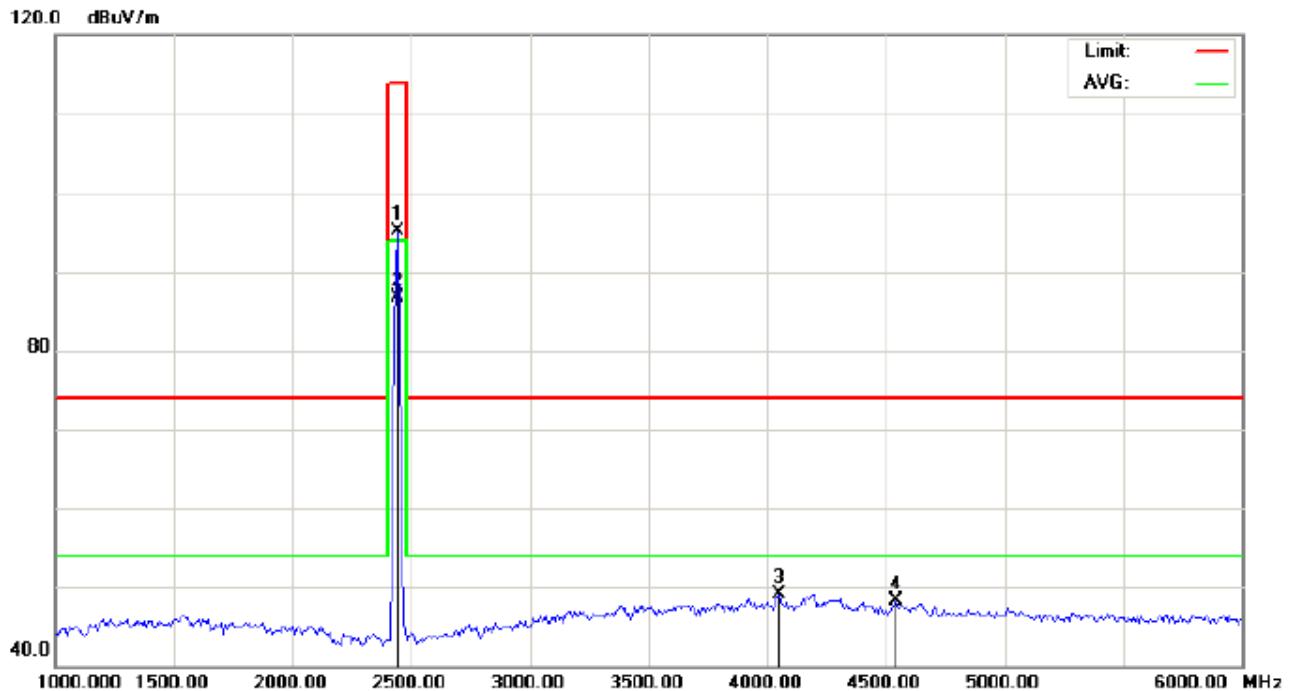


Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Headset Distance: 3m
M/N:COULAX CX04
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	104.79	-9.63	95.16	114.00	-18.84	peak			
2	*	2441.000	96.42	-9.63	86.79	94.00	-7.21	AVG	100	53	
3		4050.000	53.68	-4.64	49.04	74.00	-24.96	peak			
4		4541.667	51.27	-3.00	48.27	74.00	-25.73	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

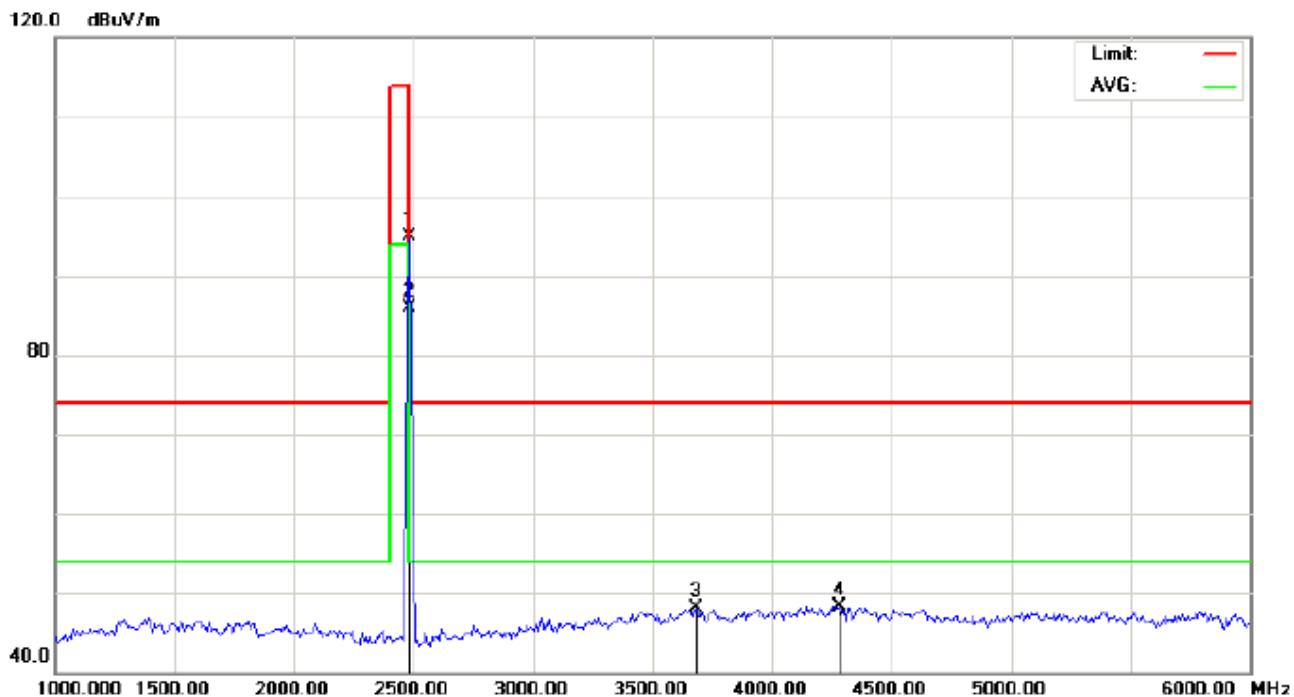


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Headset Distance: 3m
M/N:COULAX CX04
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	104.47	-9.59	94.88	114.00	-19.12	peak			
2	*	2480.000	95.51	-9.59	85.92	94.00	-8.08	AVG	150	79	
3		3683.333	54.93	-6.76	48.17	74.00	-25.83	peak			
4		4283.333	52.06	-3.85	48.21	74.00	-25.79	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

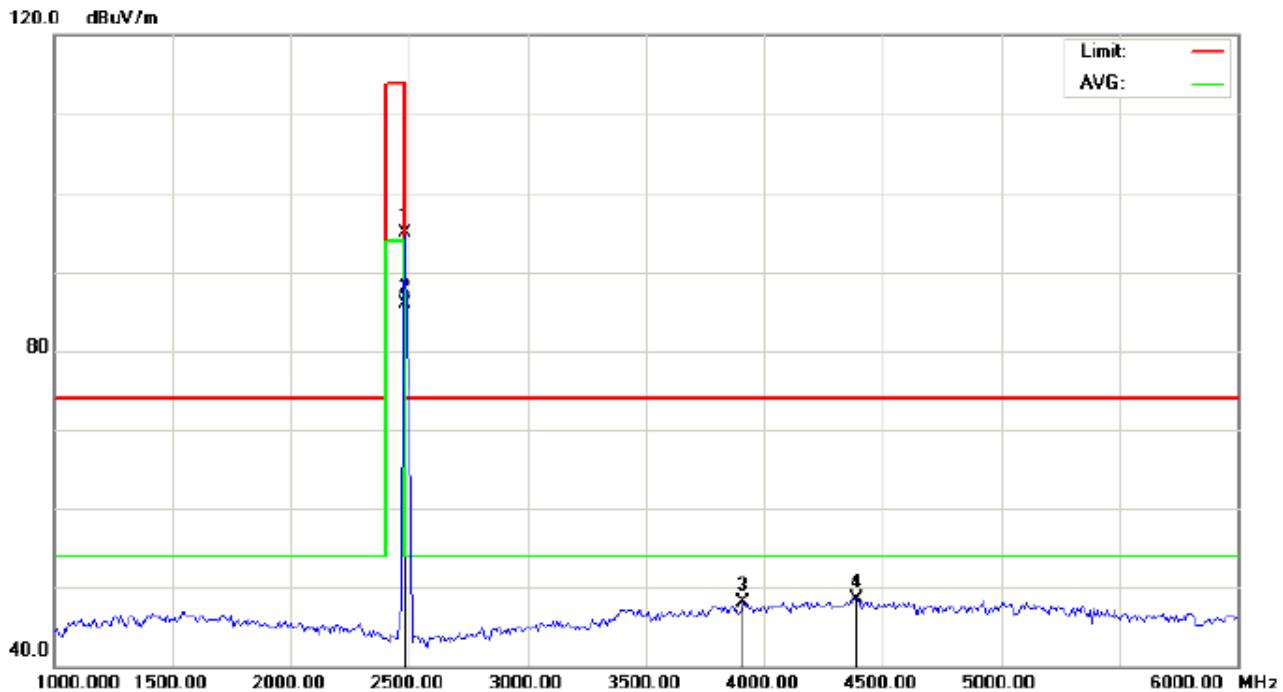

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Headset Distance: 3m
M/N:COULAX CX04
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	104.43	-9.59	94.84	114.00	-19.16	peak			
2	*	2480.000	95.47	-9.59	85.88	94.00	-8.12	AVG	150	331	
3		3908.333	53.54	-5.37	48.17	74.00	-25.83	peak			
4		4391.667	52.03	-3.48	48.55	74.00	-25.45	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	101.15	-9.68	91.47	114	-22.53	Horizontal
2402	101.21	-9.68	91.53	114	-22.47	Vertical
2441	104.84	-9.63	95.21	114	-18.79	Horizontal
2441	104.79	-9.63	95.16	114	-18.84	Vertical
2480	104.47	-9.59	94.88	114	-19.12	Horizontal
2480	104.43	-9.59	94.84	114	-19.16	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.26	-9.68	82.58	94	-11.42	Horizontal
2402	92.31	-9.68	82.63	94	-11.37	Vertical
2441	96.46	-9.63	86.83	94	-7.17	Horizontal
2441	96.42	-9.63	86.79	94	-7.21	Vertical
2480	95.51	-9.59	85.92	94	-8.08	Horizontal
2480	95.47	-9.59	85.88	94	-8.12	Vertical

2Mbps Result:

Peak value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	100.73	-9.68	91.05	114	-22.95	Horizontal
2402	100.75	-9.68	91.07	114	-22.93	Vertical
2441	104.35	-9.63	94.72	114	-19.28	Horizontal
2441	104.38	-9.63	94.75	114	-19.25	Vertical
2480	104.15	-9.59	94.56	114	-19.44	Horizontal
2480	104.16	-9.59	94.57	114	-19.43	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	91.82	-9.68	82.14	94	-11.86	Horizontal
2402	91.85	-9.68	82.17	94	-11.83	Vertical
2441	95.97	-9.63	86.34	94	-7.66	Horizontal
2441	95.98	-9.63	86.35	94	-7.65	Vertical
2480	94.93	-9.59	85.34	94	-8.66	Horizontal
2480	94.94	-9.59	85.35	94	-8.65	Vertical

3Mbps Result:

Peak value


Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	100.29	-9.68	90.61	114	-23.39	Horizontal
2402	100.32	-9.68	90.64	114	-23.36	Vertical
2441	103.89	-9.63	94.26	114	-19.74	Horizontal
2441	103.92	-9.63	94.29	114	-19.71	Vertical
2480	103.67	-9.59	94.08	114	-19.92	Horizontal
2480	103.68	-9.59	94.09	114	-19.91	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	91.47	-9.68	81.79	94	-12.21	Horizontal
2402	91.48	-9.68	81.80	94	-12.2	Vertical
2441	95.64	-9.63	86.01	94	-7.99	Horizontal
2441	95.66	-9.63	86.03	94	-7.97	Vertical
2480	94.54	-9.59	84.95	94	-9.05	Horizontal
2480	94.56	-9.59	84.97	94	-9.03	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

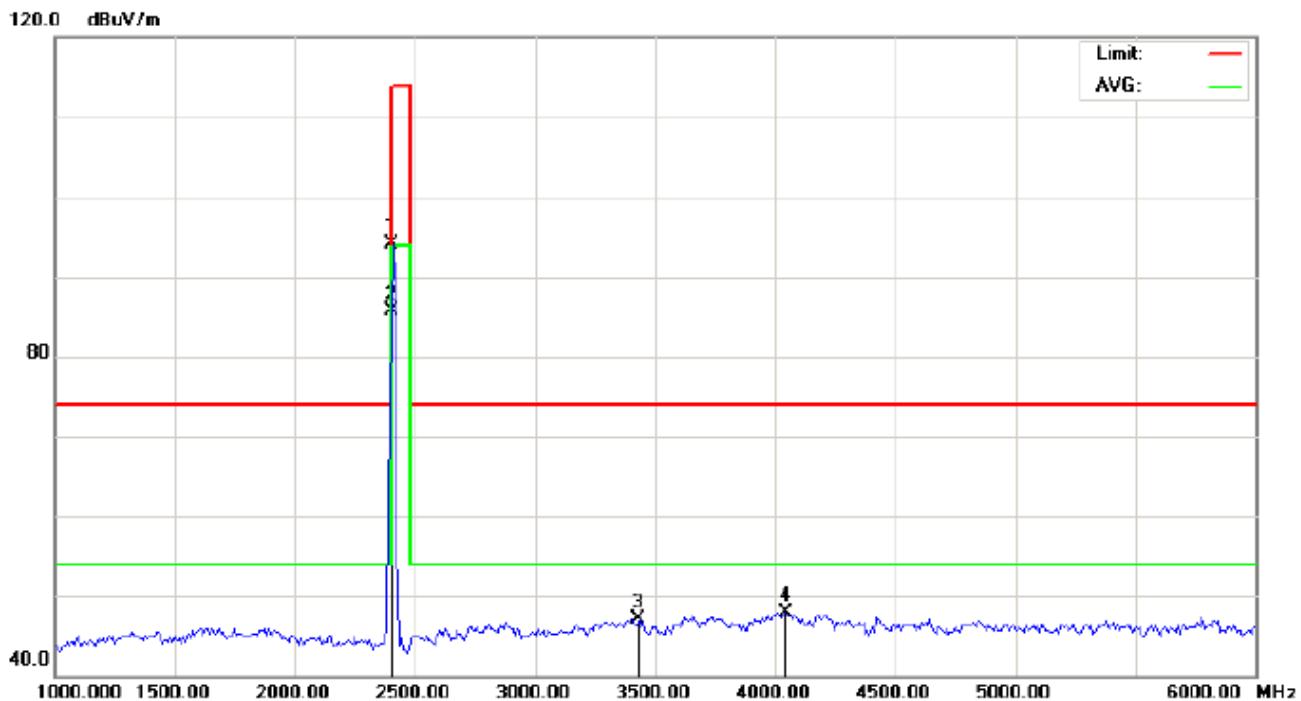


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Headset Distance: 3m
M/N:COULAX CX04
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.76	-9.68	94.08	114.00	-19.92	peak			
2	*	2402.000	95.33	-9.68	85.65	94.00	-8.35	AVG	100	47	
3		3433.333	54.99	-7.95	47.04	74.00	-26.96	peak			
4		4041.667	52.59	-4.67	47.92	74.00	-26.08	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

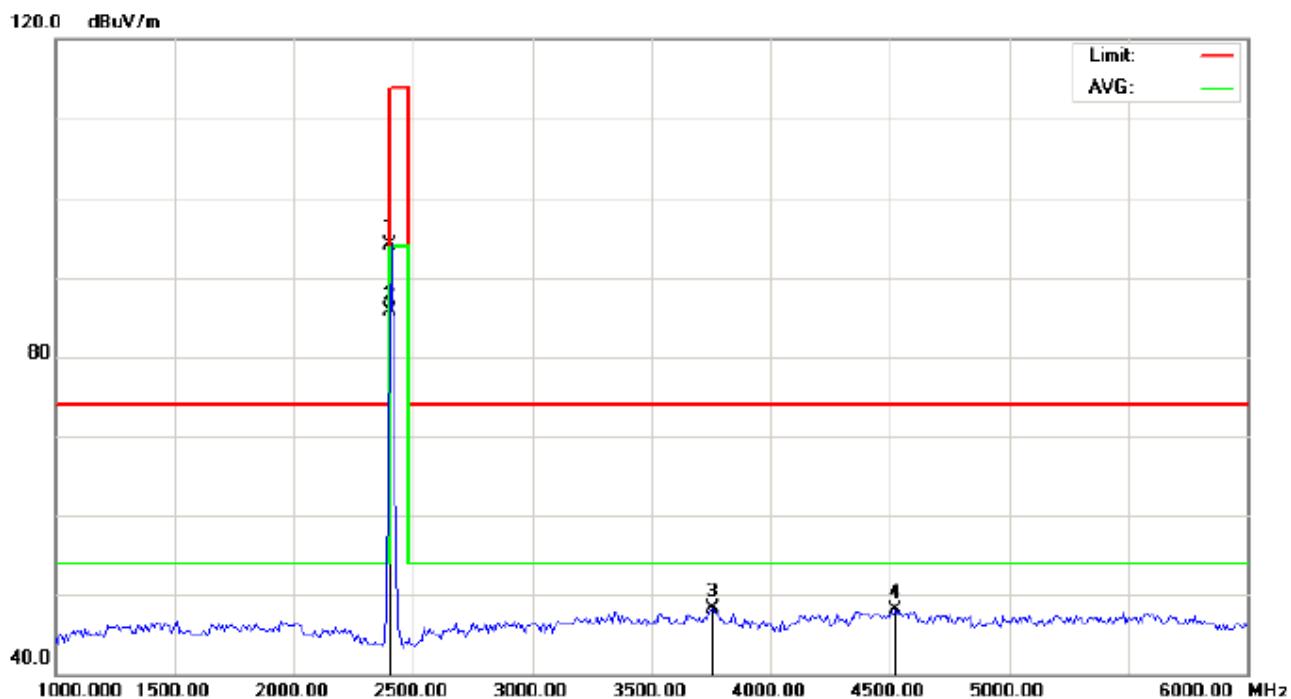


Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Bluetooth Headset Distance: 3m
 M/N:COULAX CX04
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.78	-9.68	94.10	114.00	-19.90	peak			
2	*	2402.000	95.41	-9.68	85.73	94.00	-8.27	AVG	100	78	
3		3758.333	54.64	-6.30	48.34	74.00	-25.66	peak			
4		4525.000	51.10	-3.04	48.06	74.00	-25.94	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

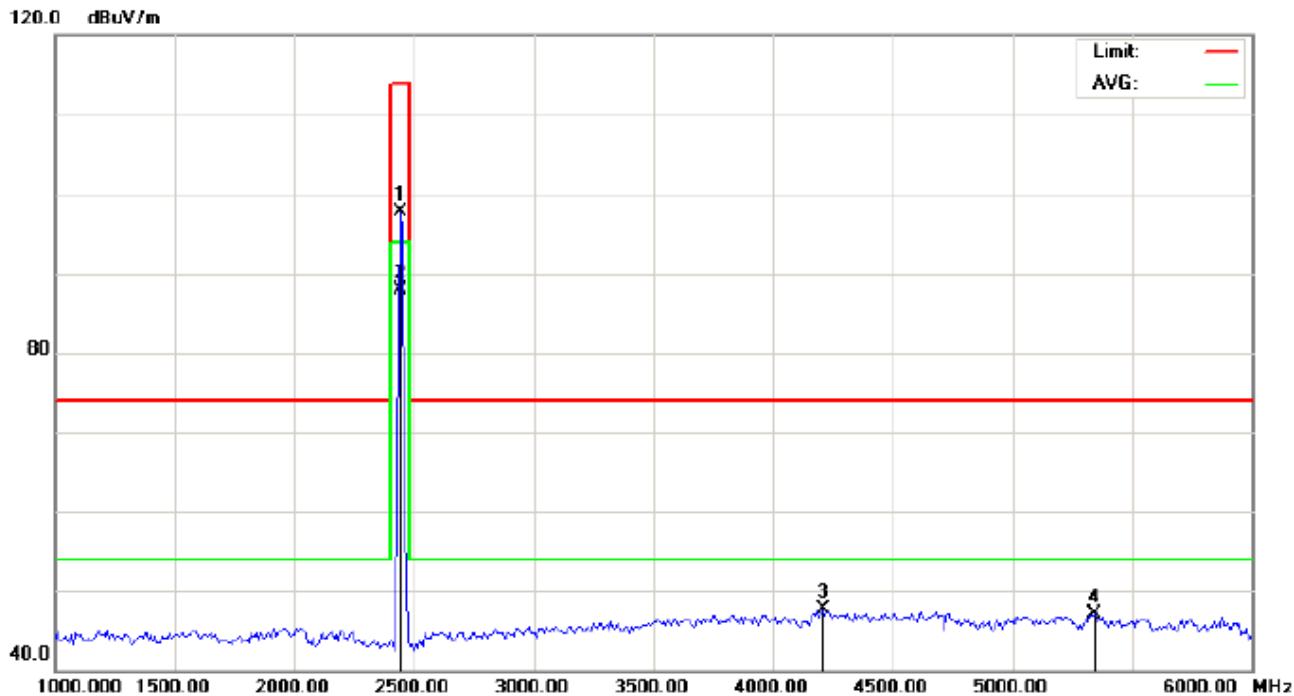


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Headset Distance: 3m
M/N:COULAX CX04
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	107.26	-9.63	97.63	114.00	-16.37	peak			
2	*	2440.000	97.48	-9.63	87.85	94.00	-6.15	AVG	150	84	
3		4208.333	51.71	-4.10	47.61	74.00	-26.39	peak			
4		5341.667	48.99	-1.81	47.18	74.00	-26.82	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

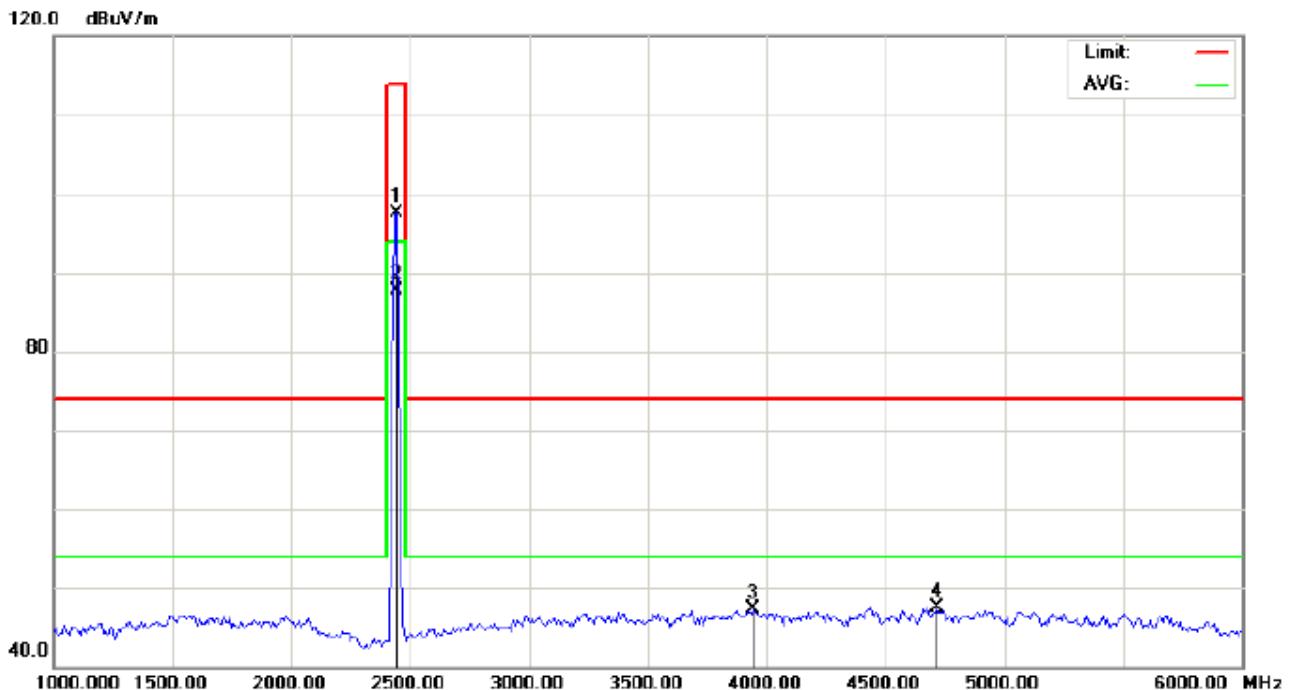


Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT:Bluetooth Headset Distance: 3m
 M/N:COULAX CX04
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2440.000	107.13	-9.63	97.50	114.00	-16.50	peak			
2	*	2440.000	97.43	-9.63	87.80	94.00	-6.20	AVG	150	49	
3		3941.667	52.41	-5.17	47.24	74.00	-26.76	peak			
4		4716.667	50.03	-2.54	47.49	74.00	-26.51	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

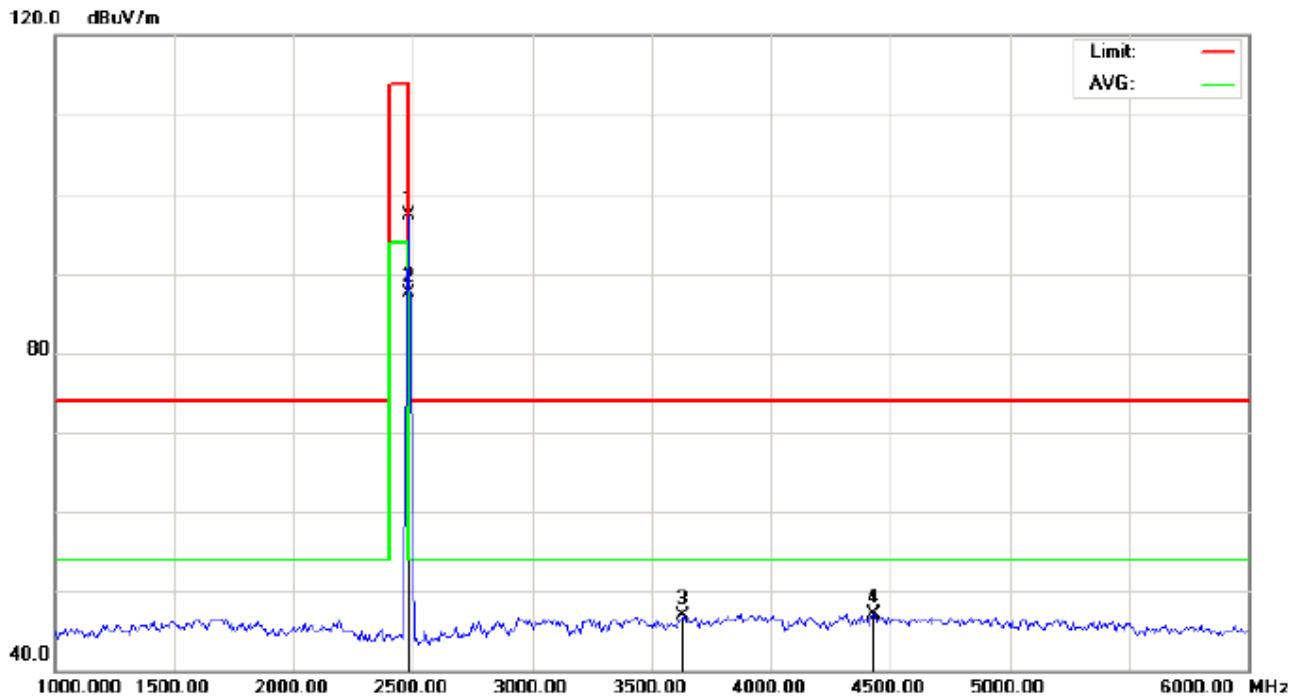


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Headset Distance: 3m
M/N:COULAX CX04
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	106.90	-9.59	97.31	114.00	-16.69	peak			
2	*	2480.000	97.11	-9.59	87.52	94.00	-6.48	AVG	150	312	
3		3633.333	53.89	-7.07	46.82	74.00	-27.18	peak			
4		4433.333	50.38	-3.34	47.04	74.00	-26.96	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

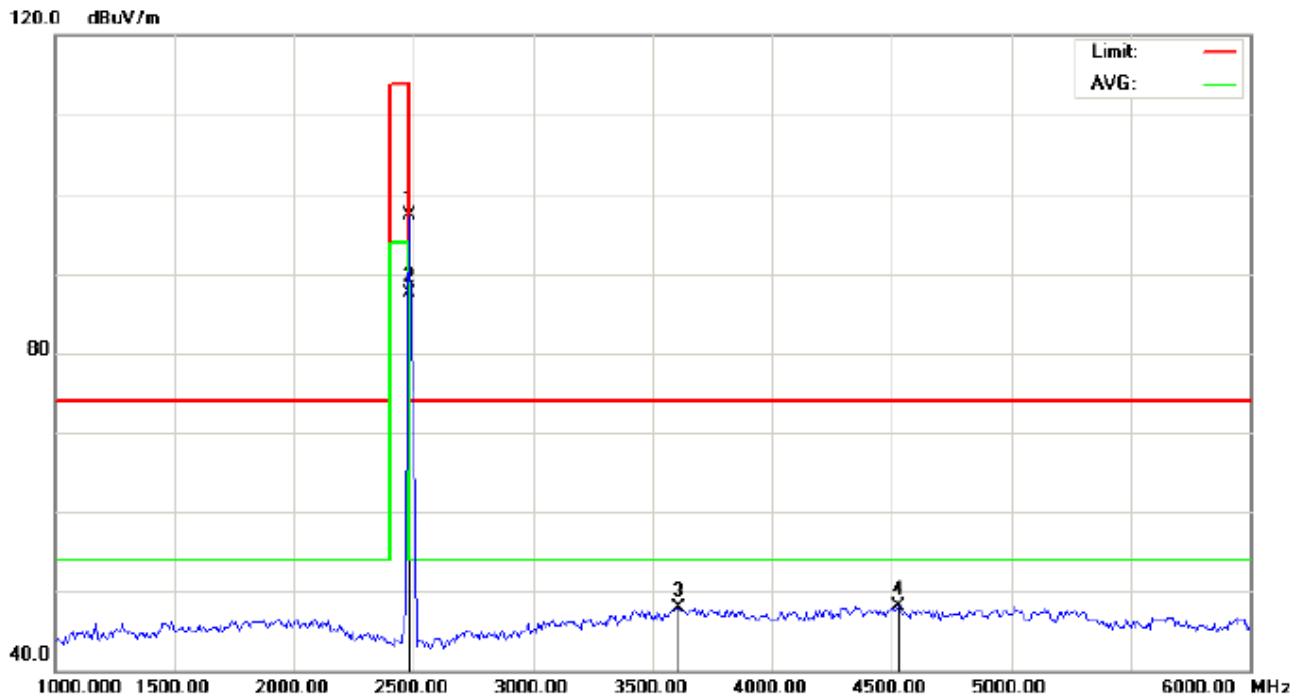

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT:Bluetooth Headset Distance: 3m
M/N:COULAX CX04
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	106.88	-9.59	97.29	114.00	-16.71	peak			
2	*	2480.000	97.07	-9.59	87.48	94.00	-6.52	AVG	150	68	
3		3608.333	55.22	-7.22	48.00	74.00	-26.00	peak			
4		4533.333	51.17	-3.02	48.15	74.00	-25.85	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	103.76	-9.68	94.08	114	-19.92	Horizontal
2402	103.78	-9.68	94.10	114	-19.90	Vertical
2440	107.26	-9.63	97.63	114	-16.37	Horizontal
2440	107.13	-9.63	97.50	114	-16.50	Vertical
2480	106.90	-9.59	97.31	114	-16.69	Horizontal
2480	106.88	-9.59	97.29	114	-16.71	Vertical

Average value

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	95.33	-9.68	85.65	94	-8.35	Horizontal
2402	95.41	-9.68	85.73	94	-8.27	Vertical
2440	97.48	-9.63	87.85	94	-6.15	Horizontal
2440	97.43	-9.63	87.80	94	-6.20	Vertical
2480	97.11	-9.59	87.52	94	-6.48	Horizontal
2480	97.07	-9.59	87.48	94	-6.52	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

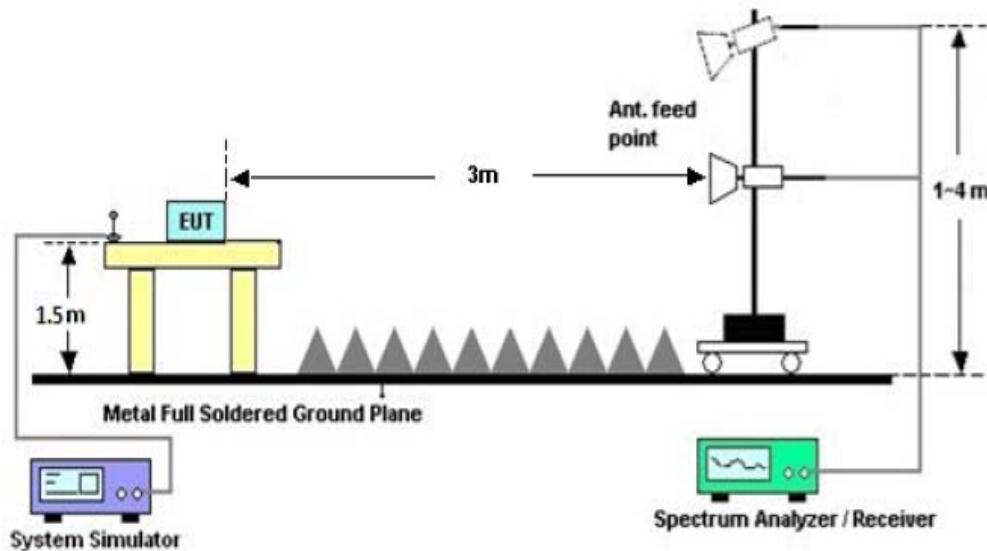


9.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

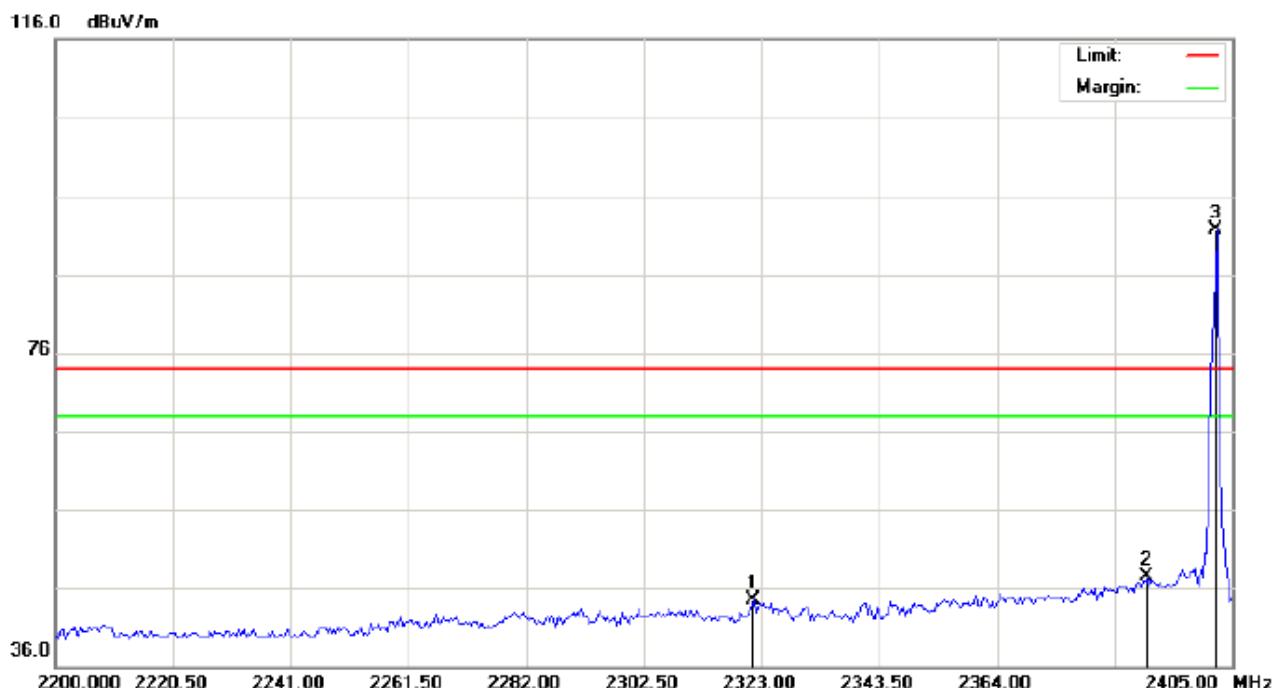

Site: site #1 Polarization: *Horizontal* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:


M/N:COULAX CX04

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2321.633	34.24	10.23	44.47	74.00	-29.53	peak			
2		2390.000	37.12	10.31	47.43	74.00	-26.57	peak			
3	*	2402.000	81.41	10.32	91.73	74.00	17.73	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

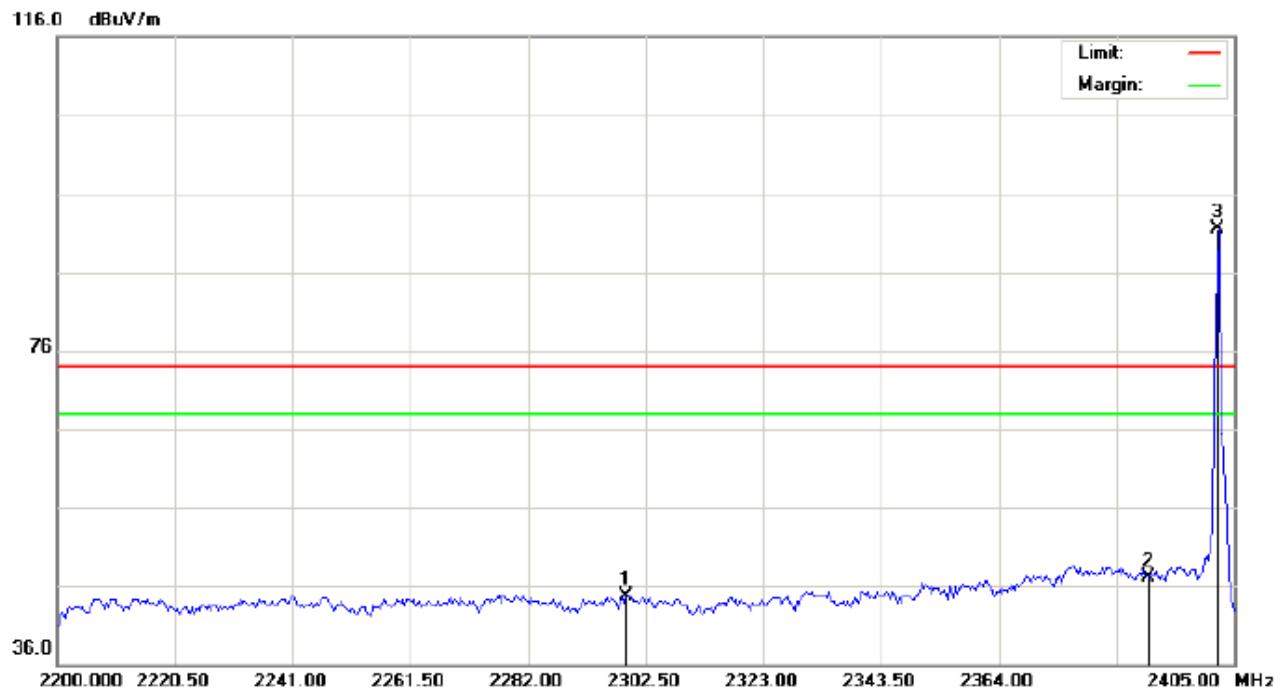

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Bluetooth Headset Distance:
M/N:COULAX CX04
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2299.083	34.58	10.21	44.79	74.00	-29.21	peak			
2		2390.000	36.85	10.31	47.16	74.00	-26.84	peak			
3	*	2402.000	81.26	10.32	91.58	74.00	17.58	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

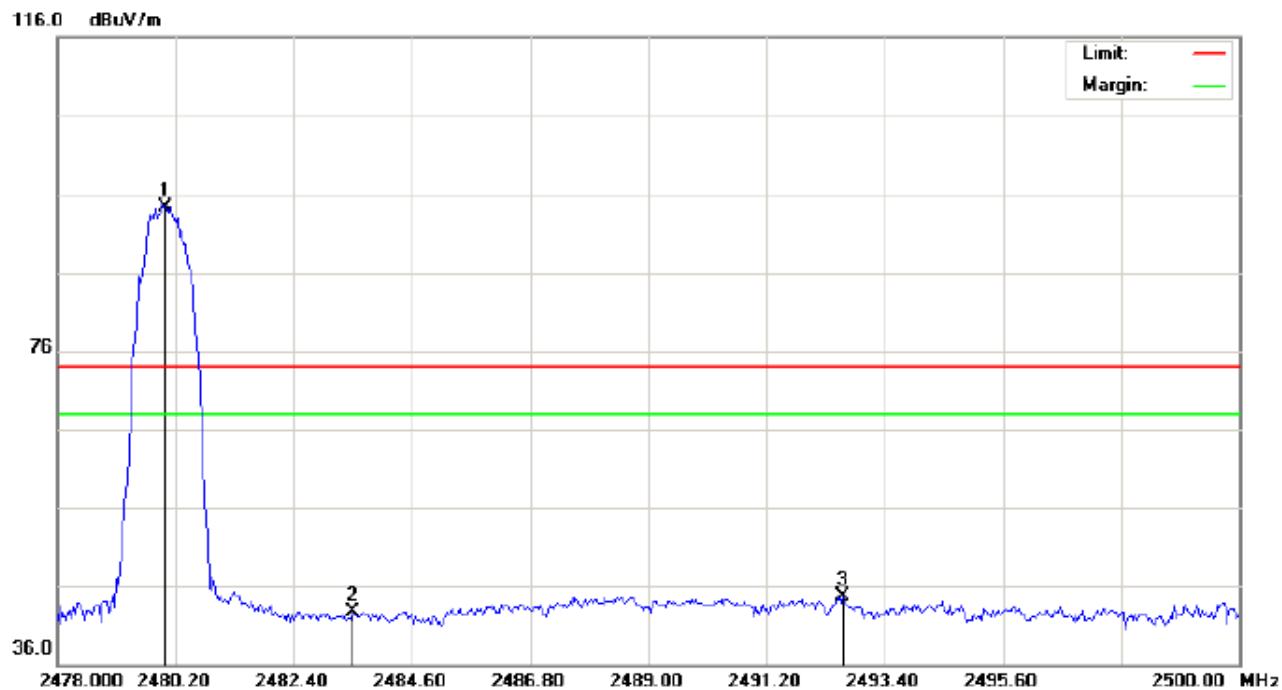

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT:Bluetooth Headset Distance:
 M/N:COULAX CX04
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.96	10.41	94.37	74.00	20.37	peak			
2		2483.500	32.25	10.41	42.66	74.00	-31.34	peak			
3		2492.630	34.21	10.42	44.63	74.00	-29.37	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

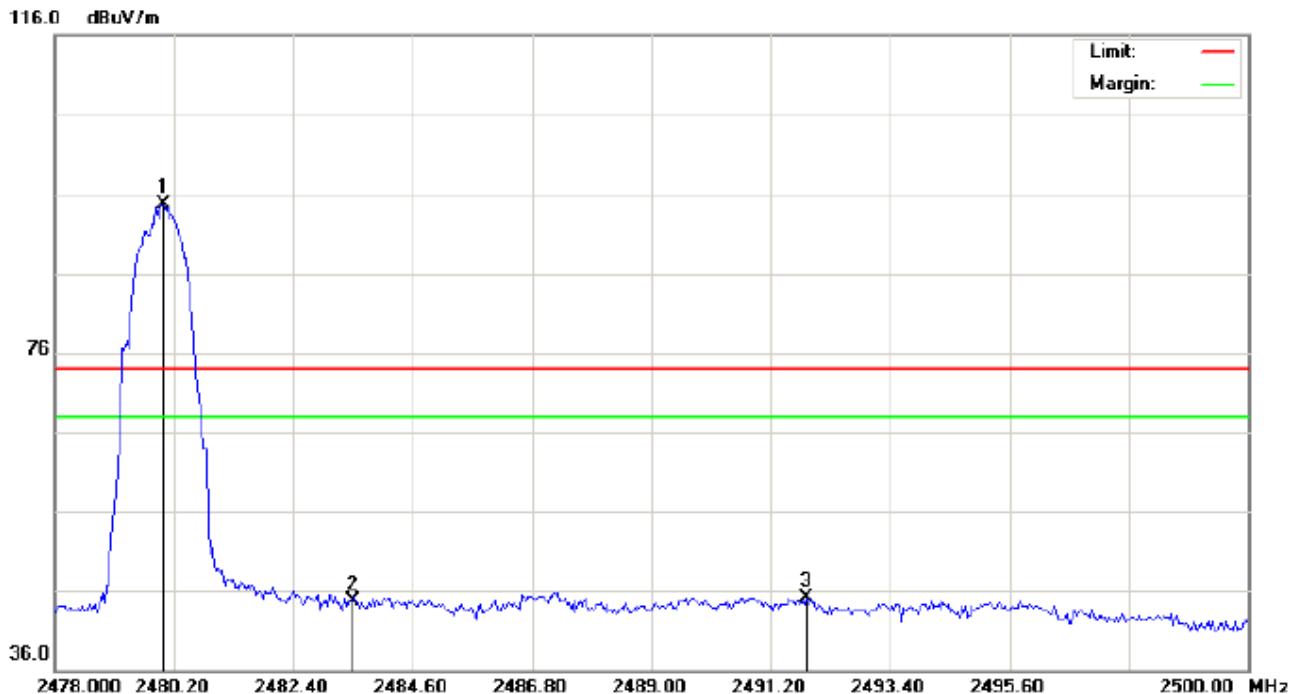

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT:Bluetooth Headset Distance:
M/N:COULAX CX04
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	84.36	10.41	94.77	74.00	20.77	peak			
2		2483.500	34.37	10.41	44.78	74.00	-29.22	peak			
3		2491.860	34.67	10.42	45.09	74.00	-28.91	peak			

RESULT: PASS


Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

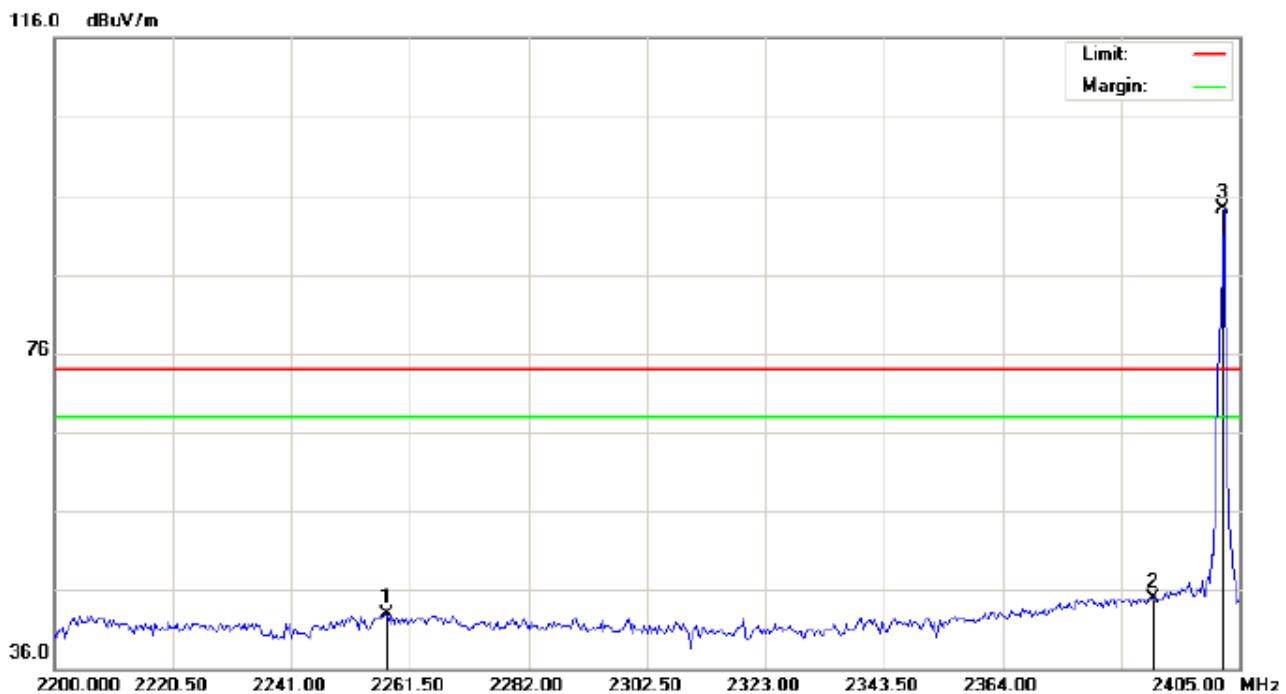

Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Headset Distance:
M/N: COULAX CX04
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2257.400	32.77	10.16	42.93	74.00	-31.07	peak			
2		2390.000	34.62	10.31	44.93	74.00	-29.07	peak			
3	*	2402.000	83.91	10.32	94.23	74.00	20.23	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

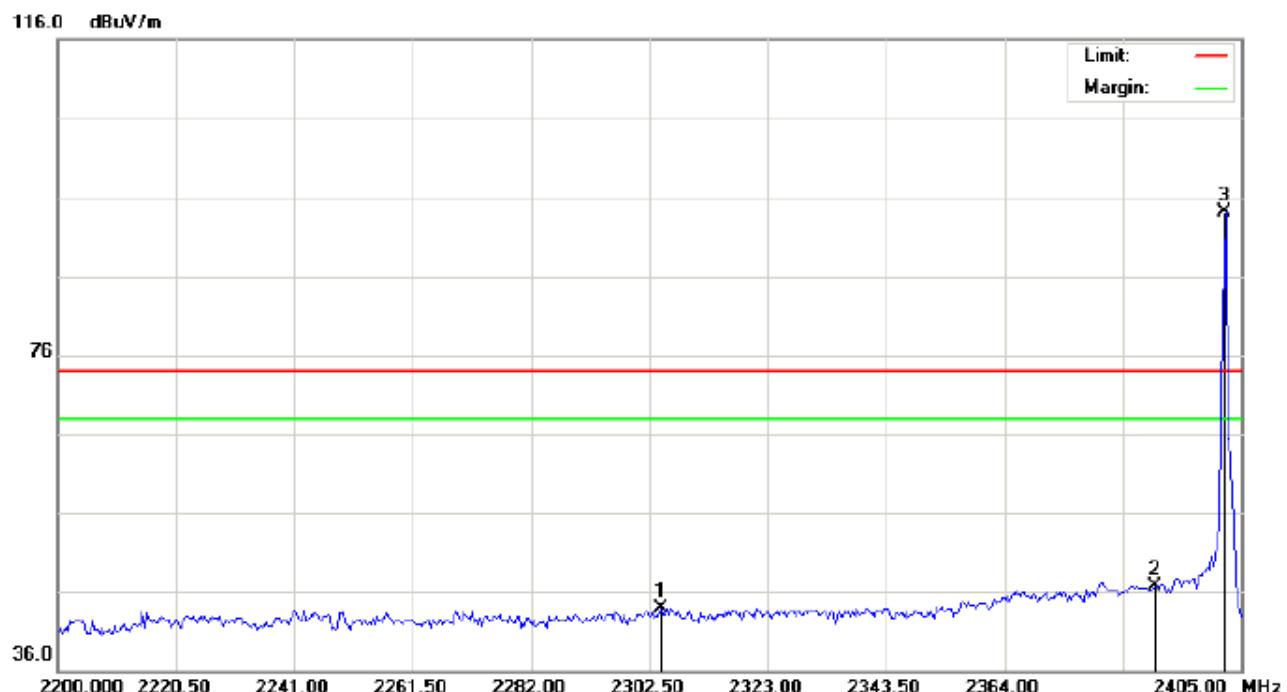

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance:
 M/N: COULAX CX04
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dB	cm		degree		
1		2304.550	33.70	10.21	43.91	74.00	-30.09	peak			
2		2390.000	36.35	10.31	46.66	74.00	-27.34	peak			
3	*	2402.000	83.76	10.32	94.08	74.00	20.08	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

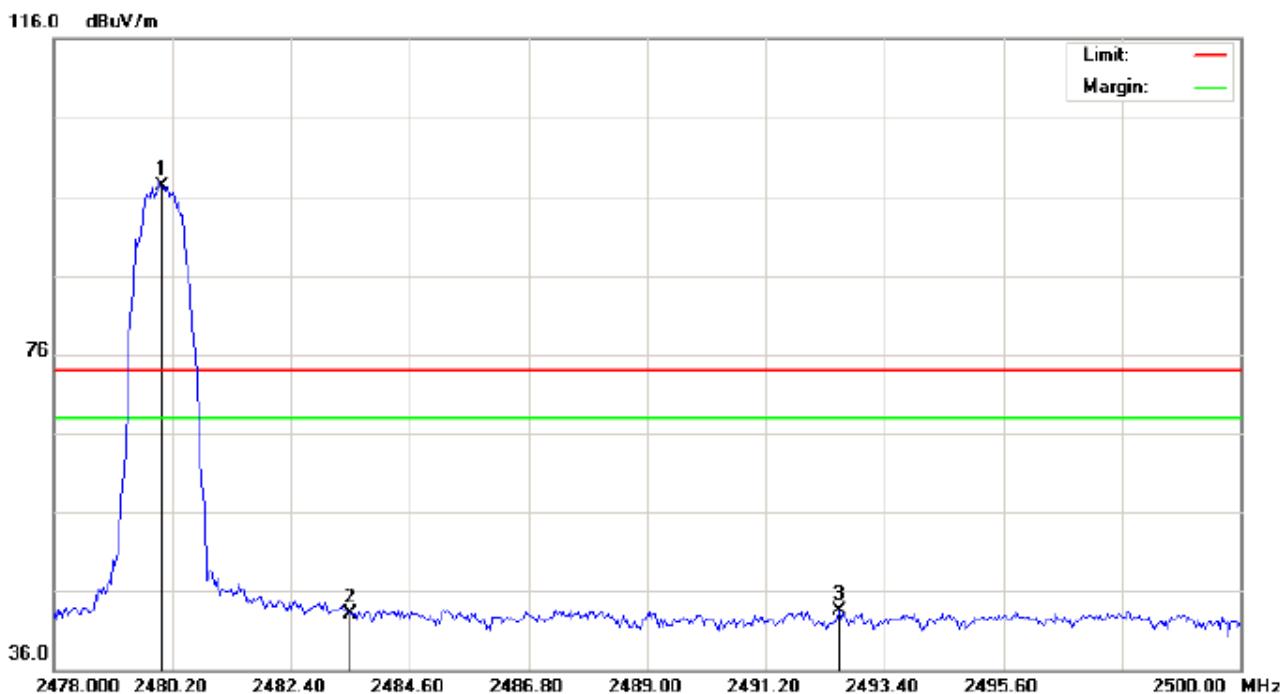

Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance:
 M/N: COULAX CX04
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.000	86.96	10.41	97.37	74.00	23.37	peak			
2		2483.500	32.75	10.41	43.16	74.00	-30.84	peak			
3		2492.557	33.05	10.42	43.47	74.00	-30.53	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

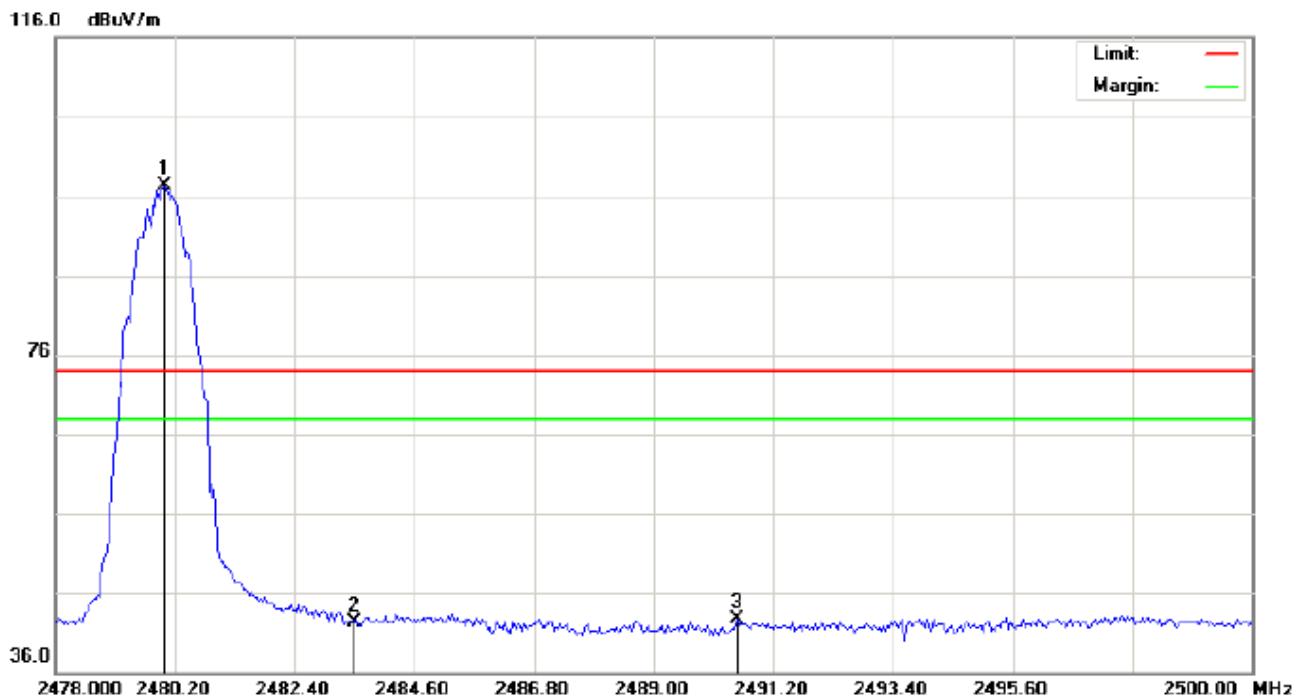

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Headset Distance:
M/N: COULAX CX04
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	86.85	10.41	97.26	74.00	23.26	peak			
2		2483.500	31.87	10.41	42.28	74.00	-31.72	peak			
3		2490.540	32.19	10.42	42.61	74.00	-31.39	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

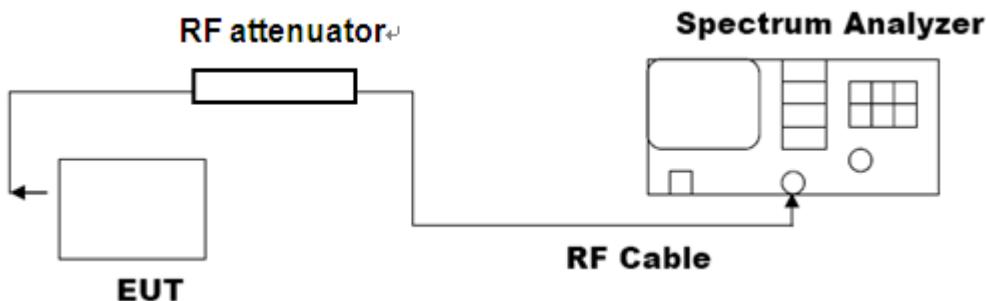


Note: The EUT has been used temporary antenna connector for testing.

10.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.935	1.104	PASS
	Middle Channel	0.932	1.090	PASS
	High Channel	0.932	1.091	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

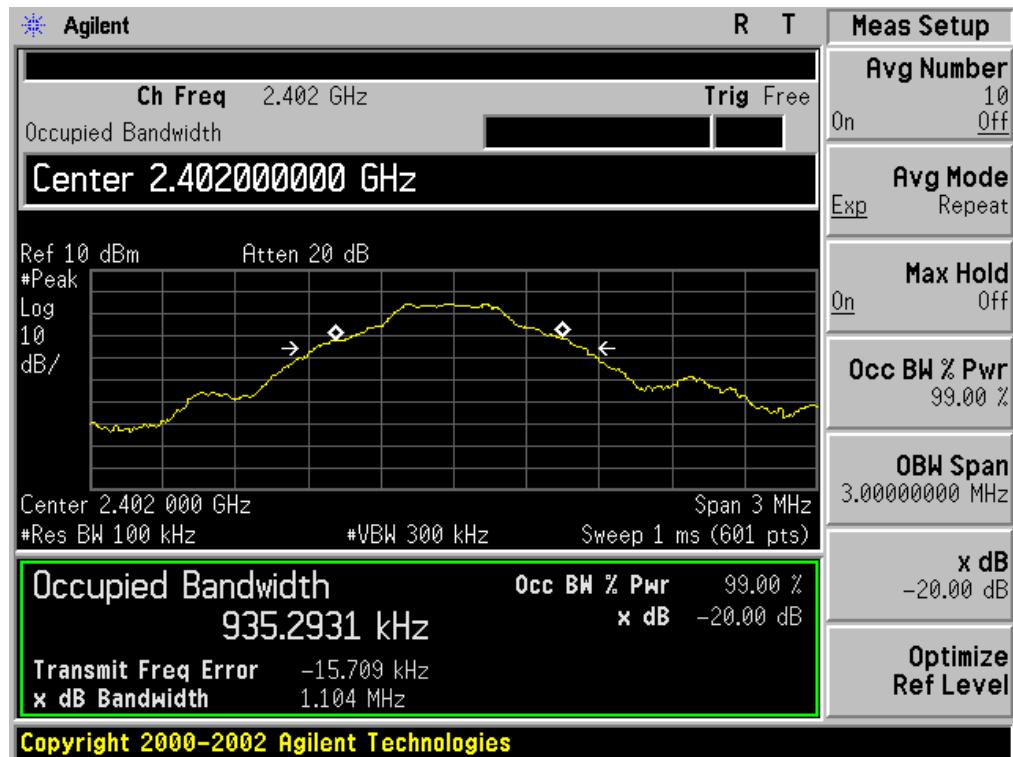

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

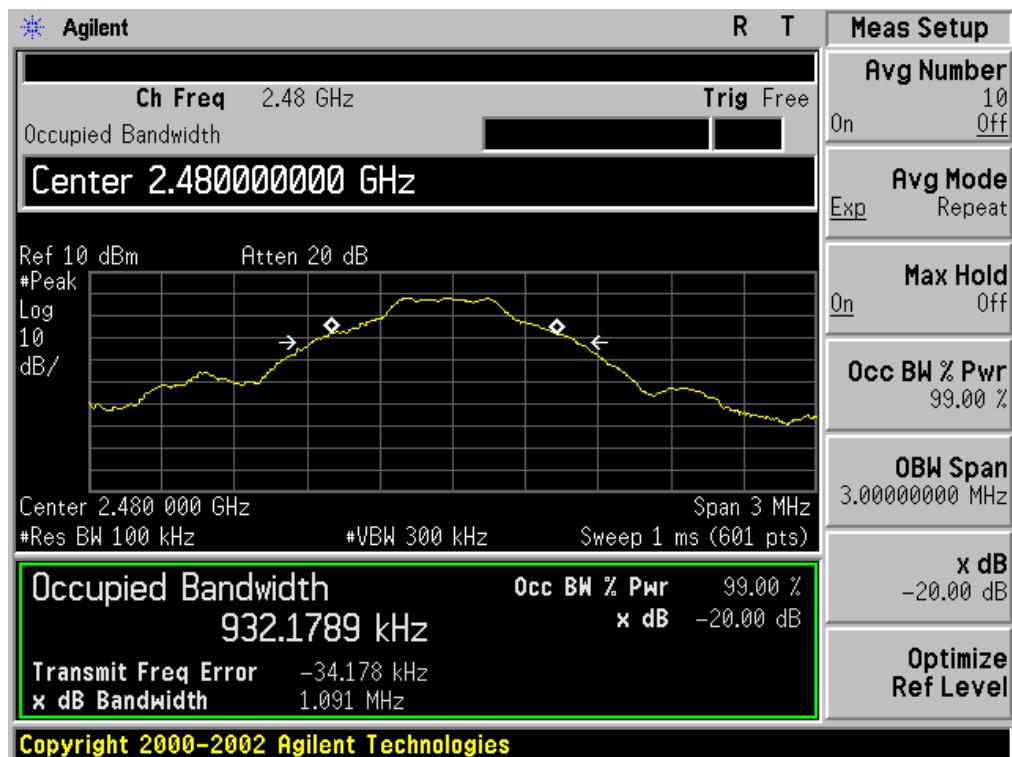

BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.207	1.340	PASS
	Middle Channel	1.195	1.345	PASS
	High Channel	1.193	1.359	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

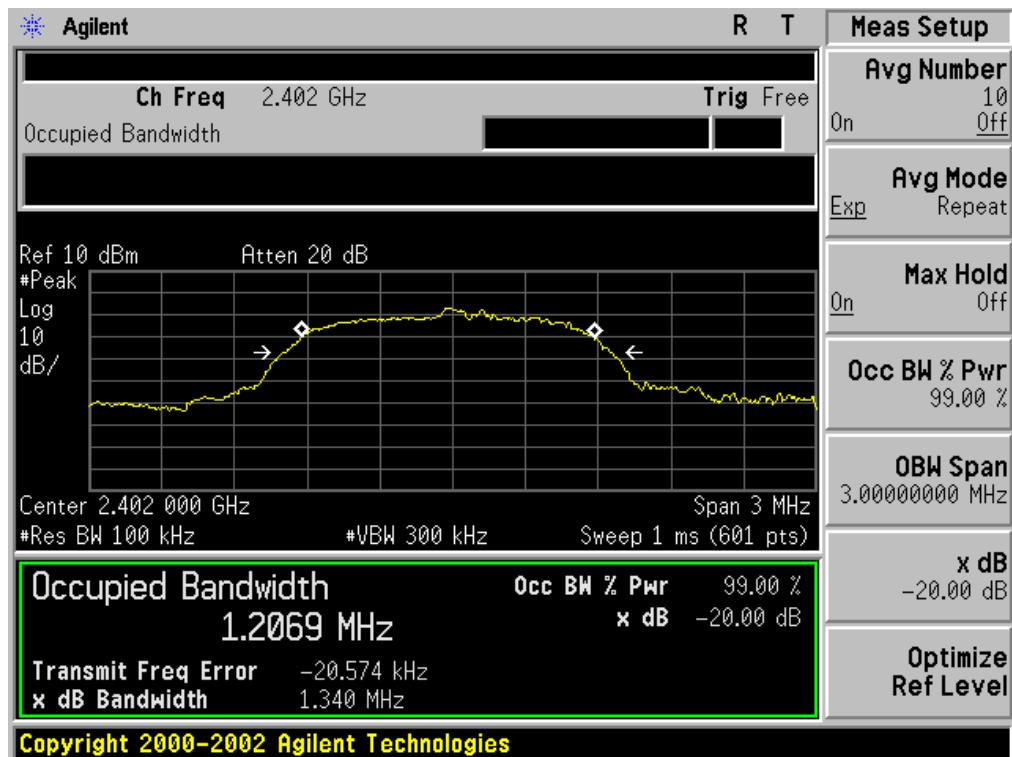


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.202	1.368	PASS
	Middle Channel	1.202	1.363	PASS
	High Channel	1.205	1.365	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

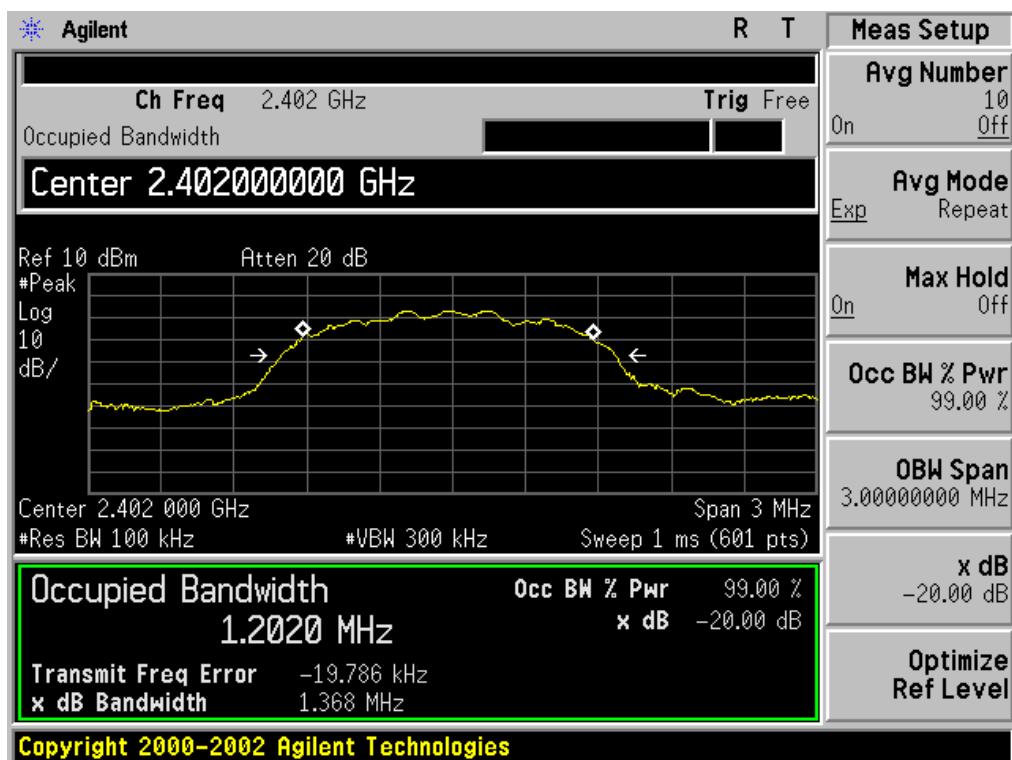

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

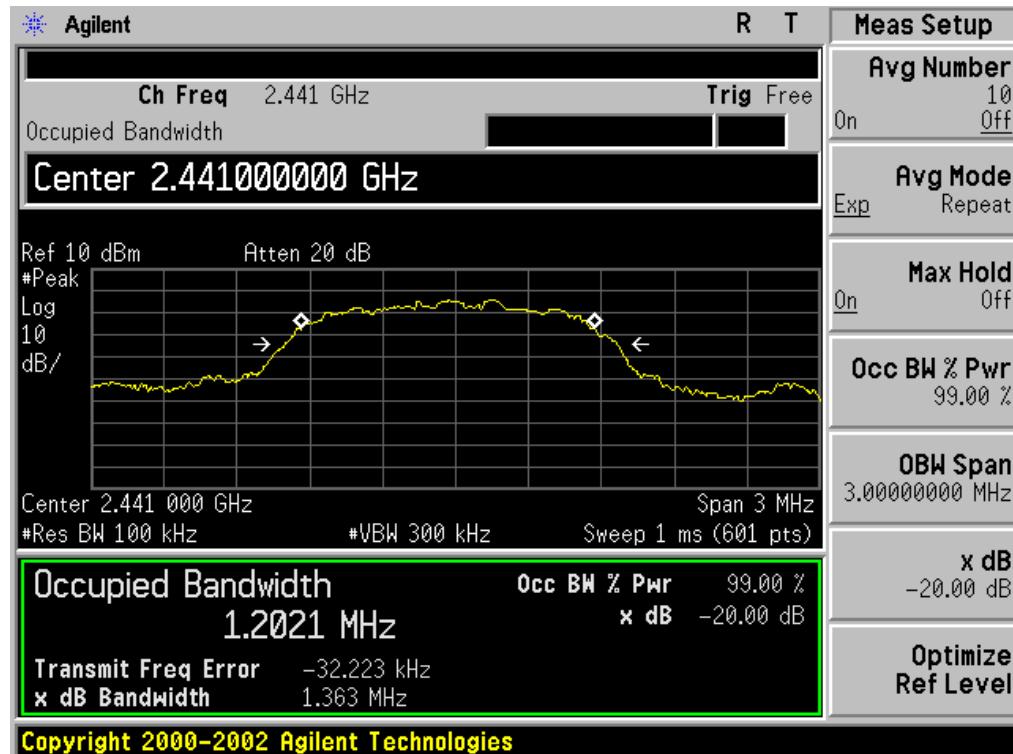


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

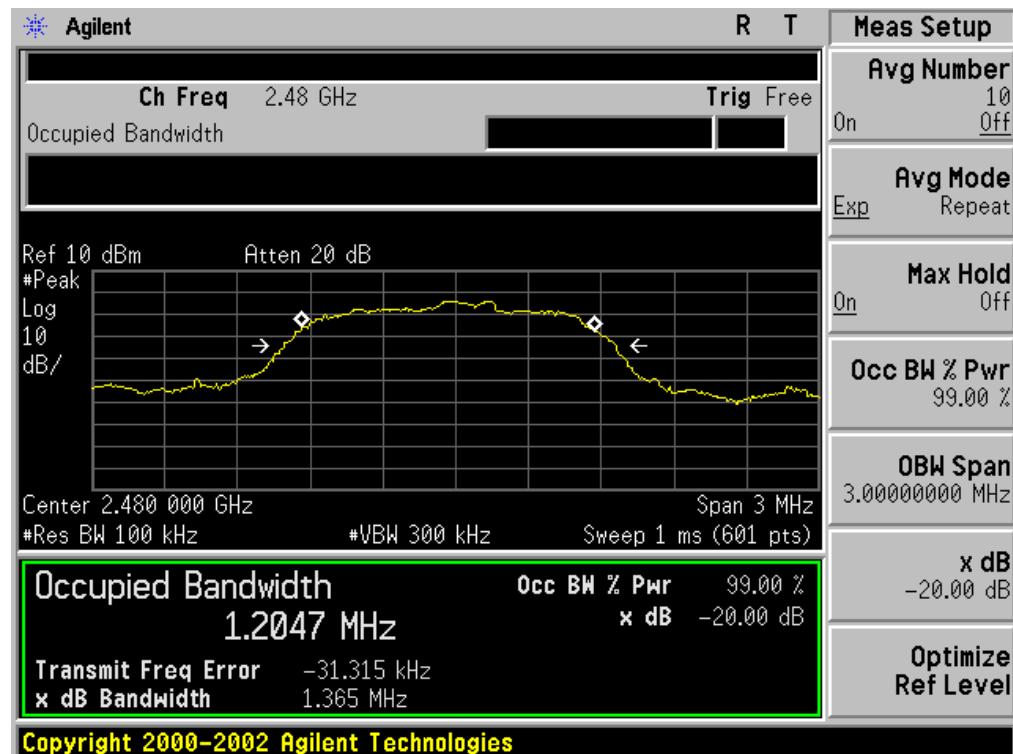


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.044	1.204	PASS
	Middle Channel	1.044	1.204	PASS
	High Channel	1.041	1.198	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

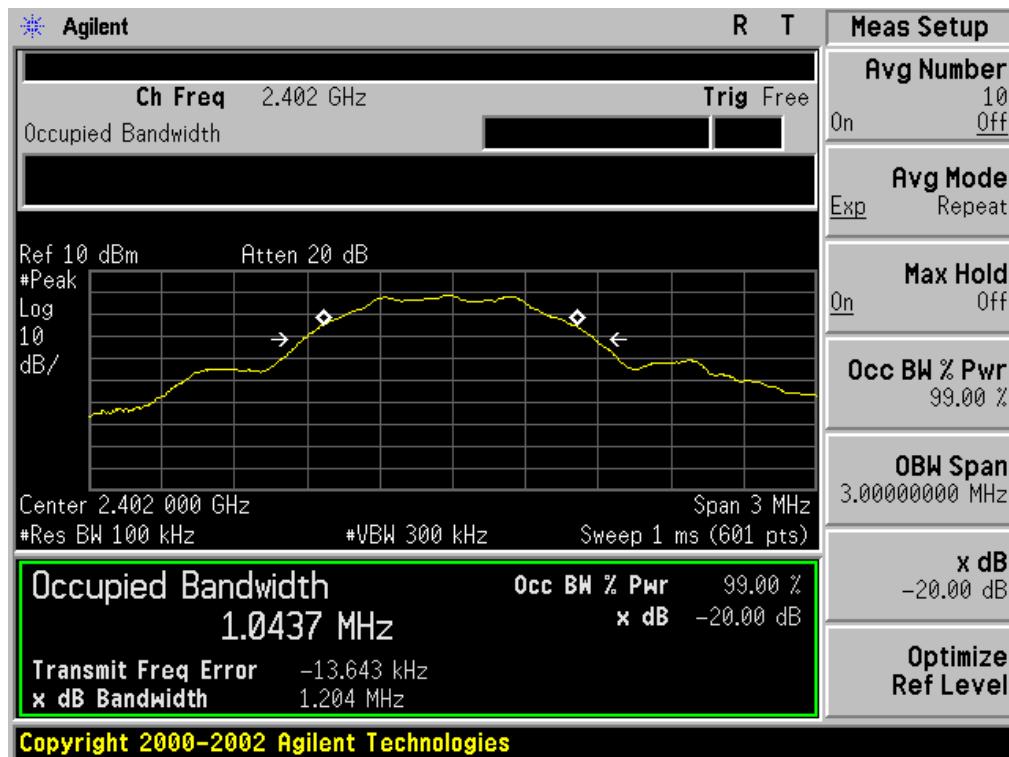

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

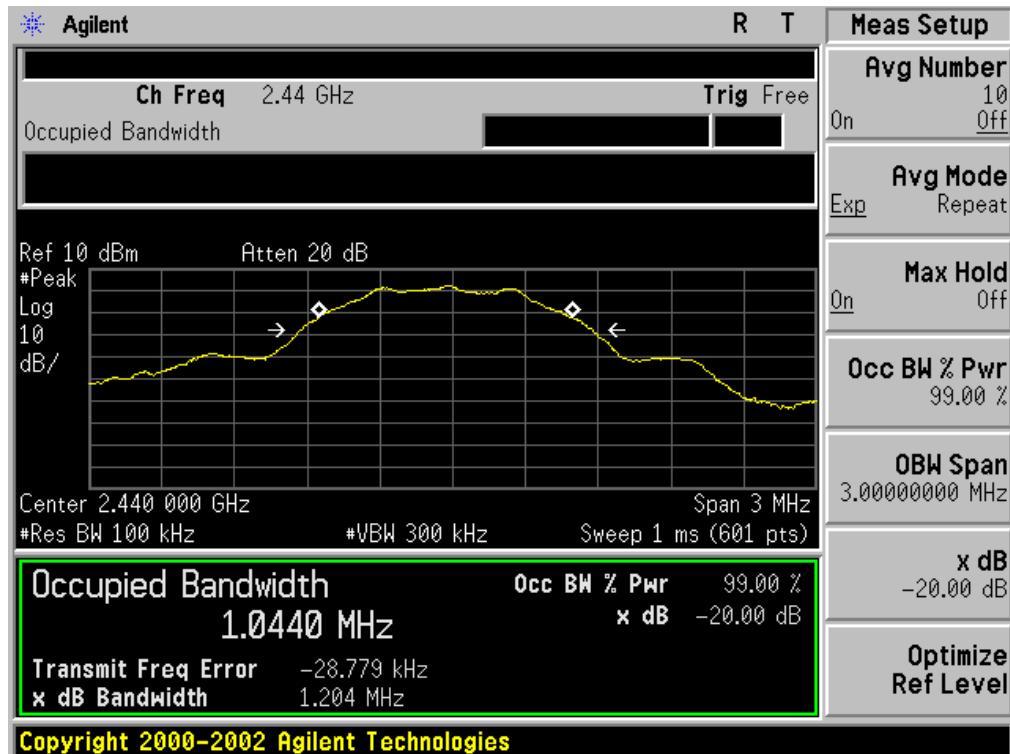

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

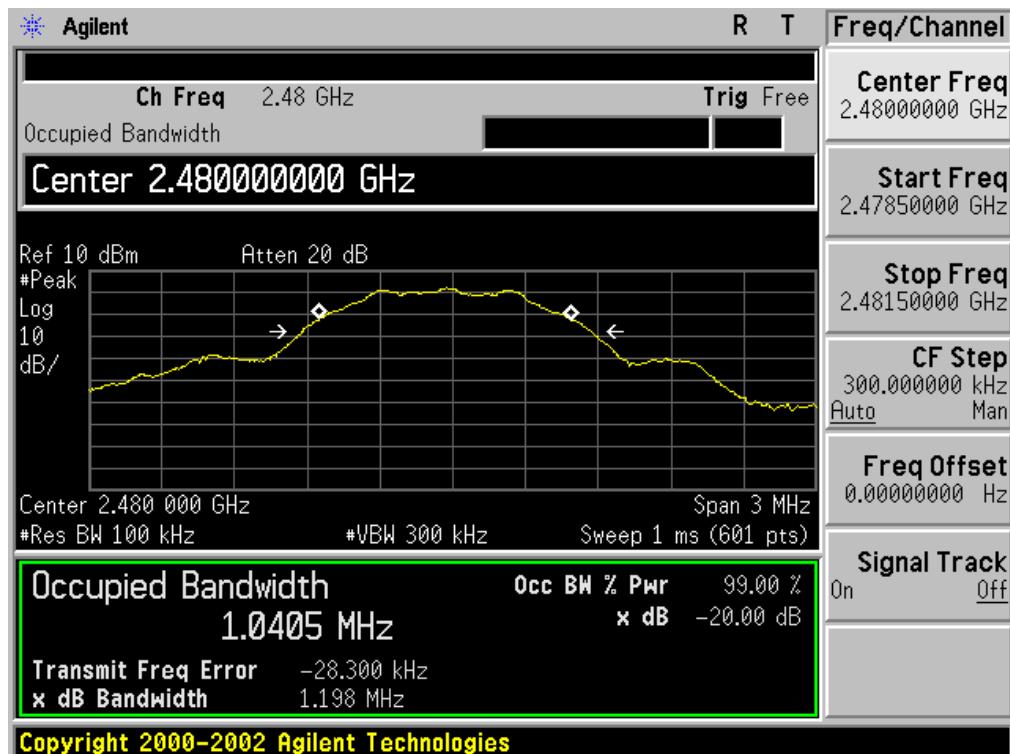

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

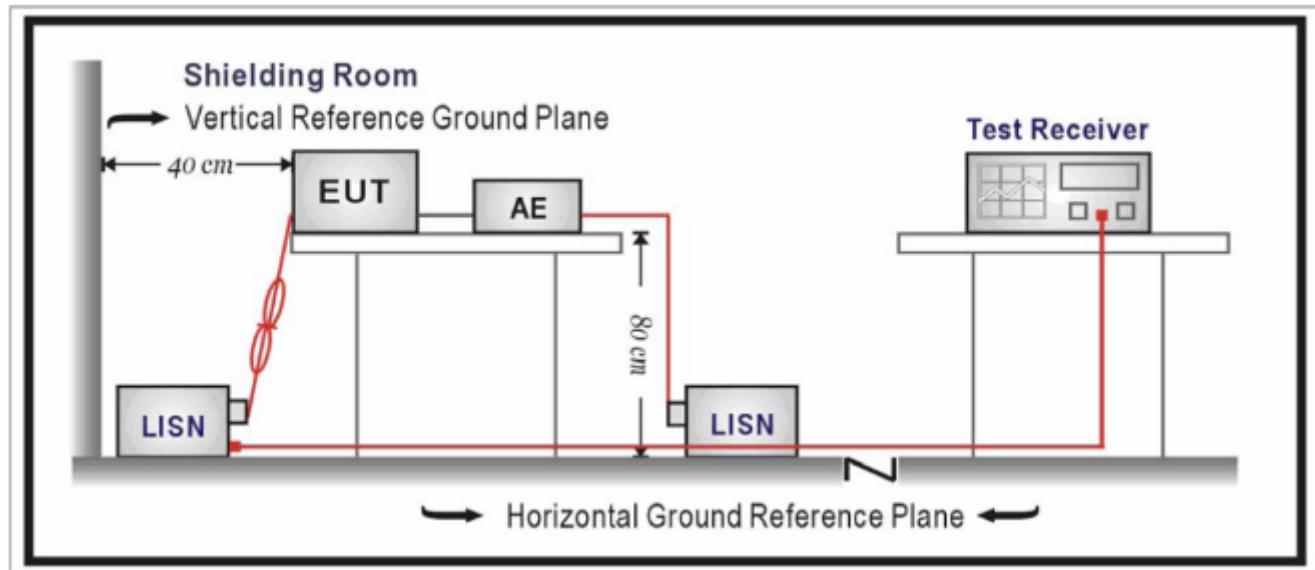

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.


11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

Test mode: BT Link with charging

FOR BR/EDR

Line Conducted Emission Test Line 1-L

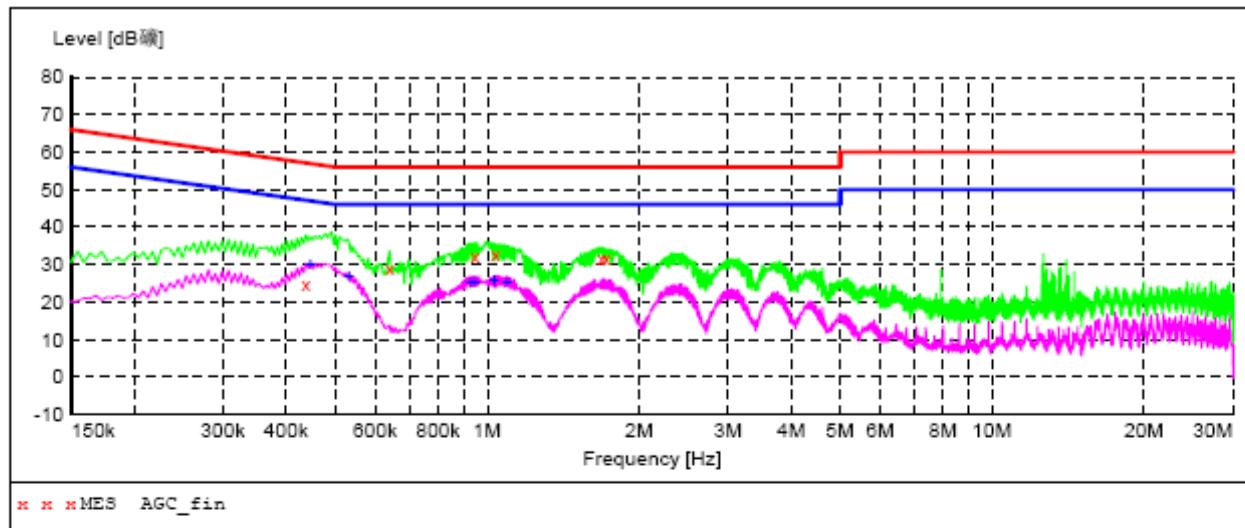

MEASUREMENT RESULT: "AGC_fin"

2016/6/27 15:45


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.438000	24.70	10.3	57	32.4	QP	L1	GND	ON
0.640500	29.10	10.3	56	26.9	QP	L1	GND	ON
0.946500	32.40	10.4	56	23.6	QP	L1	GND	ON
1.041000	32.50	10.4	56	23.5	QP	L1	GND	ON
1.684500	31.70	10.4	56	24.3	QP	L1	GND	ON
1.720500	31.40	10.4	56	24.6	QP	L1	GND	ON

MEASUREMENT RESULT: "AGC_fin2"

2016/6/27 15:45

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.447000	30.00	10.3	47	16.9	AV	L1	GND	ON
0.532500	26.60	10.3	46	19.4	AV	L1	GND	ON
0.928500	25.00	10.4	46	21.0	AV	L1	GND	ON
0.946500	25.30	10.4	46	20.7	AV	L1	GND	ON
1.032000	25.50	10.4	46	20.5	AV	L1	GND	ON
1.095000	25.10	10.4	46	20.9	AV	L1	GND	ON

Line Conducted Emission Test Line 2-N

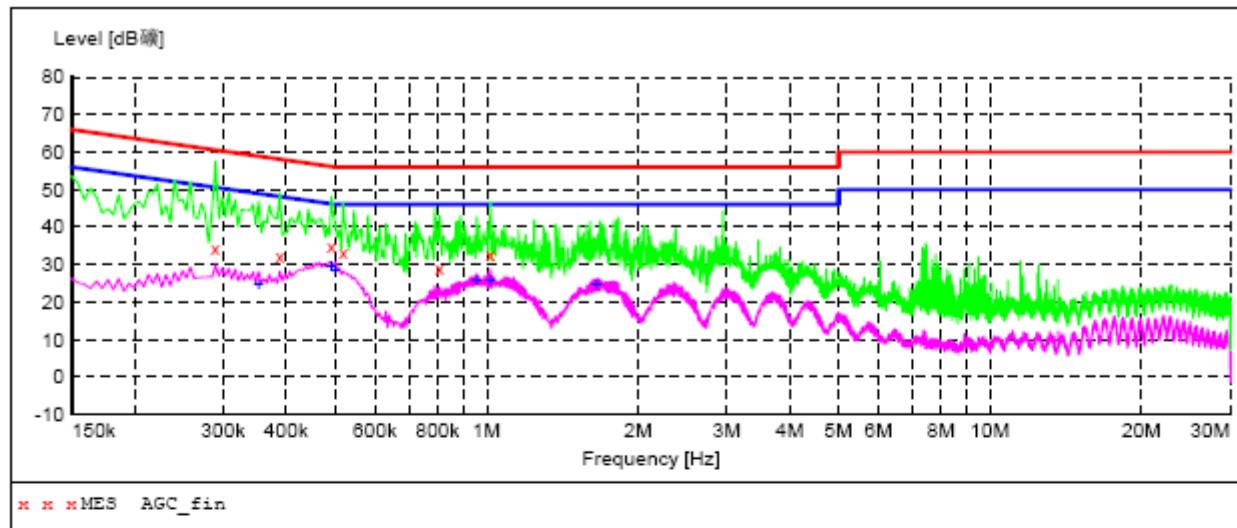

MEASUREMENT RESULT: "AGC_fin"

2016/6/27 15:39

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.289500	34.10	10.3	61	26.4	QP	N	GND	ON
0.388500	32.40	10.3	58	25.7	QP	N	GND	ON
0.492000	34.90	10.3	56	21.2	QP	N	GND	ON
0.519000	33.10	10.3	56	22.9	QP	N	GND	ON
0.807000	29.10	10.3	56	26.9	QP	N	GND	ON
1.018500	32.90	10.4	56	23.1	QP	N	GND	ON


MEASUREMENT RESULT: "AGC_fin2"

2016/6/27 15:39

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.352500	24.60	10.3	49	24.3	AV	N	GND	ON
0.492000	29.30	10.3	46	16.8	AV	N	GND	ON
0.501000	28.60	10.3	46	17.4	AV	N	GND	ON
0.955500	25.80	10.4	46	20.2	AV	N	GND	ON
1.018500	25.80	10.4	46	20.2	AV	N	GND	ON
1.653000	24.70	10.4	46	21.3	AV	N	GND	ON

FOR BLE

Line Conducted Emission Test Line 1-L

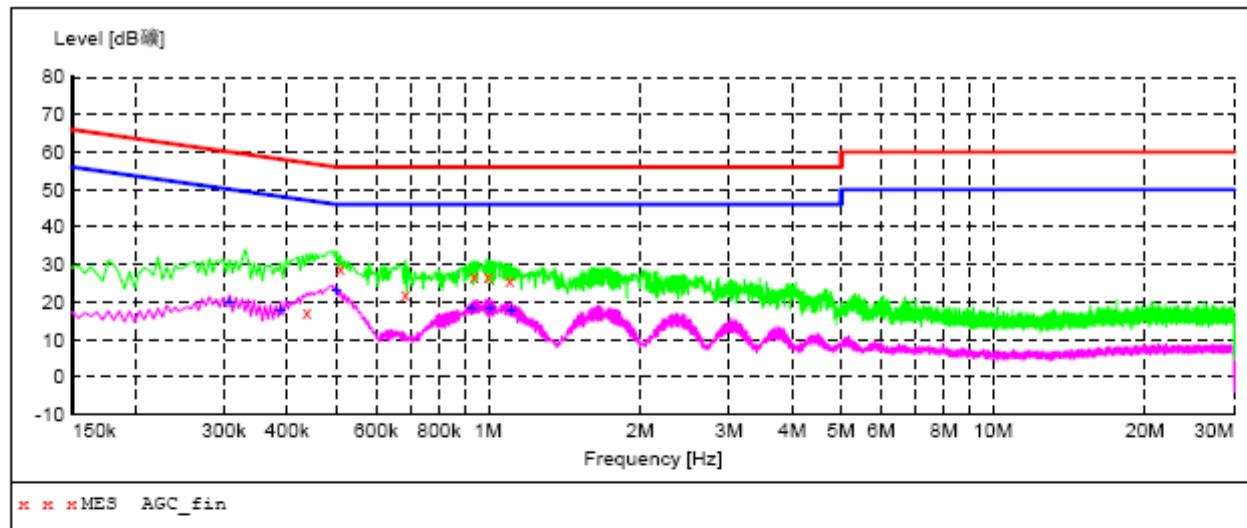

MEASUREMENT RESULT: "AGC_fin"

2016/6/27 16:05


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.438000	17.30	10.3	57	39.8	QP	L1	GND	ON
0.510000	28.90	10.3	56	27.1	QP	L1	GND	ON
0.685500	22.00	10.3	56	34.0	QP	L1	GND	ON
0.937500	27.10	10.4	56	28.9	QP	L1	GND	ON
1.000500	27.00	10.4	56	29.0	QP	L1	GND	ON
1.104000	25.90	10.4	56	30.1	QP	L1	GND	ON

MEASUREMENT RESULT: "AGC_fin2"

2016/6/27 16:05

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.307500	19.90	10.3	50	30.1	AV	L1	GND	ON
0.388500	18.00	10.3	48	30.1	AV	L1	GND	ON
0.501000	23.00	10.3	46	23.0	AV	L1	GND	ON
0.928500	18.50	10.4	46	27.5	AV	L1	GND	ON
1.009500	18.10	10.4	46	27.9	AV	L1	GND	ON
1.113000	17.50	10.4	46	28.5	AV	L1	GND	ON

Line Conducted Emission Test Line 2-N

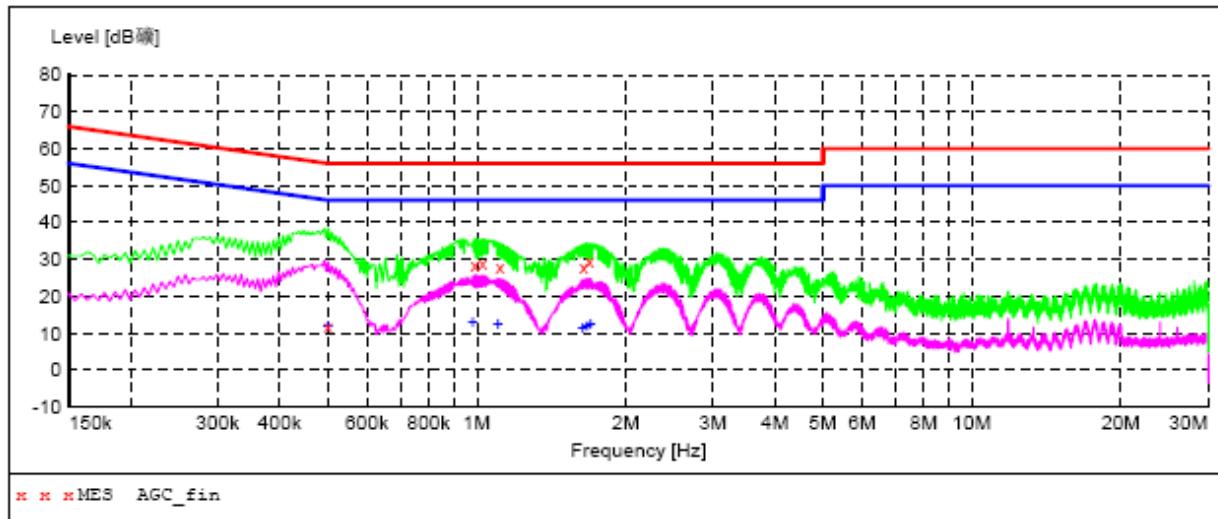

MEASUREMENT RESULT: "AGC_fin"

2016/6/27 16:17

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX	STATE
MHz	dBuV	dB	dBuV	dB					
0.501000	11.90	10.3	56	44.1	QP	N	GND	ON	
0.991500	28.40	10.4	56	27.6	QP	N	GND	ON	
1.027500	28.90	10.4	56	27.1	QP	N	GND	ON	
1.113000	27.80	10.4	56	28.2	QP	N	GND	ON	
1.644000	27.70	10.4	56	28.3	QP	N	GND	ON	
1.689000	29.60	10.4	56	26.4	QP	N	GND	ON	


MEASUREMENT RESULT: "AGC_fin2"

2016/6/27 16:17


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX	STATE
MHz	dBuV	dB	dBuV	dB					
0.501000	12.10	10.3	46	33.9	AV	N	GND	ON	
0.982500	13.10	10.4	46	32.9	AV	N	GND	ON	
1.104000	12.40	10.4	46	33.6	AV	N	GND	ON	
1.635000	11.50	10.4	46	34.5	AV	N	GND	ON	
1.671000	12.10	10.4	46	33.9	AV	N	GND	ON	
1.698000	12.50	10.4	46	33.5	AV	N	GND	ON	


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP

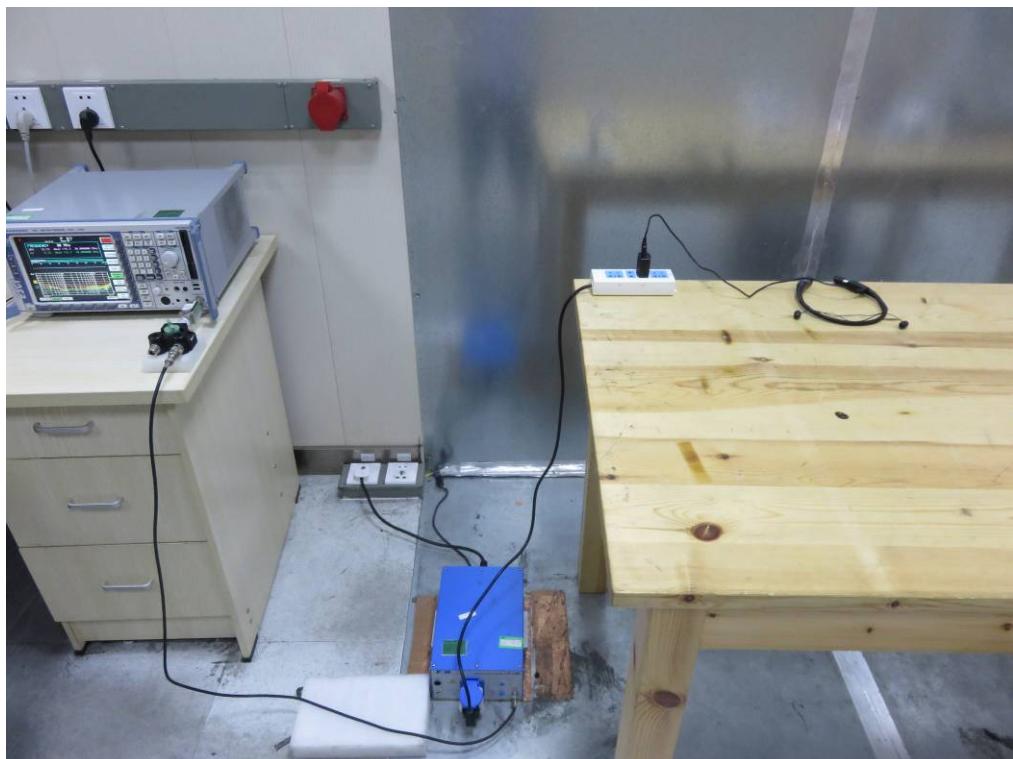

FCC RADIATED EMISSION TEST SETUP

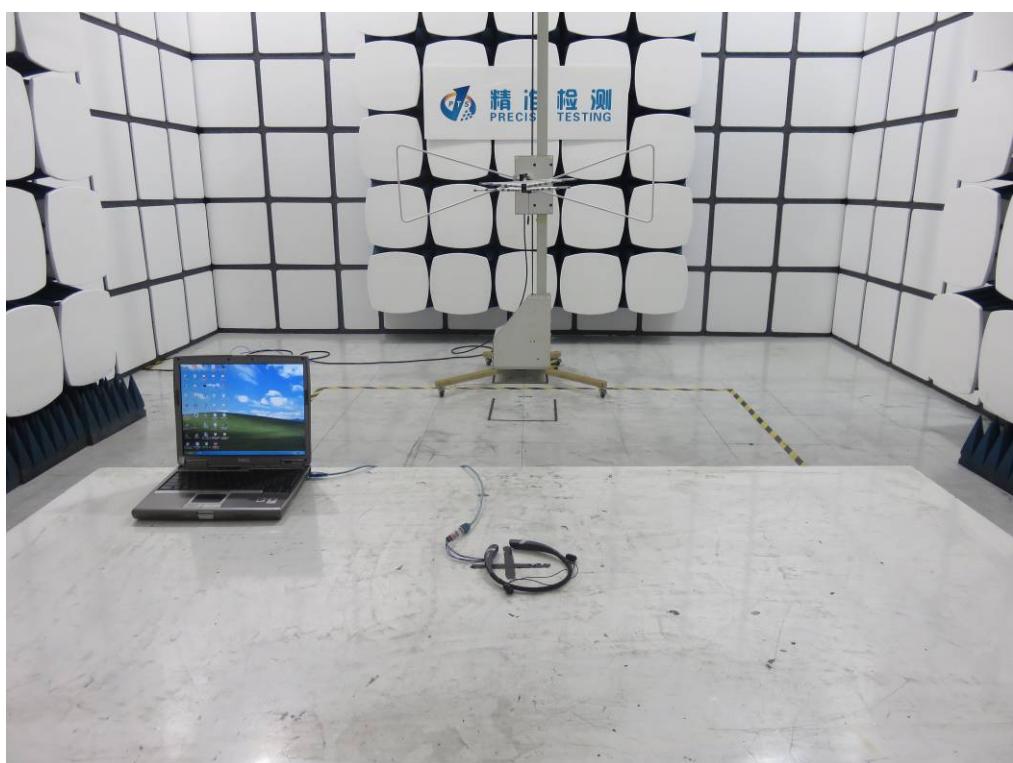

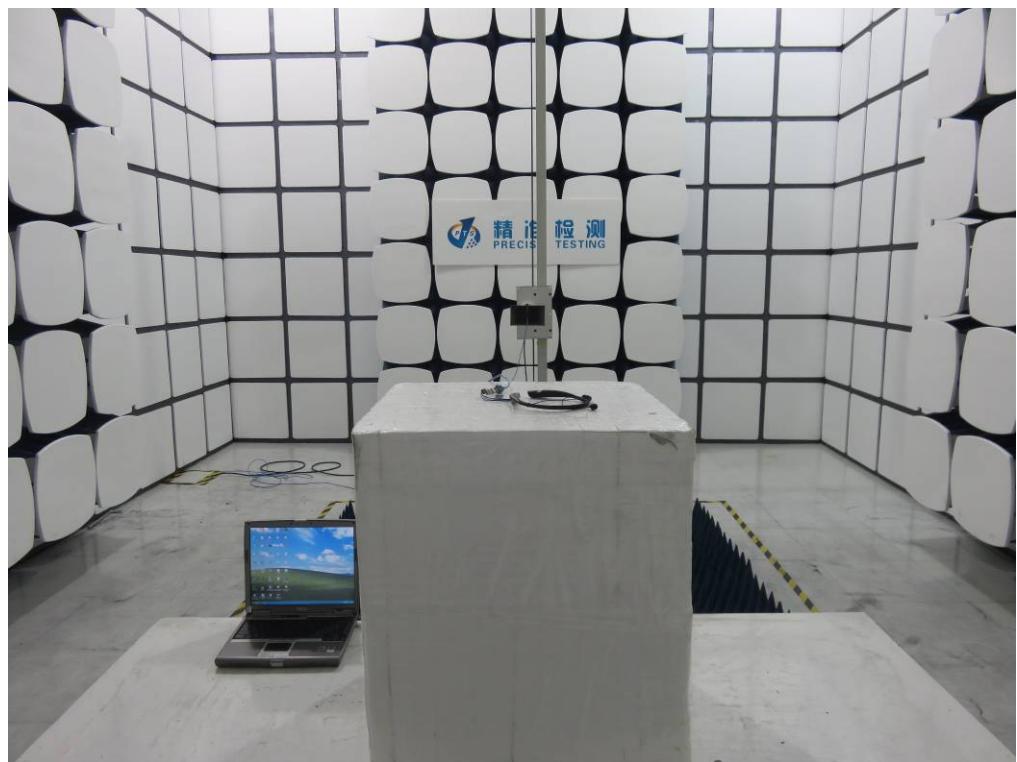

APPENDIX B: PHOTOGRAPHS OF EUT


TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT

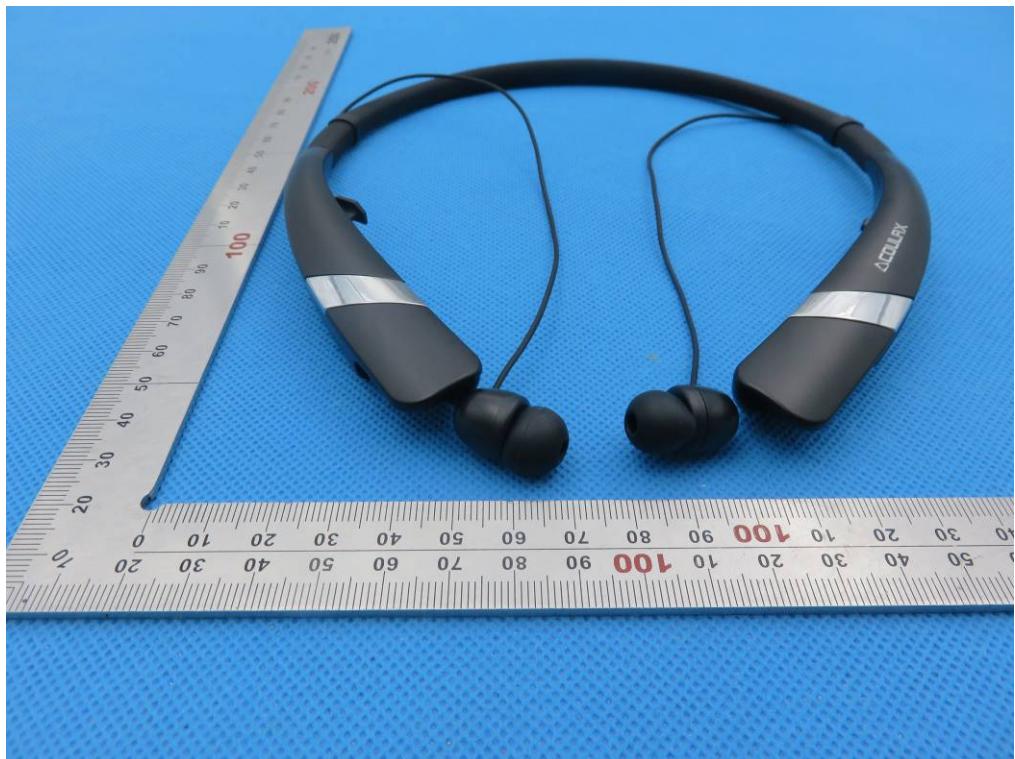

BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

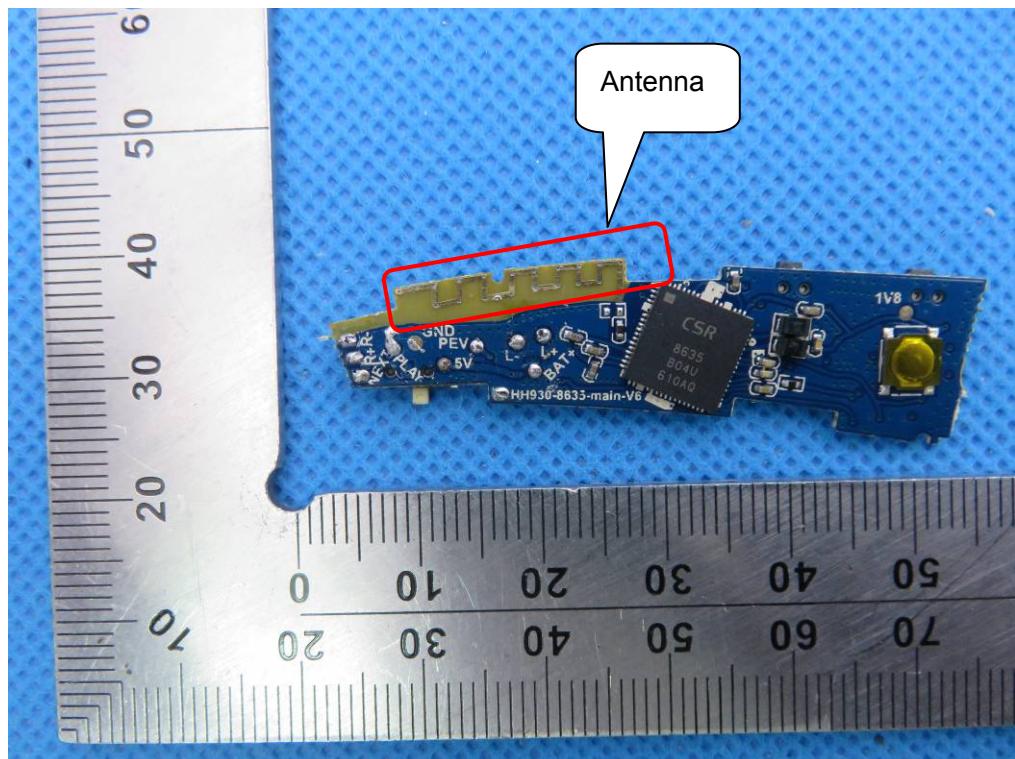


INTERNAL VIEW OF EUT-2

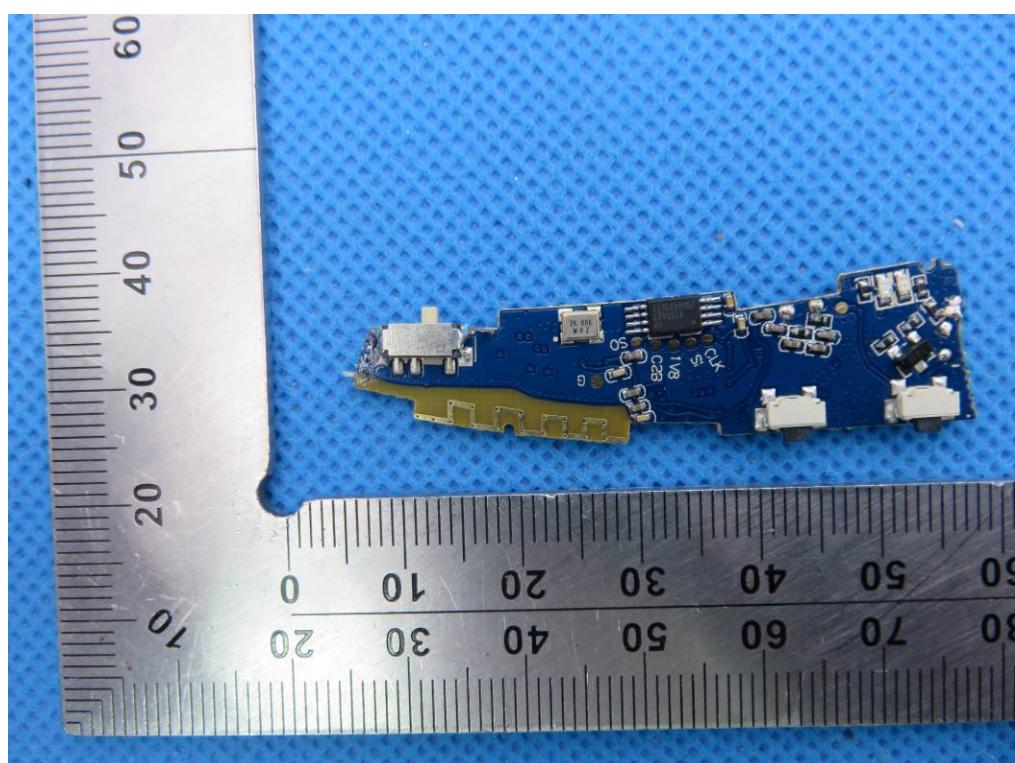


INTERNAL VIEW OF EUT-3

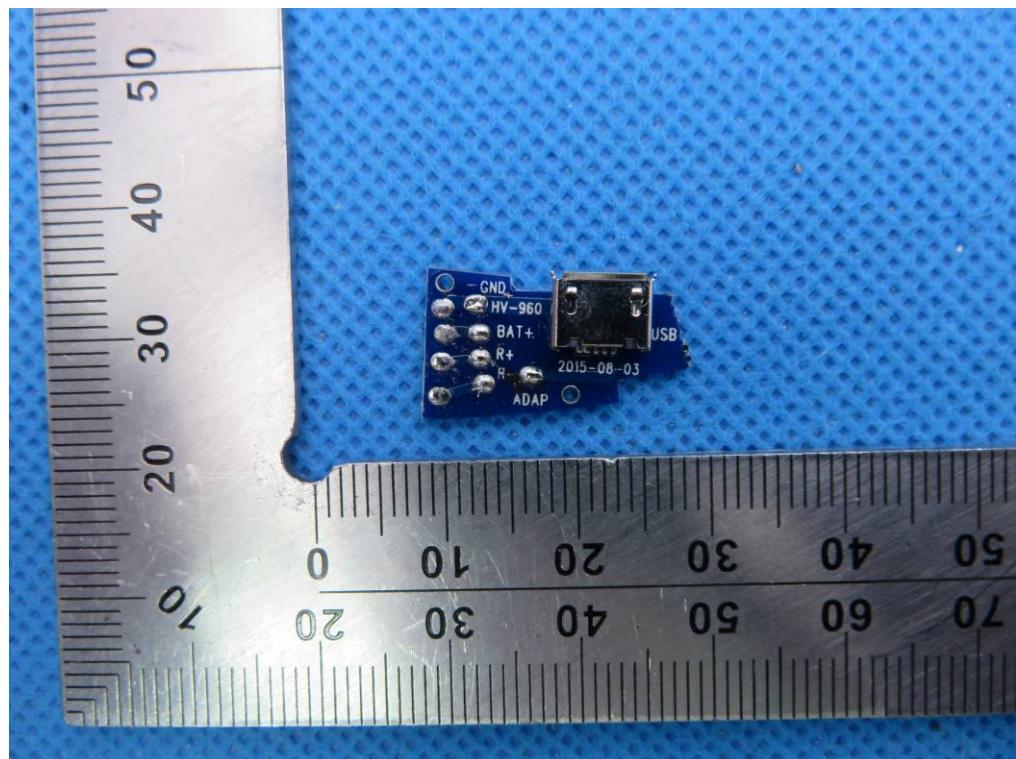

INTERNAL VIEW OF EUT-4

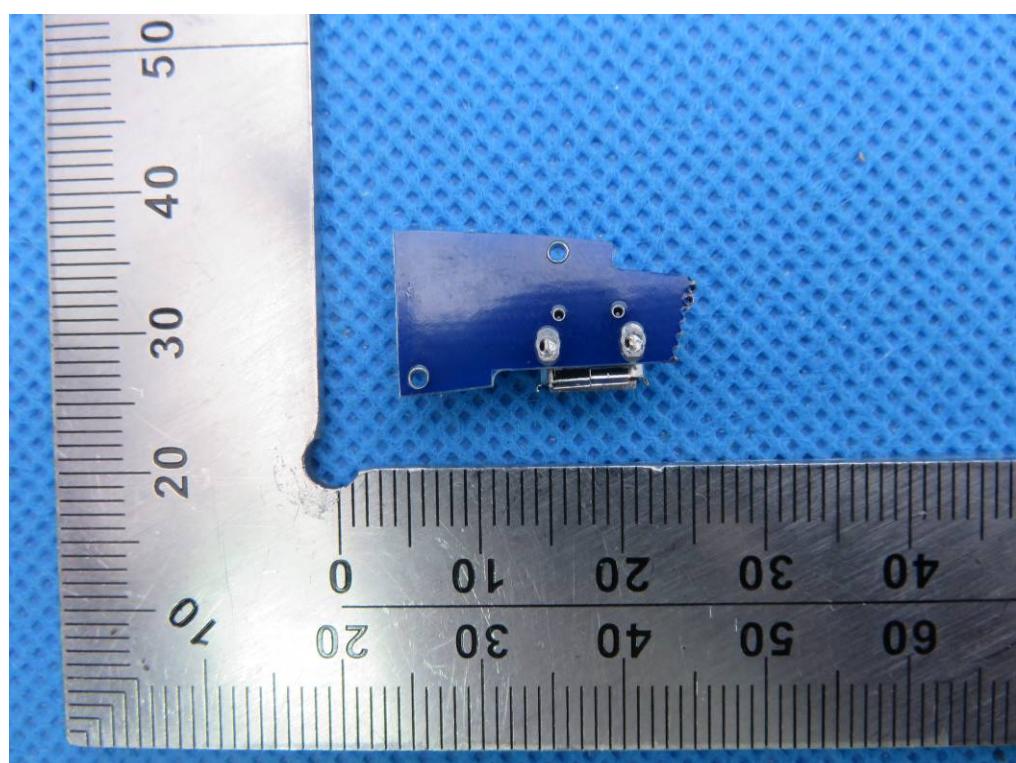

INTERNAL VIEW OF EUT-5

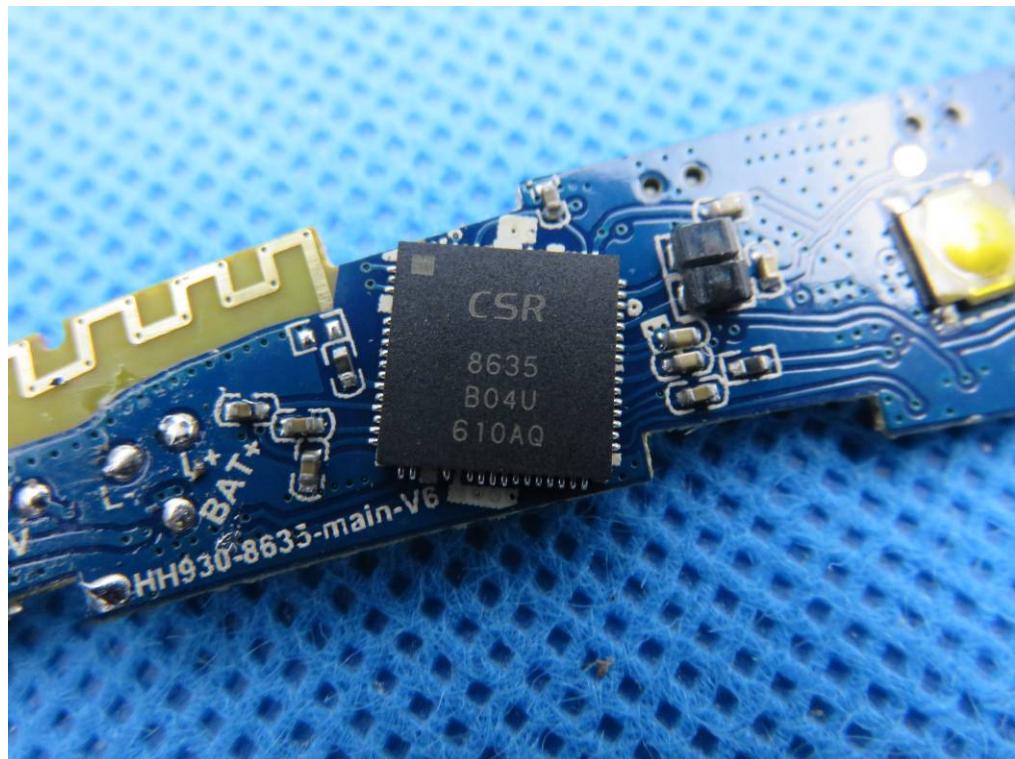

----END OF REPORT----