



# FCC Part 15C Test Report

## FCC ID: 2AI9BYMPR02

Product Name:	Wireless Blue Tooth Game PAD
Trademark:	N/A
Model Name :	YMP-R02-A, YMP-R02-B
Prepared For :	Shen zhen G.A.P Electronics Co.,LTD
Address :	D3 Tongfuyu Industrial Area Community of Shajing Town, Baoan, Shenzhen, China
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	Jul. 20–Aug. 04, 2016
Date of Report :	Aug. 05, 2016
Report No.:	BCTC-160709140E



## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Shen zhen G.A.P Electronics Co.,LTD

Address ..... : D3 Tongfuyu Industrial Area Community of Shajing Town, Baoan, Shenzhen, China

**Manufacture's Name** ..... : Shen zhen G.A.P Electronics Co.,LTD

Address ..... : D3 Tongfuyu Industrial Area Community of Shajing Town, Baoan, Shenzhen, China

### Product description

Product name ..... : Wireless Blue Tooth Game PAD

Model and/or type reference : YMP-R02-A, YMP-R02-B

**Standards** ..... : FCC Part15.249

Test procedure ..... : ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer : \_\_\_\_\_

Eric Yang

Reviewer  
(Supervisor) : \_\_\_\_\_

Approved &  
Authorized  
Signer(Manager): \_\_\_\_\_



**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1.1 TEST FACILITY</b>	6
<b>1.2 MEASUREMENT UNCERTAINTY</b>	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	7
<b>2.2 DESCRIPTION OF TEST MODES</b>	8
<b>2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	9
<b>2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	9
<b>2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	10
<b>3 . EMC EMISSION TEST</b>	<b>11</b>
<b>3.1 CONDUCTED EMISSION MEASUREMENT</b>	11
<b>3.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	11
<b>3.1.2 TEST PROCEDURE</b>	11
<b>3.1.3 DEVIATION FROM TEST STANDARD</b>	11
<b>3.1.4 TEST SETUP</b>	12
<b>3.1.5 EUT OPERATING CONDITIONS</b>	12
<b>3.1.6 TEST RESULTS</b>	12
<b>3.2 RADIATED EMISSION MEASUREMENT</b>	15
<b>3.2.1 RADIATED EMISSION LIMITS</b>	15
<b>3.2.2 TEST PROCEDURE</b>	16
<b>3.2.3 DEVIATION FROM TEST STANDARD</b>	16
<b>3.2.4 TEST SETUP</b>	16
<b>3.2.5 EUT OPERATING CONDITIONS</b>	17
<b>3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)</b>	18
<b>3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)</b>	19
<b>3.2.8 TEST RESULTS (1GHZ~25GHZ)</b>	21
<b>3.3 RADIATED BAND EMISSION MEASUREMENT</b>	22
<b>3.3.1 TEST REQUIREMENT:</b>	22
<b>3.3.2 TEST PROCEDURE</b>	22
<b>3.3.3 DEVIATION FROM TEST STANDARD</b>	23
<b>3.3.4 TEST SETUP</b>	23
<b>3.3.5 EUT OPERATING CONDITIONS</b>	23
<b>4 . BANDWIDTH TEST</b>	<b>25</b>

**Table of Contents**

	<b>Page</b>
<b>4.1 APPLIED PROCEDURES / LIMIT</b>	<b>25</b>
<b>4.1.1 TEST PROCEDURE</b>	<b>25</b>
<b>4.1.2 DEVIATION FROM STANDARD</b>	<b>25</b>
<b>4.1.3 TEST SETUP</b>	<b>25</b>
<b>4.1.4 EUT OPERATION CONDITIONS</b>	<b>25</b>
<b>4.1.5 TEST RESULTS</b>	<b>26</b>
<b>5 . ANTENNA REQUIREMENT</b>	<b>28</b>
<b>5.1 STANDARD REQUIREMENT</b>	<b>28</b>
<b>5.2 EUT ANTENNA</b>	<b>28</b>
<b>6 . TEST SEUUP PHOTO</b>	<b>29</b>
<b>7 . EUT PHOTO</b>	<b>31</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

<b>FCC Part15 (15.249) , Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.249	Radiated Spurious Emission	PASS	
15.249	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1)" N/A" denotes test is not applicable in this Test Report



## 1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add. : No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registered No.: 187086

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  , providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Blue Tooth Game PAD												
Trade Name	N/A												
Model Name	YMP-R02-A, YMP-R02-B												
Model Difference	N/A												
Product Description	<p>The EUT is a Wireless Blue Tooth Game PAD</p> <table border="1"><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Bit Rate of Transmitter</td><td>2Mbps</td></tr><tr><td>Number Of Channel</td><td>40 CH</td></tr><tr><td>Antenna type:</td><td>PCB antenna</td></tr><tr><td>Antenna Gain (dBi)</td><td>0.9dBi</td></tr></table>	Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Bit Rate of Transmitter	2Mbps	Number Of Channel	40 CH	Antenna type:	PCB antenna	Antenna Gain (dBi)	0.9dBi
Operation Frequency:	2402~2480 MHz												
Modulation Type:	GFSK												
Bit Rate of Transmitter	2Mbps												
Number Of Channel	40 CH												
Antenna type:	PCB antenna												
Antenna Gain (dBi)	0.9dBi												
	<p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>												
Channel List	Please refer to the Note 2.												
Power	DC 3.7V DC 5V from USB												
hardware version	--												
Software version	--												
Serial number	--												
Connecting I/O Port(s)	Please refer to the User's Manual												

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	20	2440		
02	2404	21	2442		
~	~	~	~		
9	2418	39	2478		
10	2420	40	2480		



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH20
Mode 3	CH40
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH20
Mode 3	CH40


Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported



## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission Test



Conducted Emission Test



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Blue Tooth Game PAD	N/A	YMP-R02-A,	N/A	EUT
E-2	Adapter (Provide by test lab)	N/A	NBS05B050120VUU		I/P:AC 100~240V 50/60Hz O/P: DC 5V/0.5A

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	0.5m	Mini USB cable

Note:

(1) For detachable type I/O cable should be specified the length in cm in «Length» column.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	2015.08.25	2016.08.24
2	Test Receiver	R&S	ESPI	101396	2015.08.25	2016.08.24
3	Bilog Antenna	SCHWARZBECK	VULB9160	VULB9160-3369	2015.08.25	2016.08.24
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.07.06	2017.07.05
5	Spectrum Analyzer	Agilent	N9020A	MY5051041	2016.07.06	2017.07.05
6	Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2015.08.25	2016.08.24
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05
8	Amplifier	SCHWARZBECK	BBV9718	9718-270	2015.08.25	2016.08.24
9	Amplifier	SCHWARZBECK	BBV9743	9743-119	2015.08.25	2016.08.24
10	Loop Antenna	ARA	PLV1.0	1029	2016.07.06	2017.07.05
11	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05
12	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05
13	RF cables	R&S	N/A	N/A	2016.07.06	2017.07.05

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2015.08.25	2016.08.24
2	LISN	R&S	NSLK8126	8126466	2015.08.24	2016.08.23
3	LISN	R&S	NSLK8126	8126487	2015.08.24	2016.08.23
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.08.25	2016.08.24
5	RF cables	R&S	R204	R20X	2015.08.25	2016.08.24



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

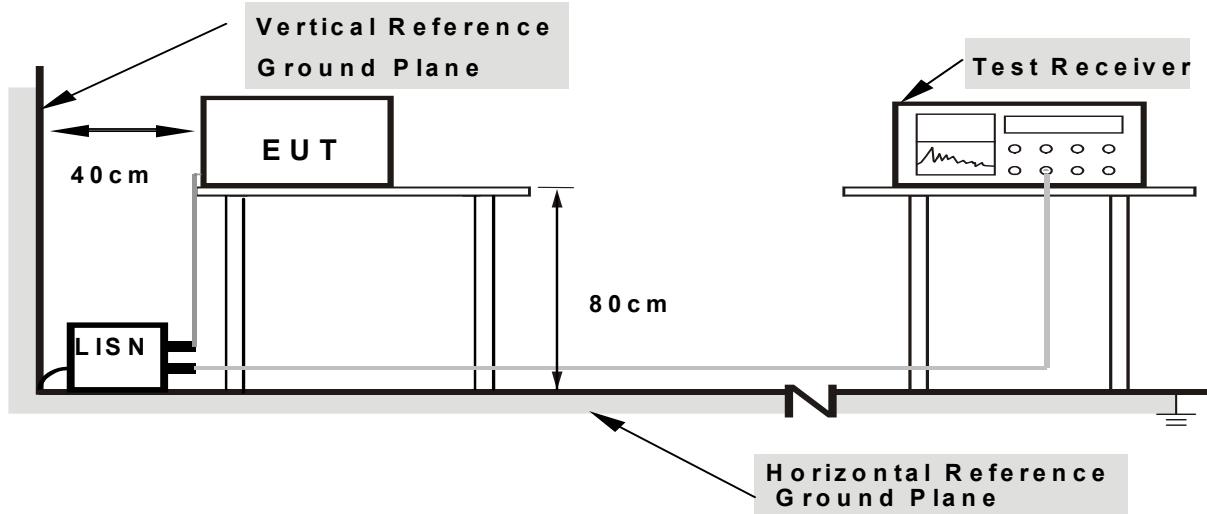

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.1.6 TEST RESULTS



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

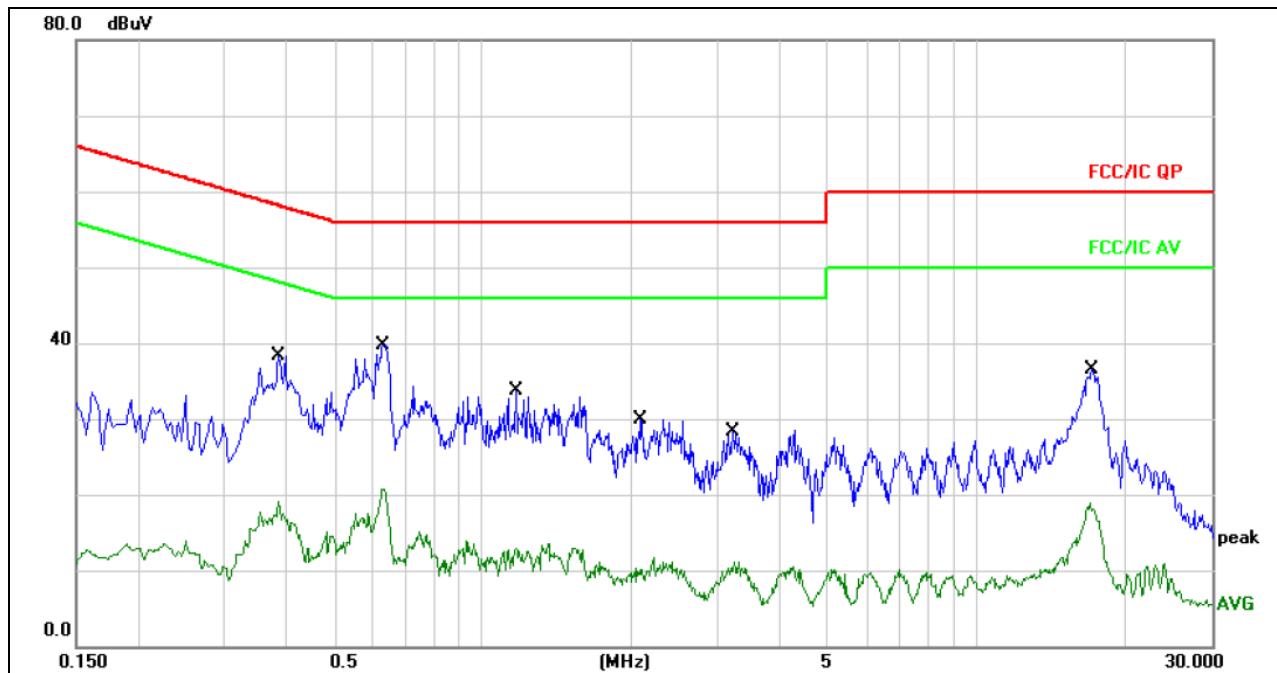
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.3860	28.21	10.10	38.31	58.15	-19.84	QP	
2		0.3860	8.90	10.10	19.00	48.15	-29.15	AVG	
3	*	0.6260	29.63	10.13	39.76	56.00	-16.24	QP	
4		0.6260	10.57	10.13	20.70	46.00	-25.30	AVG	
5		1.1660	23.62	10.17	33.79	56.00	-22.21	QP	
6		1.1660	3.36	10.17	13.53	46.00	-32.47	AVG	
7		2.0900	19.75	10.18	29.93	56.00	-26.07	QP	
8		2.0900	1.56	10.18	11.74	46.00	-34.26	AVG	
9		3.2220	18.13	10.18	28.31	56.00	-27.69	QP	
10		3.2220	0.99	10.18	11.17	46.00	-34.83	AVG	
11		16.9900	26.29	10.16	36.45	60.00	-23.55	QP	
12		16.9900	8.73	10.16	18.89	50.00	-31.11	AVG	



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 4

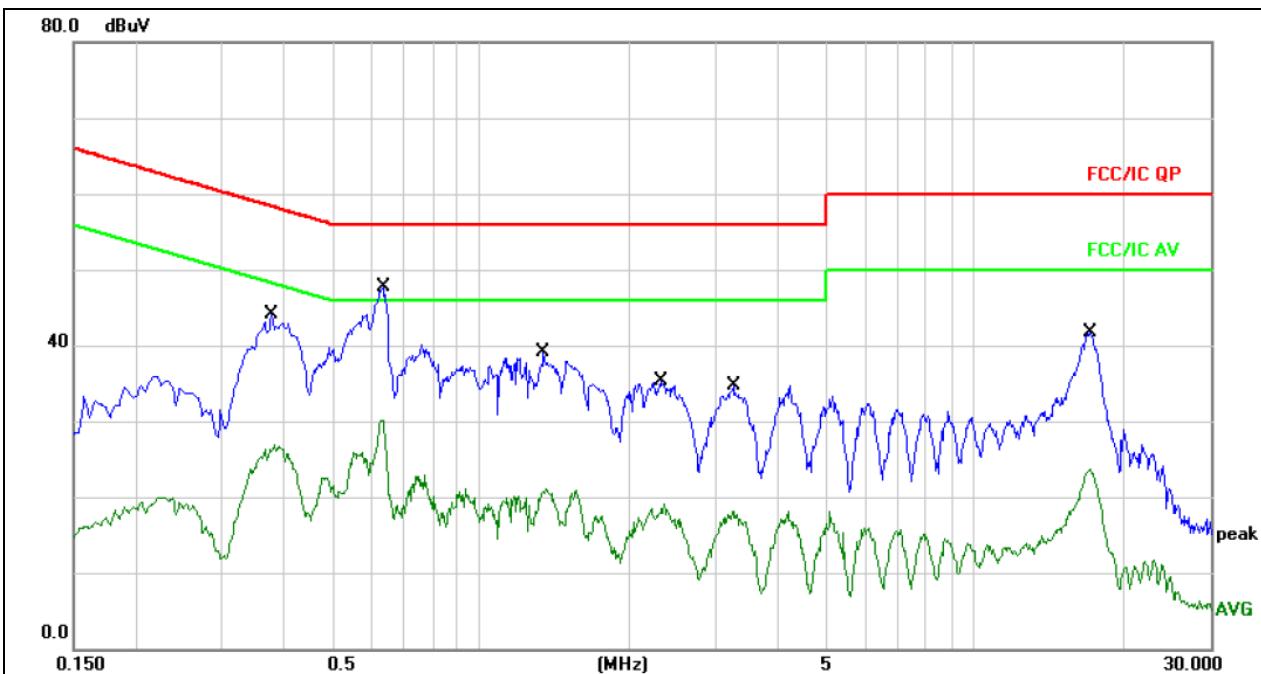**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.3780	34.01	10.10	44.11	58.32	-14.21	QP	
2		0.3780	16.88	10.10	26.98	48.32	-21.34	AVG	
3	*	0.6340	37.67	10.13	47.80	56.00	-8.20	QP	
4		0.6340	20.03	10.13	30.16	46.00	-15.84	AVG	
5		1.3380	28.88	10.17	39.05	56.00	-16.95	QP	
6		1.3380	10.86	10.17	21.03	46.00	-24.97	AVG	
7		2.3140	25.15	10.18	35.33	56.00	-20.67	QP	
8		2.3140	8.94	10.18	19.12	46.00	-26.88	AVG	
9		3.2340	24.55	10.18	34.73	56.00	-21.27	QP	
10		3.2340	7.92	10.18	18.10	46.00	-27.90	AVG	
11		17.1980	31.57	10.16	41.73	60.00	-18.27	QP	
12		17.1980	13.55	10.16	23.71	50.00	-26.29	AVG	



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

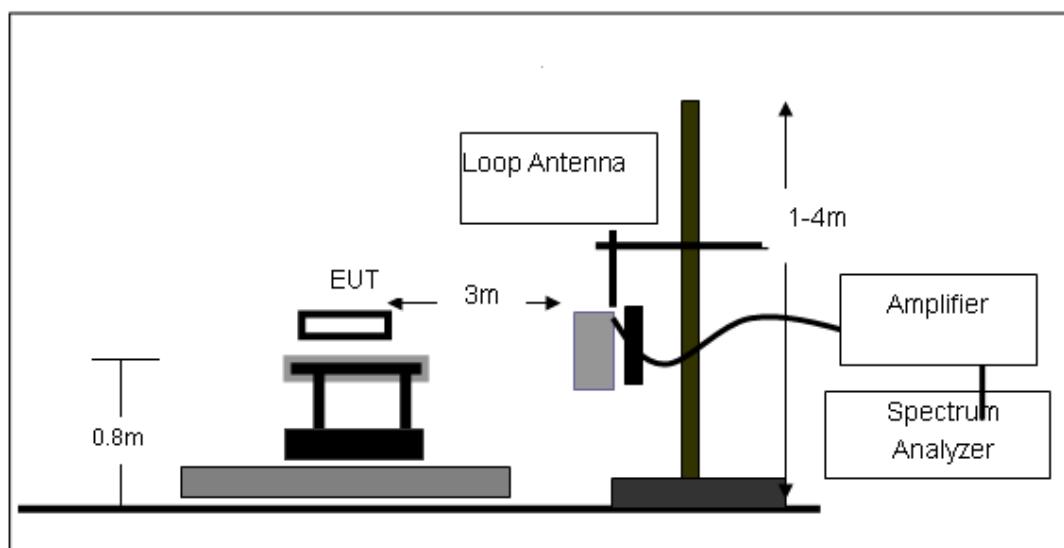

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

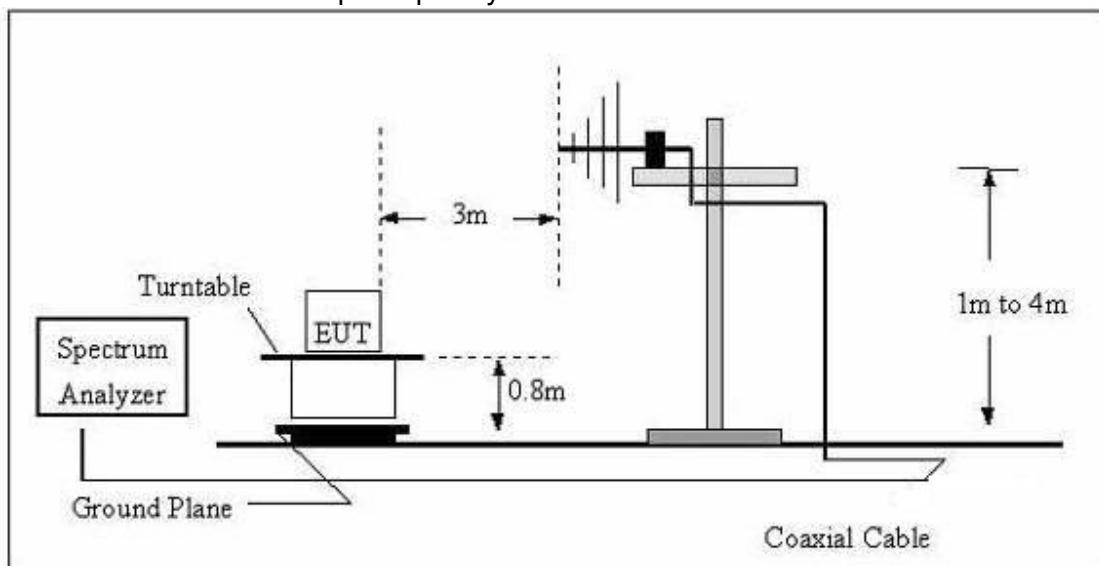

(C) Radiated Emission Test-Up Frequency Above 1GHz

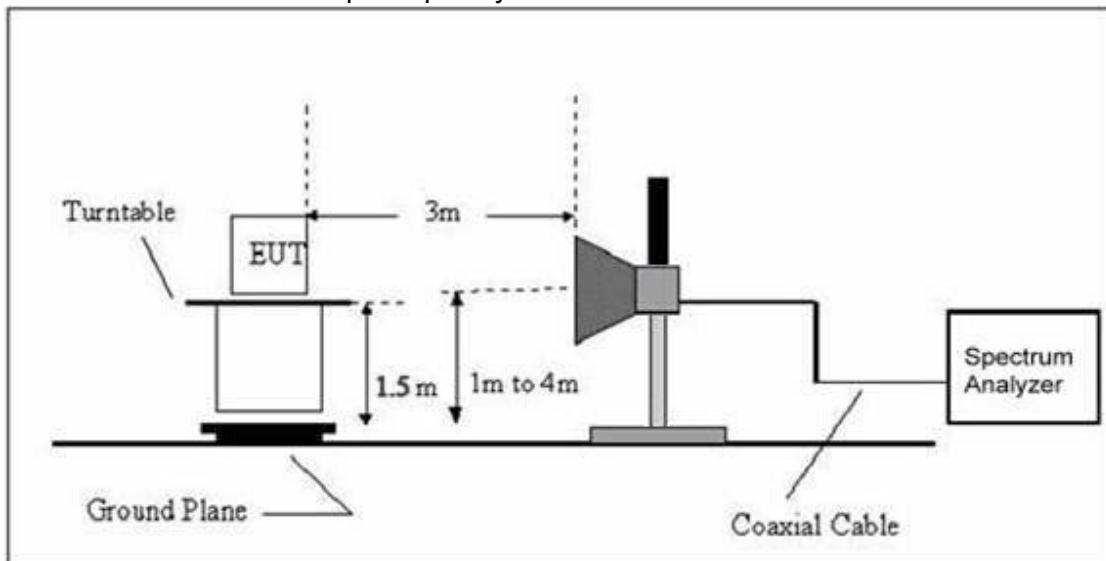

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);  
Limit line = specific limits(dBuV) + distance extrapolation factor.



### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)


Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4		

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Comment
			Level	Factor	ment			Height	Degree	
1	!	101.2885	54.36	-16.36	38.00	43.50	-5.50	QP		
2	*	189.0743	57.50	-15.46	42.04	43.50	-1.46	QP		
3	!	242.5253	58.05	-14.41	43.64	46.00	-2.36	QP		
4		302.4812	50.16	-12.52	37.64	46.00	-8.36	QP		
5		510.0436	39.97	-8.02	31.95	46.00	-14.05	QP		
6		647.3856	37.67	-5.12	32.55	46.00	-13.45	QP		

**Remark:**

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All interfaces was connected, and BT TX mode was link.

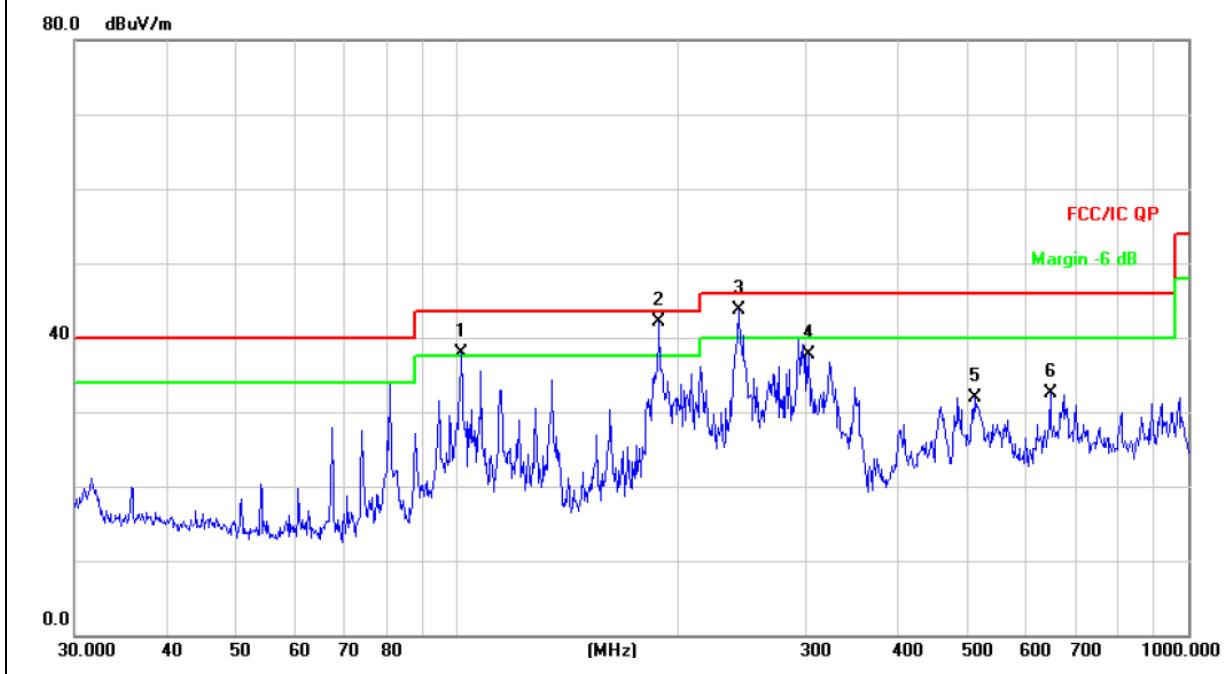




Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4		

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
			Level	Factor	ment					
1		60.4919	32.15	-11.61	20.54	40.00	-19.46	QP		
2		80.9275	50.38	-18.10	32.28	40.00	-7.72	QP		
3	!	135.0319	54.15	-13.74	40.41	43.50	-3.09	QP		
4	*	189.0743	56.74	-15.46	41.28	43.50	-2.22	QP		
5		242.5253	50.19	-14.41	35.78	46.00	-10.22	QP		
6		299.3158	38.01	-12.60	25.41	46.00	-20.59	QP		

## Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All interfaces was connected, and BT TX mode was link.

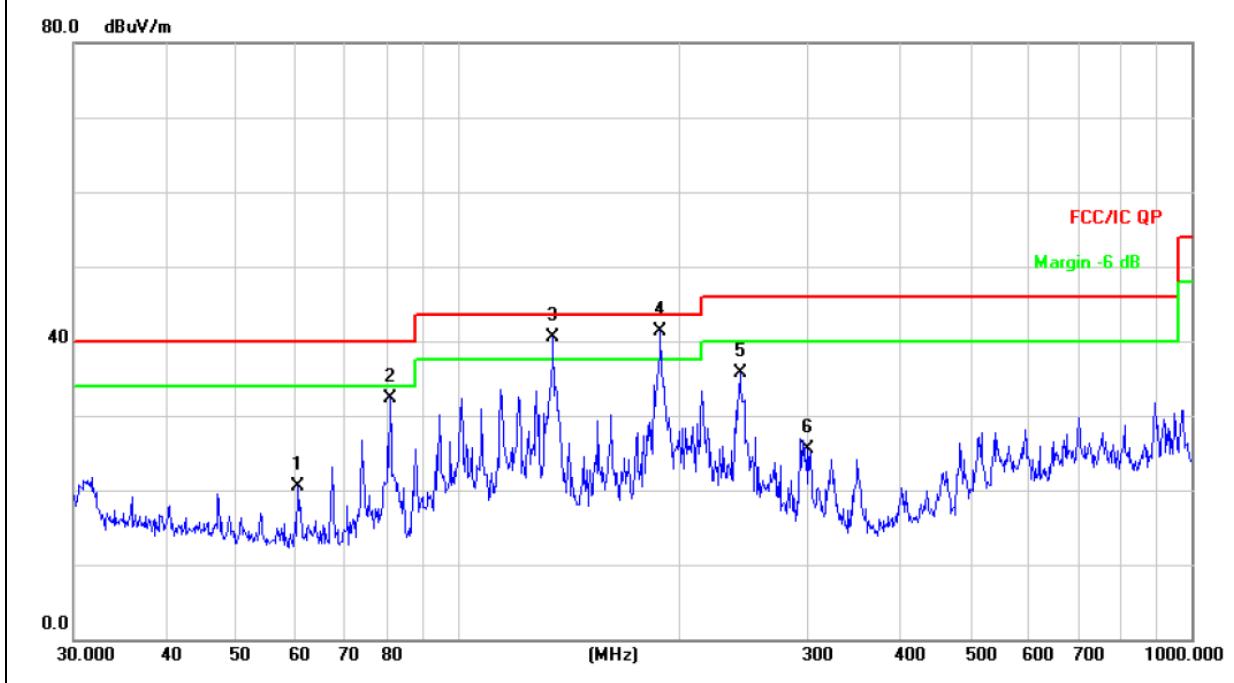



### 3.2.8 TEST RESULTS (1GHZ~25GHZ)

Polar (H/V)	Frequency (MHz)	Meter Reading	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
		(dBuV)		(dB)			
<b>operation frequency:2402</b>							
V	2402.00	87.87	13.85	101.72	114.00	-12.28	PK
V	2402.00	72.63	13.85	86.48	94.00	-7.52	AV
V	4804.00	39.28	19.34	58.62	74.00	-15.38	PK
V	4804.00	25.67	19.34	45.01	54.00	-8.99	AV
V	16128.00	29.86	21.89	51.75	74.00	-22.25	PK
H	2402.00	87.84	13.85	101.69	114.00	-12.31	PK
H	2402.00	73.24	13.85	87.09	94.00	-6.91	AV
H	4804.00	40.10	19.34	59.44	74.00	-14.56	PK
H	4804.00	25.56	19.34	44.90	54.00	-9.10	AV
H	16128.00	29.61	21.89	51.50	74.00	-22.50	PK
<b>operation frequency:2441</b>							
V	2441.00	88.38	13.94	102.32	114.00	-11.68	PK
V	2441.00	72.77	13.94	86.71	94.00	-7.29	AV
V	4882.00	40.20	19.42	59.62	74.00	-14.38	PK
V	4882.00	25.71	19.42	45.13	54.00	-8.87	AV
V	16128.00	28.12	21.89	50.01	74.00	-23.99	PK
H	2441.00	88.40	13.94	102.34	114.00	-11.66	PK
H	2441.00	73.64	13.94	87.58	94.00	-6.42	AV
H	4882.00	41.26	19.42	60.68	74.00	-13.32	PK
H	4882.00	26.43	19.42	45.85	54.00	-8.15	AV
H	16128.00	29.78	21.89	51.67	74.00	-22.33	PK
<b>operation frequency:2480</b>							
V	2480.00	88.43	14.02	102.45	114.00	-11.55	PK
V	2480.00	72.87	14.02	86.89	94.00	-7.11	AV
V	4960.00	41.00	19.51	60.51	74.00	-13.49	PK
V	4960.00	25.98	19.51	45.49	54.00	-8.51	AV
V	16128.00	29.99	21.89	51.88	74.00	-22.12	PK
H	2480.00	88.46	14.02	102.48	114.00	-11.52	PK
H	2480.00	72.72	14.02	86.74	94.00	-7.26	AV
H	4960.00	41.22	19.51	60.73	74.00	-13.27	PK
H	4960.00	26.01	19.51	45.52	54.00	-8.48	AV
H	16128.00	30.31	21.89	52.20	74.00	-21.80	PK
<b>Remark:</b>							
1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit							
2. If peak below the average limit, the average emission was no test.							
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.							



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

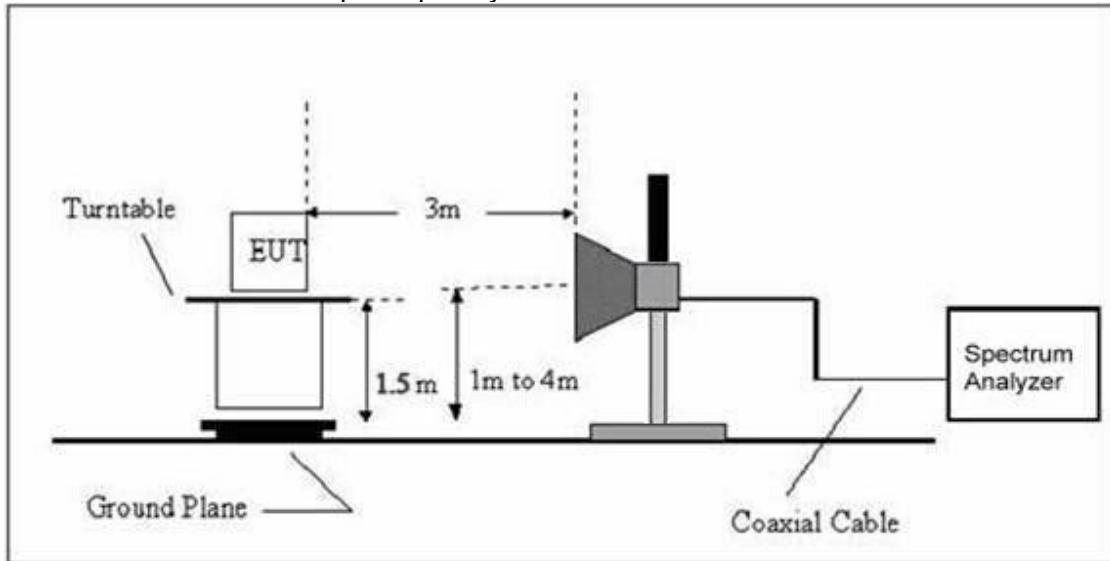

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.3.6 TEST RESULT

Polar (H/V)	Frequency (MHz)	Meter Reading	Factor (dB)	Emission Level	Limits (dBuV/m)	Margin (dB)	Detector Type
		(dBuV)		(dBuV/m)			
<b>operation frequency:2402</b>							
V	2390.00	38.05	13.83	51.88	74.00	-22.12	PK
V	2390.00	26.43	13.83	40.26	54.00	-13.74	AV
V	2400.00	38.26	13.85	52.11	74.00	-21.89	PK
V	2400.00	25.99	13.85	39.84	54.00	-14.16	AV
H	2390.00	38.35	13.83	52.18	74.00	-21.82	PK
H	2390.00	26.46	13.83	40.29	54.00	-13.71	AV
H	2400.00	38.21	13.85	52.06	74.00	-21.94	PK
H	2400.00	26.40	13.85	40.25	54.00	-13.75	AV

Polar (H/V)	Frequency (MHz)	Meter Reading	Factor (dB)	Emission Level	Limits (dBuV/m)	Margin (dB)	Detector Type
		(dBuV)		(dBuV/m)			
<b>operation frequency:2480</b>							
V	2483.50	38.26	14.02	52.28	74.00	-21.72	PK
V	2483.50	26.68	14.02	40.70	54.00	-13.30	AV
V	2500.00	38.20	14.06	52.26	74.00	-21.74	PK
V	2500.00	26.10	14.06	40.16	54.00	-13.84	AV
H	2483.50	38.39	14.02	52.41	74.00	-21.59	PK
H	2483.50	26.72	14.02	40.74	54.00	-13.26	AV
H	2500.00	38.00	14.06	52.06	74.00	-21.94	PK
H	2500.00	26.98	14.06	41.04	54.00	-12.96	AV

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 4. BANDWIDTH TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C	
Section	Test Item
15.249	Bandwidth


#### 4.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP

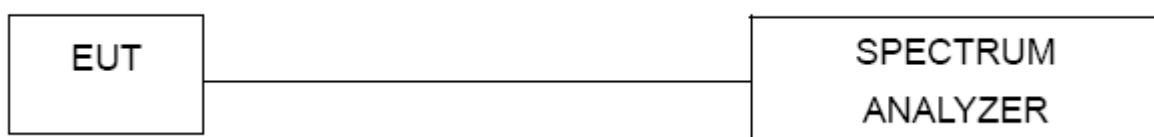

#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




#### 4.1.5 TEST RESULTS

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH01, CH20, CH40		

Channel	Frequency (MHz)	20dB bandwidth (MHz)
Low	2402	1.171
Middle	2440	1.172
High	2480	1.182

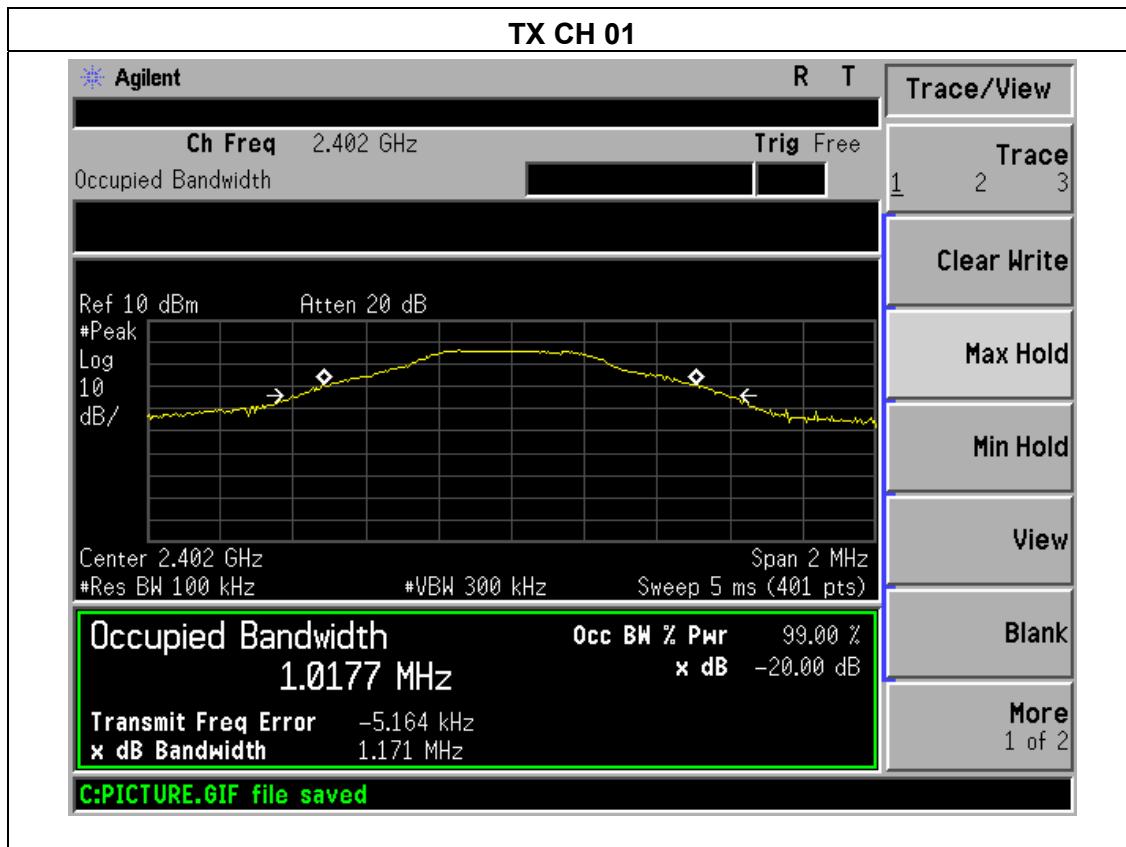

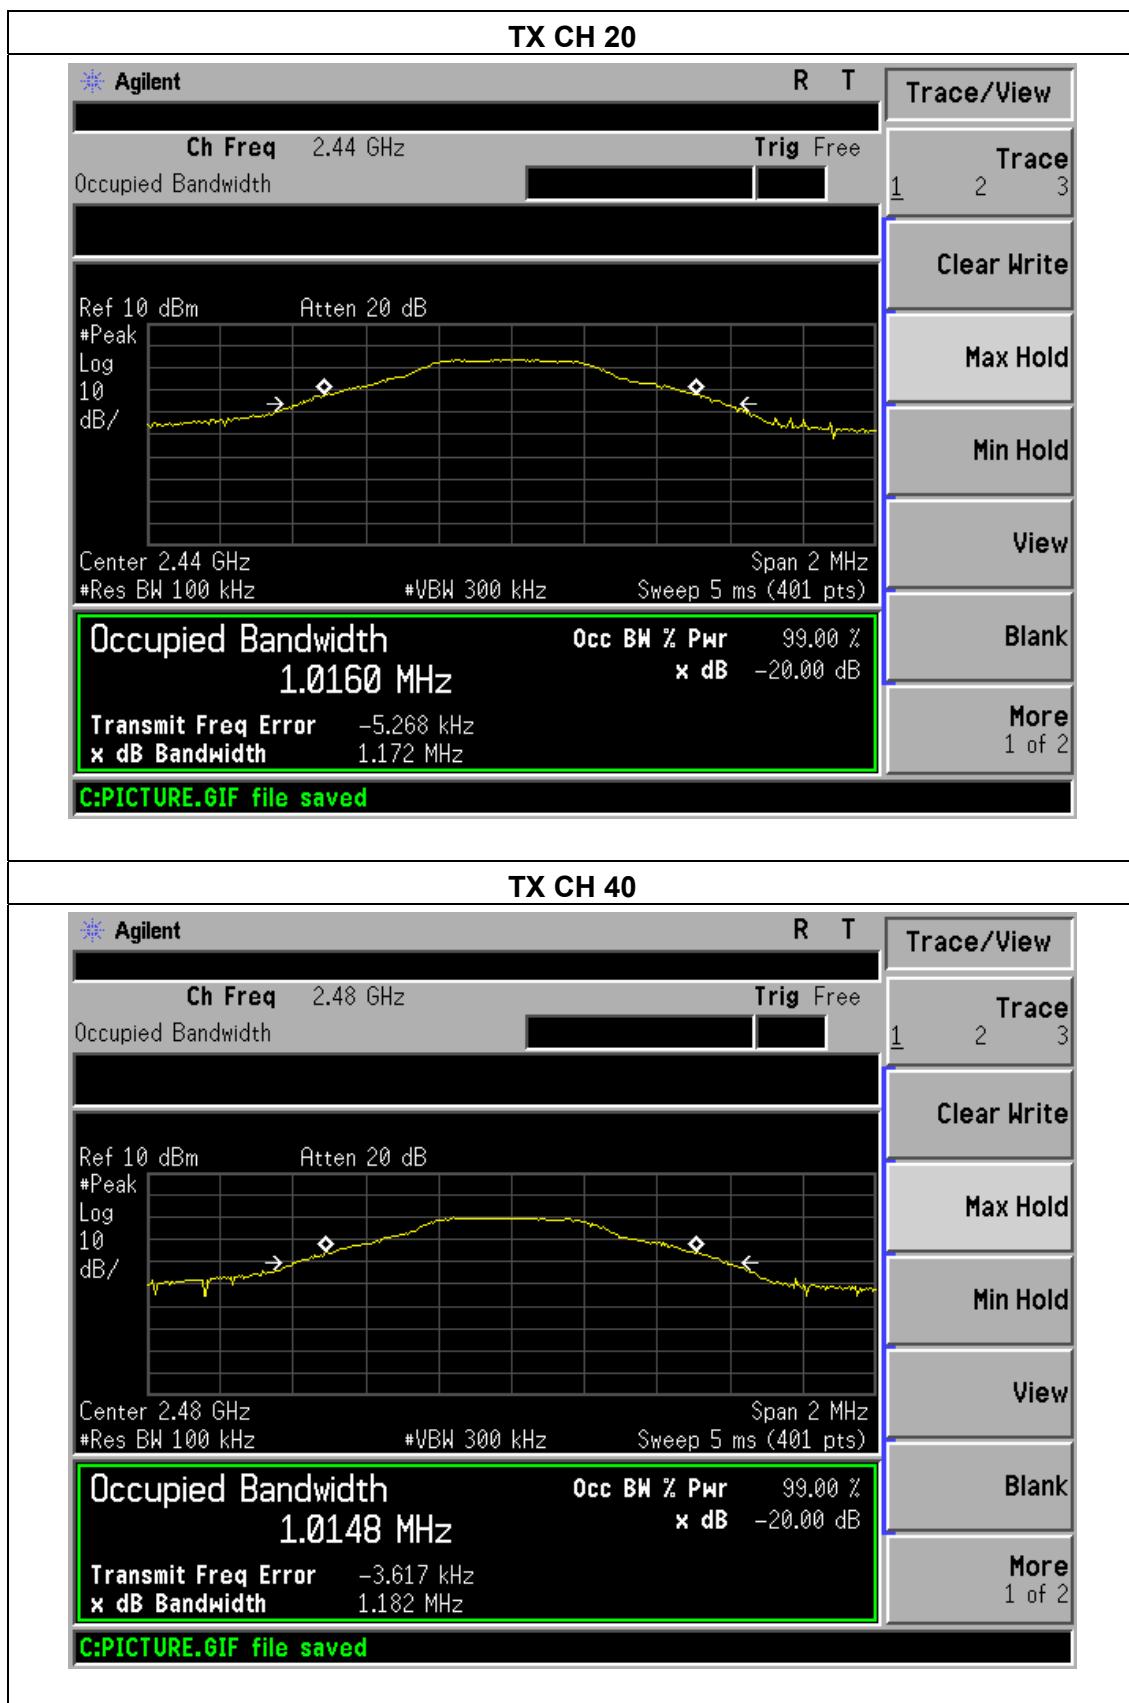



## 5. ANTENNA REQUIREMENT

### 5.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 5.2 EUT ANTENNA

The EUT antenna is interna antenna,. It comply with the standard requirement.

## 6. TEST SEUUP PHOTO

Radiated Emission

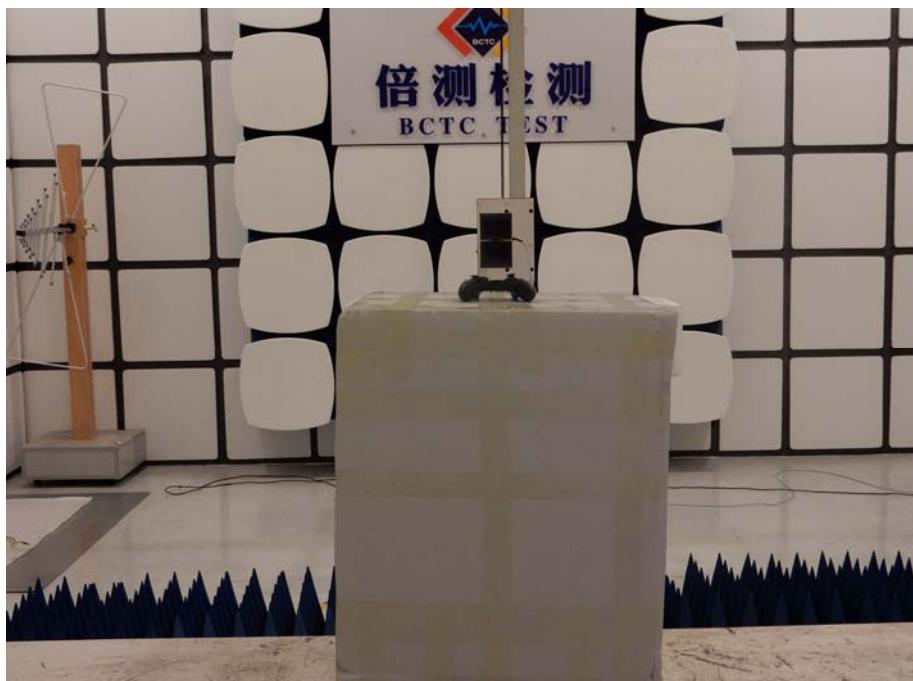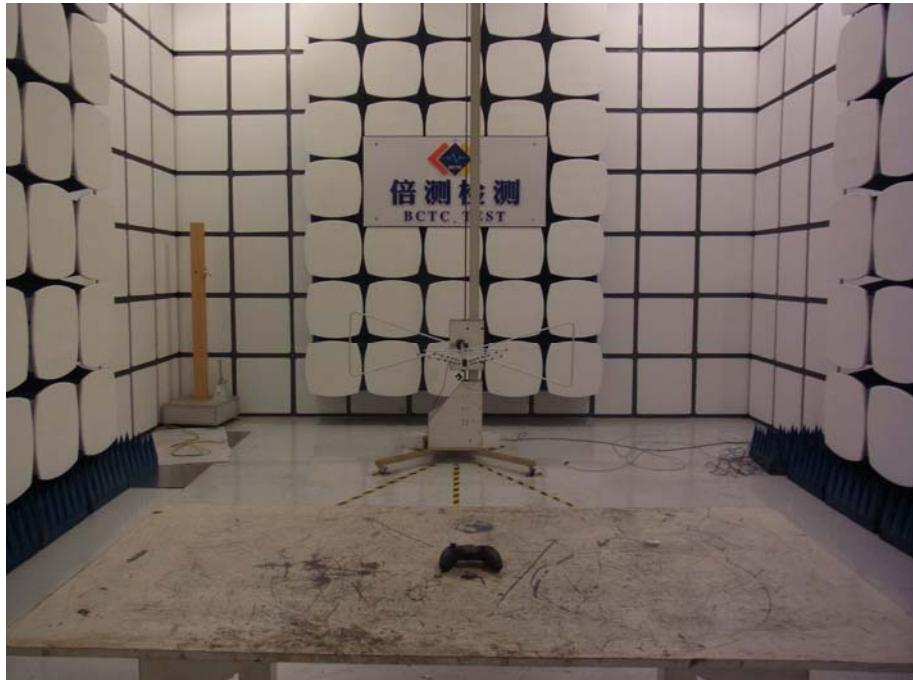



Conducted Emission



## 7. EUT PHOTO





\*\*\*\*\* END OF REPORT \*\*\*\*\*