

TEST REPORT

Reference No...... : WTU20S04016795W003 V1
FCC ID : 2AIIH-OQB2020
Applicant..... : Optiqo Sweden AB
Address..... : Roxviksgatan 8A, 58273 Linköping, Sweden
Manufacturer : Magnificent Cleaning Equipment Co., Ltd.
Address..... : 369 Pujin Raod, Linhu Town, Wuzhong District, Suzhou 215105, China
Product..... : Optiqo - Qlvr Box
Model(s) : OQB2020
Brand Name..... : N/A
Standards..... : FCC CFR47 Part 22 Subpart H: 2018
: FCC CFR47 Part 24 Subpart E: 2018
Date of Receipt sample : 2020-04-07
Date of Test : 2020-04-14 to 2020-06-14
Date of Issue..... : 2020-06-16
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:

Ford Wang / Project Engineer

Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 TEST MODE	6
4.4 TEST FACILITY.....	6
5 TEST SUMMARY	7
6 EQUIPMENT USED DURING TEST	8
6.1 EQUIPMENTS LIST	8
6.2 MEASUREMENT UNCERTAINTY	9
6.3 TEST EQUIPMENT CALIBRATION	9
7 RF OUTPUT POWER	10
7.1 EUT OPERATION.....	10
7.2 TEST PROCEDURE	10
7.3 TEST RESULT	11
8 PEAK-TO-AVERAGE RATIO.....	14
8.1 EUT OPERATION.....	14
8.2 TEST PROCEDURE	14
8.3 TEST RESULT	15
9 BANDWIDTH.....	17
9.1 EUT OPERATION.....	17
9.2 TEST PROCEDURE	17
9.3 TEST RESULT	18
10 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	21
10.1 EUT OPERATION.....	21
10.2 TEST PROCEDURE.....	21
10.3 TEST RESULT	22
11 SPURIOUS RADIATED EMISSIONS.....	26
11.1 EUT OPERATION.....	26
11.2 TEST SETUP	26
11.3 SPECTRUM ANALYZER SETUP	27
11.4 TEST PROCEDURE.....	28
11.5 SUMMARY OF TEST RESULTS	29
12 BAND EDGE MEASUREMENT	31
12.1 EUT OPERATION.....	31
12.2 TEST PROCEDURE.....	31
12.3 TEST RESULT	32
13 FREQUENCY STABILITY.....	36
13.1 EUT OPERATION.....	36
13.2 TEST PROCEDURE.....	36
13.3 TEST RESULT	37

14 RF EXPOSURE..... 39

15 PHOTOGRAPHS OF TEST SETUP AND EUT..... 40

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTU20S04016 795W003	2020-04-07	2020-04-14 to 2020-06-14	2020-06-15	original	-	Replaced
WTU20S04016 795W003 V1	2020-04-07	2020-04-14 to 2020-06-14	2020-06-16	Version 1	Updated	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Optiqo - Qlvr Box
Model(s):	OQB2020
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
NFC:	Support
Hardware Version:	OPTIQO V3
Software Version:	OPTIQO20200402
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage
Note:	N/A

4.2 Details of E.U.T.

Operation Frequency:	NFC: 13.56MHz GPRS/EDGE 850: 824~849MHz GPRS/EDGE 1900: 1850~1910MHz
Max. RF output power:	GSM 850: 32.83dBm PCS1900: 29.42dBm
Type of Modulation:	GPRS: GMSK EDGE: GMSK, 8PSK
Antenna installation:	GSM: internal permanent antenna
Antenna Gain:	GSM 850: 0dBi PCS1900: 0dBi
Ratings:	Battery DC 9V
Type of Emission:	GPRS850: 252KGXW, EGPRS850: 242KG7W GPRS1900: 246KGXW, EGPRS1900: 251KG7W

4.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Support Band	Test Mode	Channel Frequency	Channel Number
GSM 850	GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
Remark: All mode(s) were tested and the worst data was recorded.			

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Test Summary

Test Items	Test Requirement	Result
RF Output Power	2.1046 22.913 (a) 24.232 (c)	PASS
Peak-to-Average Ratio	24.232 (d)	PASS
Bandwidth	2.1049 22.905 22.917 24.238	PASS
Spurious Emissions at Antenna Terminal	2.1051 22.917 (a) 24.238 (a)	PASS
Field Strength of Spurious Radiation	2.1053 22.917 (a) 24.238 (a)	PASS
Out of band emission, Band Edge	22.917 (a) 24.238 (a)	PASS
Frequency Stability	2.1055 22.355 24.235	PASS
Maximum Permissible Exposure (SAR)	1.1307 2.1093	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2019-09-12	2020-09-11
2.	LISN	R&S	ENV216	101215	2019-09-12	2020-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2019-09-12	2020-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2019-09-12	2020-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2019-09-12	2020-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2019-09-12	2020-09-11
4.	Cable	LARGE	RF300	-	2019-09-12	2020-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2019-04-19	2020-04-18
					2020-04-29	2021-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2020-04-09	2021-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-04-09	2021-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-09-12	2020-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-09	2021-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-04-09	2021-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-04-13	2021-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2020-04-13	2021-04-12
9	Universal Radio Communication Tester	R&S	CMU 200	112461	2020-04-09	2021-04-08
10	Signal Generator	R&S	SMR20	100046	2019-09-12	2020-09-11
11	Smart Antenna	SCHWARZBECK	HA08	-	2020-04-09	2021-04-08
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration	Calibration Due Date

					Date	
1	Test Receiver	R&S	ESCI	101296	2020-04-13	2021-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-09	2021-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2020-04-13	2021-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2020-04-13	2021-04-12
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2019-09-12	2020-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2019-09-12	2020-09-11
3.	Universal Radio Communication Tester	R&S	CMU 200	112461	2019-09-12	2020-09-11
4	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2019-09-12	2020-09-11

6.2 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 RF OUTPUT POWER

Test Requirement:	FCC Part 2.1046, 22.913 (a), 24.232 (c) , KDB 971168 D01
Test Method:	ANSI/TIA-603-E:2016 ANSI C63.26:2015
Test Mode:	TX transmitting

7.1 EUT Operation


Operating Environment :

Temperature:	22.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.2kPa

7.2 Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



Radiated method:

1. The setup of EUT is according with per TIA/EIA Standard 603D.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

7.3 Test Result

Conducted Power						
GSM - Burst Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GPRS (1 slot)	32.78	32.79	32.83	29.42	29.39	29.32
GPRS (2 slots)	31.25	31.20	31.26	28.56	28.23	28.15
GPRS (3 slots)	30.02	30.11	29.85	27.15	27.10	27.23
GPRS (4 slots)	29.11	29.25	29.15	26.22	26.10	25.94
EGPRS (1 slot)	26.19	26.09	25.93	25.99	25.67	25.81
EGPRS (2 slots)	25.22	25.04	25.26	25.30	25.14	25.10
EGPRS (3 slots)	24.26	24.30	24.25	24.11	24.25	24.12
EGPRS (4 slots)	23.56	23.20	23.40	23.25	23.02	23.14

Radiated Power

ERP and EIRP

Cellular Band 850 (Part 22H)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 22H	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 850 Channel 128										
824.20	99.32	256	1.1	H	32.29	0.20	0.00	32.09	38.45	-6.36
824.20	98.98	351	1.6	V	31.88	0.20	0.00	31.68	38.45	-6.77
GPRS 850 Channel 190										
836.60	98.87	49	1.3	H	31.84	0.20	0.00	31.64	38.45	-6.81
836.60	99.25	16	2.3	V	32.15	0.20	0.00	31.95	38.45	-6.50
GPRS 850 Channel 251										
848.80	99.28	63	1.5	H	32.25	0.20	0.00	32.05	38.45	-6.40
848.80	99.30	297	1.5	V	32.20	0.20	0.00	32.00	38.45	-6.45
EGPRS 850 Channel 128										
824.20	99.30	56	1.2	H	32.27	0.20	0.00	32.07	38.45	-6.38
824.20	99.14	294	2.0	V	32.04	0.20	0.00	31.84	38.45	-6.61
EGPRS 850 Channel 190										
836.60	99.23	252	2.0	H	32.20	0.20	0.00	32.00	38.45	-6.45
836.60	99.14	132	2.3	V	32.04	0.20	0.00	31.84	38.45	-6.61
EGPRS 850 Channel 251										
848.80	99.01	31	1.1	H	31.98	0.20	0.00	31.78	38.45	-6.67
848.80	98.86	304	2.3	V	31.76	0.20	0.00	31.56	38.45	-6.89

Cellular Band 1900 (Part 24E)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Part 24E	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 1900 Channel 512										
1850.20	94.58	134	1.2	H	20.61	0.31	10.40	30.70	33	-2.30
1850.20	92.20	217	2.2	V	18.92	0.31	10.40	29.01	33	-3.99
GPRS 1900 Channel 661										
1880.00	94.30	107	2.1	H	20.45	0.31	10.40	30.54	33	-2.46
1880.00	92.98	42	1.0	V	19.86	0.31	10.40	29.95	33	-3.05
GPRS 1900 Channel 810										
1909.80	93.78	175	1.4	H	20.05	0.32	10.40	30.13	33	-2.87
1909.80	92.02	131	1.7	V	19.06	0.32	10.40	29.14	33	-3.86
EGPRS 1900 Channel 512										
1850.20	94.56	202	1.6	H	20.59	0.31	10.40	30.68	33	-2.32
1850.20	92.89	201	1.3	V	19.61	0.31	10.40	29.70	33	-3.30
EGPRS 1900 Channel 661										
1880.00	94.06	161	1.5	H	20.21	0.31	10.40	30.30	33	-2.70
1880.00	94.33	144	1.1	V	21.21	0.31	10.40	31.30	33	-1.70
EGPRS 1900 Channel 810										
1909.80	94.10	248	2.1	H	20.37	0.32	10.40	30.45	33	-2.55
1909.80	94.22	202	1.7	V	21.26	0.32	10.40	31.34	33	-1.66

8 Peak-to-Average Ratio

Test Requirement:	24.232 (d) , KDB 971168 D01
Test Method:	N/A
Test Mode:	TX transmitting


8.1 EUT Operation

Operating Environment :

Temperature:	22.5 °C
Humidity:	52.3% RH
Atmospheric Pressure:	101.2kPa

8.2 Test Procedure

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

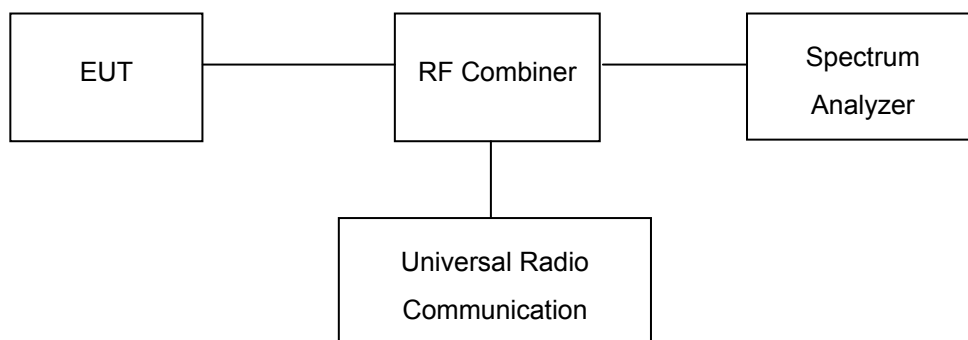

8.3 Test Result


Cellular Band (Part 24E)

Remark: All test data were reported and only the worst case (middle channel mode) test graphs were showed in test report.


Mode	GPRS 1900			EDGE 1900			Limit (dB)
Channel	512	661	810	512	661	810	
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8	
Peak-to-Average Ratio (dB)	10.15	10.24	10.15	11.82	11.94	11.67	13

Test Plots (Part 24E)

GPRS 1900 Middle Channel

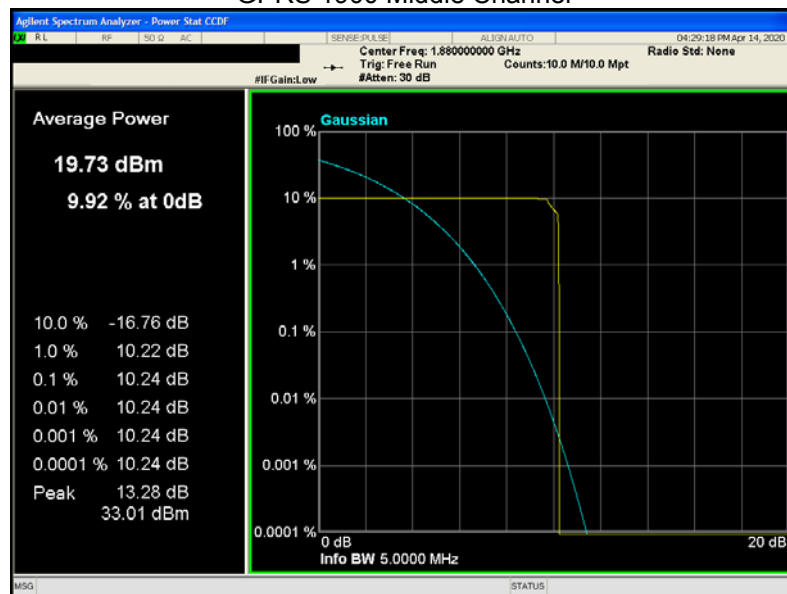

EDGE 1900 Middle Channel

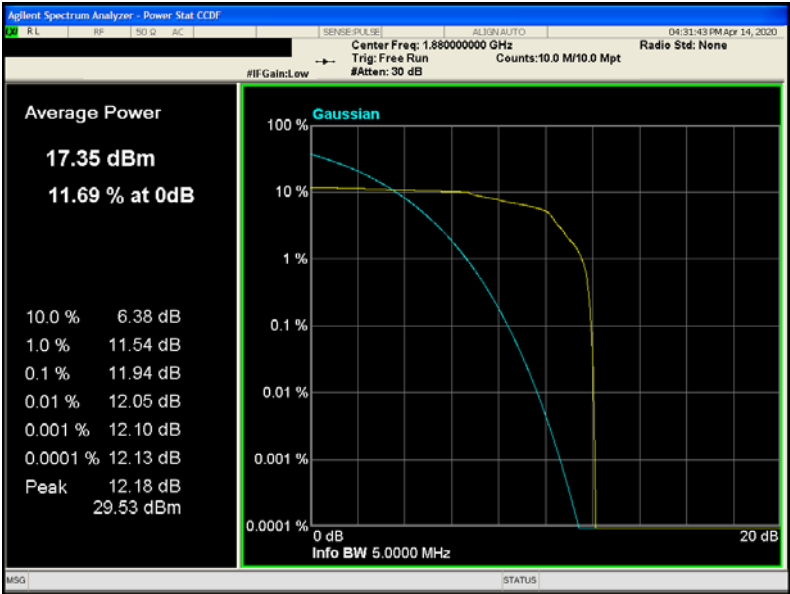

9 BANDWIDTH

Test Requirement:	FCC Part 2.1049, 22.917, 22.905, 24.238, KDB 971168 D01
Test Method:	ANSI/TIA-603-E:2016 ANSI C63.26:2015
Test Mode:	TX transmitting

9.1 EUT Operation


Operating Environment :

Temperature:	22.5 °C
Humidity:	52.3% RH
Atmospheric Pressure:	101.2kPa

9.2 Test Procedure

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set in the range of 1 to 5 % of the anticipated OBW (Cellular /PCS) and the 26 dB & 99%bandwidth was recorded.

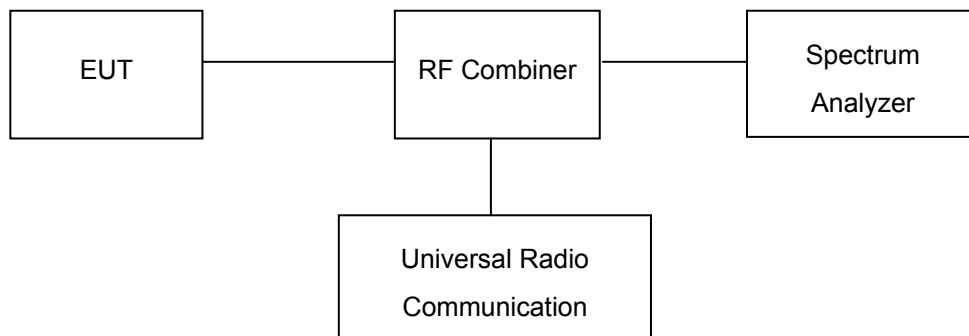

9.3 Test Result

Remark: All test data were reported and only the worst case (middle channel mode) test graphs were showed in test report.

Cellular Band (Part 22H)



Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(kHz)	26 dB Emission Bandwidth(kHz)
GPRS 850	128	824.2	251.76	314.49
	190	836.6	251.77	314.50
	251	848.8	251.76	314.50
EGPRS 850	128	824.2	242.06	299.00
	190	836.6	242.07	299.00
	251	848.8	242.06	299.00

Cellular Band (Part 24E)

Test Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth(kHz)	26 dB Emission Bandwidth(kHz)
GPRS 1900	512	1850.2	246.20	315.69
	661	1880.0	246.20	315.70
	810	1909.8	246.19	315.70
EGPRS 1900	512	1850.2	250.96	301.29
	661	1880.0	250.97	301.30
	810	1909.8	250.96	301.29


Test Plots (worst case)

Cellular Band (Part 22H)

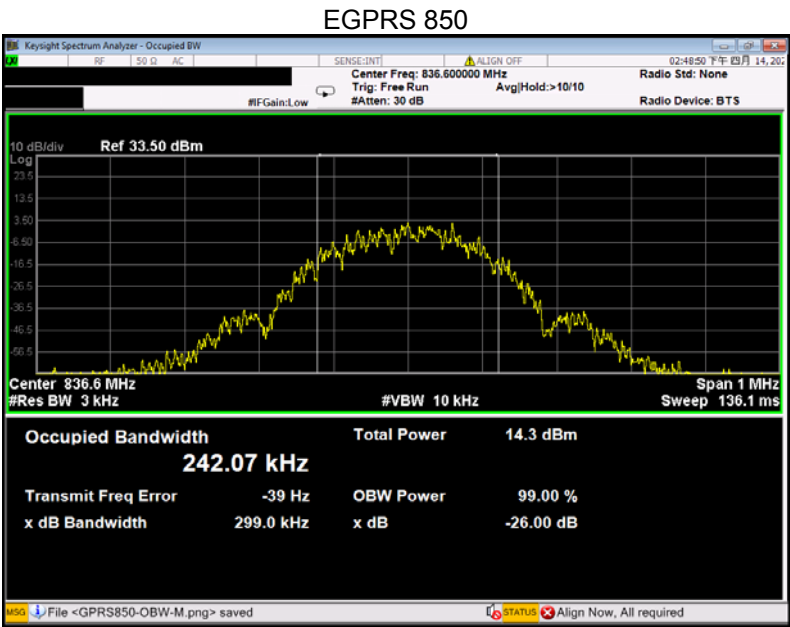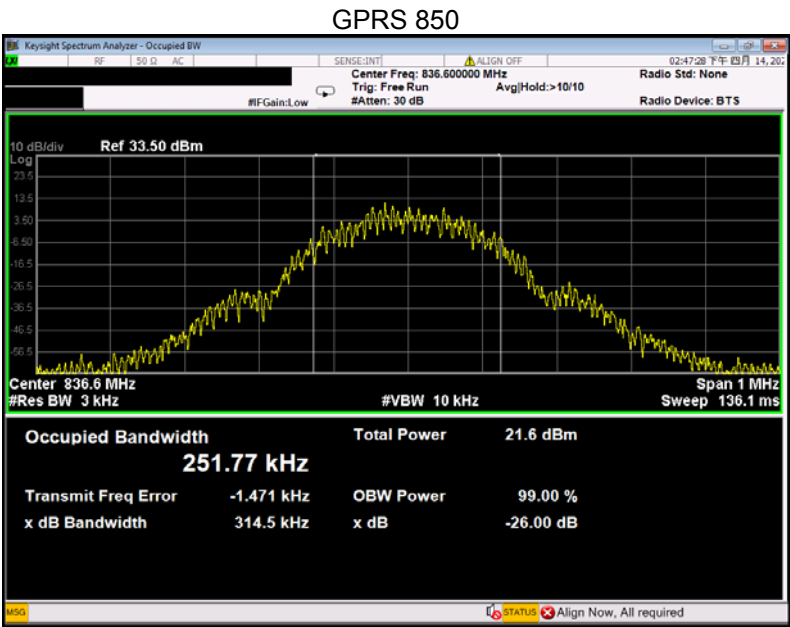


Cellular Band (Part 24E)

GPRS 1900

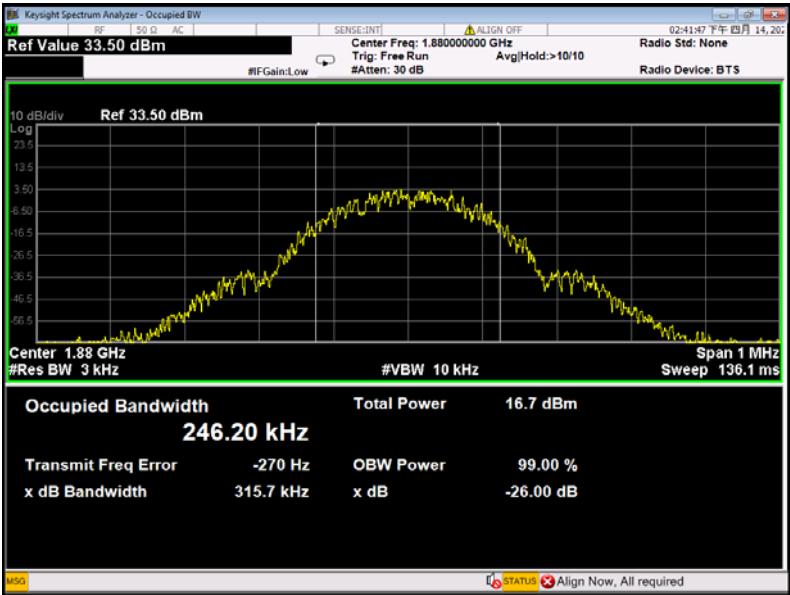

EGPRS 1900

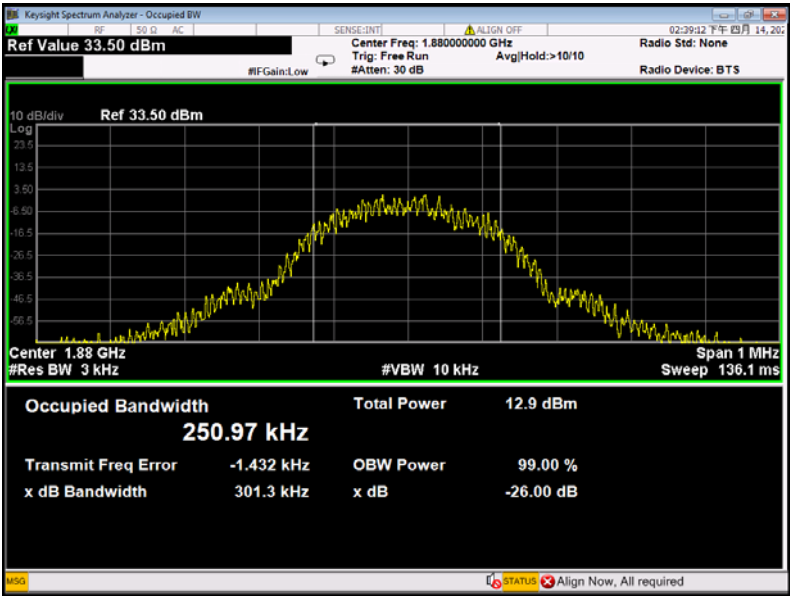

10 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement:	FCC Part 2.1051, 22.917(a), 24.238(a) , KDB 971168 D01
Test Method:	ANSI/TIA-603-E:2016 ANSI C63.26:2015
Test Mode:	TX transmitting


10.1 EUT Operation

Operating Environment :

Temperature:	23.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.3kPa

10.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

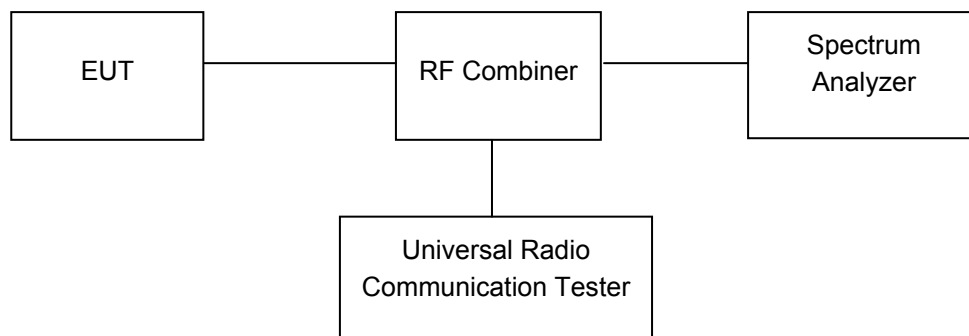


10.3 Test Result

Remark: All test data were reported and only the worst case (middle channel mode) test graphs were showed in test report.

Cellular Band (Part 22H)


GPRS 850 - channel 190

30MHz-1GHz

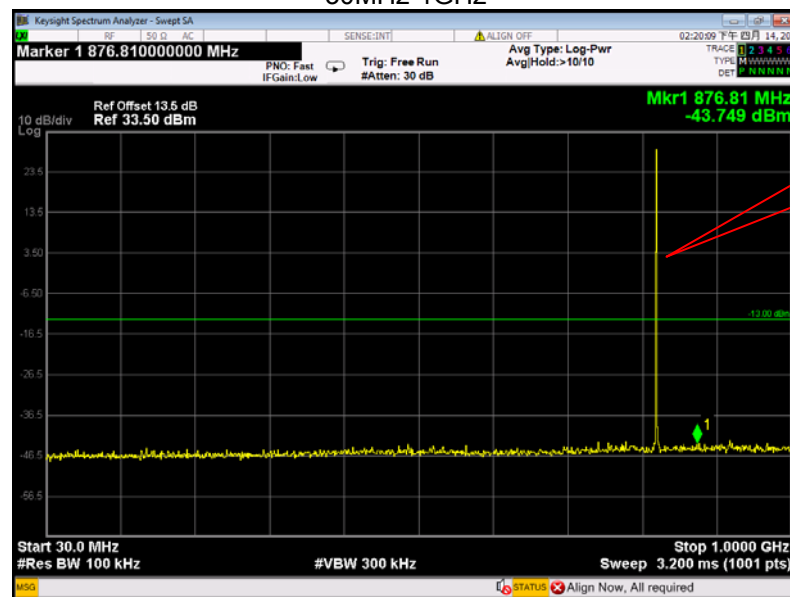


Fundamental

Above 1GHz

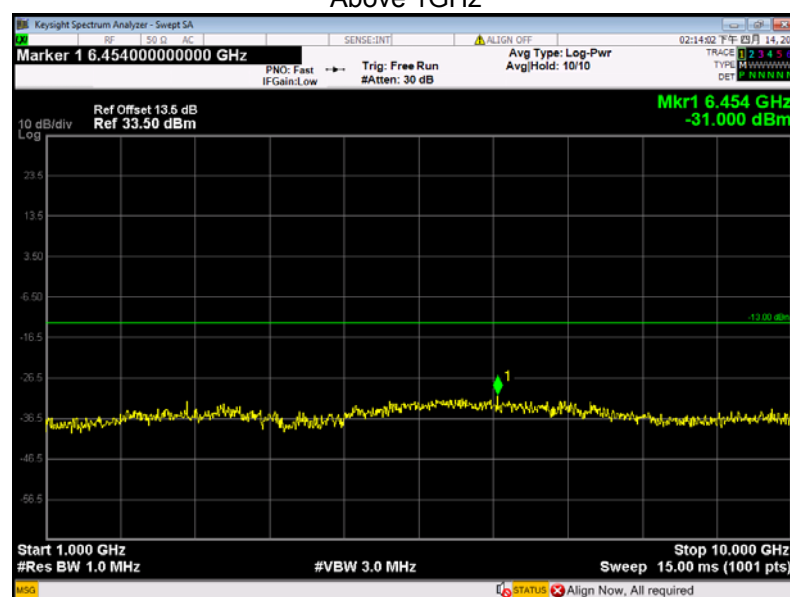


Cellular Band (Part 22H)
EGPRS 850 - channel 190

30MHz-1GHz

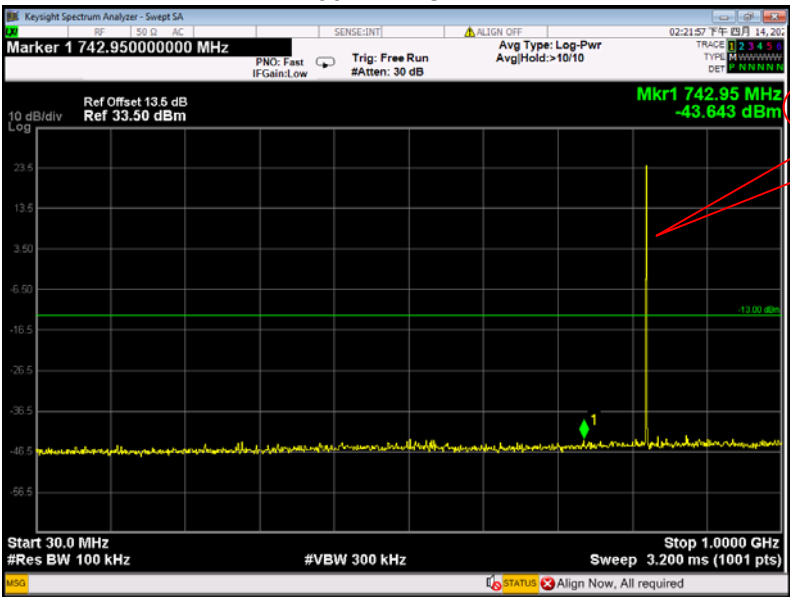


Above 1GHz

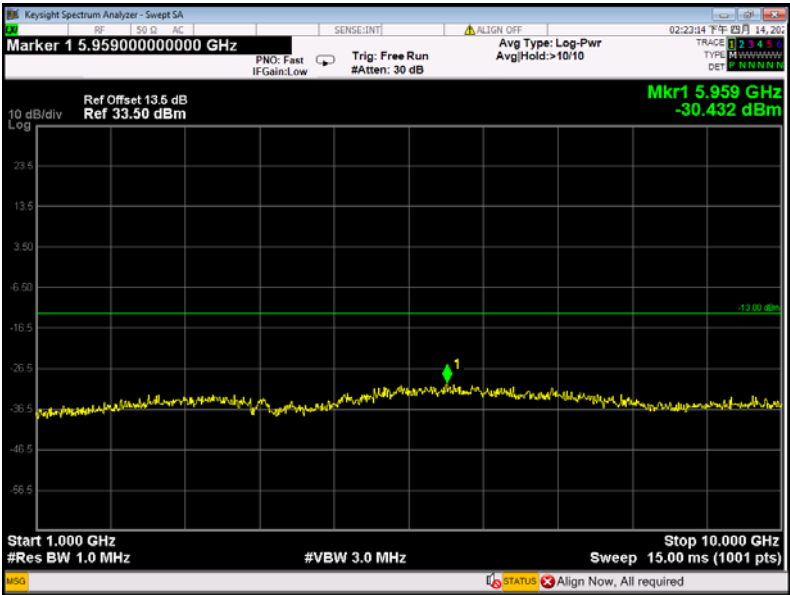

Cellular Band (Part 24E)


GPRS 1900 - channel 661

30MHz-1GHz

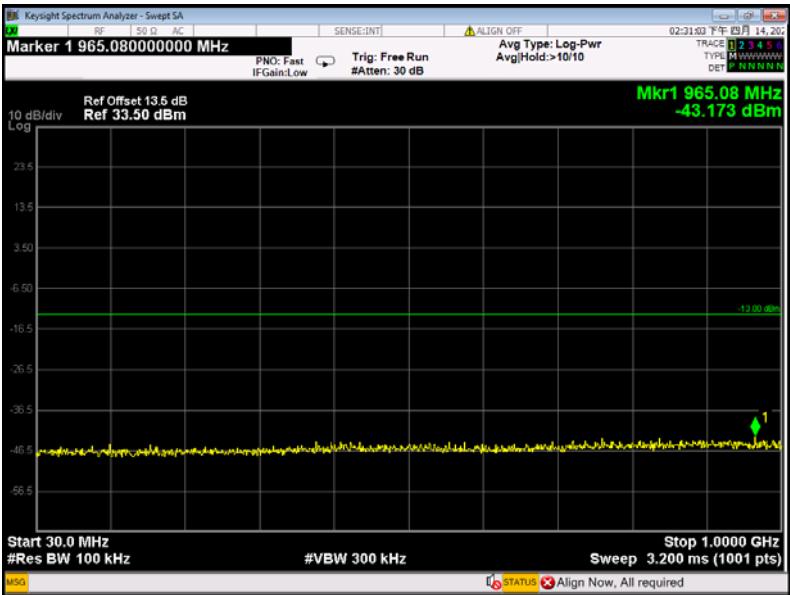


Above 1GHz

Fundamental

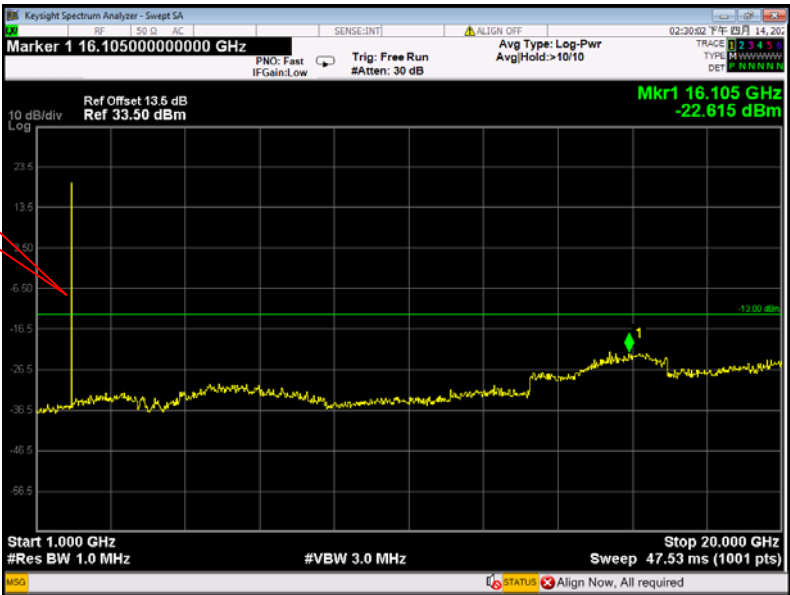


Cellular Band (Part 24E)
EGPRS 1900 - channel 661
30MHz-1GHz

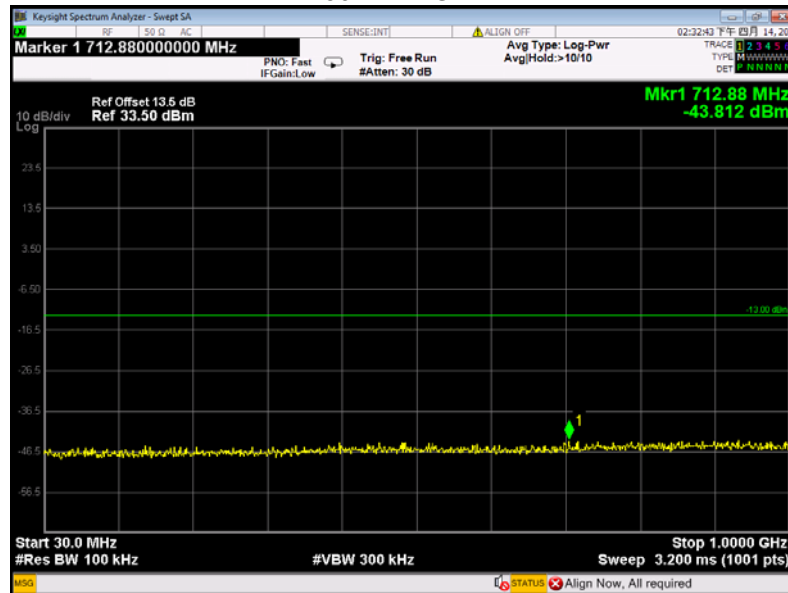

Above 1GHz

Fundamental

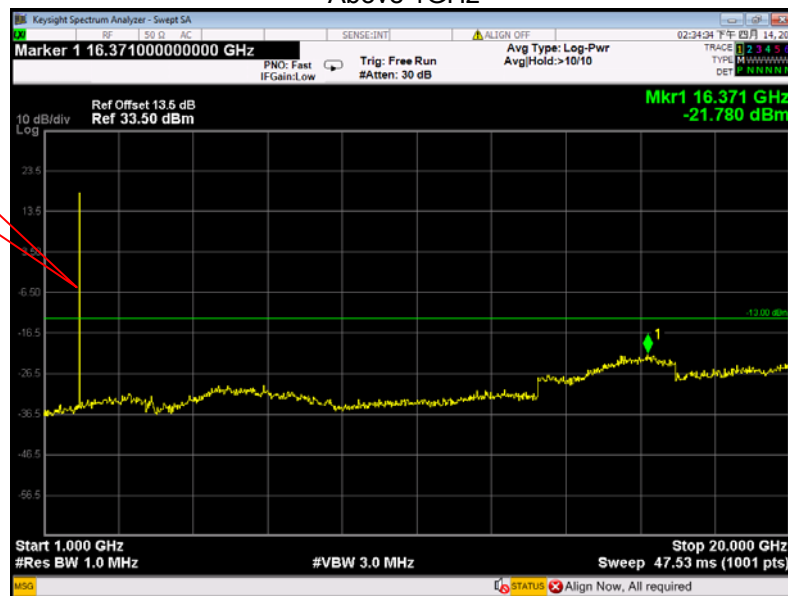

11 SPURIOUS RADIATED EMISSIONS

Test Requirement:	FCC Part 2.1053, 22.917, 24.238, KDB 971168 D01
Test Method:	ANSI/TIA-603-E:2016 ANSI C63.26:2015
Test Mode:	TX transmitting


11.1 EUT Operation

Operating Environment :


Temperature:	23.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.2kPa

11.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site.
The test setup for emission measurement from 30 MHz to 1 GHz.

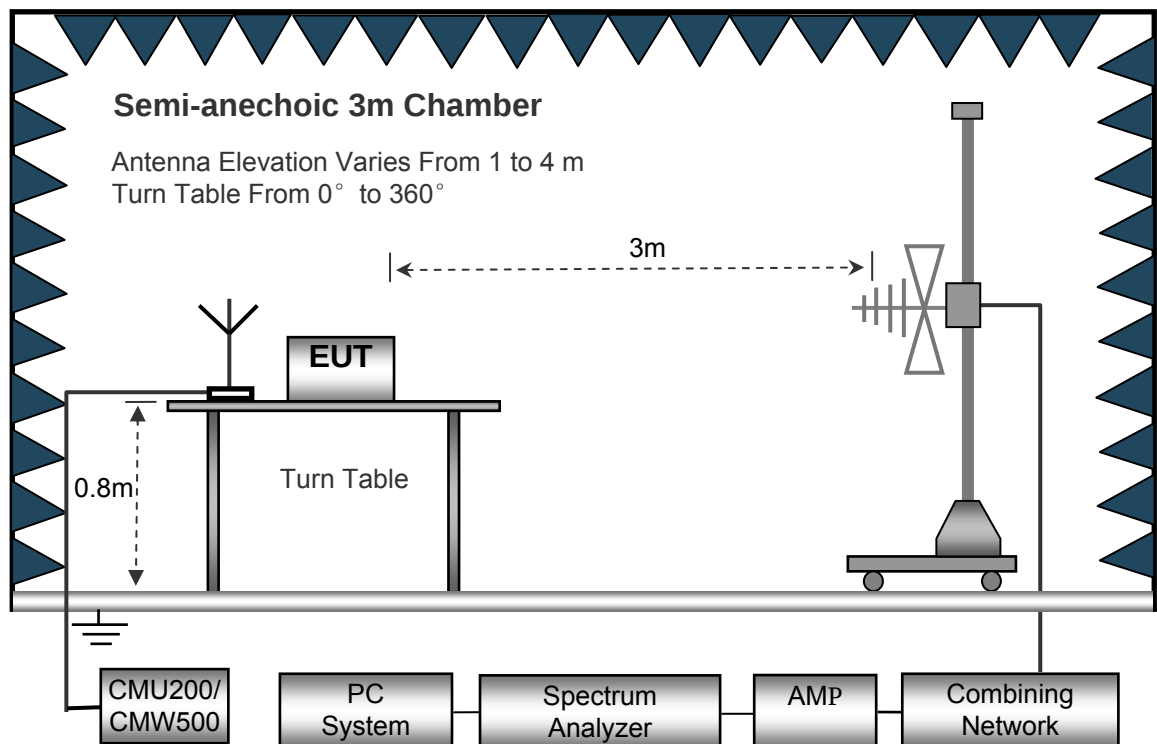

The test setup for emission measurement above 1 GHz.

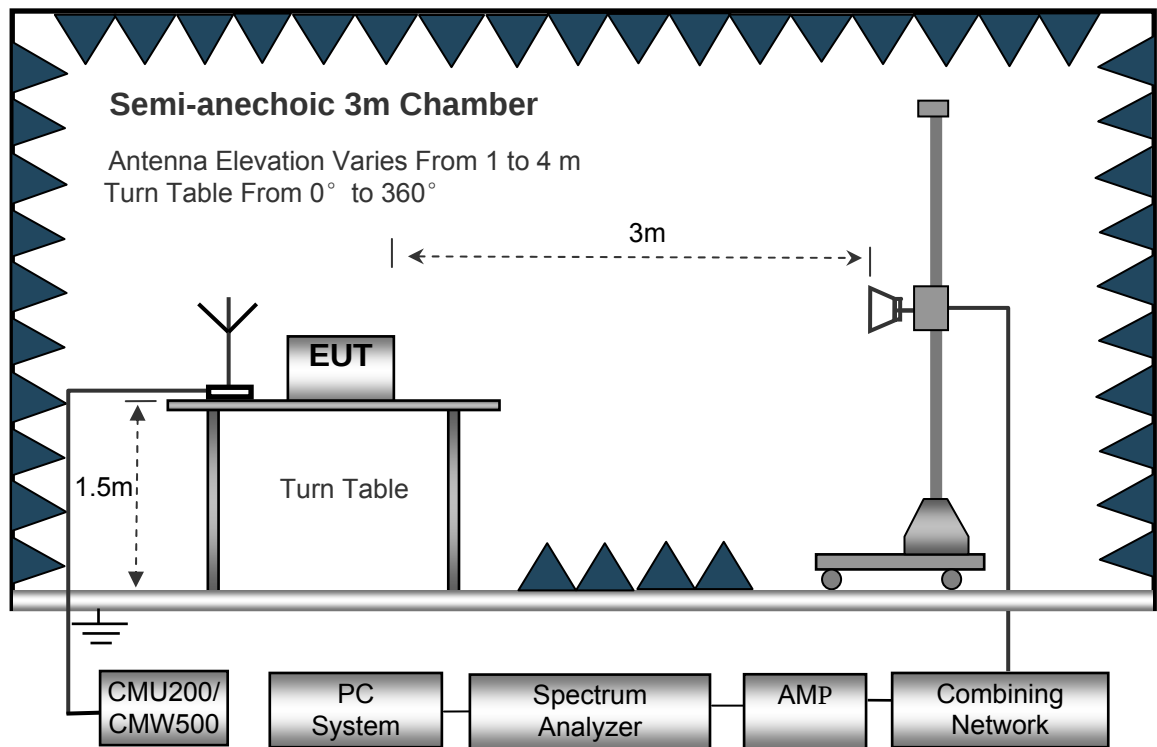

11.3 Spectrum Analyzer Setup

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

11.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m for below 1GHz and 1.5m for above 1GHz above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from 30MHz up to the tenth harmonic of the highest fundamental frequency.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.
7. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level
Spurious attenuation limit in dB = $43 + 10 \lg (\text{power out in Watts})$
8. Repeat above procedures until the measurements for all frequencies are completed.

11.5 Summary of Test Results

For 26MHz~30MHz,

The measurements were more than 20 dB below the limit and not reported.

Remark: Test performed from 30MHz to 10th harmonics with low/middle/high channels, only the worst data were recorded.

Cellular Band (Part 22H)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Result	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 850 Channel 128										
216.37	41.36	357	1.0	H	-69.15	0.15	0.00	-69.30	-13.00	-56.30
216.37	43.17	292	1.4	V	-64.42	0.15	0.00	-64.57	-13.00	-51.57
1648.40	66.43	209	1.3	H	-47.54	0.30	9.40	-38.44	-13.00	-25.44
1648.40	58.33	161	1.9	V	-55.20	0.30	9.40	-46.10	-13.00	-33.10
2472.60	59.13	325	1.1	H	-54.87	0.43	10.60	-44.70	-13.00	-31.70
2472.60	48.94	289	2.1	V	-61.34	0.43	10.60	-51.17	-13.00	-38.17

Cellular Band (Part 24E)

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Substituted			Absolute Level	Result	
			Height	Polar	SG Level	Cable	Antenna Gain		Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
GPRS 1900 Channel 512										
216.37	50.29	192	1.9	H	-60.22	0.15	0.00	-60.37	-13.00	-47.37
216.37	39.93	158	1.5	V	-67.66	0.15	0.00	-67.81	-13.00	-54.81
3700.40	65.95	309	1.3	H	-45.59	2.37	12.50	-35.46	-13.00	-22.46
3700.40	59.98	169	1.6	V	-49.83	2.37	12.50	-39.70	-13.00	-26.70
5550.60	53.58	338	1.2	H	-56.03	2.86	12.90	-45.99	-13.00	-32.99
5550.60	44.73	57	1.1	V	-64.15	2.86	12.90	-54.11	-13.00	-41.11

Note: 1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

12 Band Edge Measurement

Test Requirement:	FCC Part 2.1051, 22.917(a), 24.238(a) , KDB 971168 D01
Test Method:	ANSI/TIA-603-E:2016 ANSI C63.26:2015
Test Mode:	TX transmitting

12.1 EUT Operation

Operating Environment :

Temperature:	23.5 °C
Humidity:	52.3 % RH
Atmospheric Pressure:	101.3kPa


12.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

According to FCC Part 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the TX transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC Part 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the TX transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The center of the spectrum analyzer was set to block edge frequency

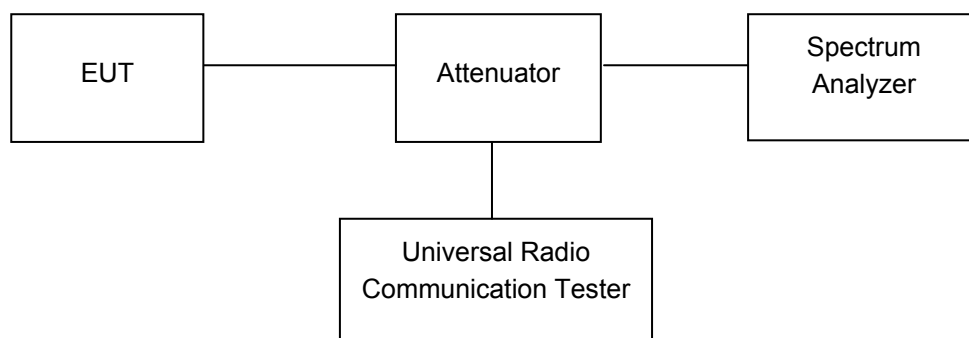

12.3 Test Result

Test plots


GPRS 850 band edge-left side

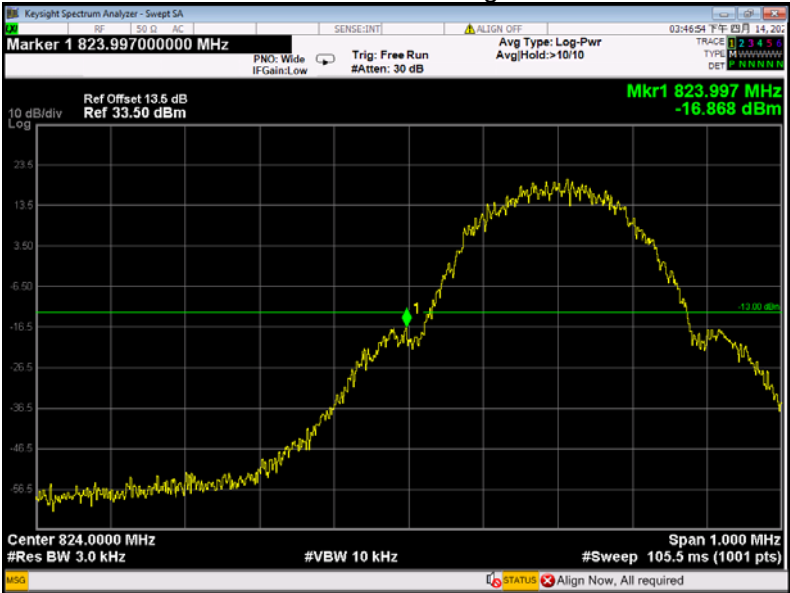

GPRS 850 band edge-right side




EGPRS 850 band edge-left side

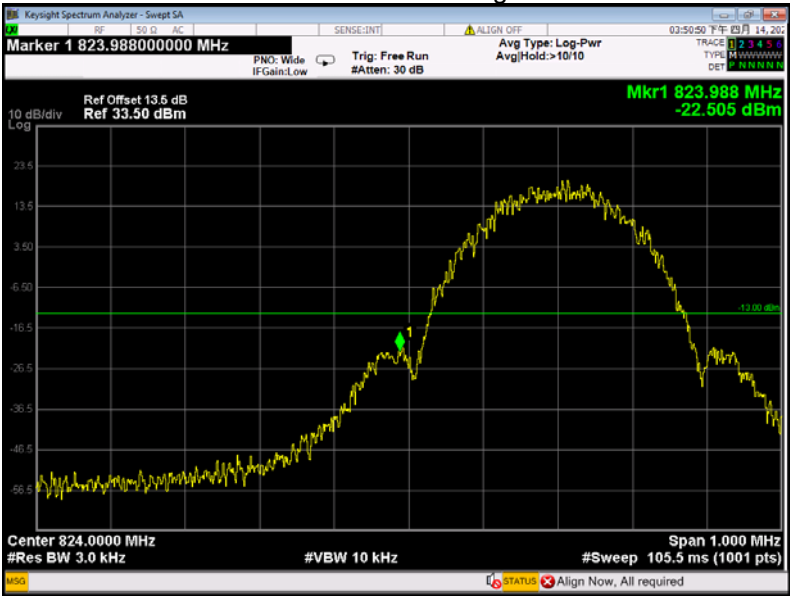


EGPRS 850 band edge-right side




Cellular Band (Part 24E)
GPRS 1900 band edge-left side

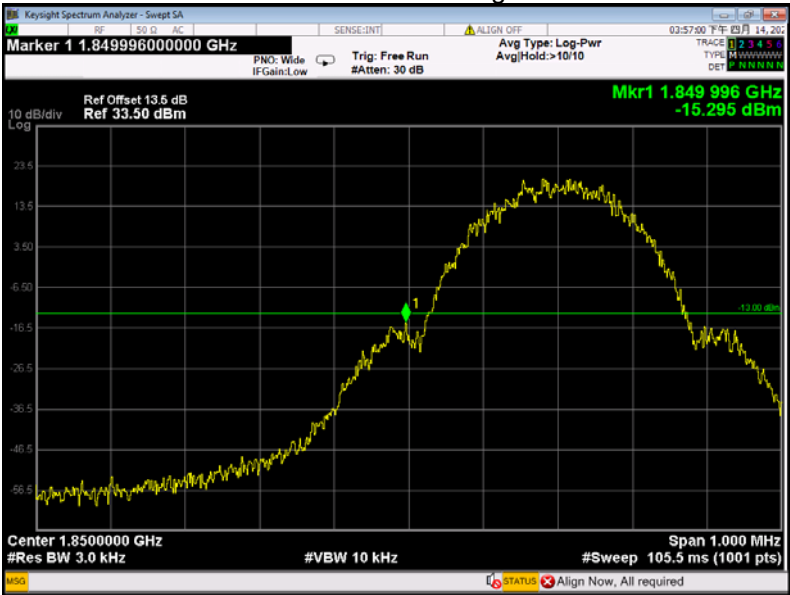

GPRS 1900 band edge-right side

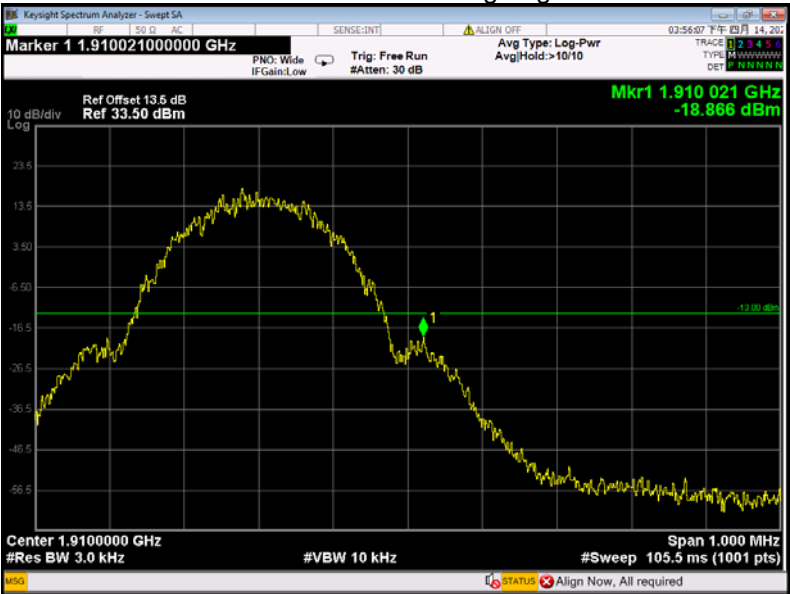

EGPRS 1900 band edge-left side

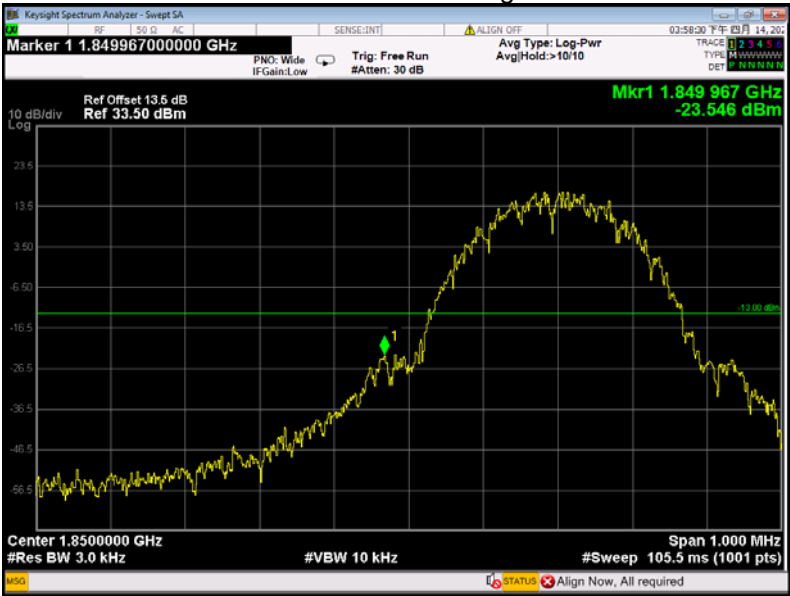

EGPRS 1900 band edge-right side



13 FREQUENCY STABILITY

Test Requirement:	FCC Part 2.1055, 22.355, 24.235, KDB 971168 D01
Test Method:	ANSI/TIA-603-E:2016 ANSI C63.26:2015
Test Mode:	TX transmitting

13.1 EUT Operation

Operating Environment :


Temperature:	22.9 °C
Humidity:	52.0 % RH
Atmospheric Pressure:	101.3kPa

13.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

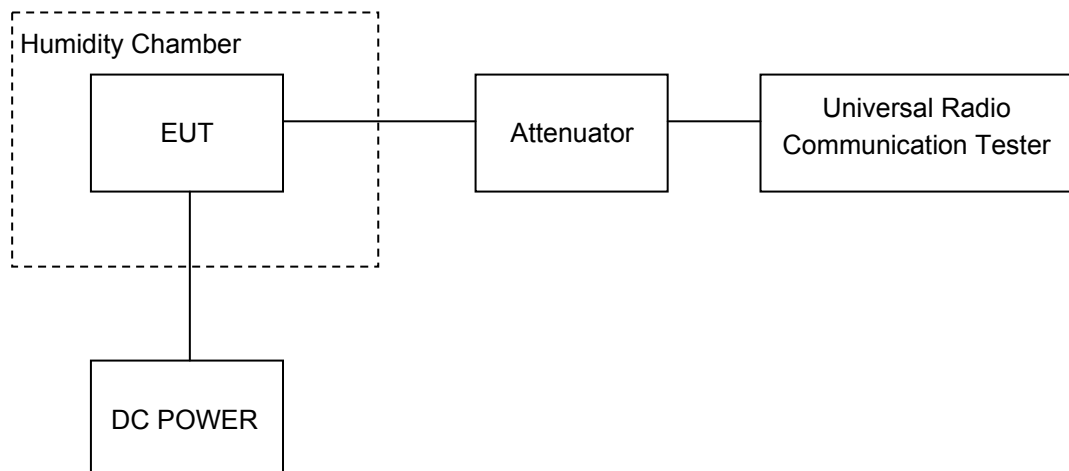

13.3 Test Result

Cellular Band (Part 22H)

GPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.7	-11	-0.0131	2.5
40		2	0.0024	2.5
30		-6	-0.0072	2.5
20		-3	-0.0036	2.5
10		1	0.0012	2.5
0		6	0.0072	2.5
-10		4	0.0048	2.5
-20		2	0.0024	2.5
-30		-6	-0.0072	2.5
20	3.3	1	0.0012	2.5
20	4.2	-2	-0.0024	2.5

EGPRS 850 Test Frequency:836.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.7	-1	-0.0012	2.5
40		5	0.0060	2.5
30		9	0.0108	2.5
20		2	0.0024	2.5
10		5	0.0060	2.5
0		-3	-0.0036	2.5
-10		6	0.0072	2.5
-20		-3	-0.0036	2.5
-30		6	0.0072	2.5
20	3.3	-2	-0.0024	2.5
20	4.2	5	0.0060	2.5

PCS Band (Part 24E)

GPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	8.1	-3	-0.0016	2.5
40		-2	-0.0011	2.5
30		6	0.0032	2.5
20		-2	-0.0011	2.5
10		-8	-0.0043	2.5
0		-4	-0.0021	2.5
-10		-1	-0.0005	2.5
-20		-11	-0.0059	2.5
-30		-11	-0.0059	2.5
20	3.3	-4	-0.0021	2.5
20	4.2	-1	-0.0005	2.5

EGPRS 1900 Test Frequency:1880.0MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	8.1	23	0.0122	2.5
40		29	0.0154	2.5
30		19	0.0101	2.5
20		20	0.0106	2.5
10		13	0.0069	2.5
0		15	0.0080	2.5
-10		15	0.0080	2.5
-20		20	0.0106	2.5
-30		22	0.0117	2.5
20	3.3	20	0.0106	2.5
20	4.2	22	0.0117	2.5

14 RF Exposure

Remark: refer to MPE test report: WTU20S04016795W002.

15 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-OQB2020-Photos.

===== End of Report =====