

# TEST REPORT

**FCC ID:2AIN6ET-S15L**

**Product: Bluetooth speaker**

**Model No.: ET-S15**

**Additional Model: ET-S15L, ET-S15XX, ET-S125, ET-S125D, ET-S16, BTS-M12,  
ET-S17, ET-S10, ET-S18, ET-S19, BTS-V5, BTS-V8, BTS-VXX, ET369XX,  
BADBOY/BADGIRL KUBE, BADBOY/BADGIRL BOOM BARREL,  
BADBOY/BADGIRL Blaster, TBS-50X(Telefunken), THHS-111BT(Telefunken),  
IP-131, IP-133, IP-135, IP-137, IP-139, IP-XX**

**Trade Mark: N/A**

**Report No.: TCT160531E011**

**Issued Date: Jun. 22, 2016**

Issued for:

**E-SOUND SYSTEM LIMITED**

**Building A, No.7 Tongfu Road, Qiaotou, Fuyong Town, Baoan District,  
Shenzhen, China**

Issued By:

**Shenzhen Tongce Testing Lab.**

**1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China**

**TEL: +86-755-27673339**

**FAX: +86-755-27673332**

**Note:** This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

<b>1. Test Certification.....</b>	<b>3</b>
<b>2. Test Result Summary .....</b>	<b>4</b>
<b>3. EUT Description .....</b>	<b>5</b>
<b>4. General Information.....</b>	<b>6</b>
4.1. Test environment and mode.....	6
4.2. Description of Support Units.....	6
<b>5. Facilities and Accreditations .....</b>	<b>7</b>
5.1. Facilities .....	7
5.2. Location .....	7
5.3. Measurement Uncertainty.....	7
<b>6. Test Results and Measurement Data .....</b>	<b>8</b>
6.1. Antenna requirement .....	8
6.2. Conducted Emission.....	9
6.3. Conducted Output Power .....	15
6.4. 20dB Occupy Bandwidth .....	16
6.5. Carrier Frequencies Separation .....	17
6.6. Hopping Channel Number .....	18
6.7. Dwell Time.....	19
6.8. Pseudorandom Frequency Hopping Sequence .....	20
6.9. Conducted Band Edge Measurement .....	21
6.10. Conducted Spurious Emission Measurement.....	22
6.11. Radiated Spurious Emission Measurement .....	23
<b>Appendix A: Test Result of Conducted Test</b>	
<b>Appendix B: Photographs of Test Setup</b>	
<b>Appendix C: Photographs of EUT</b>	

## 1. Test Certification

<b>Product:</b>	Bluetooth speaker
<b>Model No.:</b>	ET-S15
<b>Additional Model:</b>	ET-S15L, ET-S15XX, ET-S125, ET-S125D, ET-S16, BTS-M12, ET-S17, ET-S10, ET-S18, ET-S19, BTS-V5, BTS-V8, BTS-VXX, ET369XX, BADBOY/BADGIRL KUBE, BADBOY/BADGIRL BOOM BARREL, BADBOY/BADGIRL Blaster, TBS-50X(Telefunken), THHS-111BT(Telefunken), IP-131, IP-133, IP-135, IP-137, IP-139, IP-XX
<b>Applicant:</b>	E-SOUND SYSTEM LIMITED
<b>Address:</b>	Building A, No.7 Tongfu Road, Qiaotou, Fuyong Town, Baoan District, Shenzhen, China
<b>Manufacturer:</b>	Shenzhen Qiweisheng Electronics Co., Ltd
<b>Address:</b>	Building A, No.7 Tongfu Road, Qiaotou, Fuyong Town, Baoan District, Shenzhen, China
<b>Date of Test:</b>	May 31 – Jun. 21, 2016
<b>Applicable Standards:</b>	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

SKY Luo

SKY Luo

Date:

Jun. 21, 2016

Reviewed By:

Zhou

Joe Zhou

Date:

Jun. 22, 2016

Approved By:

Tomsin

Tomsin

Date:

Jun. 22, 2016

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(1) §2.1046	PASS
20dB Occupied Bandwidth	§15.247 (a)(1) §2.1049	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209 §2.1051 §2.1053	PASS
Band Edge	§15.247(d)	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. EUT Description

<b>Product Name:</b>	Bluetooth speaker
<b>Model :</b>	ET-S15
<b>Additional Model:</b>	ET-S15L, ET-S15XX, ET-S125, ET-S125D, ET-S16, BTS-M12, ET-S17, ET-S10, ET-S18, ET-S19, BTS-V5, BTS-V8, BTS-VXX, ET369XX, BADBOY/BADGIRL KUBE, BADBOY/BADGIRL BOOM BARREL, BADBOY/BADGIRL Blaster, TBS-50X(Telefunken), THHS-111BT(Telefunken), IP-131, IP-133, IP-135, IP-137, IP-139, IP-XX
<b>Trade Mark:</b>	N/A
<b>Operation Frequency:</b>	2402MHz~2480MHz
<b>Transfer Rate:</b>	1/2 Mbits/s
<b>Number of Channel:</b>	79
<b>Modulation Type:</b>	GFSK, $\pi/4$ -DQPSK
<b>Modulation Technology:</b>	FHSS
<b>Antenna Type:</b>	Internal Antenna
<b>Antenna Gain:</b>	-0.68dBi
<b>Power Supply:</b>	Rechargeable Li-ion Battery DC3.7V
<b>Remark:</b>	All models above are identical in interior structure, electrical circuits and components, and just model names and appearance are different for the marketing requirement.

#### Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
...	...	...	...	...	...	...	...
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
...	...	...	...	...	...	...	...
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz	-	

Remark: Channel 0, 39 & 78 have been tested for GFSK,  $\pi/4$ -DQPSK modulation mode.

## 4. Genera Information

### 4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations
<p>The sample was placed (0.8m below 1GHz/1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

### 4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Notebook	G485	/	/	Lenovo
Adapter	QU050100	/	/	mylphone

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.
4. Adapter Information:  
Model No.: QU050100  
Input: AC 100V-240V, 50/60Hz, 0.15A;  
Output: DC 5V, 1A

## 5. Facilities and Accreditations

### 5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

### 5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142

### 5.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



## 6. Test Results and Measurement Data

### 6.1. Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
------------------------------	-------------------------------------

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

<b>E.U.T Antenna:</b>	
-----------------------	--

The BT antenna is an internal antenna which permanently attached, and the best case gain of the antenna is -0.68dBi.

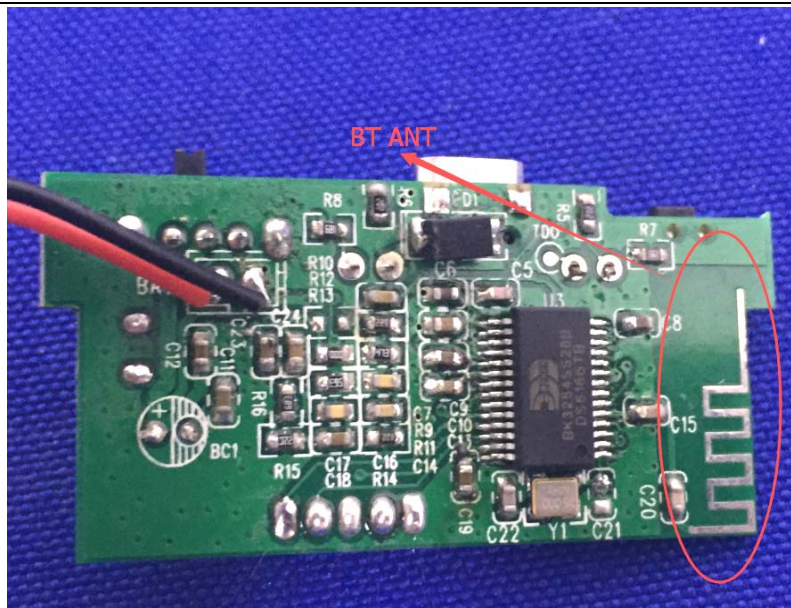



## 6.2. Conducted Emission

### 6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<div><p>Reference Plane</p><p>40cm 80cm</p><p>E.U.T. AC power</p><p>Test table/Insulation plane</p><p>LISN Filter AC power</p><p>EMI Receiver</p><p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>														
Test Mode:	Refer to item 4.1														
Test Procedure:	<div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</div></div>														
Test Result:	PASS														

## 6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Sep. 11, 2016
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 16, 2016
Coax cable	TCT	CE-05	N/A	Sep. 11, 2016
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

### 6.2.3. Test data

Please refer to following diagram for individual

The test data (Link with Notebook)

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

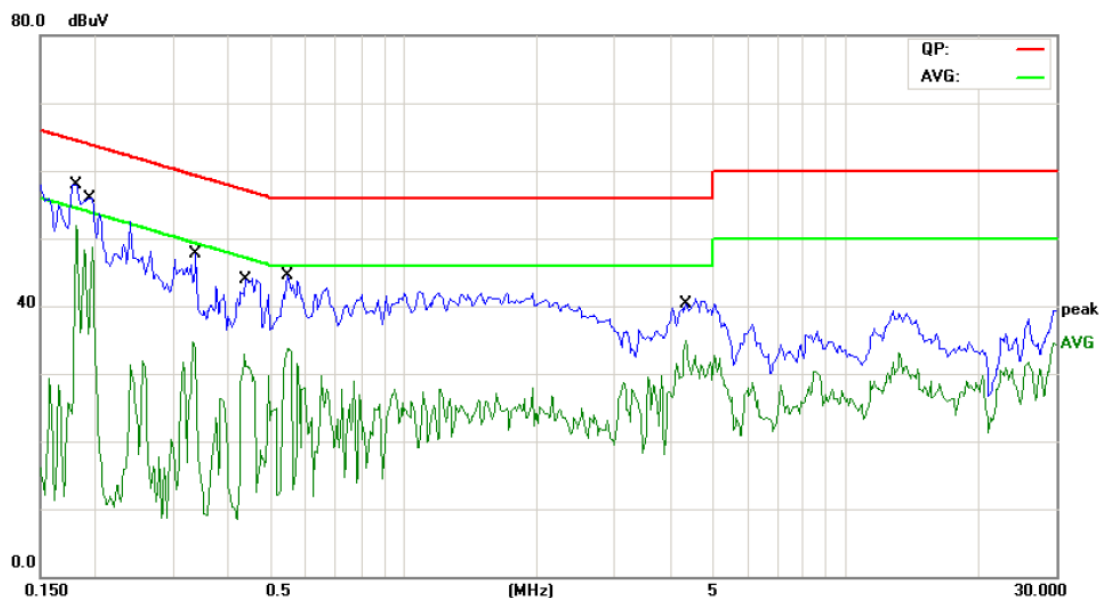

Site Chamber #2

Phase: **L1**

Temperature: 23 (C)

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1812	41.53	11.50	53.03	64.43	-11.40	QP	
2		0.1812	23.24	11.50	34.74	54.43	-19.69	AVG	
3		0.1969	39.21	11.48	50.69	63.74	-13.05	QP	
4		0.1969	24.95	11.48	36.43	53.74	-17.31	AVG	
5		0.3375	29.23	11.41	40.64	59.26	-18.62	QP	
6		0.3375	13.35	11.41	24.76	49.26	-24.50	AVG	
7		0.4391	25.99	11.34	37.33	57.08	-19.75	QP	
8		0.4391	12.78	11.34	24.12	47.08	-22.96	AVG	
9		0.5445	29.47	11.29	40.76	56.00	-15.24	QP	
10		0.5445	13.24	11.29	24.53	46.00	-21.47	AVG	
11		4.3398	24.37	10.86	35.23	56.00	-20.77	QP	
12		4.3398	12.82	10.86	23.68	46.00	-22.32	AVG	

#### Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = attenuator factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

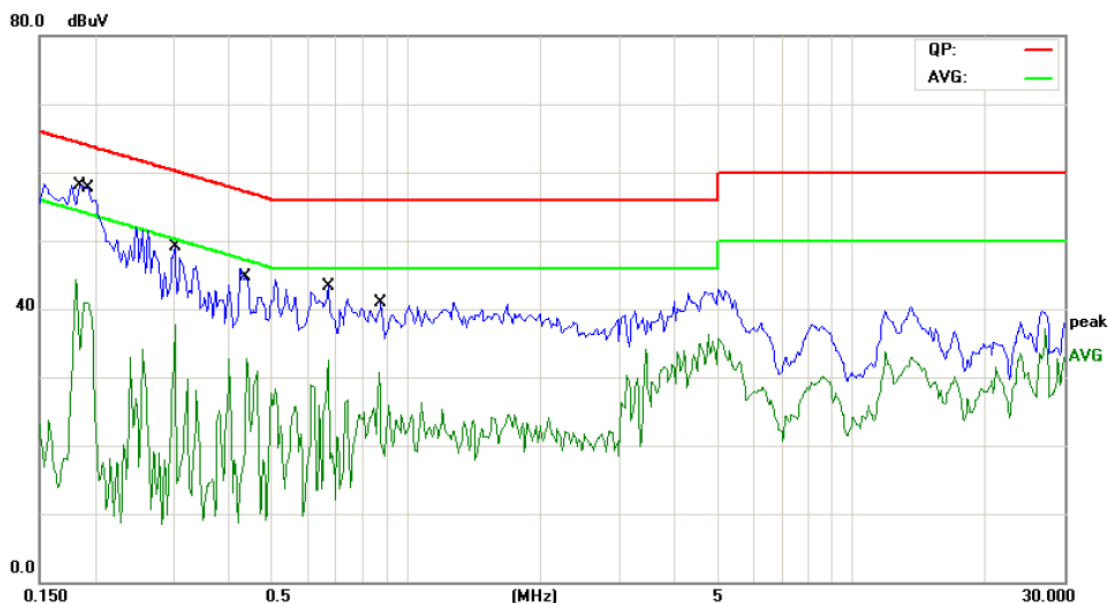

Site Chamber #2

Phase: **N**

Temperature: 23 (C)

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1852	43.81	11.50	55.31	64.24	-8.93	QP	
2		0.1852	28.08	11.50	39.58	54.24	-14.66	AVG	
3		0.1930	42.97	11.48	54.45	63.90	-9.45	QP	
4		0.1930	27.17	11.48	38.65	53.90	-15.25	AVG	
5		0.3023	33.15	11.43	44.58	60.18	-15.60	QP	
6		0.3023	15.97	11.43	27.40	50.18	-22.78	AVG	
7		0.4352	30.41	11.34	41.75	57.15	-15.40	QP	
8		0.4352	16.94	11.34	28.28	47.15	-18.87	AVG	
9		0.6695	27.96	11.23	39.19	56.00	-16.81	QP	
10		0.6695	15.14	11.23	26.37	46.00	-19.63	AVG	
11		0.8766	24.45	11.20	35.65	56.00	-20.35	QP	
12		0.8766	9.83	11.20	21.03	46.00	-24.97	AVG	

### Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = attenuator factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average


\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

### Note2:

Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (Low channel and Pi/4 DQPSK) was submitted only.

## The test data (Link with Adapter)

### Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

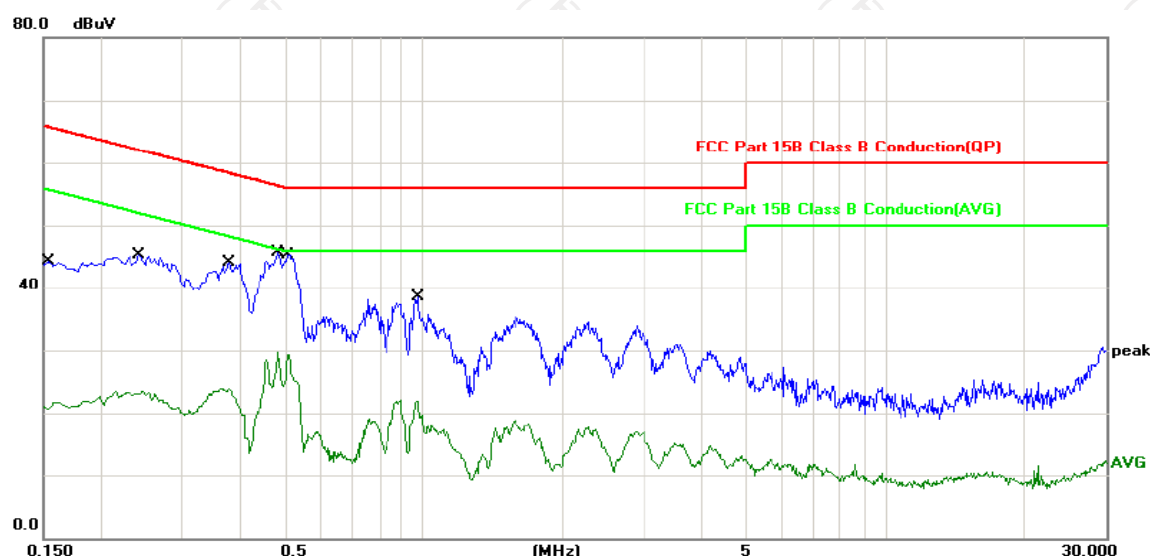

Site Chamber #2

Phase: **L1**

Temperature: 23

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	27.97	11.49	39.46	65.78	-26.32	QP	
2		0.1539	9.61	11.49	21.10	55.78	-34.68	AVG	
3		0.2420	28.69	11.45	40.14	62.02	-21.88	QP	
4		0.2420	11.46	11.45	22.91	52.02	-29.11	AVG	
5		0.3780	26.98	11.37	38.35	58.32	-19.97	QP	
6		0.3780	12.51	11.37	23.88	48.32	-24.44	AVG	
7	*	0.4860	30.76	11.32	42.08	56.24	-14.16	QP	
8		0.4860	18.32	11.32	29.64	46.24	-16.60	AVG	
9		0.5100	30.23	11.30	41.53	56.00	-14.47	QP	
10		0.5100	18.14	11.30	29.44	46.00	-16.56	AVG	
11		0.9700	21.51	11.21	32.72	56.00	-23.28	QP	
12		0.9700	10.60	11.21	21.81	46.00	-24.19	AVG	

#### Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)



Site Chamber #2

Phase: **N**

Temperature: 23

Limit: FCC Part 15B Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	27.90	11.49	39.39	65.78	-26.39	QP	
2		0.1539	8.73	11.49	20.22	55.78	-35.56	AVG	
3		0.1900	27.33	11.47	38.80	64.03	-25.23	QP	
4		0.1900	7.75	11.47	19.22	54.03	-34.81	AVG	
5		0.2140	27.52	11.46	38.98	63.04	-24.06	QP	
6		0.2140	7.93	11.46	19.39	53.04	-33.65	AVG	
7		0.3580	24.05	11.38	35.43	58.77	-23.34	QP	
8		0.3580	6.71	11.38	18.09	48.77	-30.68	AVG	
9	*	0.5100	30.02	11.30	41.32	56.00	-14.68	QP	
10		0.5100	12.47	11.30	23.77	46.00	-22.23	AVG	
11		0.9740	17.84	11.21	29.05	56.00	-26.95	QP	
12		0.9740	3.24	11.21	14.45	46.00	-31.55	AVG	

### Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average


\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

### Note2:

Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (Middle channel and Pi/4 DQPSK) was submitted only.

### 6.3. Conducted Output Power

#### 6.3.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (b)(3) &Part 2 J Section 2.1046
<b>Test Method:</b>	DA00-705
<b>Limit:</b>	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<p>Use the following spectrum analyzer settings:</p> <p>Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</p> <p>RBW &gt; the 20 dB bandwidth of the emission being measured</p> <p>VBW ≥ RBW</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p> <p>Allow the trace to stabilize.</p> <p>Use the marker-to-peak function to set the marker to the peak of the emission.</p>
<b>Test Result:</b>	PASS

#### 6.3.2. Test Instruments


Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
RF Cable	TCT	RE-06	N/A	Sep. 12, 2016
Antenna Connector	TCT	RFC-01	N/A	Sep. 12, 2016

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## 6.4. 20dB Occupy Bandwidth

### 6.4.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(1) &Part 2 J Section 2.1049
<b>Test Method:</b>	DA00-705
<b>Limit:</b>	N/A
<b>Test Setup:</b>	 <p>Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW<math>\geq</math>1% of the 20 dB bandwidth; VBW<math>\geq</math>RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>5. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS


### 6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
RF cable	TCT	RE-06	N/A	Sep. 12, 2016
Antenna Connector	TCT	RFC-01	N/A	Sep. 12, 2016

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 6.5. Carrier Frequencies Separation

### 6.5.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(1)
<b>Test Method:</b>	DA00-705
<b>Limit:</b>	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Hopping mode
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Enable the EUT hopping function.</li> <li>5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW<math>\geq</math>1% of the span; VBW<math>\geq</math>RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>6. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS


### 6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
RF cable	TCT	RE-06	N/A	Sep. 12, 2016
Antenna Connector	TCT	RFC-01	N/A	Sep. 12, 2016

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 6.6. Hopping Channel Number

### 6.6.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(1)
<b>Test Method:</b>	DA00-705
<b>Limit:</b>	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Hopping mode
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Enable the EUT hopping function.</li> <li>5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW <math>\geq 1\%</math> of the span; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>6. The number of hopping frequency used is defined as the number of total channel.</li> <li>7. Record the measurement data derived from spectrum analyzer.</li> </ol>
<b>Test Result:</b>	PASS


### 6.6.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
RF cable	TCT	RE-06	N/A	Sep. 12, 2016
Antenna Connector	TCT	RFC-01	N/A	Sep. 12, 2016

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 6.7. Dwell Time

### 6.7.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(1)
<b>Test Method:</b>	DA00-705
<b>Limit:</b>	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Hopping mode
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Enable the EUT hopping function.</li> <li>5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW≥RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.</li> <li>6. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

### 6.7.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
RF cable	TCT	RE-06	N/A	Sep. 12, 2016
Antenna Connector	TCT	RFC-01	N/A	Sep. 12, 2016

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 6.8. Pseudorandom Frequency Hopping Sequence

### Test Requirement:

**FCC Part15 C Section 15.247 (a)(1) requirement:**


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

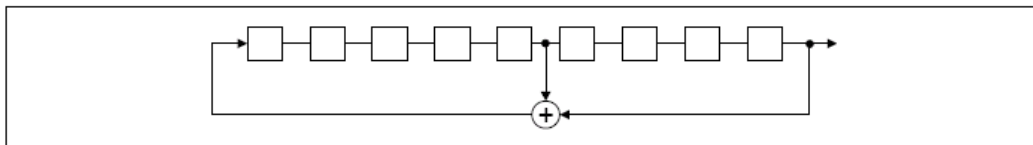

*Linear Feedback Shift Register for Generation of the PRBS sequence*


An example of Pseudorandom Frequency Hopping Sequence as follow:

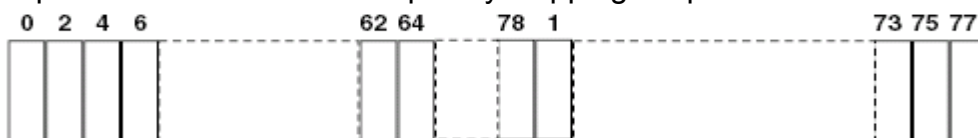

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 6.9. Conducted Band Edge Measurement

### 6.9.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	DA00-705
<b>Limit:</b>	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Set RBW = 100 kHz (<math>\geq 1\%</math> span=10MHz), VBW = 300 kHz (<math>\geq</math>RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.</li> <li>4. Enable hopping function of the EUT and then repeat step 2 and 3.</li> <li>5. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS


### 6.9.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
RF cable	TCT	RE-06	N/A	Sep. 12, 2016
Antenna Connector	TCT	RFC-01	N/A	Sep. 12, 2016

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 6.10. Conducted Spurious Emission Measurement

### 6.10.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d) &Part 2 J Section 2.1051
<b>Test Method:</b>	DA00-705
<b>Limit:</b>	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.</li> <li>5. Measure and record the results in the test report.</li> <li>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> </ol>
<b>Test Result:</b>	PASS

### 6.10.2. Test Instruments


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
RF cable	TCT	RE-06	N/A	Sep. 12, 2016
Antenna Connector	TCT	RFC-01	N/A	Sep. 12, 2016


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




## 6.11. Radiated Spurious Emission Measurement

### 6.11.1. Test Specification

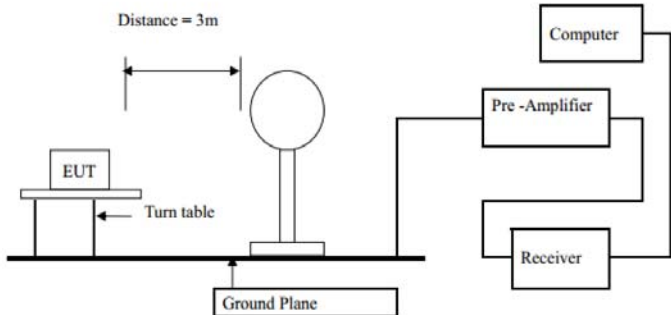Test Requirement:	FCC Part15 C Section 15.209 & Part 2 J Section 2.1053				
Test Method:	ANSI C63.10: 2013				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:					
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	Above 1GHz		500		3
			5000		3
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

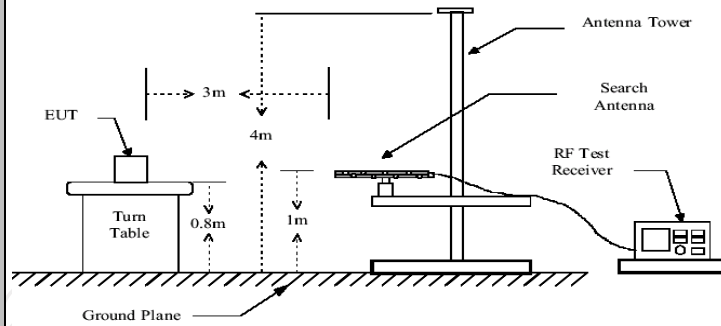

Above 1GHz

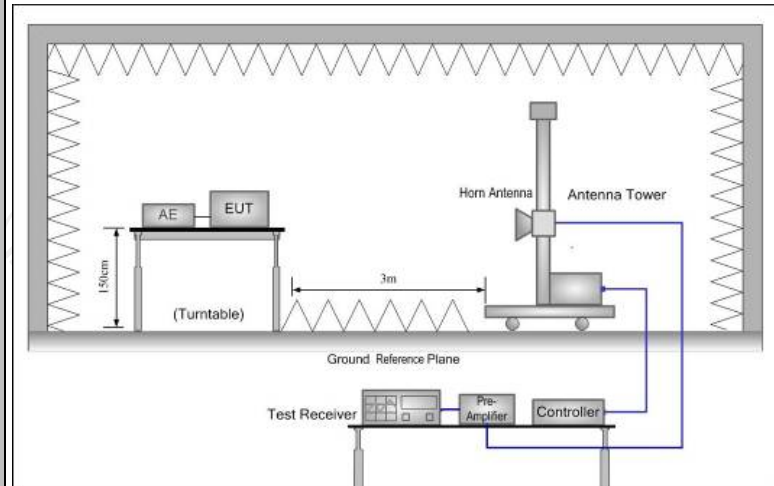

## Test Mode:

Transmitting mode with modulation

## Test Procedure:

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.  
For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT,

	<p>depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Set to the maximum power setting and enable the EUT transmit continuously.</p> <p>4. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=100 kHz for <math>f &lt; 1</math> GHz, RBW=1MHz for <math>f &gt; 1</math>GHz ; VBW<math>\geq</math>RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak</p> <p>(3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = <math>N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n</math> Where <math>N_1</math> is number of type 1 pulses, <math>L_1</math> is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + <math>20 \cdot \log(\text{Duty cycle})</math></p> <p>Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p>
<b>Test results:</b>	PASS

### 6.11.2. Test Instruments


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 11, 2016
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 11, 2016
Pre-amplifier	HP	8447D	2727A05017	Sep. 11, 2016
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 13, 2016
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9170	373	Sep. 13, 2016
Antenna Mast	CCS	CC-A-4M	N/A	N/A
Coax cable	TCT	RE-low-01	N/A	Sep. 11, 2016
Coax cable	TCT	RE-high-02	N/A	Sep. 11, 2016
Coax cable	TCT	RE-low-03	N/A	Sep. 11, 2016
Coax cable	TCT	RE-high-04	N/A	Sep. 11, 2016
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A
Semi anechoic chamber	SAEMC	Chamber-#1	DQM0274	Sep. 20, 2016

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


## 6.11.3. Test Data

### Duty cycle correction factor for average measurement

2DH5 on time (One Pulse) Plot on Channel 00

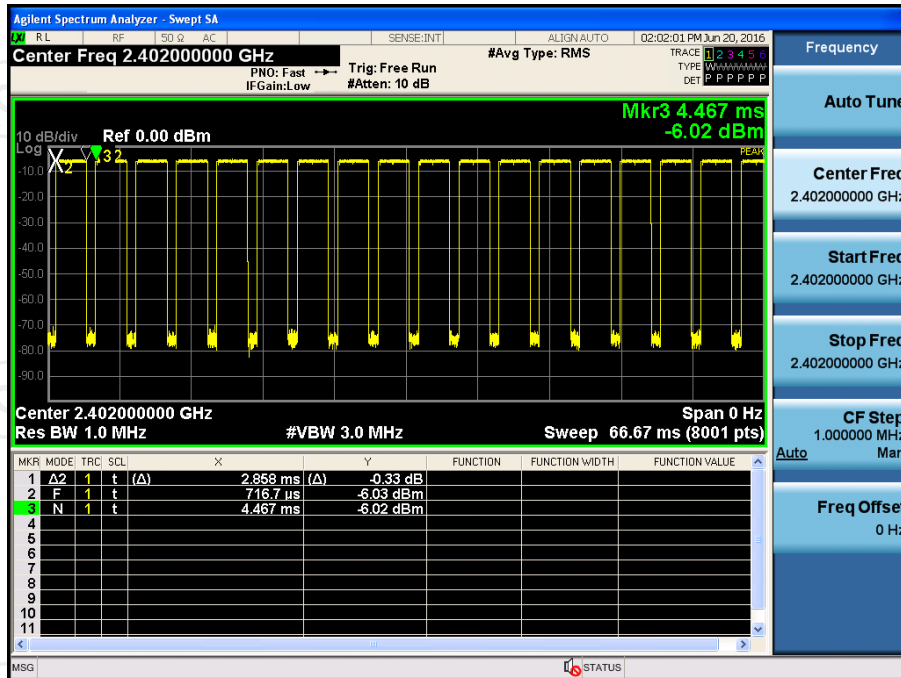

2DH5 on time (Count Pulses) Plot on Channel 00

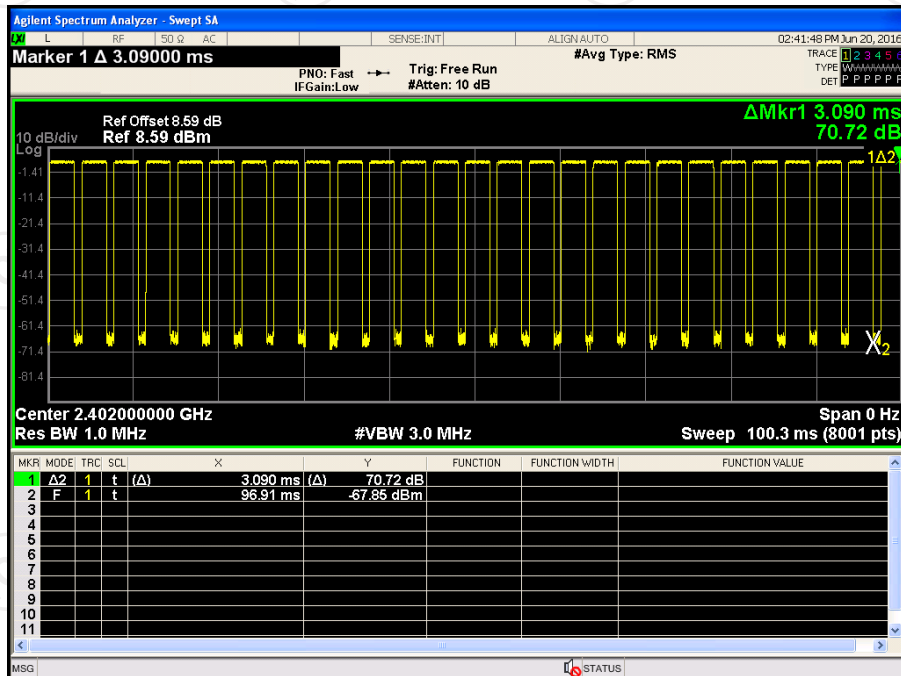

#### Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $(2.858 \times 26 + 3.090) / 100 = 0.7740$
2. Worst case Duty cycle correction factor =  $20 \times \log(\text{Duty cycle}) = -2.23 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.
4. The average levels were calculated from the peak level corrected with duty cycle correction factor (-2.23dB) derived from  $20 \log(\text{dwell time}/100 \text{ ms})$ . This correction is only for signals that hop with the fundamental signal,


such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.



Please refer to following diagram for individual

Below 1GHz

Horizontal:

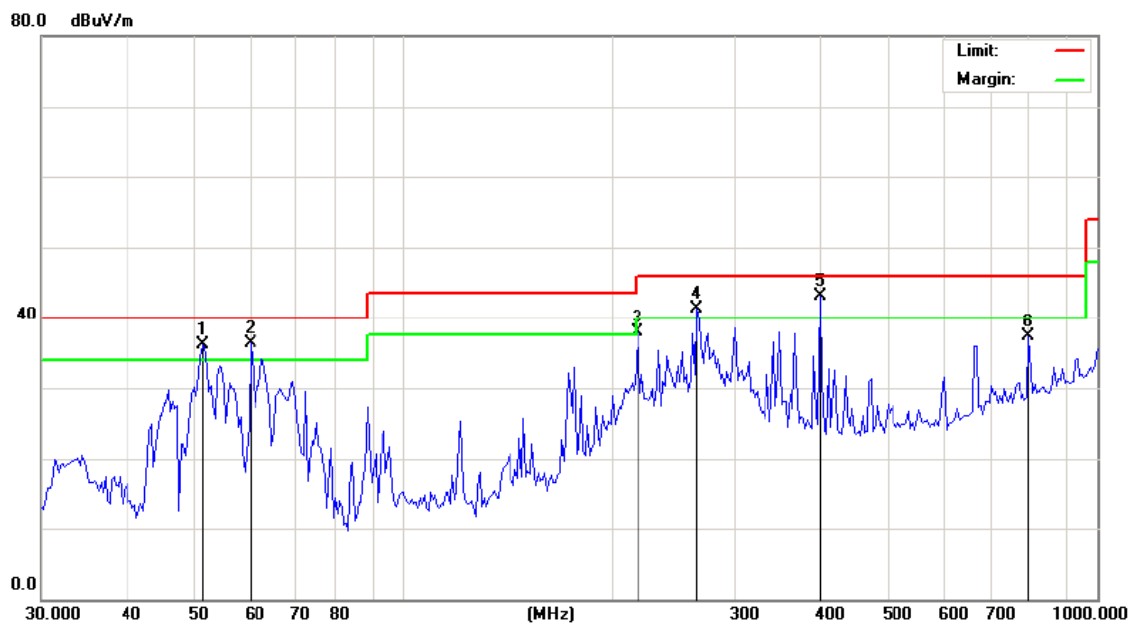

Site

Polarization: **Horizontal**

Temperature: 25

Limit: FCC Part 15B Class B RE\_3 m


Power: AC 230V/50Hz

Humidity: 54 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	!	51.1756	48.18	-12.13	36.05	40.00	-3.95	peak		0
2	!	60.1528	49.10	-12.87	36.23	40.00	-3.77	peak		0
3		217.6437	49.04	-11.06	37.98	46.00	-8.02	peak		0
4	!	264.9710	50.73	-9.45	41.28	46.00	-4.72	peak		0
5	*	398.2962	49.30	-6.23	43.07	46.00	-2.93	peak		0
6		798.6205	35.81	1.44	37.25	46.00	-8.75	peak		0



Vertical:

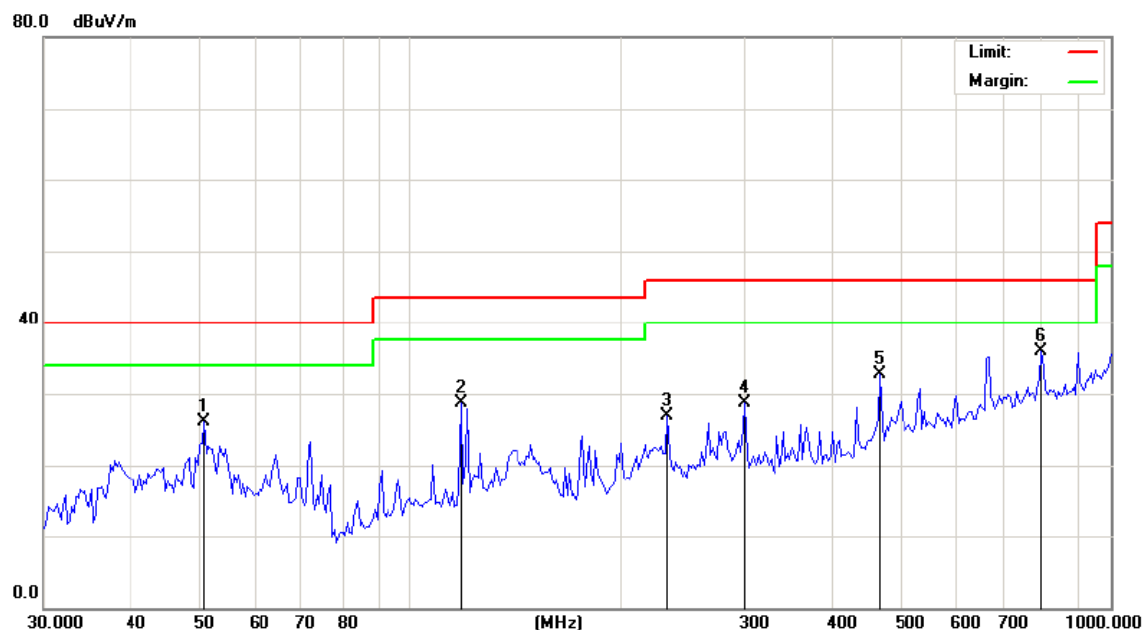

Site Polarization: **Vertical** Temperature: 25  
Limit: FCC Part 15B Class B RE\_3 m Power: AC 230V/50Hz Humidity: 54 %

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	50.8172	38.18	-12.09	26.09	40.00	-13.91	peak	0
2	118.0957	42.05	-13.35	28.70	43.50	-14.80	peak	0
3	233.4881	37.41	-10.53	26.88	46.00	-19.12	peak	0
4	300.6988	36.87	-8.25	28.62	46.00	-17.38	peak	0
5	468.1650	36.75	-3.99	32.76	46.00	-13.24	peak	0
6 *	798.6205	34.46	1.44	35.90	46.00	-10.10	peak	0

**Note:** 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (Low channel and Pi/4 DQPSK) was submitted only.

## Test Result of Radiated Spurious at Band edges

Modulation Type: GFSK

Low channel: 2402 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	Correction Factor (dB/m)	Peak Final Emission Level	Peak limit (dBμV/m)	AV limit (dBμV/m)
2310	H	45.83	-4.20	41.63	74.00	54.00
2377.38	H	48.37	-4.10	44.27	74.00	54.00
2390	H	53.40	-3.94	49.46	74.00	54.00
2310	V	44.22	-4.20	40.02	74.00	54.00
2377.38	V	54.25	-4.10	50.15	74.00	54.00
2390	V	55.77	-3.94	51.83	74.00	54.00

Modulation Type: GFSK

High channel: 2480 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	Correction Factor (dB/m)	Peak Final Emission Level	Peak limit (dBμV/m)	AV limit (dBμV/m)
2483.5	H	51.14	-3.60	47.54	74.00	54.00
2487.09	H	47.83	-3.50	44.33	74.00	54.00
2500	H	45.23	-3.34	41.89	74.00	54.00
2483.5	V	54.86	-3.60	51.26	74.00	54.00
2487.09	V	47.24	-3.50	43.74	74.00	54.00
2500	V	42.56	-3.34	39.22	74.00	54.00

Note: Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (Pi/4 DQPSK) was submitted only.

## Above 1GHz

Modulation Type: Pi/4 DQPSK

Low channel: 2402 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
2390	H	48.12	---	-8.27	39.85	---	74	54	-14.15
4804	H	40.3	---	0.66	40.96	---	74	54	-13.04
7206	H	35.14	---	9.5	44.64	---	74	54	-9.36
---	H	---	---	---	---	---	---	---	---
2390	V	47.62	---	-8.27	39.35	---	74	54	-14.65
4804	V	41.11	---	0.66	41.77	---	74	54	-12.23
7206	V	36.74	---	9.5	46.24	---	74	54	-7.76
---	V	---	---	---	---	---	---	---	---

Middle channel: 2441 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4882	H	45.69	---	0.99	46.68	---	74	54	-7.32
7323	H	38.21	---	9.87	48.08	---	74	54	-5.92
---	H	---	---	---	---	---	---	---	---
4882	V	44.87	---	0.99	45.86	---	74	54	-8.14
7323	V	37.56	---	9.87	47.43	---	74	54	-6.57
---	V	---	---	---	---	---	---	---	---

High channel: 2480 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
2483.5	H	47.33	---	-7.83	39.5	---	74	54	-14.5
4960	H	42.01	---	1.33	43.34	---	74	54	-10.66
7440	H	37.67	---	10.22	47.89	---	74	54	-6.11
---	H	---	---	---	---	---	---	---	---
2483.5	V	48.26	---	-7.83	40.43	---	74	54	-13.57
4960	V	41.7	---	1.33	43.03	---	74	54	-10.97
7440	V	36.85	---	10.22	47.07	---	74	54	-6.93
---	V	---	---	---	---	---	---	---	---

### Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK), and the worst case Mode (Pi/4 DQPSK) was submitted only.

## Appendix A: Test Result of Conducted Test

### 20dB Occupied Bandwidth

#### Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	1.097	0.96269	PASS
GFSK	MCH	1.100	0.96448	PASS
GFSK	HCH	1.095	0.96334	PASS
$\pi/4$ DQPSK	LCH	1.363	1.2353	PASS
$\pi/4$ DQPSK	MCH	1.365	1.2368	PASS
$\pi/4$ DQPSK	HCH	1.386	1.2373	PASS


#### Test Graph

##### Graphs

GFSK/LCH



GFSK/MCH

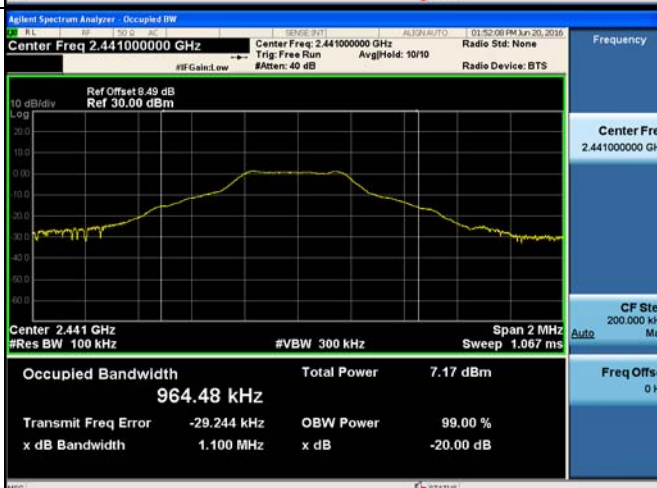

GFSK/HCH



$\pi$ /4DQPSK/LCH



$\pi$ /4DQPSK/MCH



π/4DQPSK/HCH



## Carrier Frequency Separation

Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.297	PASS
GFSK	MCH	0.999	PASS
GFSK	HCH	1.157	PASS
$\pi/4$ DQPSK	LCH	1.308	PASS
$\pi/4$ DQPSK	MCH	1.149	PASS
$\pi/4$ DQPSK	HCH	1.304	PASS

Test Graph

Graphs

GFSK/LCH



GFSK/MCH







GFSK/HCH



$\pi/4$ DQPSK/LCH

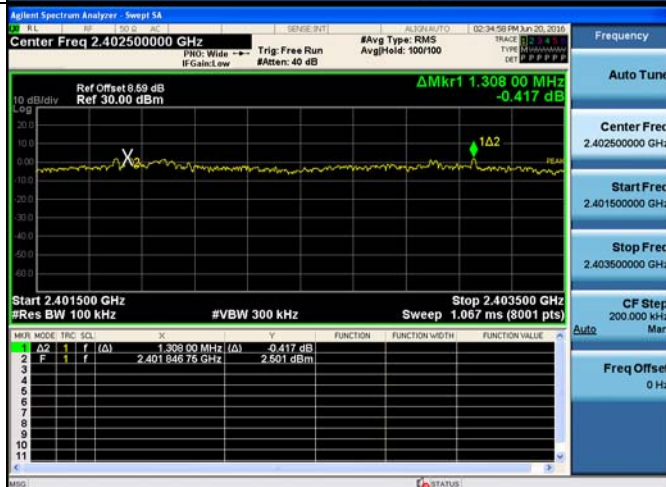

$\pi/4$ DQPSK/MCH

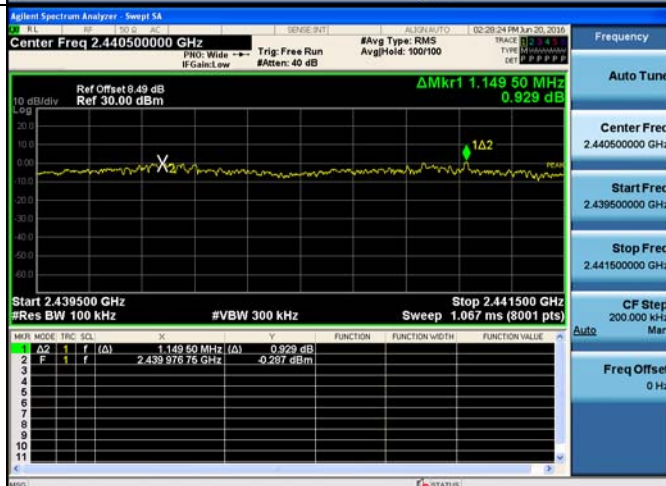

π/4DQPSK/HCH



## Dwell Time


### Result Table

The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:


- The duration for dwell time calculation:  $0.4[s] \times \text{hopping number} = 0.4[s] \times 79[\text{ch}] = 31.6[s \times \text{ch}]$ ;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6 = 266.67 [\text{ch} \times \text{hop/s}]$
- The hops per second on one channel:  $266.67 [\text{ch} \times \text{hops/s}] / 79 [\text{ch}] = 3.38 [\text{hop/s}]$ ;
- The total hops for all channels within the dwell time calculation duration:  $3.38 [\text{hop/s}] \times 31.6[s \times \text{ch}] = 106.67 [\text{hop} \times \text{ch}]$ ;
- The dwell time for all channels hopping:  $106.67 [\text{hop} \times \text{ch}] \times \text{Burst Width} [\text{ms/hop/ch}]$ .

Mode	Channel	Burst Width [ms/hop/ch]	Total Hops [hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	LCH	2.85	106.7	0.304	76.00	PASS
GFSK	MCH	2.85	106.7	0.304	76.00	PASS
GFSK	HCH	2.85	106.7	0.304	76.00	PASS
$\pi/4$ DQPSK	LCH	2.858	106.7	0.305	76.22	PASS
$\pi/4$ DQPSK	MCH	2.858	106.7	0.305	76.22	PASS
$\pi/4$ DQPSK	HCH	2.858	106.7	0.305	76.22	PASS


### Test Graph

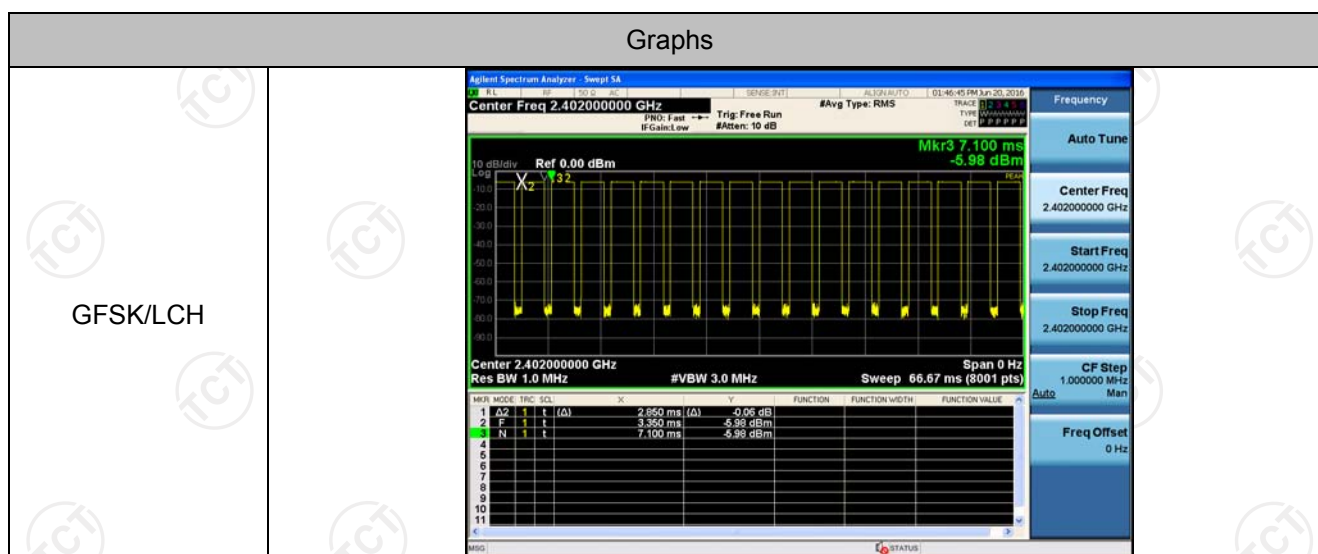


GFSK/MCH

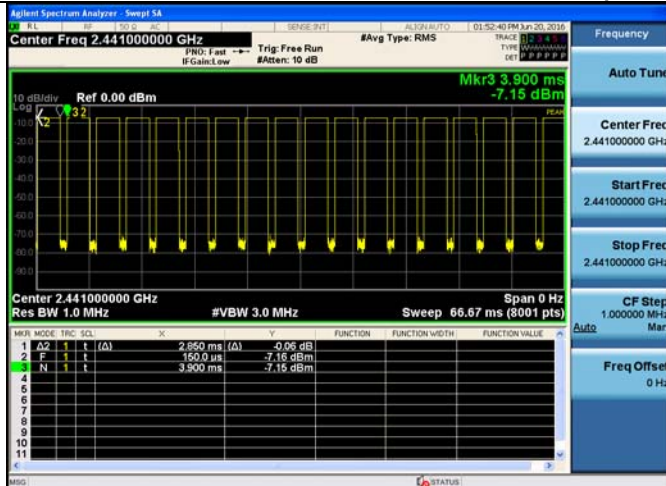


GFSK/HCH

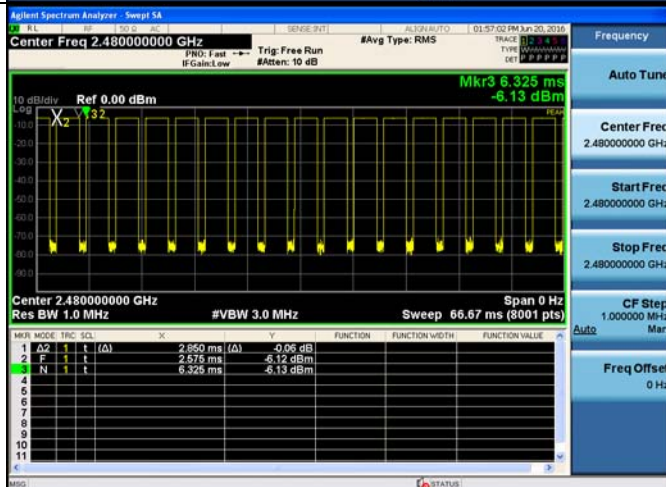


$\pi/4$ DQPSK/LCH

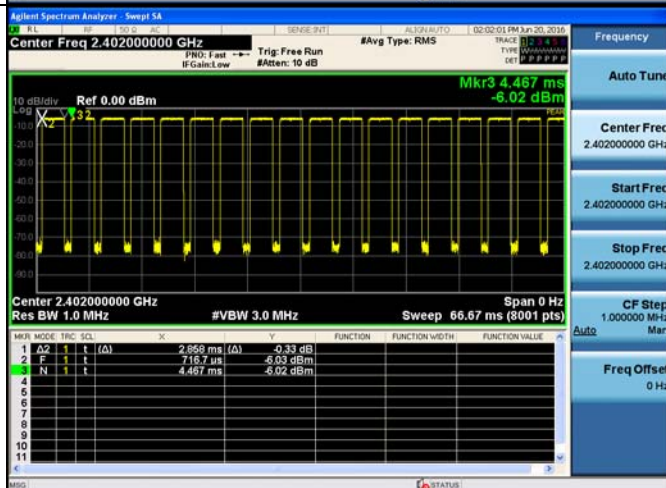

$\pi/4$ DQPSK/MCH

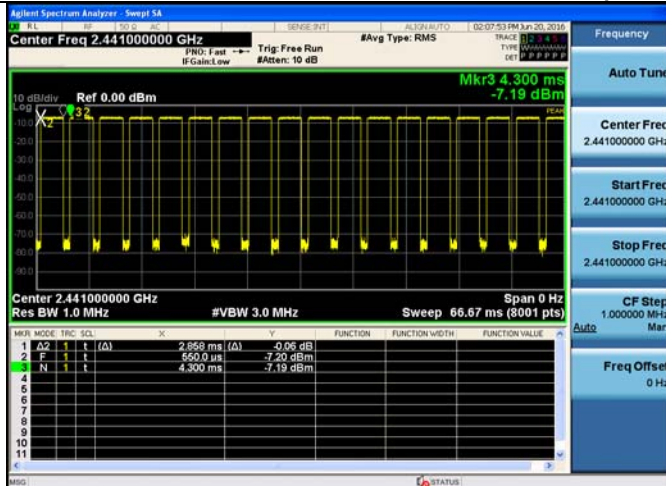

$\pi/4$ DQPSK/HCH

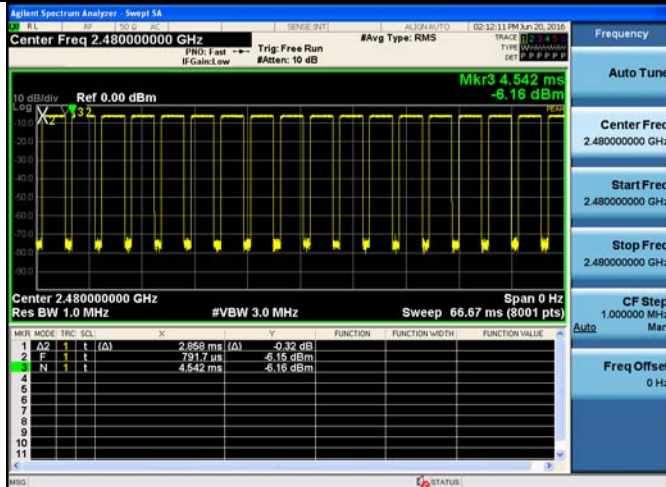




## Hopping Channel Number

### Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS

### Test Graph

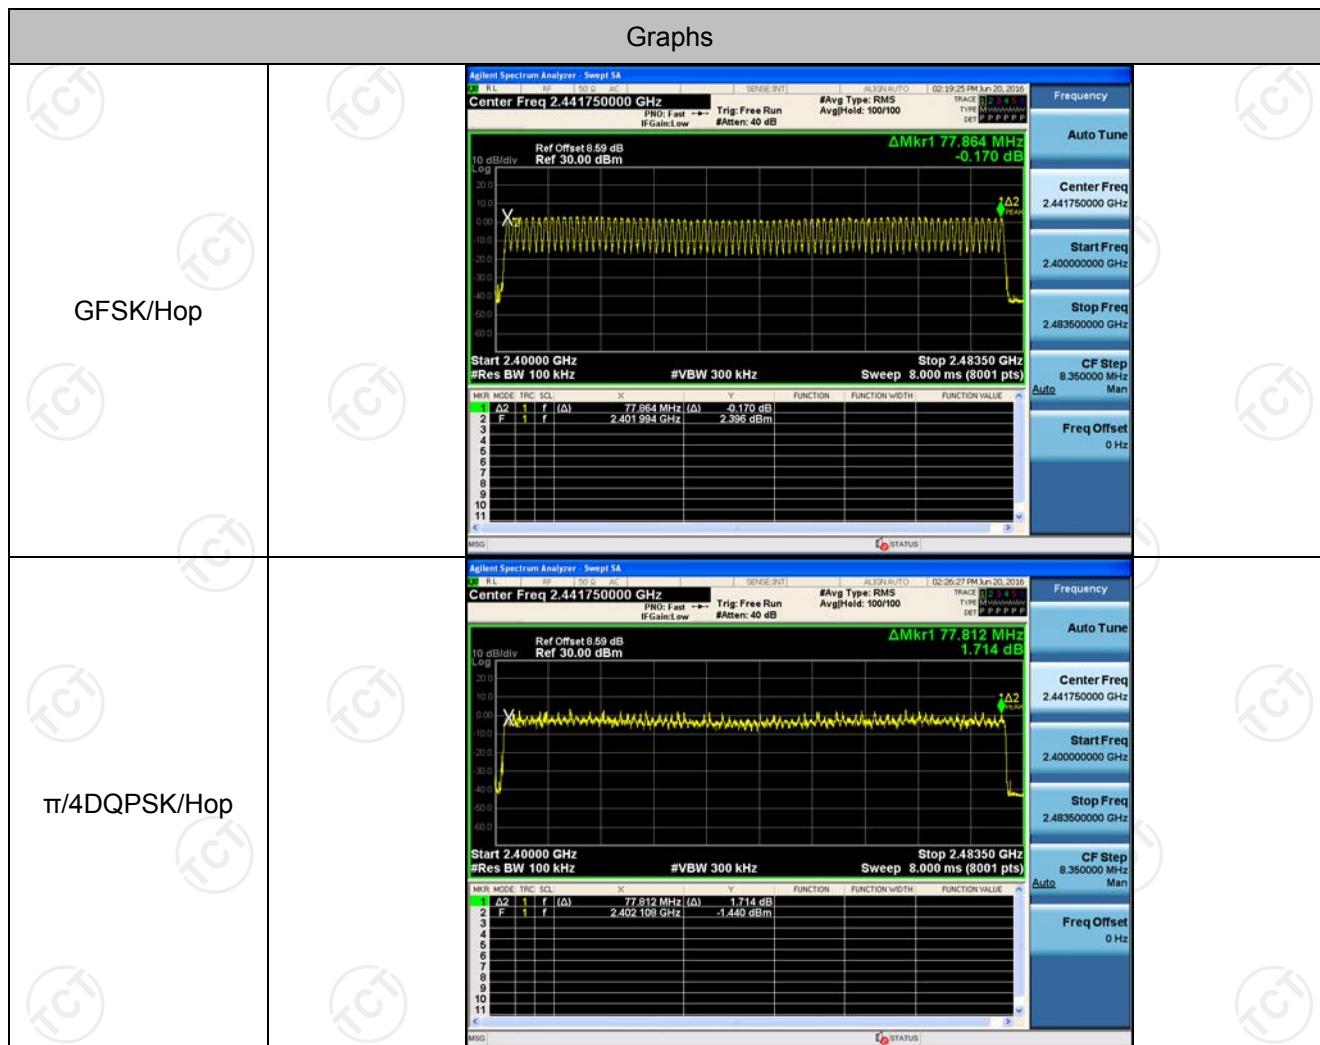

## Conducted Peak Output Power

Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	3.005	PASS
GFSK	MCH	1.768	PASS
GFSK	HCH	2.798	PASS
$\pi/4$ DQPSK	LCH	3.932	PASS
$\pi/4$ DQPSK	MCH	2.664	PASS
$\pi/4$ DQPSK	HCH	3.726	PASS

Test Graph

Graphs

GFSK/LCH



GFSK/MCH





GFSK/HCH



$\pi/4$ DQPSK/LCH



$\pi/4$ DQPSK/MCH



π/4DQPSK/HCH






## Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	2.268	Off	-50.554	-17.73	PASS
			2.098	On	-50.758	-17.9	PASS
GFSK	HCH	2480	2.193	Off	-46.081	-17.81	PASS
			1.672	On	-50.908	-18.33	PASS
$\pi$ /4DQPSK	LCH	2402	2.705	Off	-50.424	-17.3	PASS
			1.081	On	-51.628	-18.92	PASS
$\pi$ /4DQPSK	HCH	2480	1.008	Off	-47.521	-18.99	PASS
			-1.275	On	-51.066	-21.28	PASS

Test Graph

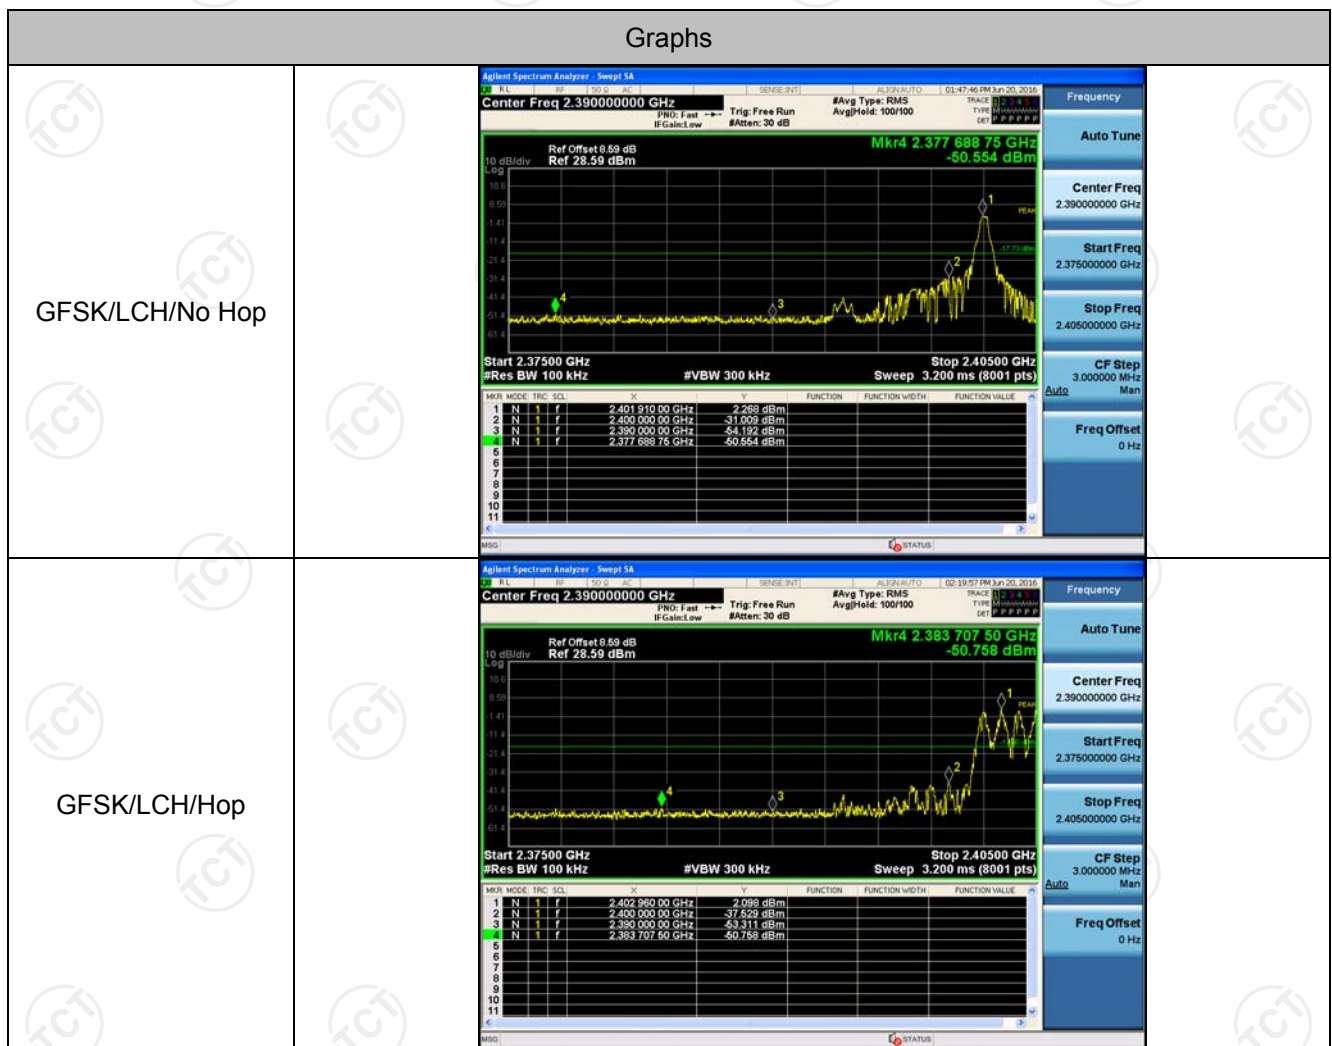
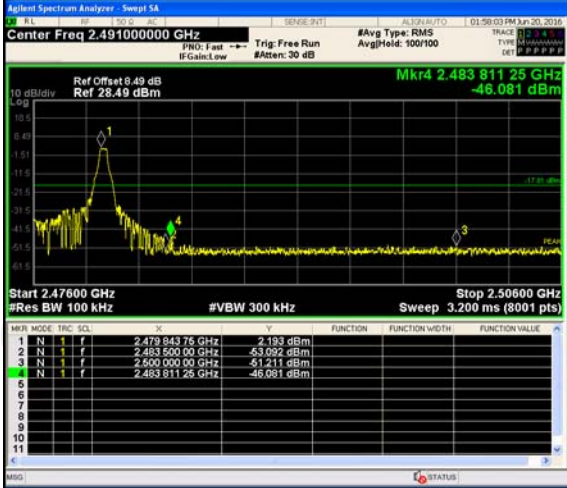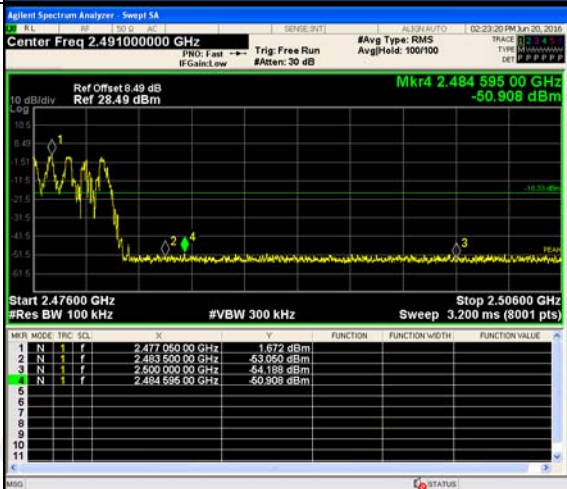
<p>GFSK/HCH/No Hop</p>	
<p>GFSK/HCH/Hop</p>	
<p><math>\pi/4</math>DQPSK/LCH/No Hop</p>	