# **FCC Test Report**

Report No.: AGC00005160601FE03

FCC ID : 2AIWB-HPL

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Bluetooth Speaker

**BRAND NAME** : N/A

**MODEL NAME** : See page 4

**CLIENT** : Skyunion Technology Co., Ltd.

**DATE OF ISSUE** : June 30, 2016

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

**REPORT VERSION** : V1.0

# Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC00005160601FE03 Page 2 of 49

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	June 30, 2016	Valid	Original Report

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM	7
5.2. EQUIPMENT USED IN EUT SYSTEM	7
5.3. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	8
TEST METHODOLOGY	8
7. ALL TEST EQUIPMENT LIST	8
8. RADIATED EMISSION	10
8.1TEST LIMIT	10
8.2. MEASUREMENT PROCEDURE	11
8.3. TEST SETUP	13
8.4. TEST RESULT	15
9. BAND EDGE EMISSION	26
9.1. MEASUREMENT PROCEDURE	26
9.2 TEST SETUP	26
9.3 RADIATED TEST RESULT	27
10. 20DB BANDWIDTH	31
10.1. MEASUREMENT PROCEDURE	31
10.2. TEST SET-UP	31
10.3. LIMITS AND MEASUREMENT RESULTS	31
11. FCC LINE CONDUCTED EMISSION TEST	38
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	38
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	38
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	39
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	39
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	40
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	44

Page 4 of 49

## 1. VERIFICATION OF CONFORMITY

Skyunion Technology Co., Ltd.			
7th Floor, Xinlong Building, No.2 Industrial Road, Dawangshan, Shajing Town, Baoan District, Shenzhen, China			
SHENZHEN CTECH SCIENCE & TECHNOLOGY CO. LTD			
Oth Floor, Xinlong Building, No.2 Industrial Road, Dawangshan, Shajing Town, aoan District, Shenzhen, China			
Bluetooth Speaker			
N/A			
SK-01			
PULSE 4000, HPL-4000, SK01, SK02, SK03, SK05, SK06, SK07, SK08, SK09			
All the same except for the appearance lines and color			
June 20,2016 to June 22,2016			
None			
Normal			
AGCRT-US-BR/RF			

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By	Time Unang			
	Time Huang(Huang Nanhui)	June 30, 2016		
Reviewed By	Lowert ce			
	Forrest Lei(Lei Yonggang)	June 30, 2016		
Approved By	selya shong			
	Solger Zhang(Zhang Hongyi) Authorized Officer	June 30, 2016		

Page 5 of 49

## 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	1.46dBm
Bluetooth Version	V2.1+EDR
Modulation	GFSK ,π /4-DQPSK, 8DPSK
Number of channels	79
Hardware Version	V2.0
Software Version	V1.2
Antenna Designation	PCB Antenna
Antenna Gain	2dBi
Power Supply	DC 3.7V

Note: 1.The MICRO USB port only used for charging and can't be used to transfer data with PC.

2. The standard USB port only used for charging for other device as power supply.

## 2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency		
	0	2402MHZ		
	1	2403MHZ		
	÷	:		
	38	2440 MHZ		
2400~2483.5MHZ	39	2441 MHZ		
	40	2442 MHZ		
	•	:		
	77	2479 MHZ		
	78	2480 MHZ		

Page 6 of 49

## 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %  $\sim$ 

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(GFSK)
2	Middle channel TX (GFSK)
3	High channel TX (GFSK)
4	Low channel TX(π/4-DQPSK)
5	Middle channel TX(π/4-DQPSK)
6	High channel TX (π/4-DQPSK)
7	Low channel TX(8DPSK)
8	Middle channel TX (8DPSK)
9	High channel TX (8DPSK)
10	BT Link with charging
11	BT Link


- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

Page 7 of 49

## **5. SYSTEM TEST CONFIGURATION**

## **5.1. CONFIGURATION OF EUT SYSTEM**

Configure 1: (Normal hopping)



**Note:** Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)



#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK	
1	Bluetooth Speaker	CTECH	SK-01	EUT	
2	Battery	FST	18650	Accessory	
3	PC	Sony	E1412AYCW	A.E	
4	Control box	GZUT	N/A	A.E	
5	Adapter	ETPCA	ETPCA-050100U3W	A.E	

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

Page 8 of 49

## **6. TEST FACILITY**

Site Dongguan Precise Testing Service Co., Ltd.	
Location  Building D,Baoding Technology Park,Guangming Road2,Dongcheng Distribution  Dongguan, Guangdong, China,	
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

## **TEST METHODOLOGY**

All measurements contained in this report were conducted with ANSI C63.10-2013.

## 7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site							
Name of Equipment	Model Number	Serial Number	Last Calibration	Due Calibration			
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016		
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016		
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016		
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017		
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A		
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2016	June 5, 2017		
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2016	June 5, 2017		
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017		
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017		
temporary antenna connector	N/A	S100		June 6, 2016	June 5, 2017		

Report No.: AGC00005160601FE03 Page 9 of 49

## FOR RADIATED EMISSION TEST (1GHZ ABOVE)

. C.	OKTABIATED EMILOGION TEGT (TOTIZ ABOVE)											
	Radiat	ted Emission Tes	t Site									
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration							
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016							
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016							
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016							
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016							
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016							
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017							
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A							
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2016	June 5, 2017							
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017							
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017							

	Conducted Emission Test Site												
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration								
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016								
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016								
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016								
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016								
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017								
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017								

Page 10 of 49

## 8. RADIATED EMISSION

#### 8.1TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency	Distance	Field	Strengths Limit				
(MHz)	Meters	μ <b>V/m</b>	dB(μV)/m				
0.009 ~ 0.490	300	2400/F(kHz)					
0.490 ~ 1.705	30	24000/F(kHz)					
1.705 ~ 30	30	30					
30 ~ 88	3	100	40.0				
88 ~ 216	3	150	43.5				
216 ~ 960	3	200	46.0				
960 ~ 1000	3	500	54.0				
Above 1000	3	Other:74.0 dB(µV)/m	(Peak)				
		54.0 dB(μV)/m	54.0 dB(μV)/m (Average)				

Remark:

- (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Page 11 of 49

#### **8.2. MEASUREMENT PROCEDURE**

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)

- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Report No.: AGC00005160601FE03 Page 12 of 49


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 13 of 49

#### 8.3. TEST SETUP

# Radiated Emission Test-Setup Frequency Below 30MHz

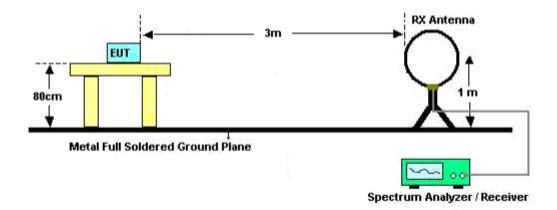


## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

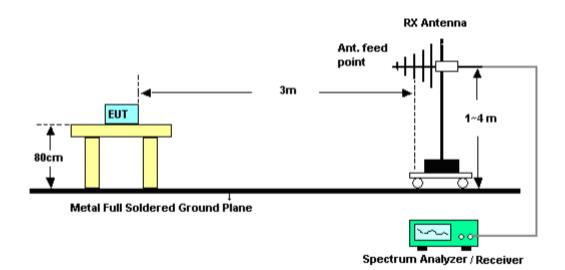

Page 14 of 49

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

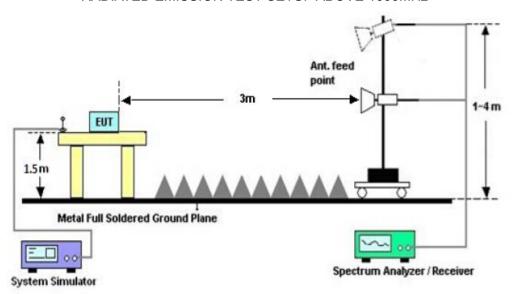

Page 15 of 49


#### 8.4. TEST RESULT(Worst modulation: GFSK **High Channel)**

## **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHZ**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

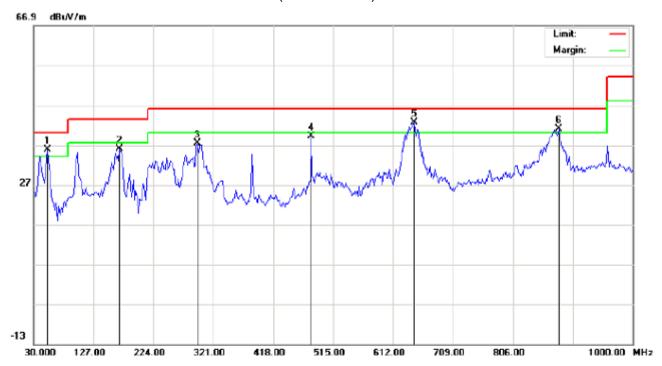

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: SK-01

Mode: High Channel TX

Note:

Polarization:	Horizontal	Temperature: 23.5
Power:		Humidity: 54.5 %
Distance:		


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu√/m	dBu∀/m	dB		cm	degree	
1	ļ	52.6332	27.40	8.41	35.81	40.00	-4.19	peak			
2		169.0331	25.41	10.66	36.07	43.50	-7.43	peak			
3		295.1333	22.74	14.58	37.32	46.00	-8.68	peak			
4		479.4331	18.24	20.91	39.15	46.00	-6.85	peak			
5	*	645.9500	18.80	23.84	42.64	46.00	-3.36	peak			
6	İ	880.3667	12.94	28.10	41.04	46.00	-4.96	peak			

Temperature: 23.5

Humidity: 54.5 %

Page 16 of 49

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

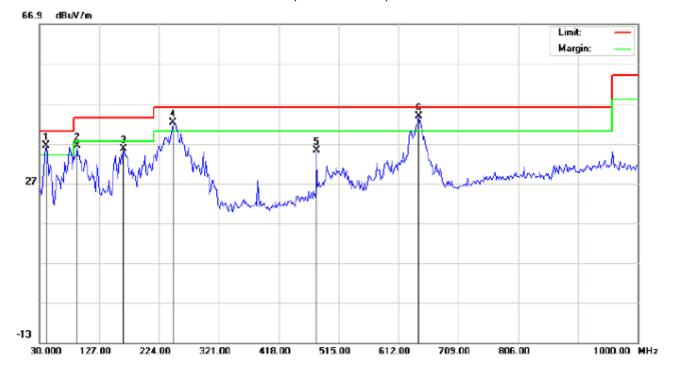

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: SK-01

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu√/m	dB		cm	degree	
1	į	41.3166	27.53	8.81	36.34	40.00	-3.66	peak			
2		91.4333	32.26	4.16	36.42	43.50	-7.08	peak			
3		165.8000	20.72	14.96	35.68	43.50	-7.82	peak			
4	į	246.6331	28.69	13.57	42.26	46.00	-3.74	peak			
5		479.4331	14.32	20.91	35.23	46.00	-10.77	peak			
6	*	644.3333	20.04	23.72	43.76	46.00	-2.24	peak			

Power:

Distance:

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


- 2. The "Factor" value can be calculated automatically by software of measurement system.
  - 3. All modes have been tested and only the worst mode test data recorded in the test report.

Page 17 of 49

#### **RADIATED EMISSION ABOVE 1GHZ**

(Worst modulation: GFSK)

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

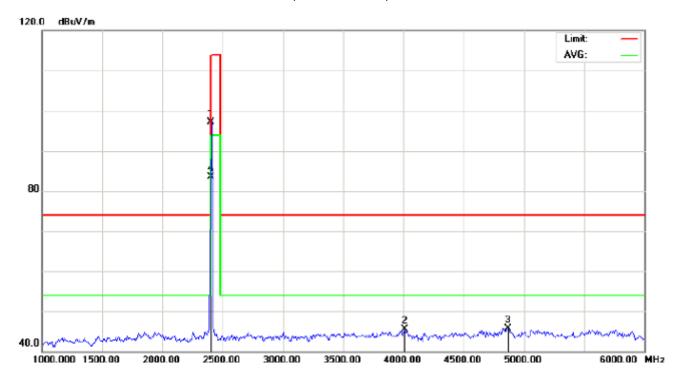

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power:
EUT: Bluetooth Speaker Distance: 3m

M/N: SK-01


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu\//m	dB		cm	degree	
1		2402.000	106.75	-9.68	97.07	114.00	-16.93	peak			
2		4008.333	50.19	-4.78	45.41	74.00	-28.59	peak			
3		4866.667	47.84	-2.15	45.69	74.00	-28.31	peak			
4	*	2402.000	93.20	-9.68	83.52	94.00	-10.48	AVG	100	17	

Page 18 of 49

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

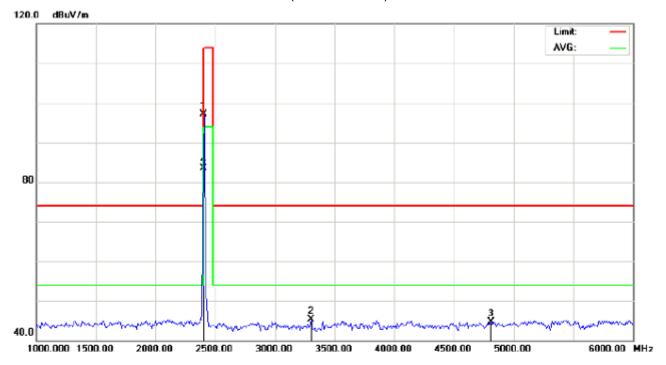

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: SK-01


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	106.72	-9.68	97.04	114.00	-16.96	peak			
2		3300.000	53.35	-8.08	45.27	74.00	-28.73	peak			
3		4808.333	47.07	-2.30	44.77	74.00	-29.23	peak			
4	×	2402.000	93.15	-9.68	83.47	94.00	-10.53	AVG	100	153	

Page 19 of 49

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

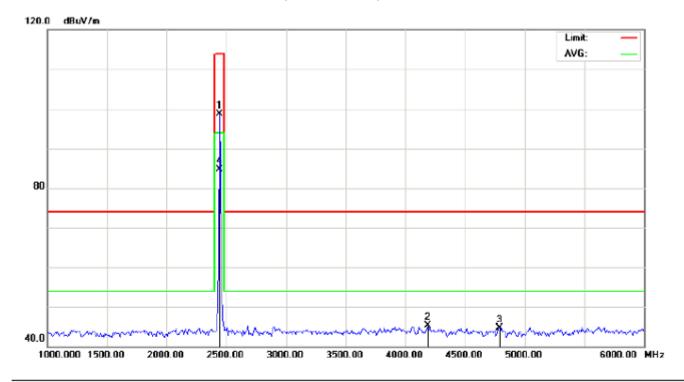

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: SK-01


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	108.32	-9.63	98.69	114.00	-15.31	peak			
2		4191.667	49.40	-4.16	45.24	74.00	-28.76	peak			
3		4791.667	47.15	-2.35	44.80	74.00	-29.20	peak			
4	*	2441.000	94.39	-9.63	84.76	94.00	-9.24	AVG	100	19	

Page 20 of 49

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

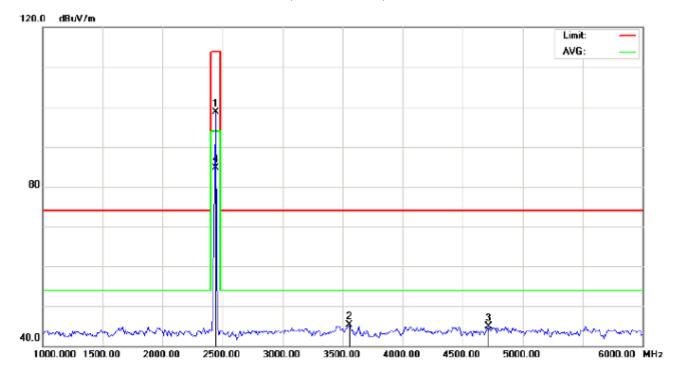

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: SK-01


Mode: Middle Channel TX

Note:

N	0.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu√/m	dBu∀/m	dB		cm	degree	
	1		2441.000	108.26	-9.63	98.63	114.00	-15.37	peak			
	2		3558.333	52.78	-7.53	45.25	74.00	-28.75	peak			
[	3		4716.667	47.53	-2.54	44.99	74.00	-29.01	peak			
	4	*	2441.000	94.25	-9.63	84.62	94.00	-9.38	AVG	100	155	

Page 21 of 49

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

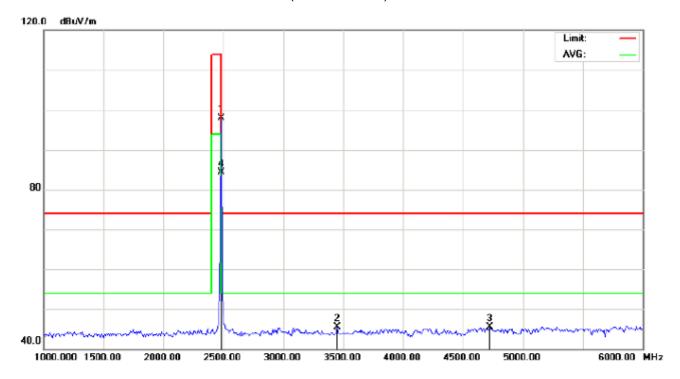

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: SK-01


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	107.43	-9.59	97.84	114.00	-16.16	peak			
2		3450.000	53.44	-7.94	45.50	74.00	-28.50	peak			
3		4725.000	47.95	-2.52	45.43	74.00	-28.57	peak			
4	*	2480.000	93.80	-9.59	84.21	94.00	-9.79	AVG	100	13	

Page 22 of 49

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

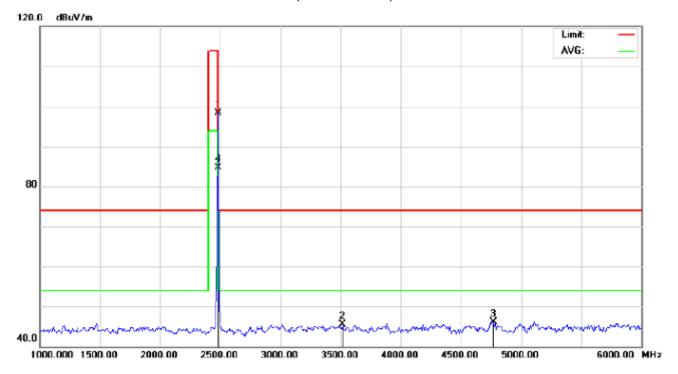

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance: 3m

M/N: SK-01

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB	<u>.                                    </u>	cm	degree	
1		2480.000	107.83	-9.59	98.24	114.00	-15.76	peak			
2		3516.667	53.39	-7.79	45.60	74.00	-28.40	peak			
3		4766.667	48.44	-2.41	46.03	74.00	-27.97	peak			
4	*	2480.000	94.20	-9.59	84.61	94.00	-9.39	AVG	100	151	

#### **RESULT: PASS**

Note:  $6\sim25\text{GHz}$  at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC00005160601FE03 Page 23 of 49

# Field strength of the fundamental signal

# 1Mbps Result:

## Peak value

Frequency	Reading Level Factor		Measurement	Limit	Over	Antenna
(MHz)	MHz) (dBuv)		(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.75	-9.68	97.07	114	-16.93	Horizontal
2402	106.72	-9.68	97.04	114	-16.96	Vertical
2441	108.32	-9.63	98.69	114	-15.31	Horizontal
2441	108.26	-9.63	98.63	114	-15.37	Vertical
2480	107.43	-9.59	97.84	114	-16.16	Horizontal
2480	107.83	-9.59	98.24	114	-15.76	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	93.20	-9.68	83.52	94	-10.48	Horizontal
2402	93.15	-9.68	83.47	94	-10.53	Vertical
2441	94.39	-9.63	84.76	94	-9.24	Horizontal
2441	94.25	-9.63	84.62	94	-9.38	Vertical
2480	93.80	-9.59	84.21	94	-9.79	Horizontal
2480	94.20	-9.59	84.61	94	-9.39	Vertical

Report No.: AGC00005160601FE03 Page 24 of 49

# 2Mbps Result:

# Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.54	-9.68	96.86	114	-17.14	Horizontal
2402	106.43	-9.68	96.75	114	-17.25	Vertical
2441	107.81	-9.68	98.13	114	-15.87	Horizontal
2441	107.70	-9.68	98.02	114	-15.98	Vertical
2480	107.52	-9.63	97.89	114	-16.11	Horizontal
2480	107.30	-9.63	97.67	114	-16.33	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(MHz) (dBuv)		(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.75	-9.63	83.12	94	-10.88	Horizontal
2402	92.71	-9.63	83.08	94	92.71	Vertical
2441	93.80	-9.59	84.21	94	-9.79	Horizontal
2441	93.75	-9.59	84.16	94	-9.84	Vertical
2480	93.74	-9.59	84.15	94	-9.85	Horizontal
2480	93.70	-9.59	84.11	94	-9.89	Vertical

Report No.: AGC00005160601FE03 Page 25 of 49

# 3Mbps Result:

# Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.30	-9.68	96.62	114	-17.38	Horizontal
2402	106.21	-9.68	96.53	114	-17.47	Vertical
2441	107.57	-9.68	97.89	114	-16.11	Horizontal
2441	107.40	-9.68	97.72	114	-16.28	Vertical
2480	107.04	-9.63	97.41	114	-16.59	Horizontal
2480	106.92	-9.63	97.29	114	-16.71	Vertical

# Average value

•						
Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.29	-9.63	82.66	94	-11.34	Horizontal
2402	92.12	-9.63	82.49	94	-11.51	Vertical
2441	93.56	-9.59	83.97	94	-10.03	Horizontal
2441	93.34	-9.59	83.75	94	-10.25	Vertical
2480	93.46	-9.59	83.87	94	-10.13	Horizontal
2480	93.15	-9.59	83.56	94	-10.44	Vertical

Page 26 of 49


## 9. BAND EDGE EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

#### 9.2 TEST SETUP

#### RADIATED EMISSION TEST SETUP

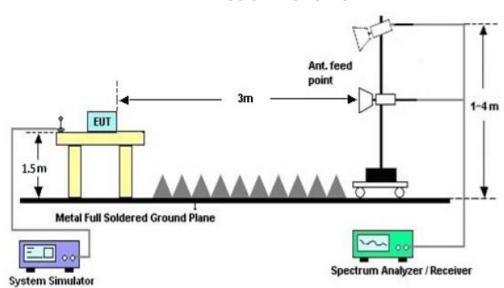


Page 27 of 49

#### 9.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

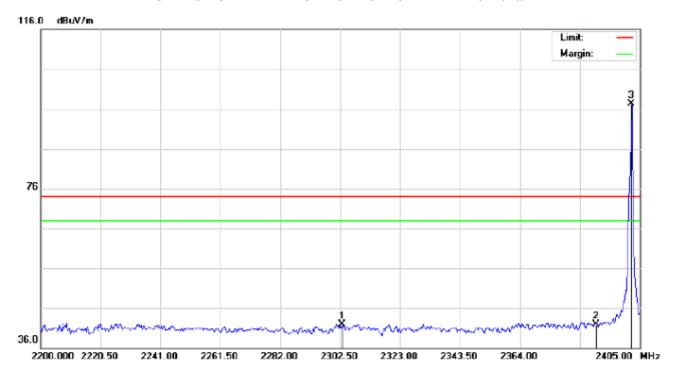

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:

M/N: SK-01

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2303.183	31.66	10.21	41.87	74.00	-32.13	peak			
2		2390.000	31.62	10.31	41.93	74.00	-32.07	peak			
3	*	2402.000	86.91	10.32	97.23	74.00	23.23	peak			

Page 28 of 49

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:


M/N: SK-01

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2255.350	32.67	10.16	42.83	74.00	-31.17	peak			
2		2390.000	32.35	10.31	42.66	74.00	-31.34	peak			
3	*	2402.000	86.76	10.32	97.08	74.00	23.08	peak			

Page 29 of 49

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

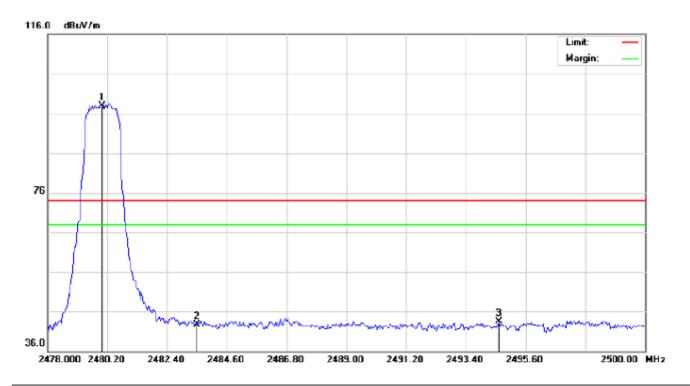

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:

M/N: SK-01

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.46	10.41	97.87	74.00	23.87	peak			
2		2483.500	32.25	10.41	42.66	74.00	-31.34	peak			
3		2494.610	33.07	10.42	43.49	74.00	-30.51	peak			

Page 30 of 49

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Distance:

M/N: SK-01

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.85	10.41	98.26	74.00	24.26	peak			
2		2483.500	30.37	10.41	40.78	74.00	-33.22	peak			
3		2492.080	32.36	10.42	42.78	74.00	-31.22	peak			

#### **RESULT: PASS**

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 31 of 49


# 10. 20DB BANDWIDTH

#### 10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

#### 10.2. TEST SET-UP

## (BLOCK DIAGRAM OF CONFIGURATION)

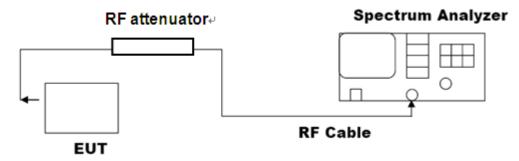


Note: The EUT has been used temporary antenna connector for testing.

## 10.3. LIMITS AND MEASUREMENT RESULTS


#### FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT						
Applicable Limits	Measurement Result					
	Test Data (MHz)			Dogult		
		99%OBW (MHz)	-20dB BW(MHz)	Result		
N/A	Low Channel	0.906	1.075	PASS		
	Middle Channel	0.891	1.076	PASS		
	High Channel	0.906	1.065	PASS		

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

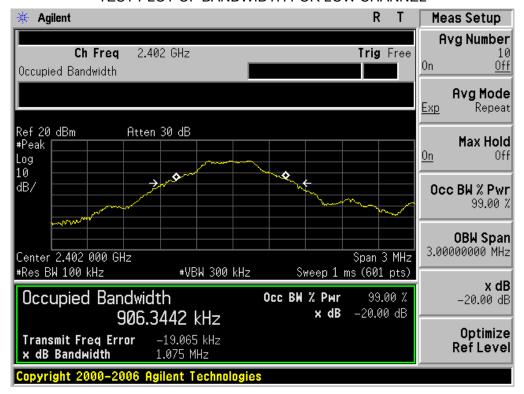


#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

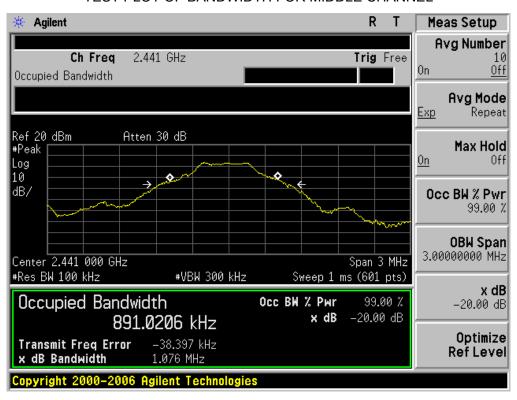

Page 33 of 49


#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

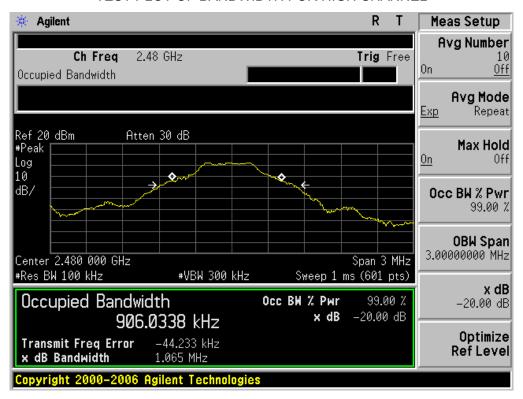

Report No.: AGC00005160601FE03 Page 34 of 49


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT							
	Measurement Result						
Applicable Limits	Test Data (MHz)			Dooule			
		99%OBW (MHz)	-20dB BW(MHz)	Result			
N/A	Low Channel	1.216	1.384	PASS			
	Middle Channel	1.202	1.364	PASS			
	High Channel	1.210	1.350	PASS			

## TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

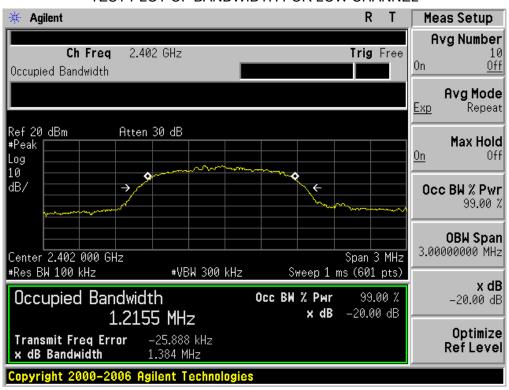


Page 35 of 49

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

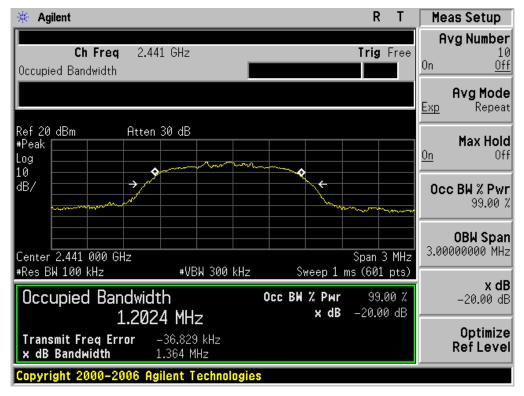


#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

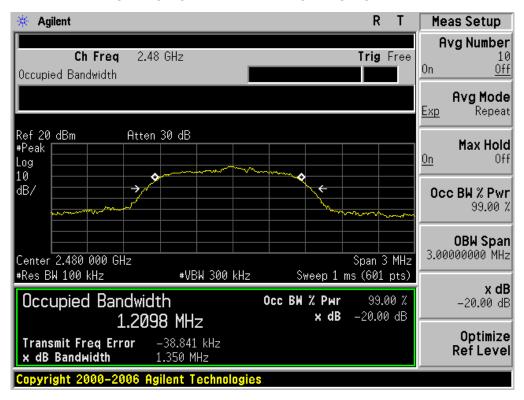

Report No.: AGC00005160601FE03 Page 36 of 49


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT						
Applicable Limits	Measurement Result					
	Test Data (MHz)			Deculé		
		99%OBW (MHz)	-20dB BW(MHz)	Result		
N/A	Low Channel	1.210	1.361	PASS		
	Middle Channel	1.224	1.374	PASS		
	High Channel	1.216	1.374	PASS		

## TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

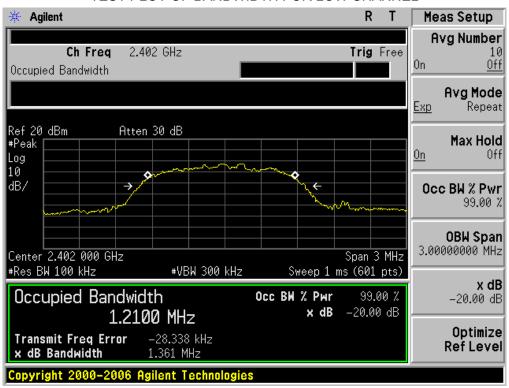


Page 37 of 49

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

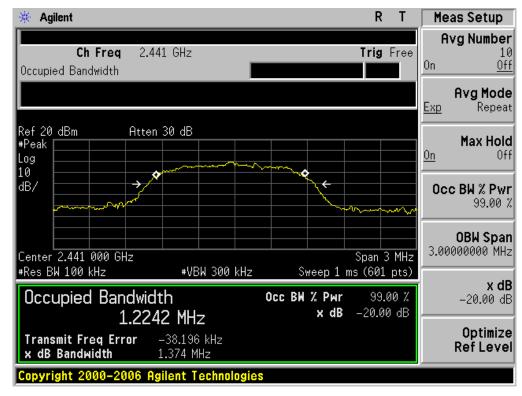

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

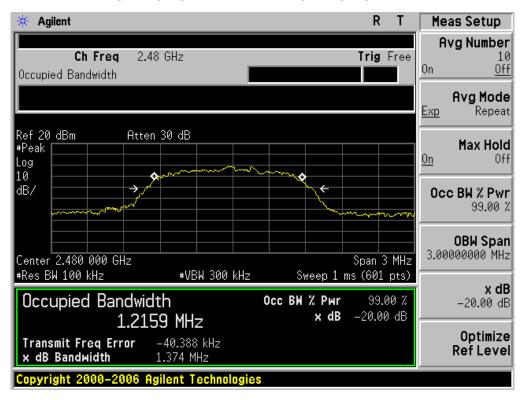

Page 38 of 49

### 11. FCC LINE CONDUCTED EMISSION TEST


### 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage								
Frequency	Q.P.( dBuV)	Average( dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	56	46							
5MHz~30MHz	60	50							

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

# 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

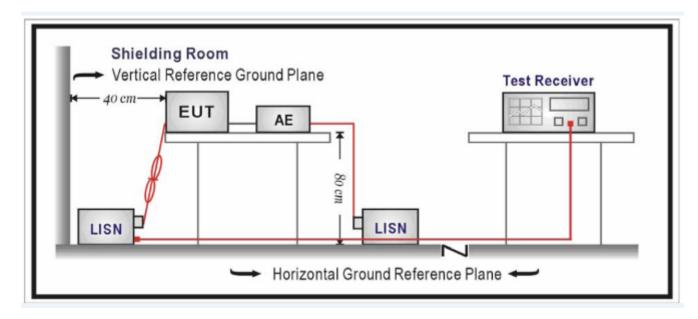

Page 39 of 49

#### 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Temperature: 23.5


Humidity: 54.5 %

Page 40 of 49

# 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

# By adapter(worst case)

Line Conducted Emission Test Line 1-L

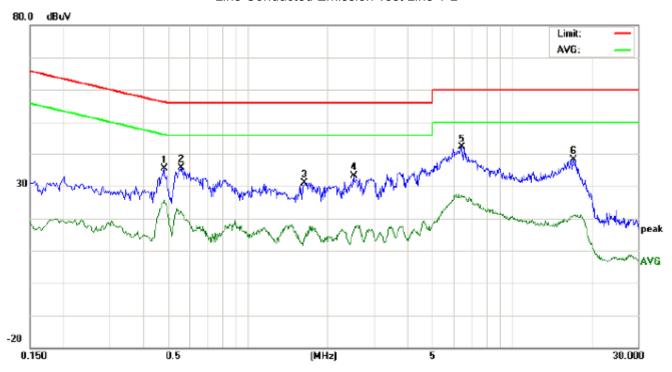

Phase:

Power:

L1

Site: Conduction

Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Speaker

M/N: SK-01


Mode: BT Link with charging

Note:

No. Freq. (MHz)		Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	Q.	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4820	24.91		15.30	10.39	35.30		25.69	56.30	46.30	-21.00	-20.61	Р	
2	0.5581	25.24		11.88	10.35	35.59		22.23	56.00	46.00	-20.41	-23.77	Р	
3	1.6420	20.65		3.47	10.33	30.98		13.80	56.00	46.00	-25.02	-32.20	Р	
4	2.5180	22.63		5.93	10.43	33.06		16.36	56.00	46.00	-22.94	-29.64	Р	
5	6.4659	31.88		16.95	10.30	42.18		27.25	60.00	50.00	-17.82	-22.75	Р	
6	17.1939	28.08		10.67	10.13	38.21		20.80	60.00	50.00	-21.79	-29.20	Р	

Page 41 of 49

# Line Conducted Emission Test Line 2-N

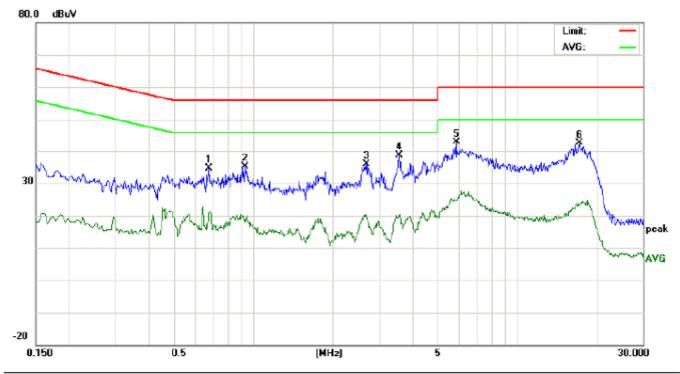

Site: Conduction Phase: N Temperature: 23.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 54.5 %

EUT: Bluetooth Speaker

M/N: SK-01

Mode: BT Link with charging

Note:

No. Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.6820	24.39		10.55	10.34	34.73		20.89	56.00	46.00	-21.27	-25.11	Р	
2	0.9300	24.65		8.33	10.40	35.05		18.73	56.00	46.00	-20.95	-27.27	Ρ	
3	2.6980	25.30		8.55	10.48	35.78		19.03	56.00	46.00	-20.22	-26.97	Р	
4	3.5700	28.22		9.57	10.50	38.72		20.07	56.00	46.00	-17.28	-25.93	Р	
5	5.8739	32.59		14.61	10.27	42.86		24.88	60.00	50.00	-17.14	-25.12	Р	
6	17.2219	32.50		13.32	10.13	42.63		23.45	60.00	50.00	-17.37	-26.55	Р	


Page 42 of 49


# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

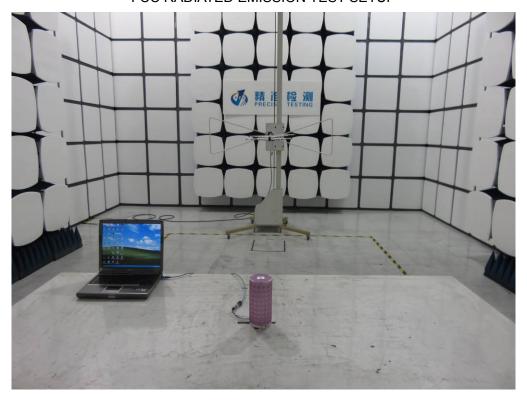


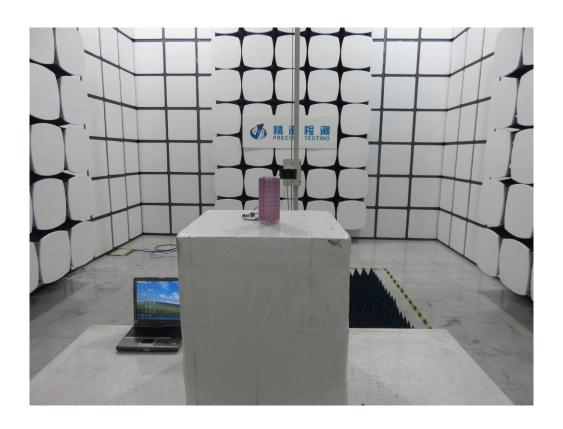


Page 44 of 49

# **APPENDIX B: PHOTOGRAPHS OF EUT**


TOP VIEW OF EUT

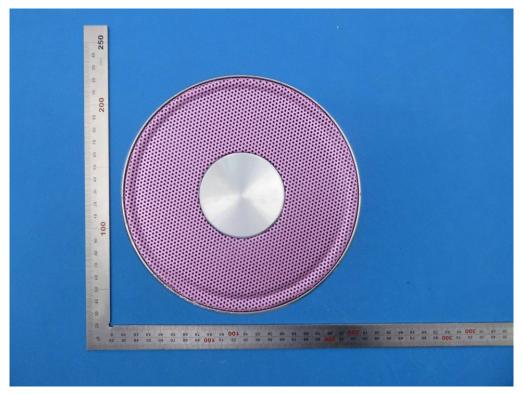


**BOTTOM VIEW OF EUT** 

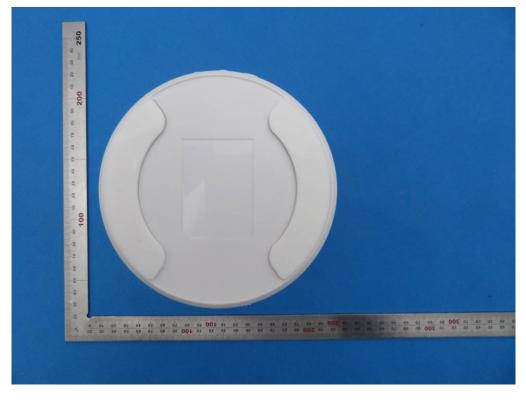


FRONT VIEW OF EUT

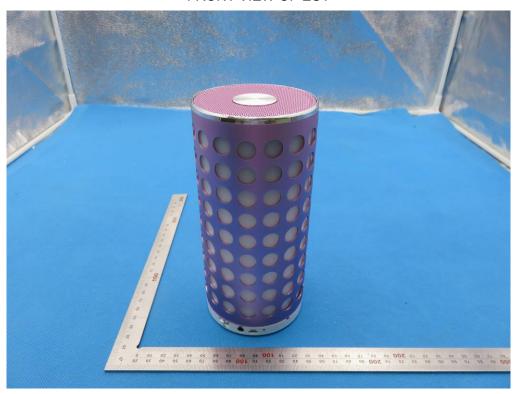


**BACK VIEW OF EUT** 

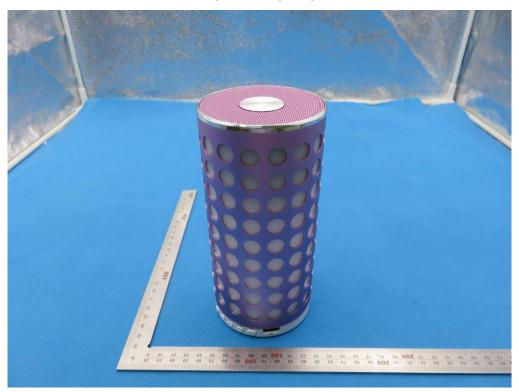

LEFT VIEW OF EUT

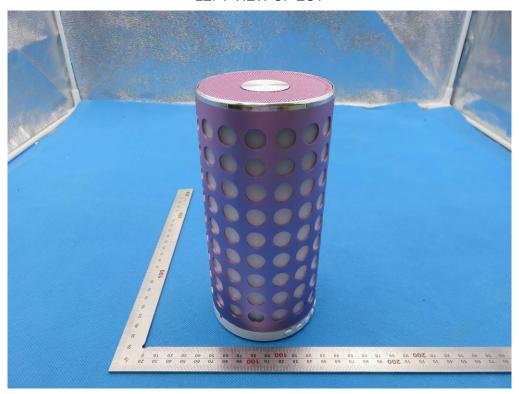

RIGHT VIEW OF EUT

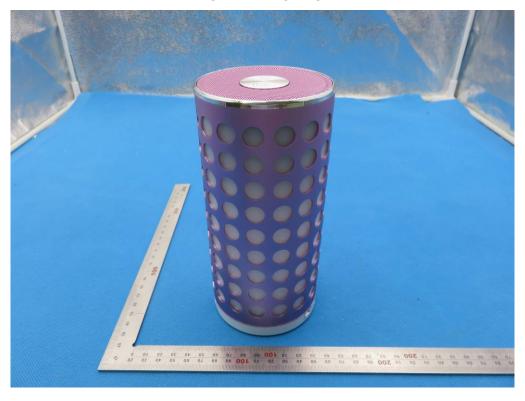


VIEW OF EUT (PORT)-1




VIEW OF EUT (PORT)-2




**OPEN VIEW OF EUT** 

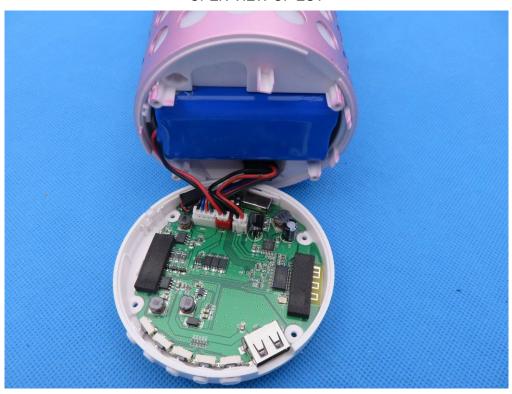


**INTERNAL VIEW OF EUT-1** 

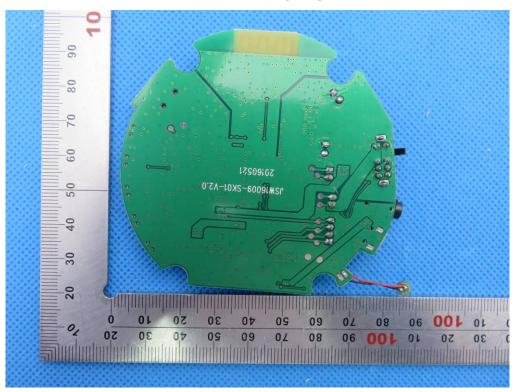

# **INTERNAL VIEW OF EUT-2**

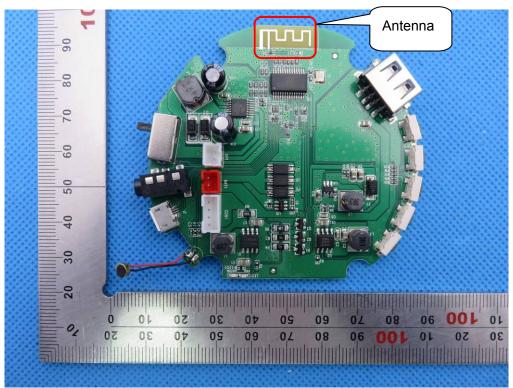

**INTERNAL VIEW OF EUT-3** 

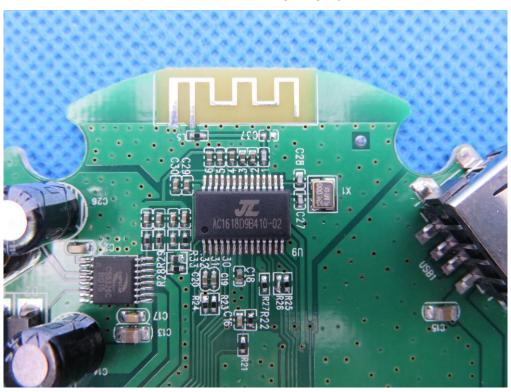

----END OF REPORT----