


Appendix B
RF Test Data for BT V4.2(DTS) (Conducted Measurement)
Product Name: Bluetooth Speaker
Trade Mark: Origaudio
Test Model: THUMPAH

Environmental Conditions

Temperature:	22.3 ° C
Relative Humidity:	53.0%
ATM Pressure:	100.0 kPa
Test Engineer:	Qu Xin
Supervised by:	Tom Liu


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

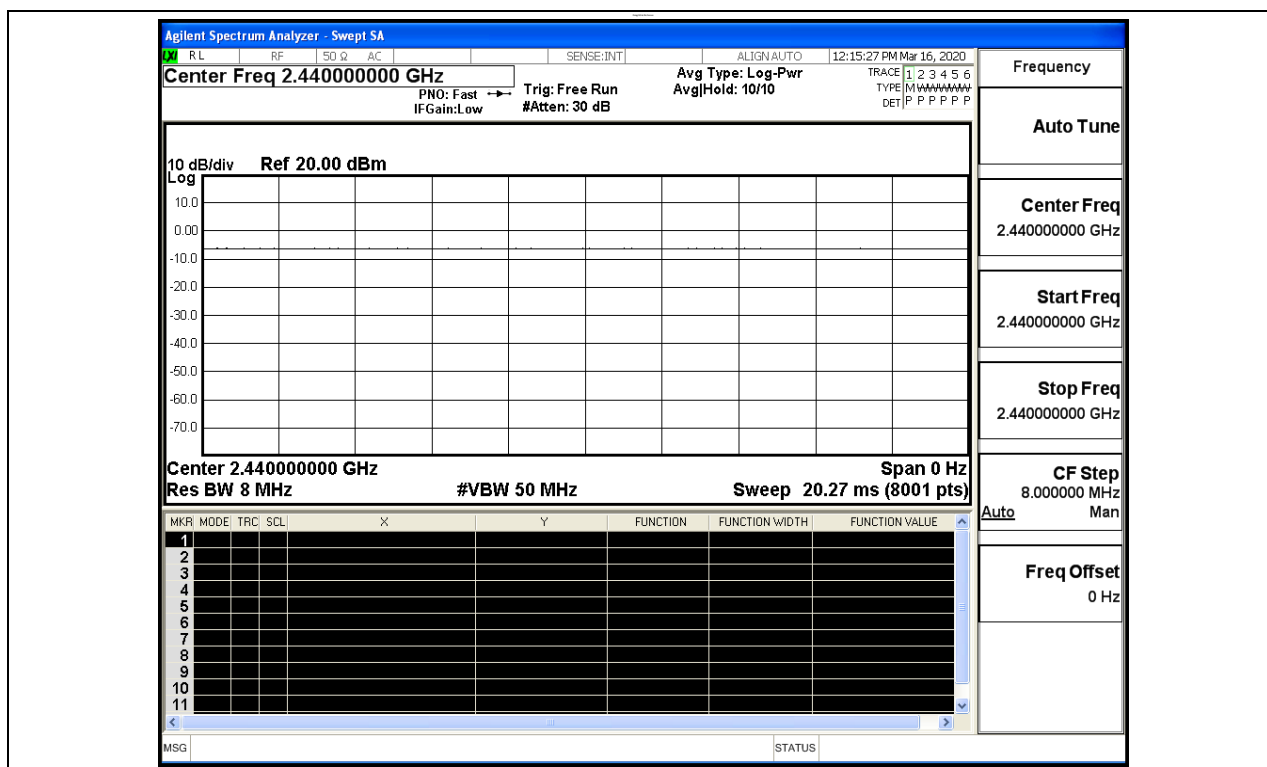


B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.746	30	PASS
BT LE	MCH	1.677	30	PASS
BT LE	HCH	1.304	30	PASS

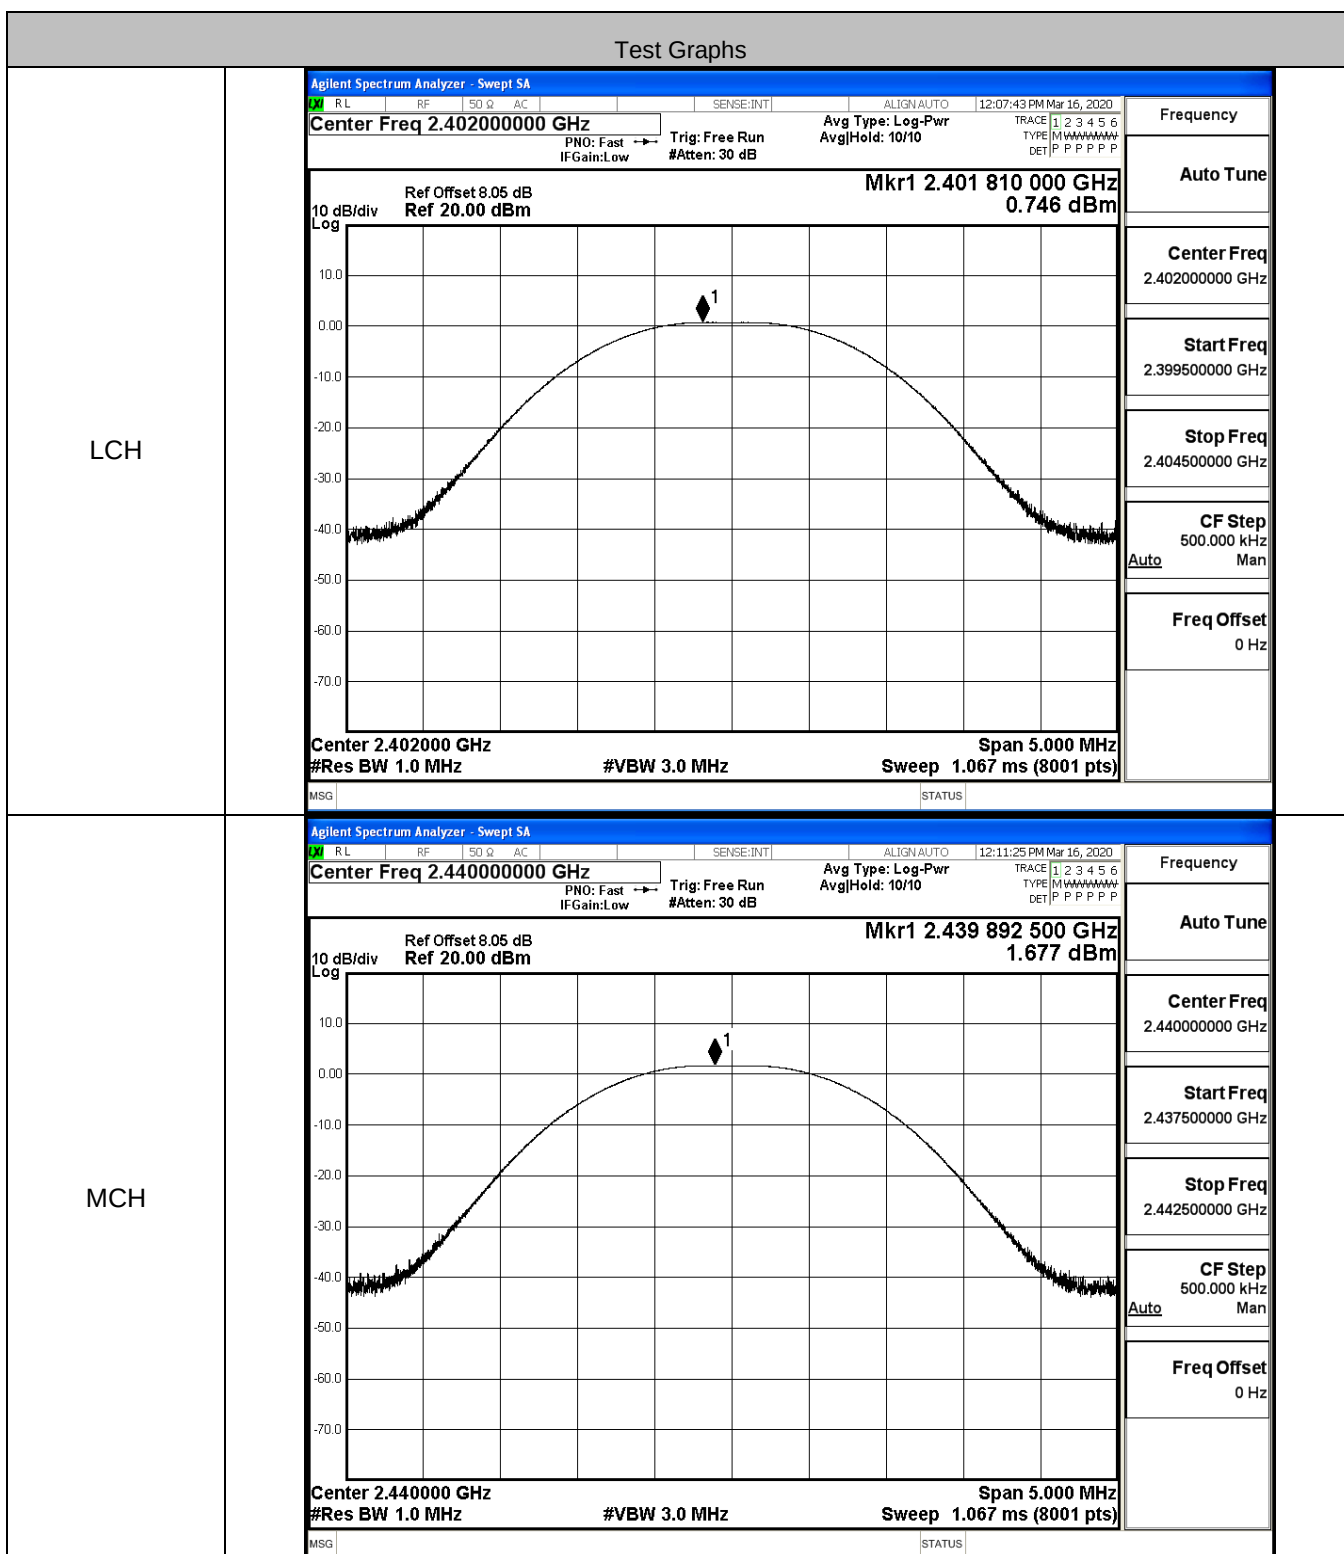

HCH

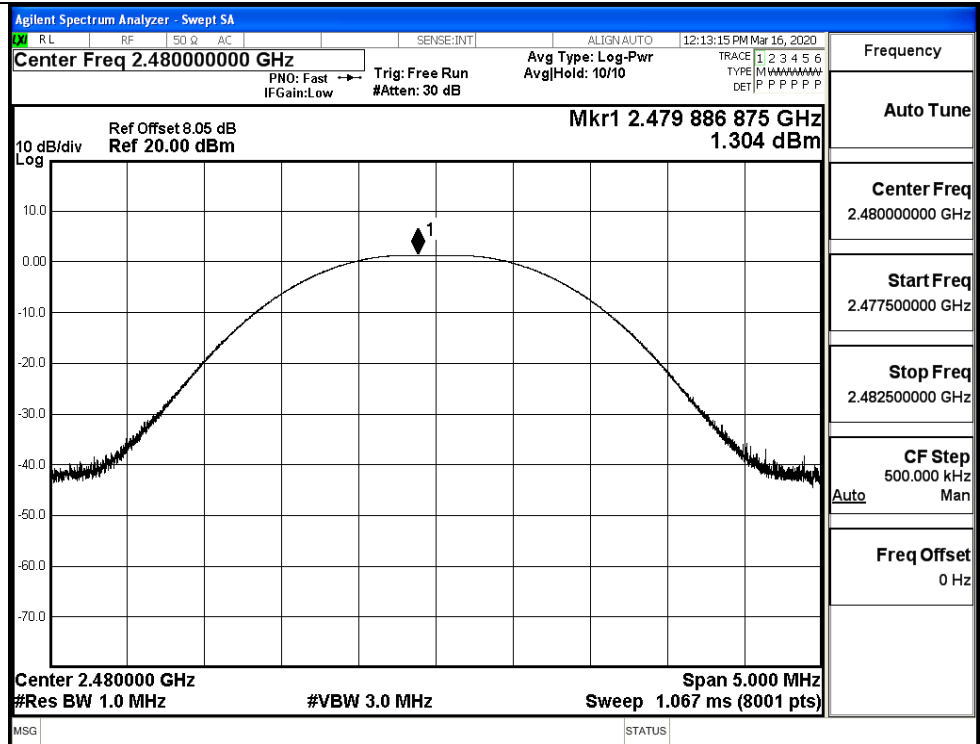


B.3 Maximum Power Spectral Density


Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-11.862	8	PASS
BT LE	MCH	-10.547	8	PASS
BT LE	HCH	-10.785	8	PASS


Test Graphs

LCH

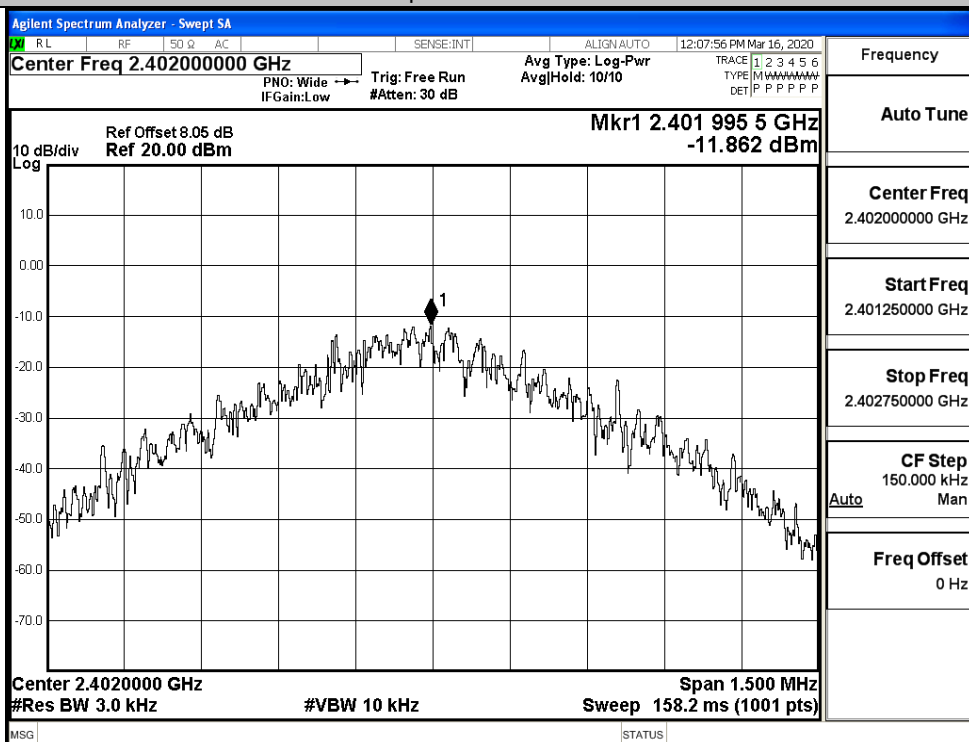

MCH

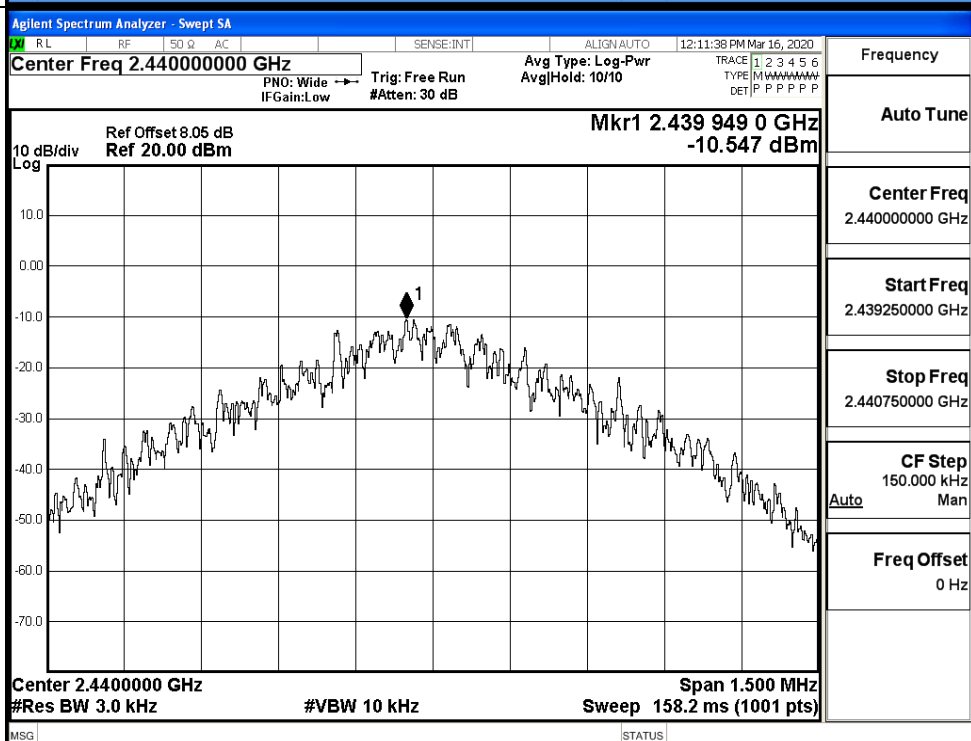

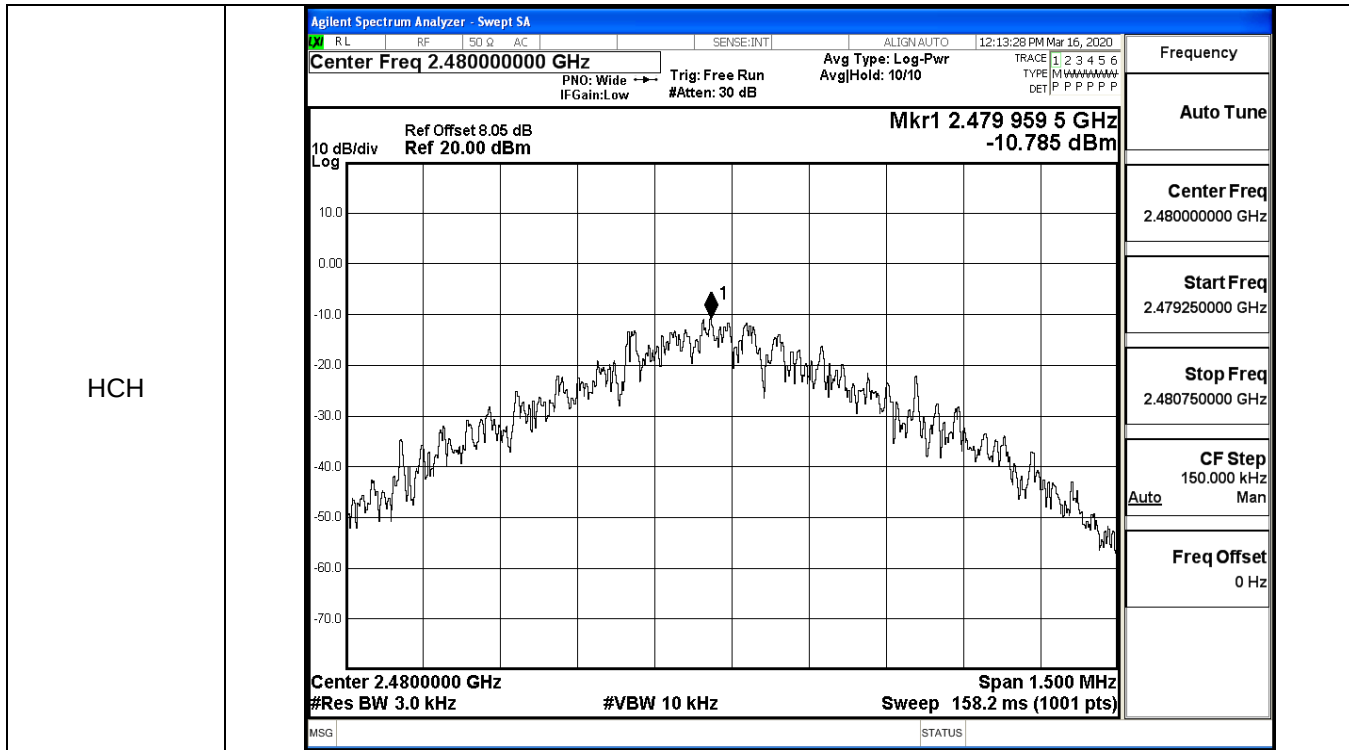


B.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6457	≥ 0.5	PASS
BT LE	MCH	0.6466	≥ 0.5	PASS
BT LE	HCH	0.6474	≥ 0.5	PASS

Test Graphs


LCH

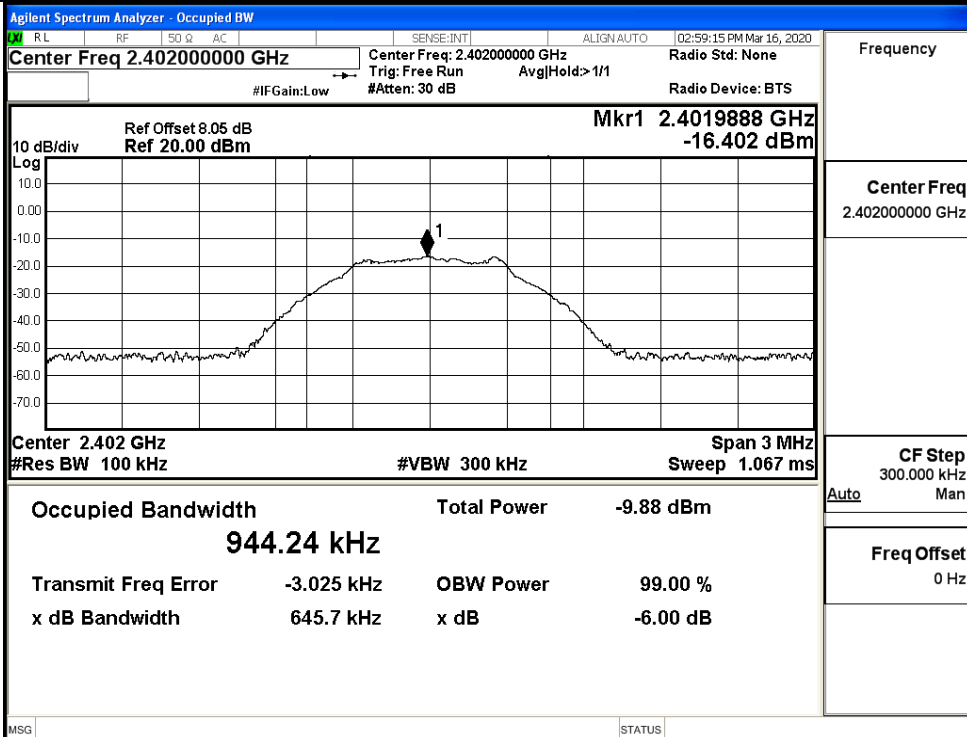

MCH

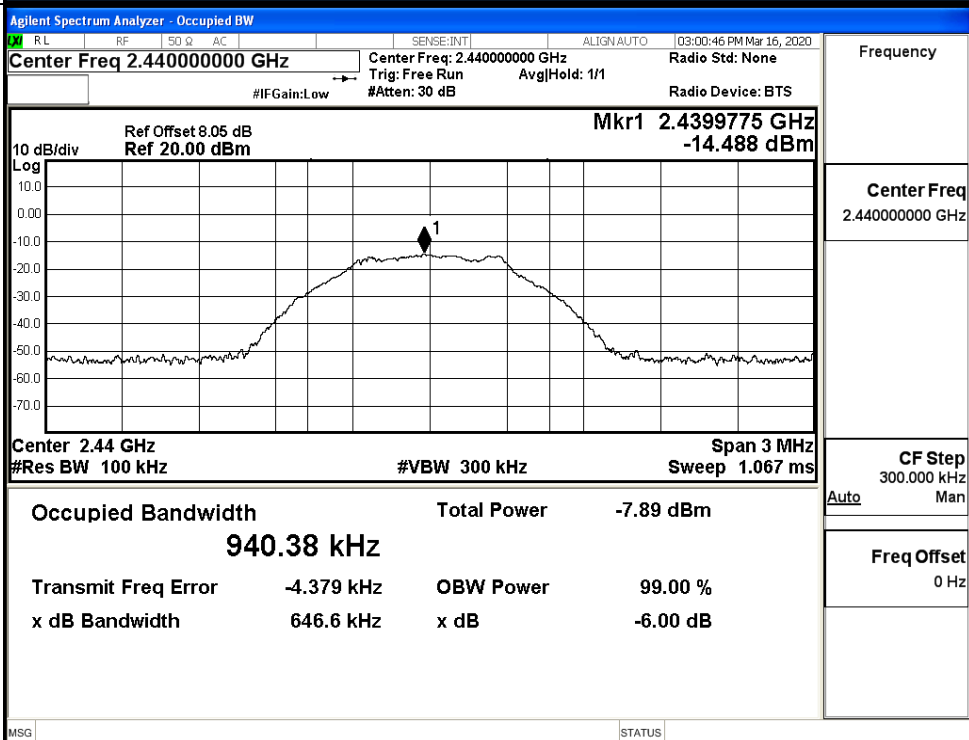


HCH

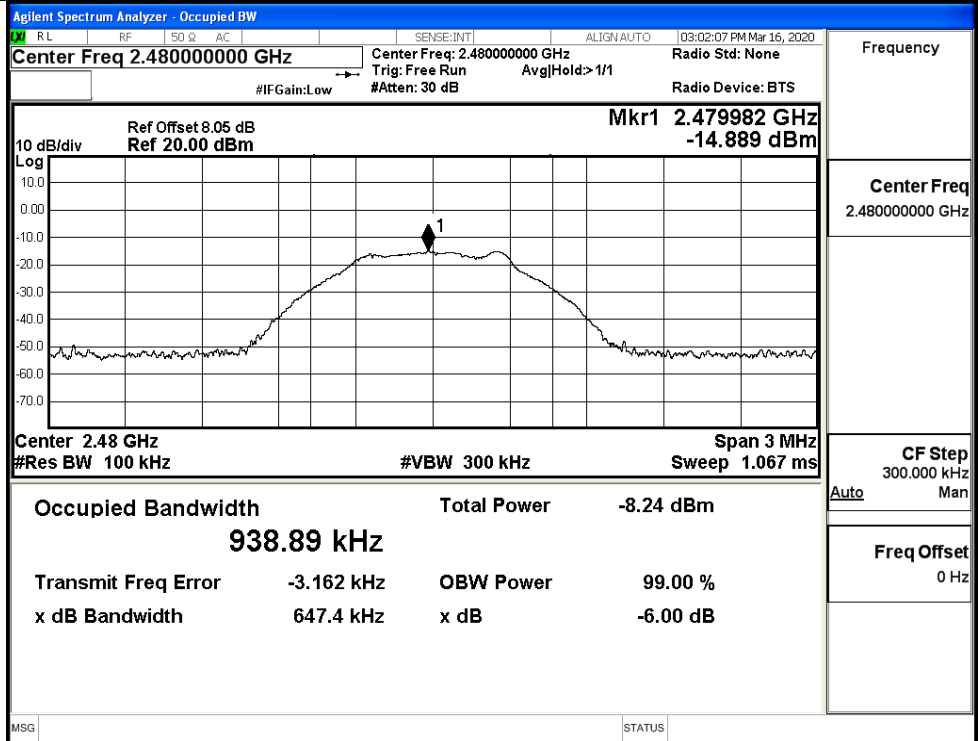

B.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.579	-37.174	-19.421	PASS
BT LE	MCH	1.339	-37.258	-18.661	PASS
BT LE	HCH	1.156	-37.628	-18.844	PASS

BT LE LCH Graphs

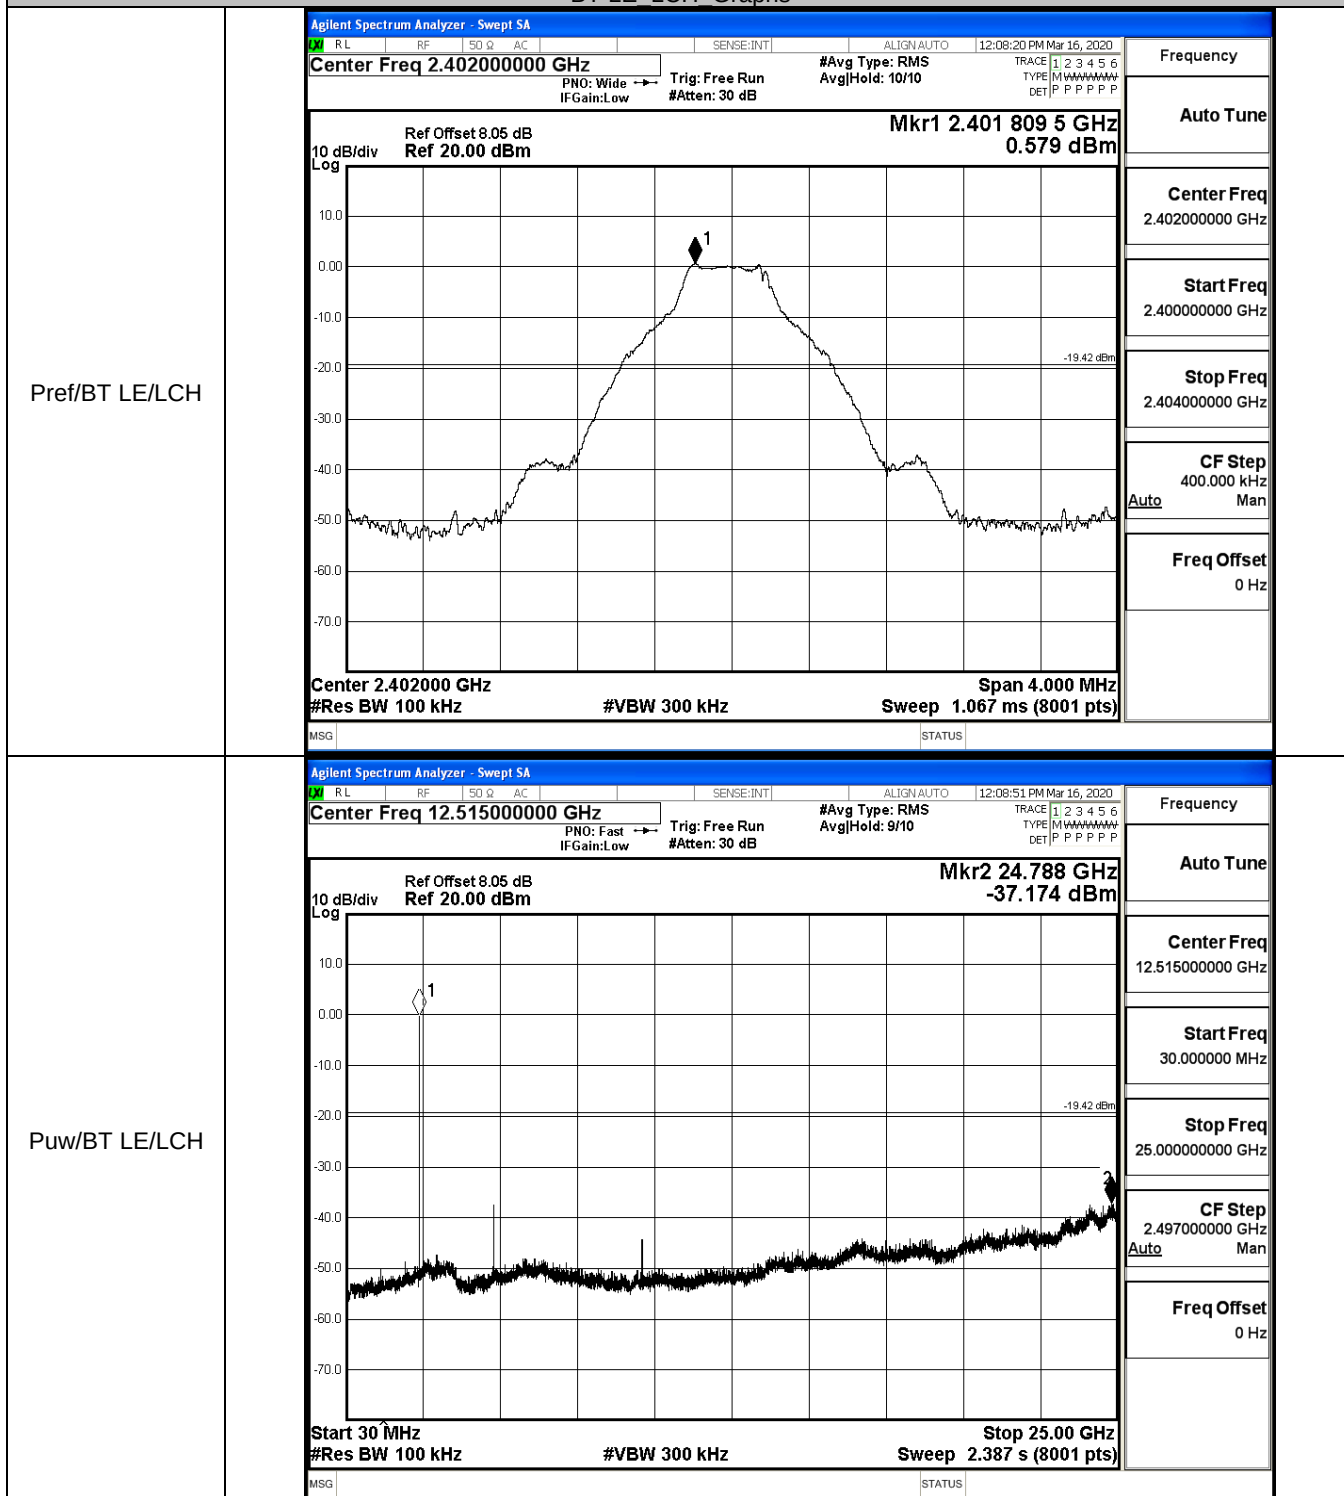


BT LE MCH Graphs

Pref/BT LE/MCH

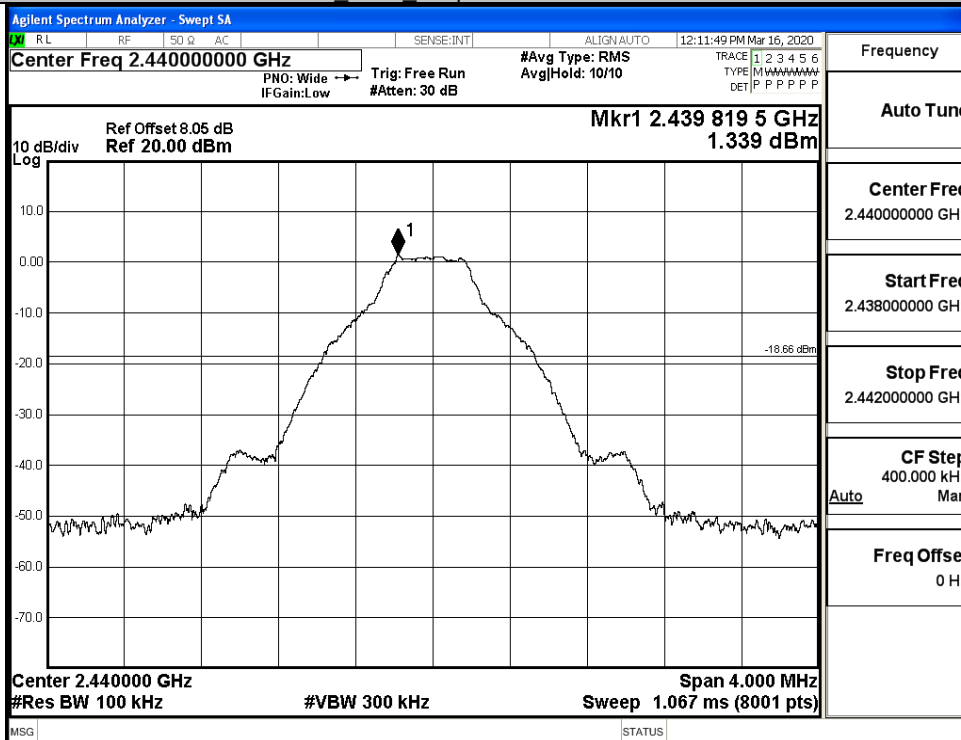


Puw/BT LE/MCH

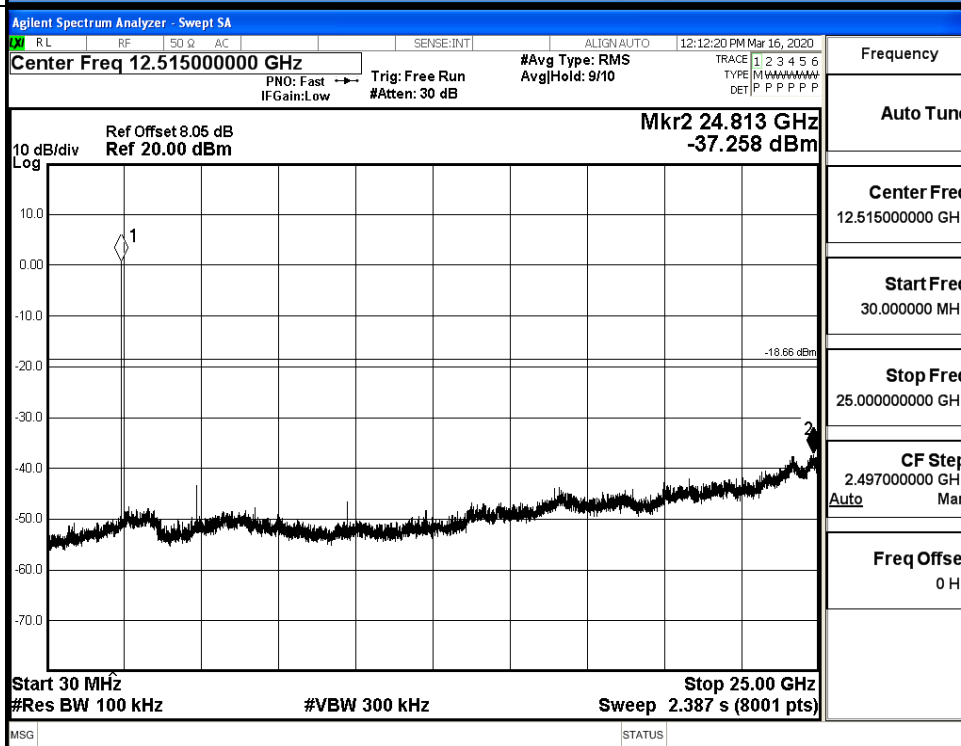

BT LE HCH Graphs

Pref/BT LE/HCH

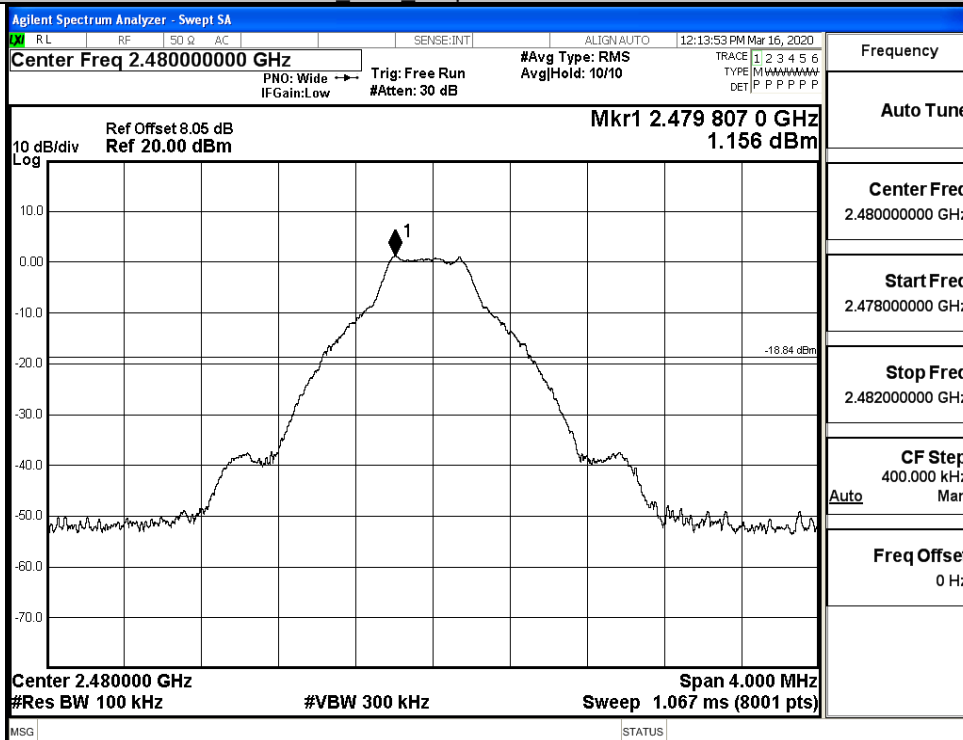

Puw/BT LE/HCH




B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.522	-49.354	-19.48	PASS
BT LE	HCH	0.960	-49.258	-19.04	PASS

Test Graphs

LCH

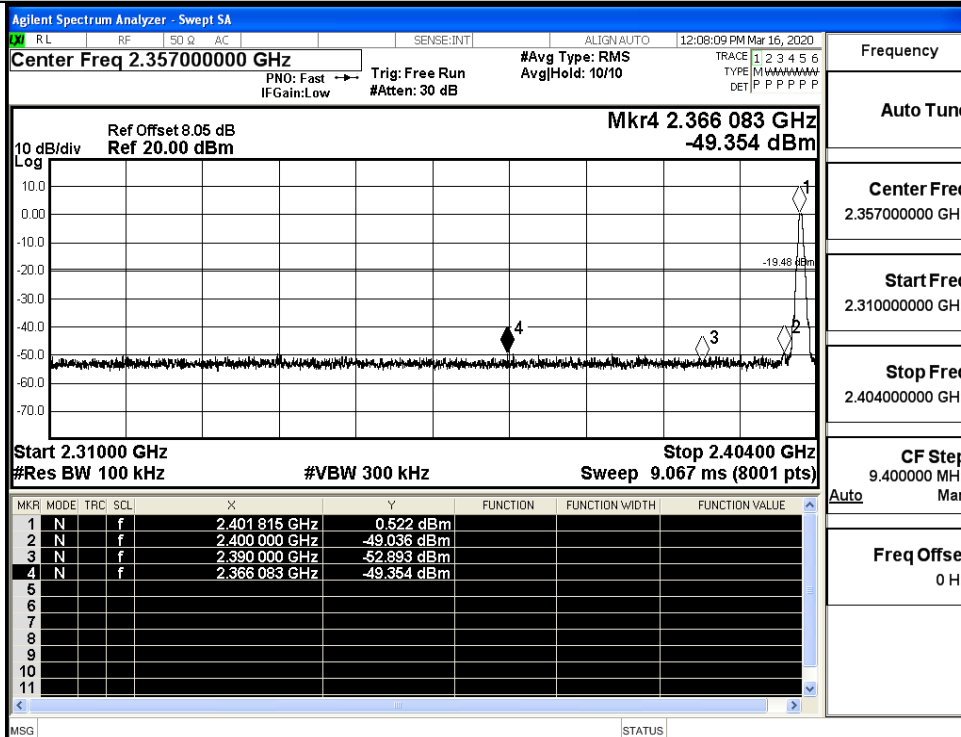

Frequency

Auto Tune

Center Freq
2.357000000 GHz


Start Freq
2.310000000 GHz

Stop Freq
2.404000000 GHz

CF Step
9.400000 MHz

Freq Offset
0 Hz

HCH

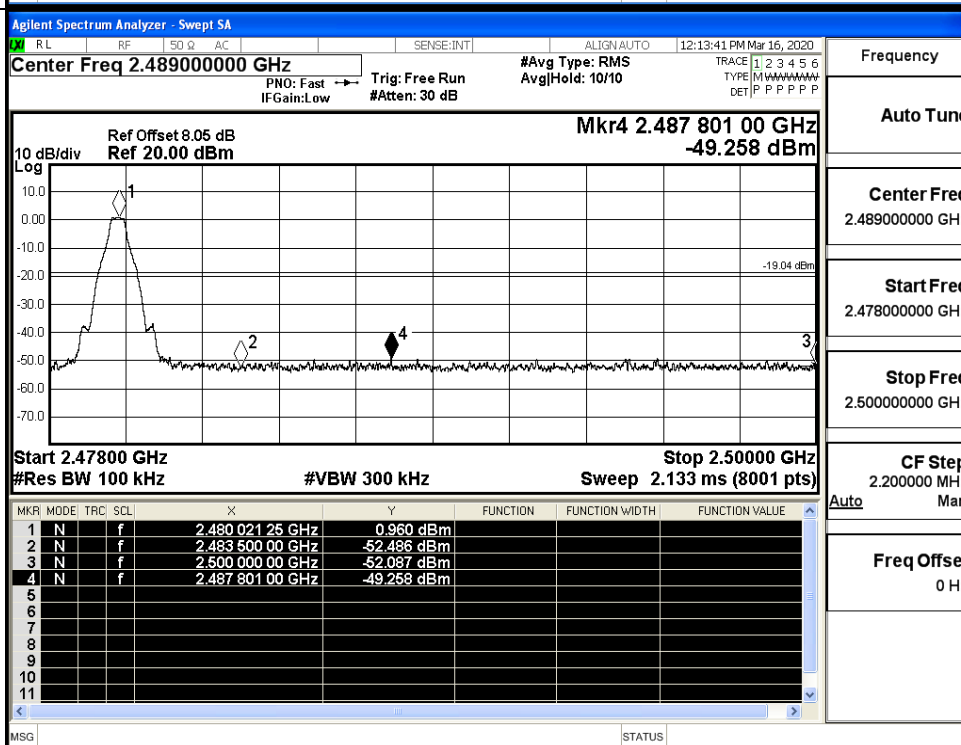

Frequency

Auto Tune

Center Freq
2.489000000 GHz

Start Freq
2.478000000 GHz

Stop Freq
2.500000000 GHz


CF Step
2.200000 MHz

Freq Offset
0 Hz


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.16	2.0	0	54.07	PEAK	74	PASS
		Ant1	2310.0	-53.00	2.0	0	44.23	AV	54	PASS
		Ant1	2390.0	-42.50	2.0	0	54.73	PEAK	74	PASS
		Ant1	2390.0	-52.65	2.0	0	44.58	AV	54	PASS
	2480	Ant1	2483.5	-41.64	2.0	0	55.59	PEAK	74	PASS
		Ant1	2483.5	-52.21	2.0	0	45.02	AV	54	PASS
		Ant1	2500.0	-41.82	2.0	0	55.41	PEAK	74	PASS
		Ant1	2500.0	-52.27	2.0	0	44.96	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

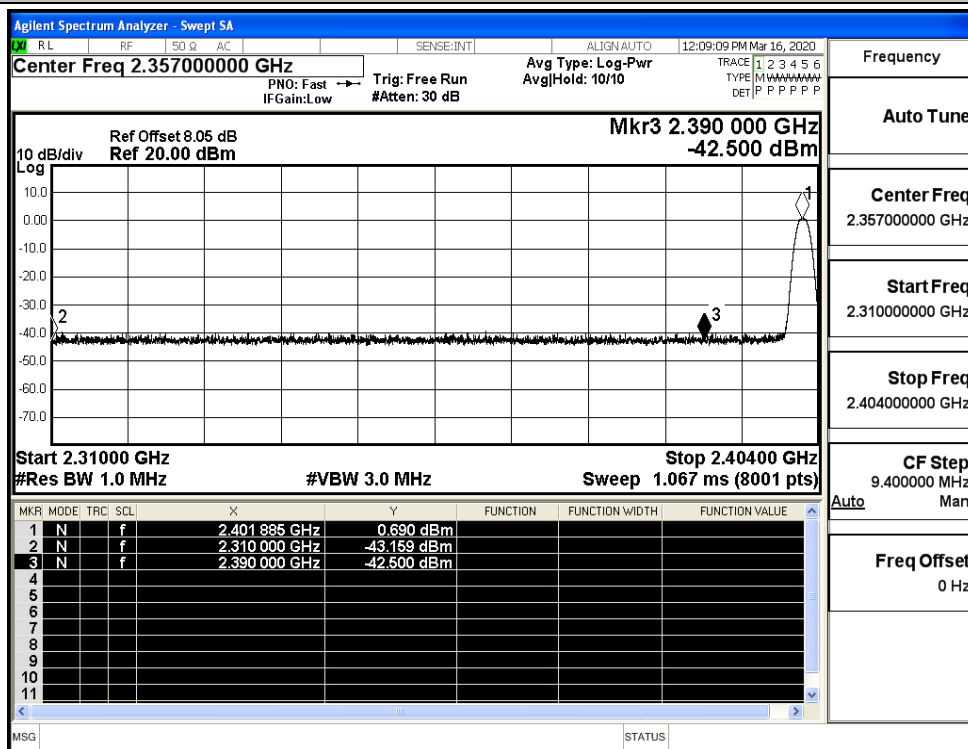

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

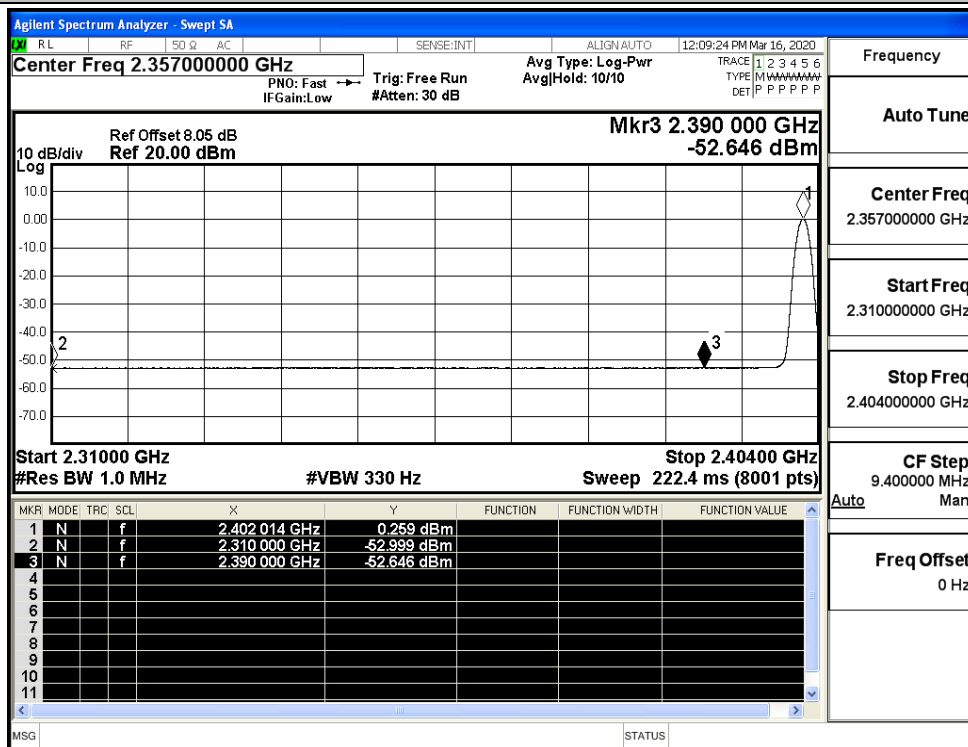

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

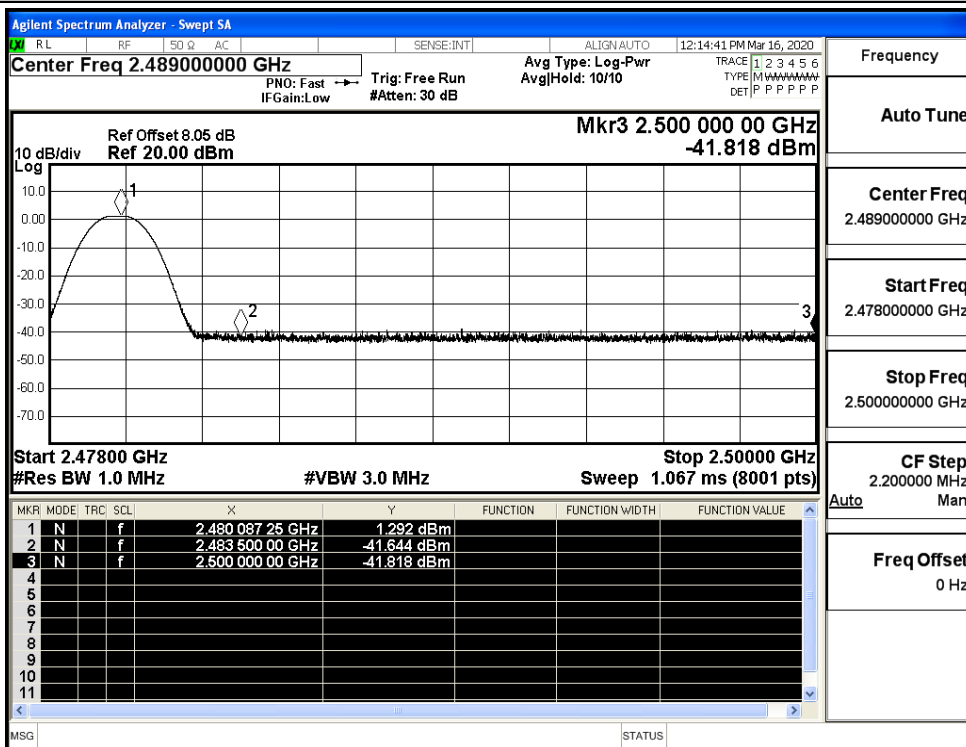

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

