



Report No.: WSCT-ANAB-R&E241100056A-BT



Dwell NVNT 1-DH3 2402MHz Ant1 One Burst

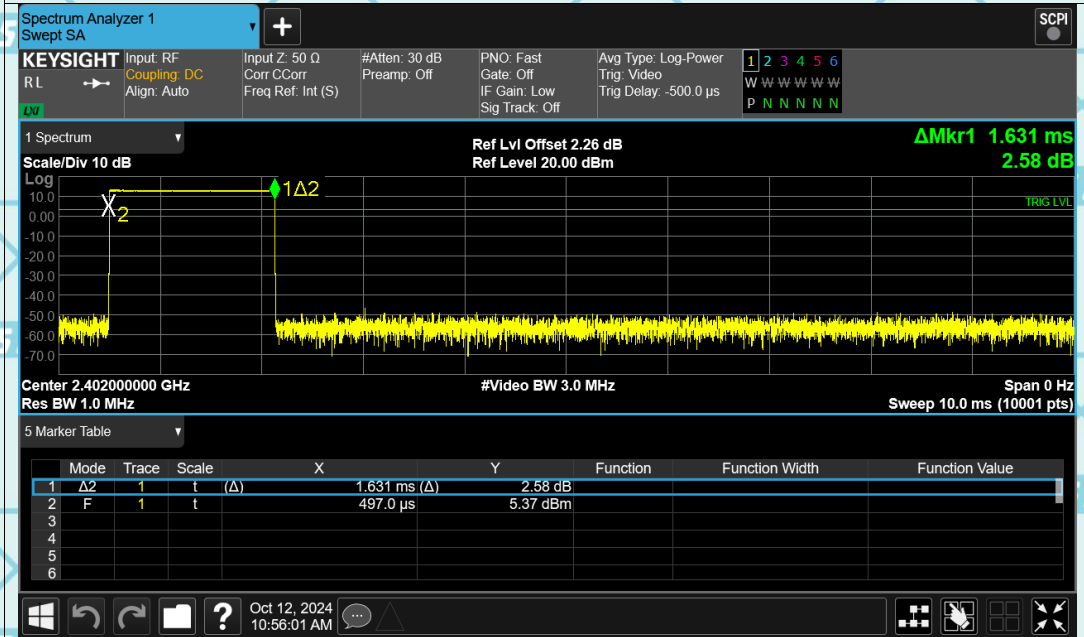

Dwell NVNT 1-DH3 2402MHz Ant1 Accumulated

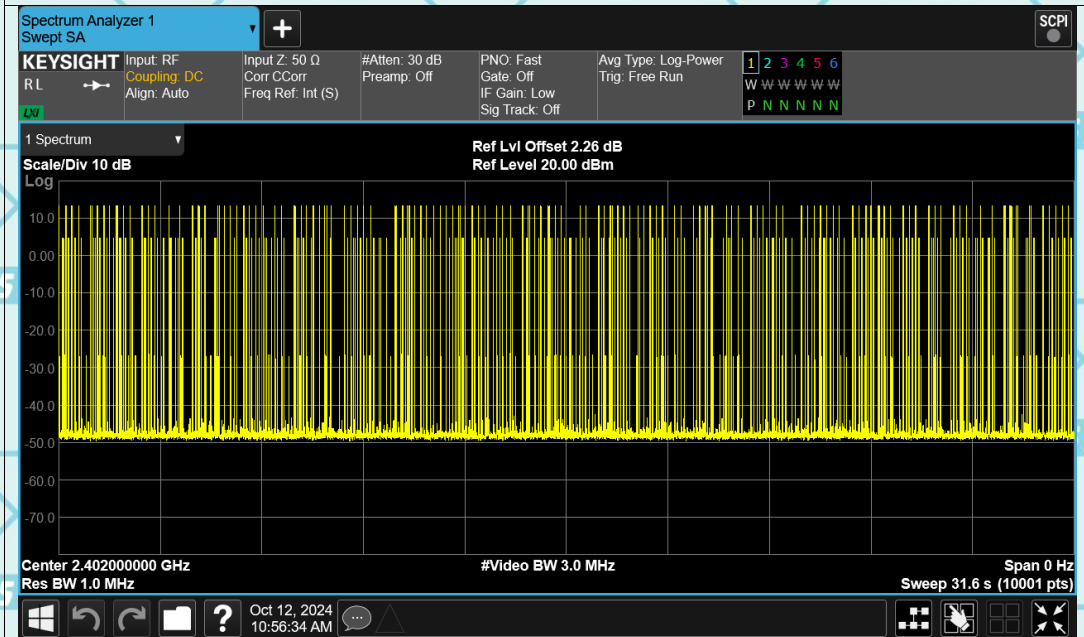


Report No.: WSCT-ANAB-R&E241100056A-BT

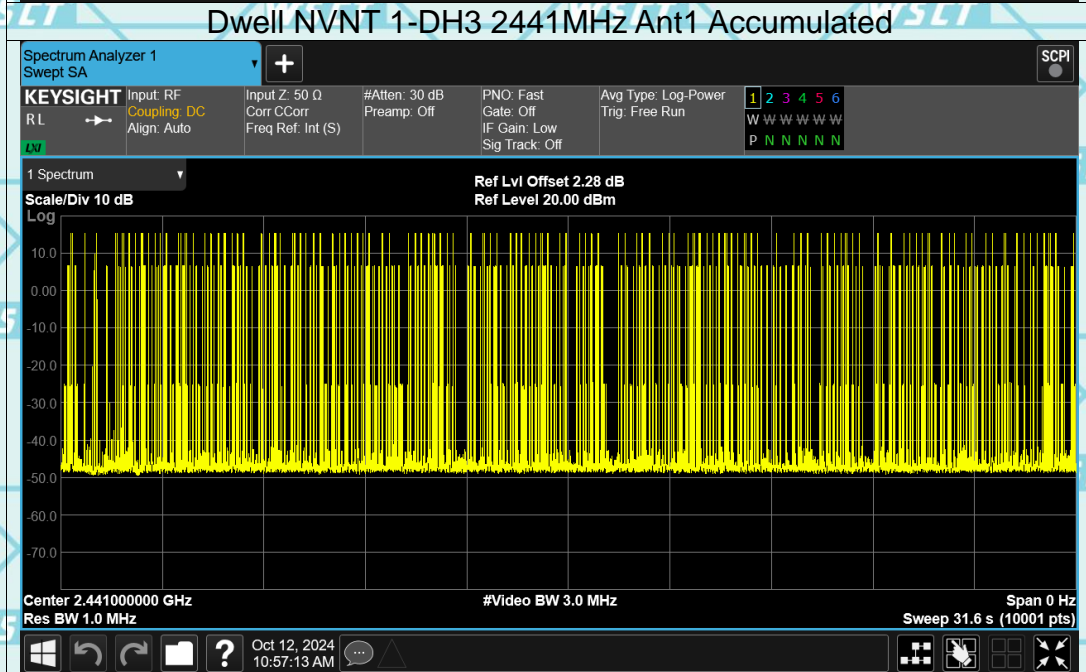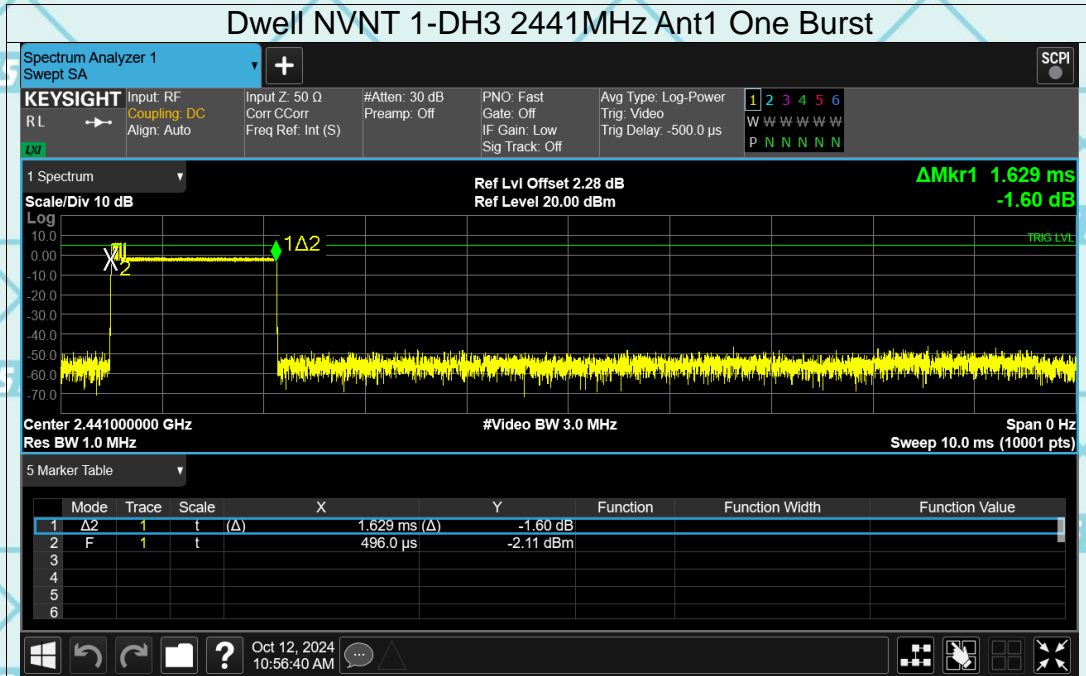


Report No.: WSCT-ANAB-R&E241100056A-BT

Dwell NVNT 1-DH3 2480MHz Ant1 One Burst

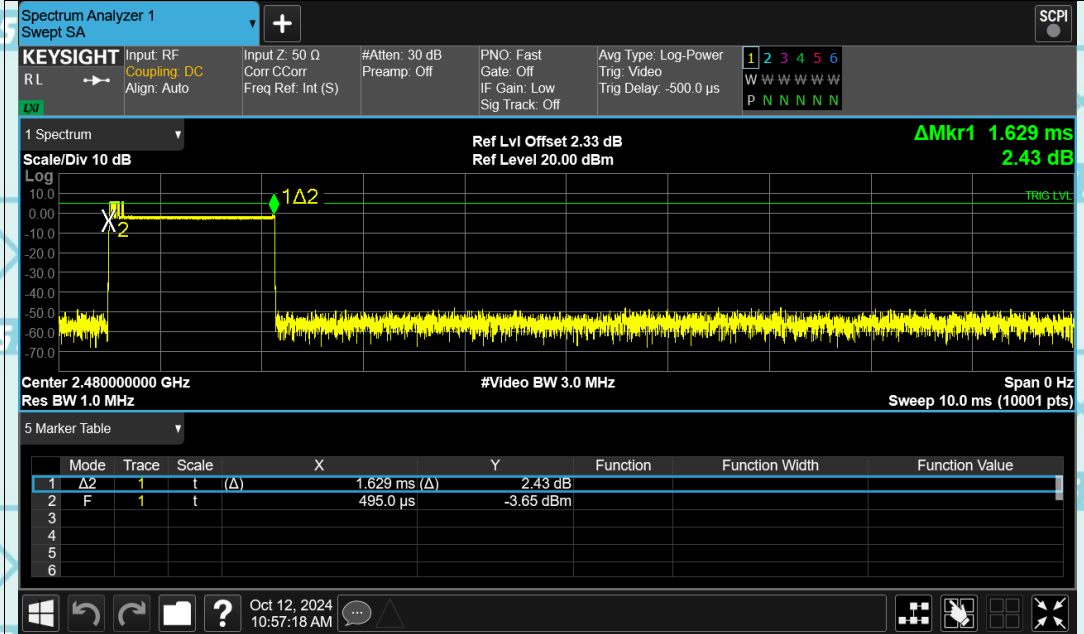


Dwell NVNT 1-DH3 2480MHz Ant1 Accumulated

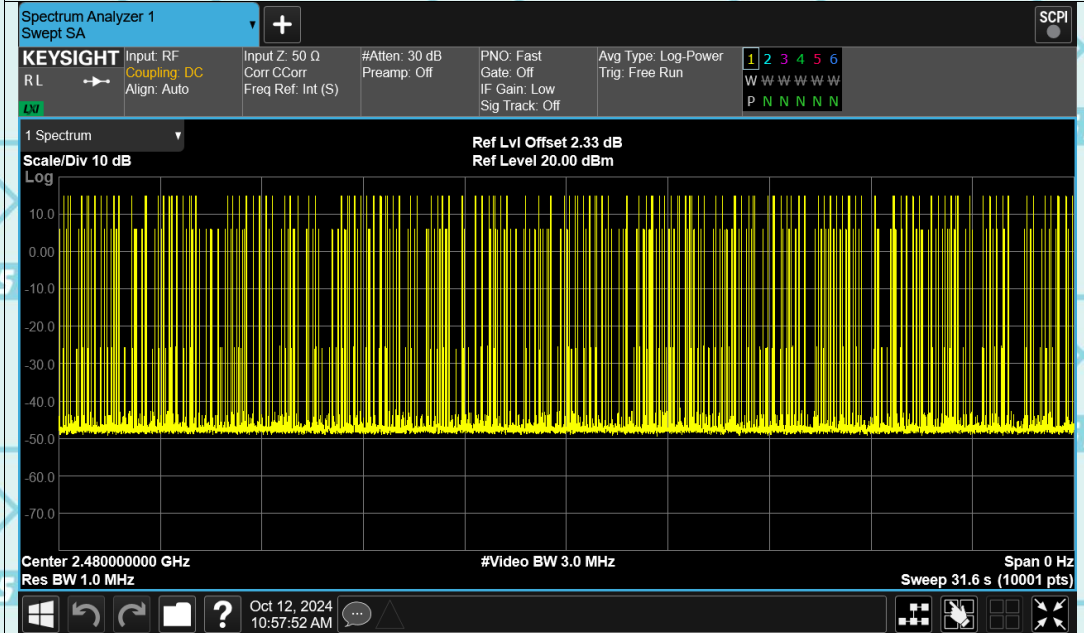

Report No.: WSCT-ANAB-R&E241100056A-BT



Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

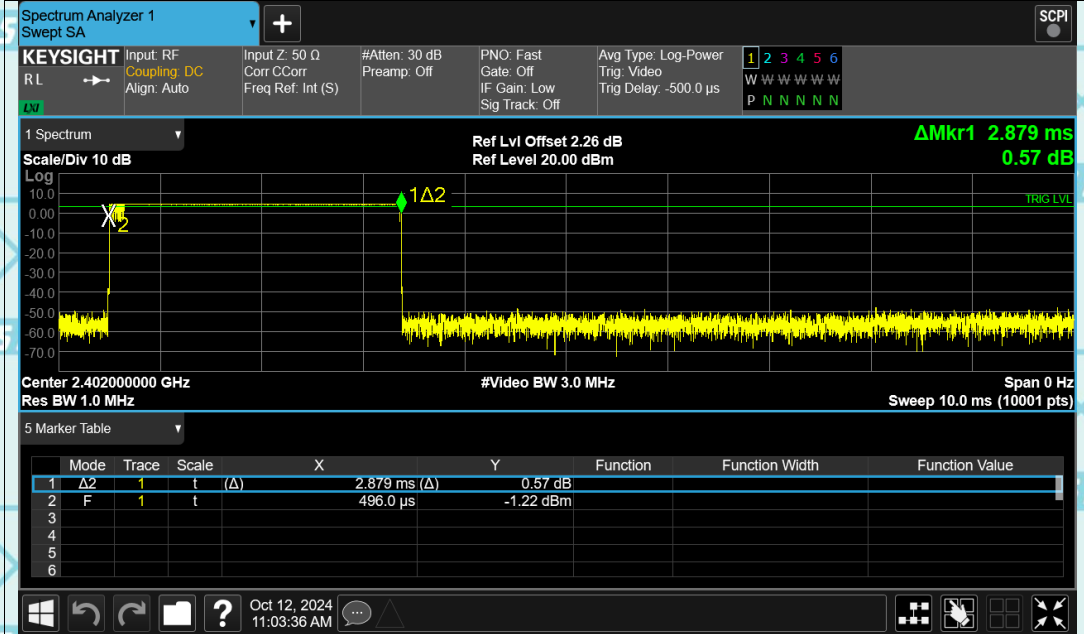



Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E241100056A-BT

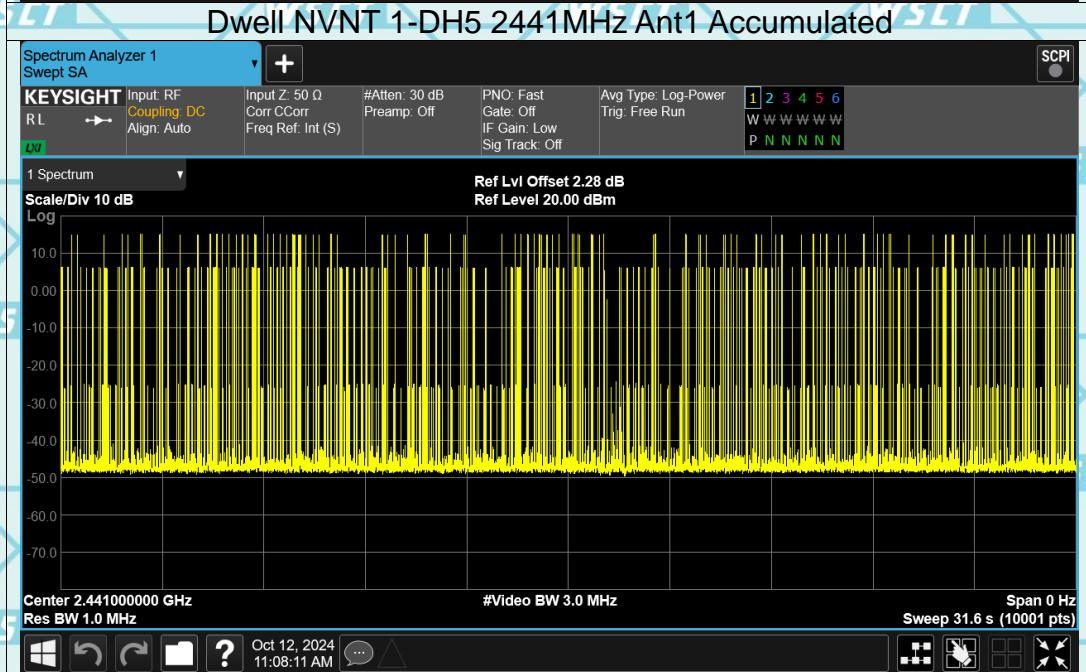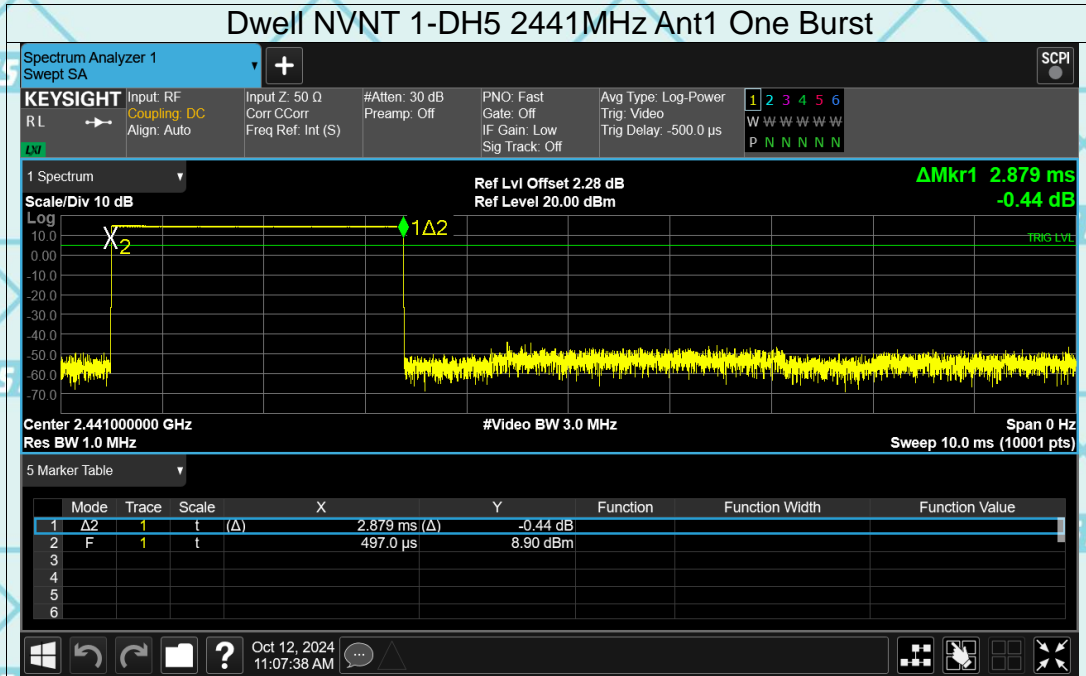

Report No.: WSCT-ANAB-R&E241100056A-BT

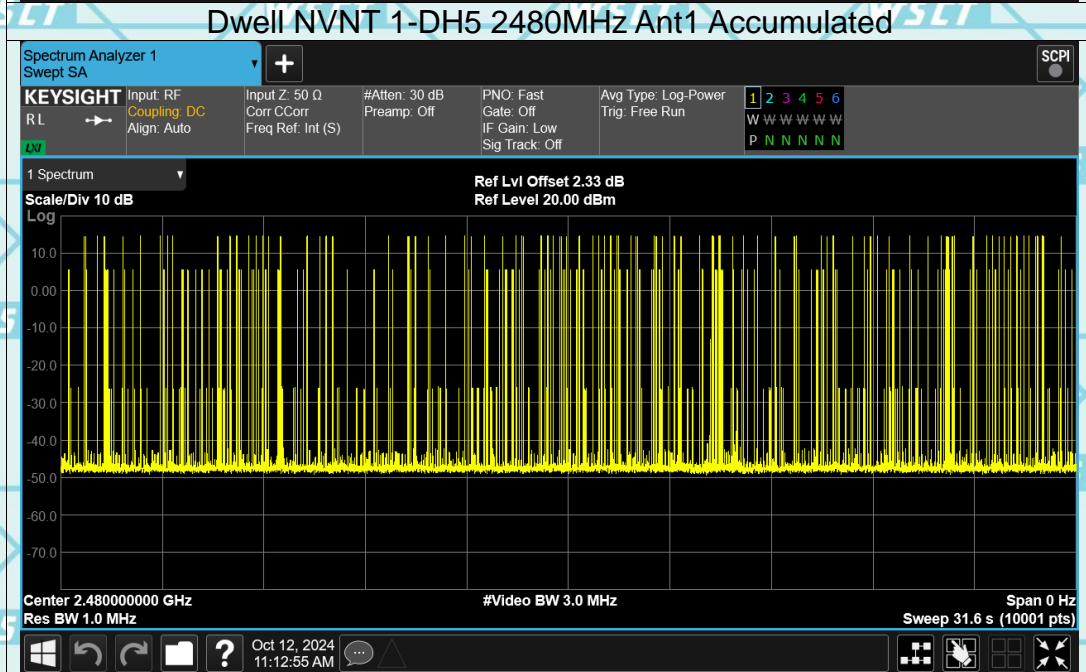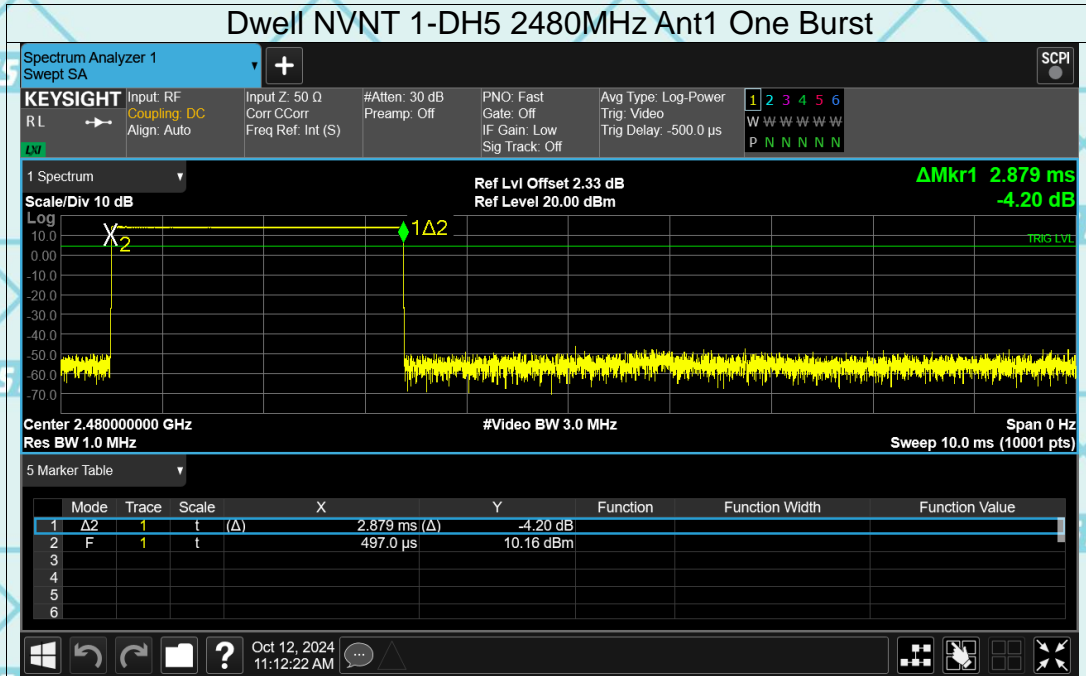

6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

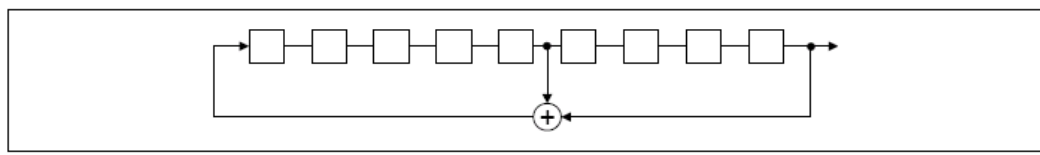

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

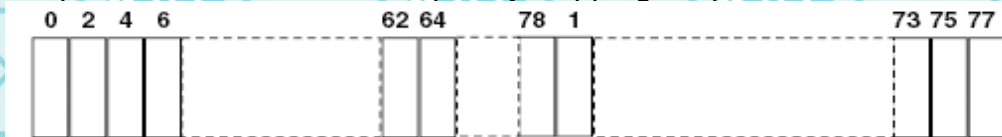



Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9. Conducted Band Edge Measurement



6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz (\geqRBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E241100056A-BT

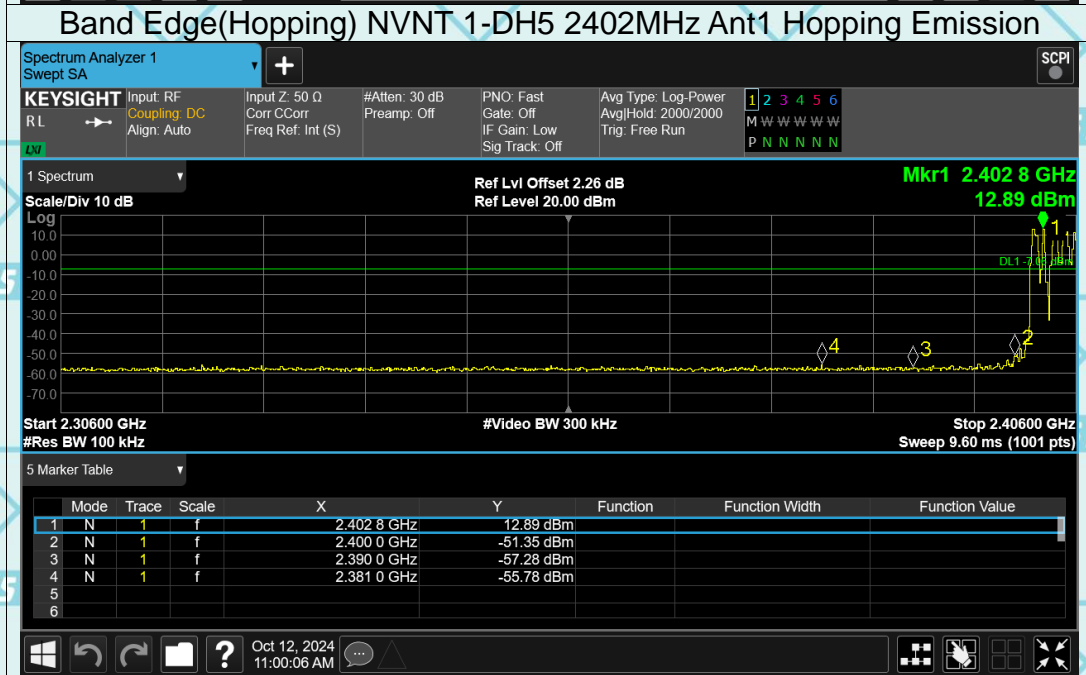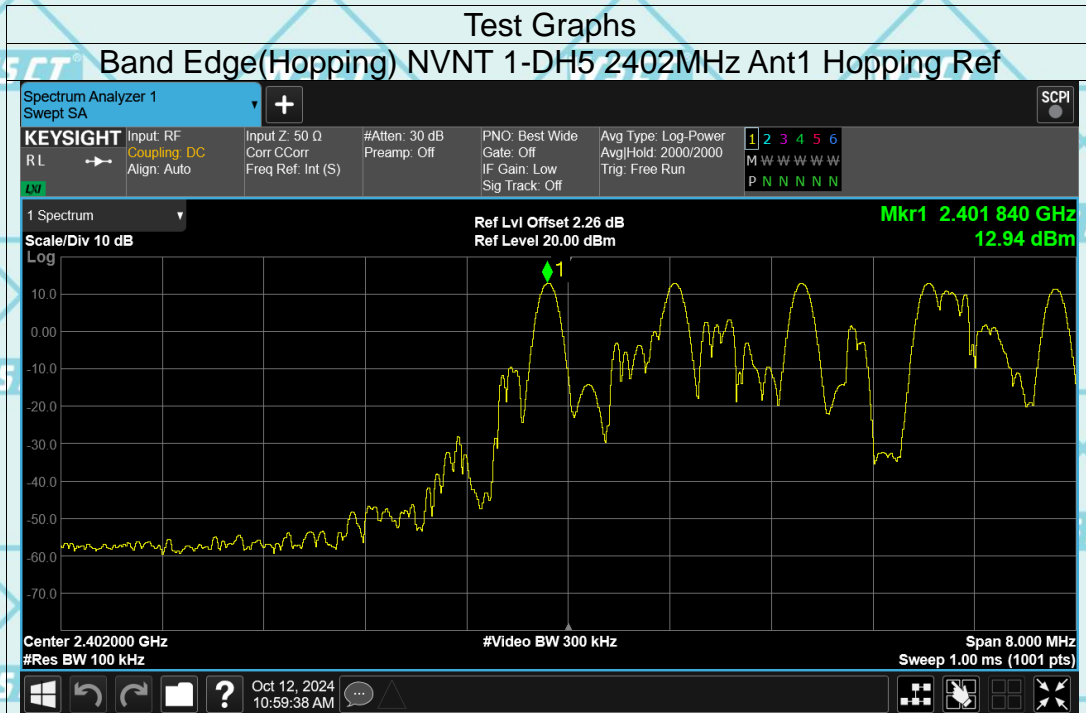

Report No.: WSCT-ANAB-R&E241100056A-BT

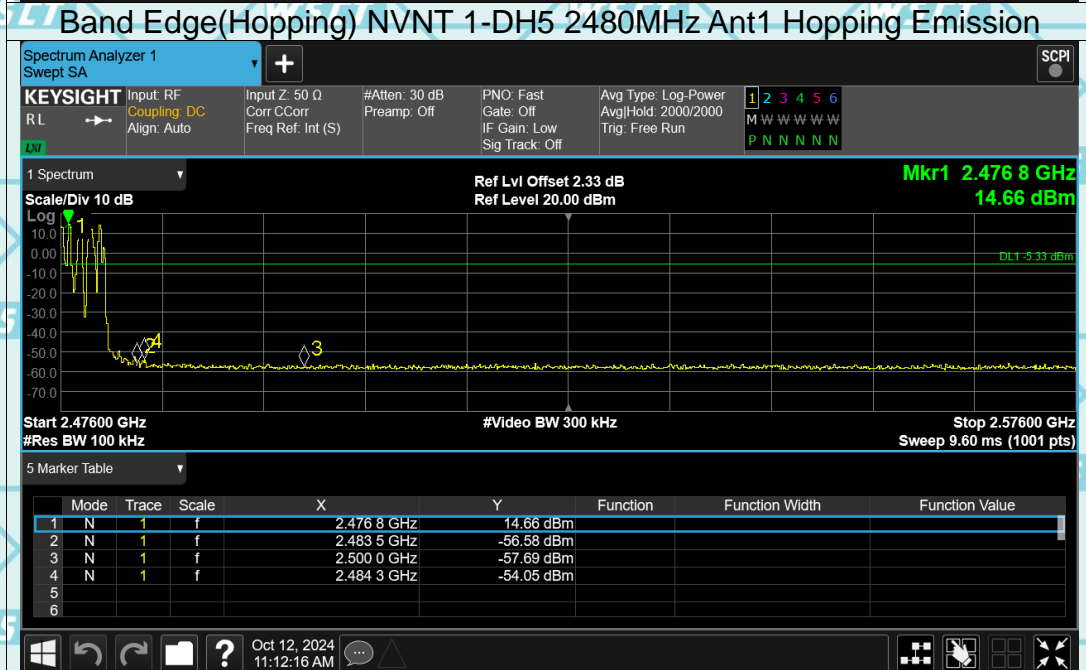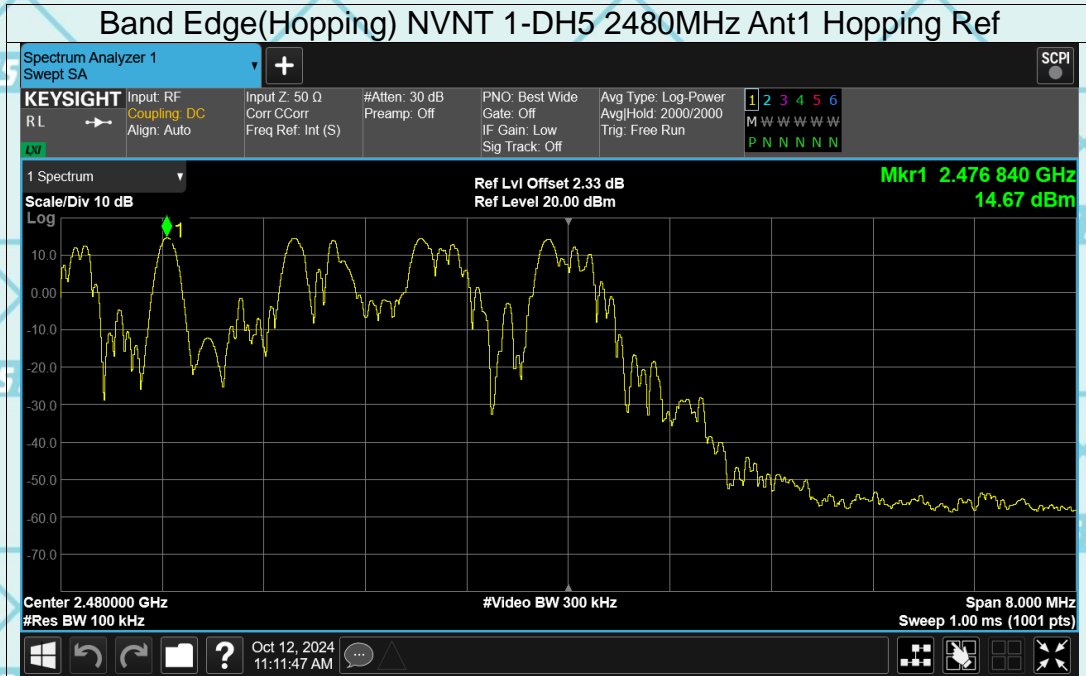

6.10. Conducted Spurious Emission Measurement


6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	<p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS


Report No.: WSCT-ANAB-R&E241100056A-BT

Test Graphs



Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

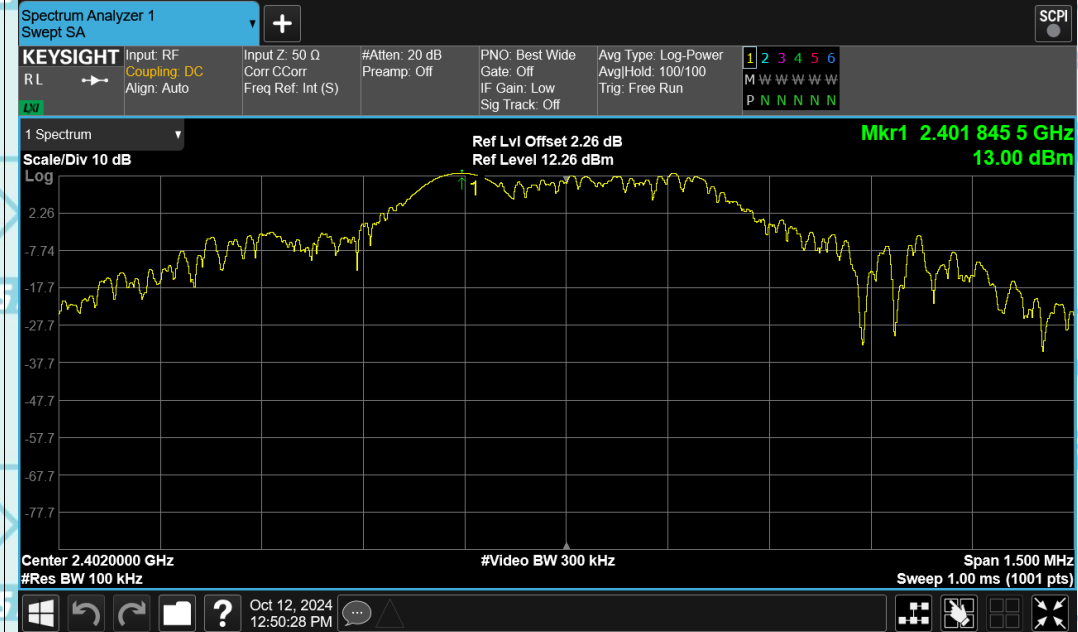



Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

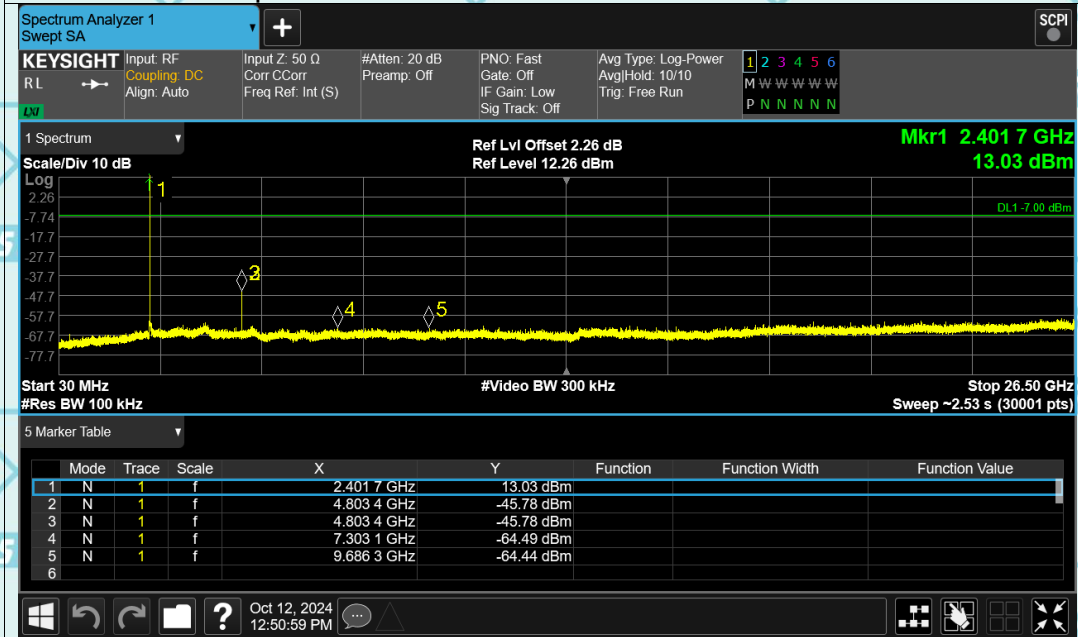



Report No.: WSCT-ANAB-R&E241100056A-BT

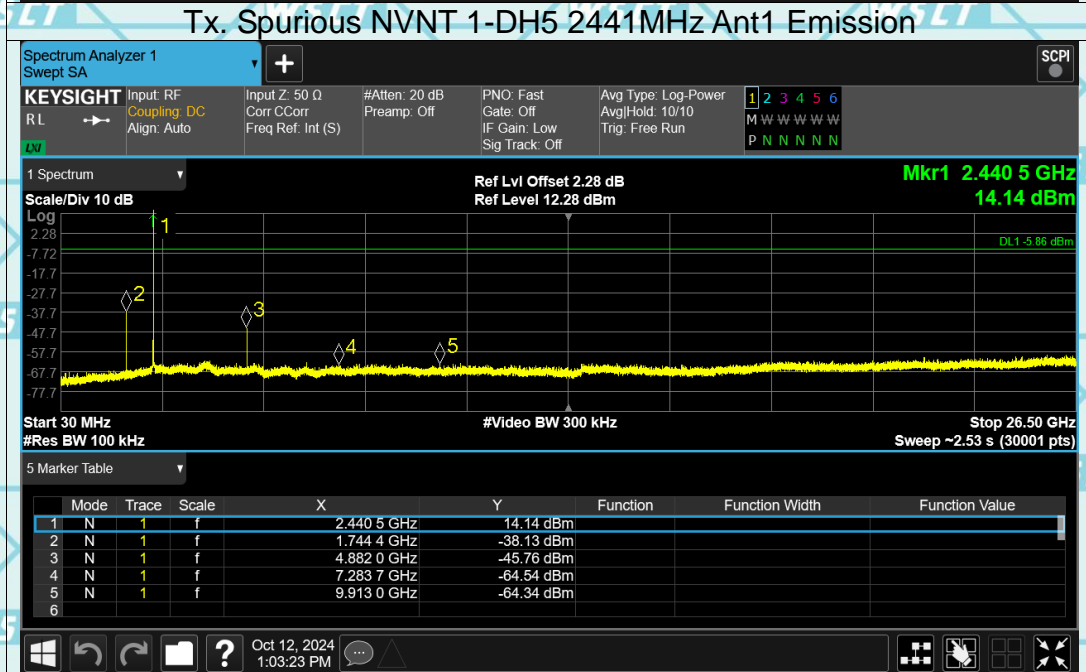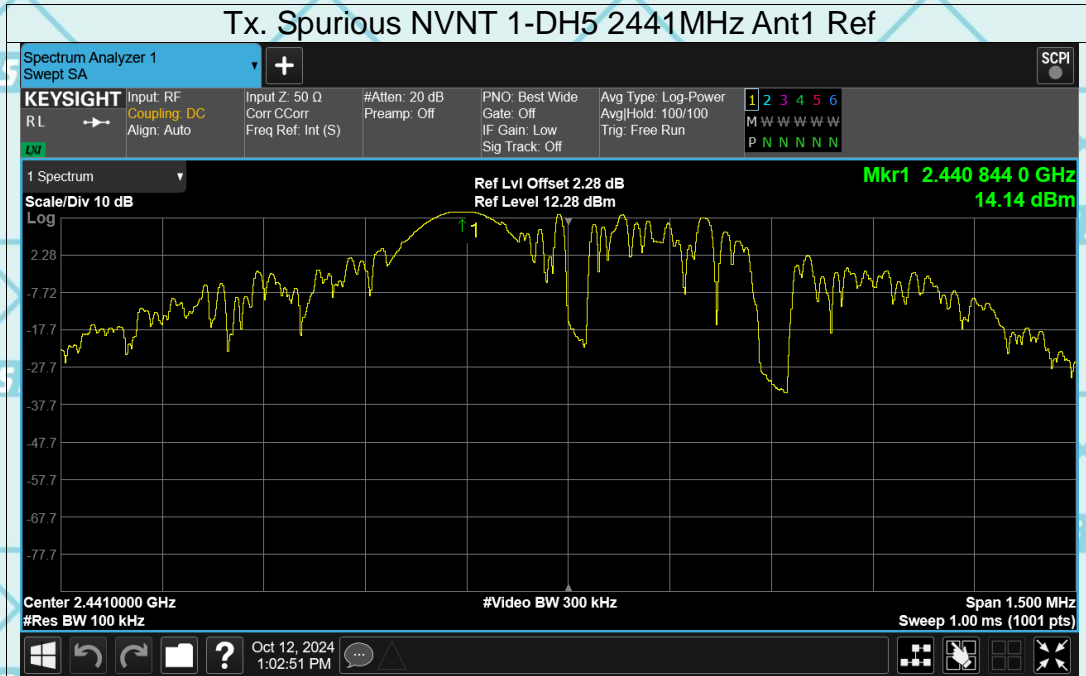



Report No.: WSCT-ANAB-R&E241100056A-BT

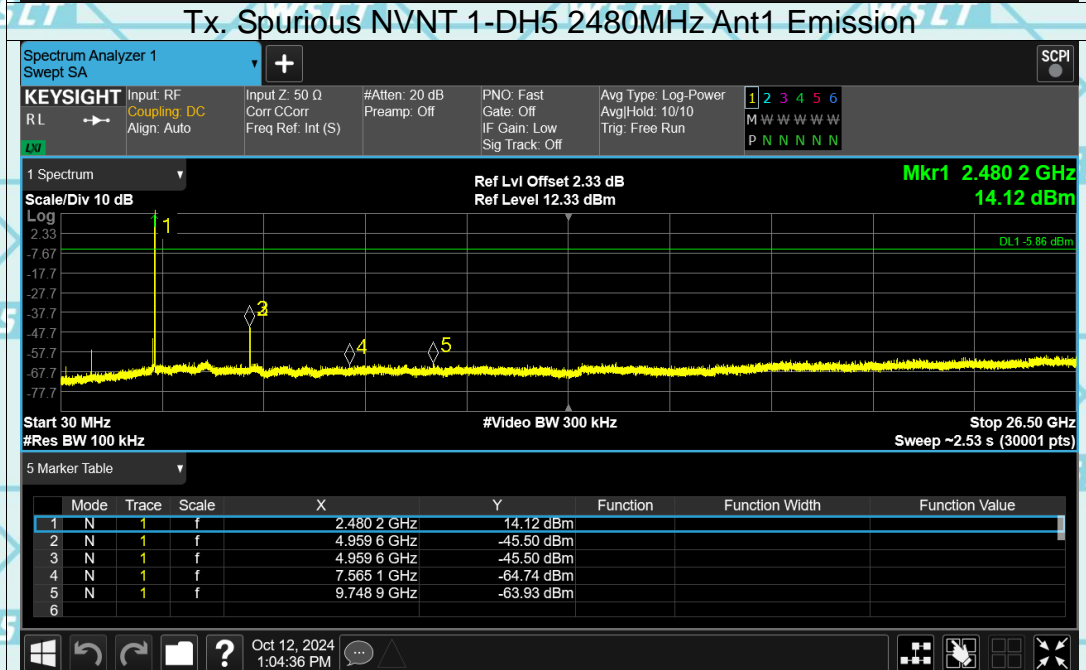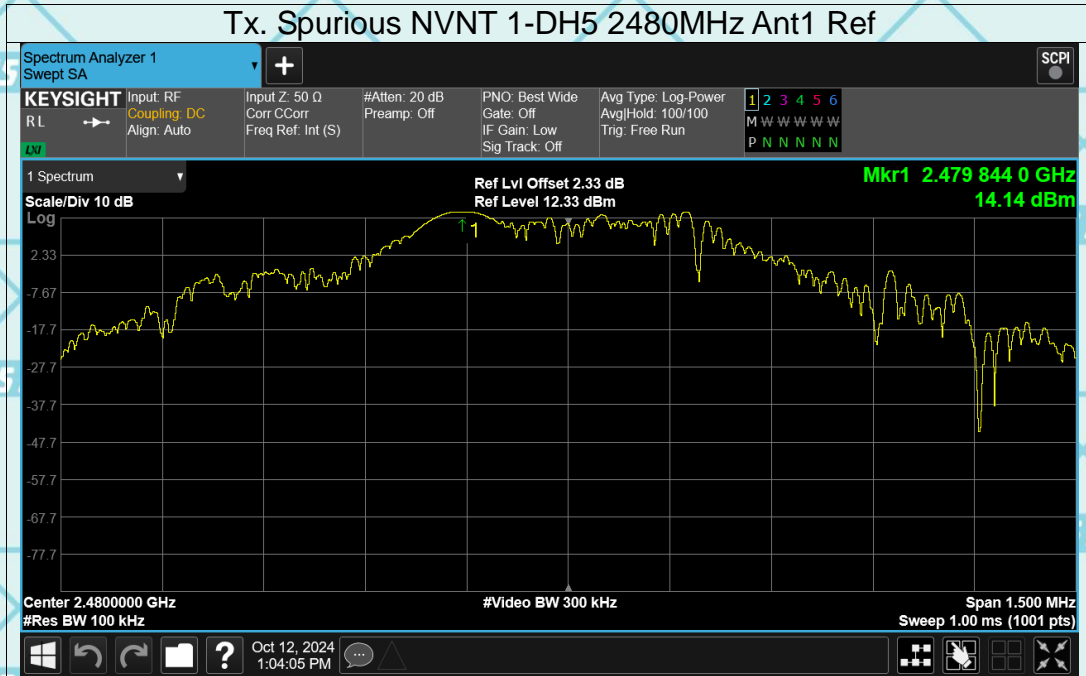



Report No.: WSCT-ANAB-R&E241100056A-BT

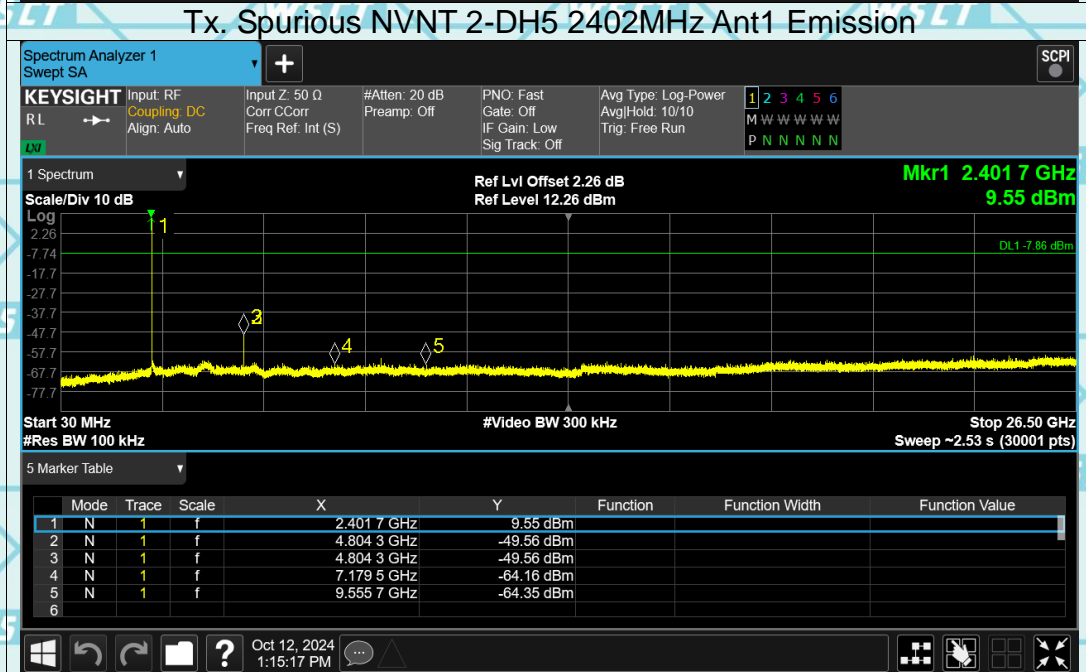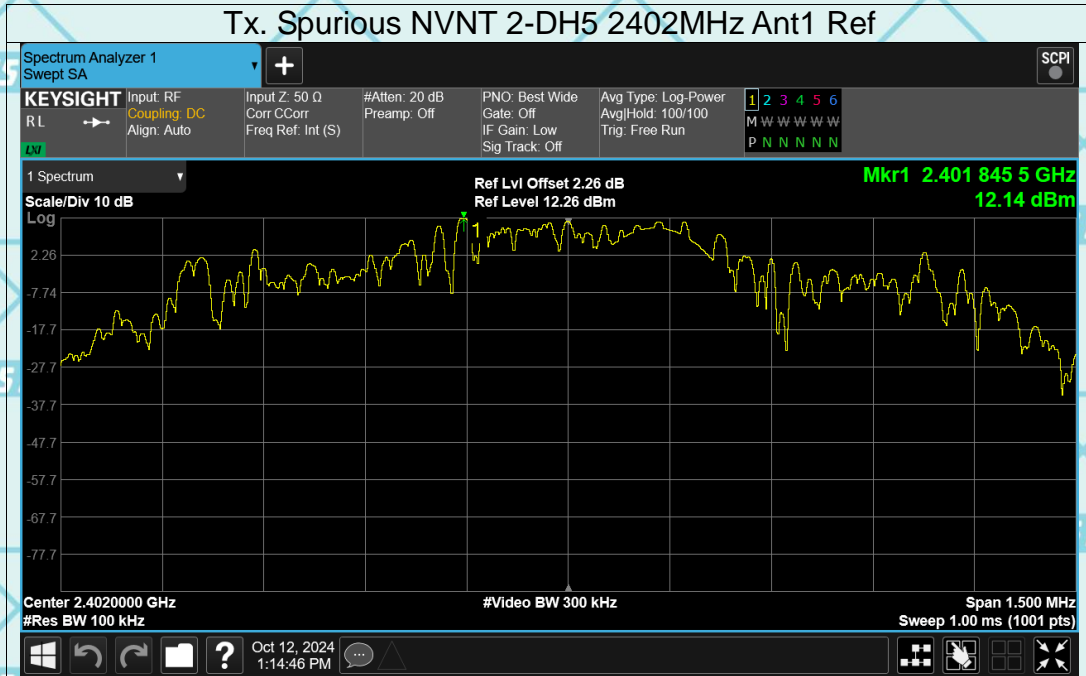



Report No.: WSCT-ANAB-R&E241100056A-BT

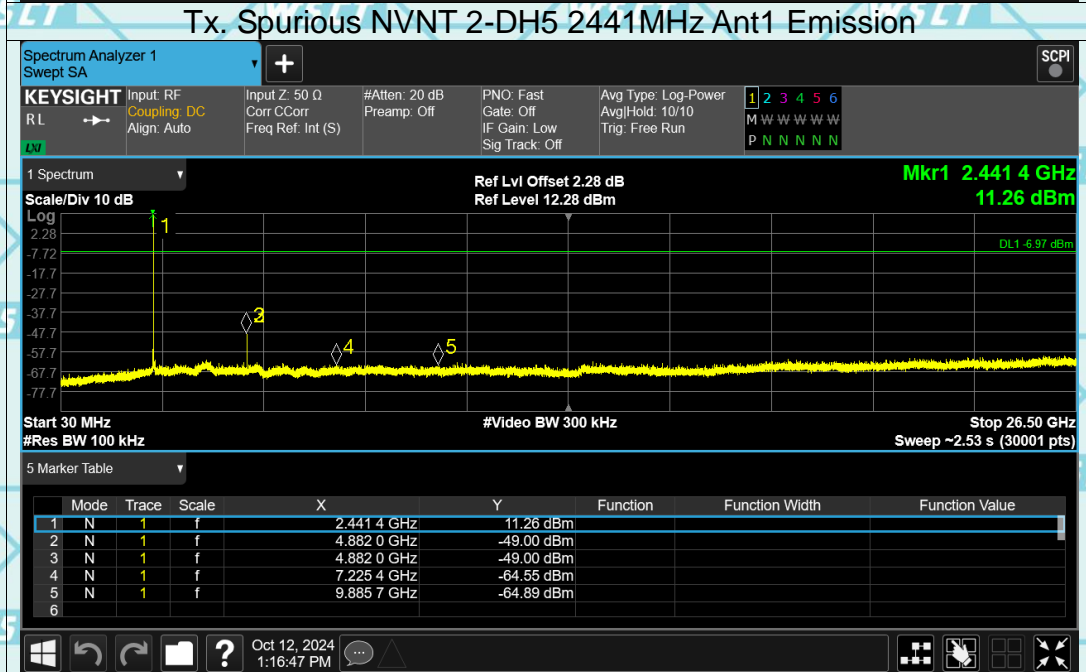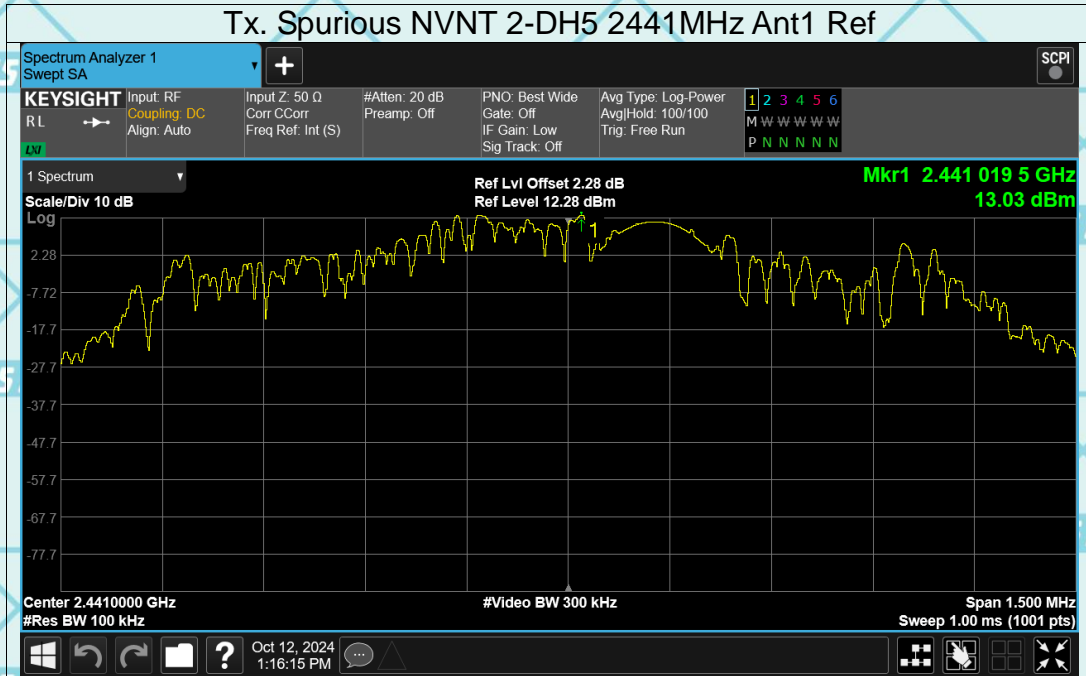



Report No.: WSCT-ANAB-R&E241100056A-BT

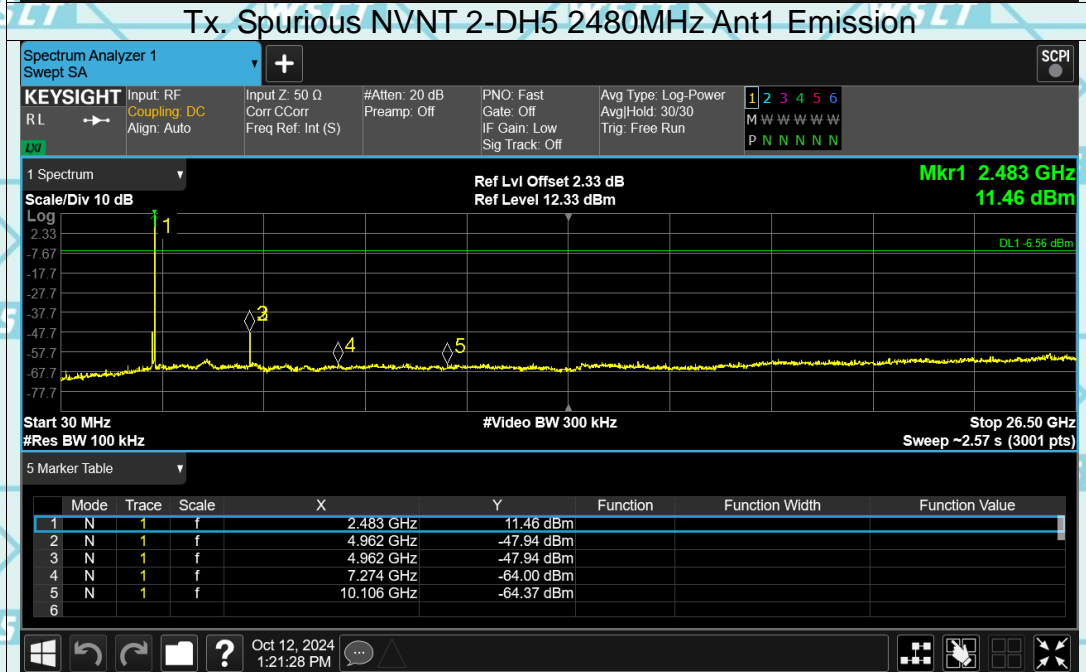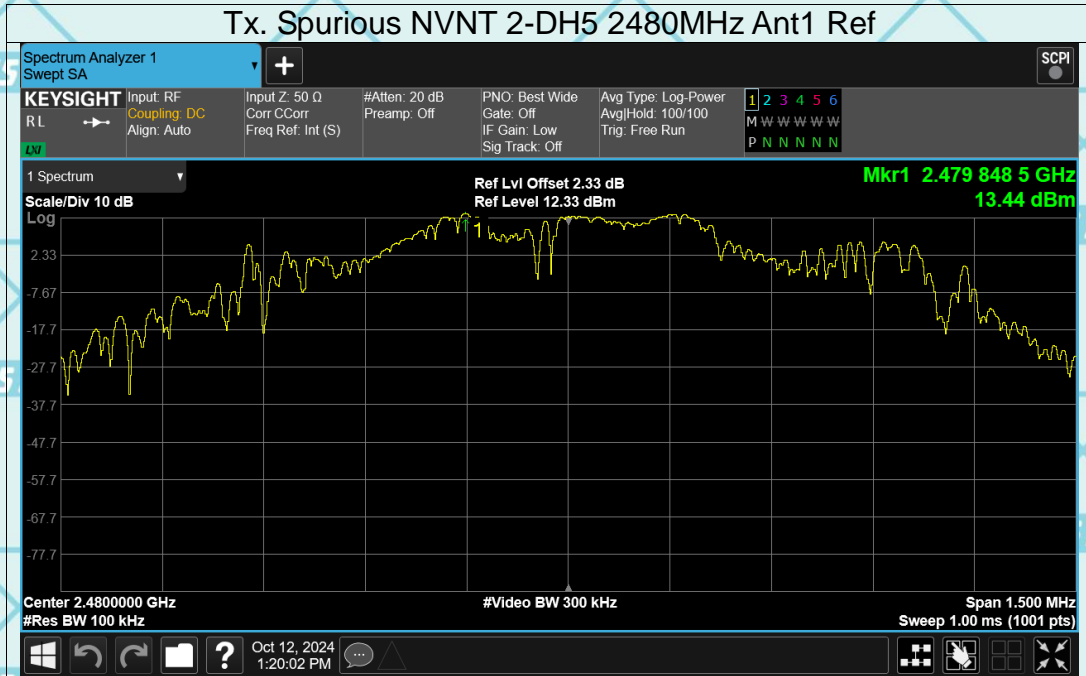



Report No.: WSCT-ANAB-R&E241100056A-BT

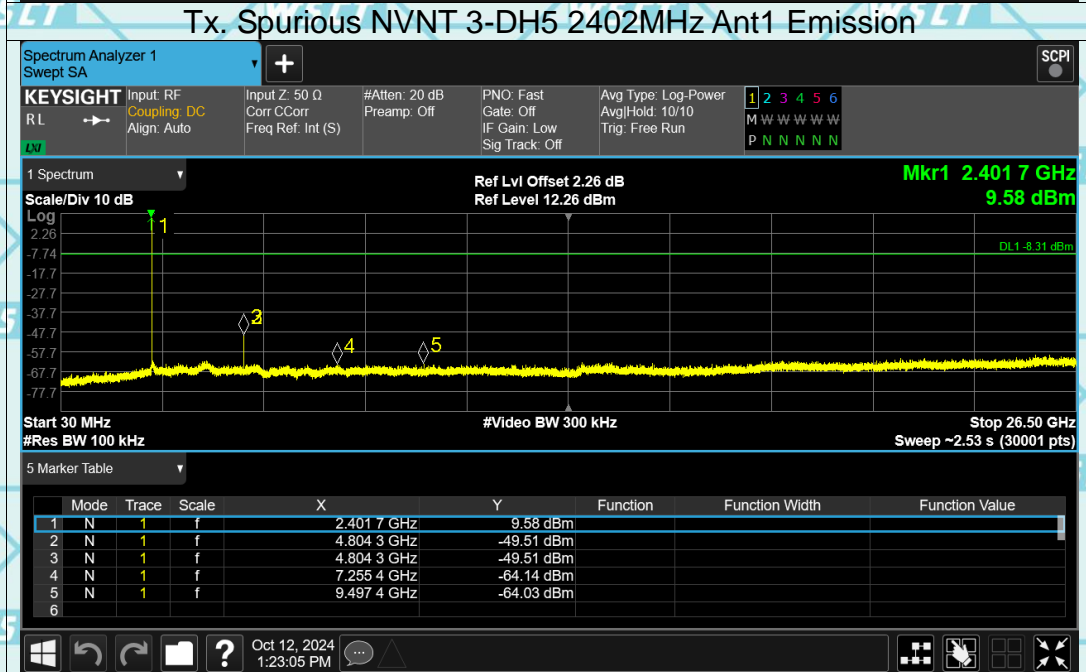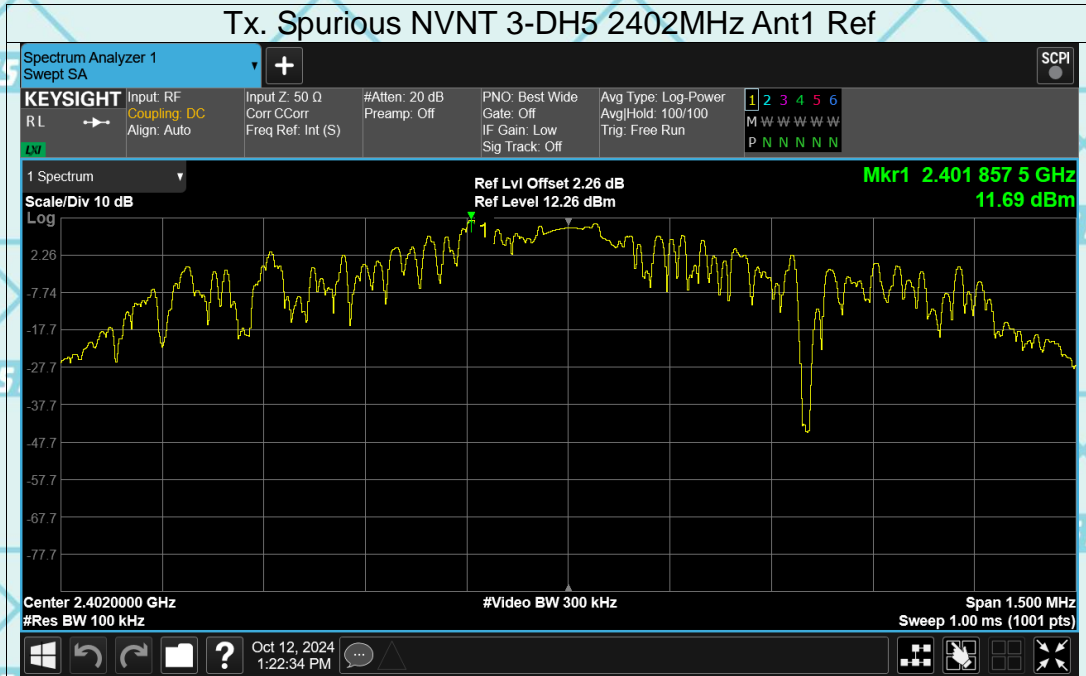

Report No.: WSCT-ANAB-R&E241100056A-BT

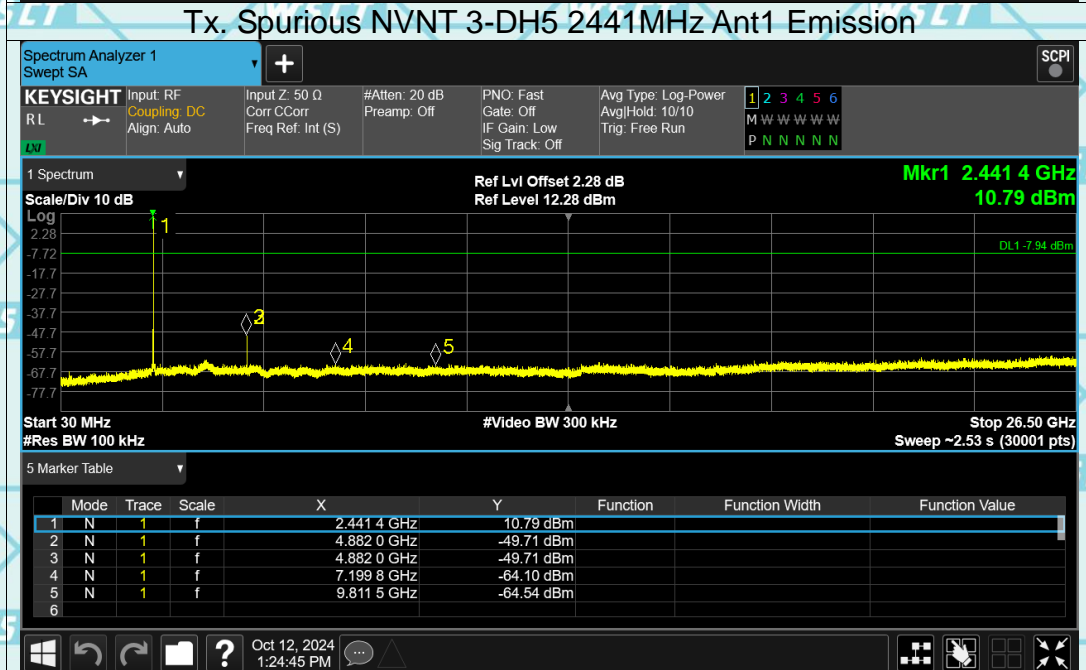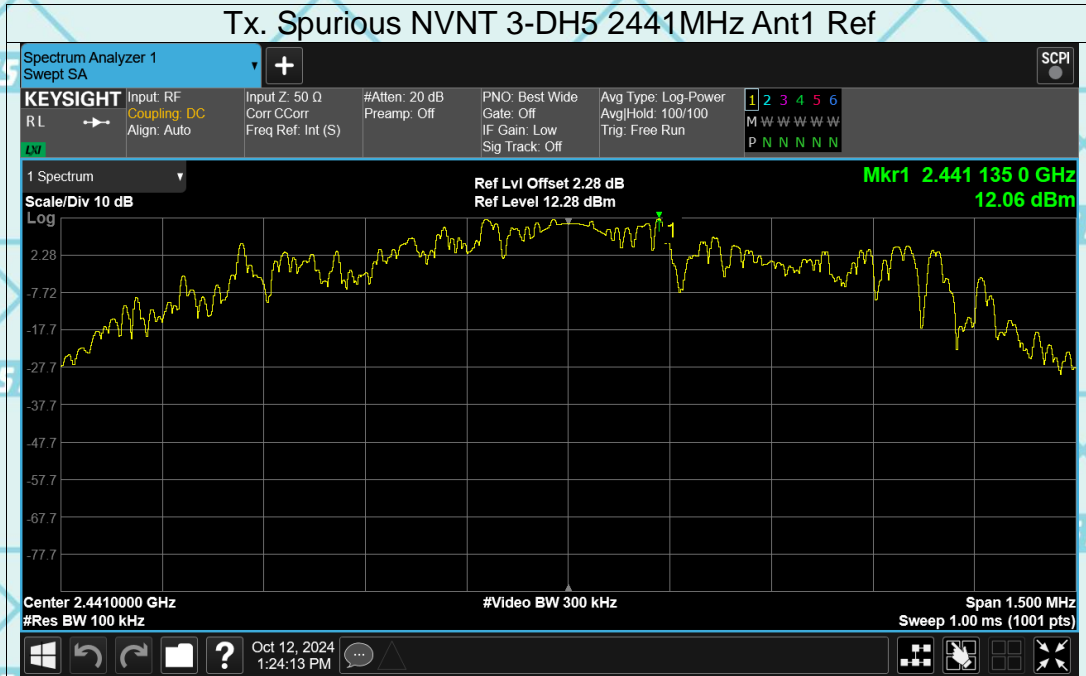

Report No.: WSCT-ANAB-R&E241100056A-BT

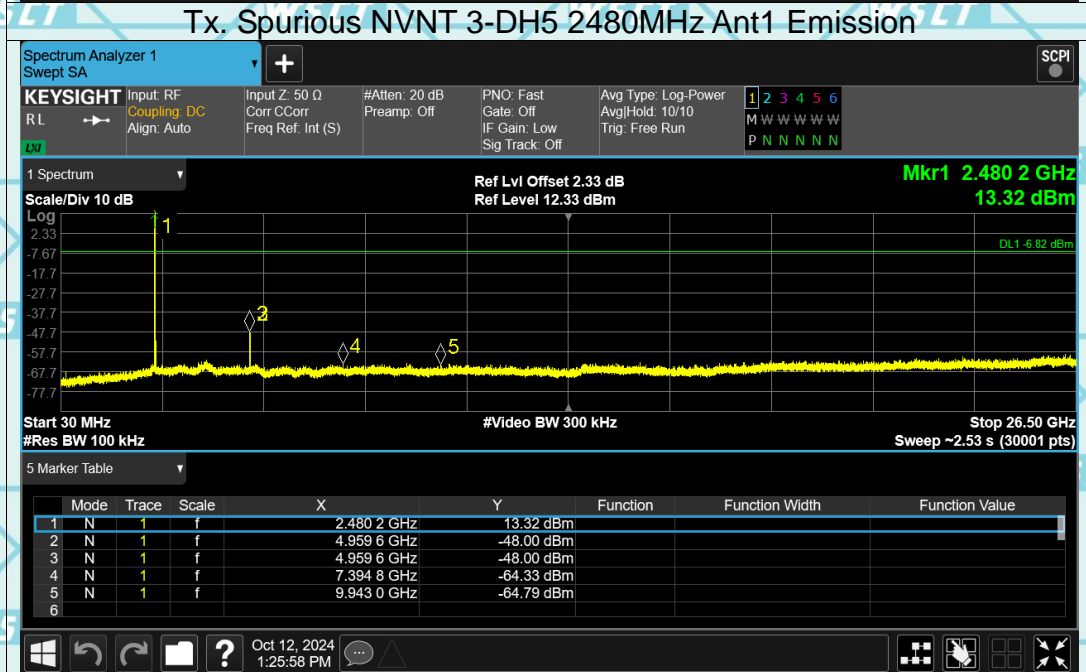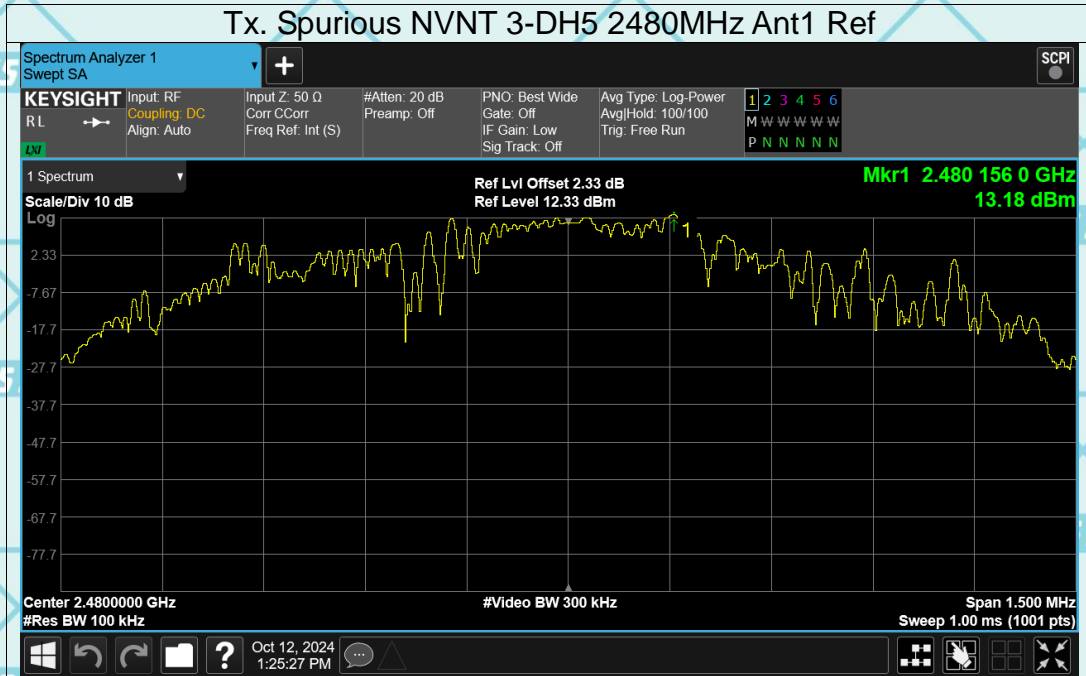

Report No.: WSCT-ANAB-R&E241100056A-BT

6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2014				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	
	Above 1GHz	500 5000	3 3	Average Peak	
Test setup:	For radiated emissions below 30MHz				
	30MHz to 1GHz				

Report No.: WSCT-ANAB-R&E241100056A-BT

	<p>Above 1GHz</p>
<p>Test Mode:</p>	<p>Transmitting mode with modulation</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. <p>For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final</p>

Report No.: WSCT-ANAB-R&E241100056A-BT

	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"> 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: <ol style="list-style-type: none"> (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N1 * L1 + N2 * L2 + \dots + Nn - 1 * Ln - 1 + Nn * Ln$ Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log(Duty cycle) Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
<p>Test results:</p>	<p>PASS</p>

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz. According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.




Report No.: WSCT-ANAB-R&E241100056A-BT

6.11.2. Test Data

Please refer to following diagram for individual

Below 1GHz

Horizontal:

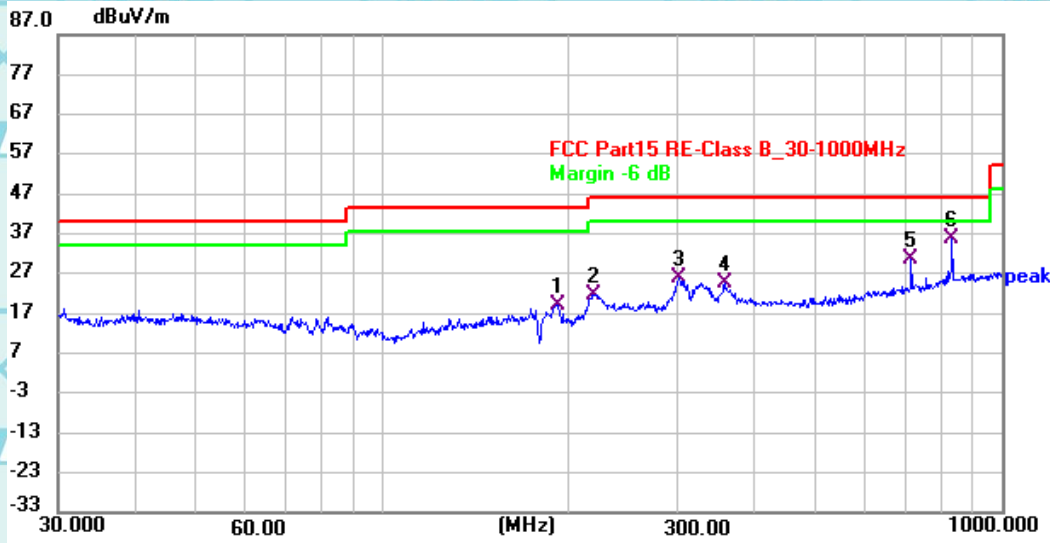


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	191.9132	42.18	-23.08	19.10	43.50	-24.40	QP
2	219.4598	45.63	-23.84	21.79	46.00	-24.21	QP
3	302.0837	46.16	-20.12	26.04	46.00	-19.96	QP
4	356.9886	43.71	-19.01	24.70	46.00	-21.30	QP
5	714.1734	42.74	-12.07	30.67	46.00	-15.33	QP
6 *	831.4928	46.20	-10.55	35.65	46.00	-10.35	QP



Report No.: WSCT-ANAB-R&E241100056A-BT

Vertical:

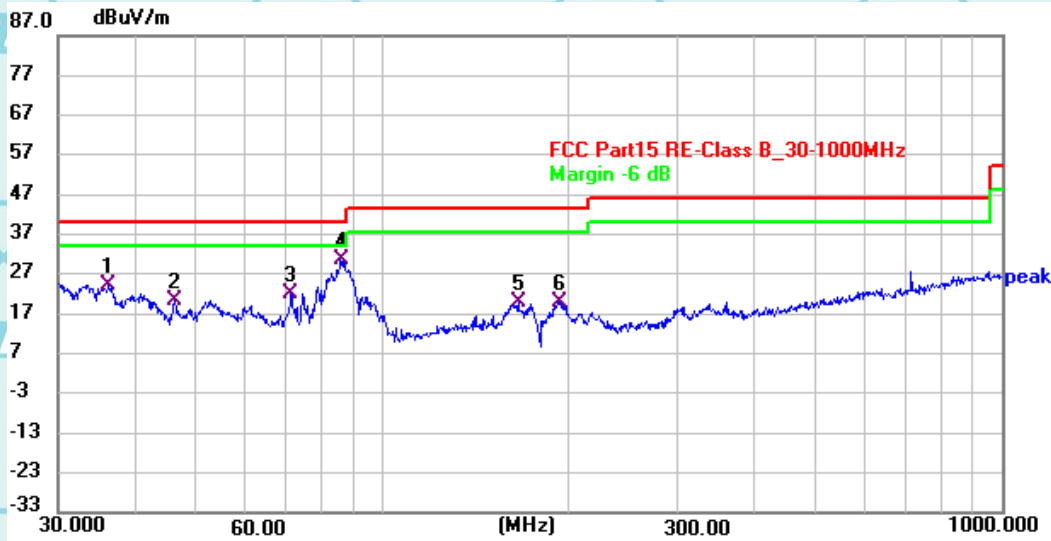

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.3177	43.69	-19.44	24.25	40.00	-15.75	QP
2	46.2996	39.58	-19.01	20.57	40.00	-19.43	QP
3	71.3926	44.37	-22.45	21.92	40.00	-18.08	QP
4 *	85.8984	54.54	-23.91	30.63	40.00	-9.37	QP
5	166.5784	40.12	-20.19	19.93	43.50	-23.57	QP
6	194.3682	43.36	-23.23	20.13	43.50	-23.37	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)



Report No.: WSCT-ANAB-R&E241100056A-BT

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz

Horizontal:

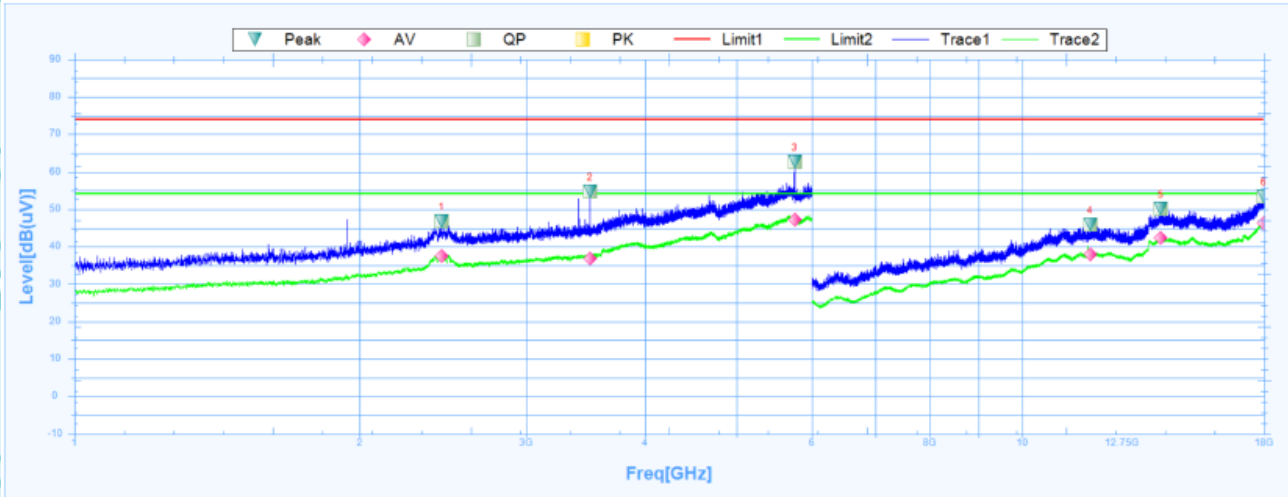


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2438.7500	46.72	27.39	19.33	74	-27.28	283.6	Horizontal	PK	Pass
1	2438.7500	37.61	27.39	10.22	54	-16.39	283.6	Horizontal	AV	Pass
2	3501.8750	54.79	28.5	26.29	74	-19.21	318.3	Horizontal	PK	Pass
2	3501.8750	36.95	28.5	8.45	54	-17.05	318.3	Horizontal	AV	Pass
3	5756.8750	62.65	32.41	30.24	74	-11.35	7.4	Horizontal	PK	Pass
3	5756.8750	47.3	32.41	14.89	54	-6.7	7.4	Horizontal	AV	Pass
4	11797.5000	45.97	16.2	29.77	74	-28.03	258.1	Horizontal	PK	Pass
4	11797.5000	38.01	16.2	21.81	54	-15.99	258.1	Horizontal	AV	Pass
5	14011.5000	50.05	19.12	30.93	74	-23.95	135	Horizontal	PK	Pass
5	14011.5000	42.38	19.12	23.26	54	-11.62	135	Horizontal	AV	Pass
6	17986.5000	53.31	23.83	29.48	74	-20.69	205.4	Horizontal	PK	Pass
6	17986.5000	46.43	23.83	22.6	54	-7.57	205.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E241100056A-BT

Vertical:

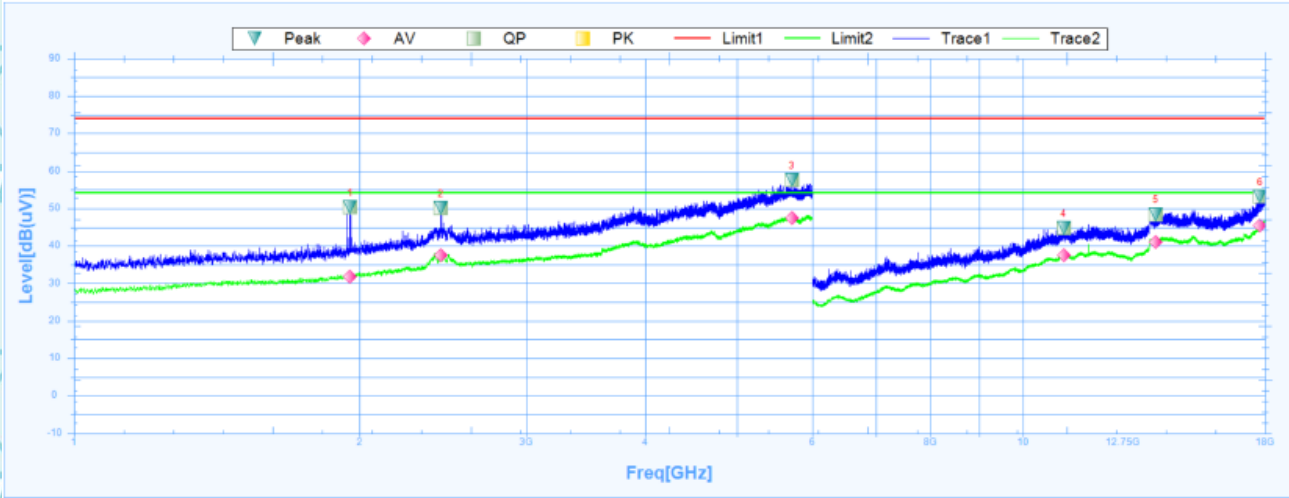

Susputed Data List


NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1954.3750	50.27	25.69	24.58	74	-23.73	170.2	Vertical	PK	Pass
1	1954.3750	31.75	25.69	6.06	54	-22.25	170.2	Vertical	AV	Pass
2	2436.2500	50.15	27.38	22.77	74	-23.85	359.9	Vertical	PK	Pass
2	2436.2500	37.4	27.38	10.02	54	-16.6	359.9	Vertical	AV	Pass
3	5709.3750	57.64	32.34	25.3	74	-16.36	85.3	Vertical	PK	Pass
3	5709.3750	47.52	32.34	15.18	54	-6.48	85.3	Vertical	AV	Pass
4	11040.0000	44.78	15.74	29.04	74	-29.22	1	Vertical	PK	Pass
4	11040.0000	37.6	15.74	21.86	54	-16.4	1	Vertical	AV	Pass
5	13809.0000	48.44	18.57	29.87	74	-25.56	311.7	Vertical	PK	Pass
5	13809.0000	41.13	18.57	22.56	54	-12.87	311.7	Vertical	AV	Pass
6	17791.5000	53.09	22.57	30.52	74	-20.91	359.5	Vertical	PK	Pass
6	17791.5000	45.47	22.57	22.9	54	-8.53	359.5	Vertical	AV	Pass



Report No.: WSCT-ANAB-R&E241100056A-BT

Middle channel: 2440MHz

Horizontal:

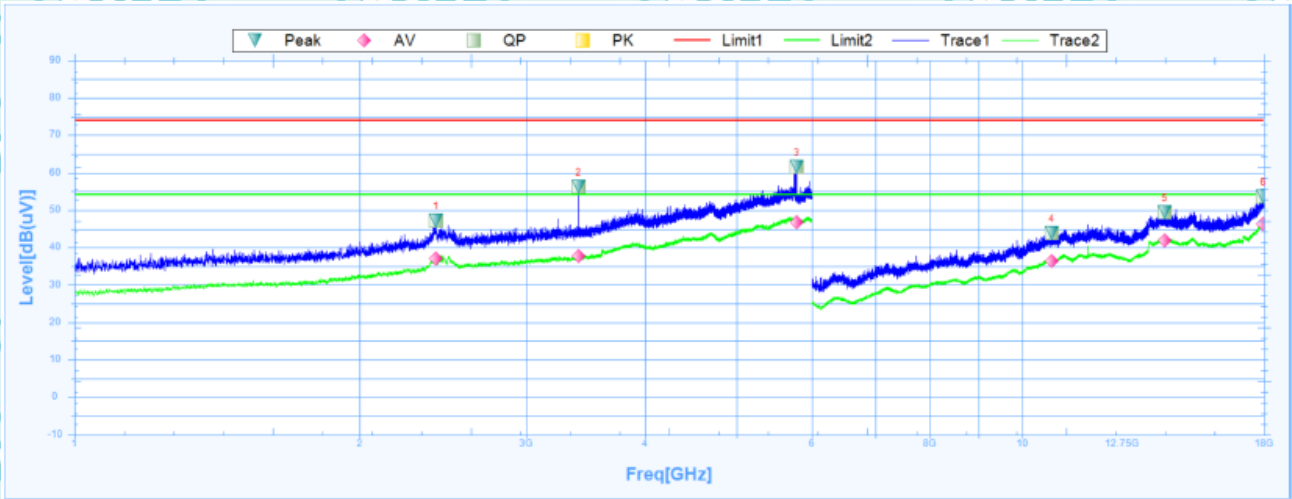


Susputed Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2408.1250	47.12	27.29	19.83	74	-26.88	360	Horizontal	PK	Pass
1	2408.1250	37.17	27.29	9.88	54	-16.83	360	Horizontal	AV	Pass
2	3405.0000	56.28	28.44	27.84	74	-17.72	29.2	Horizontal	PK	Pass
2	3405.0000	37.81	28.44	9.37	54	-16.19	29.2	Horizontal	AV	Pass
3	5784.3750	61.52	32.46	29.06	74	-12.48	238.4	Horizontal	PK	Pass
3	5784.3750	46.75	32.46	14.29	54	-7.25	238.4	Horizontal	AV	Pass
4	10743.0000	43.84	14.67	29.17	74	-30.16	287.8	Horizontal	PK	Pass
4	10743.0000	36.49	14.67	21.82	54	-17.51	287.8	Horizontal	AV	Pass
5	14143.5000	49.43	18.98	30.45	74	-24.57	138.4	Horizontal	PK	Pass
5	14143.5000	41.82	18.98	22.84	54	-12.18	138.4	Horizontal	AV	Pass
6	17971.5000	53.54	23.73	29.81	74	-20.46	128.8	Horizontal	PK	Pass
6	17971.5000	46.26	23.73	22.53	54	-7.74	128.8	Horizontal	AV	Pass



Report No.: WSCT-ANAB-R&E241100056A-BT

Vertical:

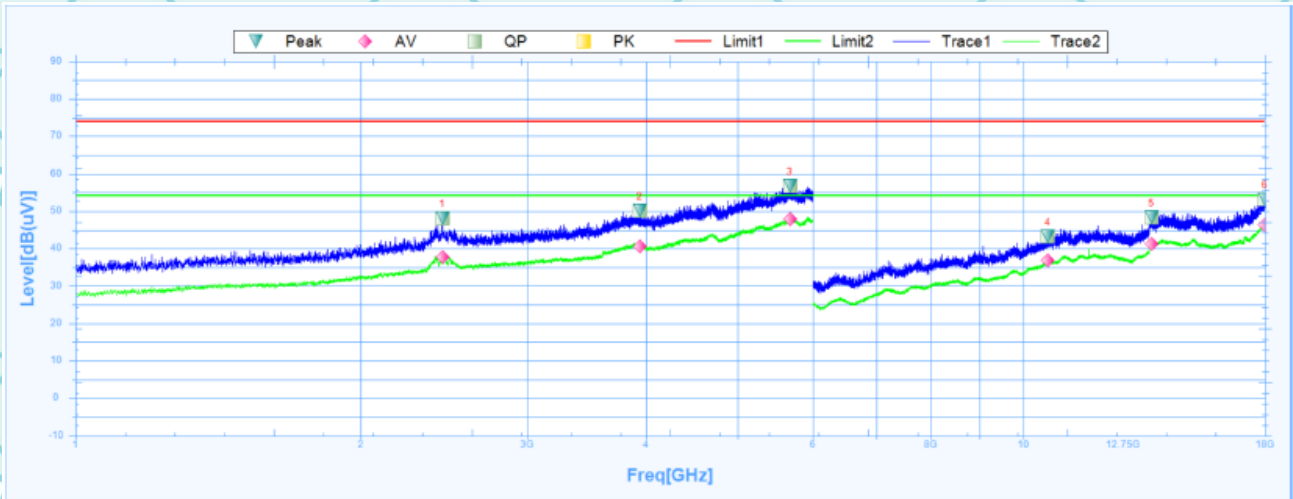

Susputed Data List


NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2438.1250	48.13	27.39	20.74	74	-25.87	229.8	Vertical	PK	Pass
1	2438.1250	37.83	27.39	10.44	54	-16.17	229.8	Vertical	AV	Pass
2	3940.0000	50	29.56	20.44	74	-24	359.9	Vertical	PK	Pass
2	3940.0000	40.69	29.56	11.13	54	-13.31	359.9	Vertical	AV	Pass
3	5673.1250	56.76	32.28	24.48	74	-17.24	359.9	Vertical	PK	Pass
3	5673.1250	47.91	32.28	15.63	54	-6.09	359.9	Vertical	AV	Pass
4	10615.5000	43.33	14.38	28.95	74	-30.67	0.1	Vertical	PK	Pass
4	10615.5000	36.78	14.38	22.4	54	-17.22	0.1	Vertical	AV	Pass
5	13660.5000	48.24	18.15	30.09	74	-25.76	0.1	Vertical	PK	Pass
5	13660.5000	41.23	18.15	23.08	54	-12.77	0.1	Vertical	AV	Pass
6	17991.0000	53.12	23.87	29.25	74	-20.88	0.1	Vertical	PK	Pass
6	17991.0000	46.34	23.87	22.47	54	-7.66	0.1	Vertical	AV	Pass



Report No.: WSCT-ANAB-R&E241100056A-BT

High channel: 2480MHz

Horizontal:

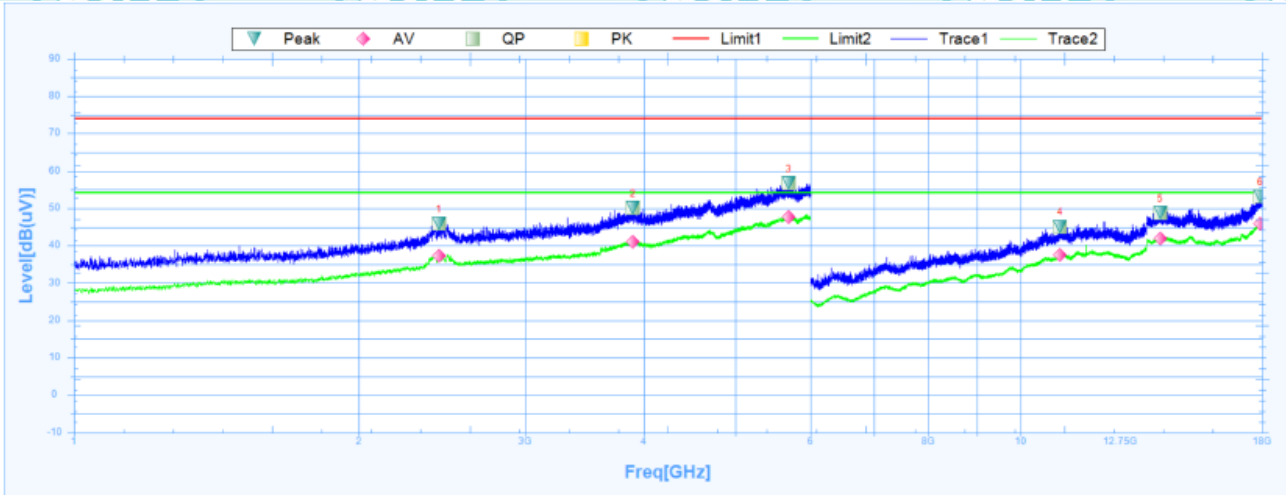


Susputed Data List

NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2428.7500	45.98	27.36	18.62	74	-28.02	123.6	Horizontal	PK	Pass
1	2428.7500	37.39	27.36	10.03	54	-16.61	123.6	Horizontal	AV	Pass
2	3898.1250	50.12	29.46	20.66	74	-23.88	360.1	Horizontal	PK	Pass
2	3898.1250	41.12	29.46	11.66	54	-12.88	360.1	Horizontal	AV	Pass
3	5692.5000	56.64	32.31	24.33	74	-17.36	140.3	Horizontal	PK	Pass
3	5692.5000	47.65	32.31	15.34	54	-6.35	140.3	Horizontal	AV	Pass
4	11014.5000	45.11	15.67	29.44	74	-28.89	335.8	Horizontal	PK	Pass
4	11014.5000	37.6	15.67	21.93	54	-16.4	335.8	Horizontal	AV	Pass
5	14053.5000	48.69	19.07	29.62	74	-25.31	26.2	Horizontal	PK	Pass
5	14053.5000	41.87	19.07	22.8	54	-12.13	26.2	Horizontal	AV	Pass
6	17925.0000	53.26	23.42	29.84	74	-20.74	9.9	Horizontal	PK	Pass
6	17925.0000	45.99	23.42	22.57	54	-8.01	9.9	Horizontal	AV	Pass



Report No.: WSCT-ANAB-R&E241100056A-BT

Vertical:

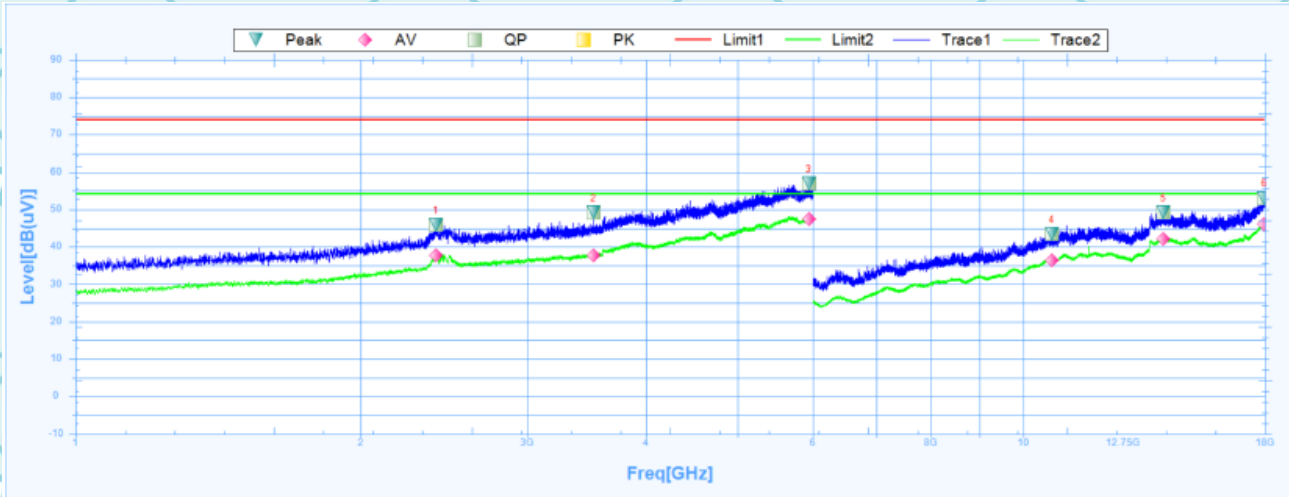

Suspected Data List										
NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2400.0000	45.8	27.26	18.54	74	-28.2	60.3	Vertical	PK	Pass
1	2400.0000	37.62	27.26	10.36	54	-16.38	60.3	Vertical	AV	Pass
2	3523.1250	49.26	28.56	20.7	74	-24.74	53.1	Vertical	PK	Pass
2	3523.1250	37.82	28.56	9.26	54	-16.18	53.1	Vertical	AV	Pass
3	5940.0000	56.86	32.7	24.16	74	-17.14	7.5	Vertical	PK	Pass
3	5940.0000	47.4	32.7	14.7	54	-6.6	7.5	Vertical	AV	Pass
4	10717.5000	43.55	14.63	28.92	74	-30.45	116.8	Vertical	PK	Pass
4	10717.5000	36.34	14.63	21.71	54	-17.66	116.8	Vertical	AV	Pass
5	14061.0000	49.2	19.06	30.14	74	-24.8	-0.1	Vertical	PK	Pass
5	14061.0000	42.18	19.06	23.12	54	-11.82	-0.1	Vertical	AV	Pass
6	17964.0000	53.07	23.67	29.4	74	-20.93	257.9	Vertical	PK	Pass
6	17964.0000	46.05	23.67	22.38	54	-7.95	257.9	Vertical	AV	Pass

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
5. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)



Report No.: WSCT-ANAB-R&E241100056A-BT

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	64.33	-8.76	55.57	74	18.43	H	PK
2387	54.62	-8.76	45.86	54	8.14	H	AV
2387	61.24	-8.73	52.51	74	21.49	V	PK
2387	54.78	-8.73	46.05	54	7.95	V	AV
2390	60.59	-8.76	51.83	74	22.17	H	PK
2390	55.06	-8.76	46.30	54	7.70	H	AV
2390	59.60	-8.73	50.87	74	23.13	V	PK
2390	54.52	-8.73	45.79	54	8.21	V	AV
High Channel							
2483.5	62.92	-8.76	54.16	74	19.84	H	PK
2483.5	55.93	-8.76	47.17	54	6.83	H	AV
2483.5	60.64	-8.73	51.91	74	22.09	V	PK
2483.5	57.49	-8.73	48.76	54	5.24	V	AV

Note: Freq. = Emission frequency in MHz
 Reading level (dBuV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
 Limit (dBuV) = Limit stated in standard
 Margin (dB) = Level (dBuV) – Limits (dBuV)



Report No.: WSCT-ANAB-R&E241100056A-BT

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******

