

TEST REPORT

Reference No. : WTS19S09068444W006
FCC ID..... : 2AIZN-X652B
Applicant..... : INFINIX MOBILITY LIMITED
Address : ROOM 604 6/F SOUTH TOWER WORLD, FINANCE CTR
HARBOUR CITY 17 CANTON ROAD TST KL, Hong Kong
Manufacturer : SHENZHEN TECNO TECHNOLOGY CO.,LTD.
Address : 101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng
Street, Longhua District, Shenzhen City, P.R. China
Product Name : Mobile Phone
Model No. : X652B
Brand..... : Infinix
Standards..... : FCC CFR47 Part 15 E Section 15.407: 2018
Date of Receipt sample..... : 2019-09-30
Date of Test..... : 2019-10-08 to 2019-10-18
Date of Issue : 2019-10-21
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Test Facility:**A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS	4
4 REVISION HISTORY	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.	7
5.2 DETAILS OF E.U.T.	7
5.3 CHANNEL LIST	8
5.4 TEST MODE DESCRIPTION:.....	9
6 EQUIPMENT USED DURING TEST	12
6.1 EQUIPMENTS LIST	12
6.2 DESCRIPTION OF SUPPORT UNITS	13
6.3 MEASUREMENT UNCERTAINTY	13
6.4 TEST EQUIPMENT CALIBRATION	13
7 TEST SUMMARY	14
8 CONDUCTED EMISSION	15
8.1 E.U.T. OPERATION	15
8.2 EUT SETUP.....	15
8.3 MEASUREMENT DESCRIPTION	15
8.4 CONDUCTED EMISSION TEST RESULT	16
9 RADIATED EMISSIONS.....	18
9.1 EUT OPERATION.....	18
9.2 TEST SETUP	19
9.3 SPECTRUM ANALYZER SETUP	20
9.4 TEST PROCEDURE	21
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	21
9.6 SUMMARY OF TEST RESULTS	22
10 DUTY CYCLE.....	38
10.1 SUMMARY OF TEST RESULTS	38
11 BAND EDGE	45
11.1 TEST PRODUCE	45
11.2 TEST RESULT	46
12 6 DB BANDWIDTH.....	58
12.1 TEST PROCEDURE:.....	58
12.2 TEST RESULT:	58
13 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	66
13.1 TEST PROCEDURE:.....	66
13.2 TEST RESULT:	67
14 CONDUCTED OUTPUT POWER	82
14.1 TEST PROCEDURE:.....	82
14.2 TEST RESULT :	83
15 POWER SPECTRAL DENSITY	98
15.1 TEST PROCEDURE:.....	98
15.2 TEST RESULT:	99
16 FREQUENCY STABILITY.....	114

16.1 TEST PROCEDURE:.....114

16.2 TEST RESULT:115

17 ANTENNA REQUIREMENT116

18 RF EXPOSURE.....117

19 PHOTOGRAPHS OF TEST SETUP AND EUT.....118

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S09068 444W006	2019-09-30	2019-10-08 to 2019-10-18	2019-10-21	original	-	Valid

5 General Information

5.1 General Description of E.U.T.

Product:	Mobile Phone
Model(s):	X652B
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V
LTE Band(s):	FDD Band 2/4/5/7
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80)
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	H627_V1.2
Software Version:	X652B-H627CD-P-190911V163
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage
Note:	N/A

5.2 Details of E.U.T.

Operation Frequency:	802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz
Max. RF output power:	U-NII-1: 13.57dBm U-NII-3: 9.78dBm
Type of Modulation:	OFDM
Antenna installation:	internal permanent antenna
Antenna Gain:	U-NII-1: -2.9dBi U-NII-3: -2.9dBi
Ratings:	Battery DC 3.85V, 3900mAh DC 5V, 1.2A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.2A)
Adapter:	Manufacturer: Dongguan Aohai Power Technology CO.,LTD Model No.: CU-52JT

5.3 Channel List

U-NII-1 (5.15-5.25GHz)		U-NII-3 (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5785
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11 ac(HT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210	155	5775

5.4 Test Mode Description:

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is no less 98%.

The software is installed in operation system, named "RFTestTool.apk", Version 1, date 20160518.

Test Items	Mode	Data Rate	Channel	TX/RX
Radiated Emissions	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Duty Cycle	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Band Edge	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX

6dB Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Conducted Output Power	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Power Spectral Density	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Frequency Stability	Un-modulation	/	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2019-09-14	2020-09-13
2.	LISN	R&S	ENV216	101215	2019-09-14	2020-09-13
3.	Cable	Top	TYPE16(3.5M)	-	2019-09-14	2020-09-13
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2019-09-14	2020-09-13
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2019-09-14	2020-09-13
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2019-09-14	2020-09-13
4.	Cable	LARGE	RF300	-	2019-09-14	2020-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	2019-09-14	2020-09-13
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2019-09-14	2020-09-13
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2019-09-14	2020-09-13
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-09-14	2020-09-13
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2019-09-14	2020-09-13
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2019-09-14	2020-09-13
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-09-14	2020-09-13
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2019-09-14	2020-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2019-09-14	2020-09-13
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2019-09-14	2020-09-13
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2019-09-14	2020-09-13
4	Cable	HUBER+SUHNER	CBL2	525178	2019-09-14	2020-09-13
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2019-09-14	2020-09-13
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2019-09-14	2020-09-13
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2019-09-14	2020-09-13

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

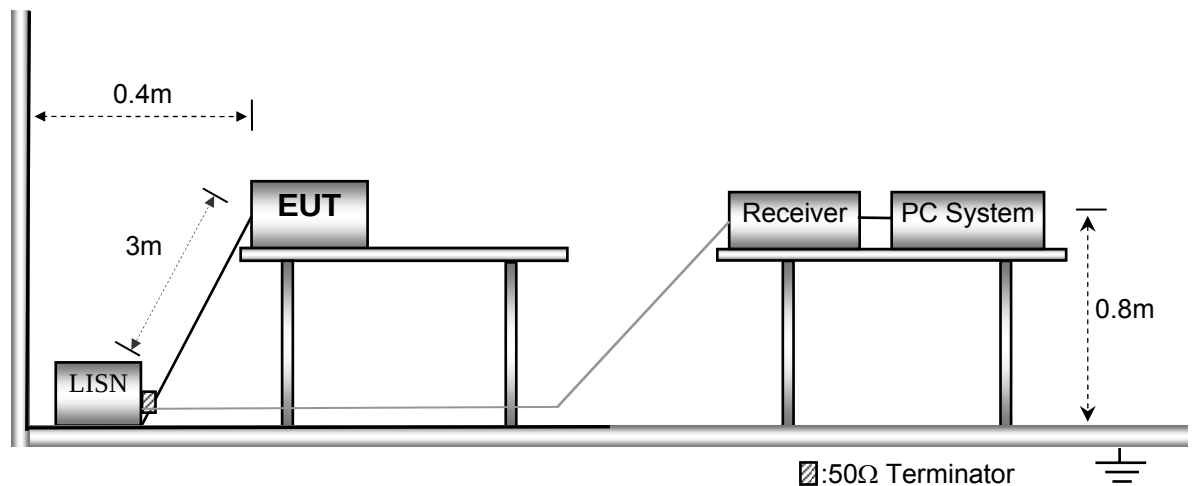


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.

Live line:

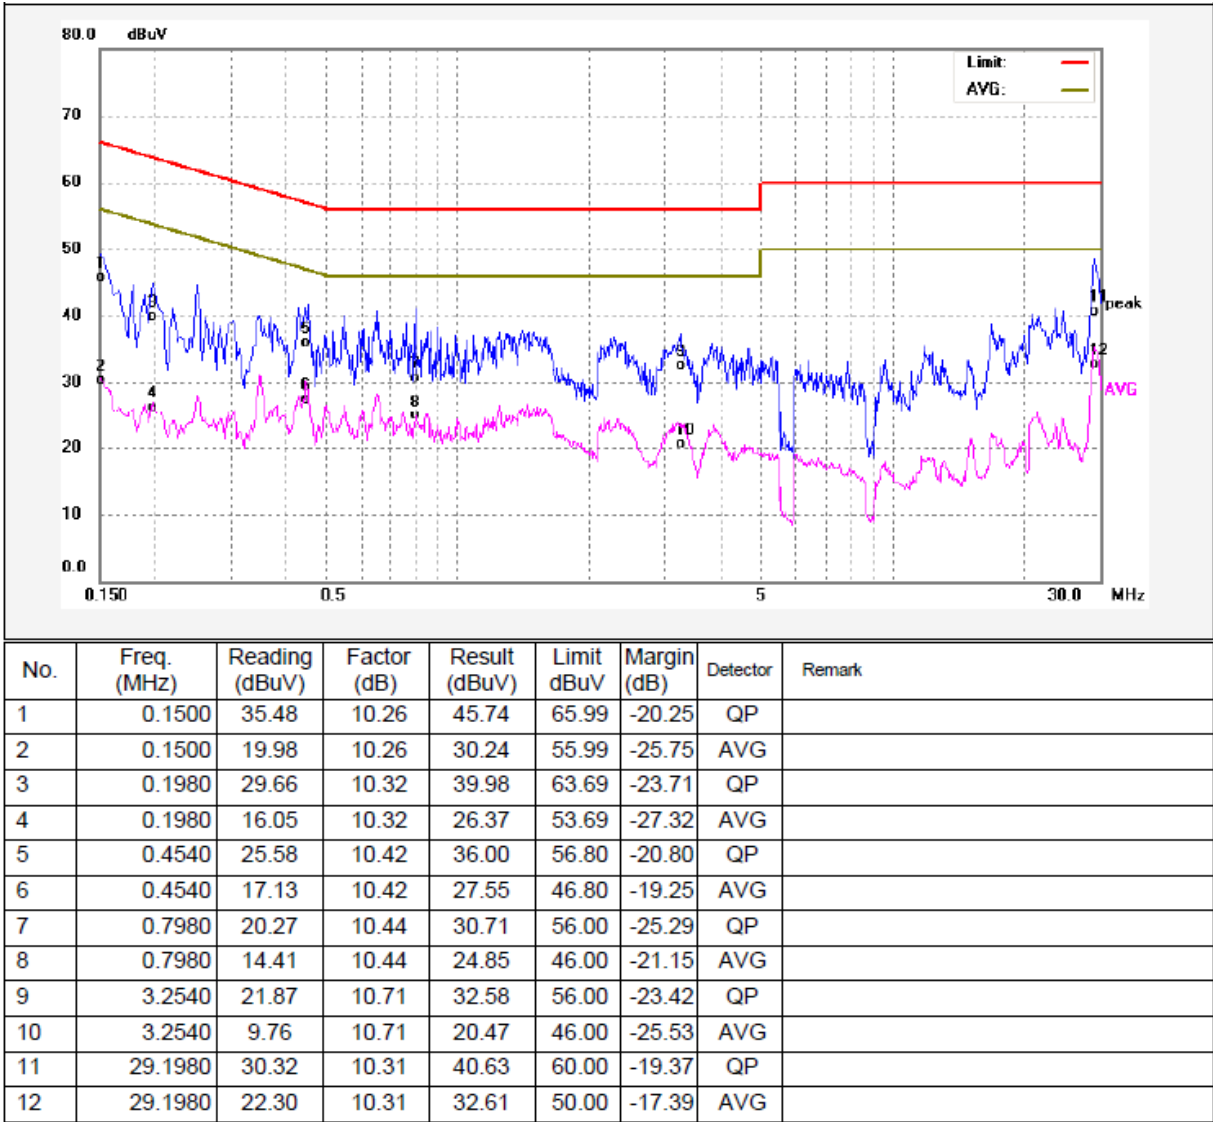

Neutral line:

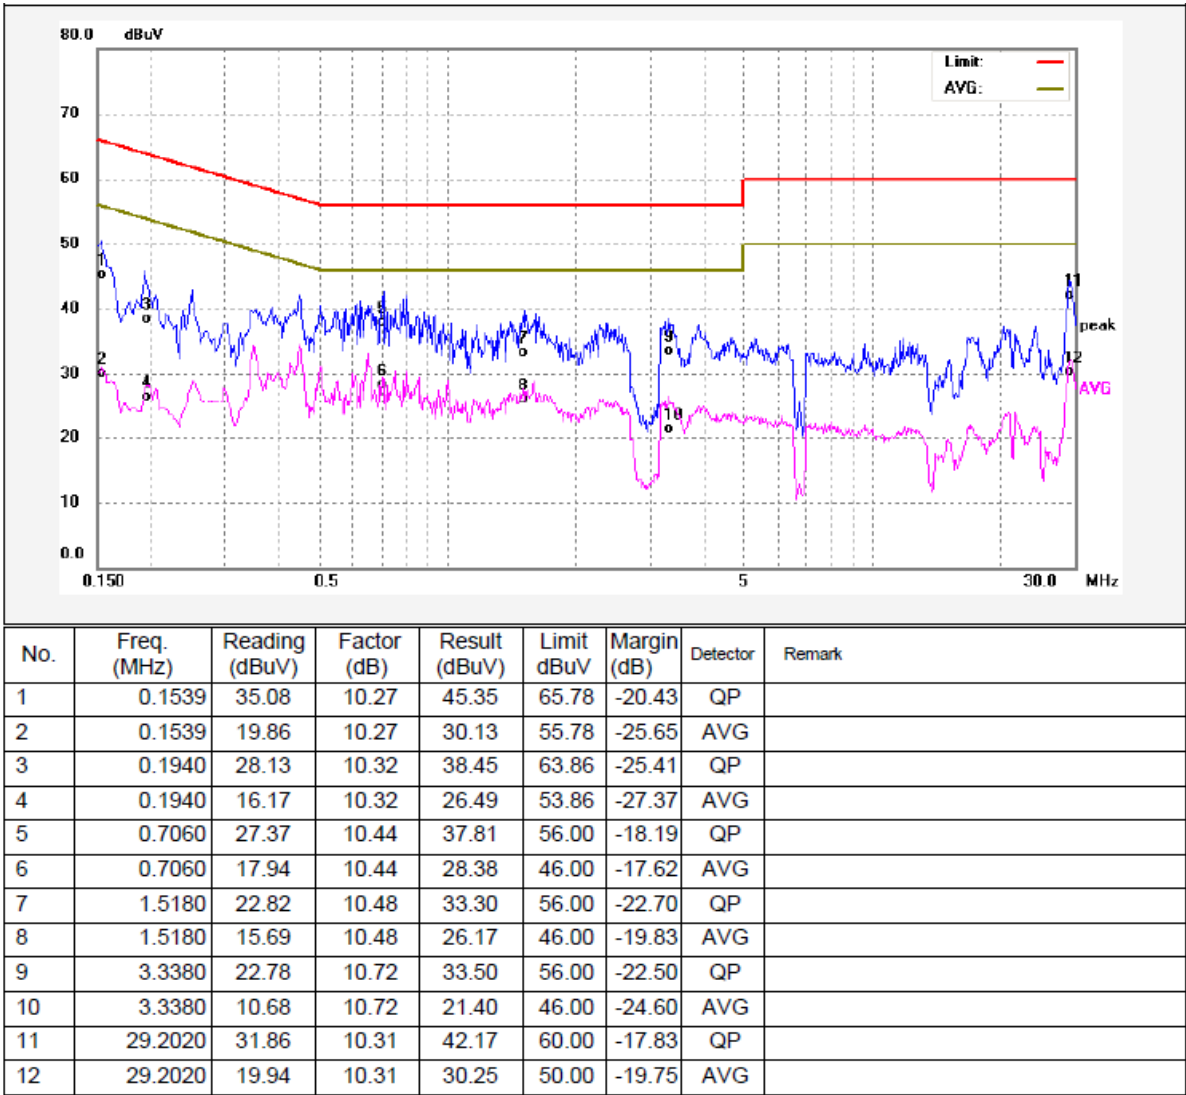

9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

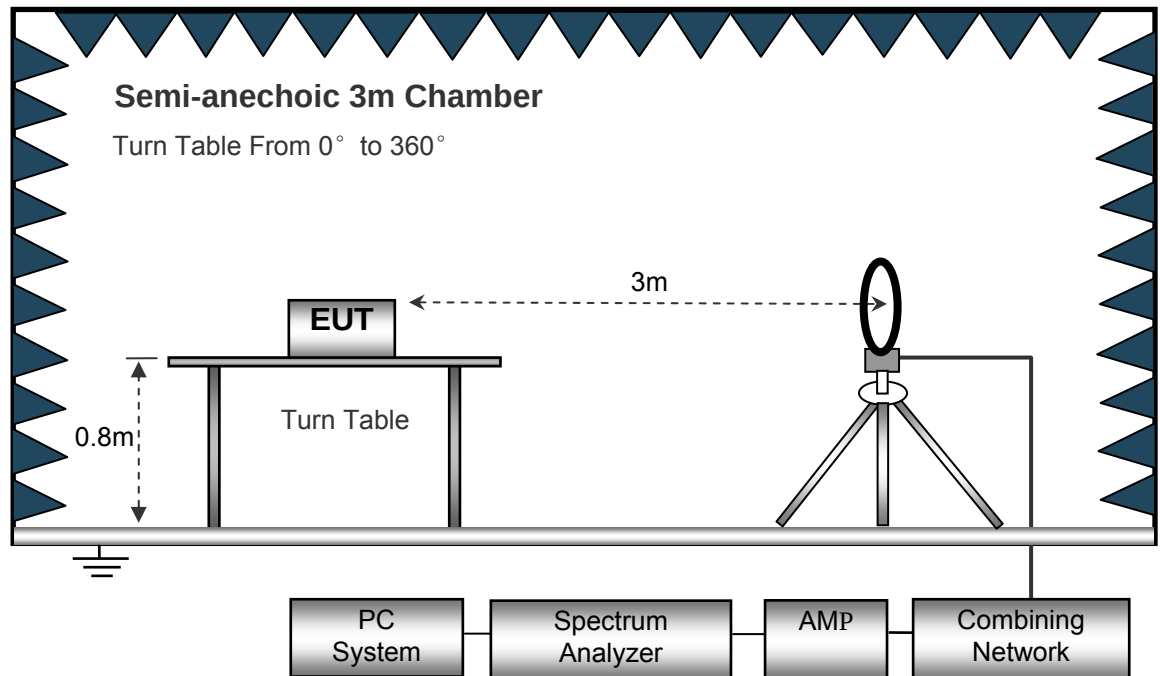

The test setup for emission measurement from 30 MHz to 1 GHz.

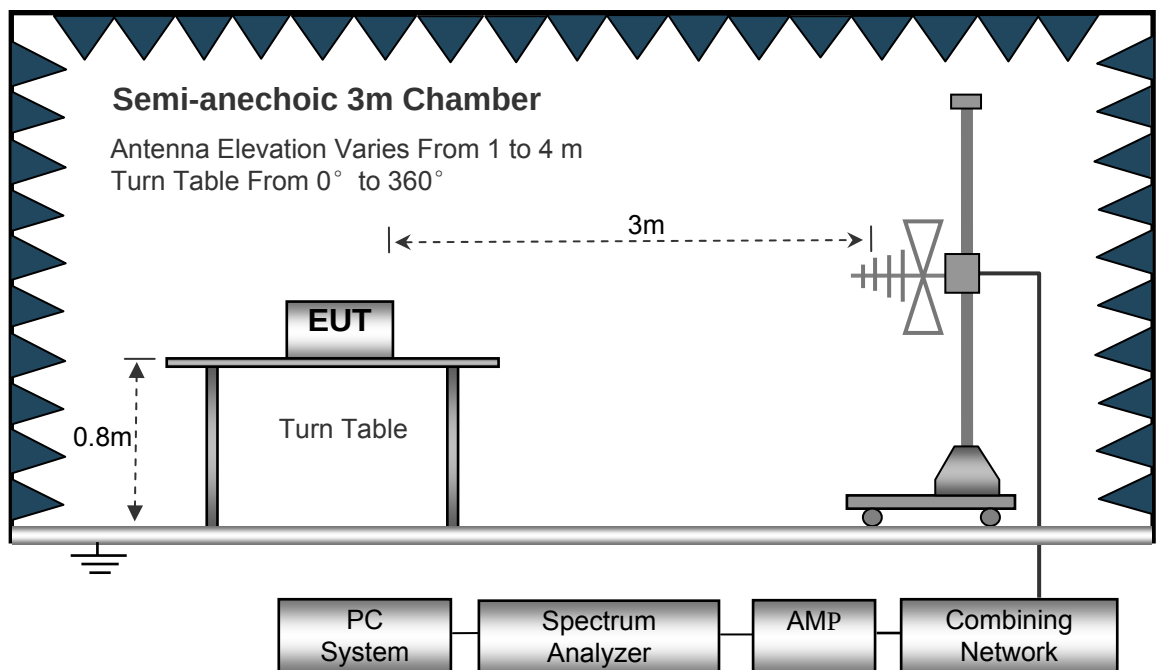

The test setup for emission measurement above 1 GHz.

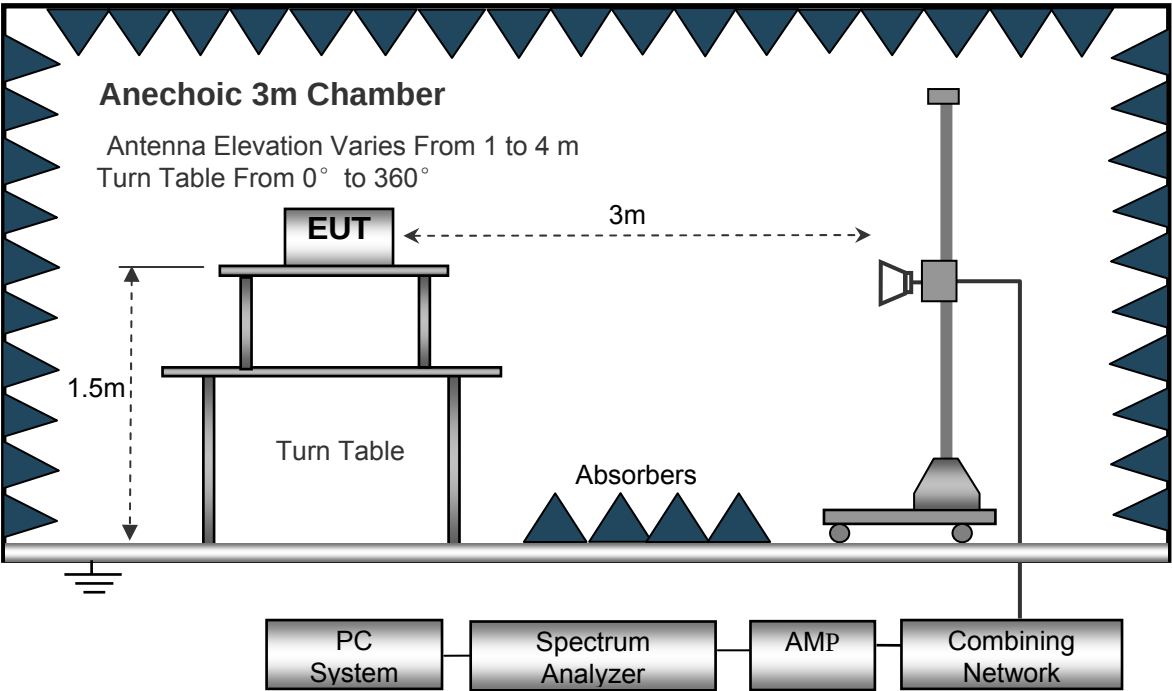

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-1:802.11a 5180MHz							
6.021	25.34	QP	21.84	40.00	7.18	29.54	-22.36
15.730	25.36	QP	21.35	40.00	6.71	29.54	-22.83
25.680	25.18	QP	20.67	40.00	5.85	29.54	-23.69
U-NII-1:802.11n20 5180MHz							
6.021	25.31	QP	21.84	40.00	7.15	29.54	-22.39
15.730	24.52	QP	21.35	40.00	5.87	29.54	-23.67
25.680	24.96	QP	20.67	40.00	5.63	29.54	-23.91
U-NII-1:802.11ac 20 5180MHz							
6.021	25.22	QP	21.84	40.00	7.06	29.54	-22.48
15.730	24.75	QP	21.35	40.00	6.10	29.54	-23.44
25.680	25.16	QP	20.67	40.00	5.83	29.54	-23.71
U-NII-1:802.11n40 5190MHz							
6.021	25.33	QP	21.84	40.00	7.17	29.54	-22.37
15.730	24.76	QP	21.35	40.00	6.11	29.54	-23.43
25.680	24.18	QP	20.67	40.00	4.85	29.54	-24.69
U-NII-1:802.11ac40 5190MHz							
6.021	25.24	QP	21.84	40.00	7.08	29.54	-22.46
15.730	25.66	QP	21.35	40.00	7.01	29.54	-22.53
25.680	24.77	QP	20.67	40.00	5.44	29.54	-24.10
U-NII-1:802.11ac80 5210MHz							
6.021	25.20	QP	21.84	40.00	7.04	29.54	-22.50
15.730	24.58	QP	21.35	40.00	5.93	29.54	-23.61
25.680	25.61	QP	20.67	40.00	6.28	29.54	-23.26

Frequency	Measurement results dBμV @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dBμV/m @30m	Limits dBμV/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-3 802.11a 5745MHz							
6.021	25.50	QP	21.84	40.00	7.34	29.54	-22.20
15.730	24.89	QP	21.35	40.00	6.24	29.54	-23.30
25.680	25.11	QP	20.67	40.00	5.78	29.54	-23.76
U-NII-3 802.11n20 5745MHz							
6.021	25.06	QP	21.84	40.00	6.90	29.54	-22.64
15.730	24.88	QP	21.35	40.00	6.23	29.54	-23.31
25.680	25.38	QP	20.67	40.00	6.05	29.54	-23.49
U-NII-3 802.11ac 5745MHz							
6.021	25.03	QP	21.84	40.00	6.87	29.54	-22.67
15.730	25.15	QP	21.35	40.00	6.50	29.54	-23.04
25.680	24.80	QP	20.67	40.00	5.47	29.54	-24.07
U-NII-3 802.11n40 5755MHz							
6.021	25.02	QP	21.84	40.00	6.86	29.54	-22.68
15.730	24.82	QP	21.35	40.00	6.17	29.54	-23.37
25.680	25.29	QP	20.67	40.00	5.96	29.54	-23.58
U-NII-3 802.11ac40 5755MHz							
6.021	25.35	QP	21.84	40.00	7.19	29.54	-22.35
15.730	24.07	QP	21.35	40.00	5.42	29.54	-24.12
25.680	24.54	QP	20.67	40.00	5.21	29.54	-24.33
U-NII-3 802.11ac80 5775MHz							
6.021	25.42	QP	21.84	40.00	7.26	29.54	-22.28
15.730	24.53	QP	21.35	40.00	5.88	29.54	-23.66
25.680	25.69	QP	20.67	40.00	6.36	29.54	-23.18

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
223.45	40.89	QP	156	1.5	H	-11.62	29.27	46.00	-16.73
223.45	36.74	QP	280	1.5	V	-11.62	25.12	46.00	-20.88
4532.51	50.93	PK	271	2.0	H	-2.03	48.90	74.00	-25.10
4532.51	45.93	Ave	271	2.0	H	-2.03	43.90	54.00	-10.10
5119.12	51.61	PK	200	1.6	H	-1.02	50.59	74.00	-23.41
5119.12	48.21	Ave	200	1.6	H	-1.02	47.19	54.00	-6.81
10360.00	39.78	PK	103	1.5	H	5.33	45.11	74.00	-28.89
10360.00	37.10	Ave	103	1.5	H	5.33	42.43	54.00	-11.57
802.11a U-NII-1 Middle channel 5200MHz									
223.45	41.10	QP	297	1.3	H	-11.62	29.48	46.00	-16.52
223.45	35.57	QP	29	1.1	V	-11.62	23.95	46.00	-22.05
4504.69	52.35	PK	194	2.0	H	-1.94	50.41	74.00	-23.59
4504.69	44.76	Ave	194	2.0	H	-1.94	42.82	54.00	-11.18
5123.08	52.51	PK	215	1.8	H	-1.06	51.45	74.00	-22.55
5123.08	49.51	Ave	215	1.8	H	-1.06	48.45	54.00	-5.55
10400.00	41.15	PK	167	1.4	H	5.21	46.36	74.00	-27.64
10400.00	35.66	Ave	167	1.4	H	5.21	40.87	54.00	-13.13

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
223.45	40.82	QP	99	1.9	H	-11.62	29.20	46.00	-16.80
223.45	35.53	QP	132	1.1	V	-11.62	23.91	46.00	-22.09
4517.90	53.78	PK	83	1.2	H	-2.24	51.54	74.00	-22.46
4517.90	45.36	Ave	83	1.2	H	-2.24	43.12	54.00	-10.88
5144.63	54.05	PK	16	1.9	H	-1.09	52.96	74.00	-21.04
5144.63	51.31	Ave	16	1.9	H	-1.09	50.22	54.00	-3.78
10480.00	41.22	PK	84	1.1	H	5.14	46.36	74.00	-27.64
10480.00	35.96	Ave	84	1.1	H	5.14	41.10	54.00	-12.90
802.11a U-NII-3 Low Channel 5745MHz									
223.45	41.41	QP	247	1.6	H	-11.62	29.79	46.00	-16.21
223.45	36.32	QP	345	1.1	V	-11.62	24.70	46.00	-21.30
4526.60	55.01	PK	140	1.6	H	-2.06	52.95	74.00	-21.05
4526.60	45.85	Ave	140	1.6	H	-2.06	43.79	54.00	-10.21
11490.00	38.28	PK	353	1.0	H	5.93	44.21	68.20	-23.99
11490.00	35.80	Ave	353	1.0	H	5.93	41.73	54.00	-12.27
5379.94	46.48	PK	232	1.8	H	-1.25	45.23	74.00	-28.77
5379.94	37.84	Ave	232	1.8	H	-1.25	36.59	54.00	-17.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-3 Middle channel 5785MHz									
223.45	40.03	QP	197	1.7	H	-11.62	28.41	46.00	-17.59
223.45	36.69	QP	91	1.7	V	-11.62	25.07	46.00	-20.93
4507.49	54.36	PK	107	1.4	H	-2.03	52.33	74.00	-21.67
4507.49	44.50	Ave	107	1.4	H	-2.03	42.47	54.00	-11.53
11570.00	41.10	PK	301	1.6	H	5.81	46.91	68.20	-21.29
11570.00	36.68	Ave	301	1.6	H	5.81	42.49	54.00	-11.51
5352.34	46.46	PK	294	1.9	H	-1.22	45.24	74.00	-28.76
5352.34	38.46	Ave	294	1.9	H	-1.22	37.24	54.00	-16.76
802.11a U-NII-3 High channel 5825MHz									
223.45	41.19	QP	156	1.3	H	-11.62	29.57	46.00	-16.43
223.45	38.06	QP	21	1.3	V	-11.62	26.44	46.00	-19.56
4539.80	55.70	PK	111	1.5	H	-1.84	53.86	74.00	-20.14
4539.80	44.35	Ave	111	1.5	H	-1.84	42.51	54.00	-11.49
11650.00	39.51	PK	42	1.6	H	5.84	45.35	68.20	-22.85
11650.00	37.18	Ave	42	1.6	H	5.84	43.02	54.00	-10.98
5366.22	45.05	PK	324	1.6	H	-1.30	43.75	74.00	-30.25
5366.22	37.47	Ave	324	1.6	H	-1.30	36.17	54.00	-17.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-1 Low Channel 5180MHz									
223.45	41.72	QP	288	1.3	H	-11.62	30.10	46.00	-15.90
223.45	39.23	QP	194	1.1	V	-11.62	27.61	46.00	-18.39
4537.55	56.94	PK	135	1.2	H	-2.14	54.80	74.00	-19.20
4537.55	44.91	Ave	135	1.2	H	-2.14	42.77	54.00	-11.23
5129.15	47.60	PK	172	1.0	H	-1.06	46.54	74.00	-27.46
5129.15	36.49	Ave	172	1.0	H	-1.06	35.43	54.00	-18.57
10360.00	38.90	PK	100	1.4	H	5.33	44.23	74.00	-29.77
10360.00	36.31	Ave	100	1.4	H	5.33	41.64	54.00	-12.36
802.11n(HT20) U-NII-1 Middle channel 5200MHz									
223.45	42.59	QP	236	1.9	H	-11.62	30.97	46.00	-15.03
223.45	39.74	QP	71	1.2	V	-11.62	28.12	46.00	-17.88
4500.38	56.63	PK	203	1.3	H	-2.12	54.51	74.00	-19.49
4500.38	44.81	Ave	203	1.3	H	-2.12	42.69	54.00	-11.31
5114.62	48.99	PK	215	1.1	H	-1.06	47.93	74.00	-26.07
5114.62	37.72	Ave	215	1.1	H	-1.06	36.66	54.00	-17.34
10400.00	40.93	PK	162	1.8	H	5.21	46.14	74.00	-27.86
10400.00	37.09	Ave	162	1.8	H	5.21	42.30	54.00	-11.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
223.45	43.96	QP	288	1.0	H	-11.62	32.34	46.00	-13.66
223.45	40.48	QP	160	1.0	V	-11.62	28.86	46.00	-17.14
4522.28	55.66	PK	15	2.0	H	-1.96	53.70	74.00	-20.30
4522.28	43.94	Ave	15	2.0	H	-1.96	41.98	54.00	-12.02
5123.78	50.28	PK	251	1.7	H	-1.06	49.22	74.00	-24.78
5123.78	39.18	Ave	251	1.7	H	-1.06	38.12	54.00	-15.88
10480.00	40.29	PK	42	1.3	H	5.14	45.43	74.00	-28.57
10480.00	36.25	Ave	42	1.3	H	5.14	41.39	54.00	-12.61
802.11n(HT20) U-NII-3 Low Channel 5745MHz									
223.45	39.95	QP	74	1.9	H	-11.62	28.33	46.00	-17.67
223.45	54.39	QP	251	2.0	V	-11.62	42.77	46.00	-3.23
4506.35	44.02	PK	175	2.0	H	-2.06	41.96	74.00	-32.04
4506.35	50.70	Ave	175	2.0	H	-2.06	48.64	54.00	-5.36
11490.00	36.19	PK	347	1.8	H	5.93	42.12	68.20	-26.08
11490.00	46.49	Ave	347	1.8	H	5.93	52.42	54.00	-1.58
5388.88	45.60	PK	96	1.1	H	-1.25	44.35	74.00	-29.65
5388.88	38.74	Ave	96	1.1	H	-1.25	37.49	54.00	-16.51

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-3 Middle channel 5785MHz									
223.45	40.54	QP	155	1.1	H	-11.62	28.92	46.00	-17.08
223.45	53.21	QP	126	1.0	V	-11.62	41.59	46.00	-4.41
4531.60	43.79	PK	23	1.2	H	-2.03	41.76	74.00	-32.24
4531.60	49.79	Ave	23	1.2	H	-2.03	47.76	54.00	-6.24
11570.00	36.25	PK	340	1.2	H	5.81	42.06	68.20	-26.14
11570.00	45.82	Ave	340	1.2	H	5.81	51.63	54.00	-2.37
5354.26	45.56	PK	135	1.7	H	-1.22	44.34	74.00	-29.66
5354.26	37.21	Ave	135	1.7	H	-1.22	35.99	54.00	-18.01
802.11n(HT20) U-NII-3 High channel 5825MHz									
223.45	40.94	QP	103	1.5	H	-11.62	29.32	46.00	-16.68
223.45	53.79	QP	267	1.5	V	-11.62	42.17	46.00	-3.83
4538.74	42.90	PK	189	1.6	H	-1.84	41.06	74.00	-32.94
4538.74	50.84	Ave	189	1.6	H	-1.84	49.00	54.00	-5.00
11650.00	37.25	PK	188	1.5	H	5.84	43.09	68.20	-25.11
11650.00	47.23	Ave	188	1.5	H	5.84	53.07	54.00	-0.93
5364.64	46.02	PK	3	1.5	H	-1.30	44.72	74.00	-29.28
5364.64	38.88	Ave	3	1.5	H	-1.30	37.58	54.00	-16.42

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) U-NII-1 Low Channel 5190MHz									
223.45	38.54	QP	160	1.8	H	-11.62	26.92	46.00	-19.08
223.45	47.42	QP	148	1.3	V	-11.62	35.80	46.00	-10.20
4525.69	42.37	PK	171	1.2	H	-1.89	40.48	74.00	-33.52
4525.69	34.33	Ave	171	1.2	H	-1.89	32.44	54.00	-21.56
5145.42	46.93	PK	89	1.6	H	-1.06	45.87	74.00	-28.13
5145.42	38.15	Ave	89	1.6	H	-1.06	37.09	54.00	-16.91
10380.00	37.00	PK	260	2.0	H	5.26	42.26	74.00	-31.74
10380.00	36.02	Ave	260	2.0	H	5.26	41.28	54.00	-12.72
802.11n(HT40) U-NII-1 High channel 5230MHz									
223.45	37.06	QP	79	1.4	H	-11.62	25.44	46.00	-20.56
223.45	49.58	QP	139	1.1	V	-11.62	37.96	46.00	-8.04
4502.14	42.56	PK	263	2.0	H	-1.94	40.62	74.00	-33.38
4502.14	29.13	Ave	263	2.0	H	-1.94	27.19	54.00	-26.81
5132.90	48.52	PK	283	1.0	H	-1.06	47.46	74.00	-26.54
5132.90	40.76	Ave	283	1.0	H	-1.06	39.70	54.00	-14.30
10460.00	38.78	PK	109	1.5	H	5.28	44.06	74.00	-29.94
10460.00	36.77	Ave	109	1.5	H	5.28	42.05	54.00	-11.95

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) U-NII-3 Low Channel 5755MHz									
223.45	36.89	QP	252	1.3	H	-11.62	25.27	46.00	-20.73
223.45	48.90	QP	19	1.2	V	-11.62	37.28	46.00	-8.72
4536.26	41.40	PK	211	1.2	H	-1.96	39.44	74.00	-34.56
4536.26	28.09	Ave	211	1.2	H	-1.96	26.13	54.00	-27.87
11510.00	37.52	PK	55	1.5	H	5.88	43.40	68.20	-24.80
11510.00	34.90	Ave	55	1.5	H	5.88	40.78	54.00	-13.22
5381.70	45.02	PK	166	1.4	H	-1.01	44.01	74.00	-29.99
5381.70	38.64	Ave	166	1.4	H	-1.01	37.63	54.00	-16.37
802.11n(HT40) U-NII-3 High channel 5795MHz									
223.45	37.12	QP	217	1.1	H	-11.62	25.50	46.00	-20.50
223.45	48.25	QP	72	1.2	V	-11.62	36.63	46.00	-9.37
4510.77	41.32	PK	24	1.6	H	-1.92	39.40	74.00	-34.60
4510.77	28.75	Ave	24	1.6	H	-1.92	26.83	54.00	-27.17
11590.00	39.14	PK	141	1.8	H	5.63	44.77	68.20	-23.43
11590.00	37.03	Ave	141	1.8	H	5.63	42.66	54.00	-11.34
5367.55	46.48	PK	52	1.7	H	-1.04	45.44	74.00	-28.56
5367.55	39.49	Ave	52	1.7	H	-1.04	38.45	54.00	-15.55

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) U-NII-1 Low Channel 5180MHz									
223.45	36.02	QP	15	1.8	H	-11.62	24.40	46.00	-21.60
223.45	46.47	QP	268	1.6	V	-11.62	34.85	46.00	-11.15
4535.57	47.18	PK	172	1.2	H	-1.86	45.32	74.00	-28.68
4535.57	36.47	Ave	172	1.2	H	-1.86	34.61	54.00	-19.39
5139.03	35.20	PK	24	1.5	H	-1.06	34.14	74.00	-39.86
5139.03	36.26	Ave	24	1.5	H	-1.06	35.20	54.00	-18.80
10360.00	46.77	PK	218	1.1	H	5.33	52.10	74.00	-21.90
10360.00	37.29	Ave	218	1.1	H	5.33	42.62	54.00	-11.38
802.11ac(HT20) U-NII-1 Middle channel 5200MHz									
223.45	36.80	QP	0	1.1	H	-11.62	25.18	46.00	-20.82
223.45	46.48	QP	239	1.2	V	-11.62	34.86	46.00	-11.14
4519.15	47.21	PK	62	1.3	H	-1.82	45.39	74.00	-28.61
4519.15	36.48	Ave	62	1.3	H	-1.82	34.66	54.00	-19.34
5137.75	34.52	PK	128	1.8	H	-1.06	33.46	74.00	-40.54
5137.75	37.32	Ave	128	1.8	H	-1.06	36.26	54.00	-17.74
10400.00	40.53	PK	222	1.4	H	5.21	45.74	74.00	-28.26
10400.00	37.58	Ave	222	1.4	H	5.21	42.79	54.00	-11.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) U-NII-1 High channel 5240MHz									
223.45	36.84	QP	72	1.3	H	-11.62	25.22	46.00	-20.78
223.45	46.09	QP	288	1.3	V	-11.62	34.47	46.00	-11.53
4526.86	46.26	PK	165	1.4	H	-1.81	44.45	74.00	-29.55
4526.86	36.14	Ave	165	1.4	H	-1.81	34.33	54.00	-19.67
5138.49	35.79	PK	182	1.6	H	-1.06	34.73	74.00	-39.27
5138.49	39.30	Ave	182	1.6	H	-1.06	38.24	54.00	-15.76
10480.00	40.13	PK	293	1.7	H	5.14	45.27	74.00	-28.73
10480.00	37.60	Ave	293	1.7	H	5.14	42.74	54.00	-11.26
802.11ac(HT20) U-NII-3 Low Channel 5745MHz									
223.45	37.55	QP	110	1.4	H	-11.62	25.93	46.00	-20.07
223.45	46.76	QP	88	1.9	V	-11.62	35.14	46.00	-10.86
4538.39	44.60	PK	267	1.7	H	-1.92	42.68	74.00	-31.32
4538.39	33.83	Ave	267	1.7	H	-1.92	31.91	54.00	-22.09
11490.00	37.51	PK	115	1.7	H	5.93	43.44	68.20	-24.76
11490.00	34.18	Ave	115	1.7	H	5.93	40.11	54.00	-13.89
5387.65	46.33	PK	34	1.6	H	-1.03	45.30	74.00	-28.70
5387.65	38.86	Ave	34	1.6	H	-1.03	37.83	54.00	-16.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) U-NII-3 Middle channel 5785MHz									
223.45	36.62	QP	145	1.3	H	-11.62	25.00	46.00	-21.00
223.45	47.72	QP	252	1.3	V	-11.62	36.10	46.00	-9.90
4522.11	43.81	PK	247	1.0	H	-1.97	41.84	74.00	-32.16
4522.11	33.09	Ave	247	1.0	H	-1.97	31.12	54.00	-22.88
11570.00	40.72	PK	135	1.0	H	5.81	46.53	68.20	-21.67
11570.00	36.33	Ave	135	1.0	H	5.81	42.14	54.00	-11.86
5389.91	46.64	PK	150	1.4	H	-1.05	45.59	74.00	-28.41
5389.91	38.51	Ave	150	1.4	H	-1.05	37.46	54.00	-16.54
802.11ac(HT20) U-NII-3 High channel 5825MHz									
223.45	37.62	QP	203	1.1	H	-11.62	26.00	46.00	-20.00
223.45	48.26	QP	339	1.7	V	-11.62	36.64	46.00	-9.36
4519.01	44.18	PK	67	1.8	H	-1.88	42.30	74.00	-31.70
4519.01	32.19	Ave	67	1.8	H	-1.88	30.31	54.00	-23.69
11650.00	40.45	PK	107	1.2	H	5.84	46.29	68.20	-21.91
11650.00	36.76	Ave	107	1.2	H	5.84	42.60	54.00	-11.40
5375.90	46.52	PK	244	1.7	H	-1.06	45.46	74.00	-28.54
5375.90	37.30	Ave	244	1.7	H	-1.06	36.24	54.00	-17.76

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT40) U-NII-1 Low Channel 5190MHz									
223.45	35.96	QP	270	1.2	H	-11.62	24.34	46.00	-21.66
223.45	49.33	QP	259	1.2	V	-11.62	37.71	46.00	-8.29
4527.46	39.47	PK	278	1.4	H	-1.91	37.56	74.00	-36.44
4527.46	25.87	Ave	278	1.4	H	-1.91	23.96	54.00	-30.04
5117.52	45.53	PK	262	1.1	H	-1.06	44.47	74.00	-29.53
5117.52	40.70	Ave	262	1.1	H	-1.06	39.64	54.00	-14.36
10380.00	38.00	PK	22	1.8	H	5.26	43.26	74.00	-30.74
10380.00	35.98	Ave	22	1.8	H	5.26	41.24	54.00	-12.76
802.11ac(HT40) U-NII-1 High channel 5230MHz									
223.45	35.99	QP	127	1.1	H	-11.62	24.37	46.00	-21.63
223.45	45.18	QP	44	1.6	V	-11.62	33.56	46.00	-12.44
4517.37	40.43	PK	36	1.1	H	-1.93	38.50	74.00	-35.50
4517.37	27.14	Ave	36	1.1	H	-1.93	25.21	54.00	-28.79
5115.06	45.38	PK	301	1.5	H	-1.06	44.32	74.00	-29.68
5115.06	38.20	Ave	301	1.5	H	-1.06	37.14	54.00	-16.86
10460.00	40.75	PK	346	1.6	H	5.28	46.03	74.00	-27.97
10460.00	36.13	Ave	346	1.6	H	5.28	41.41	54.00	-12.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT40) U-NII-3 Low Channel 5755MHz									
223.45	35.58	QP	317	1.4	H	-11.62	23.96	46.00	-22.04
223.45	46.27	QP	338	1.6	V	-11.62	34.65	46.00	-11.35
4504.70	38.88	PK	172	1.8	H	-1.92	36.96	74.00	-37.04
4504.70	24.50	Ave	172	1.8	H	-1.92	22.58	54.00	-31.42
11510.00	38.16	PK	309	1.2	H	5.88	44.04	68.20	-24.16
11510.00	35.63	Ave	309	1.2	H	5.88	41.51	54.00	-12.49
5366.27	46.26	PK	293	1.7	H	-1.07	45.19	74.00	-28.81
5366.27	39.40	Ave	293	1.7	H	-1.07	38.33	54.00	-15.67
802.11ac(HT40) U-NII-3 High channel 5795MHz									
223.45	35.85	QP	3	1.4	H	-11.62	24.23	46.00	-21.77
223.45	47.08	QP	284	1.6	V	-11.62	35.46	46.00	-10.54
4515.29	39.50	PK	28	1.6	H	-1.86	37.64	74.00	-36.36
4515.29	24.33	Ave	28	1.6	H	-1.86	22.47	54.00	-31.53
11590.00	38.82	PK	126	1.4	H	5.63	44.45	68.20	-23.75
11590.00	37.83	Ave	126	1.4	H	5.63	43.46	54.00	-10.54
5359.73	46.94	PK	133	1.8	H	-1.03	45.91	74.00	-28.09
5359.73	38.78	Ave	133	1.8	H	-1.03	37.75	54.00	-16.25

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT80) U-NII-1 Low Channel 5210MHz									
223.45	47.80	QP	192	1.5	H	-11.62	36.18	46.00	-9.82
4515.29	39.12	QP	1	1.6	V	-11.62	27.50	46.00	-18.50
4530.88	25.30	PK	100	1.4	H	-1.88	23.42	74.00	-50.58
4530.88	37.93	Ave	100	1.4	H	-1.88	36.05	54.00	-17.95
5130.90	38.11	PK	40	1.2	H	-1.06	37.05	74.00	-36.95
5130.90	48.78	Ave	40	1.2	H	-1.06	47.72	54.00	-6.28
10420.00	40.63	PK	186	1.3	H	4.65	45.28	74.00	-28.72
10420.00	36.67	Ave	186	1.3	H	4.65	41.32	54.00	-12.68
802.11ac(HT80) U-NII-3 Low Channel 5775MHz									
4515.29	39.41	QP	308	1.3	H	-11.62	27.79	46.00	-18.21
4530.88	25.76	QP	246	1.4	V	-11.62	14.14	46.00	-31.86
4500.28	38.69	PK	31	1.3	H	-1.85	36.84	74.00	-37.16
4500.28	40.15	Ave	31	1.3	H	-1.85	38.30	54.00	-15.70
11550.00	38.79	PK	191	1.3	H	4.83	43.62	68.20	-24.58
11550.00	36.80	Ave	191	1.3	H	4.83	41.63	54.00	-12.37
4515.29	39.41	QP	308	1.3	H	-11.62	27.79	46.00	-18.21
4530.88	25.76	QP	246	1.4	V	-11.62	14.14	46.00	-31.86

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

10 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.

10.1 Summary of Test Results


802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
155	100	100	100

Test result plots shown as follows:


802.11a U-NII-1 Low channel

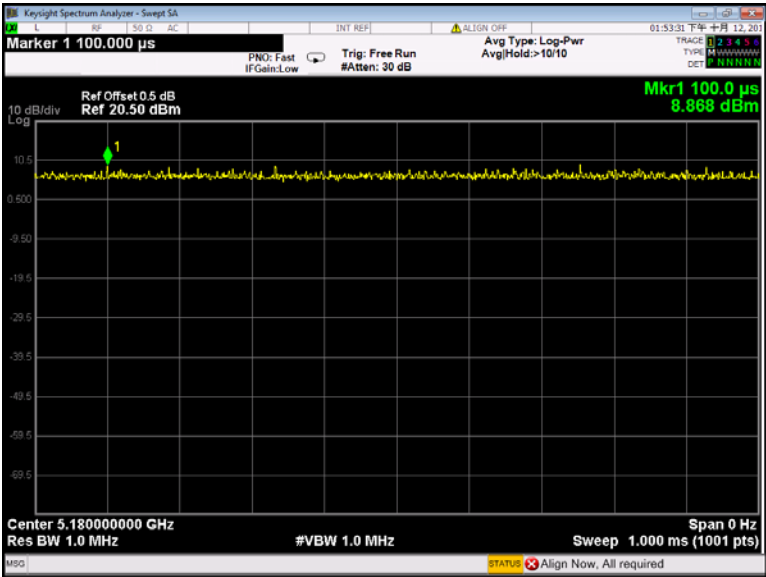


802.11n(HT20) U-NII-1 Low channel

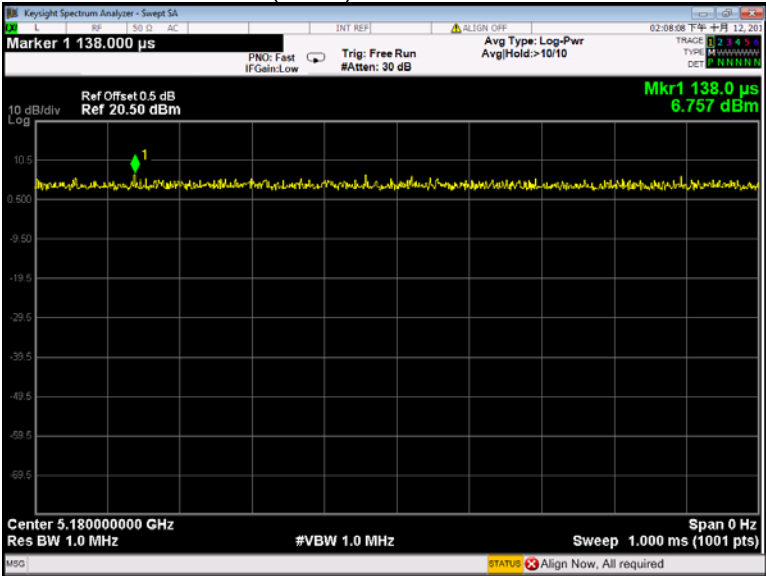


802.11n(HT40) U-NII-1 Low channel

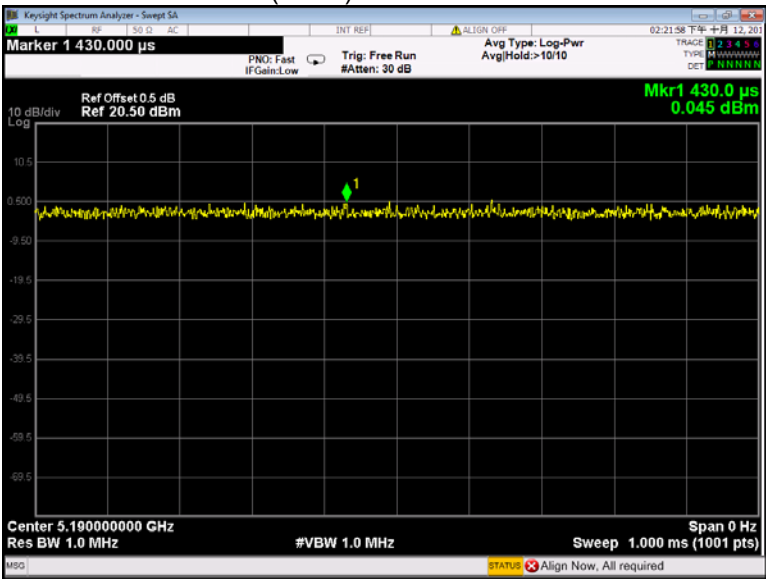


802.11ac(HT20) U-NII-1 Low channel

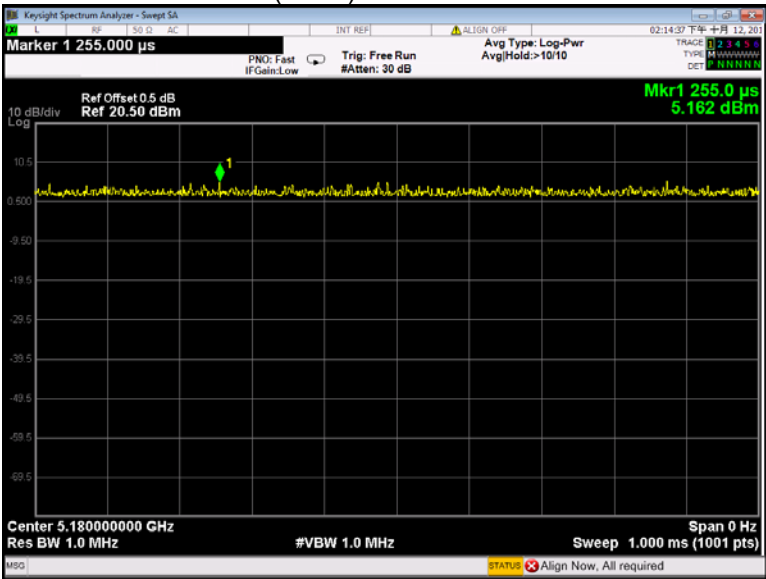


802.11ac(HT40) U-NII-1 Low channel

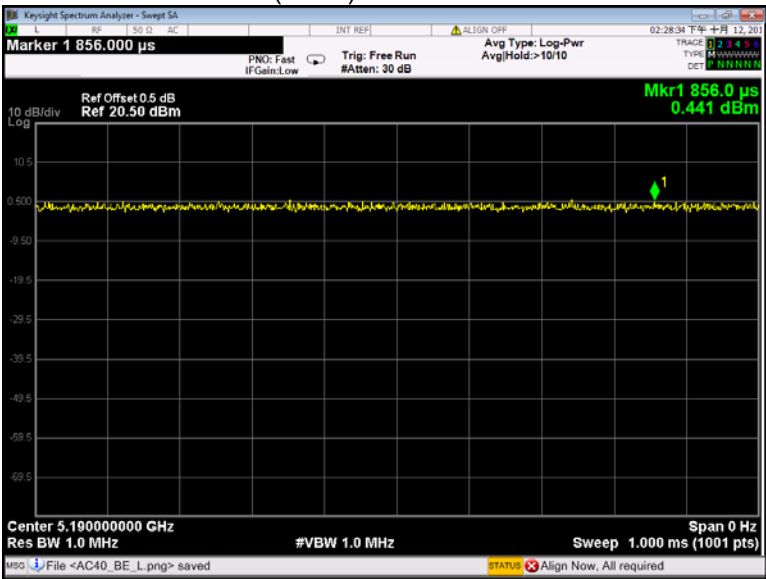


802.11ac(HT80) U-NII-1 Low channel

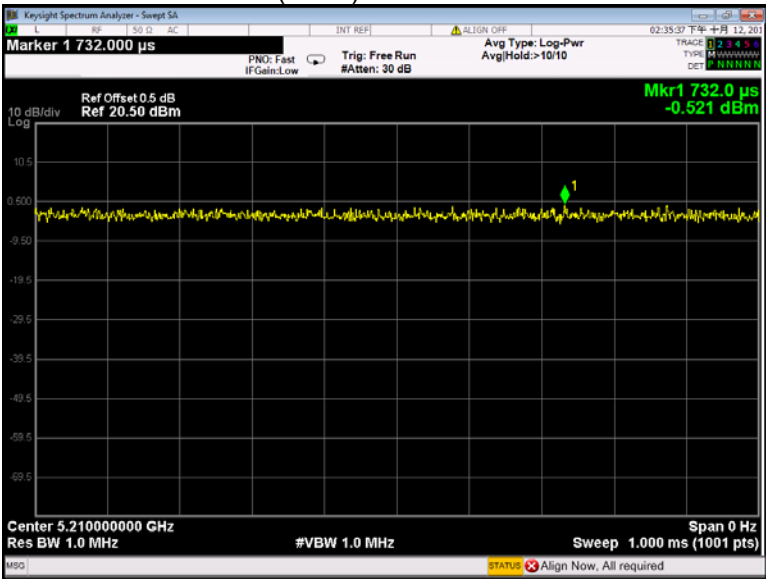


802.11a U-NII-3 Low channel

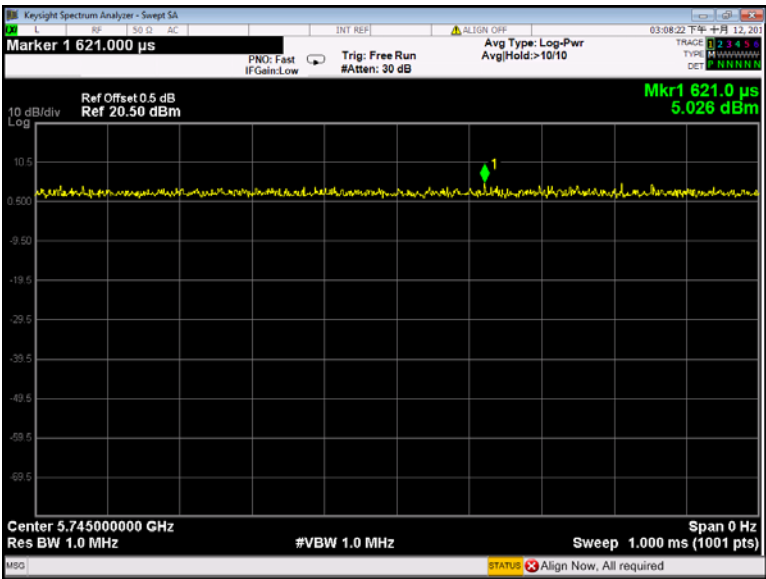


802.11n(HT20) U-NII-3 Low channel

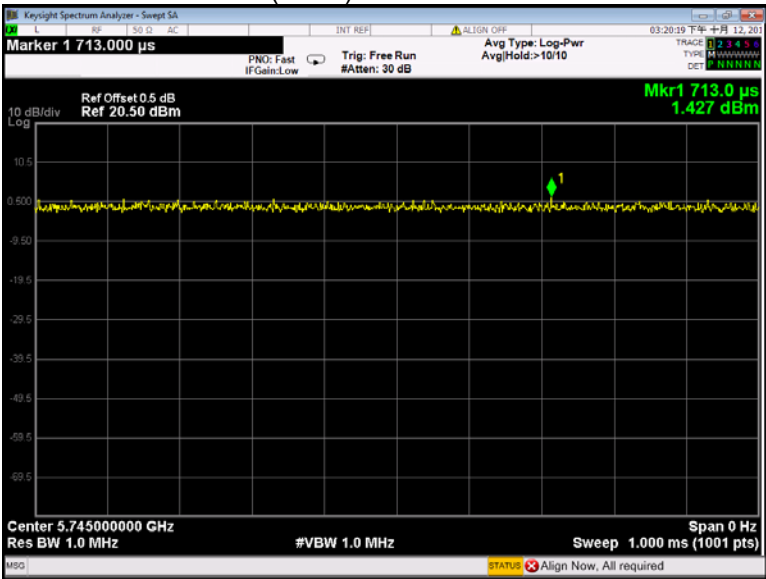


802.11n(HT40) U-NII-3 Low channel

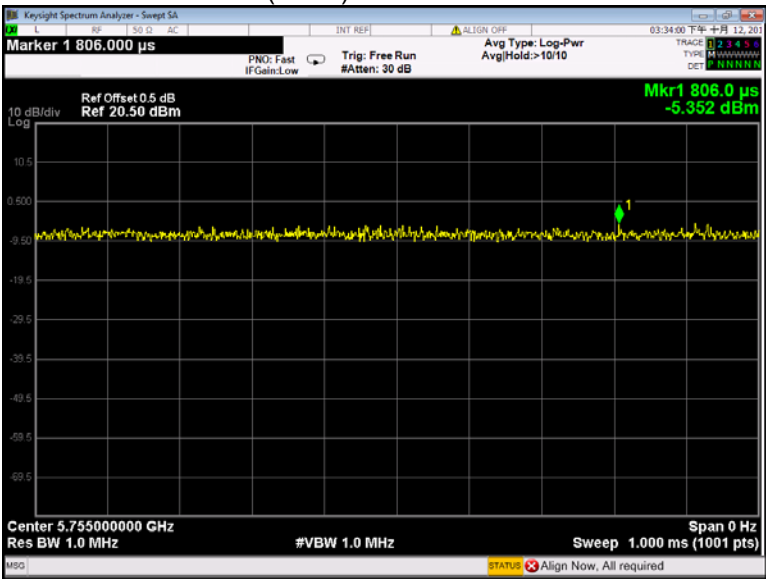


802.11ac(HT20) U-NII-3 Low channel

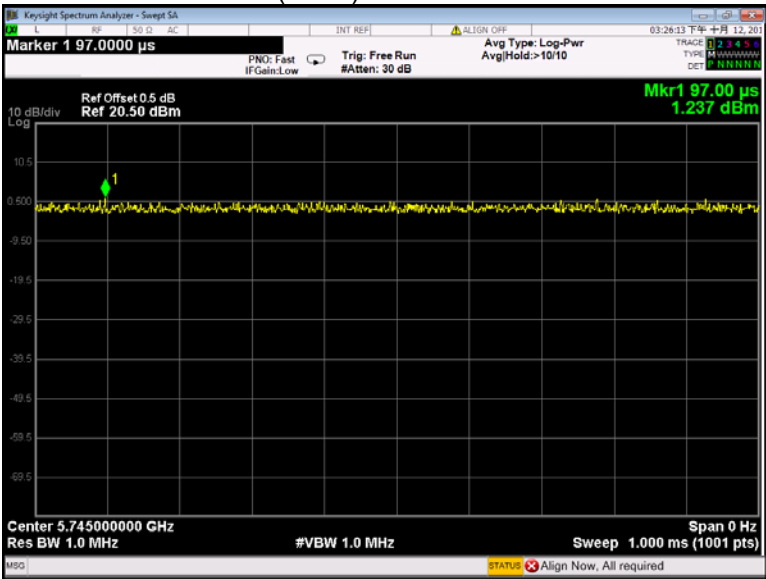

802.11ac(HT40) U-NII-3 Low channel

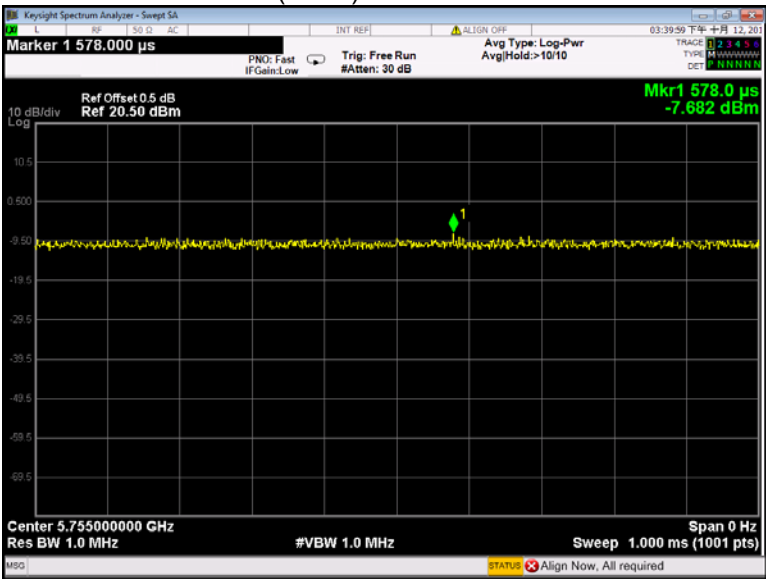

802.11ac(HT80) U-NII-3 Low channel

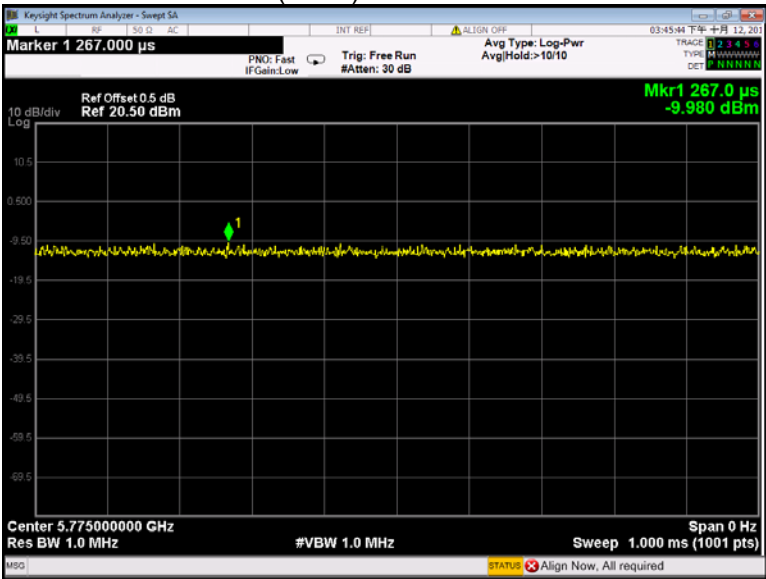

11 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz. (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
Test Result:	PASS


11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


11.2 Test Result

Test result plots shown as follows:


802.11a U-NII-1 Band edge-left side

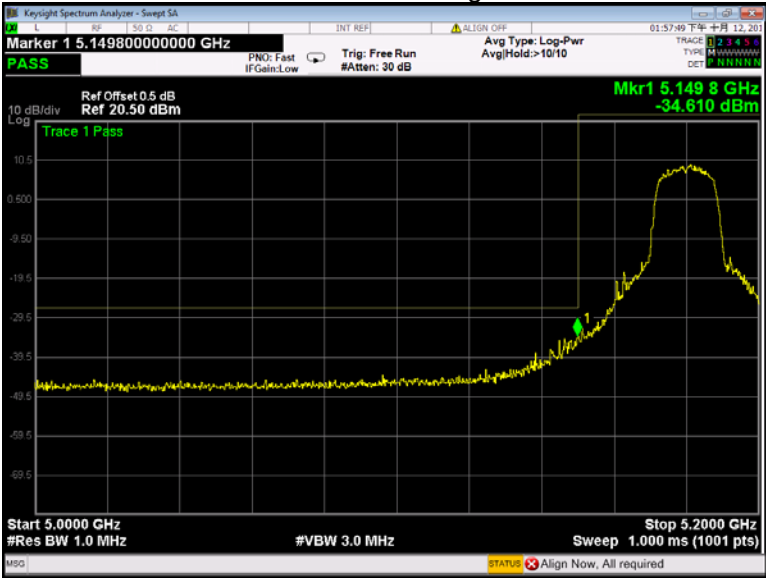

802.11a U-NII-1 Band edge-right side

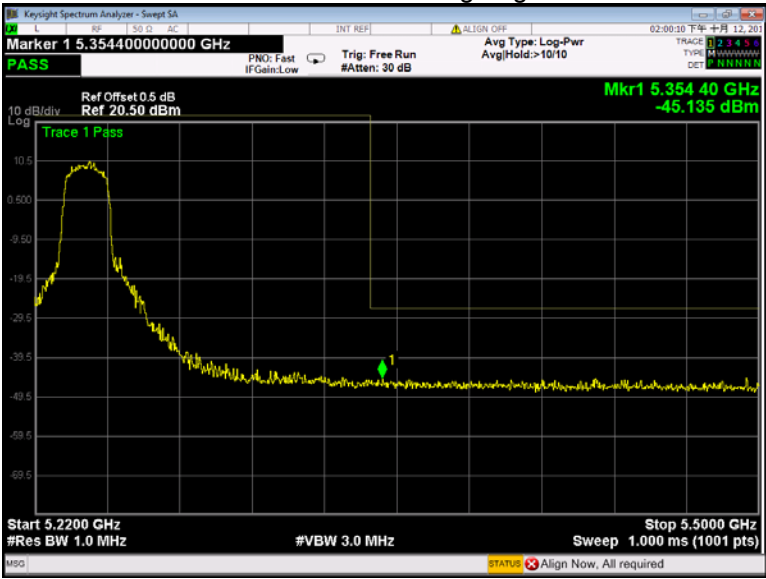


802.11a U-NII-3 Band edge-left side

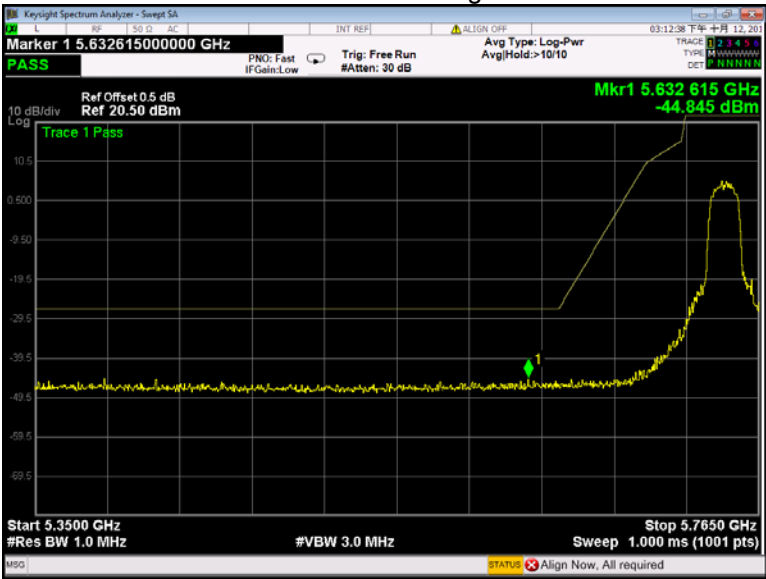


802.11a U-NII-3 Band edge-right side




802.11n(HT20) U-NII-1 Band edge-left side

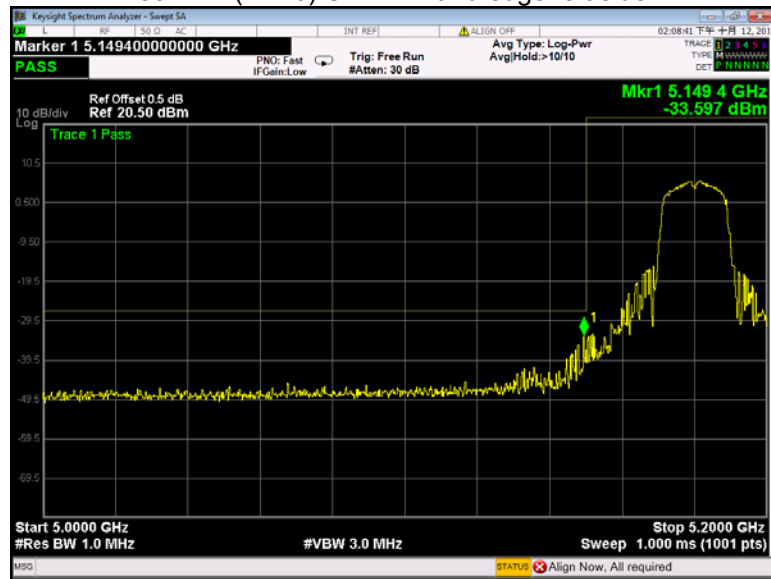


802.11n(HT20) U-NII-1 Band edge-right side

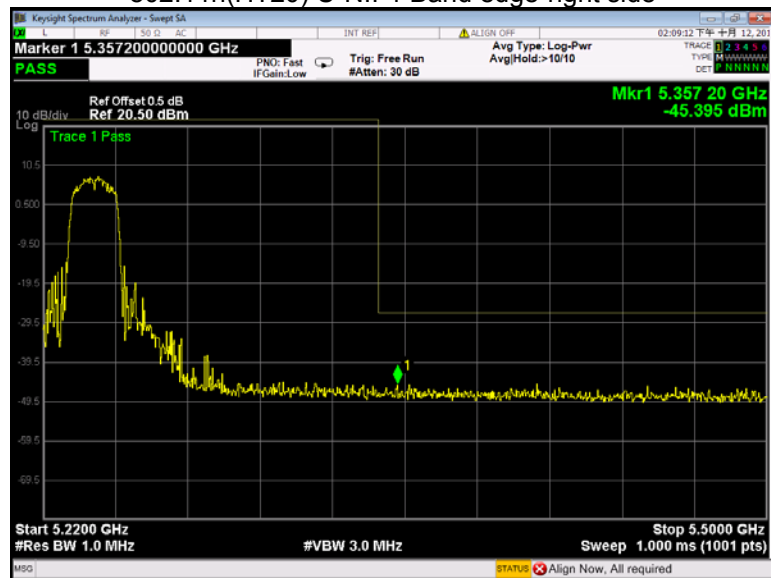


802.11n(HT20) U-NII-3 Band edge-left side

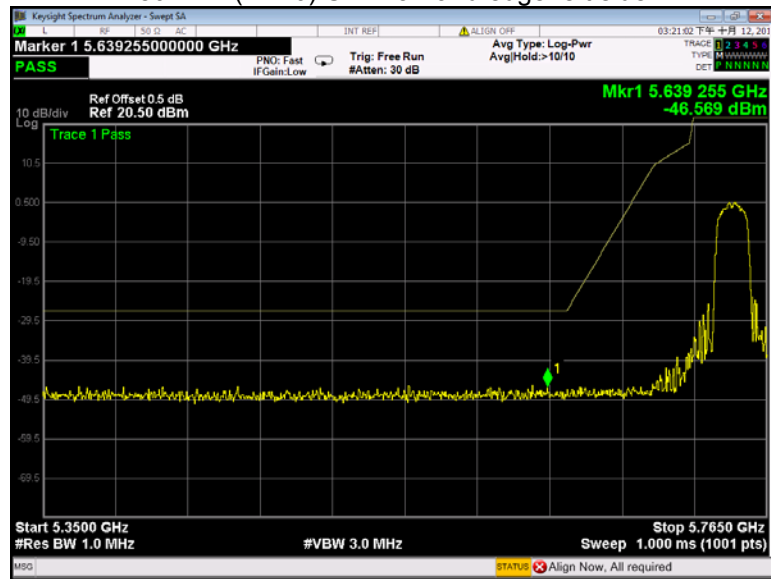

802.11n(HT20) U-NII-3 Band edge-right side

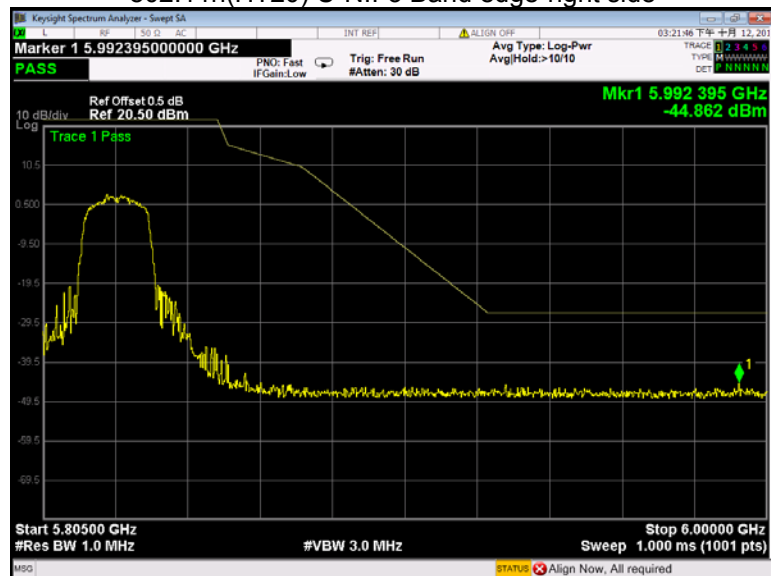


802.11n(HT40) U-NII-1 Band edge-left side

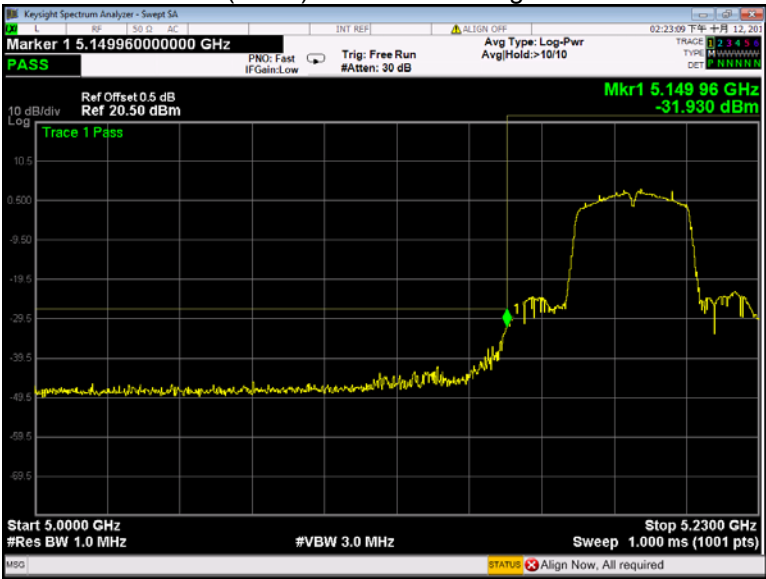


802.11n(HT40) U-NII-1 Band edge-right side




802.11n(HT40) U-NII-3 Band edge-left side

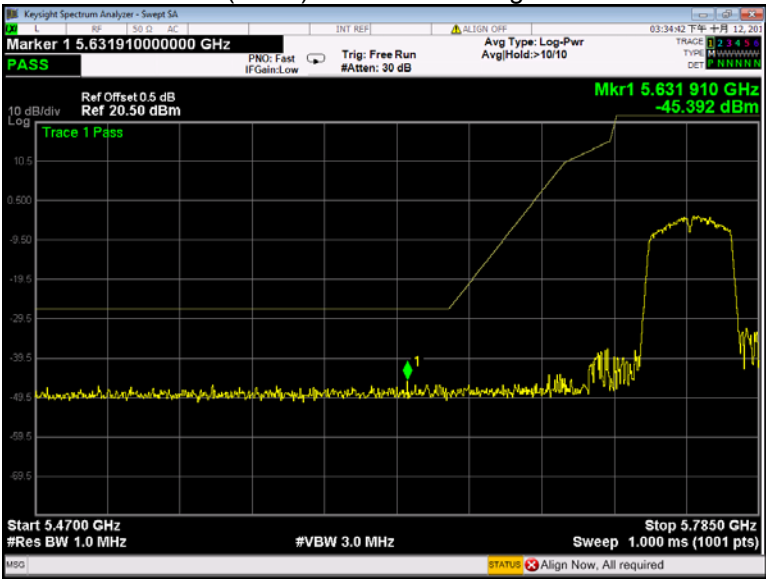


802.11n(HT40) U-NII-3 Band edge-right side

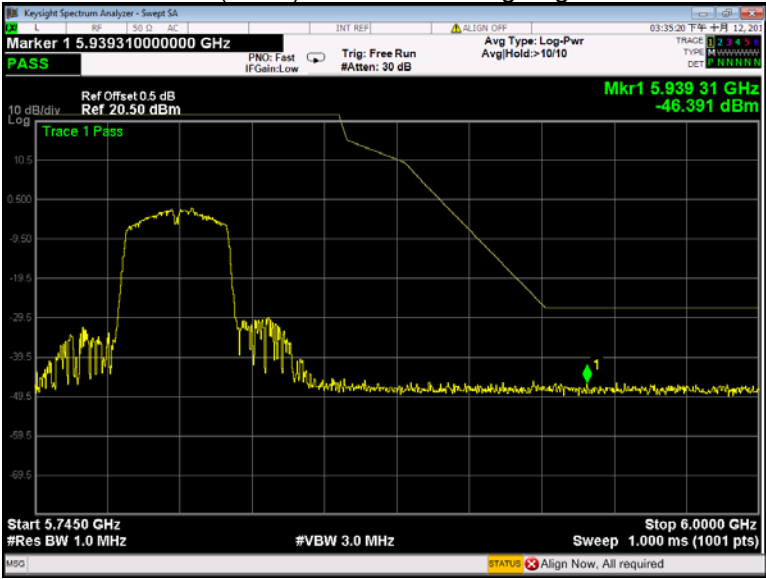


802.11ac(HT20) U-NII-1 Band edge-left side

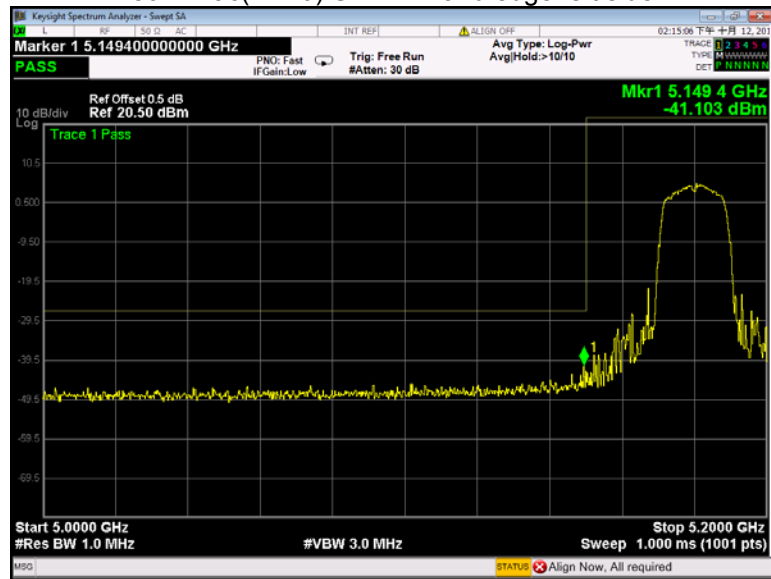


802.11ac(HT20) U-NII-1 Band edge-right side

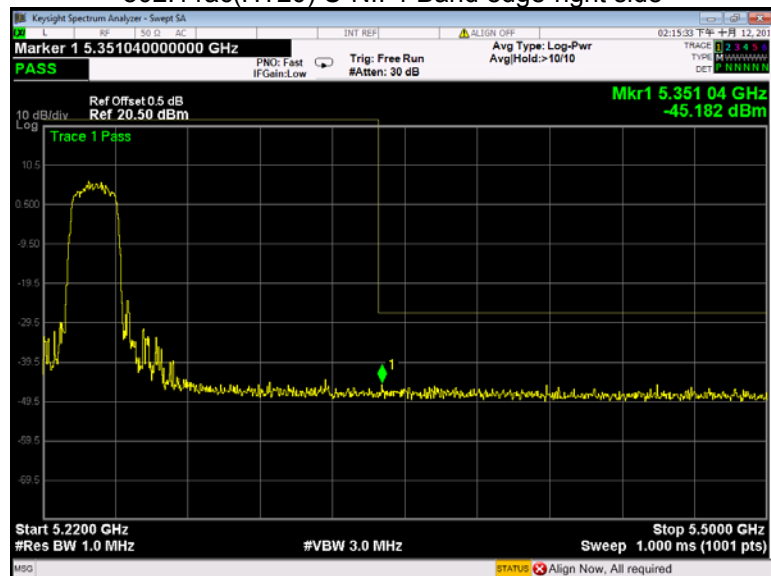


802.11ac(HT20) U-NII-3 Band edge-left side

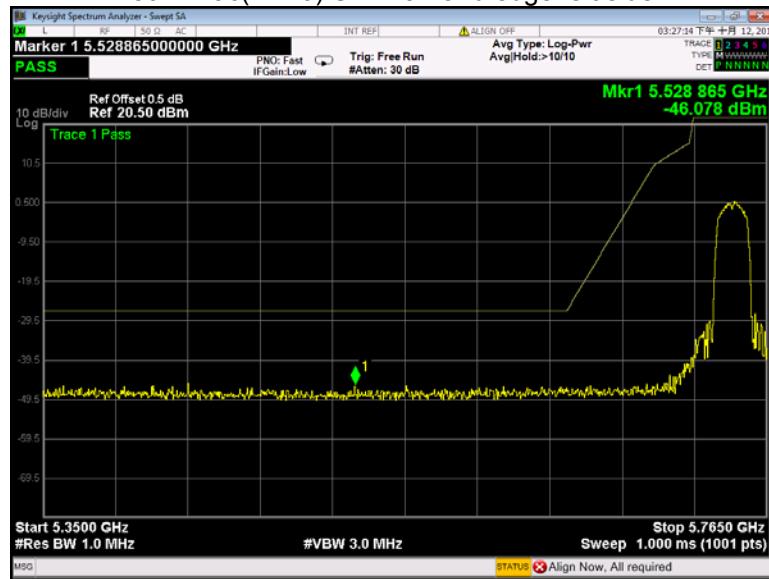


802.11ac(HT20) U-NII-3 Band edge-right side

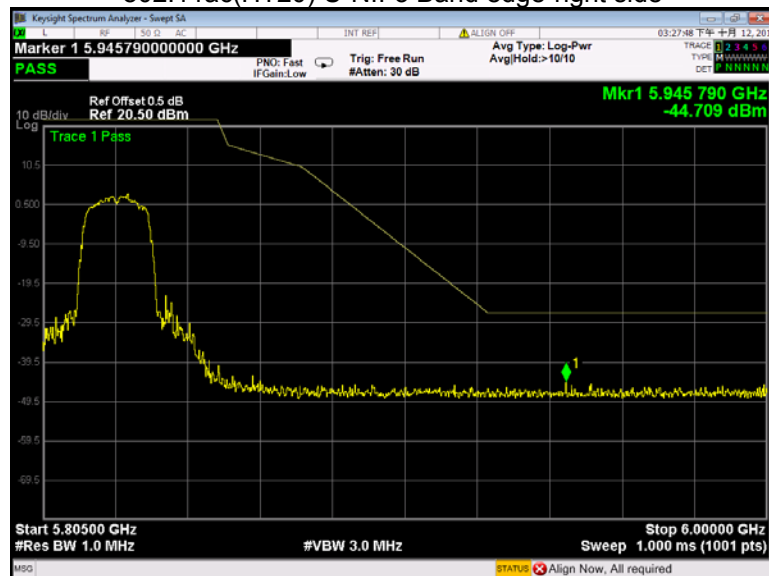


802.11ac(HT40) U-NII-1 Band edge-left side

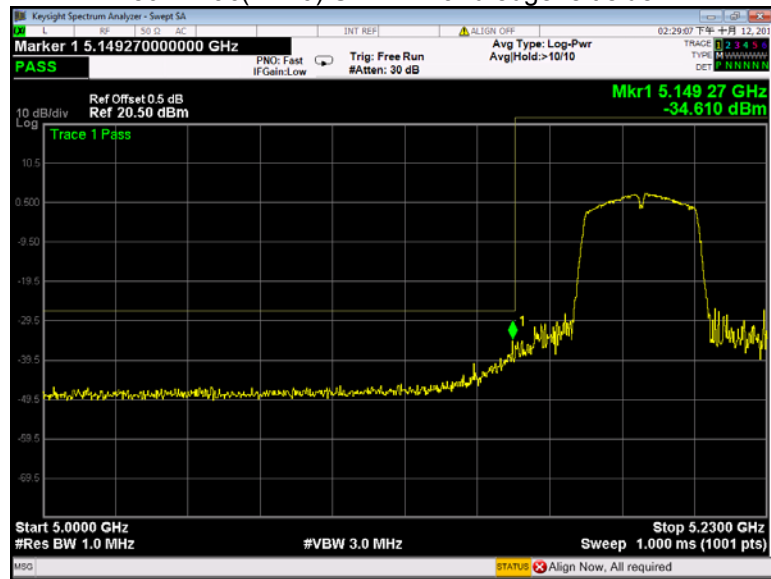


802.11ac(HT40) U-NII-1 Band edge-right side

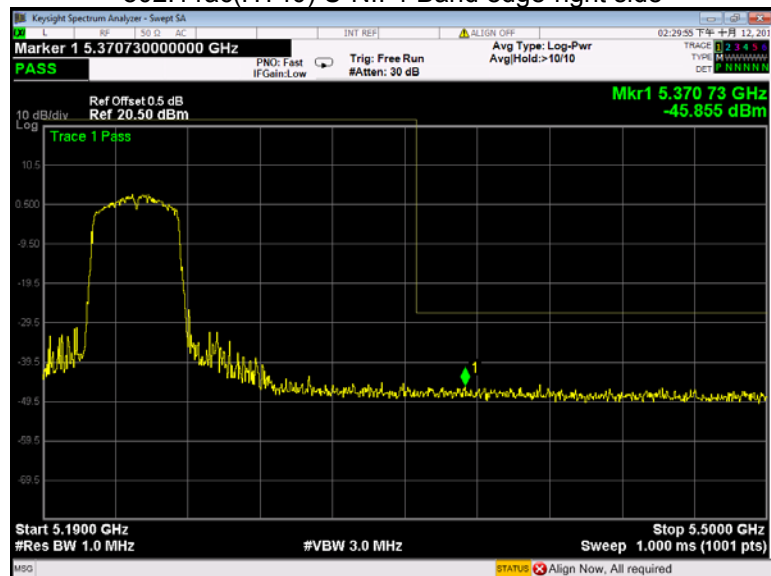


802.11ac(HT40) U-NII-3 Band edge-left side

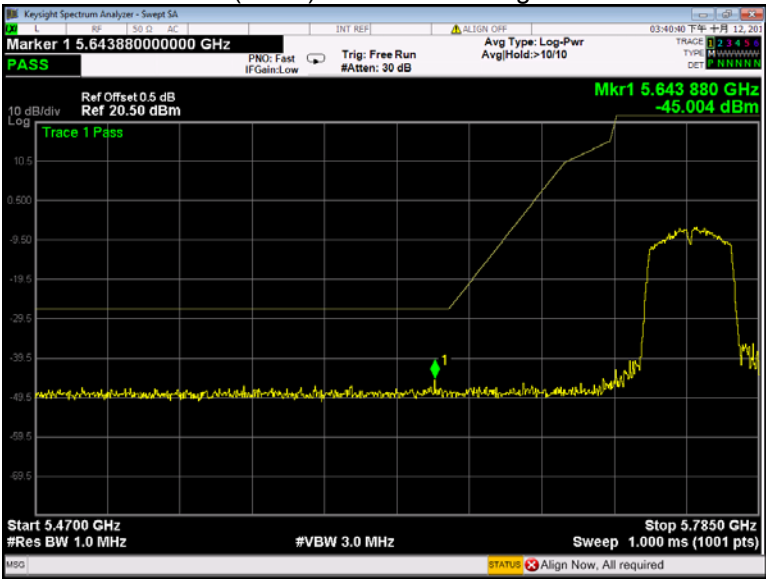


802.11ac(HT40) U-NII-3 Band edge-right side

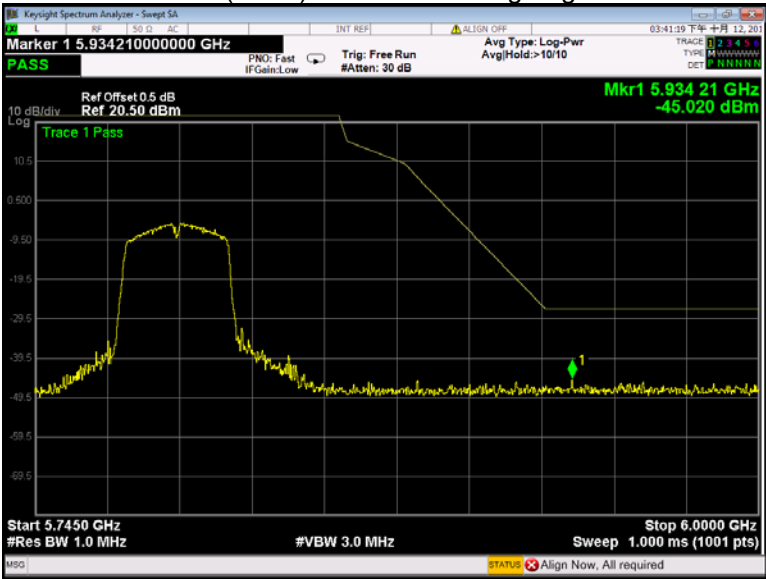


802.11ac(HT80) U-NII-1 Band edge-left side

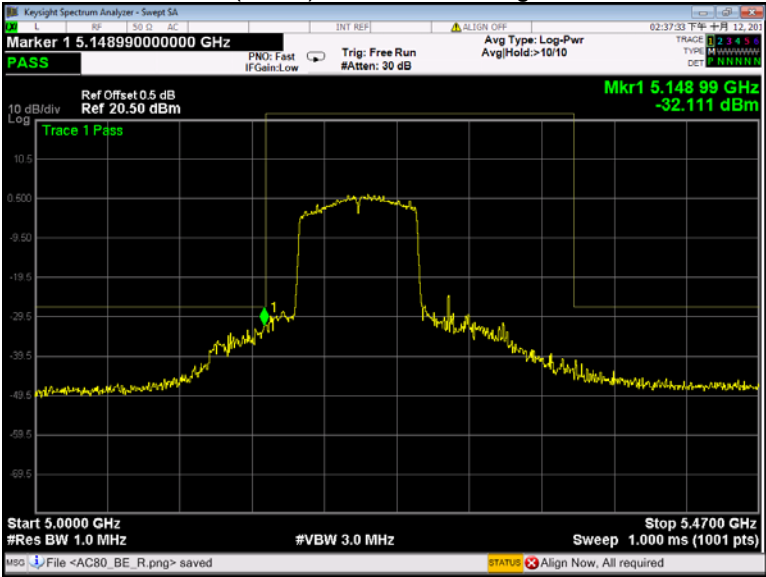


802.11ac(HT80) U-NII-1 Band edge-right side

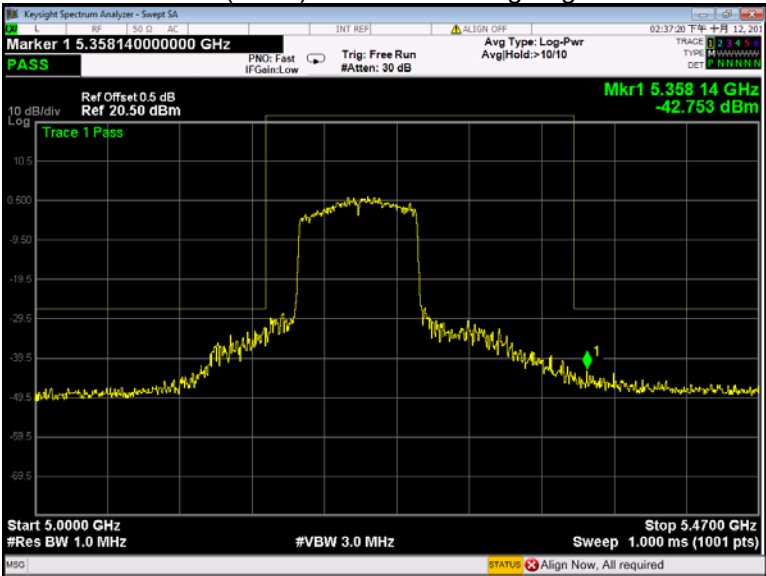

802.11ac(HT80) U-NII-3 Band edge-left side

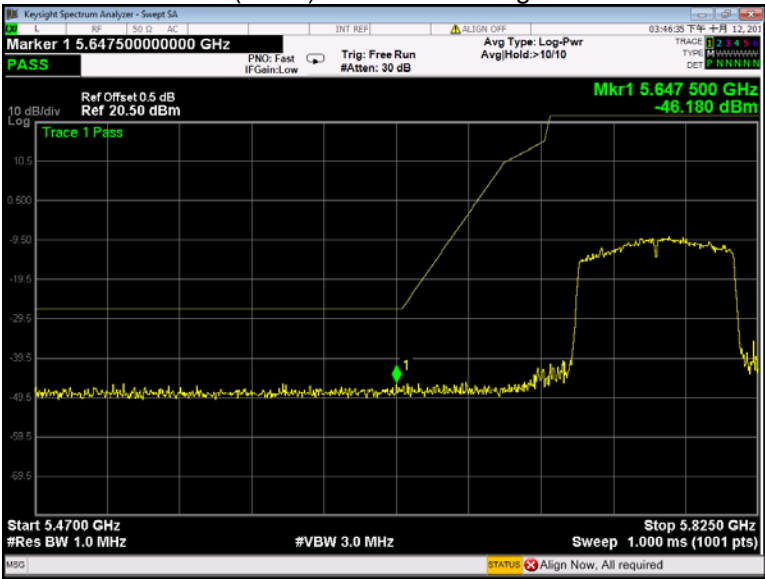

802.11ac(HT80) U-NII-3 Band edge-right side

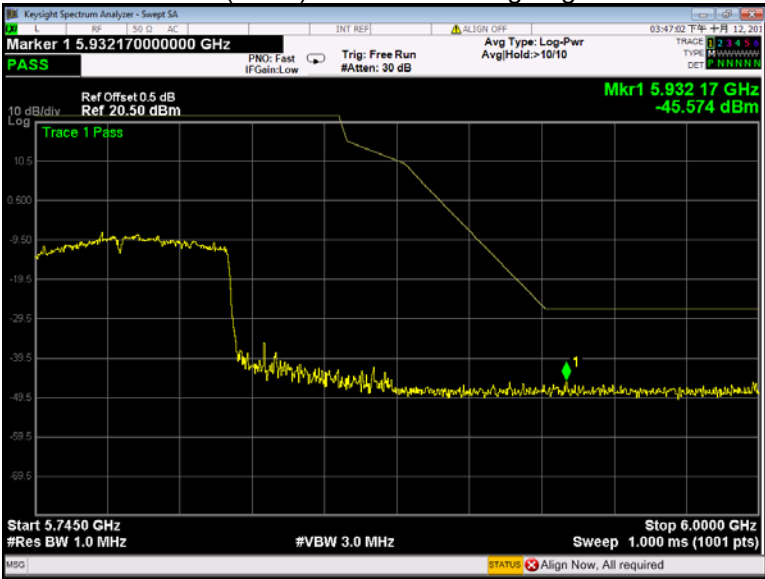

12 6 dB Bandwidth

Test Requirement: FCC CFR47 Part 15 Section 15.407(e)
 KDB662911 D01 Multiple Transmitter Output v02r01
 Test Method: KDB789033 D02 General U-NII Test Procedures New Rules v02r01
 Section C
 Test Limit: ≥ 500 kHz
 Test Result: PASS

12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

12.2 Test Result:


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	15.95	15.39	15.95
	802.11n(HT20)	16.29	14.51	15.13
	802.11n(HT40)	35.06	/	35.10
	802.11ac(HT20)	15.09	15.05	13.76
	802.11ac(HT40)	33.89	/	35.07
	802.11ac(HT80)	73.83	/	/

Test result plots shown as follows:


802.11a U-NII-3 Low channel

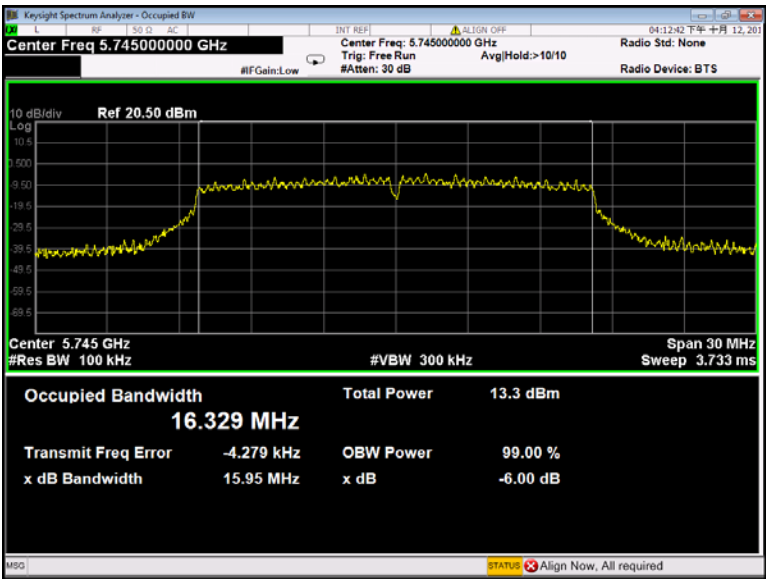


802.11a U-NII-3 Middle channel

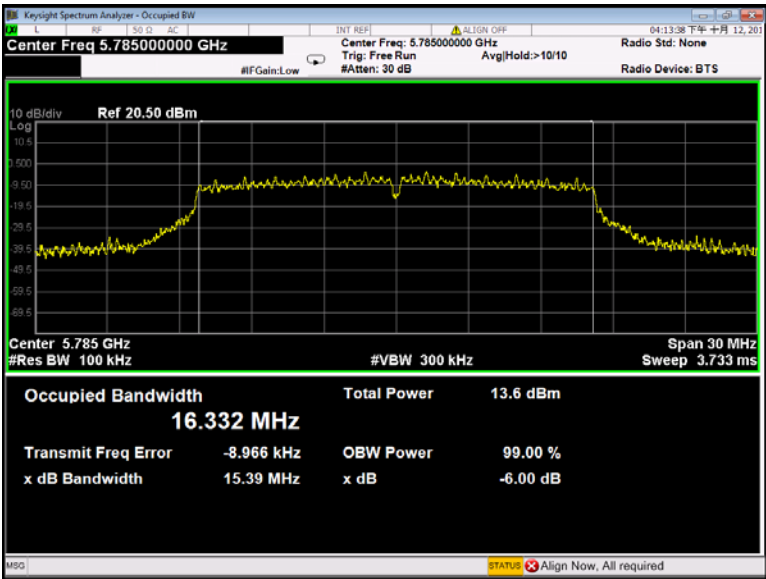


802.11a U-NII-3 High channel

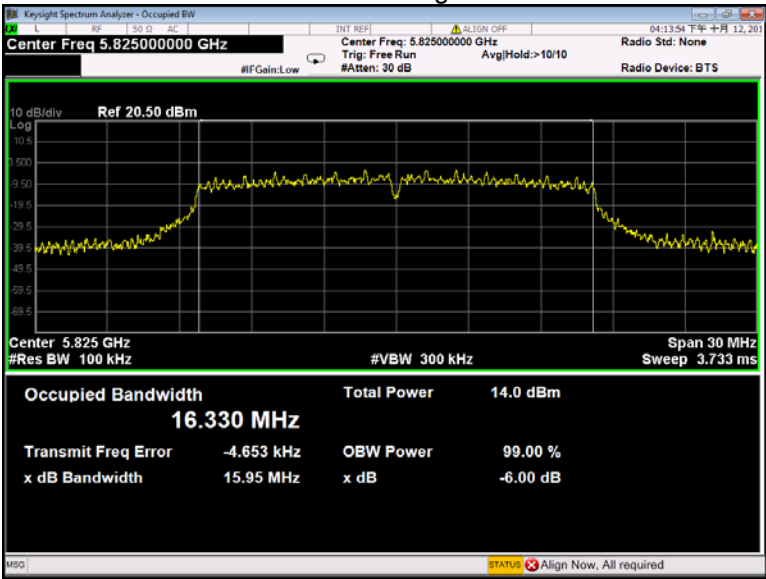


802.11n(HT20) U-NII-3 Low channel

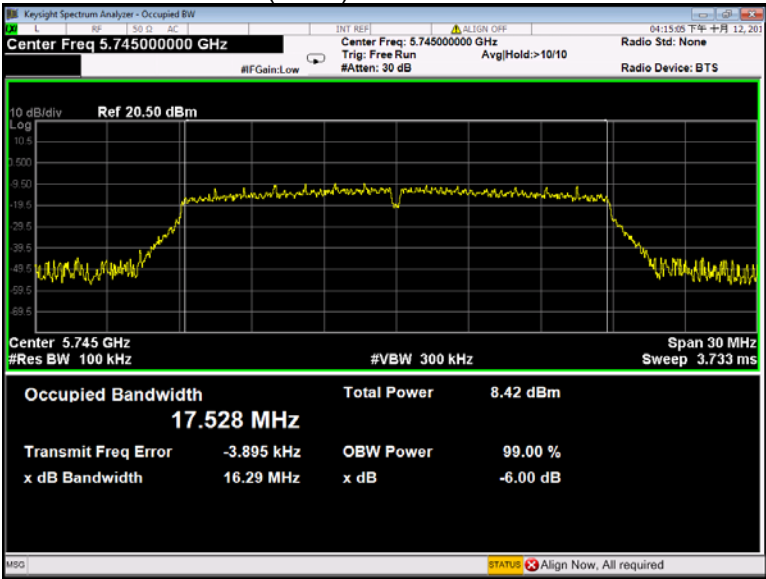


802.11n(HT20) U-NII-3 Middle channel

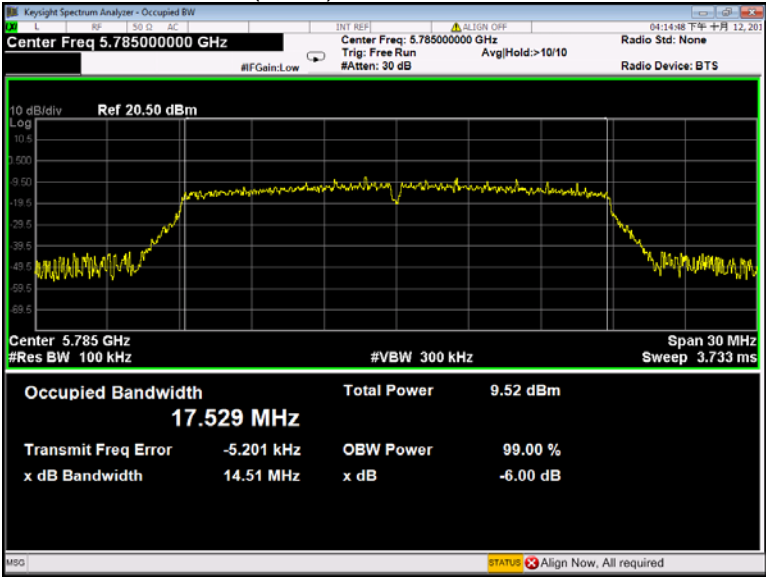


802.11n(HT20) U-NII-3 High channel

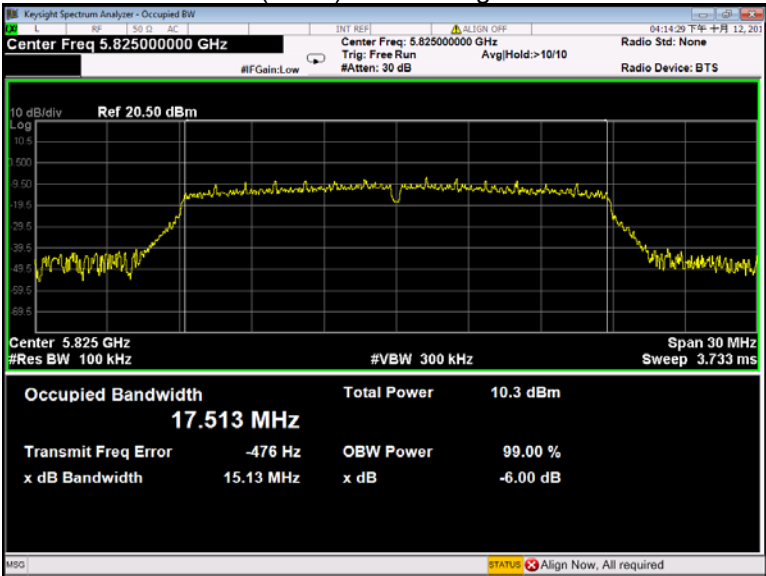


802.11n(HT40) U-NII-3 Low channel

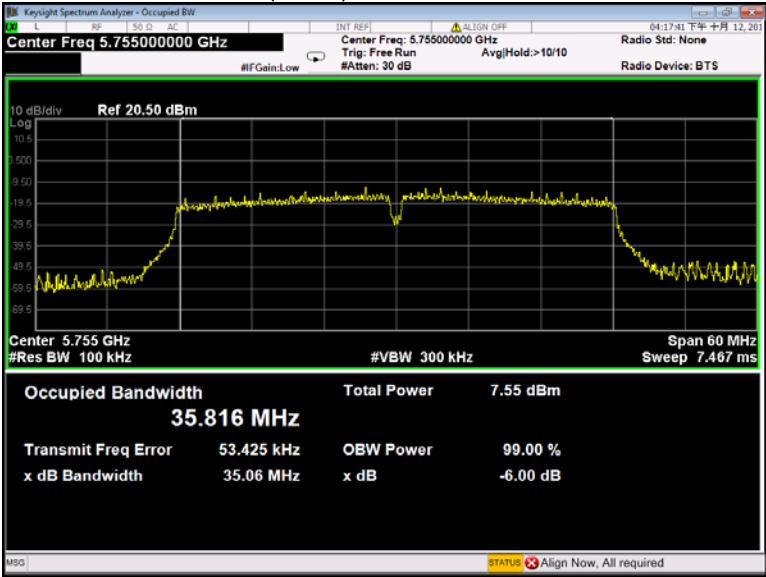


802.11n(HT40) U-NII-3 High channel

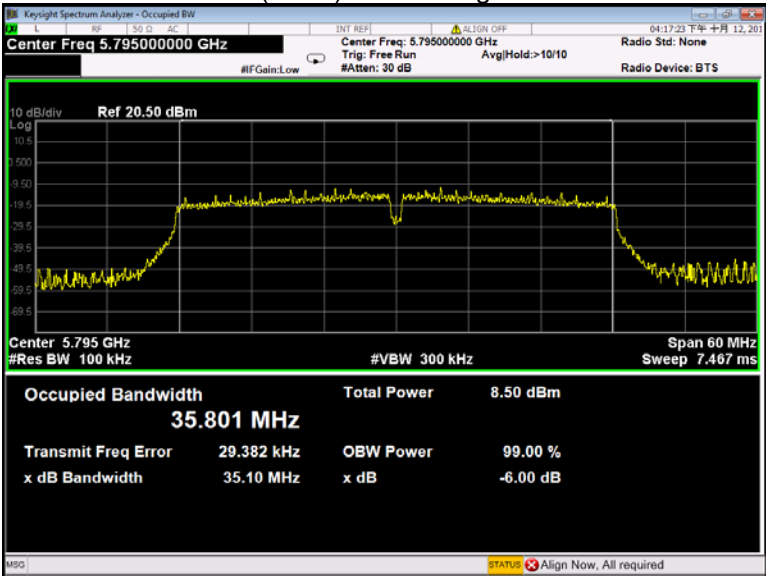


802.11ac(HT20) U-NII-3 Low channel

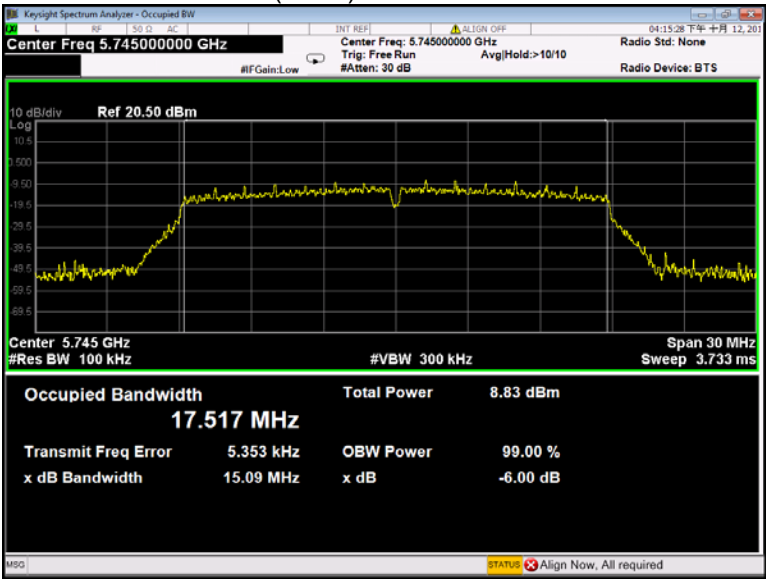


802.11ac(HT20) U-NII-3 Middle channel

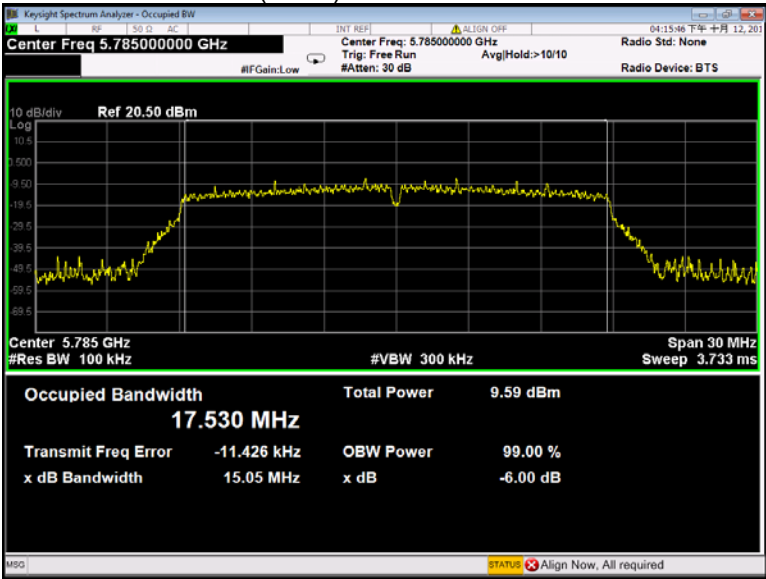


802.11ac(HT20) U-NII-3 High channel

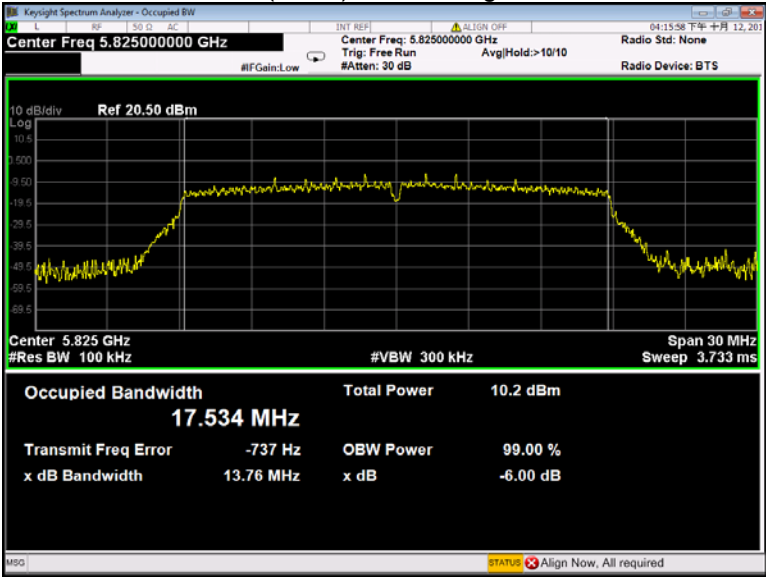


802.11ac(HT40) U-NII-3 Low channel

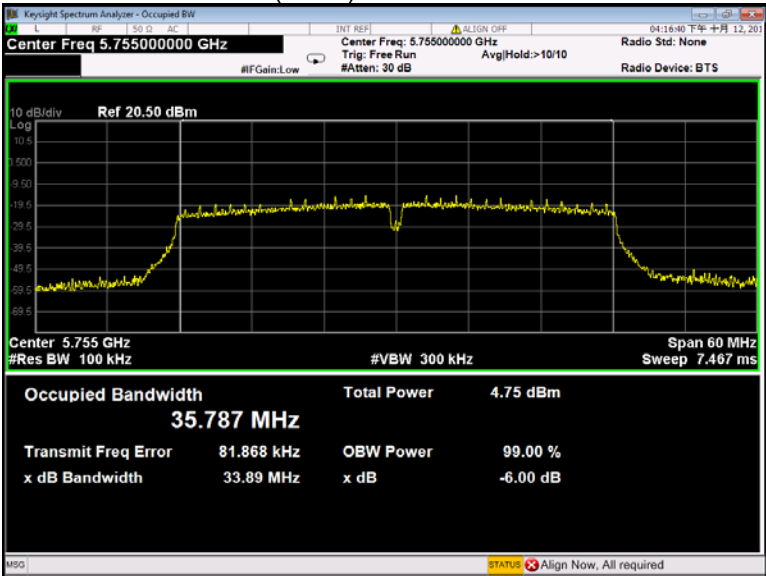

802.11ac(HT40) U-NII-3 High channel

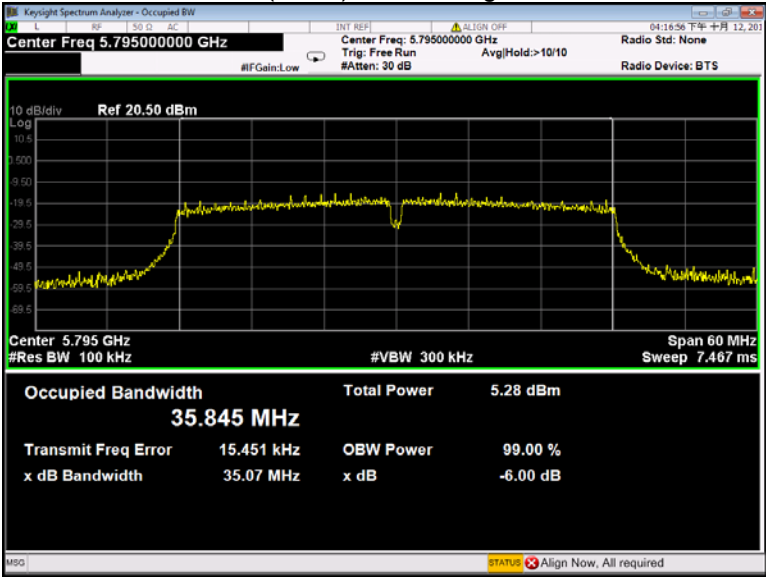

802.11ac(HT80) U-NII-3 Low channel

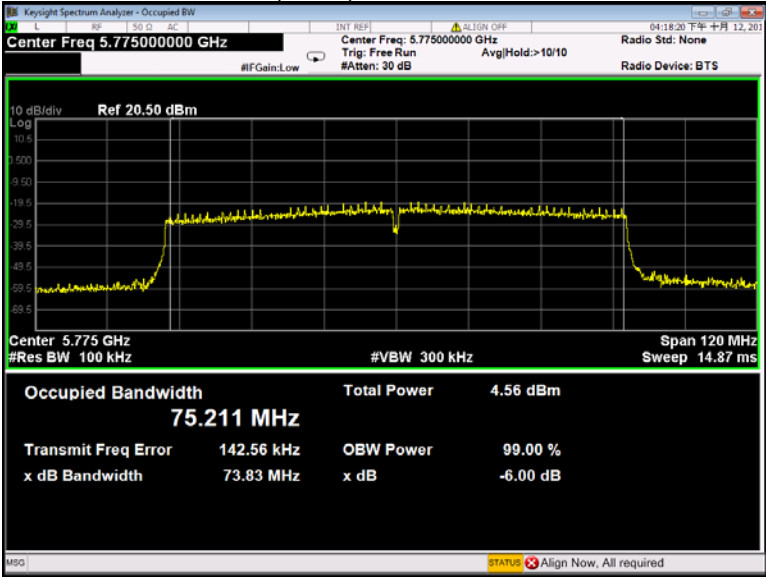

13 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

13.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1% to 5% of the OBW, VBW = 3x RBW

13.2 Test Result:


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	19.58	19.59	19.59	16.418	16.399	16.394
	802.11n(HT20)	19.95	19.83	19.89	17.566	17.567	17.547
	802.11n(HT40)	39.95	/	39.83	36.015	/	35.973
	802.11ac(HT20)	19.92	19.97	19.99	17.547	17.557	17.527
	802.11ac(HT40)	39.78	/	39.94	35.944	/	39.911
	802.11ac(HT80)	79.70	/	/	75.335	/	/
U-NII-3	802.11a	19.68	20.89	23.97	16.416	16.465	16.491
	802.11n(HT20)	19.96	20.09	19.99	17.543	17.552	17.556
	802.11n(HT40)	40.01	/	39.98	35.977	/	35.968
	802.11ac(HT20)	19.99	19.97	20.08	17.572	17.531	17.529
	802.11ac(HT40)	40.01	/	39.90	35.950	/	35.993
	802.11ac(HT80)	79.96	/	/	75.248	/	/

Test result plots shown as follows:


802.11a U-NII-1 Low channel

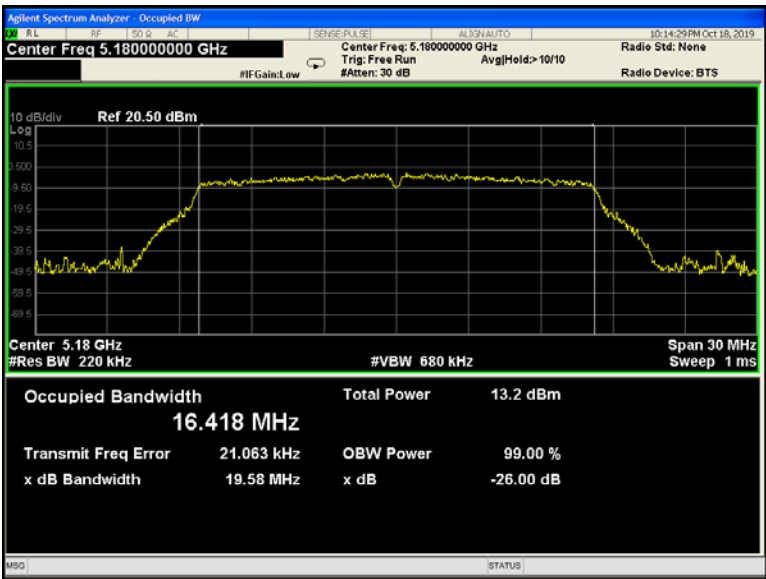


802.11a U-NII-1 Middle channel

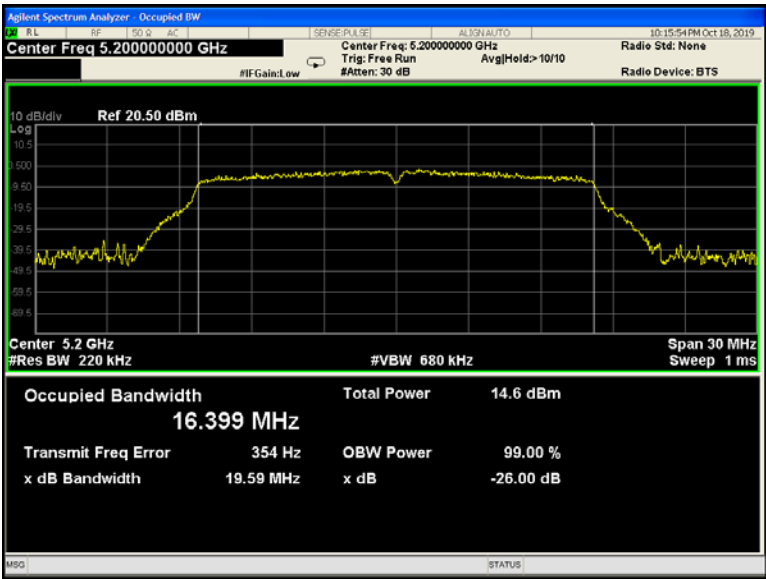


802.11a U-NII-1 High channel

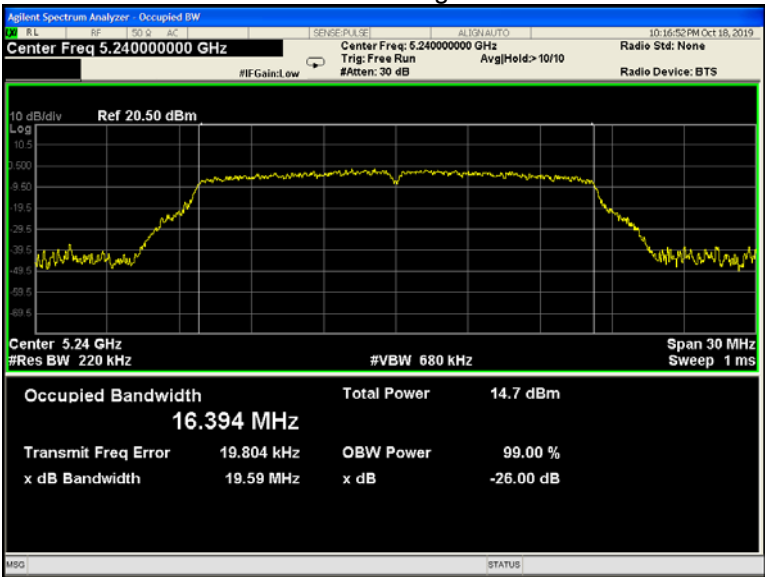


802.11n(HT20) U-NII-1 Low channel

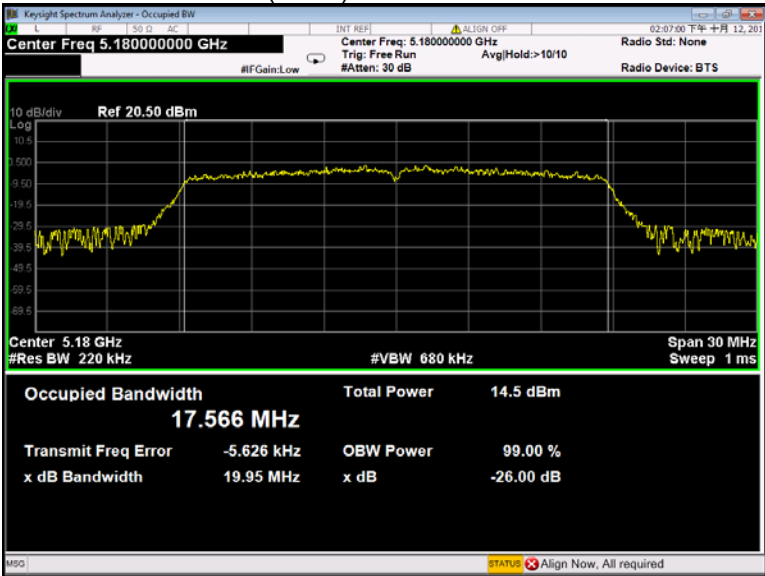


802.11n(HT20) U-NII-1 Middle channel

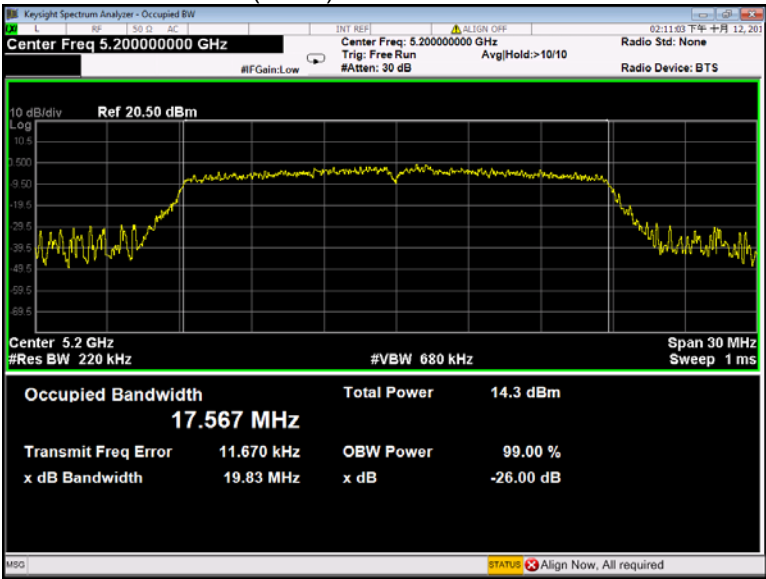


802.11n(HT20) U-NII-1 High channel

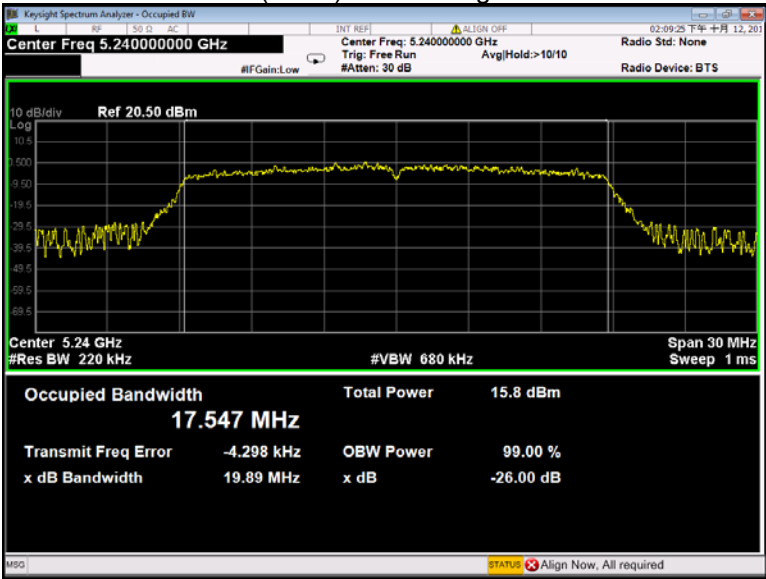


802.11n(HT40) U-NII-1 Low channel

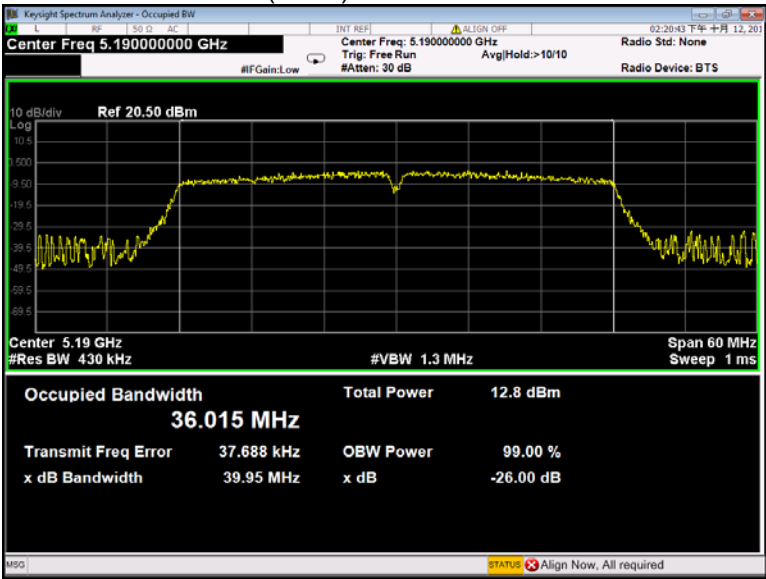


802.11n(HT40) U-NII-1 High channel

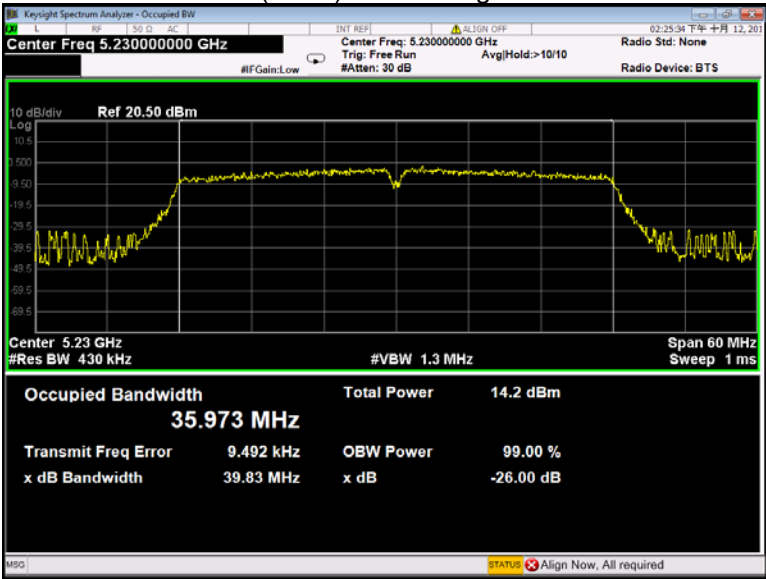


802.11ac(HT20) U-NII-1 Low channel

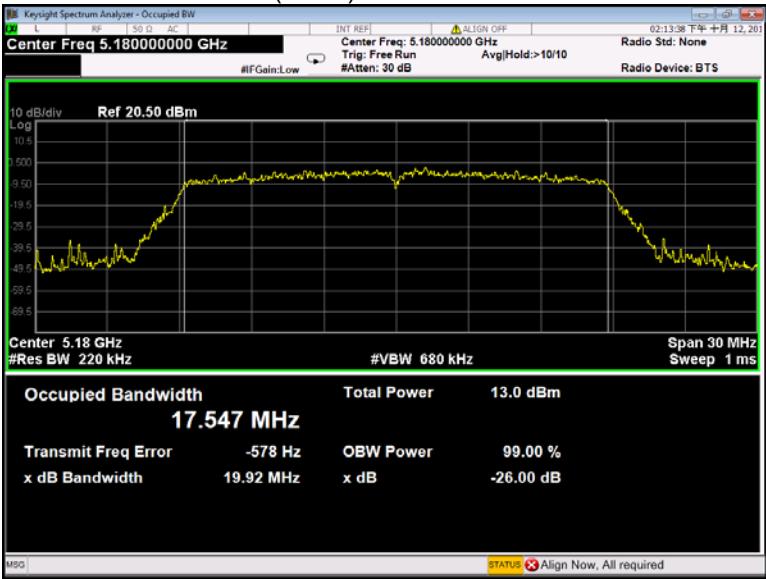


802.11ac(HT20) U-NII-1 Middle channel

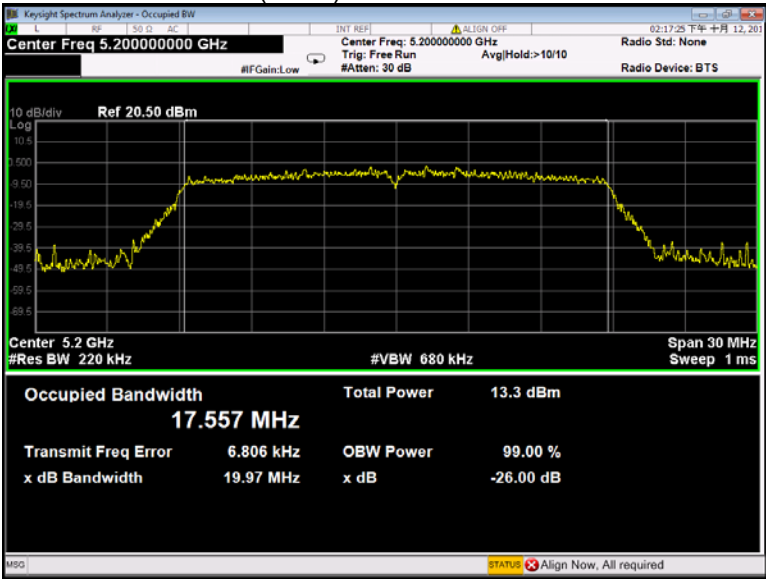


802.11ac(HT20) U-NII-1 High channel

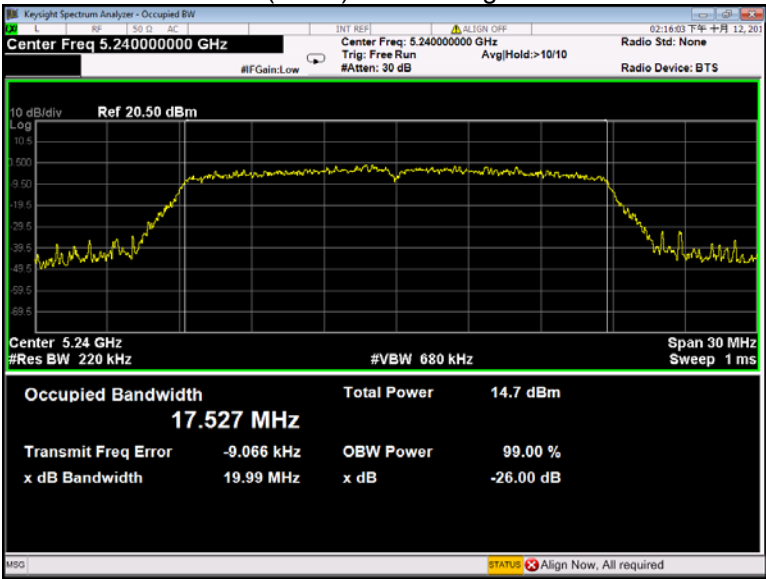


802.11ac(HT40) U-NII-1 Low channel

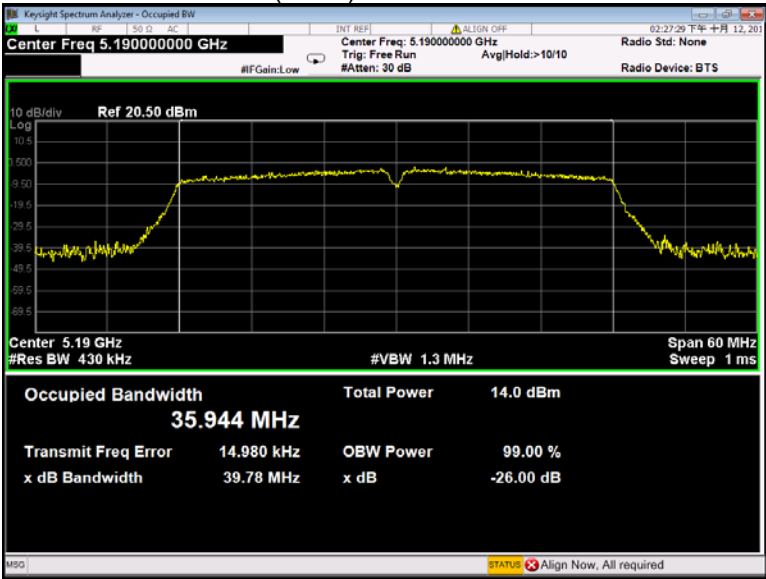


802.11 ac(HT40) U-NII-1 High channel

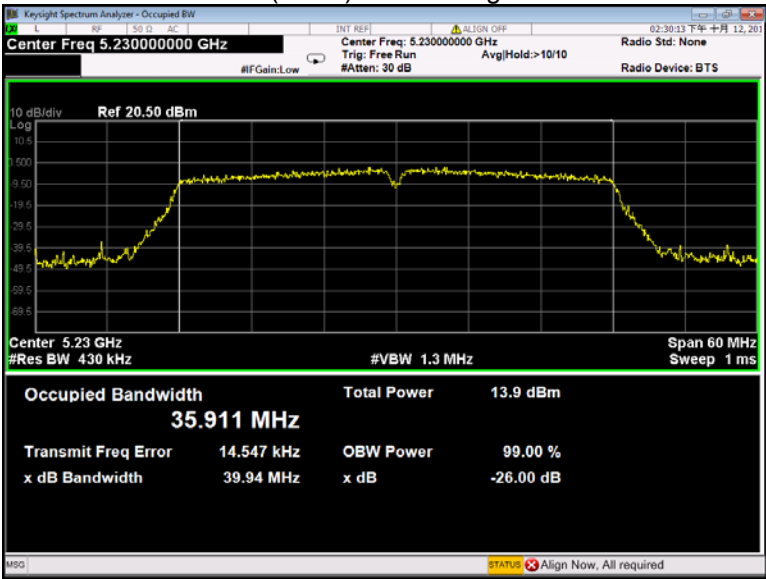


802.11ac(HT80) U-NII-1 Low channel

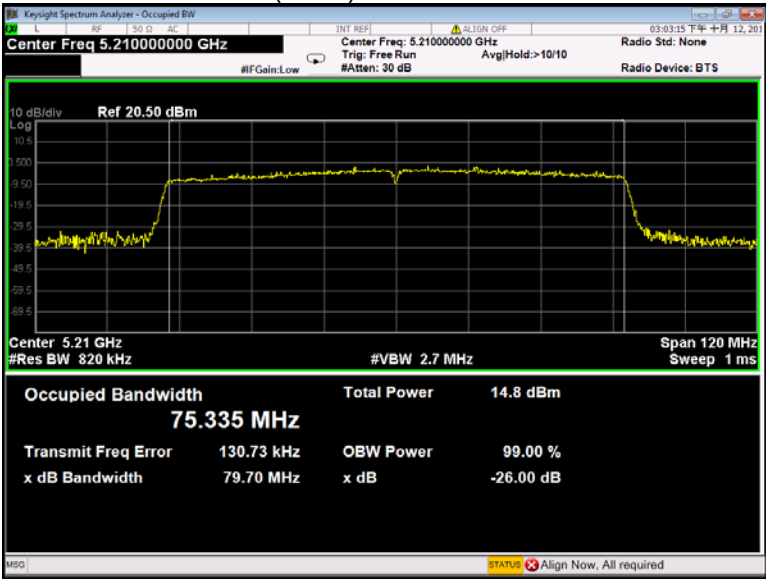


802.11a U-NII-3 Low channel

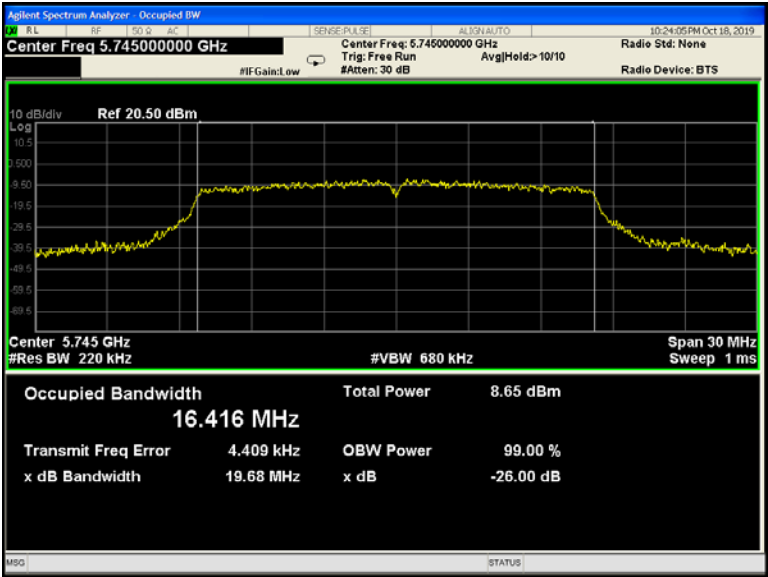


802.11a U-NII-3 Middle channel

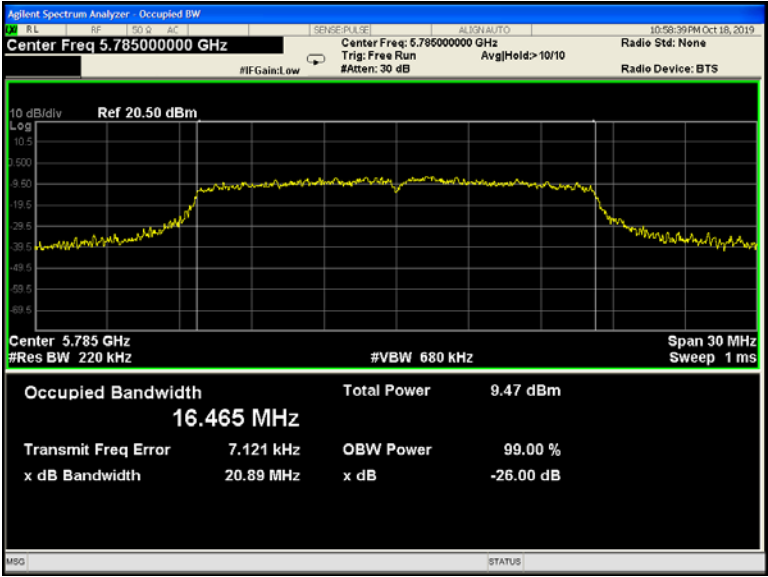


802.11a U-NII-3 High channel

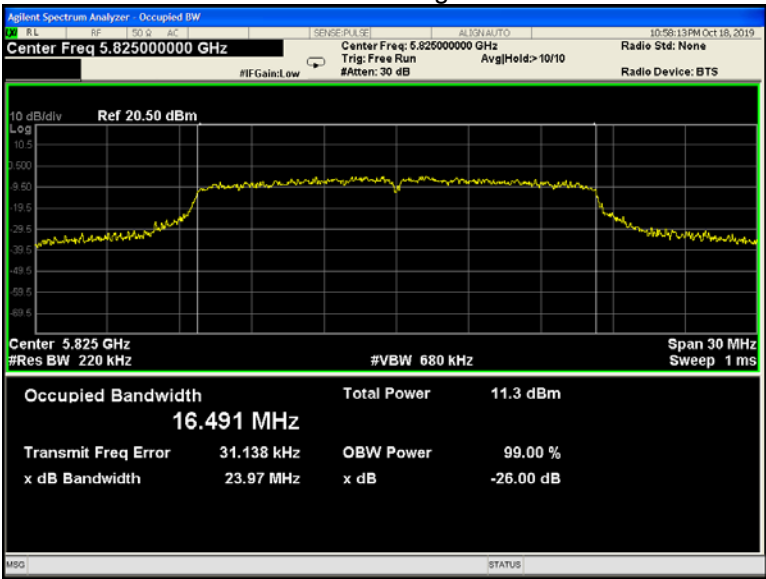


802.11n(HT20) U-NII-3 Low channel

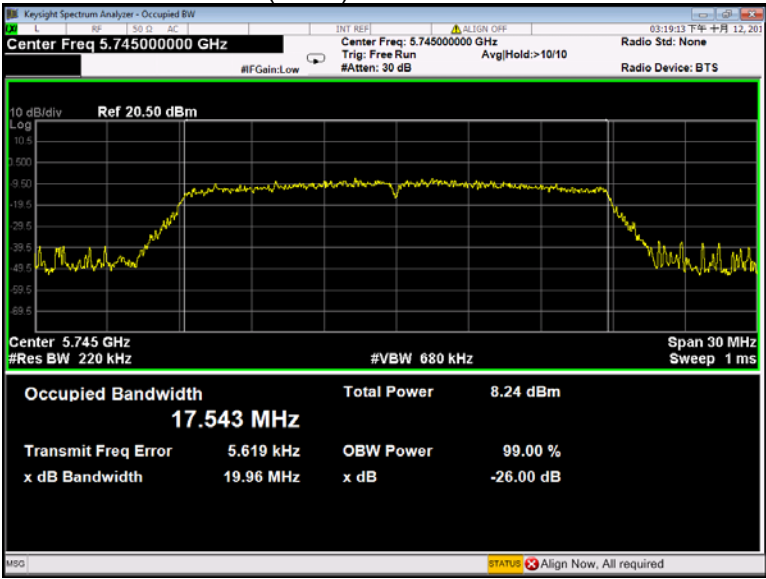


802.11n(HT20) U-NII-3 Middle channel

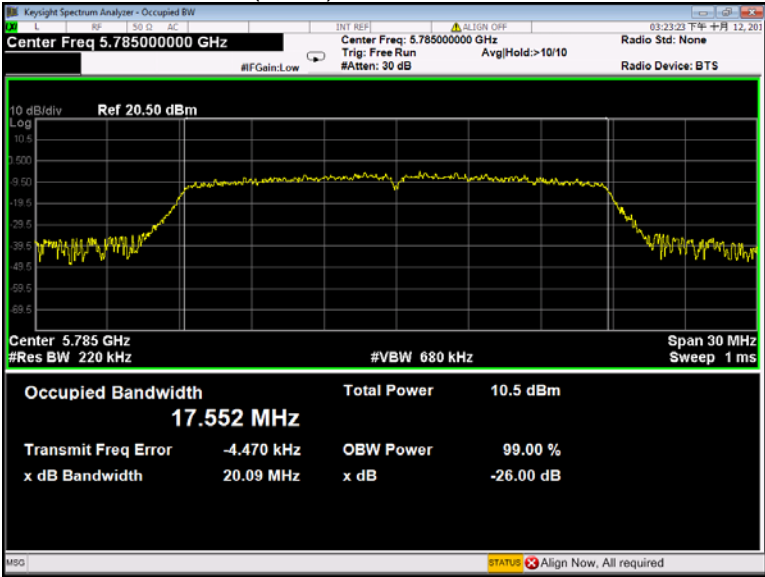

802.11n(HT20) U-NII-3 High channel

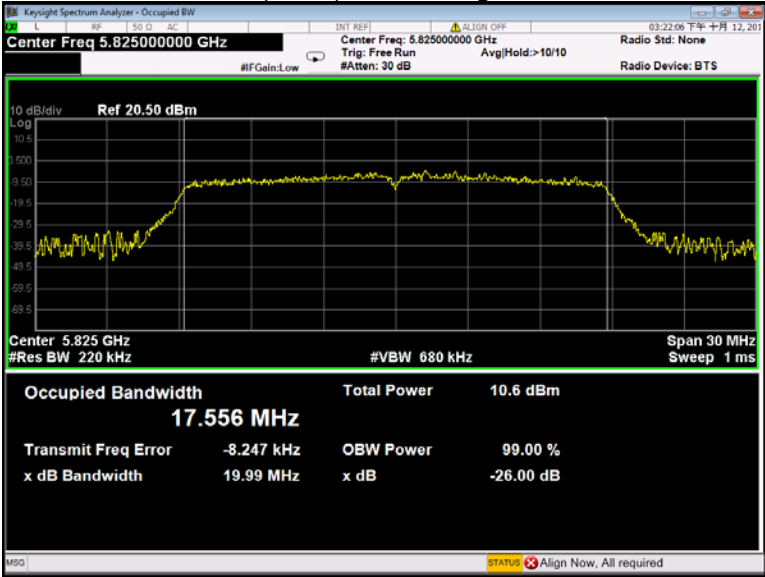

802.11n(HT40) U-NII-3 Low channel

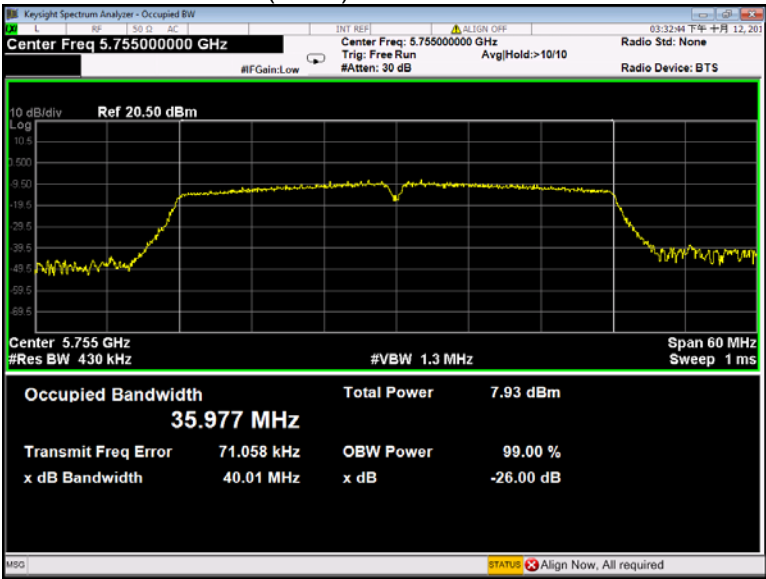

802.11n(HT40) U-NII-3 High channel

