

FCC RF Test Report

(Bluetooth)

Applicant: INFINIX MOBILITY LIMITED

Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: X669

Trade Mark: Infinix

FCC ID: 2AIZN-X669

Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)

Date of Sample Receipt: 15 Dec., 2022

Date of Test: 16 Dec., 2022 to 09 Jan., 2023

Date of Report Issued: 18 Jan., 2023

Test Result: PASS

Tested by: Mike Ou

Date: 18 Jan., 2023

Test Engineer

Reviewed by: Wenwen Zhou

Date: 18 Jan., 2023

Project Engineer

Approved by: Mike Ou

Date: 18 Jan., 2023

Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	18 Jan., 2023	<i>Original</i>

2 Contents

	Page
Cover Page	1
1 Version	2
2 Contents	3
3 General Information	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Test Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions From the Method.....	5
3.7 Laboratory Facility	5
3.8 Laboratory Location.....	6
3.9 Test Instruments List	6
4 Measurement Setup and Procedure	7
4.1 Test Channel.....	7
4.2 Test Setup	7
4.3 Test Procedure.....	9
5 Test Results	10
5.1 Summary	10
5.1.1 Clause and data summary	10
5.1.2 Test Limit.....	11
5.2 Test Results	12
5.2.1 RF Output Power Spot-check.....	12
5.2.2 Radiated spurious emissions Spot-check.....	18

3 General Information

3.1 Client Information

Applicant:	INFINIX MOBILITY LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	INFINIX MOBILITY LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

3.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	X669
Operation Frequency:	2402 MHz - 2480 MHz
Transfer Rate:	1/2/3 Mbits/s
Number of Channel:	79
Modulation Type:	GFSK, π/4-DQPSK, 8DPSK
Modulation Technology:	FHSS
Antenna Type:	Internal Antenna
Antenna Gain:	-4.1 dBi (declare by applicant)
Antenna transmit mode:	SISO (1TX, 1RX)
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.85V, 4900mAh
AC Adapter:	Model: U180XSA Input: AC100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.4A or 7.5V, 2.4A 18.0W Max
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Test Mode and Test Environment

Test Modes:	
Non-hopping mode:	Keep the EUT in continuous transmitting mode.
Hopping mode:	Keep the EUT in hopping mode.
Remark:	
1. For AC power line conducted emission and radiated spurious emission, pre-scan GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode, found GFSK modulation was worse case mode. The report only reflects the test data of worst mode. 2. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 10MHz)	1.9 dB
Conducted Emission for LISN (10MHz ~ 30MHz)	2.6 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	3.8 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	3.6 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	5.34 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.6 Additions to, Deviations, or Exclusions From the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.

4 Measurement Setup and Procedure


4.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	78	2480

4.2 Test Setup


1) Conducted emission measurement:

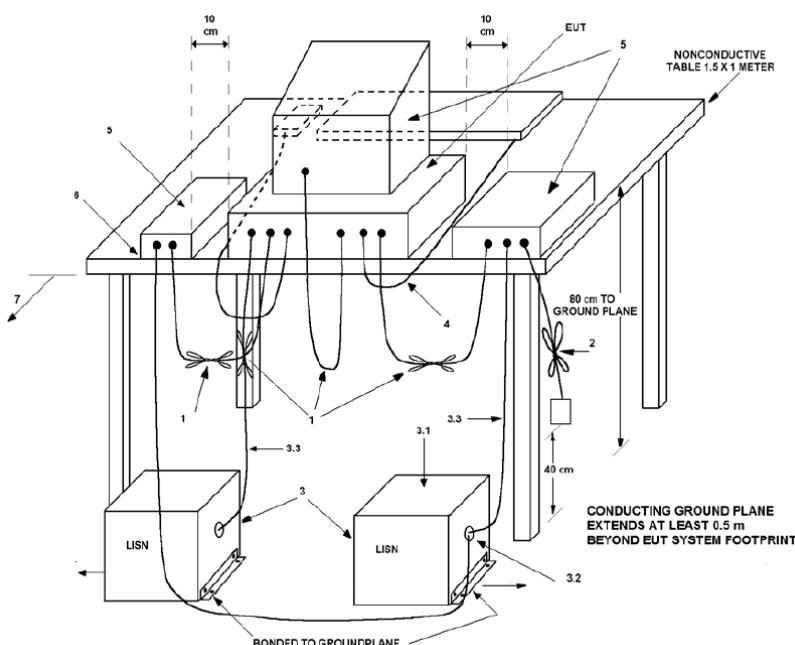


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

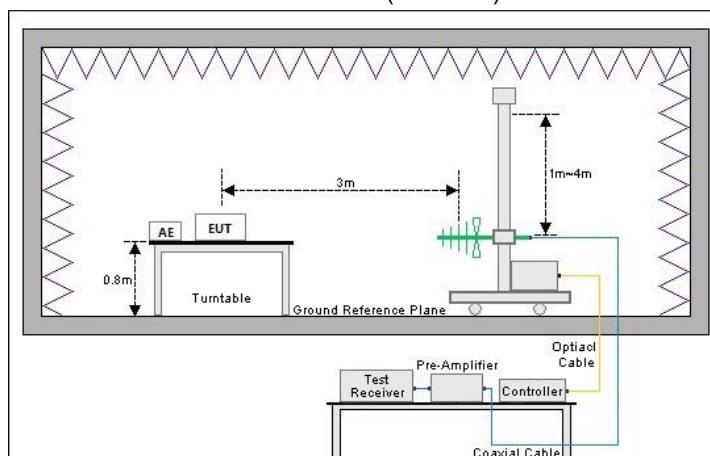

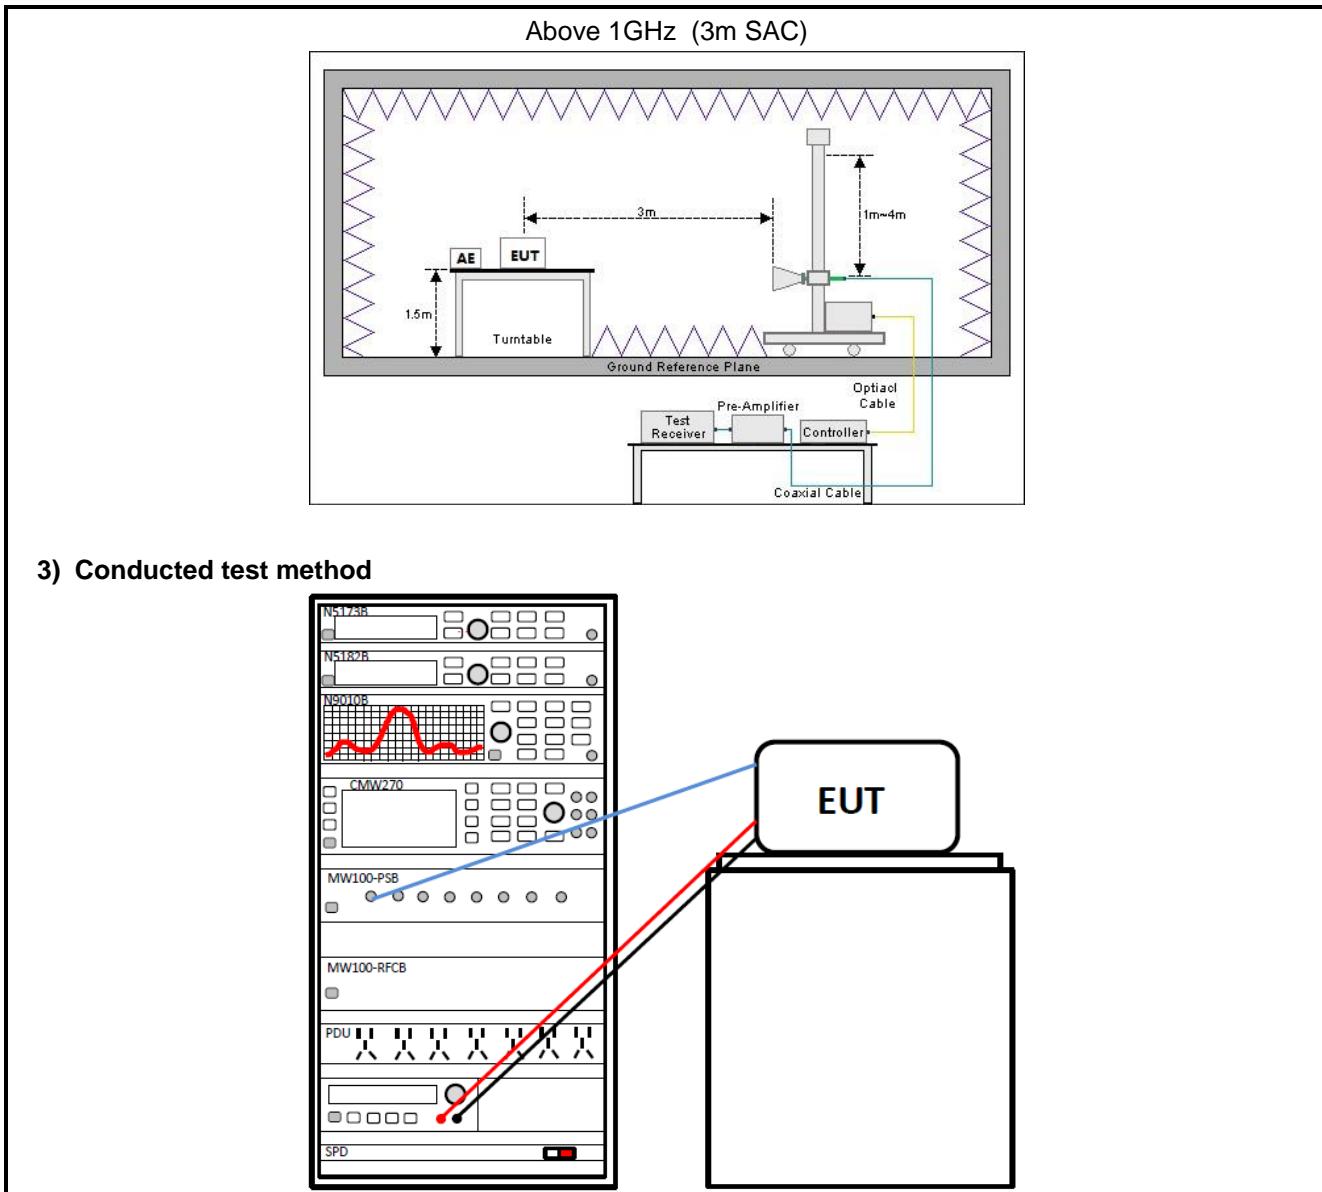

4.3 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none">1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none">1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none">1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	<ol style="list-style-type: none">1. The Bluetooth antenna port of EUT was connected to the test port of the test system through an RF cable.2. The EUT is keeping in continuous transmission mode and tested in all modulation modes.3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and data summary

This report is revised according to JYTSZ-R12-2202470 report, FCC ID: 2AIZN-X669D issued by Shenzhen Jianyan Testing Group Co., Ltd. Difference: Update model and FCC ID, product appearance color, Remove NFC antenna and NFC chip, and memory chip difference. So no need to retest.

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
AC Power Line Conducted Emission	15.207	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Conducted Output Power	15.247 (b)(1)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
20dB Occupied Bandwidth	15.247 (a)(1)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Carrier Frequencies Separation	15.247 (a)(1)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Hopping Channel Number	5.247 (a)(1)(iii)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Dwell Time	15.247 (a)(1)(iii)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Band-edge Emission Conduction Spurious Emission	15.247 (d)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	Reference report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.	Pass*
Remark:			
1. Pass*: The test data please refer to report JYTSZ-R12-2202470, FCC ID: 2AIZN-X669D.			
2. N/A: Not Applicable.			
3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).			
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

5.1.2 Test Limit


Test items	Limit																									
AC Power Line Conducted Emission	Frequency (MHz)	Limit (dB μ V)																								
		Quasi-Peak	Average																							
		0.15 – 0.5	66 to 56 <small>Note 1</small>																							
		0.5 – 5	56																							
Conducted Output Power	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.																									
20dB Occupied Bandwidth	Within authorization band																									
Carrier Frequencies Separation	a) 0.025MHz or the 20dB bandwidth (whichever is greater). b) 0.025MHz or two-thirds of the 20dB bandwidth (whichever is greater).																									
Hopping Channel Number	At least 15 channels.																									
Dwell Time	Not be greater than 0.4 seconds.																									
Band-edge Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																									
Conduction Spurious Emission																										
Emissions in Restricted Frequency Bands	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th colspan="2">Limit (dBμV/m)</th> <th rowspan="2">Detector</th> </tr> <tr> <th></th> <th>@ 3m</th> <th>@ 10m</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>40.0</td> <td>30.0</td> <td>Quasi-peak</td> </tr> <tr> <td>88 – 216</td> <td>43.5</td> <td>33.5</td> <td>Quasi-peak</td> </tr> <tr> <td>216 – 960</td> <td>46.0</td> <td>36.0</td> <td>Quasi-peak</td> </tr> <tr> <td>960 – 1000</td> <td>54.0</td> <td>44.0</td> <td>Quasi-peak</td> </tr> </tbody> </table> <p>Note: The more stringent limit applies at transition frequencies.</p>			Frequency (MHz)	Limit (dB μ V/m)		Detector		@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak
Frequency (MHz)	Limit (dB μ V/m)		Detector																							
	@ 3m	@ 10m																								
30 – 88	40.0	30.0	Quasi-peak																							
88 – 216	43.5	33.5	Quasi-peak																							
216 – 960	46.0	36.0	Quasi-peak																							
960 – 1000	54.0	44.0	Quasi-peak																							
Emissions in Non-restricted Frequency Bands	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m) @ 3m</th> </tr> </thead> <tbody> <tr> <td>Above 1 GHz</td> <td>Average</td> </tr> </tbody> </table>		Frequency	Limit (dB μ V/m) @ 3m	Above 1 GHz	Average																				
Frequency	Limit (dB μ V/m) @ 3m																									
Above 1 GHz	Average																									
	<table border="1"> <thead> <tr> <th>Above 1 GHz</th> <th>Peake</th> </tr> </thead> </table>		Above 1 GHz	Peake																						
Above 1 GHz	Peake																									
	<table border="1"> <thead> <tr> <th>Above 1 GHz</th> <th>54.0</th> <th>74.0</th> </tr> </thead> </table>		Above 1 GHz	54.0	74.0																					
Above 1 GHz	54.0	74.0																								
	<p>Note: The measurement bandwidth shall be 1 MHz or greater.</p>																									


5.2 Test Results


5.2.1 RF Output Power Spot-check.

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	7.71	30	Pass
NVNT	1-DH1	2441	Ant1	5.991	30	Pass
NVNT	1-DH1	2480	Ant1	6.095	30	Pass
NVNT	2-DH1	2402	Ant1	7.954	21	Pass
NVNT	2-DH1	2441	Ant1	5.979	21	Pass
NVNT	2-DH1	2480	Ant1	6.569	21	Pass
NVNT	3-DH1	2402	Ant1	8.28	21	Pass
NVNT	3-DH1	2441	Ant1	6.328	21	Pass
NVNT	3-DH1	2480	Ant1	6.767	21	Pass

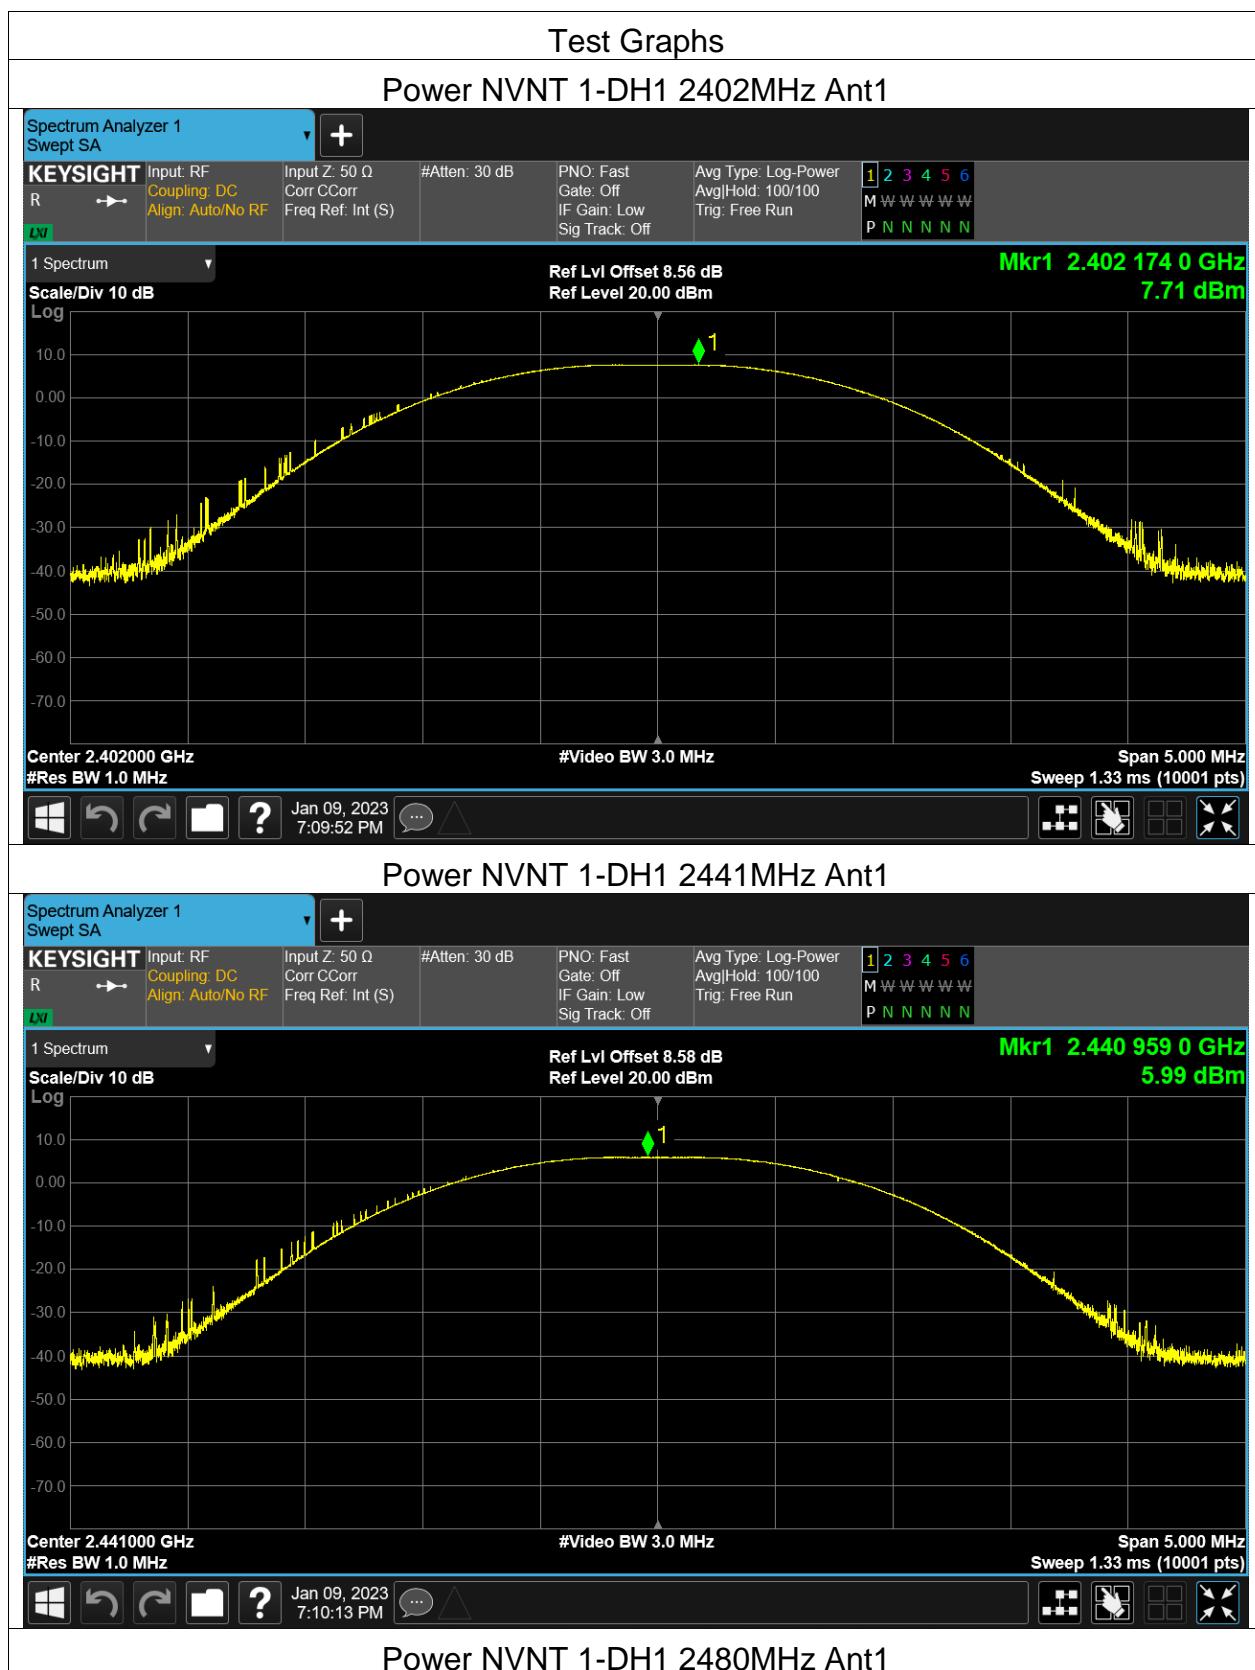

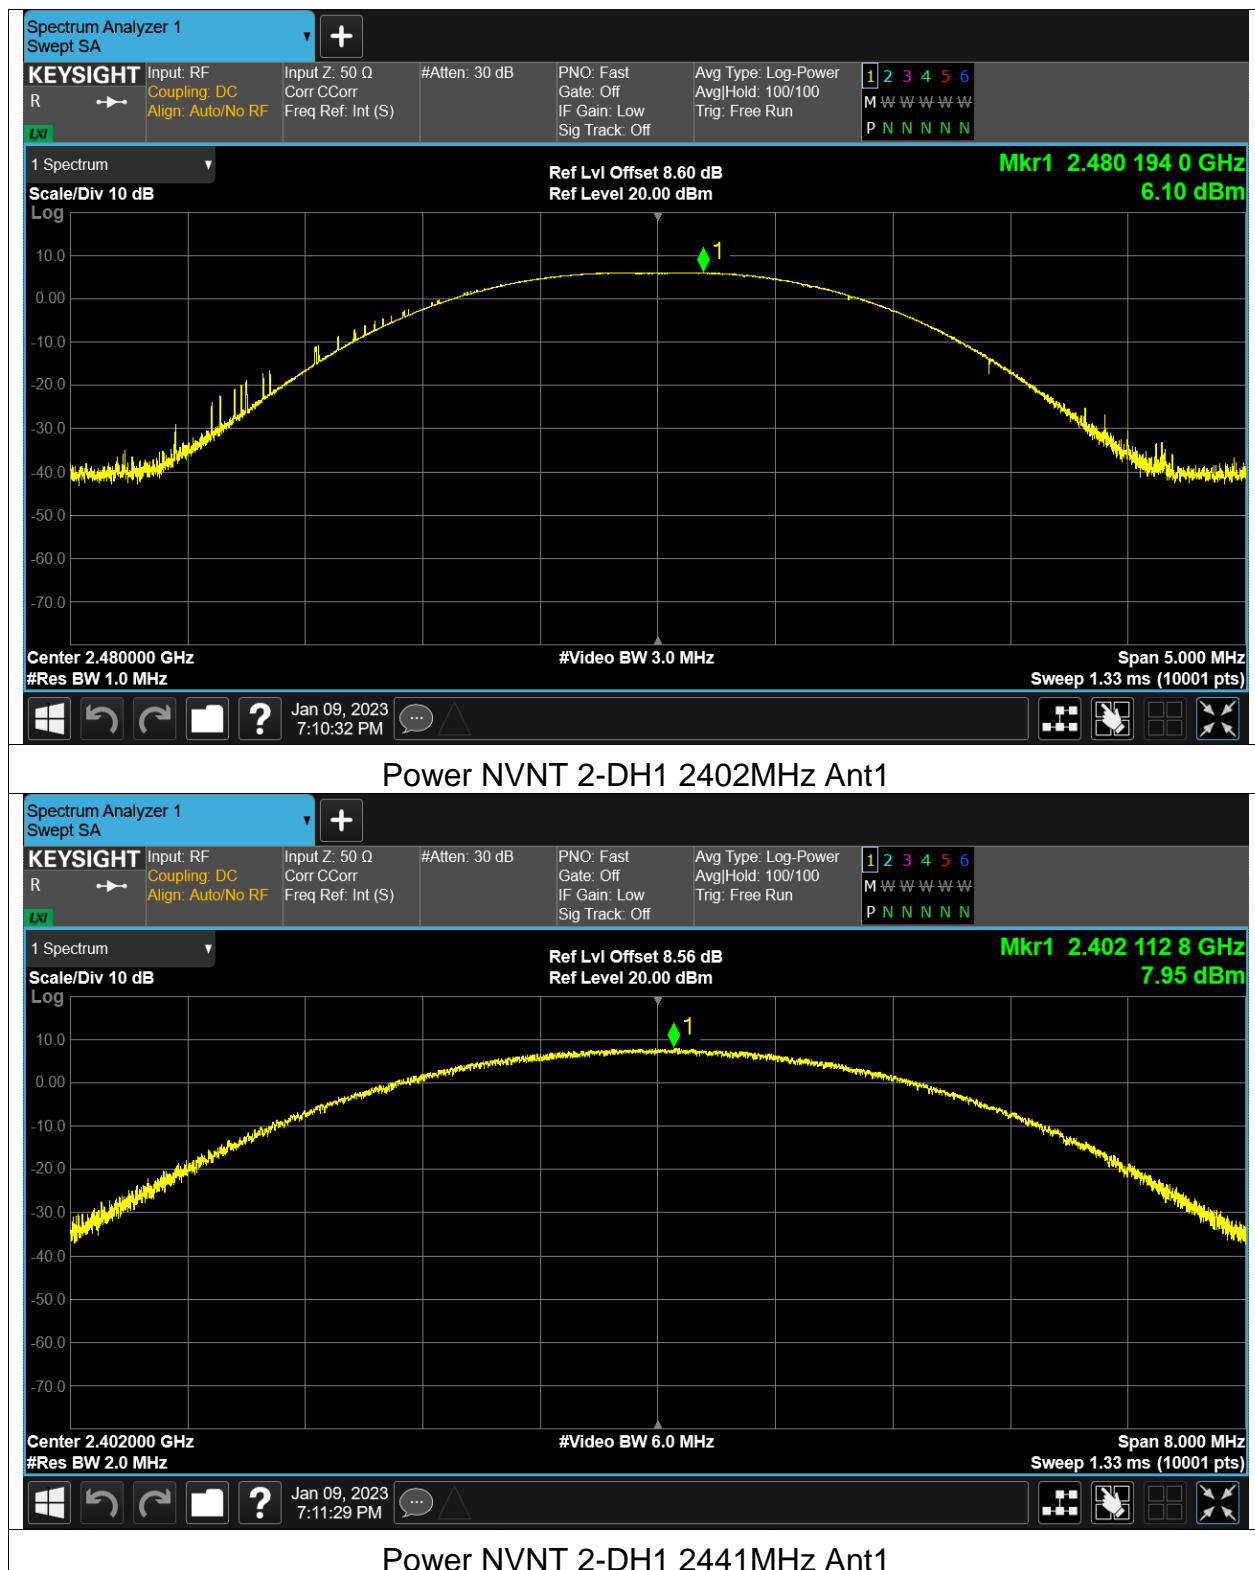

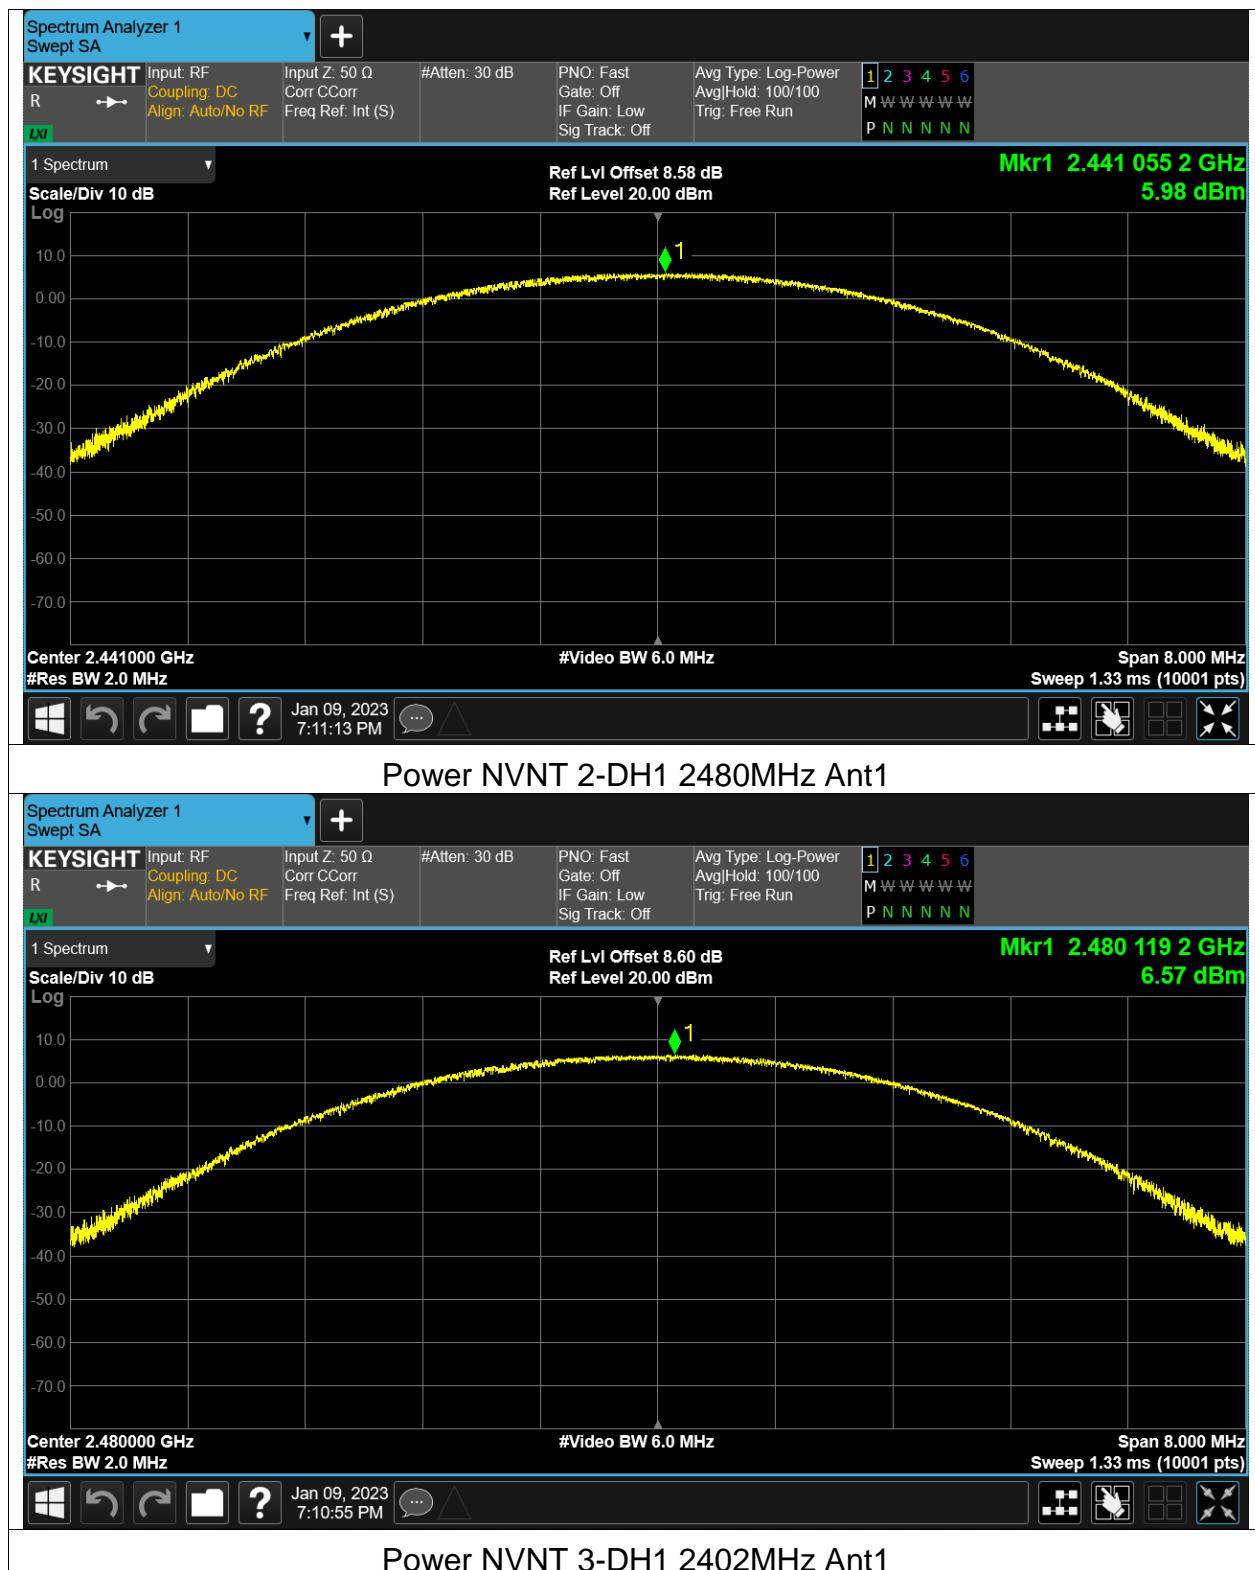



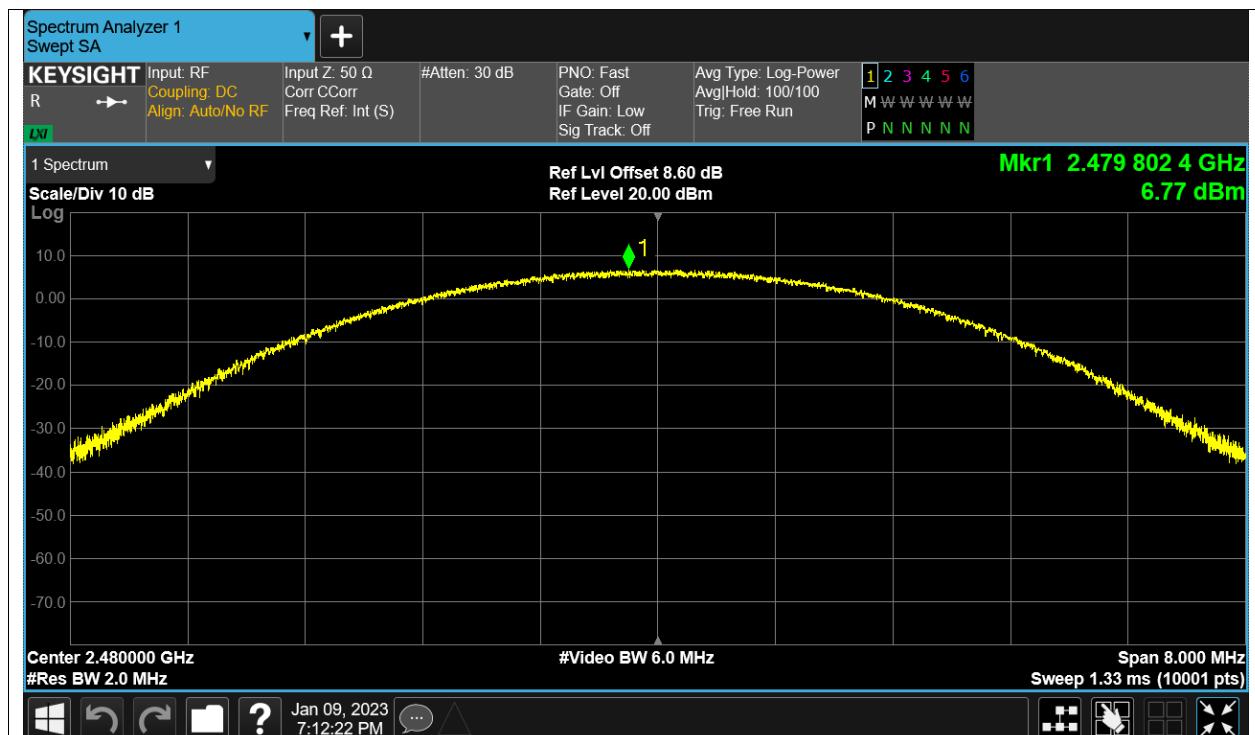

5.2.2 Radiated spurious emissions Spot-check.

Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4804.00	54.36	-9.60	44.76	74.00	29.24	Vertical
4804.00	54.79	-9.60	45.19	74.00	28.81	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4804.00	47.79	-9.60	38.19	54.00	15.81	Vertical
4804.00	47.63	-9.60	38.03	54.00	15.97	Horizontal

Remark:

1. *Level = Reading + Factor.*

-----End of report-----