

TEST REPORT

Product Name : Face Recognition Terminal
Model Number : Edge Point
FCC ID : 2AJ2B-EDGEPOINT

Prepared for : Telepower Communication Co., Ltd.
Address : 5 Bld, Zone A, Hantian Technology Town No.17 ShenHai
RD, Nanhai District, Foshan, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2206230216W00206R
Date(s) of Tests : June 23, 2022 to July 19, 2022
Date of issue : July 20, 2022

Table of Contents

1	EUT TECHNICAL DESCRIPTION	4
2	SUMMARY OF TEST RESULT	5
3	TEST METHODOLOGY	6
3.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.2	MEASUREMENT EQUIPMENT USED	6
3.3	DESCRIPTION OF TEST MODES	7
4	FACILITIES AND ACCREDITATIONS	8
4.1	FACILITIES	8
4.2	EQUIPMENT	8
4.3	LABORATORY ACCREDITATIONS AND LISTINGS	8
5	TEST SYSTEM UNCERTAINTY	9
6	SETUP OF EQUIPMENT UNDER TEST	10
6.1	RADIO FREQUENCY TEST SETUP 1	10
6.2	RADIO FREQUENCY TEST SETUP 2	10
6.3	CONDUCTED EMISSION TEST SETUP	11
6.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	12
6.5	SUPPORT EQUIPMENT	12
7	TEST REQUIREMENTS	13
7.1	OCCUPIED BANDWIDTH	13
7.2	FREQUENCY STABILITY	15
7.3	RADIATED SPURIOUS EMISSION	16
7.4	CONDUCTED EMISSION TEST	29
8	ANTENNA APPLICATION	32

TEST RESULT CERTIFICATION

Applicant : Telepower Communication Co., Ltd.
Address : 5 Bld, Zone A, Hantian Technology Town No.17 ShenHai RD, Nanhai District, Foshan, China
Manufacturer : Telepower Communication Co., Ltd.
Address : 5 Bld, Zone A, Hantian Technology Town No.17 ShenHai RD, Nanhai District, Foshan, China
EUT : Face Recognition Terminal
Model Name : Edge Point
Trademark : **OOSTO**

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J	
FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : _____ June 23, 2022 to July 19, 2022 _____

Prepared by : _____  _____ Una Yu /Editor

Reviewer : _____  _____ Joe Xia/Supervisor

Approve & Authorized Signer : _____  _____ Lisa Wang/Manager



1 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product:	Face Recognition Terminal
Model Number:	Edge Point
Sample:	2#
Device Type	NFC
Modulation:	ASK
Operating Frequency Range(s):	13.56MHz
Number of Channels:	1 channel
Antenna Type /Gain:	Induction coil Antenna
Power supply:	DC12V from adapter Model: BI24-120200-AdU Input: AC100-240, 50Hz/60Hz,0.8A Output: DC12V,2.0A
Date of Received:	June 23, 2022
Temperature Range:	-10°C ~ +45°C

Note: for more details, please refer to the User's manual of the EUT.

2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
2.1049	Occupied Bandwidth	PASS	
15.225(e)	Frequency stability	PASS	
15.225(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	
NOTE1: N/A (Not Applicable)			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID: 2AJ2B-EDGEPOINT** filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
 FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C

3.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Test Receiver	Rohde & Schwarz	ESCI	101384	May 14, 2022	1 Year
L.I.S.N.	Rohde & Schwarz	ENV216	5	May 14, 2022	1 Year
L.I.S.N.	Kyoritsu	KNW-407	8-1492-9	May 15, 2022	1 Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	May 14, 2022	1 Year
Pre-Amplifie	Lunar EM	LNA30M3G-25	J10100000070	May 14, 2022	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	661	Jun. 12, 2021	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	Jun. 12, 2021	2 Year
Pre-Amplifie	SKET	LNPA_0118G-45	SK2019051801	May 14, 2022	1 Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	Jun. 12, 2021	2 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	May 14, 2022	1 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1178	Aug. 22, 2021	2 Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400- 2485MHz)	2	May 14, 2022	1 Year

For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wireless Connectivity Tester	R&S	CMW270	102543	Aug. 27, 2021	1 Year
Automatic Control Unit	Tonscend	JS0806-2	21I8060480	Nov. 18, 2021	1 Year
Signal Analyzer	KEYSIGHT	N9010B	MY60242456	Jan. 21, 2022	1 Year
Analog Signal Generator	KEYSIGHT	N5173B	MY61252625	Oct. 29, 2021	1 Year
UP/DOWN-Converter	R&S	CMW-Z800A	100274	Sep. 14, 2021	1 Year
Vector Signal Generator	KEYSIGHT	N5182B	MY61252674	Oct. 28, 2021	1 Year
Frequency Extender	KEYSIGHT	N5182BX07	MY59362541	Nov. 23, 2021	1 Year
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	Jul. 02, 2022	1 Year

3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.



4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

4.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS

The Certificate Registration Number is L2291.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01.

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



6 SETUP OF EQUIPMENT UNDER TEST

6.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.


Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

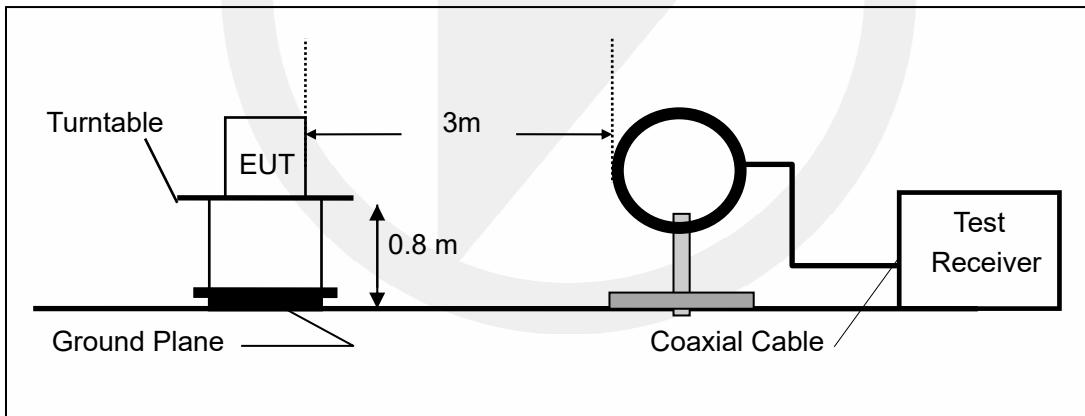

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

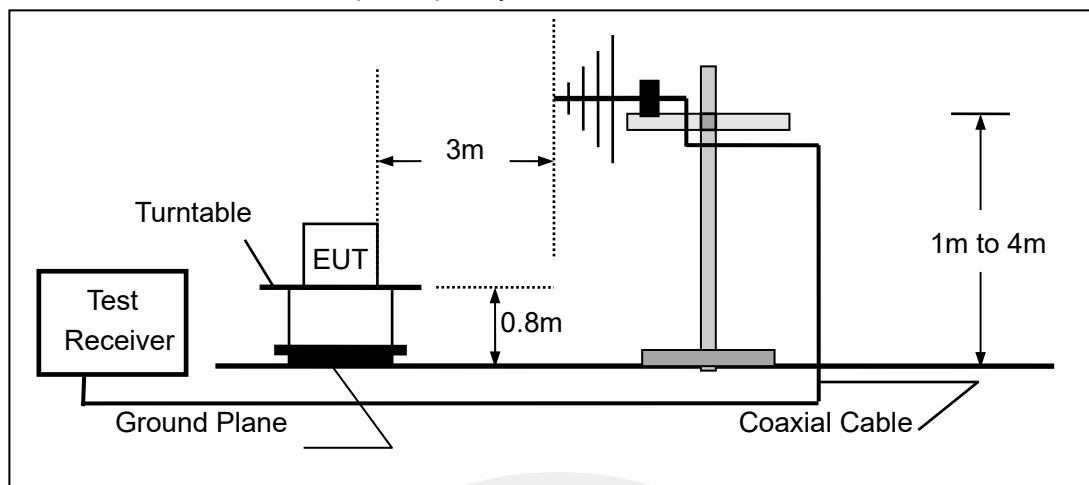


6.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

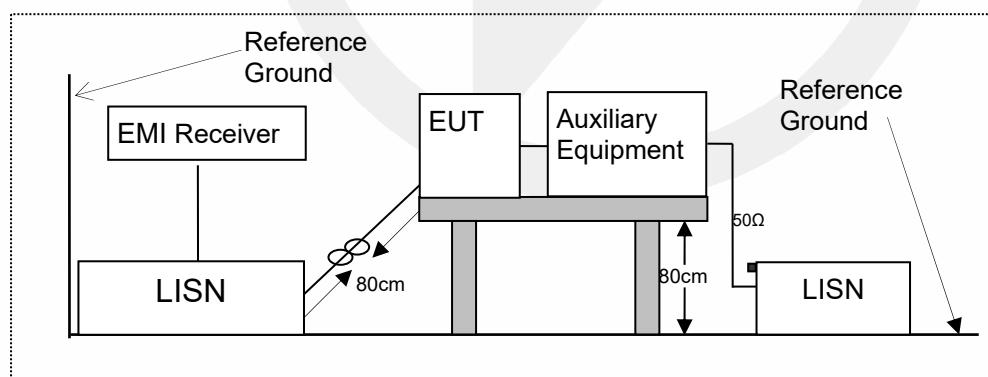

6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

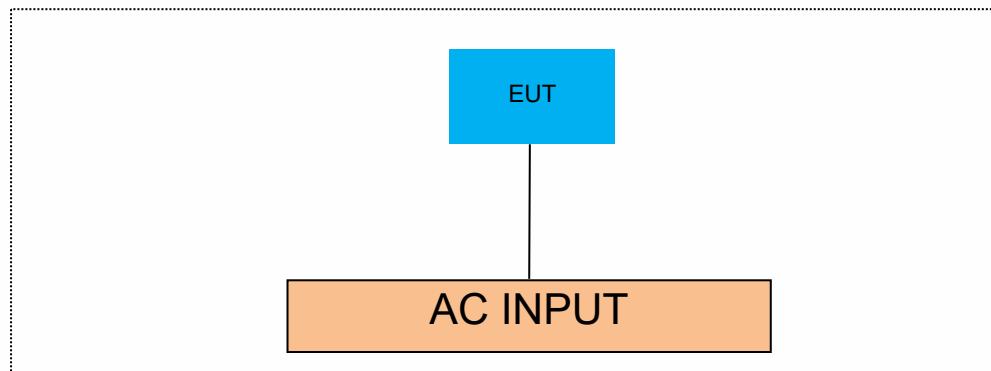

6.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7 TEST REQUIREMENTS

7.1 OCCUPIED BANDWIDTH

7.1.1 Applicable Standard

According to FCC Part 2.1049

7.1.2 Conformance Limit

No limit requirement.

7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.1.4 Test Procedure

The EUT was operating in transmit mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 3kHz

Set the video bandwidth (VBW) =10 kHz

Set Span= approximately 2 to 4 times the occupied bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 99% down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 99% bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

7.1.5 Test Results


Temperature :	28°C	Test By:	Kingkong
Humidity :	65 %		

Modulation Mode	Channel Number	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Verdict
ASK	0	13.56MHz	15.05	N/A	PASS
Note: N/A (Not Applicable)					

Test Model

Occupied Bandwidth
Channel 0: 13.56MHz

ASK Modulation

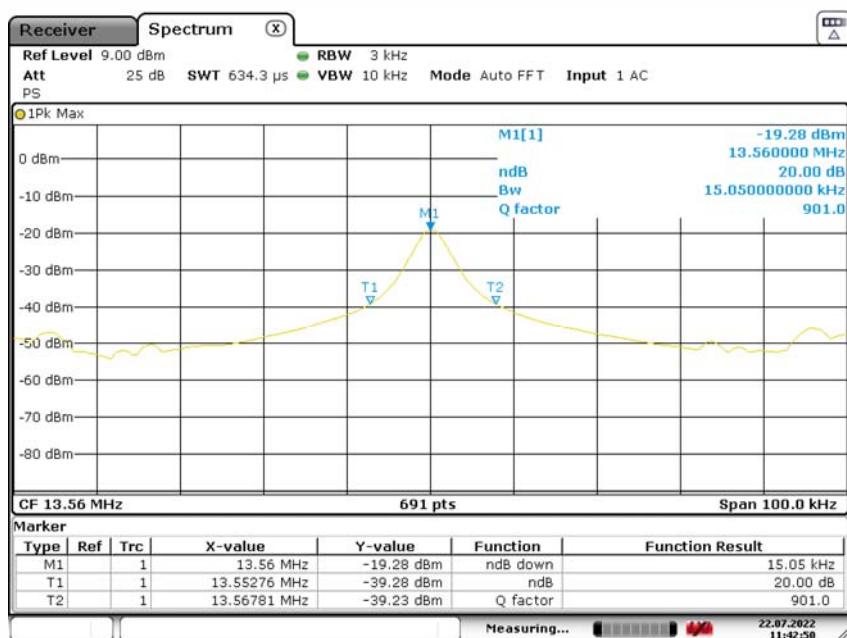

7.2 FREQUENCY STABILITY

7.2.1 Applicable Standard

According to FCC Part 2.1055

7.2.2 Conformance Limit

According to part 15.225(e), The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

7.2.4 Test Procedures

Connect the EUT to frequency analyzer via the antenna connector.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

7.2.5 Test Results

Operation Mode	Channel Number	Test Condition		Channel Frequency (MHz)	Freq.Dev. (Hz)	Deviation (ppm)	Limit (ppm)
		Voltage (V)	Temp (°C)				
ASK	CH0	Vnom	-10	13.56	25	1.84	100
			0	13.56	24	1.77	100
			10	13.56	29	2.14	100
			20	13.56	24	1.77	100
			30	13.56	29	2.14	100
			40	13.56	23	1.70	100
			50	13.56	28	2.06	100
		85% Vnom	20	13.56	30	2.21	100
		115% Vnom	20	13.56	30	2.21	100
VERDICT				PASS			

7.3 RADIATED SPURIOUS EMISSION

7.3.1 Applicable Standard

According to FCC Part 15.225 and 15.209

7.3.2 Conformance Limit

Field Strength of Fundamental Emissions and Spectrum Mask					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
Fundamental	15848	84.0	103.1	124.0	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	48.5 - 13.8	300
0.490-1.705	24000/F(KHz)	33.8 – 23.0	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

7.3.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2

7.3.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for $f < 30$ MHz(150KHz to 30KHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.


7.3.5 Test Results

■ Field Strength of Fundamental Emissions and Spectrum Mask

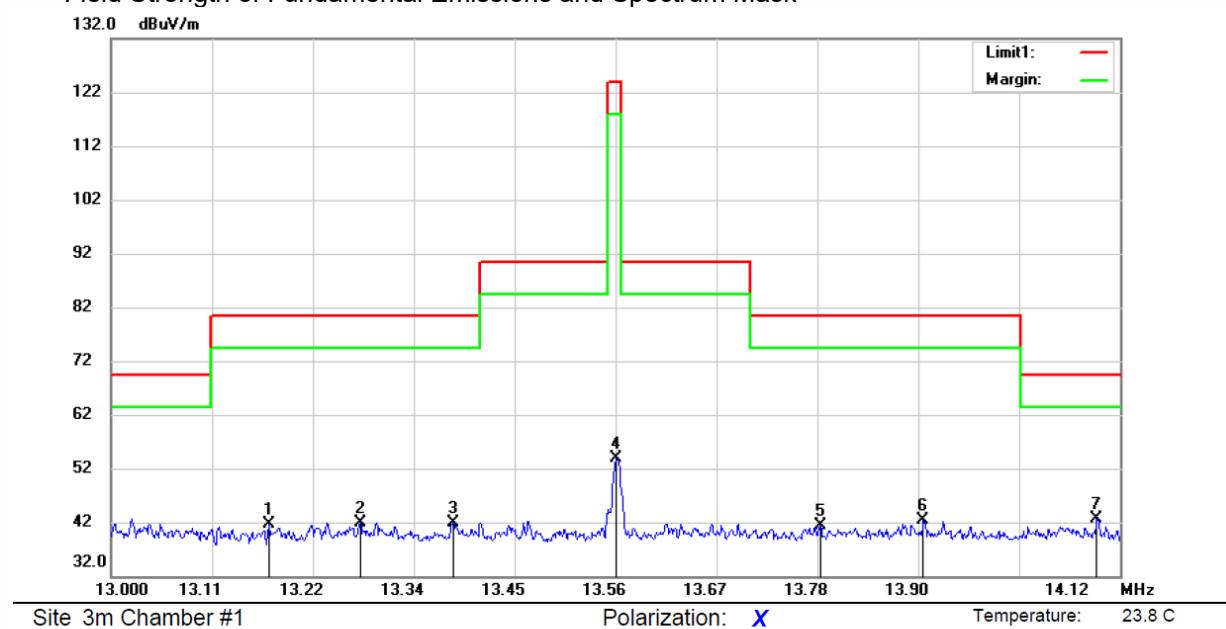

Note:

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height cm	Table Degree	Comment
		dBuV	dB	dBuV/m	dBuV/m	dB	Detector	degree	
1	13.1745	21.35	20.21	41.56	80.50	-38.94	peak		
2	13.2766	21.73	20.22	41.95	80.50	-38.55	peak		
3	13.3795	21.74	20.21	41.95	80.50	-38.55	peak		
4	13.5610	33.60	20.21	53.81	124.00	-70.19	peak		
5	13.7873	21.10	20.20	41.30	80.50	-39.20	peak		
6	13.9016	22.14	20.20	42.34	80.50	-38.16	peak		
7 *	14.0942	22.41	20.21	42.62	69.50	-26.88	peak		

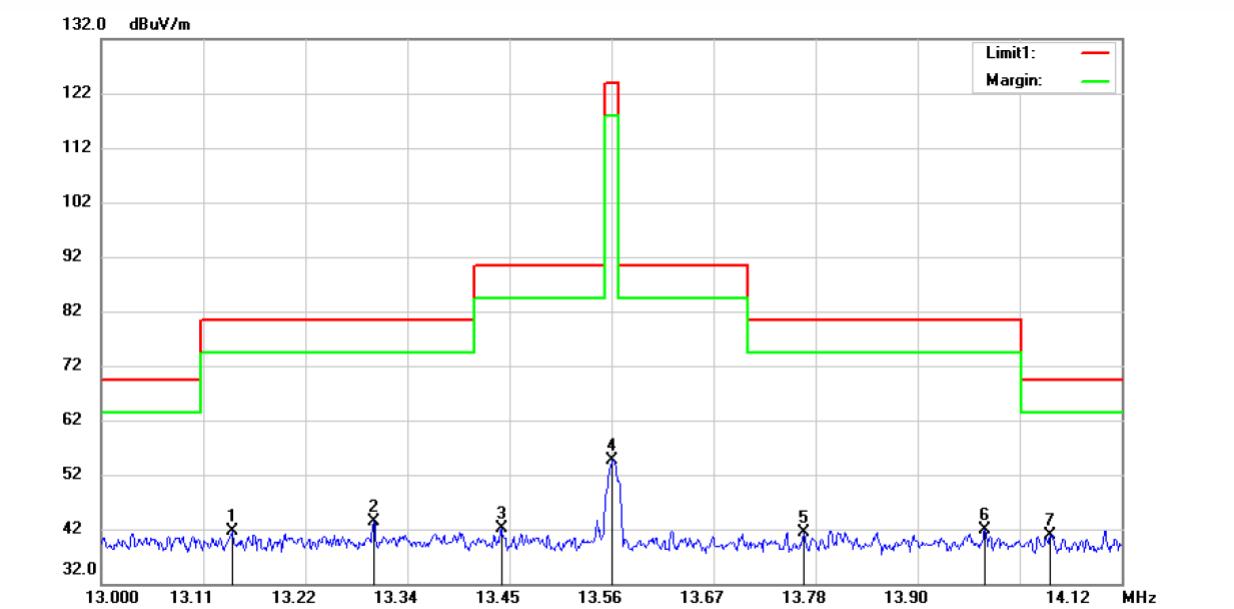

Site 3m Chamber #1

Polarization: Y Temperature: 23.8 C

Limit: (RE)FCC PART 15.225(Mask)


Power: AC 120V/60Hz

Humidity: 39 %

Mode: 13.56M

Note:

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height cm	Table Degree	Comment
		dBuV	dB	dBuV/m	dBuV/m	dB			
1	13.1432	21.42	20.21	41.63	80.50	-38.87	peak		
2	13.2990	23.09	20.22	43.31	80.50	-37.19	peak		
3	13.4390	21.91	20.21	42.12	90.50	-48.38	peak		
4	13.5610	34.51	20.21	54.72	124.00	-69.28	peak		
5	13.7713	21.21	20.20	41.41	80.50	-39.09	peak		
6	13.9700	21.75	20.20	41.95	80.50	-38.55	peak		
7 *	14.0416	20.66	20.20	40.86	69.50	-28.64	peak		

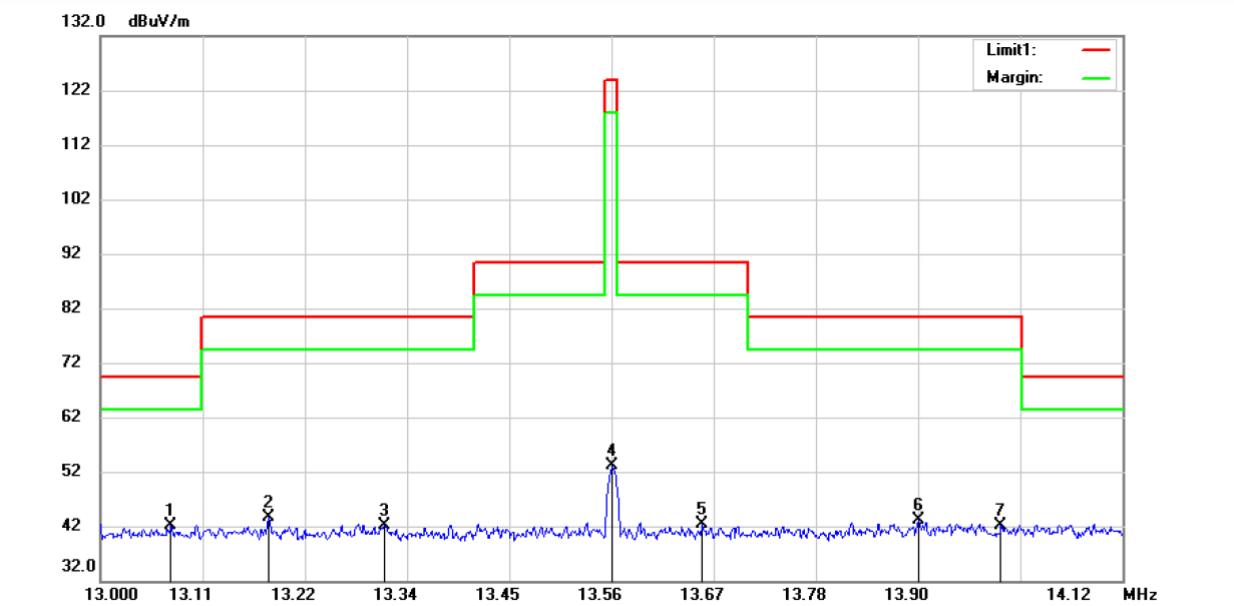

Site 3m Chamber #1

Polarization: Z

Temperature: 23.8 C

Limit: (RE)FCC PART 15.225(Mask)

Power: AC 120V/60Hz

Humidity: 39 %

Mode:13.56M

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	13.0770	21.84	20.22	42.06	69.50	-27.44	peak		
2		13.1844	23.31	20.22	43.53	80.50	-36.97	peak		
3		13.3110	21.92	20.21	42.13	80.50	-38.37	peak		
4		13.5610	32.96	20.21	53.17	124.00	-70.83	peak		
5		13.6593	22.13	20.21	42.34	90.50	-48.16	peak		
6		13.8960	22.91	20.21	43.12	80.50	-37.38	peak		
7		13.9867	22.02	20.20	42.22	80.50	-38.28	peak		

■ Spurious Emission below 150kHz (9KHz to 150kHz)

Temperature:	24°C	Test By:	KK
Humidity:	53 %	Test mode:	TX Mode


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor =40log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor

All mode have been tested, and the worst result was report as below:

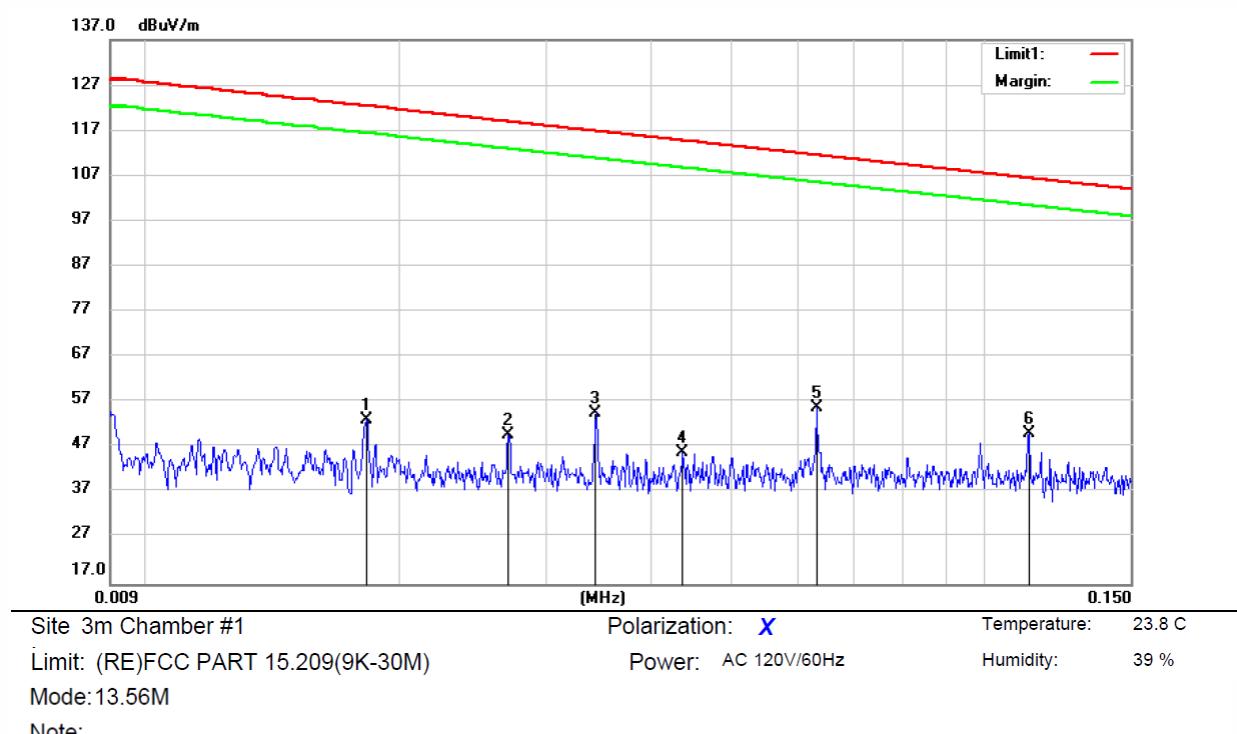

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree		
		dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	0.0182	32.48	20.59	53.07	122.39	-69.32	peak			
2	0.0270	29.24	20.59	49.83	118.96	-69.13	peak			
3	0.0342	34.16	20.63	54.79	116.91	-62.12	peak			
4	0.0434	25.17	20.72	45.89	114.84	-68.95	peak			
5 *	0.0630	35.11	20.73	55.84	111.61	-55.77	peak			
6	0.1135	29.42	20.70	50.12	106.50	-56.38	peak			

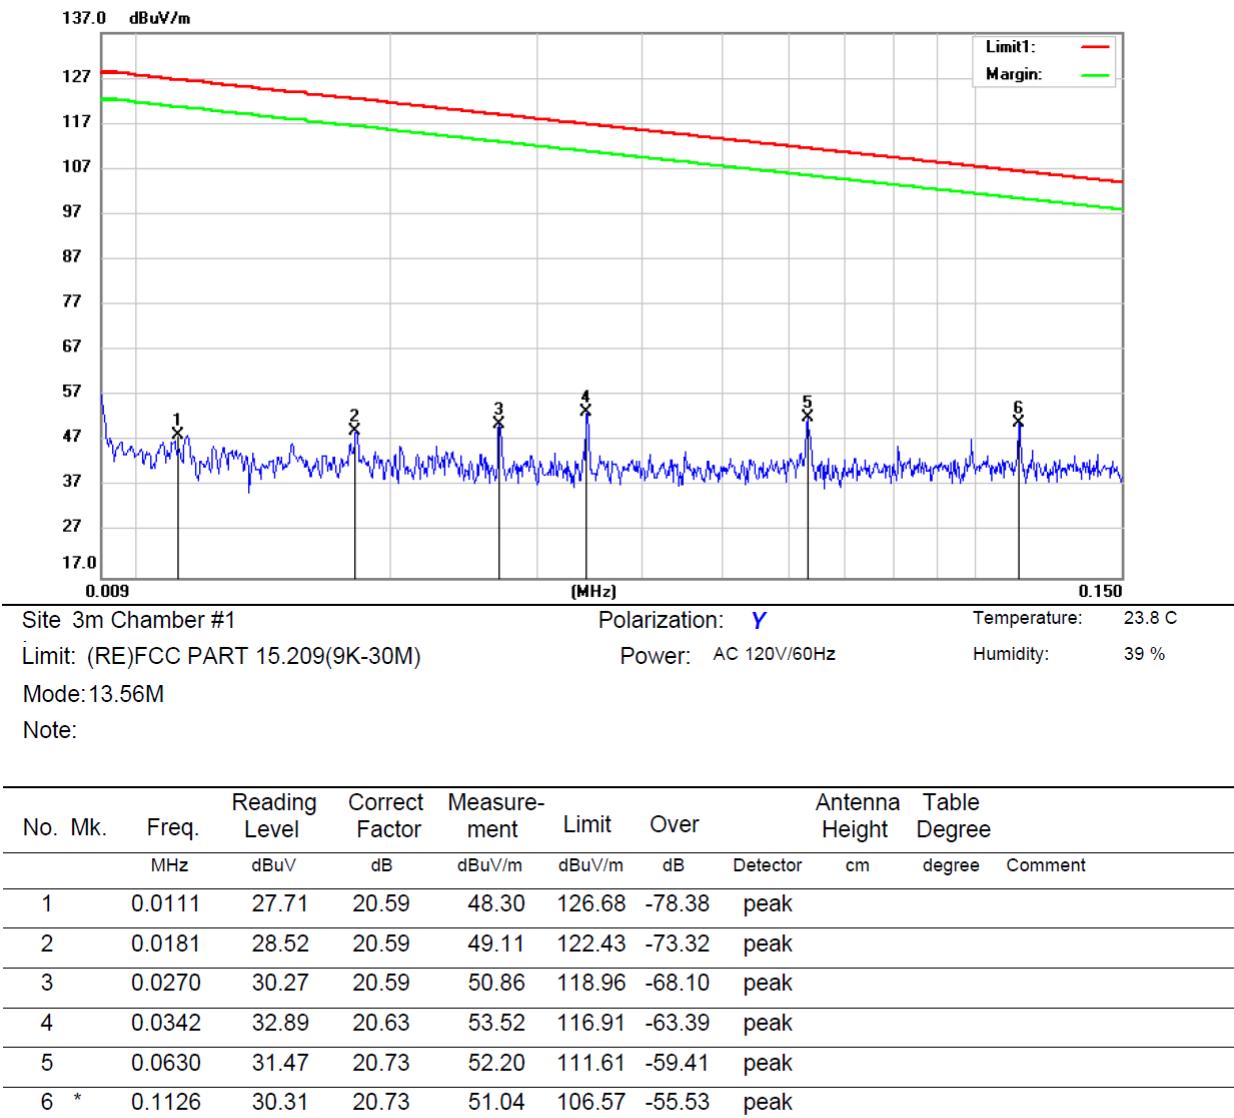

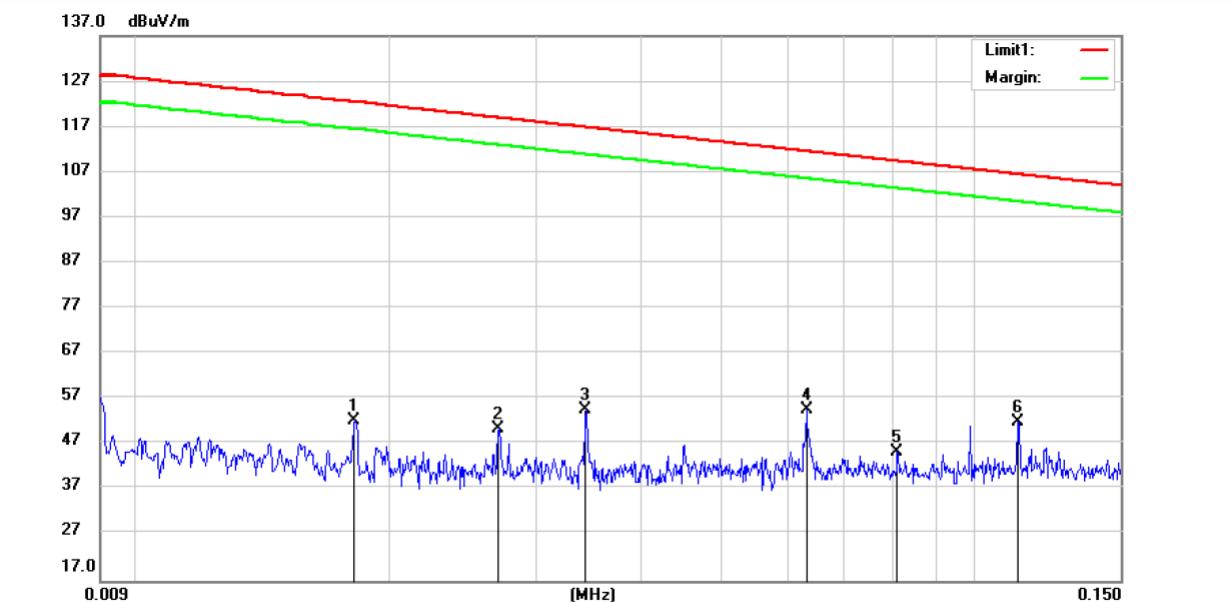

Site 3m Chamber #1

Polarization: Z

Temperature: 23.8 C

Limit: (RE)FCC PART 15.209(9K-30M)

Power: AC 120V/60Hz

Humidity: 39 %


Mode: 13.56M

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		0.0181	31.76	20.59	52.35	122.43	-70.08	peak		
2		0.0270	29.74	20.59	50.33	118.96	-68.63	peak		
3		0.0342	34.04	20.63	54.67	116.91	-62.24	peak		
4		0.0630	33.91	20.73	54.64	111.61	-56.97	peak		
5		0.0810	24.75	20.69	45.44	109.43	-63.99	peak		
6	*	0.1126	31.11	20.73	51.84	106.57	-54.73	peak		

■ Spurious Emission below 30MHz (150KHz to 30MHz)

All mode have been tested, and the worst result was report as below:

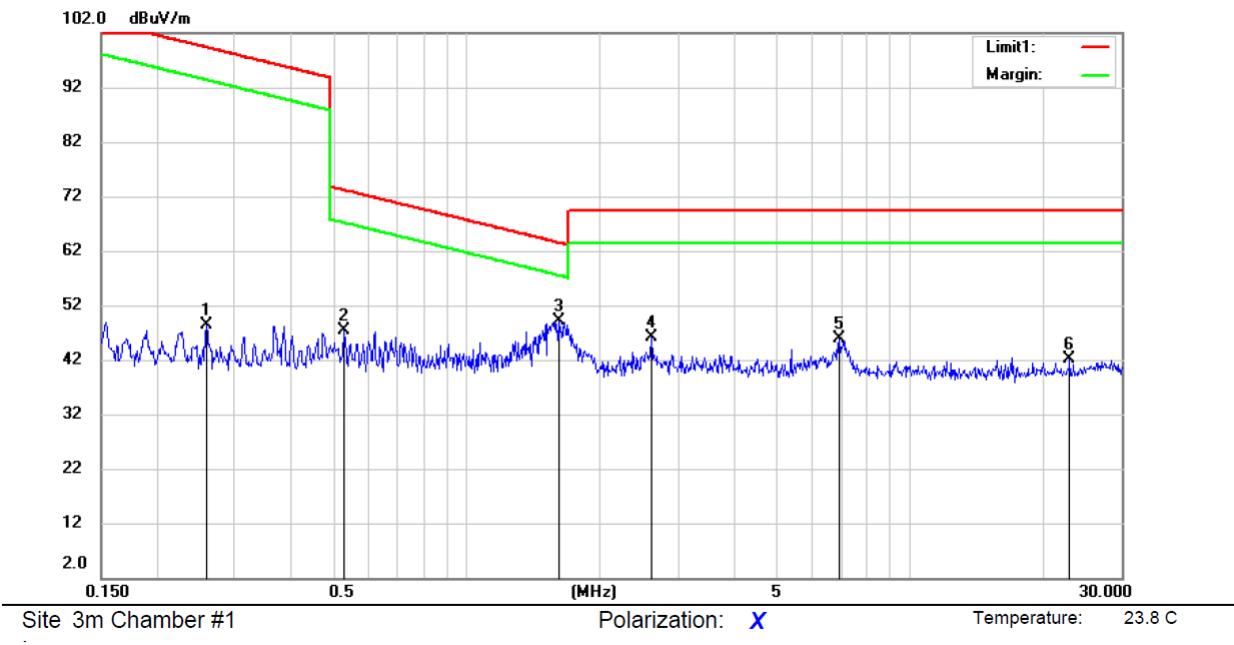

Site 3m Chamber #1

Polarization: X

Temperature: 23.8 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: AC 120V/60Hz

Humidity: 39 %


Mode: 13.56M

Note:

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Freq.	Level	Factor						
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	0.2586	27.89	20.51	48.40	99.35	-50.95	peak			
2	0.5292	26.40	21.01	47.41	73.13	-25.72	peak			
3 *	1.6104	28.28	20.96	49.24	63.49	-14.25	peak			
4	2.6082	25.40	20.72	46.12	69.50	-23.38	peak			
5	6.9141	25.42	20.58	46.00	69.50	-23.50	peak			
6	22.8963	21.75	20.31	42.06	69.50	-27.44	peak			

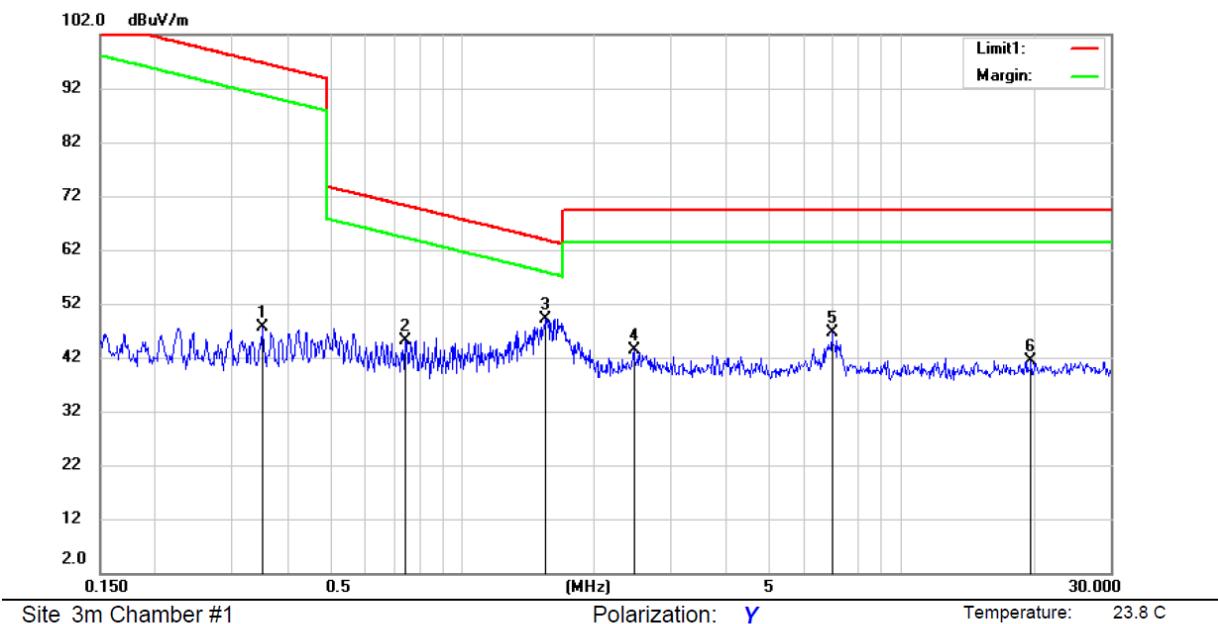

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Height	Degree
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		0.3501	26.98	20.69	47.67	96.72	-49.05	peak			
2		0.7430	24.13	21.05	45.18	70.19	-25.01	peak			
3	*	1.5518	28.25	20.97	49.22	63.82	-14.60	peak			
4		2.4605	22.55	20.75	43.30	69.50	-26.20	peak			
5		6.9508	25.96	20.58	46.54	69.50	-22.96	peak			
6		19.7394	21.02	20.27	41.29	69.50	-28.21	peak			

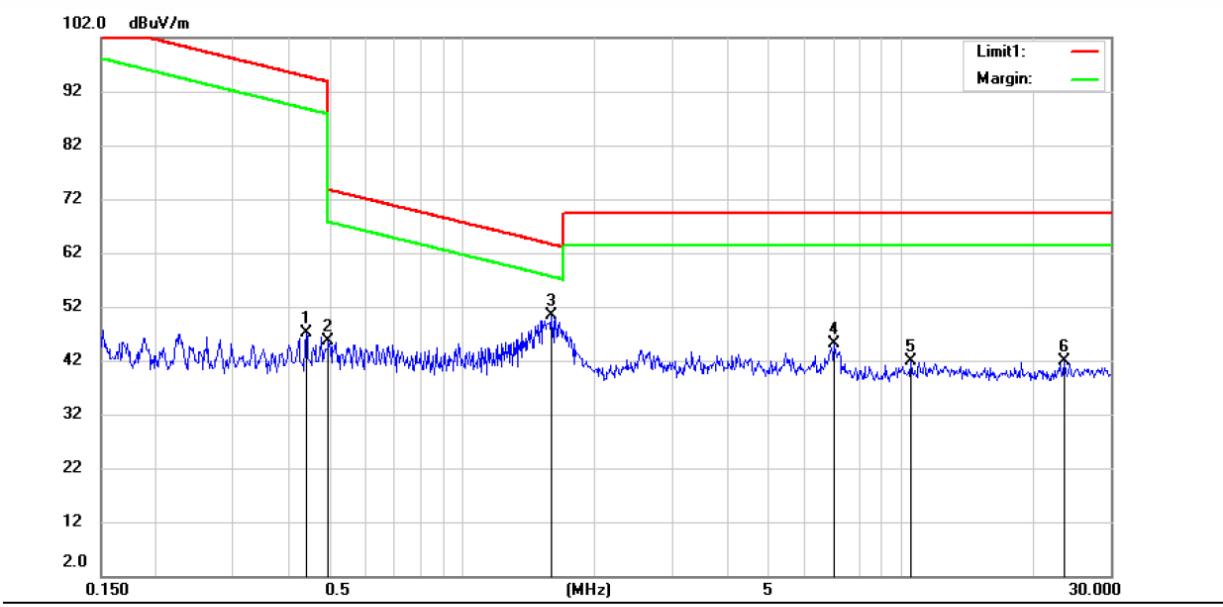

Site 3m Chamber #1

Polarization: Z

Temperature: 23.8 C

Limit: (RE)FCC PART 15.209(9K-30M)

Power: AC 120V/60Hz


Humidity: 39 %

Mode: 13.56M

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		0.4395	26.20	20.88	47.08	94.74	-47.66	peak		
2		0.4940	24.61	20.99	45.60	73.73	-28.13	peak		
3 *		1.5932	29.46	20.96	50.42	63.59	-13.17	peak		
4		7.0247	24.62	20.58	45.20	69.50	-24.30	peak		
5		10.5080	21.31	20.49	41.80	69.50	-27.70	peak		
6		23.5110	21.61	20.36	41.97	69.50	-27.53	peak		


■ Spurious Emission Above 30MHz (30MHz to 1GHz)

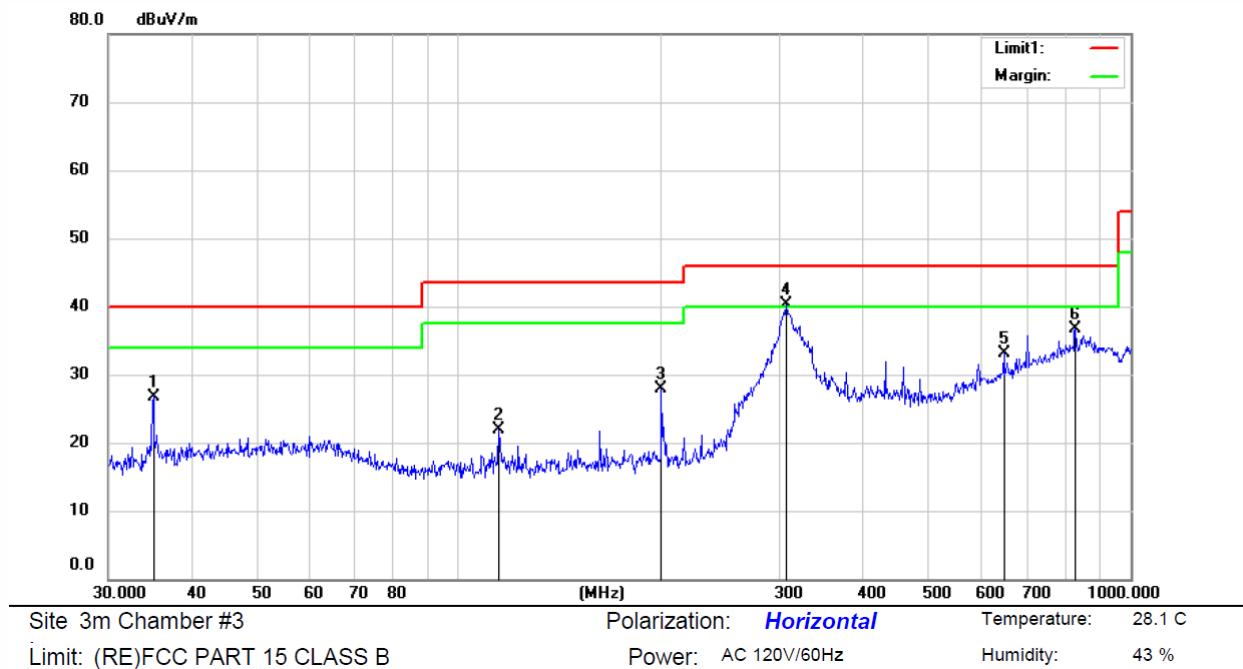

Mode: 13.56M

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		35.0510	35.98	-9.18	26.80	40.00	-13.20	QP			
2		114.8665	31.80	-9.84	21.96	43.50	-21.54	QP			
3		200.0732	37.36	-9.39	27.97	43.50	-15.53	QP			
4	*	307.0227	45.51	-5.22	40.29	46.00	-5.71	QP			
5		648.2374	31.28	1.84	33.12	46.00	-12.88	QP			
6		828.5823	30.39	6.29	36.68	46.00	-9.32	QP			

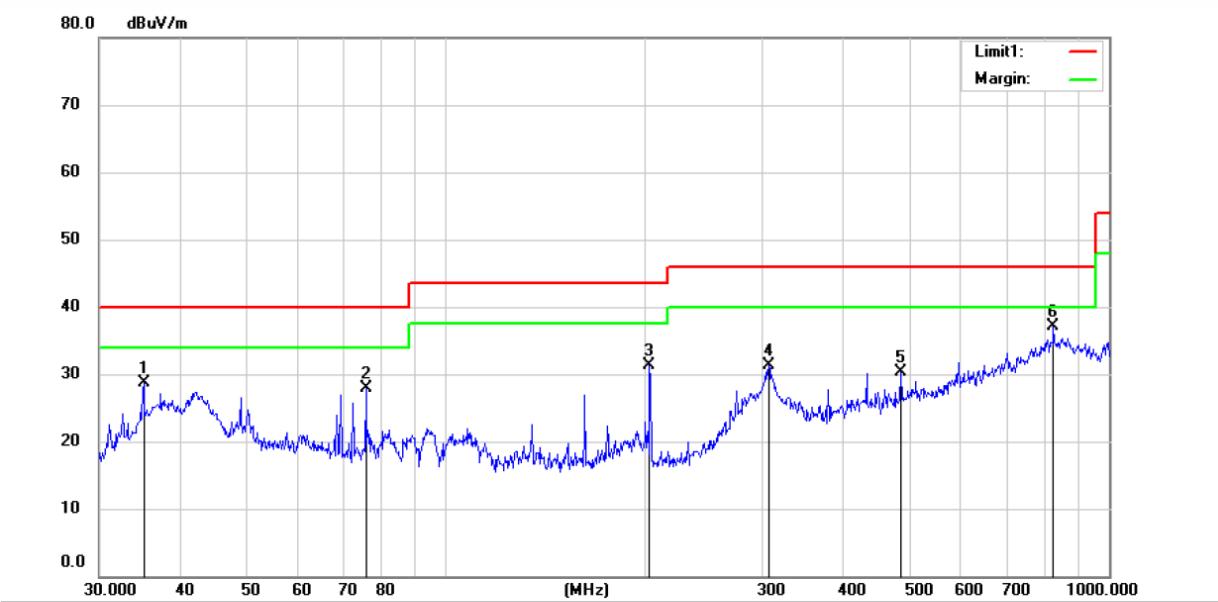

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 28.1 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 43 %

Mode: 13.56M

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height		Table Degree						
								MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		35.0355	37.96	-9.19	28.77	40.00	-11.23	QP								
2		75.8775	37.76	-9.81	27.95	40.00	-12.05	QP								
3		203.4336	40.78	-9.44	31.34	43.50	-12.16	QP								
4		307.2920	36.59	-5.24	31.35	46.00	-14.65	QP								
5		486.2483	31.88	-1.67	30.21	46.00	-15.79	QP								
6	*	826.0440	30.86	6.15	37.01	46.00	-8.99	QP								

7.4 CONDUCTED EMISSION TEST

7.4.1 Applicable Standard

According to FCC Part 15.207(a)

7.4.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.4.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


7.4.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

7.4.5 Test Results

Pass

AC 120V &240V voltage have been tested, and the worst result recorded was report as below:

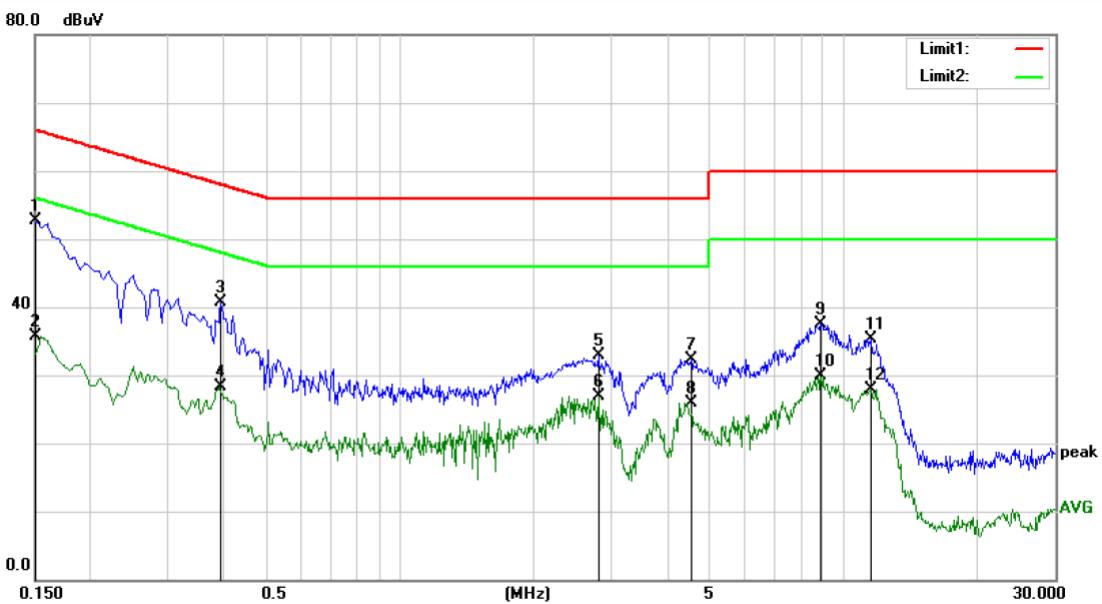

Site Conduction #1

 Phase: **L1**

Temperature: 21.9

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 58 %

Mode: NFC Mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1	*	0.1500	43.23	9.53	52.76	66.00	-13.24	QP	
2		0.1500	26.14	9.53	35.67	56.00	-20.33	AVG	
3		0.3950	31.21	9.54	40.75	57.96	-17.21	QP	
4		0.3950	18.72	9.54	28.26	47.96	-19.70	AVG	
5		2.8000	23.30	9.56	32.86	56.00	-23.14	QP	
6		2.8000	17.43	9.56	26.99	46.00	-19.01	AVG	
7		4.5450	22.82	9.57	32.39	56.00	-23.61	QP	
8		4.5450	16.29	9.57	25.86	46.00	-20.14	AVG	
9		8.8800	27.93	9.67	37.60	60.00	-22.40	QP	
10		8.8800	20.19	9.67	29.86	50.00	-20.14	AVG	
11		11.5300	25.63	9.74	35.37	60.00	-24.63	QP	
12		11.5300	18.24	9.74	27.98	50.00	-22.02	AVG	

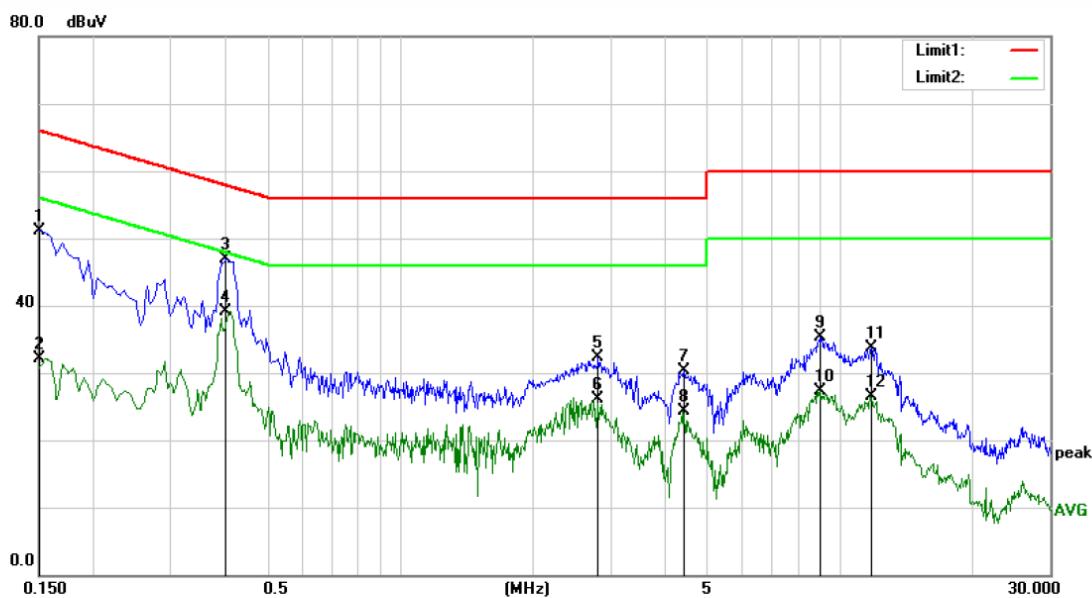

Site Conduction #1

 Phase: **N**

Temperature: 21.9

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 58 %

Mode: NFC Mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	41.62	9.53	51.15	66.00	-14.85	QP	
2		0.1500	22.63	9.53	32.16	56.00	-23.84	AVG	
3		0.4000	37.43	9.54	46.97	57.85	-10.88	QP	
4	*	0.4000	29.63	9.54	39.17	47.85	-8.68	AVG	
5		2.8150	22.80	9.56	32.36	56.00	-23.64	QP	
6		2.8150	16.60	9.56	26.16	46.00	-19.84	AVG	
7		4.4200	20.66	9.57	30.23	56.00	-25.77	QP	
8		4.4200	14.72	9.57	24.29	46.00	-21.71	AVG	
9		9.0050	25.57	9.67	35.24	60.00	-24.76	QP	
10		9.0050	17.69	9.67	27.36	50.00	-22.64	AVG	
11		11.7550	23.98	9.74	33.72	60.00	-26.28	QP	
12		11.7550	16.78	9.74	26.52	50.00	-23.48	AVG	

8 ANTENNA APPLICATION

8.1.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.1.2 Result

PASS.

Note: Antenna use a permanently attached antenna which is not replaceable.
 Not using a standard antenna jack or electrical connector for antenna replacement
 The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

----- END OF REPORT -----