

FCC TEST REPORT

for

KATSUYAMA CORPORATION

MID

Model Number: KULA10116

FCC ID:2AJ3J-KULA10116

Prepared for : KATSUYAMA CORPORATION
Address : 8C-02,6-9 KOYOCHONAKA, HIGASHINADA,
KOBE 658-0032 JAPAN

Prepared by : Guangdong Keyway Testing Technology Co., Ltd.
Address : Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China



Tel: 86-769-8718 2258
Fax: 86-769-8718 1058

Report No. : 16KWE104495F
Date of Test : Sep.28-Oct 17,2016
Date of Report : Oct.18, 2016

TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY.....	4
2. GENERAL PRODUCT INFORMATION	4
2.1. Product Function.....	4
2.2. Description of Device (EUT)	4
2.3. Independent Operation Modes.....	5
2.4. Test Supporting System	5
2.5. TEST SITES.....	5
2.6. List of Test and Measurement Instruments	6
3. TEST SET-UP AND OPERATION MODES.....	7
3.1. Principle of Configuration Selection.....	7
3.2. Block Diagram of Test Set-up.....	7
3.3. Test Operation Mode and Test Software.....	7
3.4. Special Accessories and Auxiliary Equipment.....	7
3.5. Countermeasures to Achieve EMC Compliance	7
4. EMISSION TEST RESULTS	8
4.1. Conducted Emission at the Mains Terminals Test.....	8
4.2. Radiated Emission Test.....	11
5. BAND EDGE COMPLIANCE TEST	25
5.1. Limits	25
5.2. Test setup	25
5.3. TEST Procedure	26
6. BANDWIDTH TEST	32
6.1. Limits	32
6.2. TEST PROCEDURE	32
7. OUTPUT POWER TEST	35
7.1. Limits	35
7.2. Test setup	35
7.3. Test result	35
8. POWER SPECTRAL DENSITY TEST.....	38
8.1. Limits	38
8.2. Test setup	38
8.3. Test result	38
9. ANTENNA REQUIREMENTS	45
9.1. Limits	45
9.2. Result	45
10. PHOTOGRAPHS OF TEST SET-UP	46
11. PHOTOGRAPHS OF THE EUT	48

Guangdong Keyway Testing Technology Co., Ltd.

Applicant:	KATSUYAMA CORPORATION		
Address:	8C-02,6-9 KOYUCHONAKA, HIGASHINADA, KOBE 658-0032 JAPAN		
Manufacturer:	SHENZHEN SAITU DIGITAL TECHNOLOGY CO.,LTD.		
Address:	GOTO Industry park, BuLan Road, Buji town, LongGang district, shenzhen, china		
E.U.T:	MID		
Model Number:	KULA10116		
Trade Name:	N/A	Serial No.:	-----
Date of Receipt:	Sep.27,2016	Date of Test:	Sep.28-Oct 17,2016
Test Specification:	FCC Part 15, Subpart 15.247: Oct. 1, 2015 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r05		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
	Issue Date: Oct. 18, 2016		
Tested by:	Reviewed by:	Approved by:	
 	 	 	
Keven Wu / Engineer	Mike Xu / Supervisor	Andy Gao / Supervisor	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Guangdong Keyway Testing Technology Co., Ltd.</i>			

1.TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a)/15.209/15.247(d)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Power density	15.247(e)	PASS
Maximum Peak Output Power	15.247(b)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	MID
Model:	KULA10116
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40))
Channel numbers:	11 for 802.11b/802.11g/802.11n(H20) ,7 for 802.11n(H40)
Modulation technology:	Direct Sequence Spread Spectrum (DSSS) for (IEEE 802.11b) Orthogonal Frequency Division Multiplexing(OFDM) for (IEEE 802.11g/802.11n)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	FPCB Antenna
Antenna gain:	2.41dBi
Battery	DC 3.7V

2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work WFI TX mode, and frequency as below:

Mode 1	802.11b	Frequency
		2412MHz
		2437MHz
		2462MHz
Mode 2	802.11g	2412MHz
		2437MHz
		2462MHz
Mode 3	802.11n(HT20)	2412MHz
		2437MHz
		2462MHz
Mode 4	802.11 n(HT40)	2422MHz
		2437MHz
		2452MHz
Mode 5	Normal Mode	

Remark: According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”
802.11b mode:1Mbps ,802.11g mode:6Mbps , 802.11n HT20 mode:MCS0, 802.11n HT20 mode:MCS0.

2.4. Test Supporting System

None.

2.5. TEST SITES

2.5.1. Test Facilities

Lab Qualifications : Certificated by Industry Canada
Registration No.: 9868A
Date of registration: December 8, 2011

Certificated by FCC, USA
Registration No.: 370994
Date of registration: February 21, 2012

Certificated by CNAS China
Registration No.: CNAS L5783
Date of registration: August 8, 2012

2.6. List of Test and Measurement Instruments

2.6.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,16	Apr. 09,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 09,16	Apr. 09,17
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 09,16	Apr. 09,17
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 09,16	Apr. 09,17

2.6.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,16	Apr. 09,17
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 09,16	Apr. 09,17
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 09,16	Apr. 09,17
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 09,16	Apr. 09,17
Signal Amplifier	SONOMA	310	187016	Apr. 09,16	Apr. 09,17
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 09,16	Apr. 09,17
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 09,16	Apr. 09,17
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 09,16	Apr. 09,17
High Pass filter	Micro	HPM50111	324216	Apr. 09,16	Apr. 09,17
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 09,16	Apr. 09,17
Attenuation	MCE	24-10-34	BN9258	Apr. 02,16	Apr. 02,17
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 02,16	Apr. 02,17
Power Meter	Anritsu	ML2495A	1204003	Apr. 24,16	Apr. 24,17
Power Sensor	Anritsu	MA2411B	1126150	Apr. 24,16	Apr. 24,17

3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: MID)

3.3. Test Operation Mode and Test Software

None.

3.4. Special Accessories and Auxiliary Equipment

Adapter:	Model: JHD-AP012J-050200AA INPUT:100-120V~60Hz 0.35A OUTPUT:5V,2A
----------	---

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test

4.1.1. Limit 15.209 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

4.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.


The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

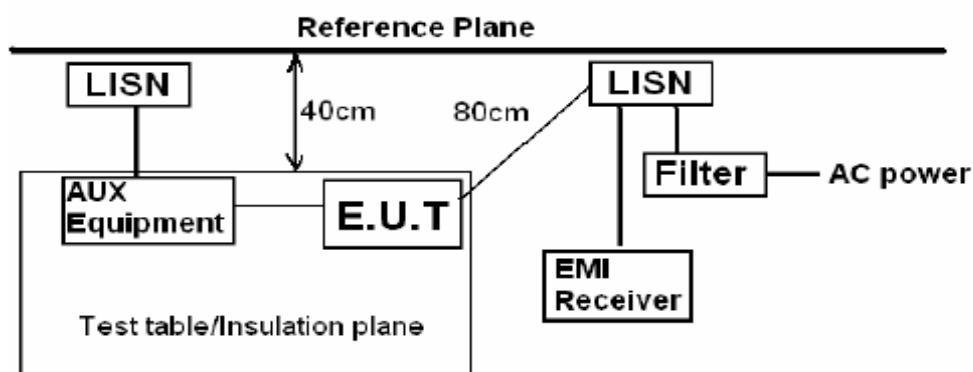


Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

EUT :	MID	Model Name :	KULA10116
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

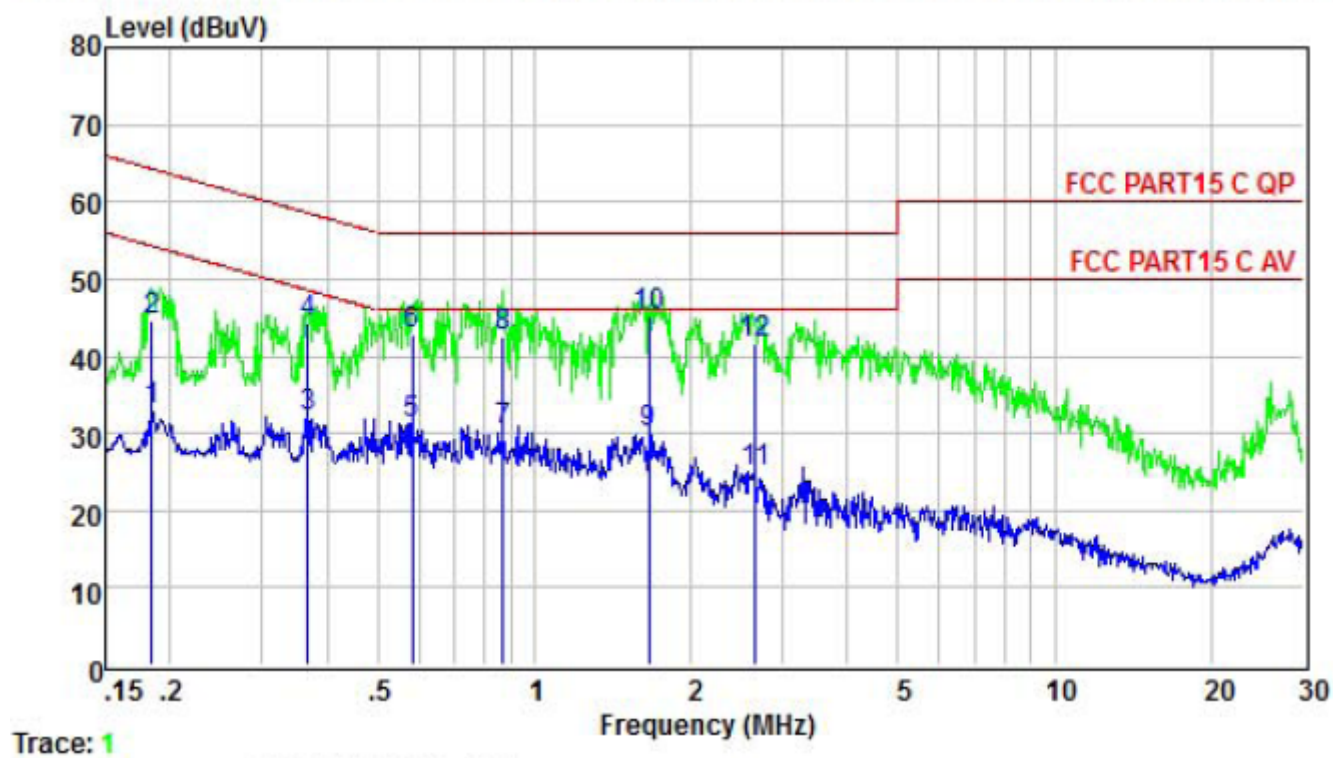

	Freq	Level	Limit	Over	
	MHz	dBuV	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	
1	0.184	32.98	54.28	-21.30	Average
2	0.184	44.58	64.28	-19.70	QP
3	0.367	32.09	48.56	-16.47	Average
4	0.367	44.26	58.56	-14.30	QP
5	0.582	31.29	46.00	-14.71	Average
6	0.582	42.69	56.00	-13.31	QP
7	0.871	30.34	46.00	-15.66	Average
8	0.871	42.57	56.00	-13.43	QP
9	1.662	29.89	46.00	-16.11	Average
10	1.662	45.26	56.00	-10.74	QP
11	2.664	24.99	46.00	-21.01	Average
12	2.664	41.56	56.00	-14.44	QP

EUT :	MID	Model Name :	KULA10116
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

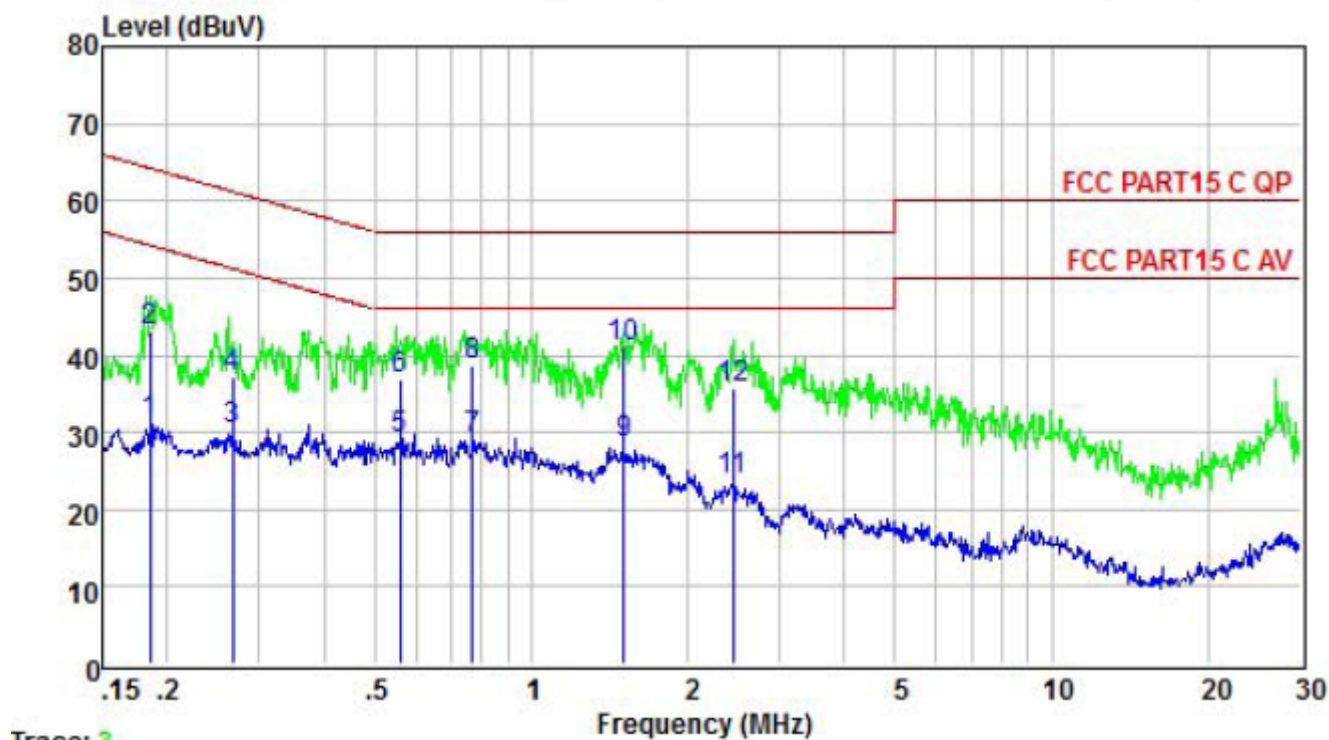

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.185	31.18	54.24	-23.06	Average
2	0.185	43.07	64.24	-21.17	QP
3	0.267	30.20	51.20	-21.00	Average
4	0.267	37.12	61.20	-24.08	QP
5	0.561	29.24	46.00	-16.76	Average
6	0.561	36.85	56.00	-19.15	QP
7	0.771	29.02	46.00	-16.98	Average
8	0.771	38.52	56.00	-17.48	QP
9	1.503	28.48	46.00	-17.52	Average
10	1.503	41.16	56.00	-14.84	QP
11	2.435	23.76	46.00	-22.24	Average
12	2.435	35.74	56.00	-20.26	QP

4.2. Radiated Emission Test

4.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

4.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m (above 1GHz, the high was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.

2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.


3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.


5. For Both PK and AV value above 1GHz, PK detector is used.

6. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).


Radiated Emission Test-Up Frequency Below 30MHz

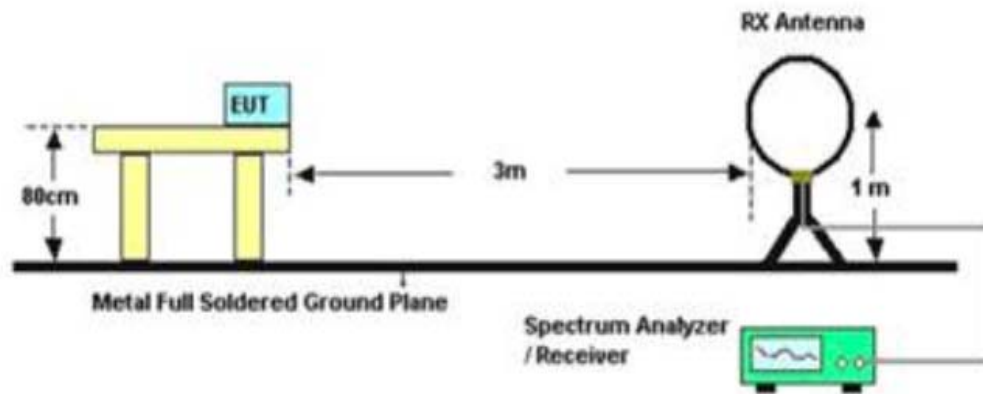

Below 1GHz

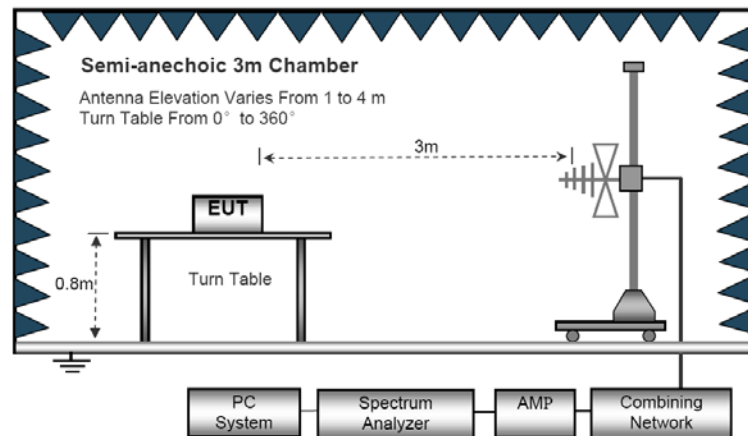

Above 1GHz

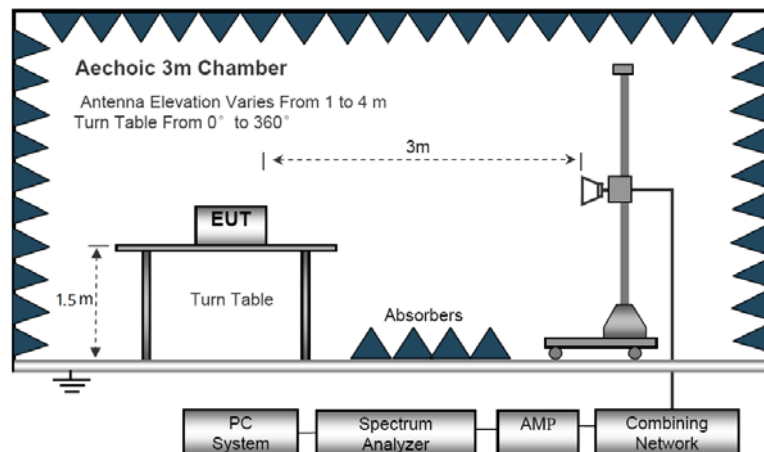

EUT :	MID	Model Name :	KULA10116
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 3.7V		

Below 30MHz

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

EUT :	MID	Model Name :	KULA10116
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 3.7V		


Below 1GHz

Vertical

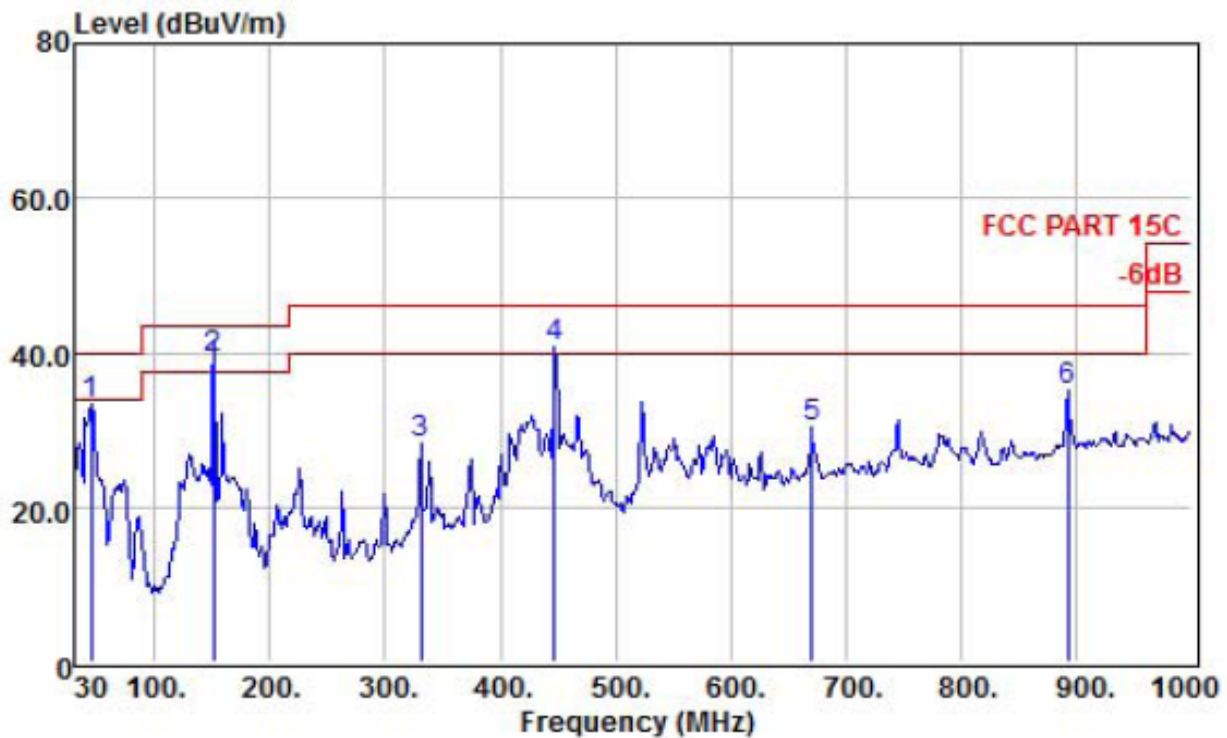

	Freq	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	44.55	53.24	31.40	11.03	0.56	33.43	40.00	-6.57	QP
2 !	151.25	60.32	31.25	9.02	1.22	39.31	43.50	-4.19	QP
3	330.70	42.33	30.78	14.73	2.02	28.30	46.00	-17.70	QP
4 !	447.10	51.18	30.61	17.54	2.62	40.73	46.00	-5.27	QP
5	670.20	35.51	30.79	21.88	3.69	30.29	46.00	-15.71	QP
6	893.30	36.63	30.10	23.87	4.84	35.24	46.00	-10.76	QP

Horizontal

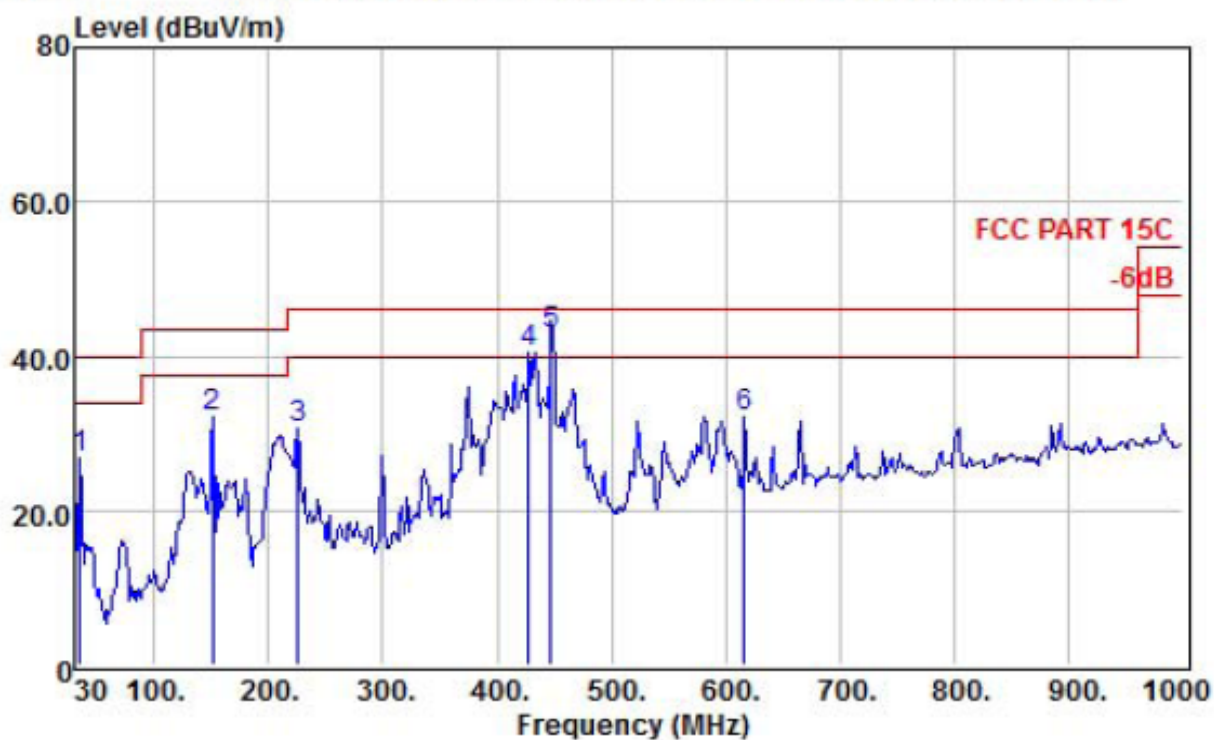

	Freq	Read Level	Preamplifier Factor	Antenna Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	34.85	41.54	31.38	15.94	0.56	26.66	40.00	-13.34	QP
2	151.25	53.16	31.25	9.02	1.22	32.15	43.50	-11.35	QP
3	225.94	47.89	30.94	12.23	1.53	30.71	46.00	-15.29	QP
4 !	427.70	51.36	30.63	17.15	2.55	40.43	46.00	-5.57	QP
5 !	447.10	53.20	30.61	17.54	2.62	42.75	46.00	-3.25	QP
6	616.85	38.20	30.64	21.07	3.38	32.01	46.00	-13.99	QP

NOTE:


Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,

Over Limit= Absolute Level – Limit

Above 1GHz


EUT :	MID	Model Name :	KULA10116
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2412
Test Voltage :	DC 3.7V		

Vertical

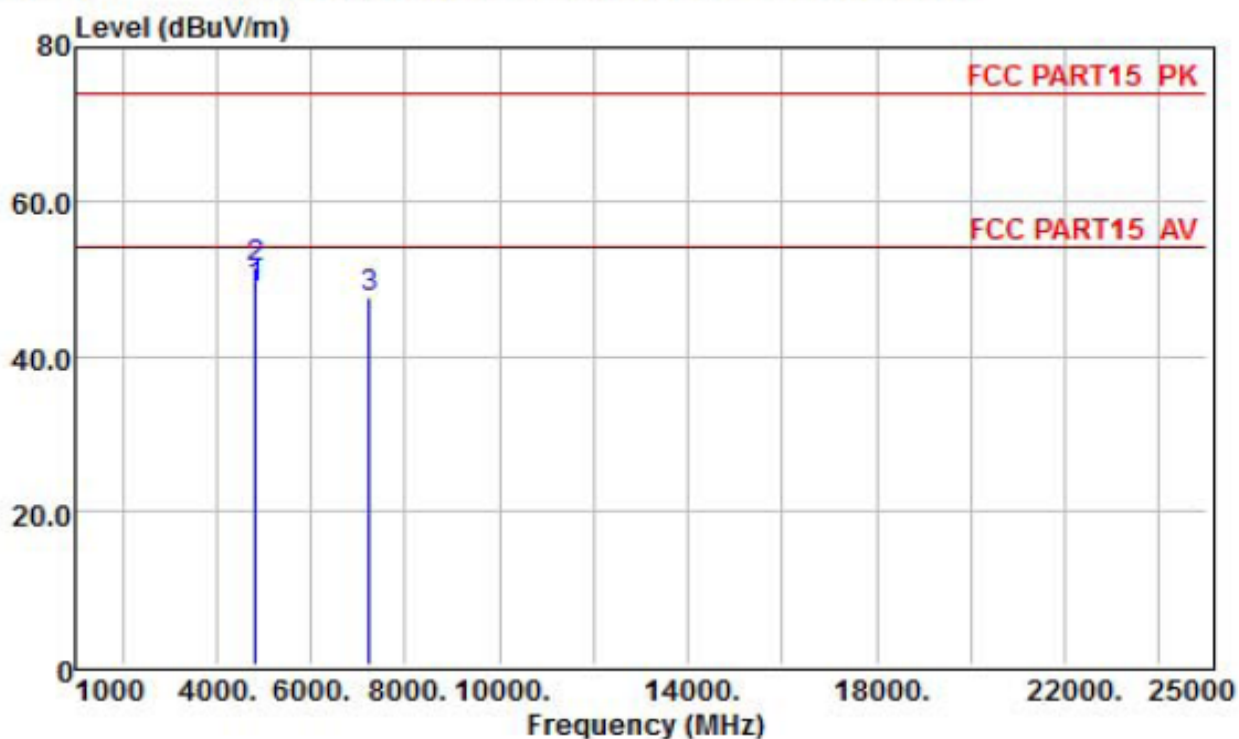

	Freq	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4824.00	32.17	27.50	31.99	12.01	48.67	54.00	-5.33	Average
2	4824.00	34.89	27.50	31.99	12.01	51.39	74.00	-22.61	Peak
3	7236.00	33.72	27.95	25.30	16.61	47.68	74.00	-26.32	Peak


Horizontal

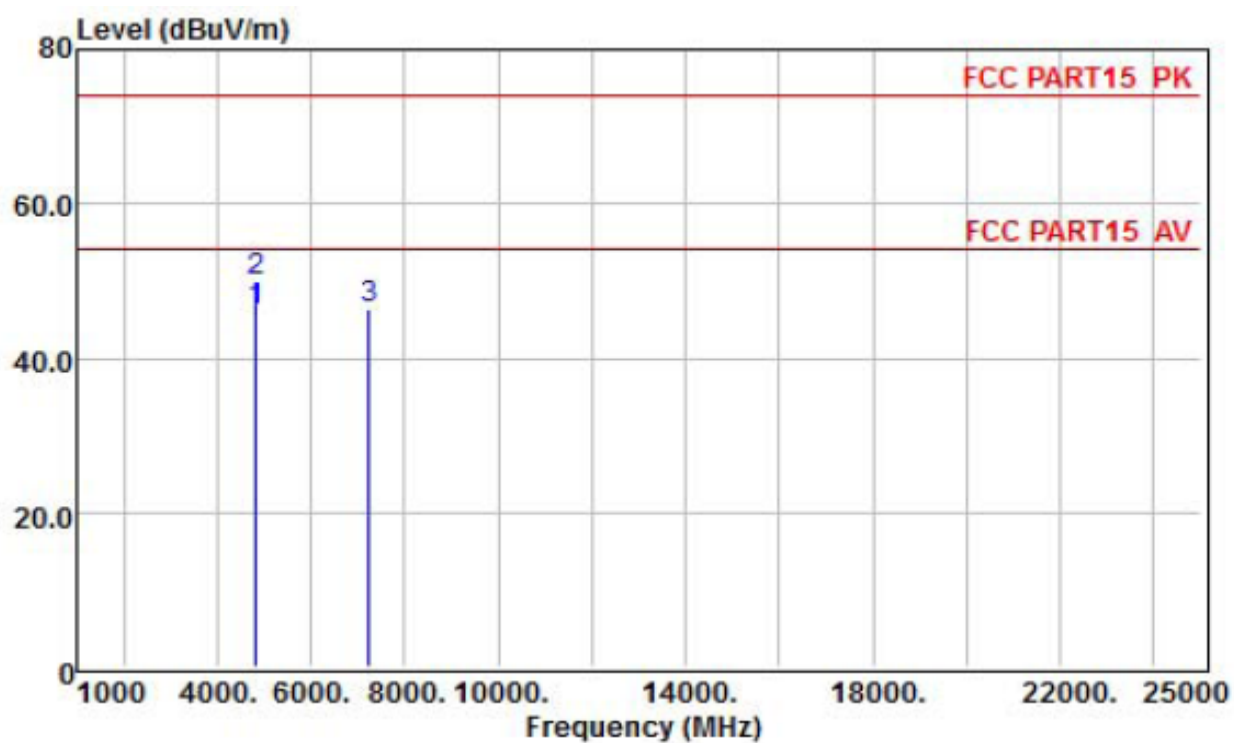

	Freq	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4824.00	29.53	27.50	31.99	12.01	46.03	54.00	-7.97	Average
2	4824.00	33.35	27.50	31.99	12.01	49.85	74.00	-24.15	Peak
3	7236.00	32.38	27.95	25.30	16.61	46.34	74.00	-27.66	Peak


EUT :	MID	Model Name :	KULA10116
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2437
Test Voltage :	DC 3.7V		

Vertical

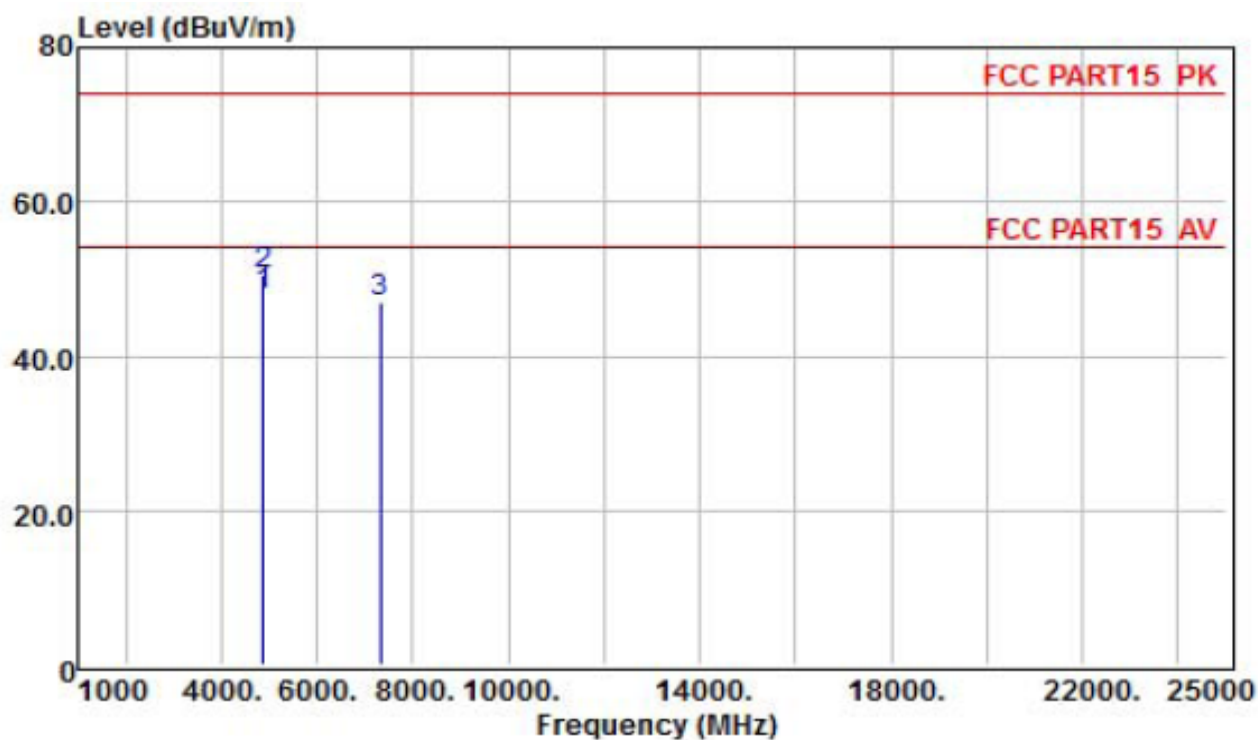

	Freq	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dB/m	dB	dBuV/m	dBuV/m	dB	
1	4874.00	31.11	27.53	32.11	12.14	47.83	54.00	-6.17	Average
2	4874.00	33.92	27.53	32.11	12.14	50.64	74.00	-23.36	Peak
3	7311.00	34.15	27.96	24.32	16.62	47.13	74.00	-26.87	Peak


Horizontal

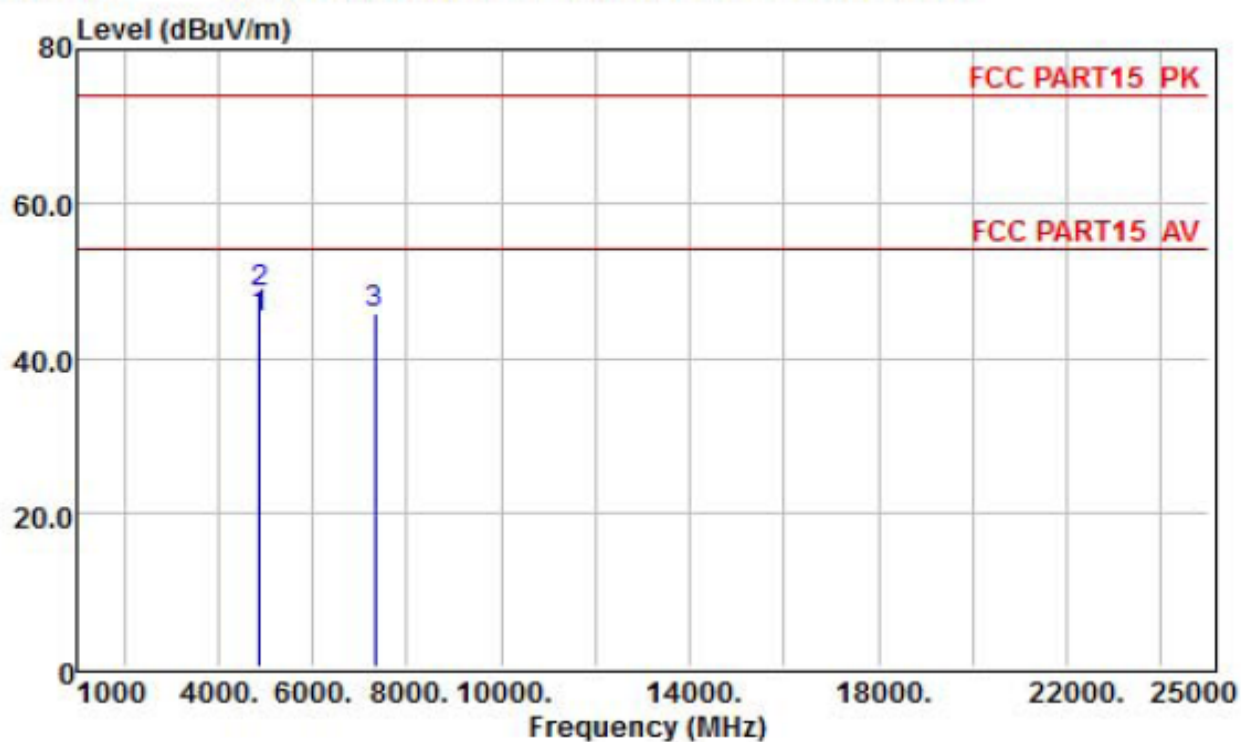

	Freq	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4874.00	28.52	27.53	32.11	12.14	45.24	54.00	-8.76	Average
2	4874.00	31.84	27.53	32.11	12.14	48.56	74.00	-25.44	Peak
3	7311.00	32.75	27.96	24.32	16.62	45.73	74.00	-28.27	Peak


EUT :	MID	Model Name :	KULA10116
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2462
Test Voltage :	DC 3.7V		

Vertical

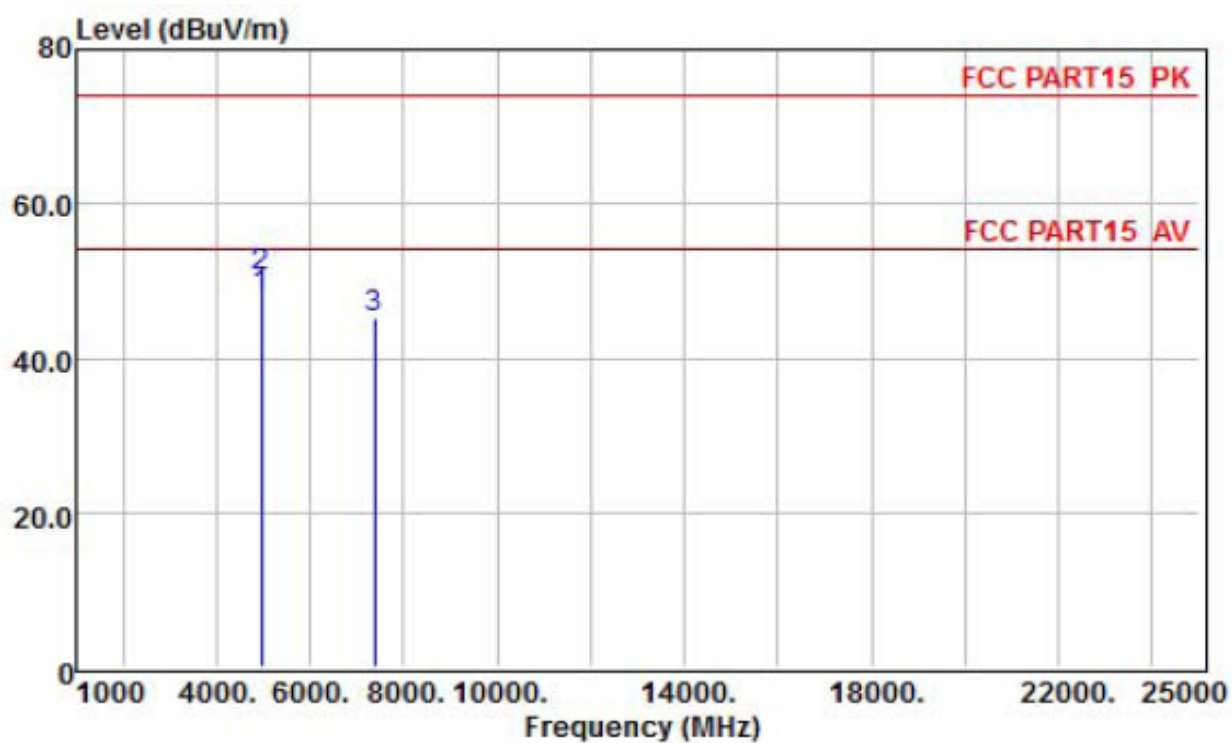

	Freq	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4962.00	31.68	27.58	31.32	12.36	47.78	54.00	-6.22	Average
2	4962.00	34.38	27.58	31.32	12.36	50.48	74.00	-23.52	Peak
3	7386.00	32.25	27.98	24.36	16.62	45.25	74.00	-28.75	Peak

Horizontal

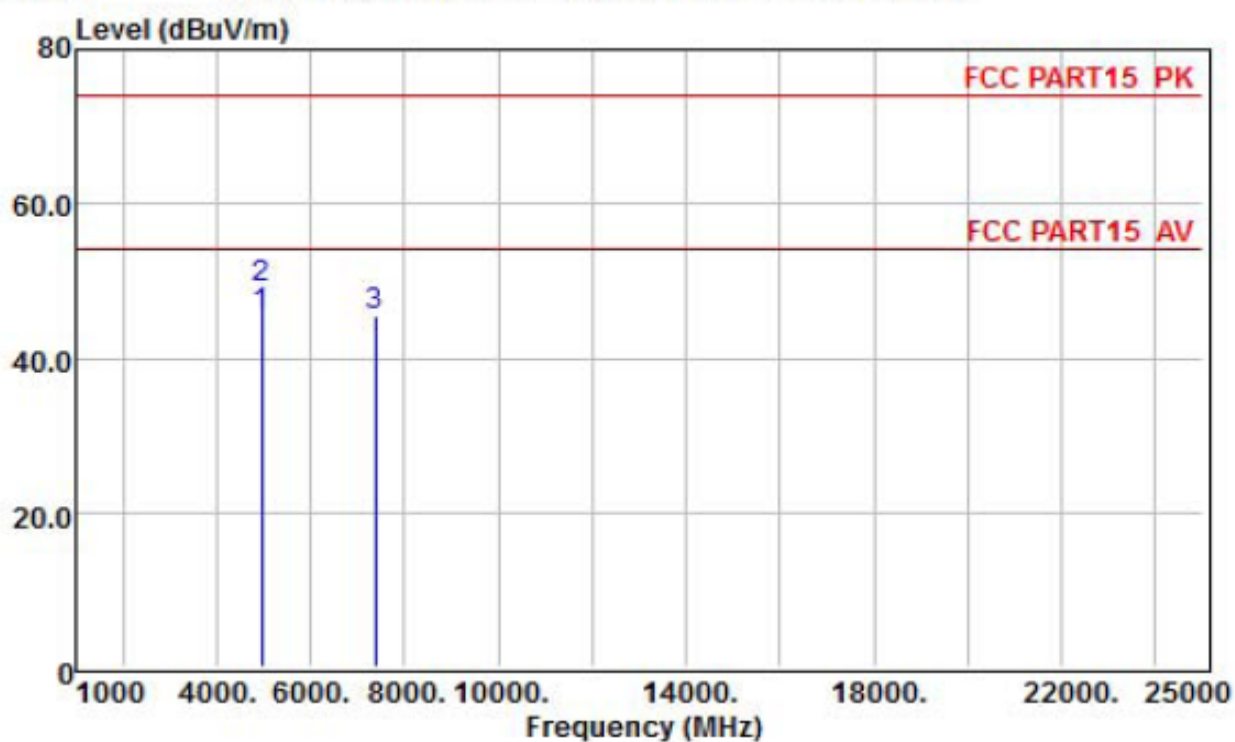

	Freq	Read Level	Preamp Factor	Antenna Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	4962.00	29.46	27.58	31.32	12.36	45.56	54.00	-8.44	Average
2	4962.00	33.08	27.58	31.32	12.36	49.18	74.00	-24.82	Peak
3	7386.00	32.49	27.98	24.36	16.62	45.49	74.00	-28.51	Peak

Note: "802.11b" mode is the worst mode. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported

Spurious Emission in Band Edge:

Frequency	Meter Reading	antenna Factor	cable loss	preamp factor	Emission Level	Limits	Margin	Detector Type	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
802.11b									
2390	34.68	30.44	8.94	26.32	47.74	74	-26.26	peak	Vertical
2390	32.98	30.44	8.94	26.32	46.04	74	-27.96	peak	Horizontal
2483.5	35.69	30.05	9.07	26.34	48.47	74	-25.53	peak	Vertical
2483.5	33.53	30.05	9.07	26.34	46.31	74	-27.69	peak	Horizontal
802.11g									
2390	37.68	30.44	8.94	26.32	50.74	74	-23.26	peak	Vertical
2390	35.98	30.44	8.94	26.32	49.04	74	-24.96	peak	Horizontal
2483.5	37.69	30.05	9.07	26.34	50.47	74	-23.53	peak	Vertical
2483.5	38.53	30.05	9.07	26.34	51.31	74	-22.69	peak	Horizontal
802.11n(HT20)									
2390	36.14	30.44	8.94	26.32	49.2	74	-24.8	peak	Vertical
2390	34.26	30.44	8.94	26.32	47.32	74	-26.68	peak	Horizontal
2483.5	38.84	30.05	9.07	26.34	51.62	74	-22.38	peak	Vertical
2483.5	36.17	30.05	9.07	26.34	48.95	74	-25.05	peak	Horizontal
802.11n(HT40)									
2390	37.25	30.44	8.94	26.32	50.31	74	-23.69	peak	Vertical
2390	35.57	30.44	8.94	26.32	48.63	74	-25.37	peak	Horizontal
2483.5	38.66	30.05	9.07	26.34	51.44	74	-22.56	peak	Vertical
2483.5	35.84	30.05	9.07	26.34	48.62	74	-25.38	peak	Horizontal

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Spurious Emission in Restricted Band (1-25G) :

All the modulation modes have been tested and all other emissions more than 20dB below the limit, the worst result was report as below:

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	antenna Factor (dB)	cable loss (dB)	preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
802.11b									
Vertical	3226.000	32.56	30.26	9.96	26.63	46.15	74	-27.85	Pk
Horizontal	3226.000	32.43	30.26	9.96	26.63	46.02	74	-27.98	PK
Vertical	3286.000	32.82	30.33	9.96	26.66	46.45	74	-27.55	Pk
Horizontal	3286.000	31.34	30.33	9.96	26.66	44.97	74	-29.03	PK
Vertical	4250.000	33.22	31.64	10.61	27.06	48.41	74	-25.59	Pk
Horizontal	4250.000	32.75	31.64	10.61	27.06	47.94	74	-26.06	PK
Vertical	12150.000	32.36	26.64	17.32	28.98	47.34	74	-26.66	Pk
Horizontal	12150.000	32.94	26.64	17.32	28.98	47.92	74	-26.08	PK
Vertical	17453.000	30.48	26.27	22.01	30.39	48.37	74	-25.63	Pk
Horizontal	17453.000	31.52	26.27	22.01	30.39	49.41	74	-24.59	PK
802.11g									
Vertical	3226.000	31.78	30.26	9.96	26.63	45.37	74	-28.63	Pk
Horizontal	3226.000	32.56	30.26	9.96	26.63	46.15	74	-27.85	PK
Vertical	3286.000	32.39	30.33	9.96	26.66	46.02	74	-27.98	Pk
Horizontal	3286.000	32.51	30.33	9.96	26.66	46.14	74	-27.86	PK
Vertical	4250.000	33.44	31.64	10.61	27.06	48.63	74	-25.37	Pk
Horizontal	4250.000	32.82	31.64	10.61	27.06	48.01	74	-25.99	PK
Vertical	12150.000	32.13	26.64	17.32	28.98	47.11	74	-26.89	Pk
Horizontal	12150.000	32.56	26.64	17.32	28.98	47.54	74	-26.46	PK
Vertical	17453.000	30.27	26.27	22.01	30.39	48.16	74	-25.84	Pk
Horizontal	17453.000	32.07	26.27	22.01	30.39	49.96	74	-24.04	PK
802.11n(20)									
Vertical	3226.000	31.46	30.26	9.96	26.63	45.05	74	-28.95	Pk
Horizontal	3226.000	30.86	30.26	9.96	26.63	44.45	74	-29.55	PK
Vertical	3286.000	31.25	30.33	9.96	26.66	44.88	74	-29.12	Pk
Horizontal	3286.000	31.19	30.33	9.96	26.66	44.82	74	-29.18	PK
Vertical	4250.000	32.64	31.64	10.61	27.06	47.83	74	-26.17	Pk
Horizontal	4250.000	30.48	31.64	10.61	27.06	45.67	74	-28.33	PK
Vertical	12150.000	31.38	26.64	17.32	28.98	46.36	74	-27.64	Pk
Horizontal	12150.000	31.47	26.64	17.32	28.98	46.45	74	-27.55	PK
Vertical	17453.000	29.35	26.27	22.01	30.39	47.24	74	-26.76	Pk
Horizontal	17453.000	29.16	26.27	22.01	30.39	47.05	74	-26.95	PK
802.11n(40)									
Vertical	3226.000	30.08	30.26	9.96	26.63	43.67	74	-30.33	Pk
Horizontal	3226.000	30.14	30.26	9.96	26.63	43.73	74	-30.27	PK
Vertical	3286.000	31.36	30.33	9.96	26.66	44.99	74	-29.01	Pk
Horizontal	3286.000	31.58	30.33	9.96	26.66	45.21	74	-28.79	PK
Vertical	4250.000	32.29	31.64	10.61	27.06	47.48	74	-26.52	Pk
Horizontal	4250.000	32.18	31.64	10.61	27.06	47.37	74	-26.63	PK
Vertical	12150.000	31.33	26.64	17.32	28.98	46.31	74	-27.69	Pk
Horizontal	12150.000	31.61	26.64	17.32	28.98	46.59	74	-27.41	PK
Vertical	17453.000	29.82	26.27	22.01	30.39	47.71	74	-26.29	Pk
Horizontal	17453.000	29.47	26.27	22.01	30.39	47.36	74	-26.64	PK


If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

5. BAND EDGE COMPLIANCE TEST

5.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see §15.205(c)).

5.2. Test setup

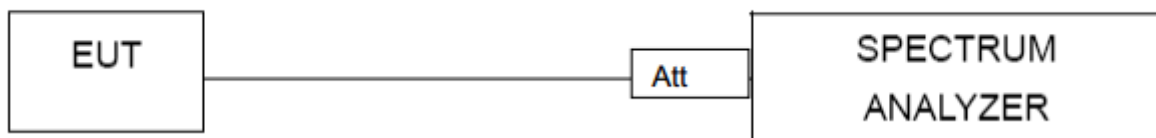


5.3. TEST Procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.


conduction band-edge

Frequency Band MHz	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
2400	41.89	20	Pass
2483.5	48.92	20	Pass
802.11g mode			
2400	32.22	20	Pass
2483.5	39.13	20	Pass
802.11n-HT20 mode			
2400	31.47	20	Pass
2483.5	35.32	20	Pass
802.11n-HT40 mode			
2400	36.28	20	Pass
2483.5	35.64	20	Pass


802.11b: Band Edge, Right Side

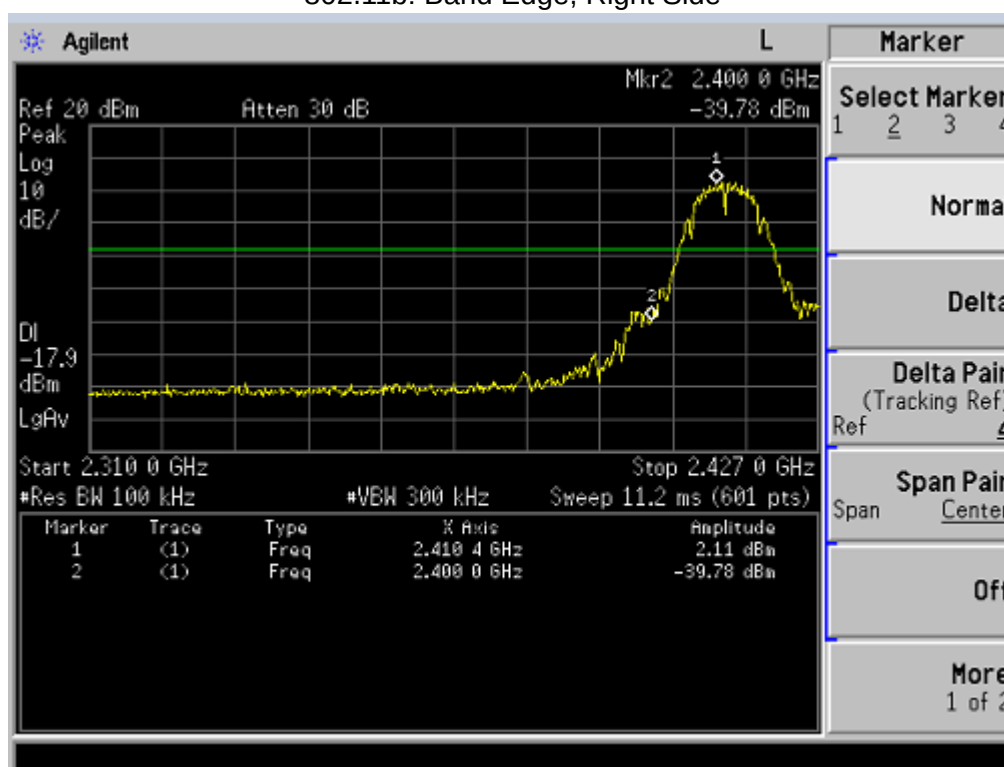


802.11b: Band Edge, Left Side

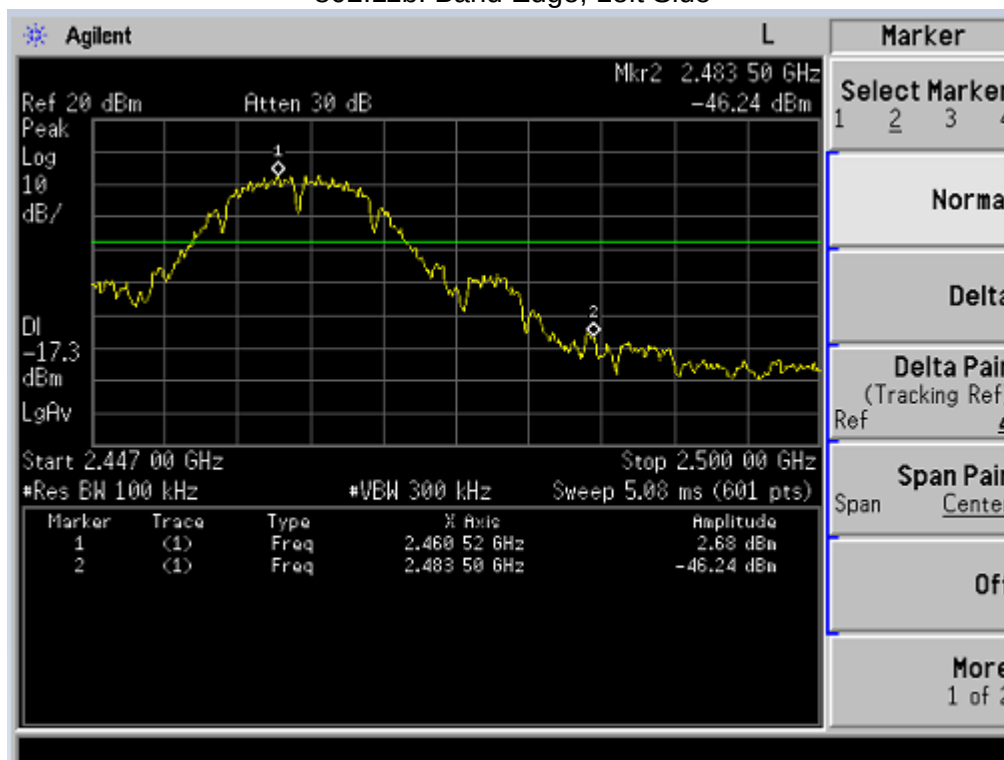


802.11g: Band Edge, Right Side

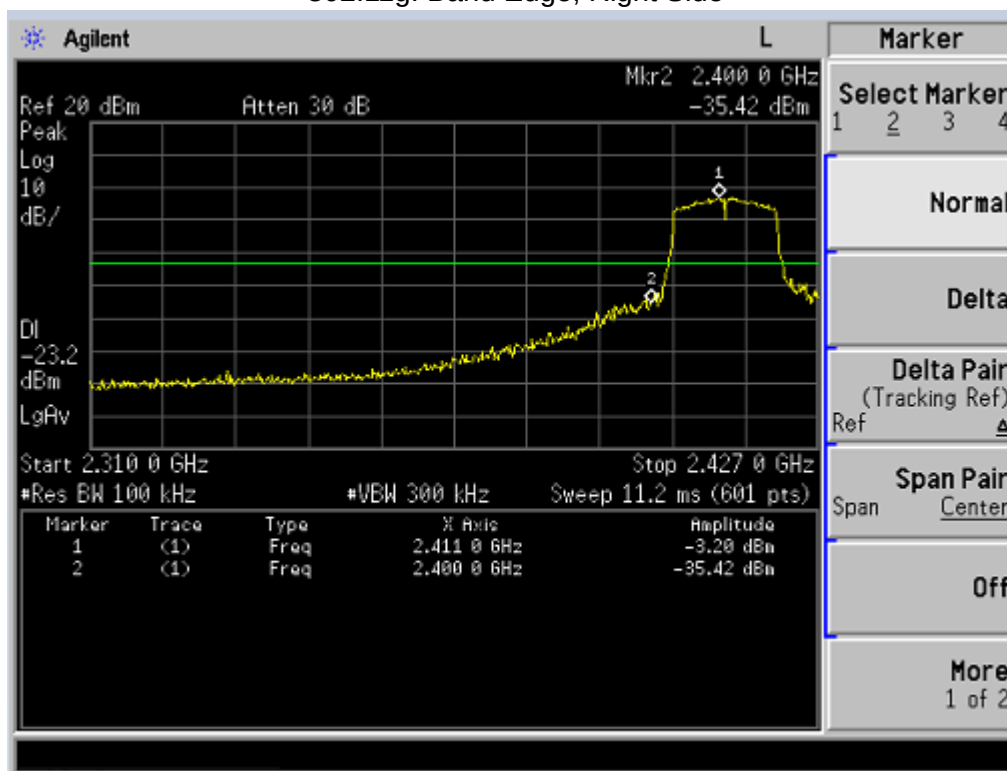


802.11g: Band Edge, Left Side

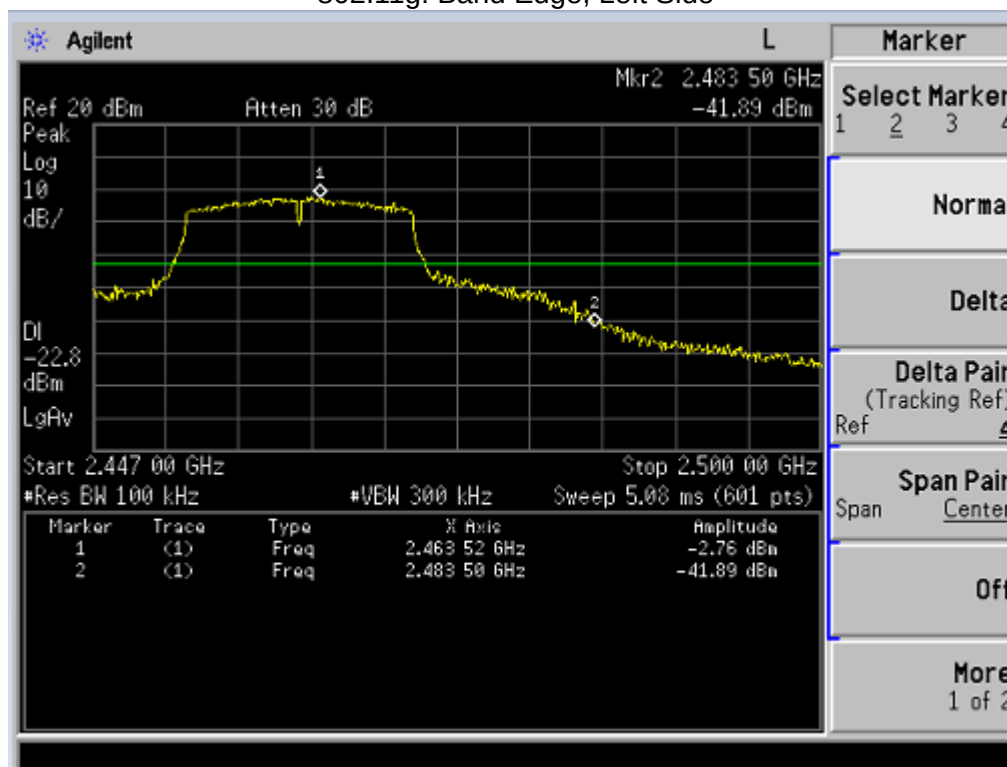


802.11n-HT20: Band Edge, Right Side

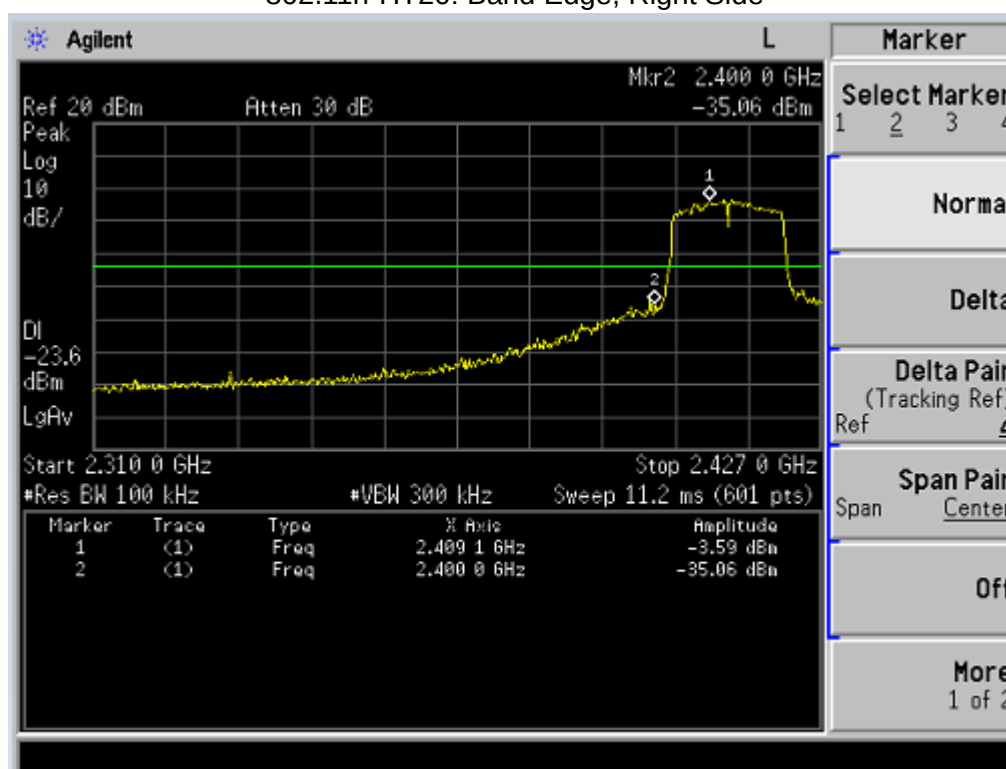


802.11n-HT20: Band Edge, Left Side

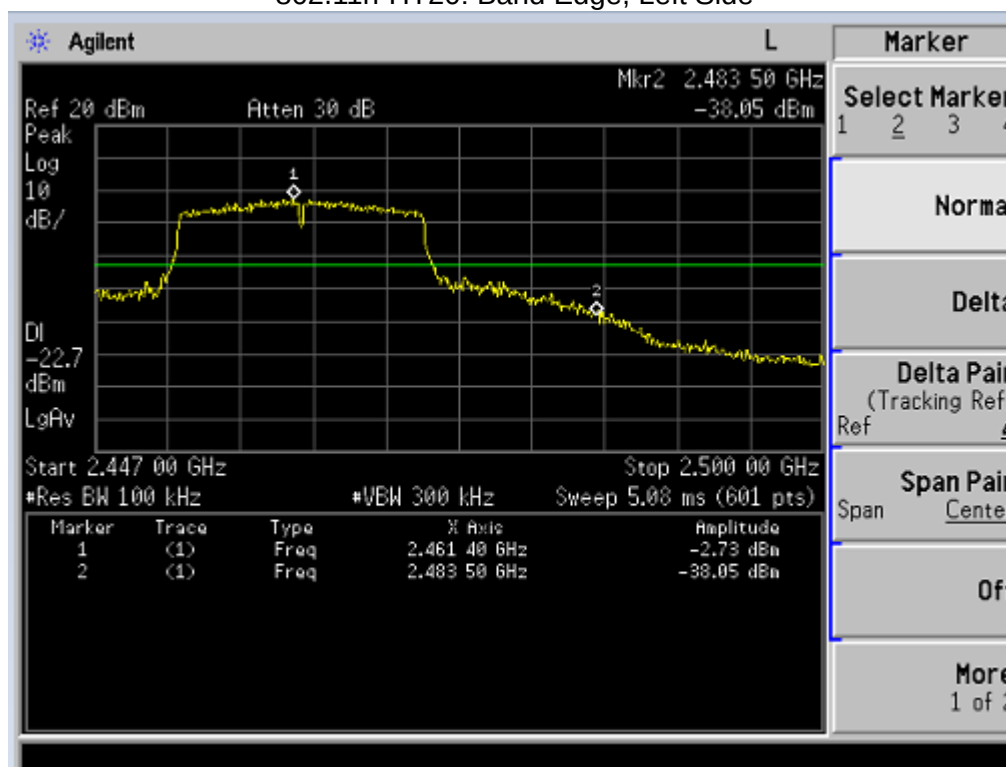

802.11n-HT40: Band Edge, Right Side

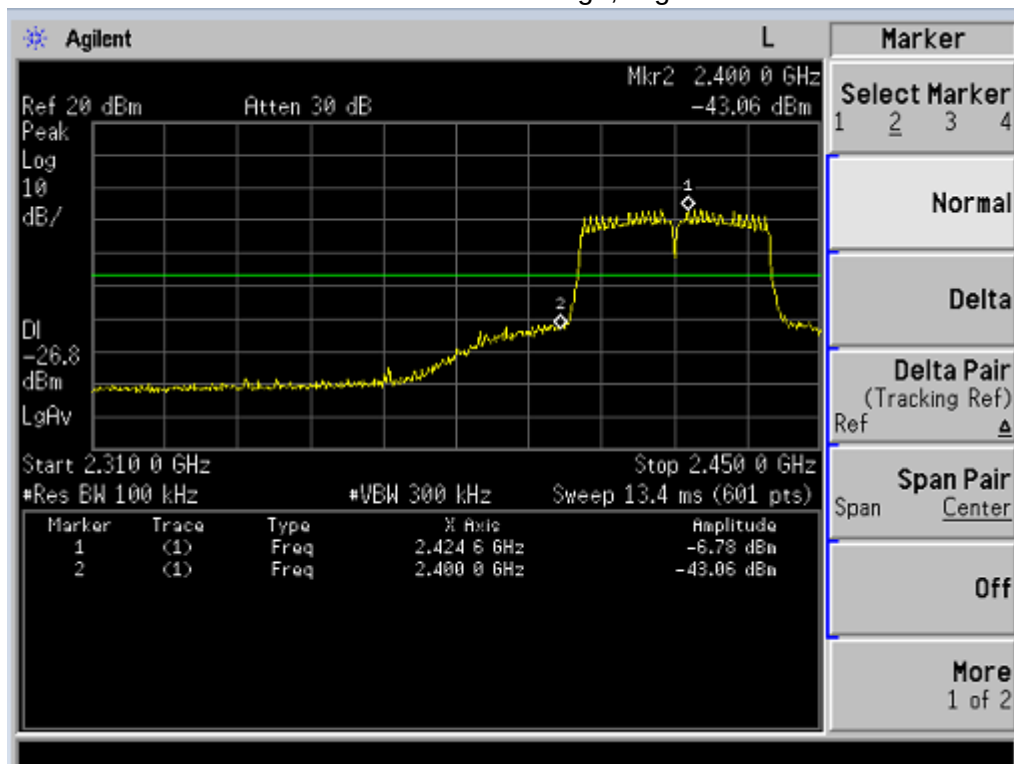

802.11n-HT40: Band Edge, Left Side

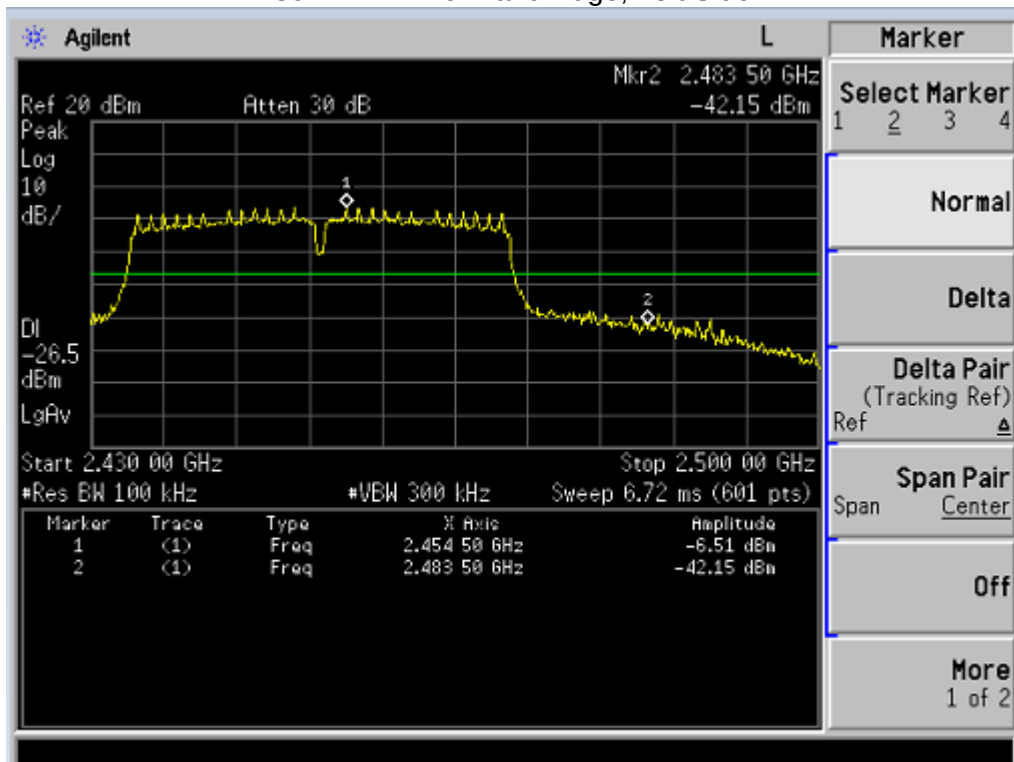

6. BANDWIDTH TEST

6.1. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

6.2. TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies Associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Test data:


	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	2412	9.187	>0.5	Pass
	2437	9.190	>0.5	Pass
	2462	9.692	>0.5	Pass
802.11g	2412	16.439	>0.5	Pass
	2437	16.440	>0.5	Pass
	2462	16.449	>0.5	Pass
802.11n (HT20)	2412	17.657	>0.5	Pass
	2437	17.640	>0.5	Pass
	2462	17.645	>0.5	Pass
802.11n (HT40)	2422	36.365	>0.5	Pass
	2437	36.367	>0.5	Pass
	2452	35.270	>0.5	Pass

Test plot as follows:
6dB bandwidth


802.11b 2412MHz

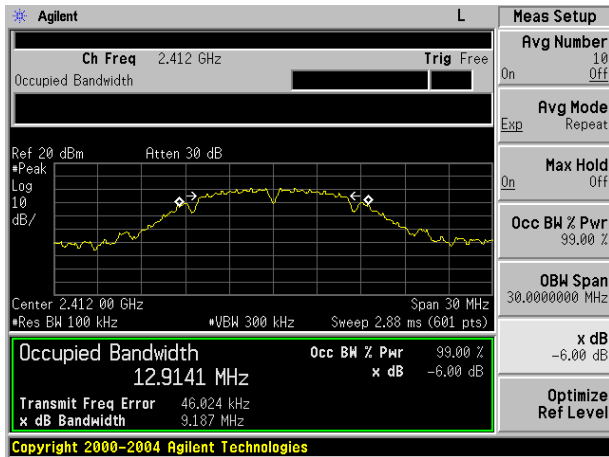


802.11g 2412MHz

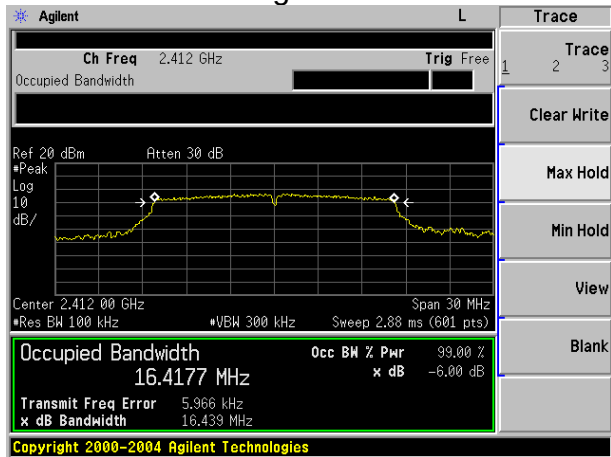


802.11b 2437MHz

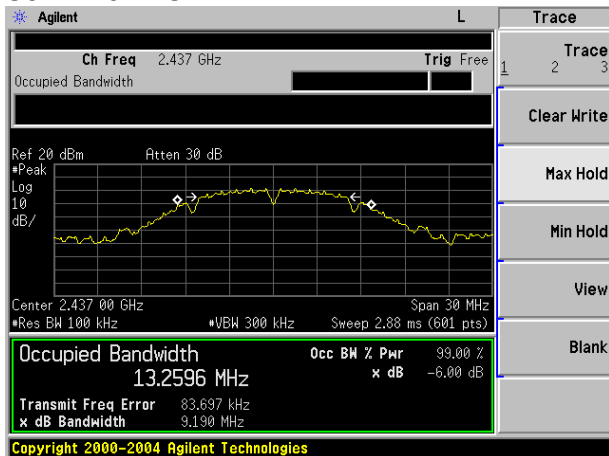


802.11g 2437MHz

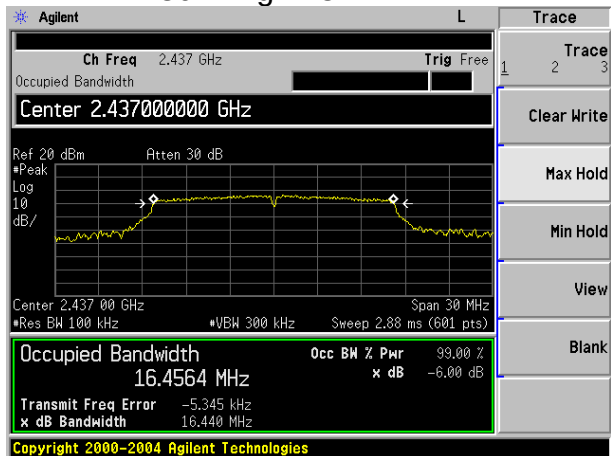


802.11b 2462MHz

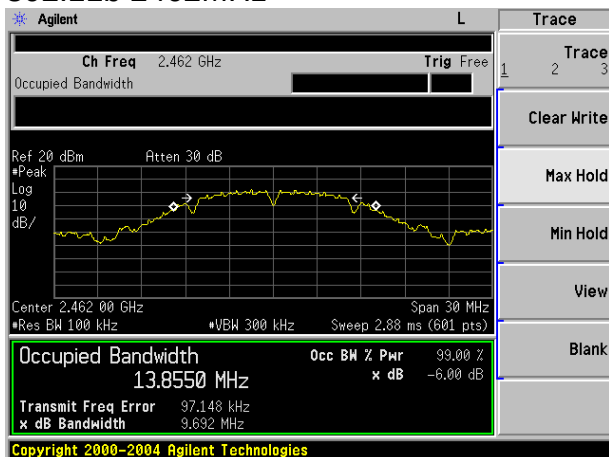


802.11g 2462MHz

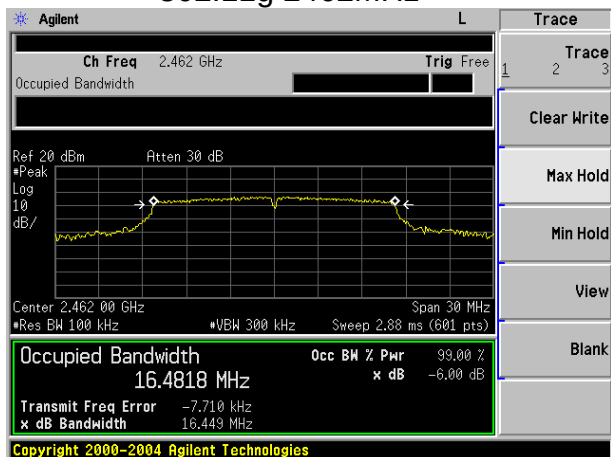


802.11n (HT20) 2412MHz

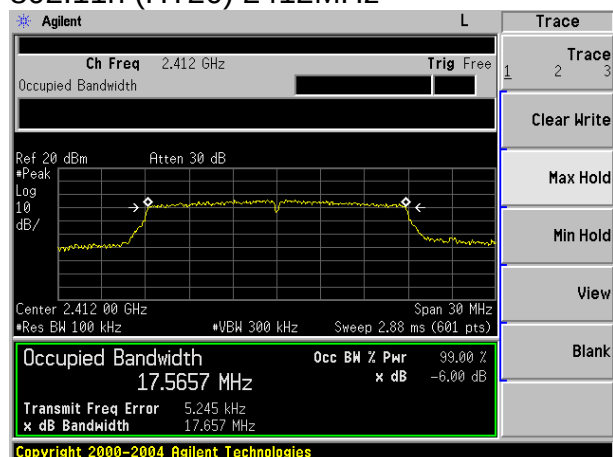


802.11n (HT40) 2422MHz

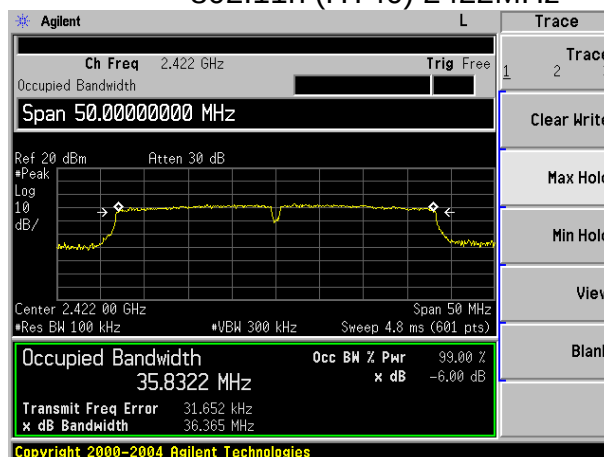


802.11n (HT20) 2437MHz

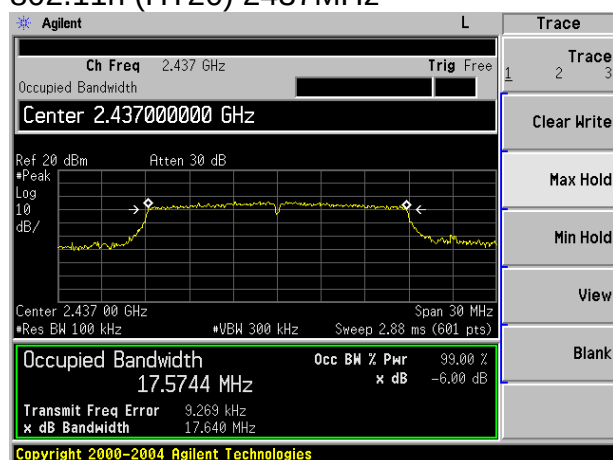


802.11n (HT40) 2437MHz

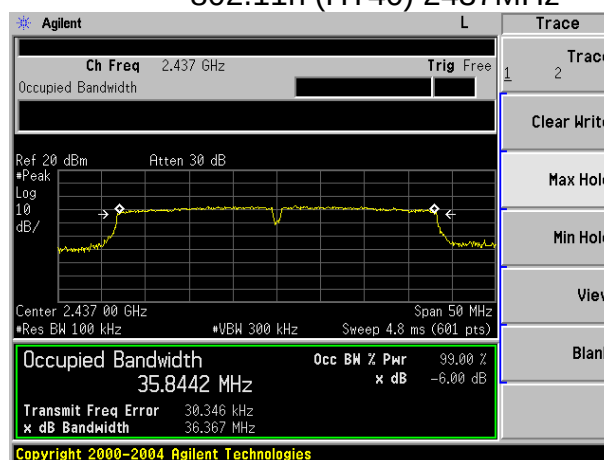

802.11n(HT20) 2462MHz

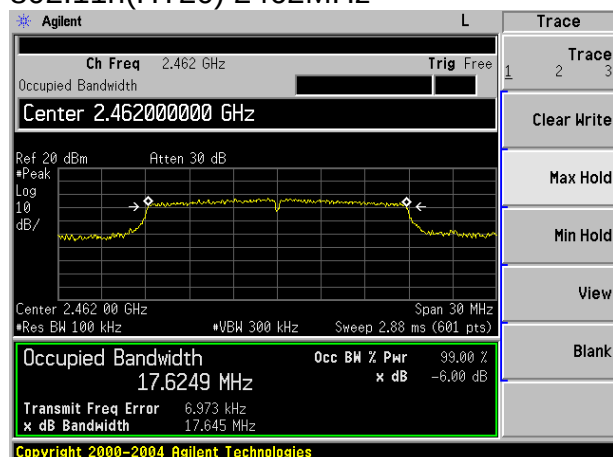

802.11n (HT40)2452MHz

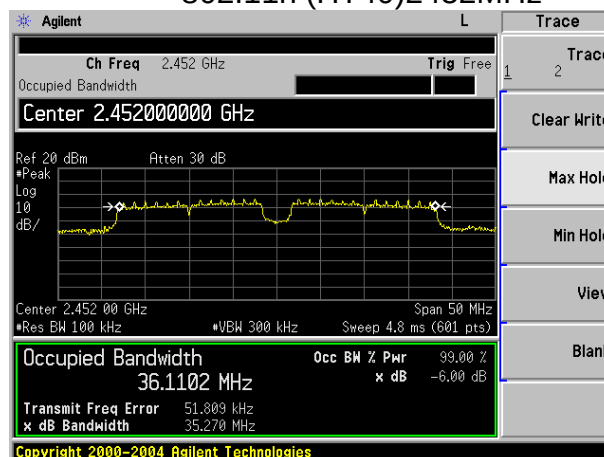

7. OUTPUT POWER TEST


7.1. Limits

For systems using digital modulation in the 2400~2483.5MHz, The out put Power shall not exceed 1W (30dBm)

7.2. Test setup

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

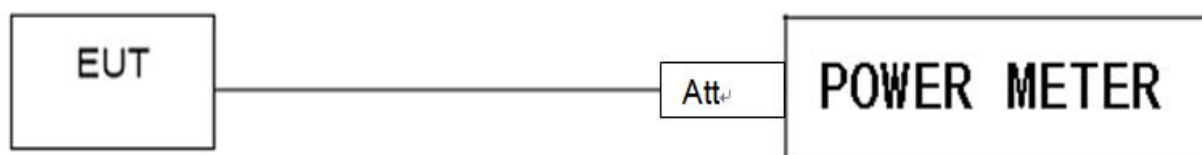


7.3. Test result


Test Channe	Frequency	Maximum Peak Conducted Output Power (PK)	Maximum Peak Conducted Output Power (AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
TX 802.11b Mode				
CH01	2412	12.35	9.27	30
CH06	2437	12.14	9.05	30
CH11	2462	11.86	8.93	30
TX 802.11g Mode				
CH01	2412	11.24	8.35	30
CH06	2437	11.18	8.29	30
CH11	2462	11.12	8.27	30
TX 802.11n(20) Mode				
CH01	2412	10.82	7.92	30
CH06	2437	10.66	7.88	30
CH11	2462	10.73	7.85	30
TX 802.11n(40) Mode				
CH03	2422	10.36	7.68	30
CH06	2437	10.26	7.59	30
CH09	2452	10.28	7.56	30

Note: For power test the duty cycle is 100% in continous transmitting mode.


Test plot of Duty Cycle for 802.11b

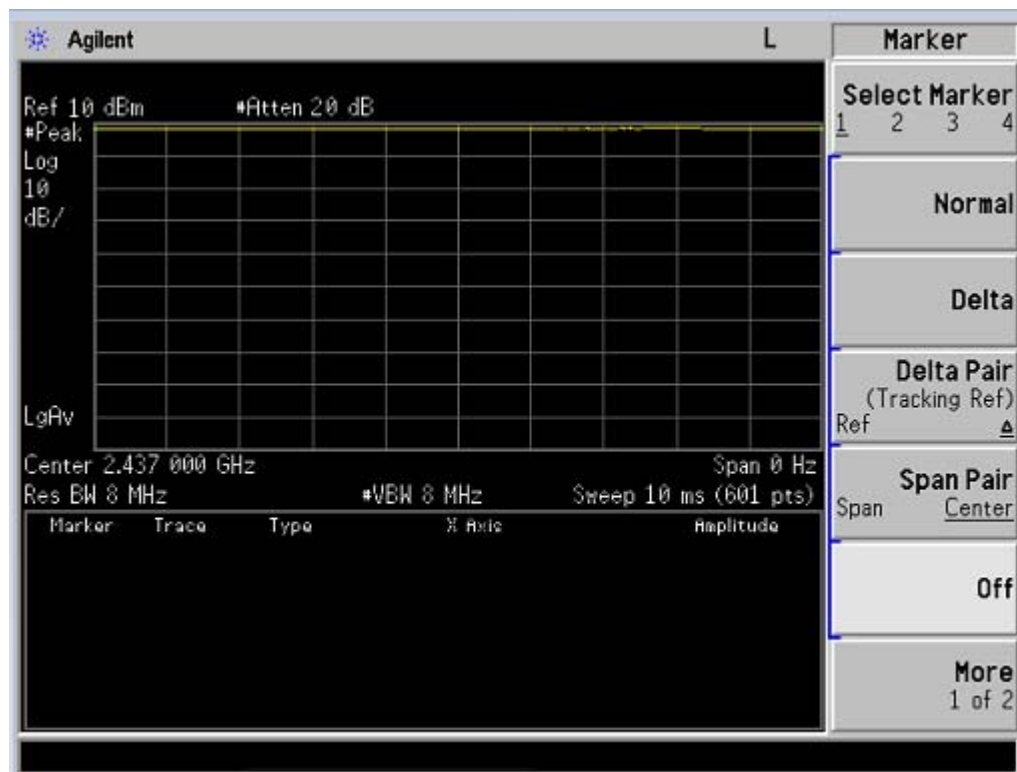


Test plot of Duty Cycle for 802.11g

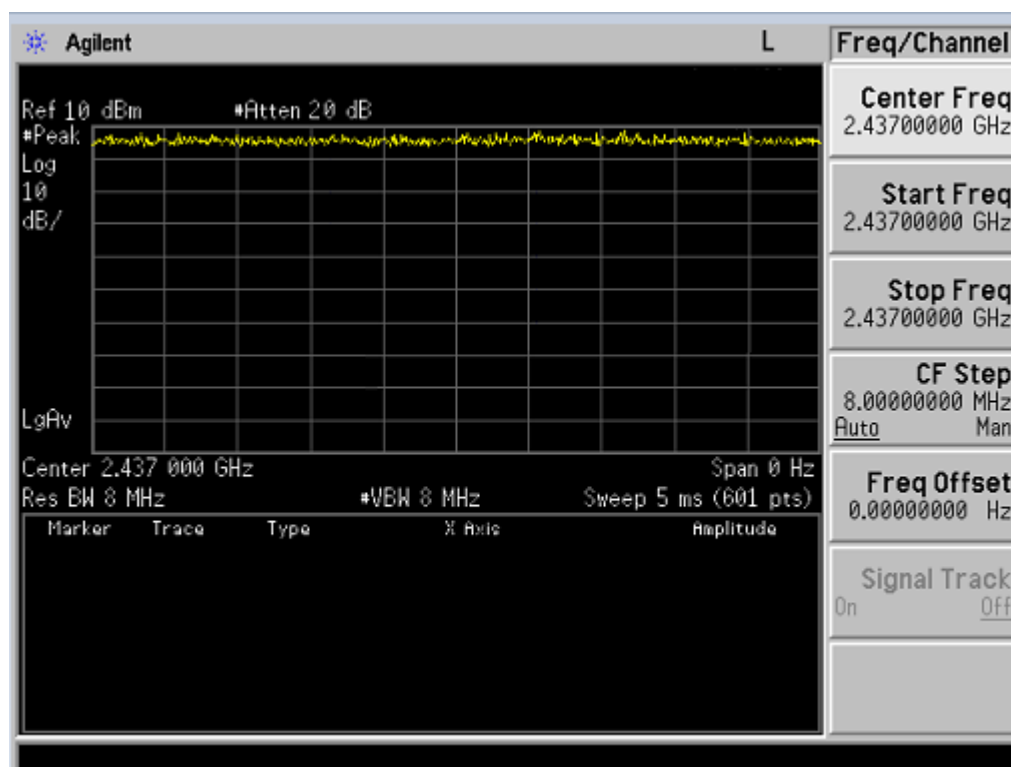

Test plot of Duty Cycle for 802.11n -HT20

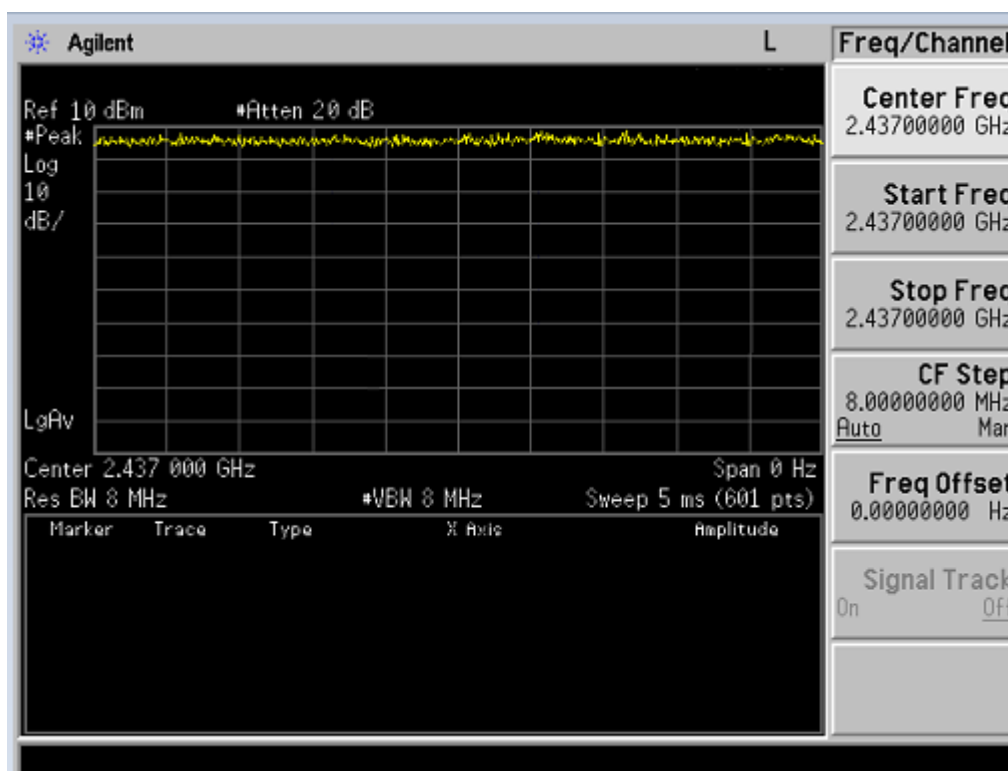

Test plot of Duty Cycle for 802.11n -HT40

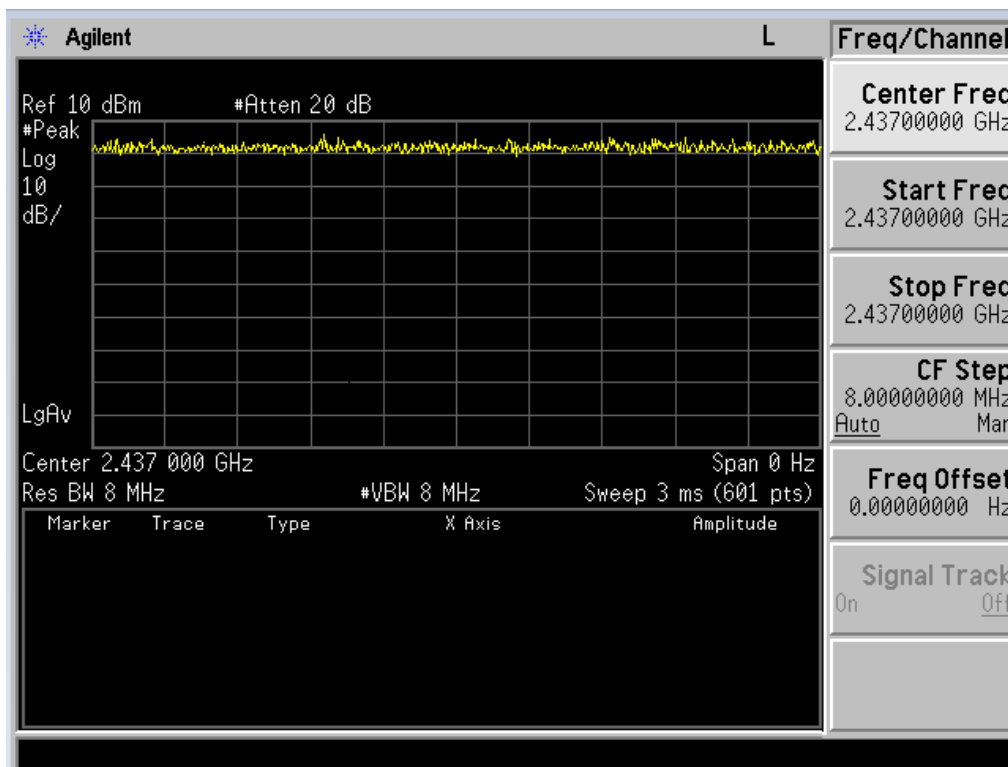

8. POWER SPECTRAL DENSITY TEST

8.1. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.


8.2. Test setup

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat..


8.3. Test result

	Channel Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	2412	-17.49	8	Pass
	2437	-17.08	8	Pass
	2462	-16.70	8	Pass
802.11g	2412	-17.05	8	Pass
	2437	-17.28	8	Pass
	2462	-18.13	8	Pass
802.11n (HT20)	2412	-18.20	8	Pass
	2437	-17.94	8	Pass
	2462	-17.21	8	Pass
802.11n (HT40)	2422	-21.91	8	Pass
	2437	-18.35	8	Pass
	2452	-21.00	8	Pass


802.11b 2412MHz

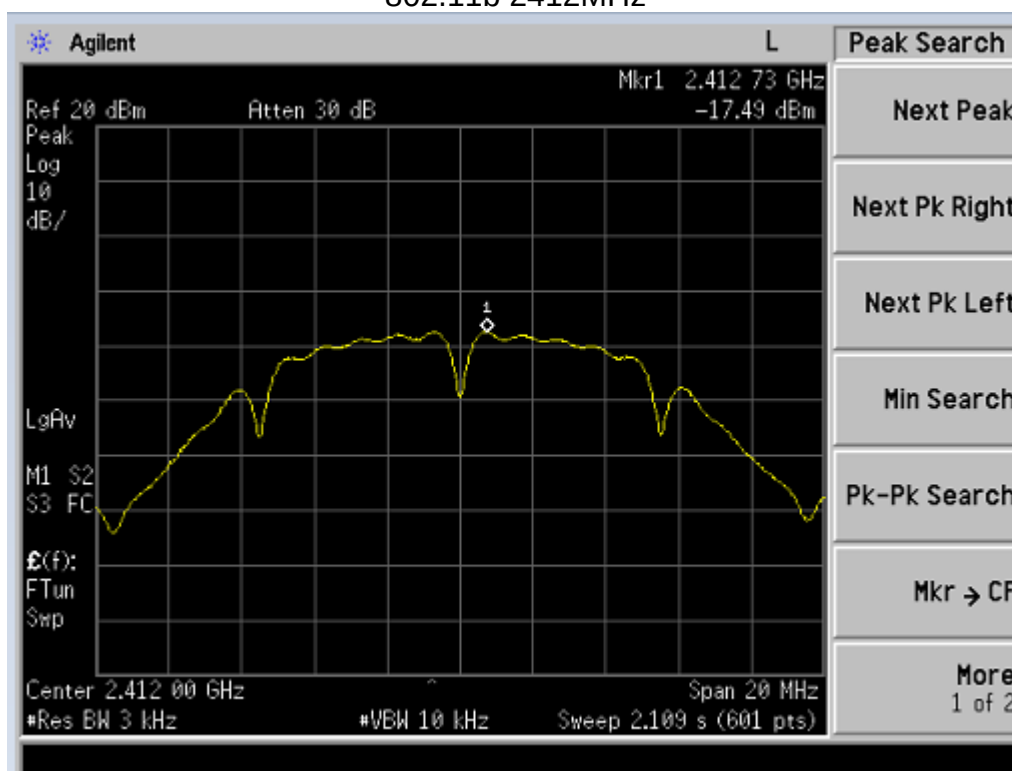


802.11b 2437MHz

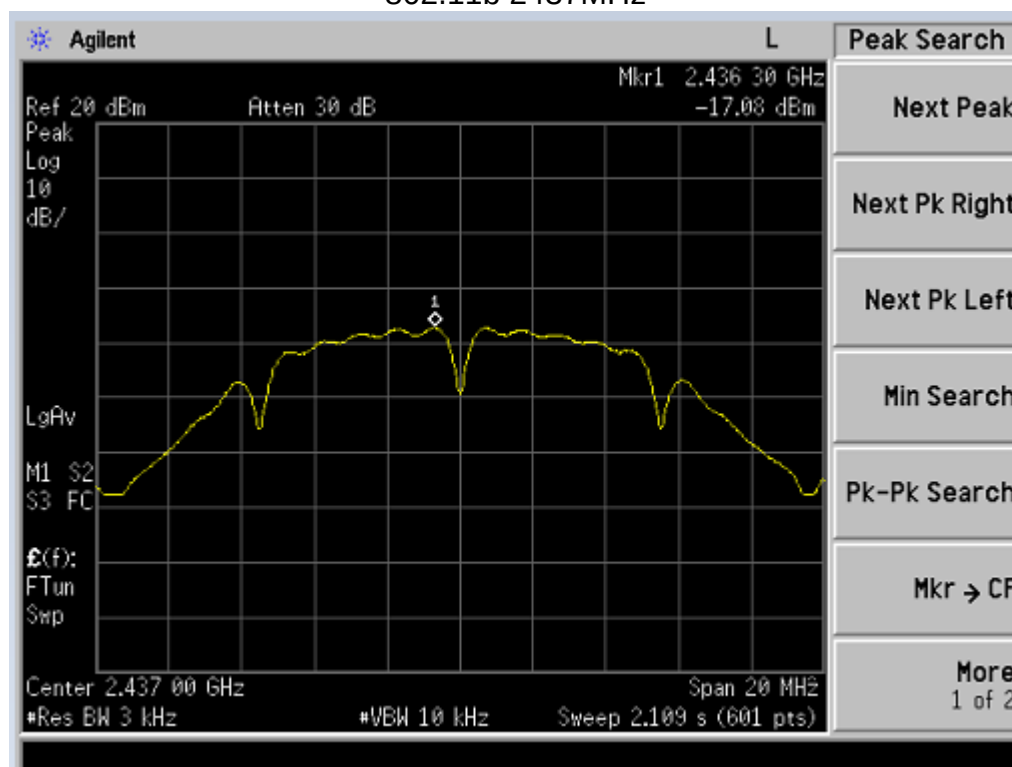


802.11b 2462MHz

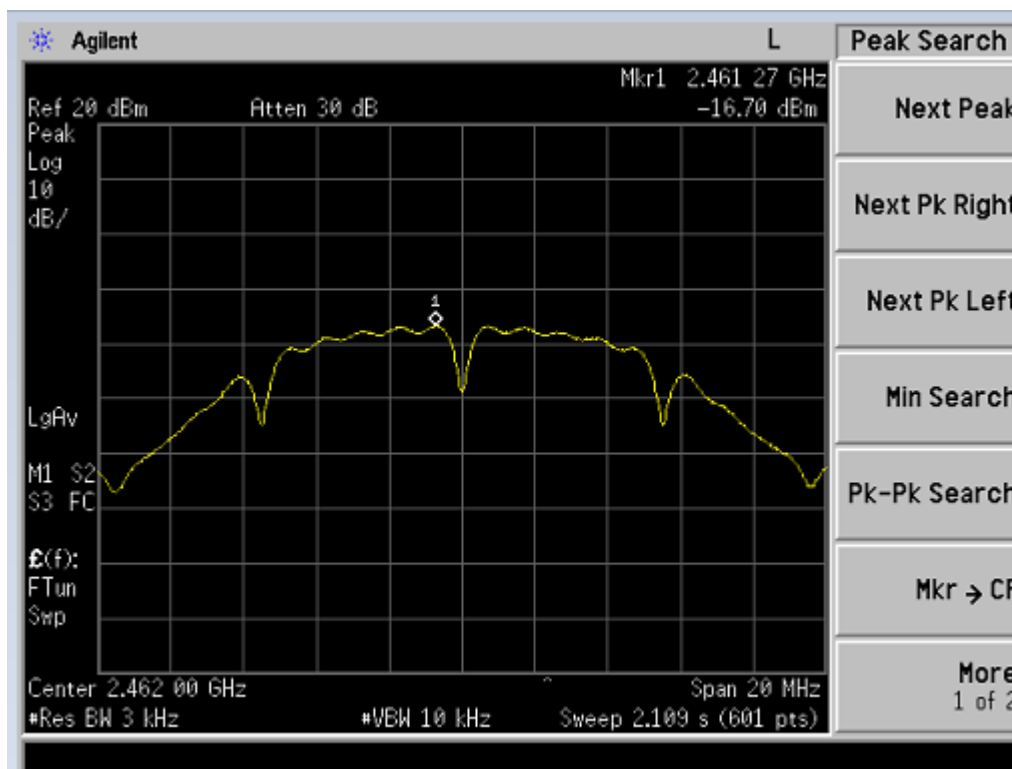


802.11g 2412MHz

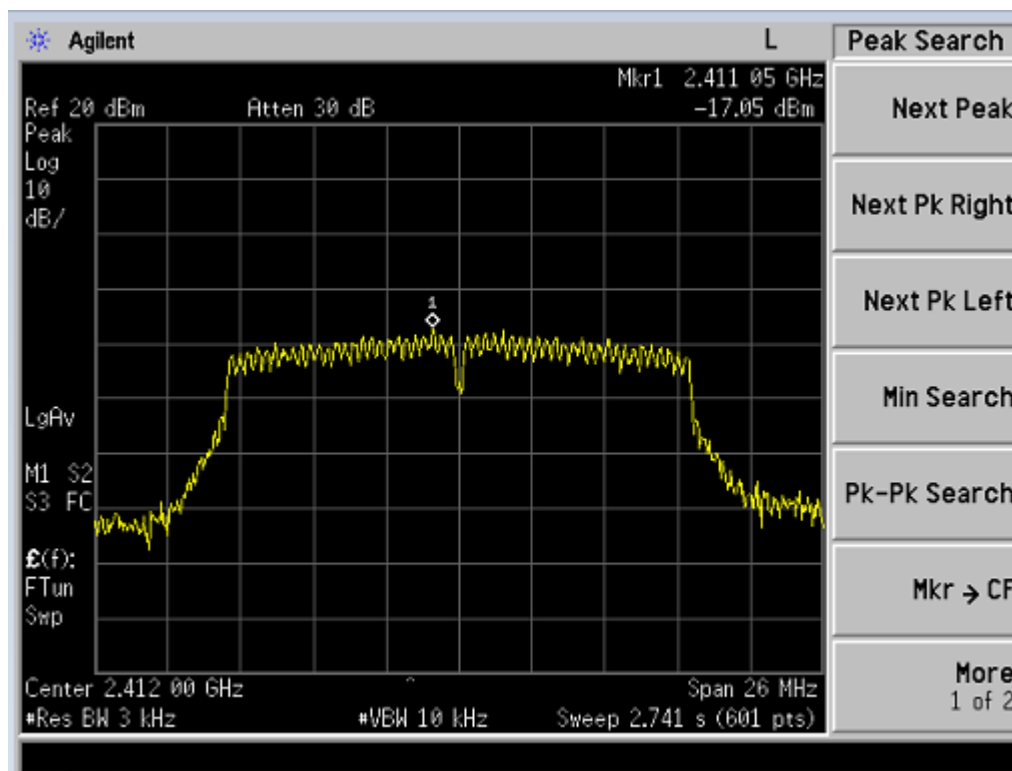


802.11g 2437MHz

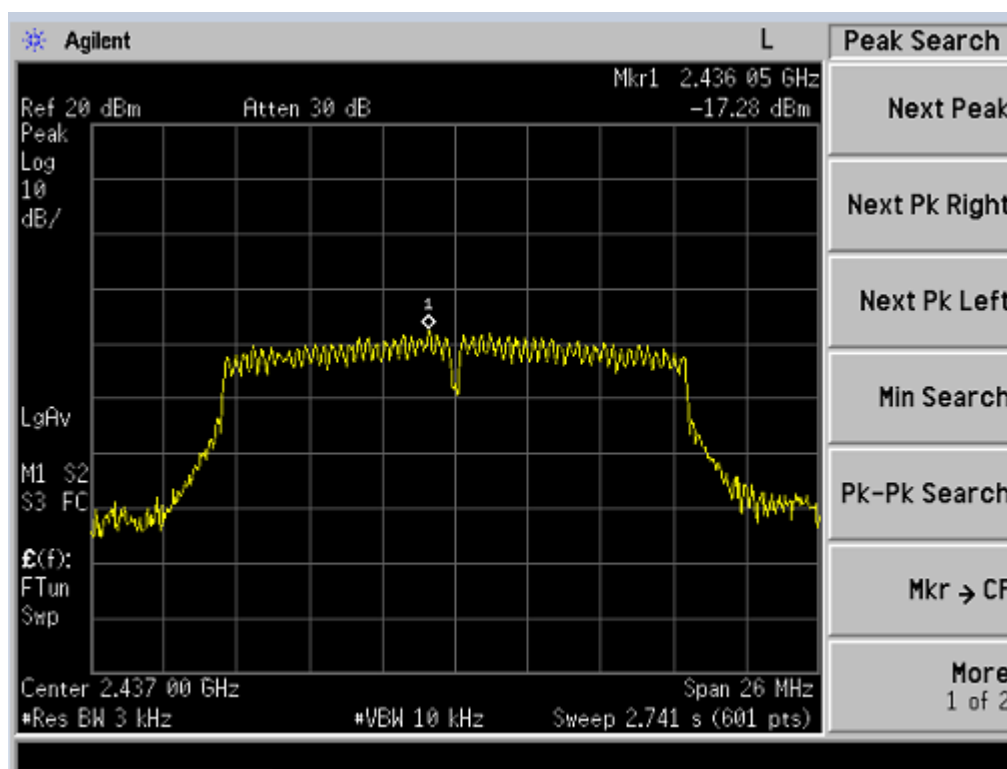


802.11g 2462MHz

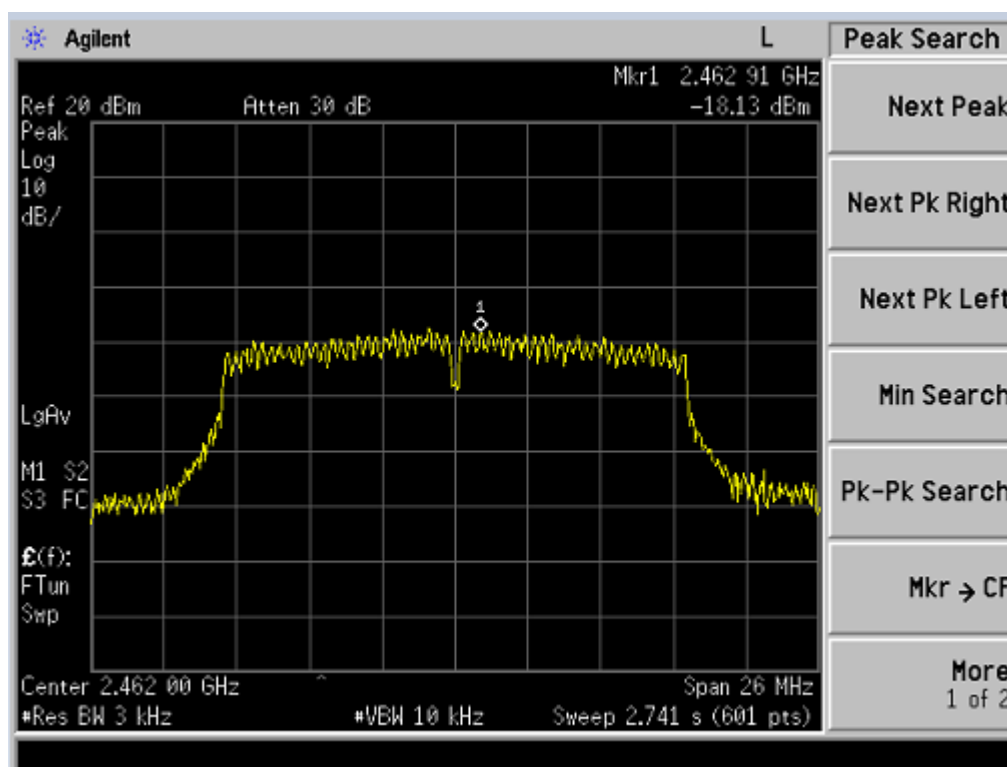


802.11n (HT20) 2412MHz

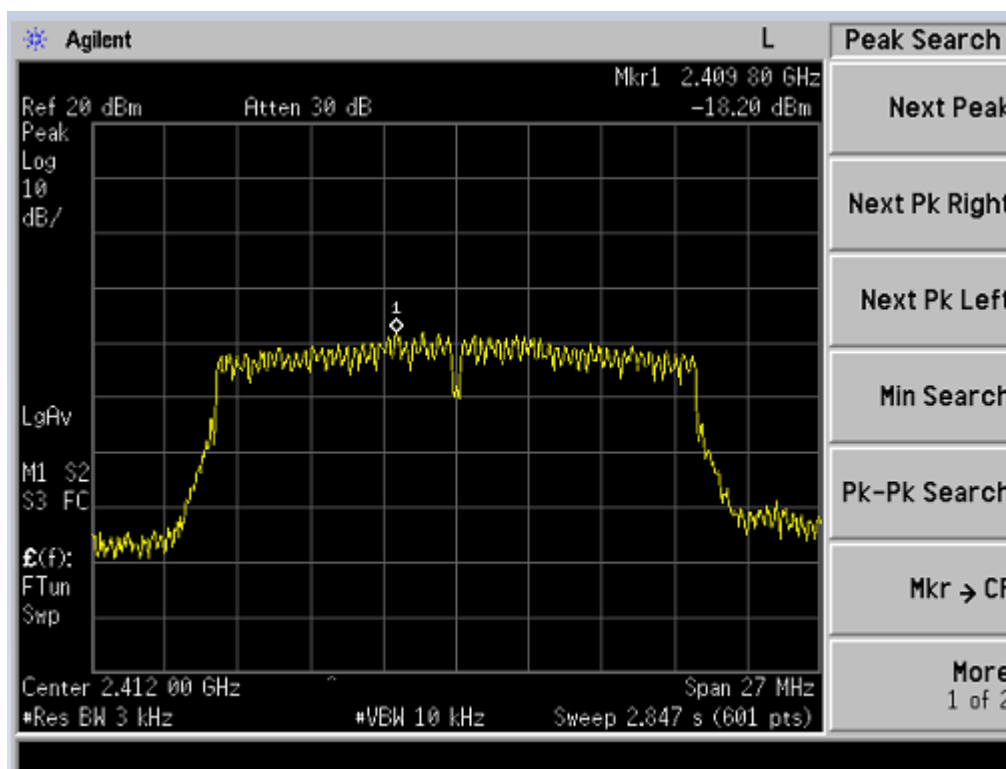


802.11n (HT20) 2437MHz

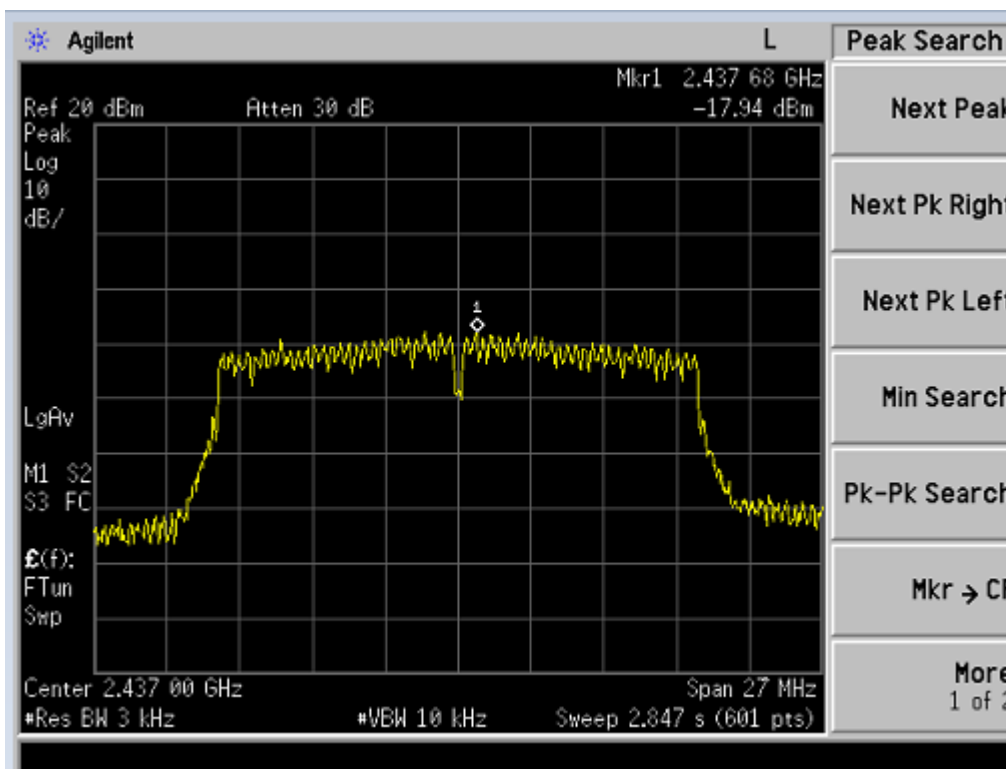


802.11n(HT20) 2462MHz

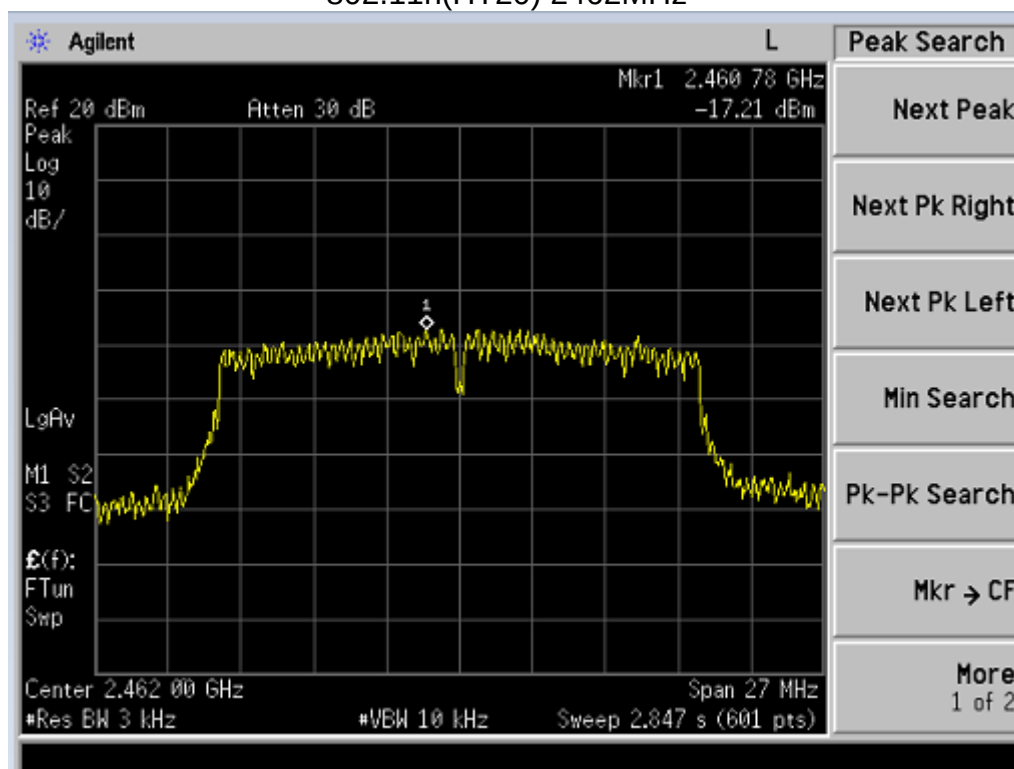


802.11 n (HT40) 2422MHz

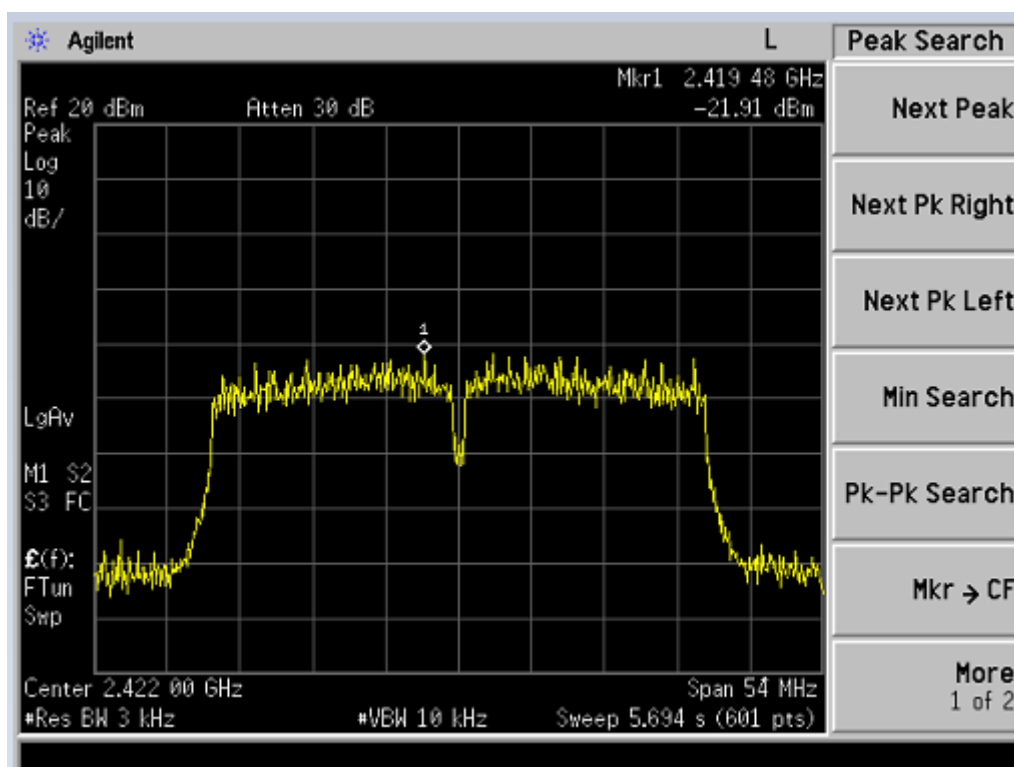

802.11 n (HT40) 2437MHz

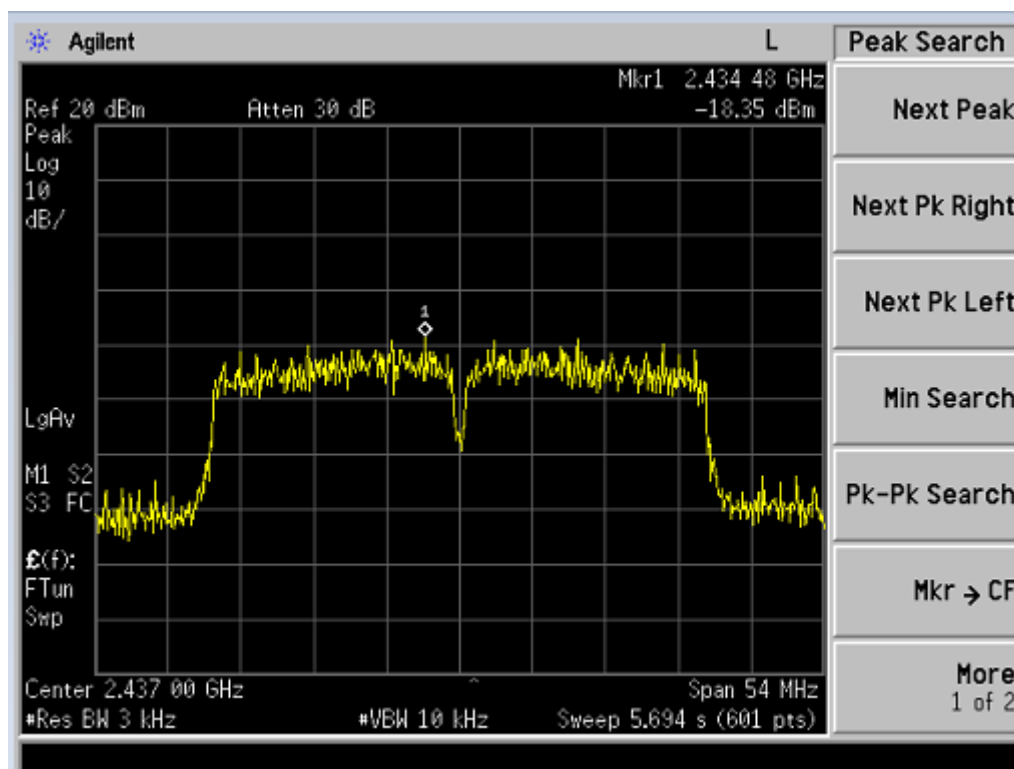

802.11 n (HT40) 2452MHz

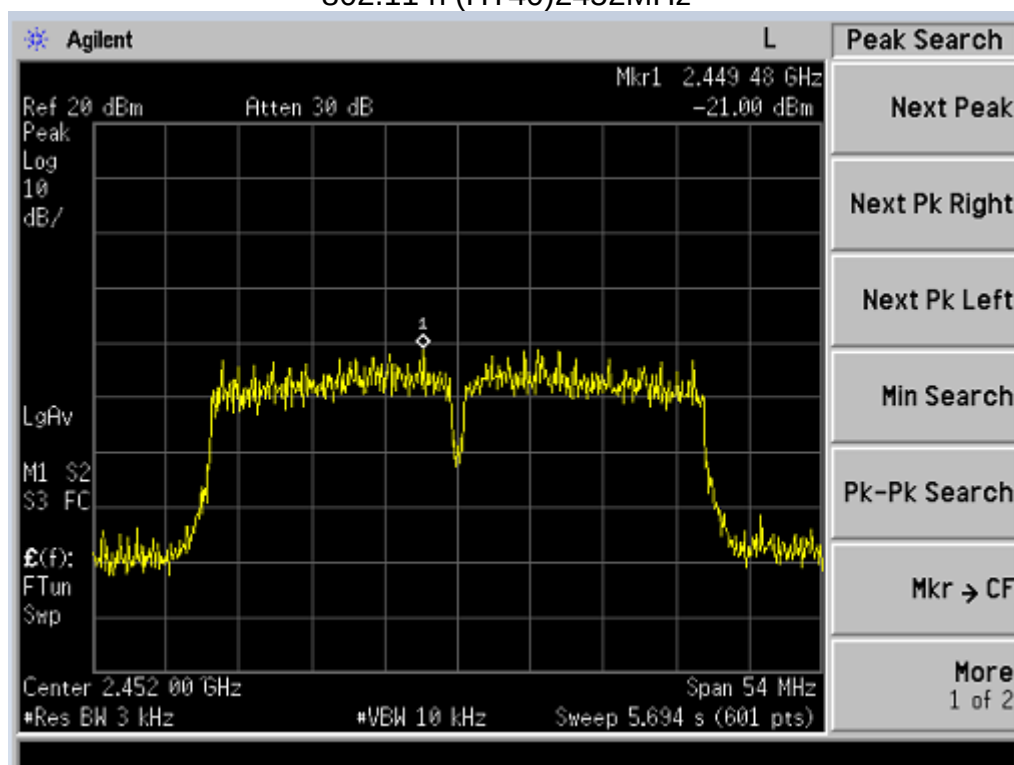

9. ANTENNA REQUIREMENTS

9.1. Limits

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2. Result


The antenna used for this product is FPCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.41dBi.

10. PHOTOGRAPHS OF TEST SET-UP

Conducted Emission





Radiated Emission Test

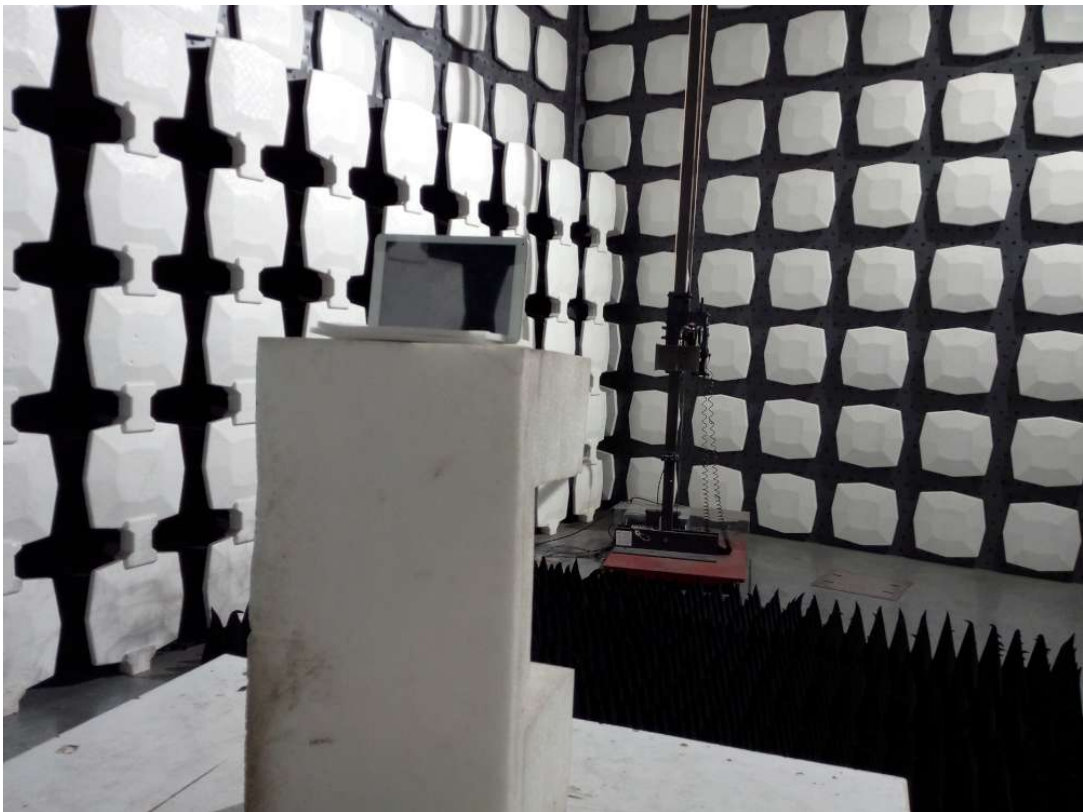


11. PHOTOGRAPHS OF THE EUT





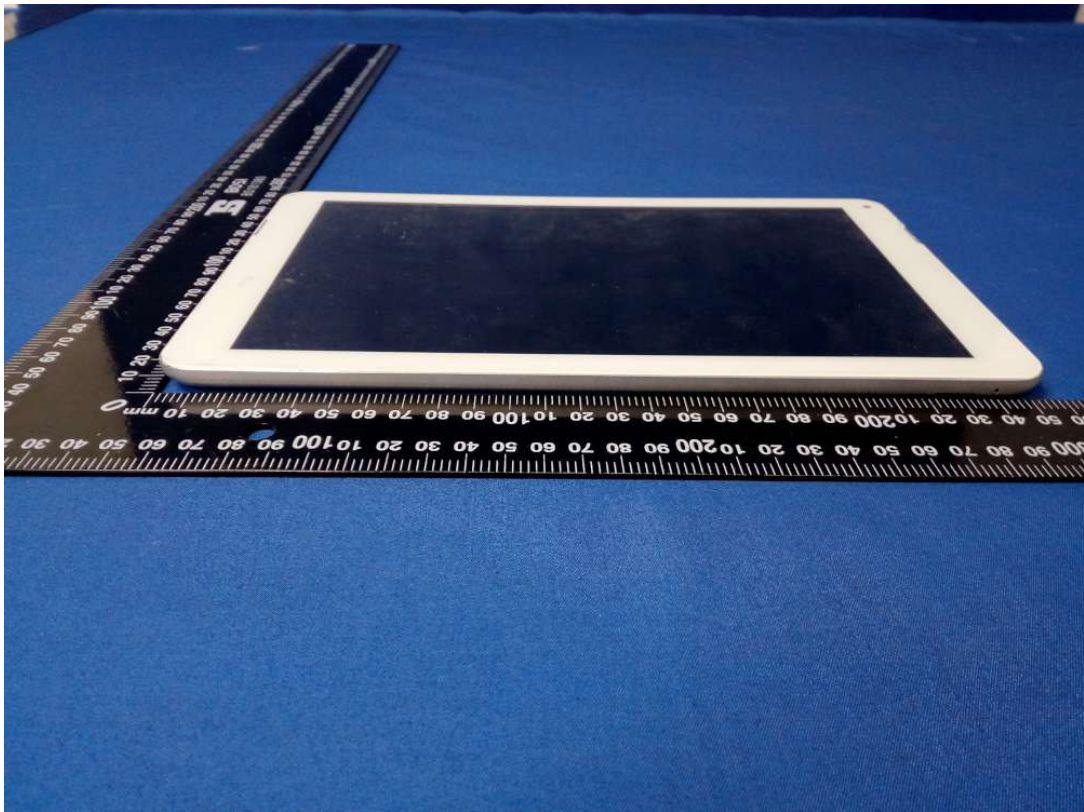


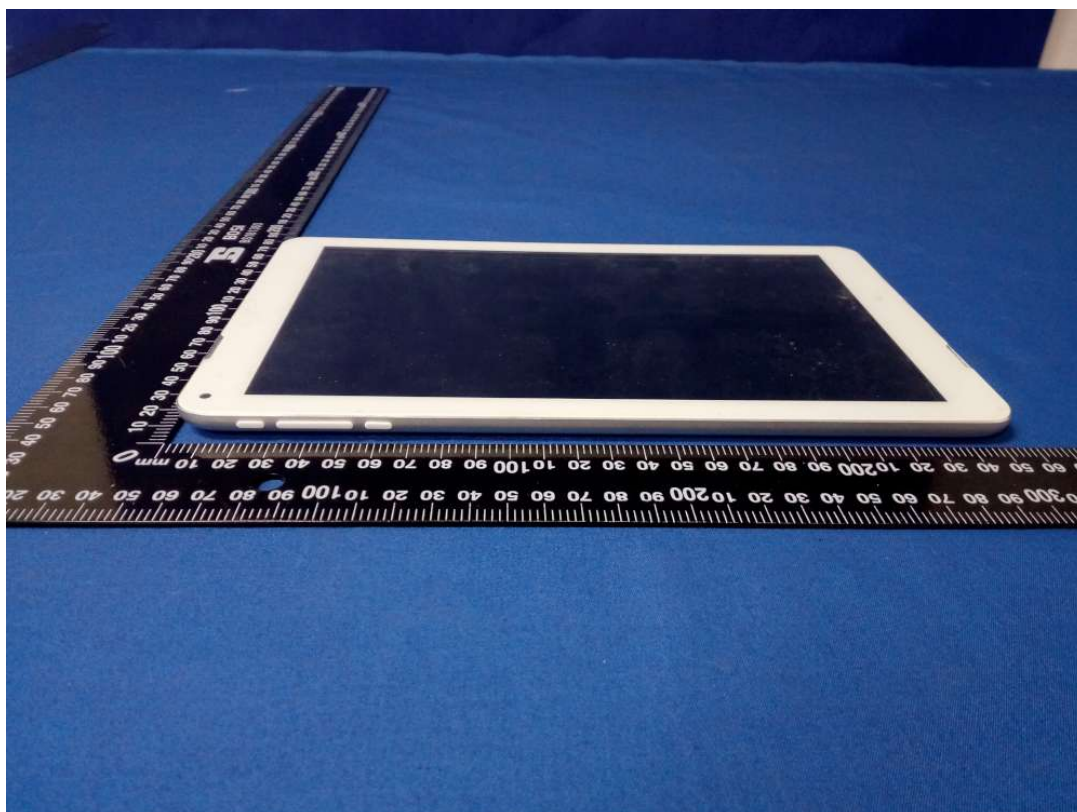




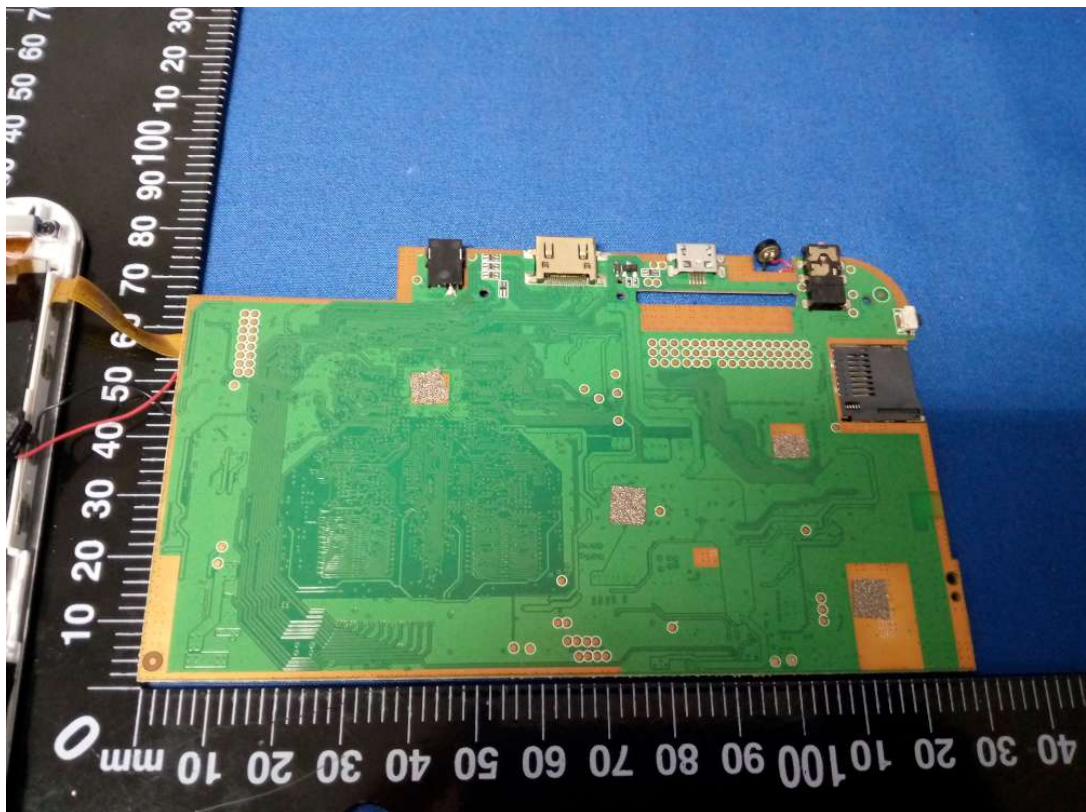

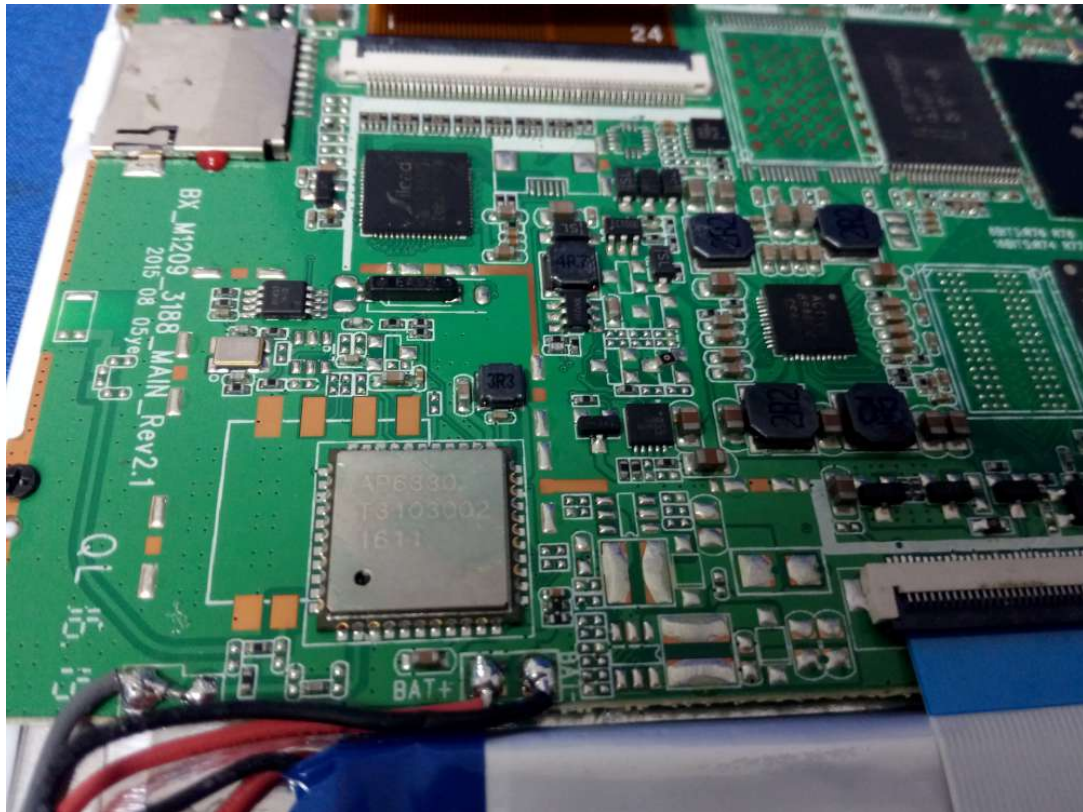

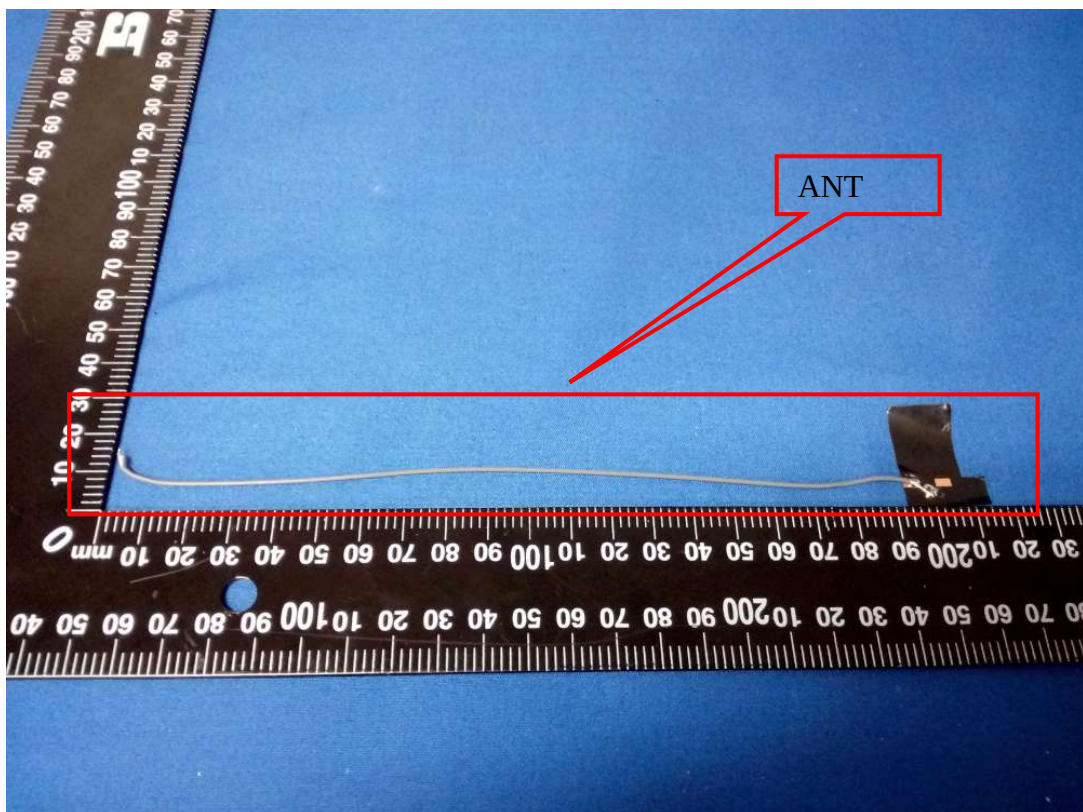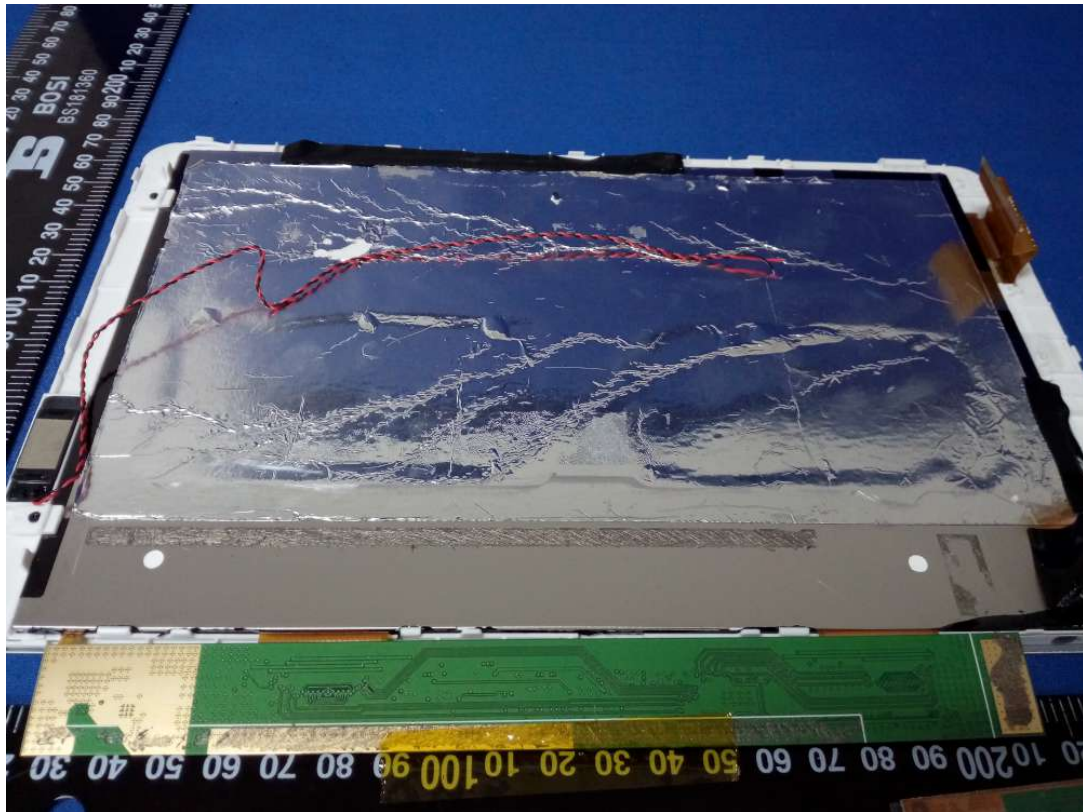

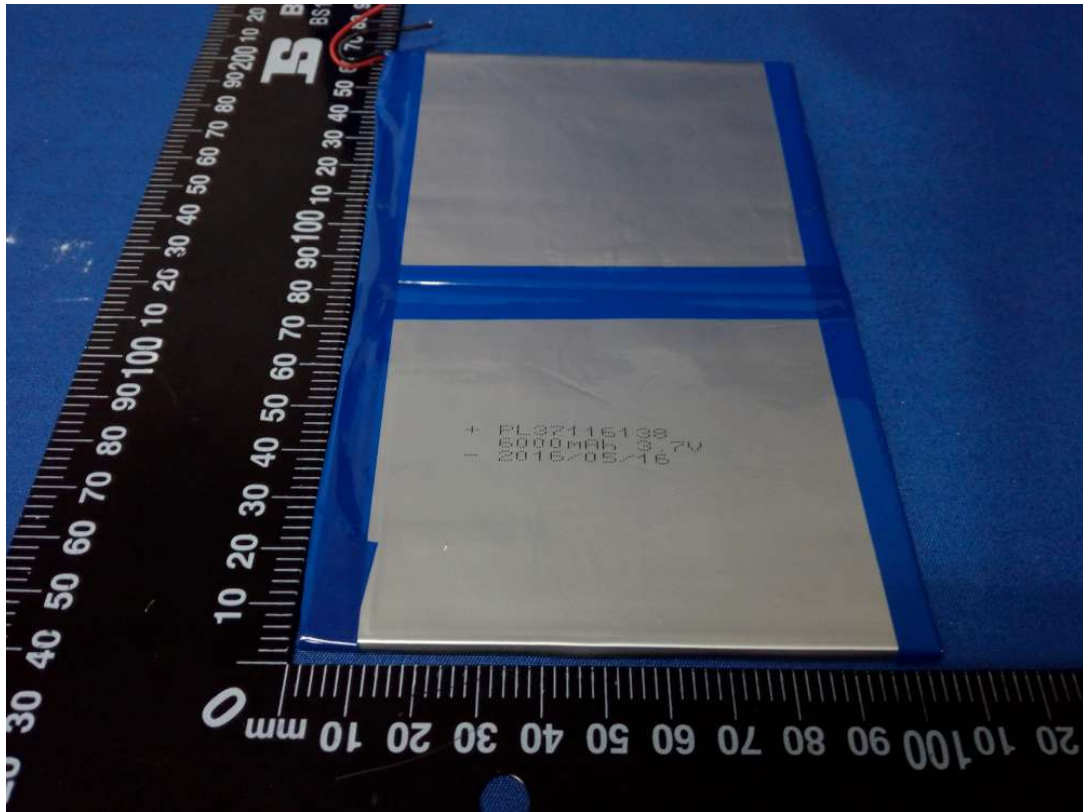

*** the end of report ***