



深圳市盛邦尔科技有限公司
Shenzhen Surbaner Technology CO.,LTD.

承 认 书

SPECIFICATION FOR APPROVAL

客户名称 Customer Name	熵基		
客户项目名 Customer Project Name	Xface602	盛邦尔料号 Surbaner P/N	3160-180-00852
客户编码 Customer P/N	/	工作频段 Working Band	2.4G+5.8G
产品描述 Description	WiFi双频天线:PCB/尺寸40.00*9.00*0.6MM/ 1.13黑色线接一代端子/L=70MM(±3mm)		
版本号 Version	V01		
设计人信息/Designer Information			
射频工程师 RF Engineer	林德友	研发主管 R&D Diretor	朱浩奎
结构工程师 ME Engineer	蔡杰		

盛邦尔审批/Surbaner Approval			客户批准/Customer Approval	
	制作 Prepared By	审核 Checked By	批准 Approval By	
签章 Signature	曾心荣	林德友	朱浩奎	
日期 Date	2024.1.27	2024-01-29	11-9	

修订履历/Change Log				
版本 Version	修订内容 Change Description	责任人 Person in Charge	核准 Approval By	日期 Date

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.


SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

目录/Catalogue

序号 No.	项目 Item	页码 Page No.
1	图纸或实物图片 Drawing or Product Image	3
2	技术参数 Technical Parameter	4
3	射频性能测试报告 RF Performance Test Report	5-9
4	尺寸测量报告 Dimensions Test Report	10
5	可靠性测试报告 Reliability Test Report	11

一. 产品图纸或实物图片/Drawing or Product Image

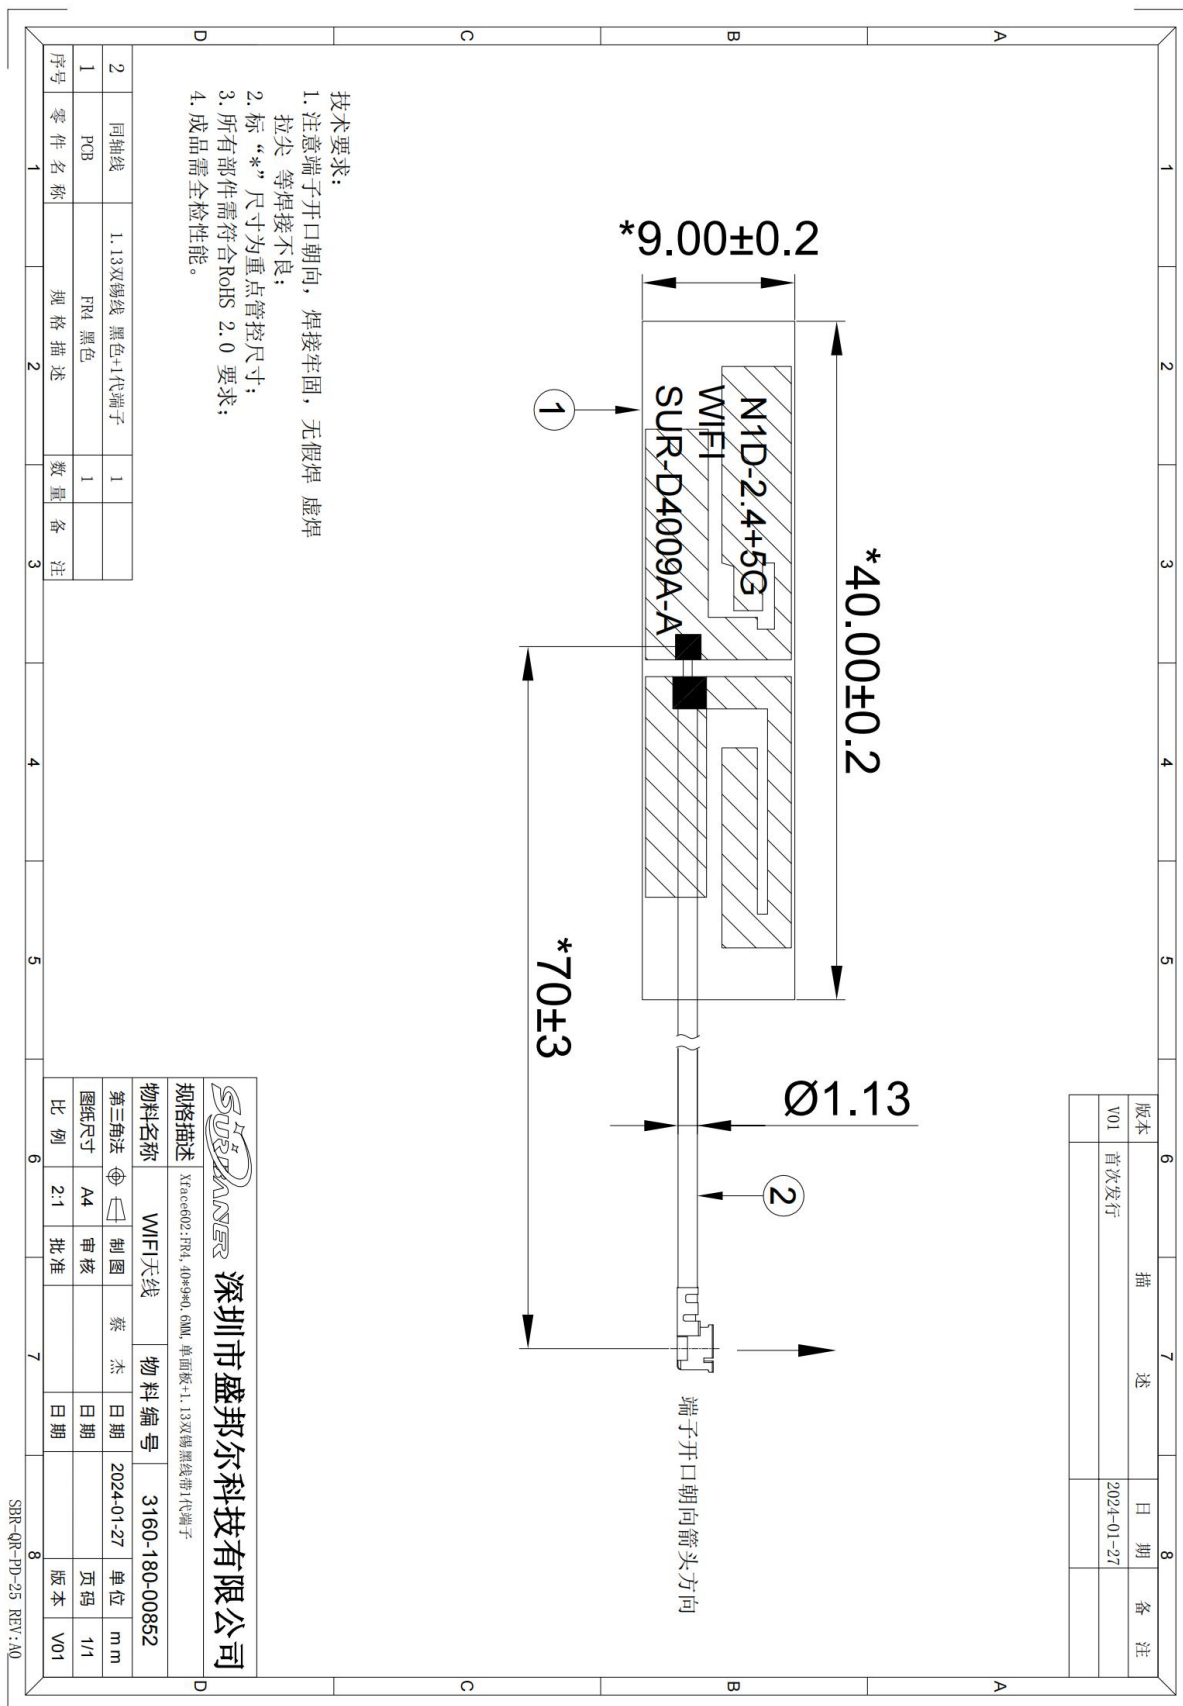

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

二. Technical Parameter /技术参数

1. Antenna/天线		
No/序号	Part Name/项目	SPEC/规格
1	Frequency Range/ 频率范围	2400-2500/5150-5850 MHz
2	Impendence/阻抗	50 ohm nominal
3	Gain/增益	> 1dBi(at 2400-2500MHz) > 3dBi(at 5150-5850MHz)
4	Polarization/极化	LINE
5	VSWR/驻波比	≤2.54
6	Efficiency/效率	≥45% AVG
7	RF Cable/射频连接线	1.13 黑色线 70mm
8	RF Connector/连接器	一代端子
2. Environmental Characteristics/环境特性		
No/序号	Part Name/项目	SPEC/规格
1	Operation Humidity /工作湿度	5~95%不冷凝
2	Operating Temperature/ 工作温度	-20~+60℃
3	Store Temperatuer/工作 储存温度	-30~+70℃
4	Salt Spray Test/ 盐雾试验	24H

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

射频性能测量报告

RF Performance Test Report


客户名称 Customer Name	熵基	项目名称 Project Name	Xface602	盛邦尔料号 Surbaner P/N	3160-180-00852
频段 Band	2400-2500/ 5150-5850 MHz	测试日期 Test Date	2024/1/26	测试人 Inspector	林德友

天线测试设备简介

Antenna Test Equipment Introduction

测试天线输入特性使用 Agilent E5071C and Agilent 5062A 矢量网络分析仪；辐射特性利用 Satimo 三维近场暗室进行测试，并分别使用 8960 E5515 和 Agilent E4438C 进行了分析。暗房的测试坐标如下：

Test of antenna input characteristics using Agilent E5071C and Agilent 5062A vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

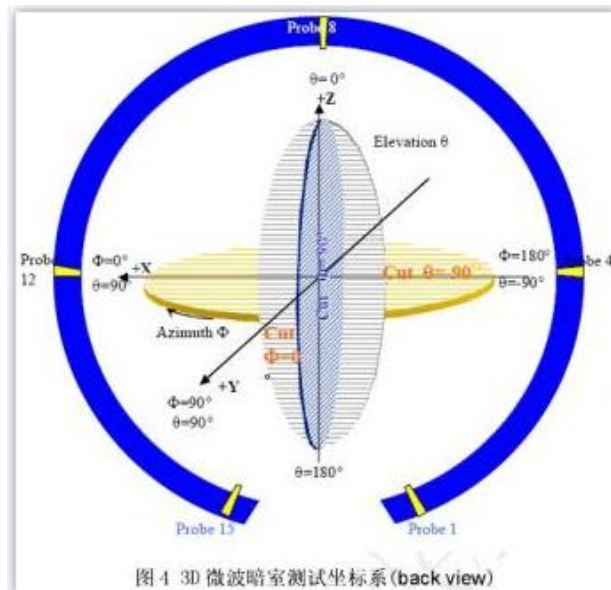

1. S11 参数测量/S11 Parameter-VSWR

使用一根 50 Ω 同轴电缆连接到天线，然后该电缆连接到网络分析仪测量 S11 参数，被测量产品远离金属至少 20 厘米。


Measuring Method is a 50Ωcoaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.

Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5062A
OTA Test	TRP&TIS	Agilent 8960 E5515C& Agilent 4438C&CMW500 &CMW270 ETS&SATIMO
Gain & Efficiency	Gain & Efficiency	ETS&SATIMO Agilent 5071C



Product Overview & Environmental Treatment

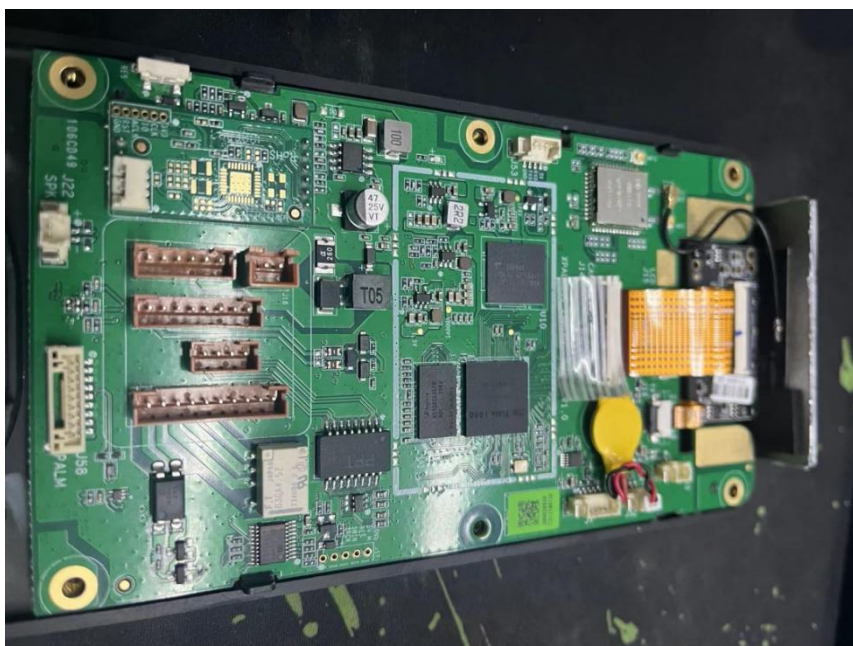


地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

2. 天线匹配网络/Antenna Matching Network

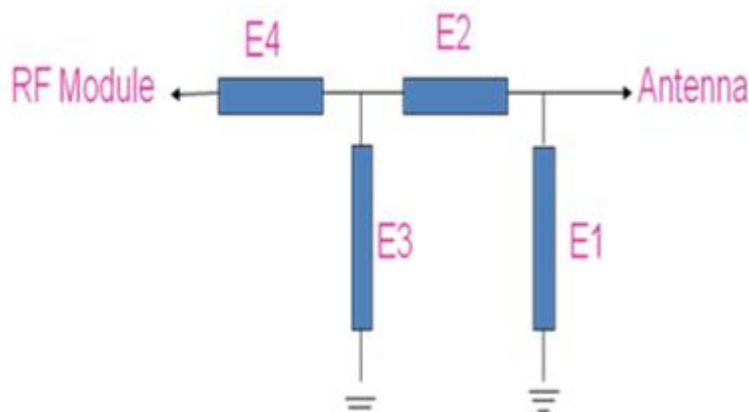

Element	Value
E1	N/A
E2	N/A
E3	N/A
E4	N/A

PCB板端匹配电路没有改动

S11 Parameter-VSWR



Frequency(MHz)	2400	2500	5000	5850
VSWR	2.54	2.07	1.46	1.69


地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.


SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn


2D Pattern

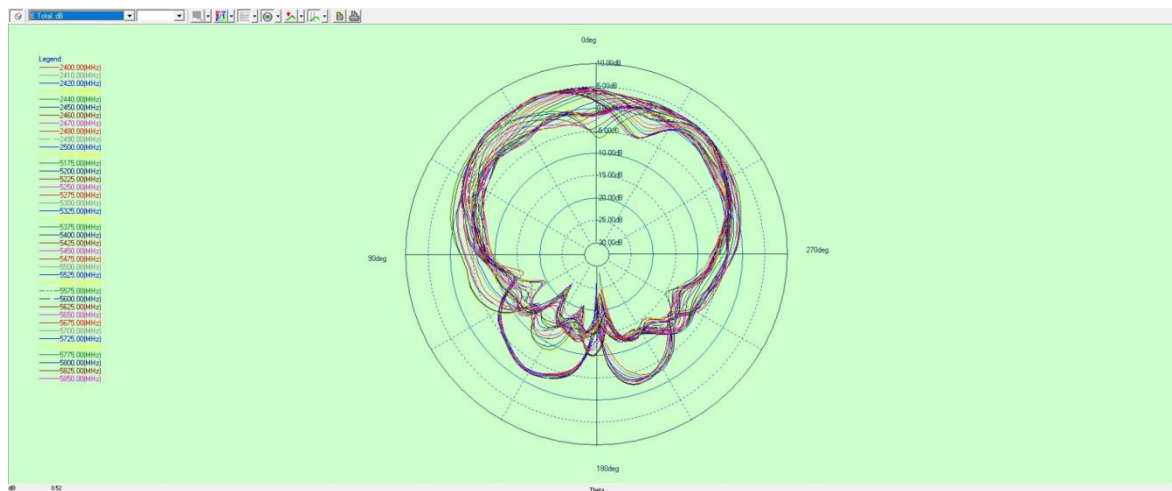

Phi =0

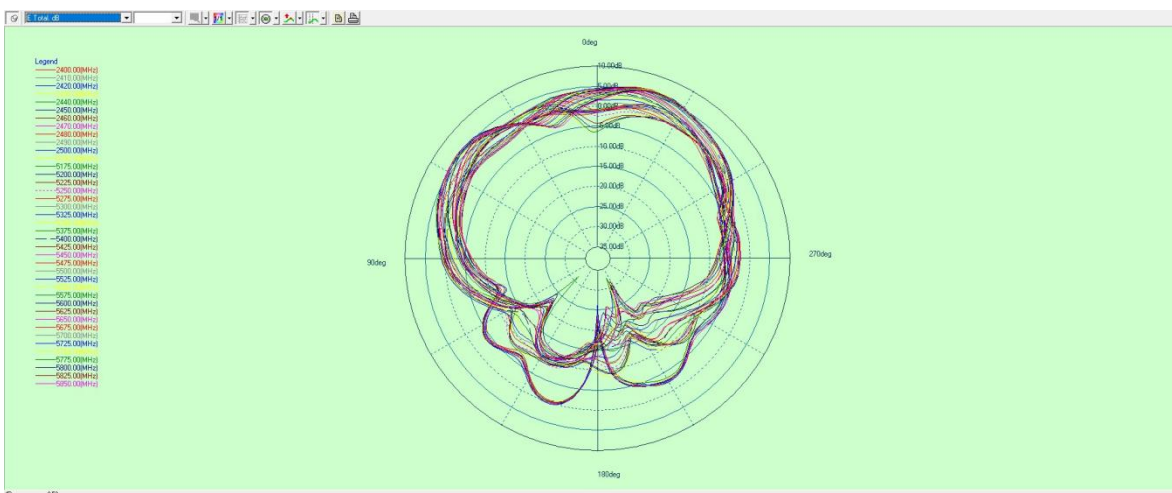

Phi =90

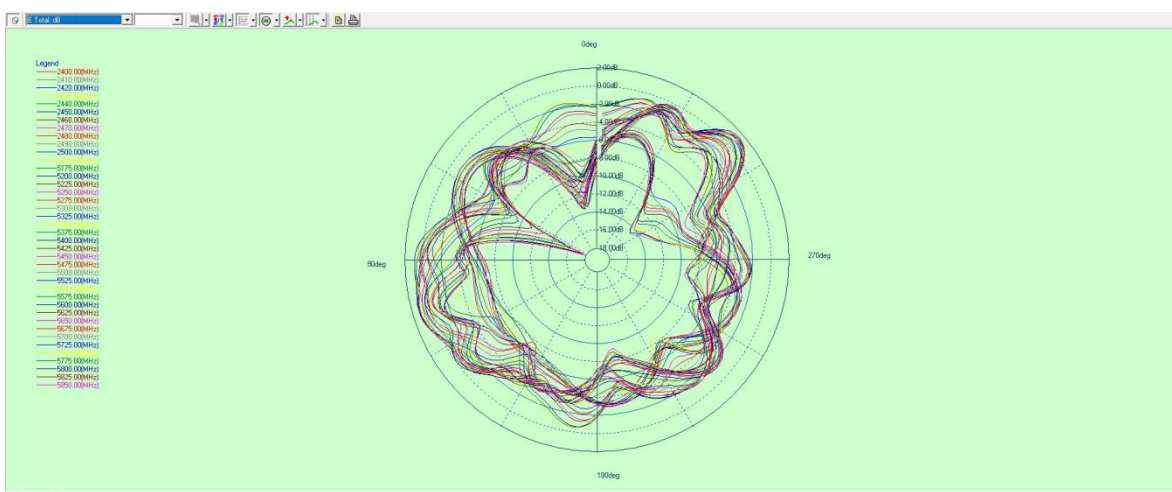

Theta =90

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

3. Gain & Efficiency

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	45.9	1.32
2450	46.5	1.95
2500	47.5	2.52
5150	51.6	3.12
5720	52.7	3.69
5850	52.3	3.82

4. OTA

Test Equipment:	R&S CMW500			
Test Condition:	3D chamber			
Band	Wireless Protocol	Channel	TRP(dBm)	TIS(dBm)
WIFI	802.11 b/11Mbps	1	12.54	-74.97
		6	12.25	-71.35
		12	11.35	-64.95
WIFI	802.11 a/54Mbps	36	11.86	-70.17
		149	12.73	-71.5
		165	13.32	-65.49



样品尺寸测量报告

Sample Dimensions Test Report

客户名称 Customer Name	熵基	客户料号 Customer P/N	*****	盛邦尔料号 Surbaner P/N	3160-180-00852
测试日期 Test Date	2024/01/26	样品数量 Sample Qty.	3	测试人 Inspector	曾心荣
尺寸编号 Dimension No.	标准 Standard	样品 1 Sample 1	样品 2 Sample 2	样品 3 Sample 3	Pass/NG
①PCB 长度	40.00±0.2mm	40.05	40.10	40.06	Pass
②PCB 宽度	9.00±0.2mm	9.05	9.06	9.02	Pass
③PCB 厚度	0.60±0.05mm	0.61	0.60	0.62	Pass
④线长	70±3mm	71	73	71	Pass
最终结论 Conclusion					PASS
测试人&日期 Inspector & Date	曾心荣 2024/01/26		批准&日期 Approval & Date		



可靠性测试报告

Reliability Test Report

客户名称 Customer Name	熵基	客户料号 Customer P/N	*****	盛邦尔料号 Surbaner P/N	3160-180-00852	
测试日期 Test Date	2024/01/26	样品数量 Sample Qty.	3	测试人 Inspector	何春辉	
测试项目 Test Item	要求 Requirement	试验设备 testing equipment	样品 1 Sample 1	样品 2 Sample 2	样品 3 Sample 3	判定 PASS/NG
高温存储	在+70℃条件下暴露 24H, 恢复 2H 后进行测试电气性能正常	恒温恒湿箱	OK	OK	OK	Pass
低温存储	在-30℃条件下暴露 24H, 恢复 2H 后进行测试电气性能正常	恒温恒湿箱	OK	OK	OK	Pass
高温工作	在+60℃条件下通电工作 24H 电气性能正常	恒温恒湿箱	OK	OK	OK	Pass
低温工作	在-20℃条件下通电工作 24H 电气性能正常	恒温恒湿箱	OK	OK	OK	Pass
端子盐雾试验	(5 ± 0. 5)%氯化钠、pH 值为 6. 5~7. 2, 实验箱温度 (35±2) °C <input checked="" type="checkbox"/> 24H <input type="checkbox"/> 48H	盐雾试验机	OK	OK	OK	Pass
端子铆压拉拔力	1. 13 线接 1 代 IPEX 端子 ≥10N	推拉力计	12N	13N	13N	Pass
最终结论 Conclusion						Pass
测试人&日期 Inspector & Date	何春辉 2024/01/26		批准&日期 Approval & Date			

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn