



FCC RF Test Report

APPLICANT : Lenovo Japan
EQUIPMENT : Smart phone
BRAND NAME : lenovo
MODEL NAME : 503LV
MARKETING NAME : Beam
FCC ID : 2AJAYJP-LEN
STANDARD : 47 CFR Part 2, 22(H), 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 14, 2016 and completely tested on Aug. 09, 2016. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Ken Chen / Manager



Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Emission Designator	6
1.7 Testing Location	7
1.8 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power	13
3.5 Peak-to-Average Ratio	14
3.6 Occupied Bandwidth	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	18
3.9 Frequency Stability	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	20
4.4 Effective Radiated Power and Effective Isotropic Radiated Power	21
4.5 Radiated Spurious Emission	23
5 LIST OF MEASURING EQUIPMENT	24
6 UNCERTAINTY OF EVALUATION	25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG671404B	Rev. 01	Initial issue of report	Aug. 18, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	NA	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a)	Conducted Band Edge Measurement (Band 26)	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 41)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a)	Conducted Spurious Emission (Band 26)	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 41)	$< 55+10\log_{10}(P[\text{Watts}])$		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power (Band 26)	ERP < 7 Watt	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 41)	EIRP < 2Watt		
4.5	§2.1053 §22.917(a)	Radiated Spurious Emission (Band 26)	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 2.87 dB at 5181.700 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 41)	$< 55+10\log_{10}(P[\text{Watts}])$		



1 General Description

1.1 Applicant

Lenovo Japan

Akihabara UDX, Sotokanda 4-14-1, Chiyoda-ku, Tokyo 101-0021, Japan

1.2 Manufacturer

Shenzhen BVC Technology Co., Ltd.

Rainbow Bldg., North, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China, P. C. 518057

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart phone
Brand Name	lenovo
Model Name	503LV
Marketing Name	Beam
FCC ID	2AJAYJP-LEN
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(16QAM Uplink is not supported)/LTE WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5GHz 802.11a/n HT20/HT40 WLAN5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR Bluetooth v4.0 LE
IMEI Code	Conducted: 357864060008503 Radiation: 357864060008628 ERP/EIRP: NA
HW Version	P2
SW Version	X5_S_WIN10_1028.20_21_testos
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 26 : 824.7MHz ~ 848.3 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz
Rx Frequency	LTE Band 26 : 869.7MHz ~ 893.3MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz
Bandwidth	LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 26 : 21.98 dBm LTE Band 41 : 21.66 dBm



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Emission Designator

LTE Band 26	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	1M10G7D	-	0.0205	1M10W7D	-	0.0174
3	2M73G7D	-	0.0218	2M72W7D	-	0.0160
5	4M50G7D	-	0.0231	4M49W7D	-	0.0190
10	9M17G7D	0.0084	0.0197	9M01W7D	-	0.0169
15	13M5G7D	-	0.0178	13M4W7D	-	0.0141
Ch26765	13M3G7D	-	0.0104	13M4W7D	-	0.0085
LTE Band 41	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	4M50G7D	-	0.0662	4M50W7D	-	0.0585
10	9M07G7D	0.0077	0.0647	9M05W7D	-	0.0478
15	13M4G7D	-	0.0652	13M4W7D	-	0.0498
20	18M4G7D	-	0.0651	18M3W7D	-	0.0470

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595
Test Site No.	Sporton Site No. TH01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No. 03CH02-SZ	FCC Registration No. 566869

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 27(M)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	26	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	26					✓	-	✓	✓	✓		✓	✓	✓	✓
	41	-	-				✓	✓	✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	26	✓	✓	✓	✓	✓	-	✓	✓			✓	✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted Band Edge	26	✓	✓	✓	✓	✓	-	✓	✓	✓		✓	✓		✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	26	✓	✓	✓	✓	✓	-	✓	✓	✓	✓		✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Frequency Stability	26				✓		-	✓				✓		✓	
	41	-	-		✓			✓				✓		✓	
E.R.P./ E.I.R.P.	26	✓	✓	✓	✓	✓	-	✓	✓	✓	✓		✓	✓	✓
	41	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	26	✓	✓	✓	✓	✓	-	✓		✓				✓	
	41	-	-	✓	✓	✓	✓	✓		✓				✓	
Note	- The mark "✓" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

LTE Band 26

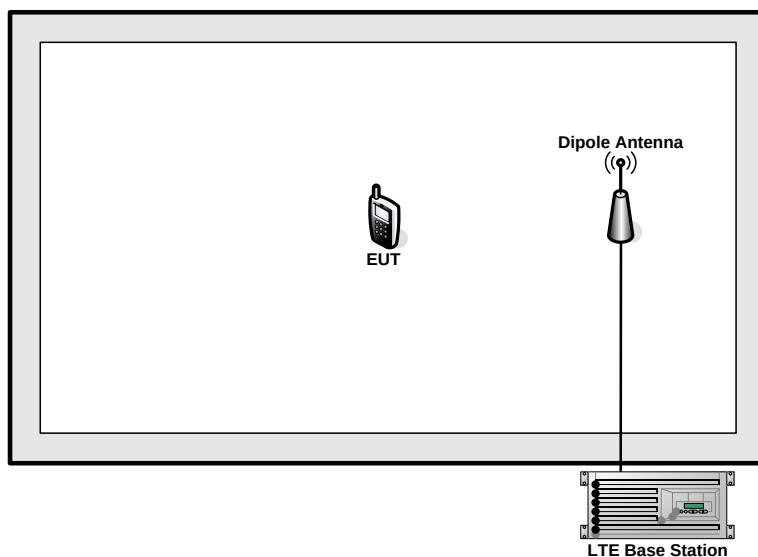

LTE Band 41

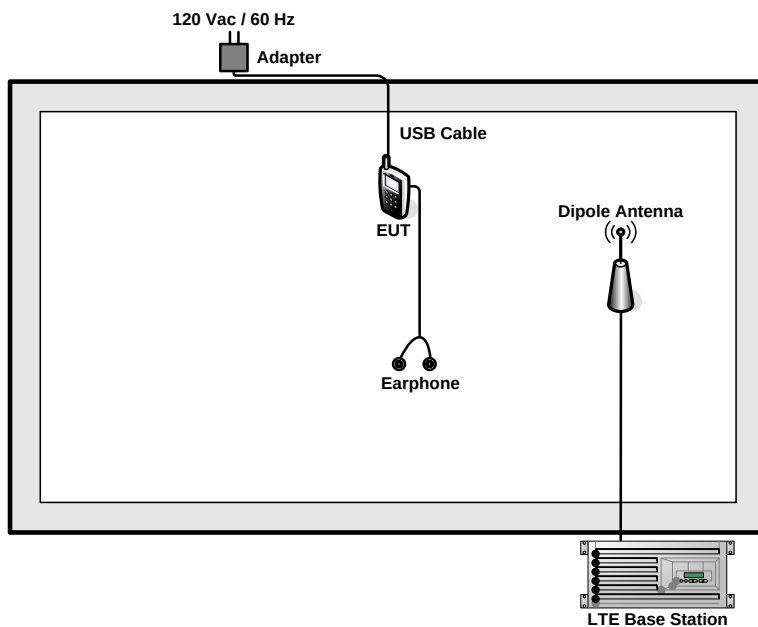

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Adapter	Lenovo	C-P35	FCC DoC	N/A	N/A
4.	USB Cable	Motorola	SKN6378A	FCC DoC	Shielded, 1.2 m	N/A
5.	Earphone	Lenovo	SH100	N/A	Shielded, 1.0 m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)}\end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	39750	40620	41490
	Frequency	2506	2593	2680
15	Channel	39725	40620	41515
	Frequency	2503.5	2593	2682.5
10	Channel	39700	40620	41540
	Frequency	2501	2593	2685
5	Channel	39675	40620	41565
	Frequency	2498.5	2593	2687.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

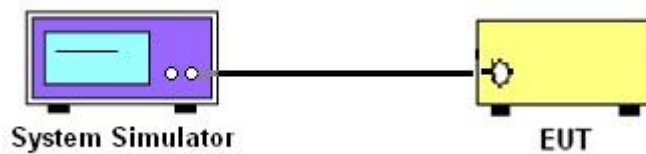

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

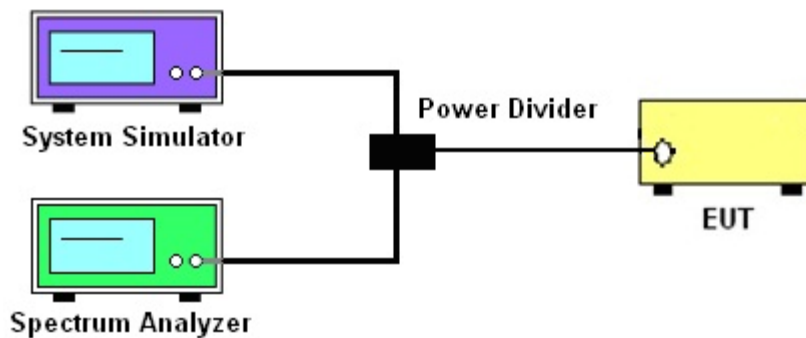

3.2.3 Frequency Stability

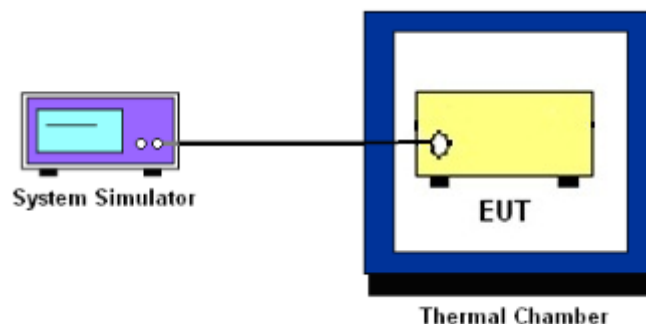

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For LTE Band 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.
11. For Band 41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

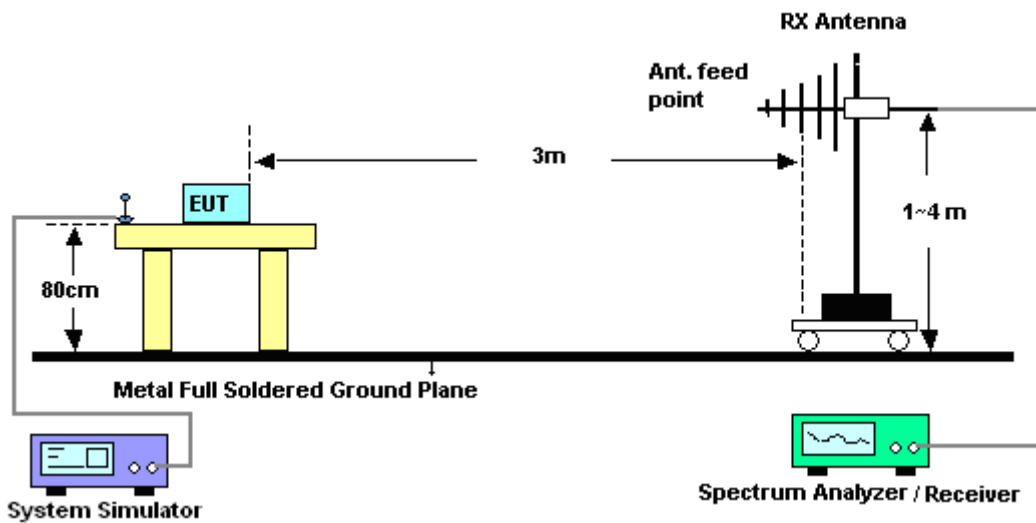

4.2.2 For radiated test above 1GHz

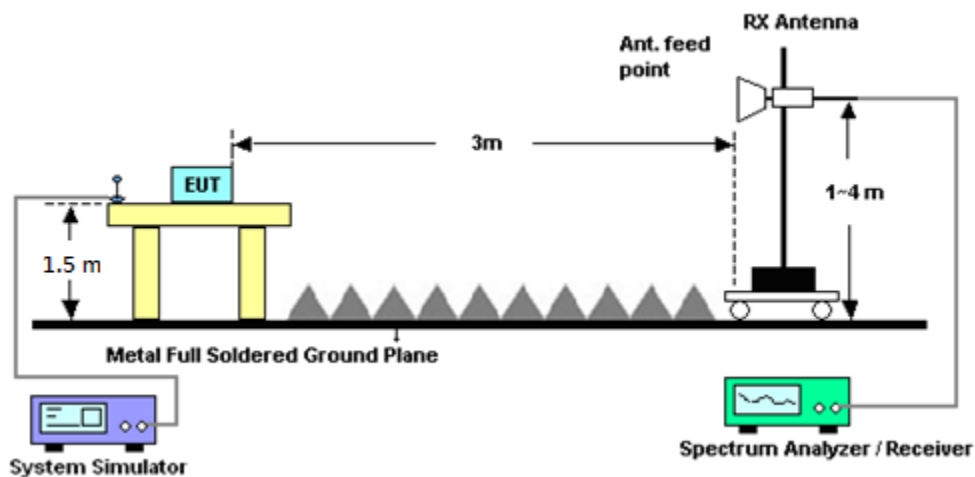

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Effective Radiated Power and Effective Isotropic Radiated Power

4.4.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 26.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 41.

4.4.2 Test Procedures

1. The EUT was placed on a non-conductive rotating platform (0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz) in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	LTE Average					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100

4.5 Radiated Spurious Emission

4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

12. For Band 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 07, 2016	Jul. 25, 2016~ Aug. 09, 2016	May 06, 2017	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSP30	101400	9kHz~40GHz	Jan. 12, 2016	Jul. 25, 2016~ Aug. 09, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion	LP-150U	H2014081803	-40~+150°C	Jul. 16, 2016	Jul. 25, 2016~ Aug. 09, 2016	Jul. 15, 2017	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz;Ma x 30dBm	Oct. 20, 2015	Aug. 04, 2016~ Aug. 05, 2016	Oct. 19, 2016	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	May 21, 2016	Aug. 04, 2016~ Aug. 05, 2016	May 20, 2017	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 11, 2016	Aug. 04, 2016~ Aug. 05, 2016	Jan. 10, 2017	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 17, 2015	Aug. 04, 2016~ Aug. 05, 2016	Aug. 16, 2016	Radiation (03CH02-SZ)
Amplifier	HP	8447F	3113A04622	9kHz~1300MHz / 30 dB	Jul. 16, 2016	Aug. 04, 2016~ Aug. 05, 2016	Jul. 15, 2017	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 20, 2015	Aug. 04, 2016~ Aug. 05, 2016	Oct. 19, 2016	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 16, 2016	Aug. 04, 2016~ Aug. 05, 2016	Jul. 15, 2017	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Aug. 04, 2016~ Aug. 05, 2016	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Aug. 04, 2016~ Aug. 05, 2016	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Aug. 04, 2016~ Aug. 05, 2016	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)



LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	21.17	21.22	21.44
15	1	37		21.65	21.82	21.38
15	1	74		21.58	21.38	21.47
15	36	0		20.55	20.66	20.72
15	36	20		20.69	20.80	20.54
15	36	39		20.83	20.64	20.56
15	75	0		20.57	20.70	20.54
15	1	0	16-QAM	20.37	20.51	20.41
15	1	37		20.68	20.60	20.53
15	1	74		20.43	20.15	20.16
15	36	0		19.68	19.72	19.61
15	36	20		19.74	19.78	19.49
15	36	39		19.80	19.55	19.64
15	75	0		19.63	19.67	19.59
10	1	0	QPSK	21.32	21.26	21.33
10	1	25		21.42	21.85	21.55
10	1	49		21.39	21.20	21.23
10	25	0		20.60	20.73	20.70
10	25	12		20.59	20.83	20.65
10	25	25		20.58	20.53	20.52
10	50	0		20.56	20.63	20.67
10	1	0	16-QAM	20.07	20.19	20.71
10	1	25		20.41	20.52	20.72
10	1	49		20.39	20.31	20.68
10	25	0		19.59	19.83	19.72
10	25	12		19.59	19.84	19.77
10	25	25		19.66	19.63	19.64
10	50	0		19.55	19.70	19.61



LTE Band 26 Maximum Average Power [dBm]						
5	1	0	QPSK	21.36	21.39	21.29
5	1	12		21.78	21.96	21.87
5	1	24		21.21	21.29	21.31
5	12	0		20.60	20.72	20.63
5	12	7		20.60	20.70	20.57
5	12	13		20.62	20.70	20.62
5	25	0		20.62	20.75	20.52
5	1	0	16-QAM	20.43	20.69	20.31
5	1	12		20.40	20.58	20.36
5	1	24		20.46	20.42	20.26
5	12	0		19.78	19.78	19.83
5	12	7		19.80	19.94	19.79
5	12	13		19.72	19.86	19.80
5	25	0		19.58	19.80	19.67
3	1	0	QPSK	21.33	21.63	21.56
3	1	8		21.30	21.98	21.68
3	1	14		21.18	21.42	21.35
3	8	0		20.51	20.75	20.69
3	8	4		20.48	20.71	20.53
3	8	7		20.40	20.63	20.51
3	15	0		20.50	20.63	20.57
3	1	0	16-QAM	20.71	20.75	20.51
3	1	8		20.53	20.87	20.71
3	1	14		20.57	20.74	20.57
3	8	0		19.34	19.88	19.67
3	8	4		19.57	19.74	19.71
3	8	7		19.60	19.87	19.67
3	15	0		19.37	19.65	19.65



LTE Band 26 Maximum Average Power [dBm]						
1.4	1	0	QPSK	21.26	21.67	21.60
1.4	1	3		21.59	21.83	21.61
1.4	1	5		21.41	21.65	21.49
1.4	3	0		21.33	21.68	21.61
1.4	3	1		21.23	21.90	21.62
1.4	3	3		21.32	21.66	21.41
1.4	6	0		20.78	20.64	20.58
1.4	1	0	16-QAM	20.31	20.83	20.04
1.4	1	3		20.37	20.44	20.46
1.4	1	5		20.40	20.44	20.35
1.4	3	0		20.10	20.75	20.56
1.4	3	1		20.05	21.03	20.67
1.4	3	3		20.01	20.72	20.58
1.4	6	0		19.66	19.68	19.56



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	20.77	20.90	21.27
20	1	49		21.28	21.25	21.66
20	1	99		20.95	21.03	21.28
20	50	0		20.39	20.35	20.52
20	50	24		20.14	20.15	20.47
20	50	50		20.38	20.04	20.37
20	100	0		20.16	20.10	20.50
20	1	0	16-QAM	19.53	19.24	19.91
20	1	49		19.78	20.30	20.61
20	1	99		19.60	19.79	20.04
20	50	0		19.19	19.11	19.54
20	50	24		19.23	19.25	19.48
20	50	50		19.08	19.14	19.29
20	100	0		19.06	19.19	19.63
15	1	0	QPSK	20.83	20.80	21.33
15	1	37		21.03	21.19	21.50
15	1	74		20.87	21.00	21.11
15	36	0		20.08	20.10	20.64
15	36	20		20.06	20.16	20.41
15	36	39		20.05	20.22	20.44
15	75	0		20.09	20.13	20.56
15	1	0	16-QAM	19.56	19.56	19.96
15	1	37		20.15	20.16	20.51
15	1	74		19.91	19.90	19.60
15	36	0		19.10	19.11	19.59
15	36	20		19.30	19.27	19.47
15	36	39		19.00	19.09	19.32
15	75	0		18.99	19.15	19.60



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	20.92	20.90	21.33
10	1	25		21.08	21.06	21.41
10	1	49		21.01	20.89	21.18
10	25	0		20.05	20.09	20.59
10	25	12		20.06	20.21	20.42
10	25	25		20.05	20.19	20.31
10	50	0		20.08	20.15	20.38
10	1	0	16-QAM	19.50	19.48	19.81
10	1	25		20.14	19.88	20.64
10	1	49		19.50	19.76	19.62
10	25	0		19.25	19.26	19.70
10	25	12		19.26	19.41	19.63
10	25	25		19.26	19.28	19.22
10	50	0		19.07	19.14	19.50
5	1	0	QPSK	20.83	20.77	21.05
5	1	12		20.95	21.23	21.34
5	1	24		20.79	20.78	21.00
5	12	0		20.03	20.07	20.60
5	12	7		20.09	20.24	20.60
5	12	13		20.02	20.09	20.33
5	25	0		20.00	20.06	20.28
5	1	0	16-QAM	19.80	19.70	19.71
5	1	12		20.07	20.02	20.36
5	1	24		19.45	19.74	19.52
5	12	0		18.99	19.05	19.31
5	12	7		19.04	19.32	19.37
5	12	13		18.94	19.12	19.20
5	25	0		19.29	19.00	19.62

**Peak-to-Average Ratio**


Mode	LTE Band 26 / 15MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.38	4.84	5.22	5.86	PASS
Middle CH	4.49	4.93	5.19	5.88	
Highest CH	4.17	5.28	5.13	6.12	

Mode	LTE Band 41 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	6.09	5.48	5.42	6.64	PASS
Middle CH	6.43	7.83	5.62	6.55	
Highest CH	4.64	6.09	5.59	8.41	




LTE Band 26 / 15MHz / QPSK

Lowest Channel / 1RB

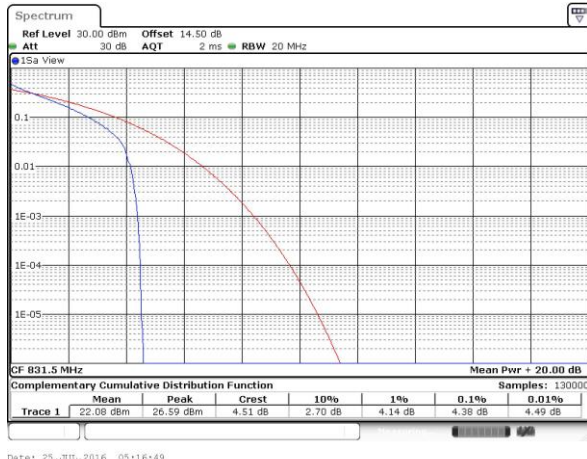


Lowest Channel / Full RB

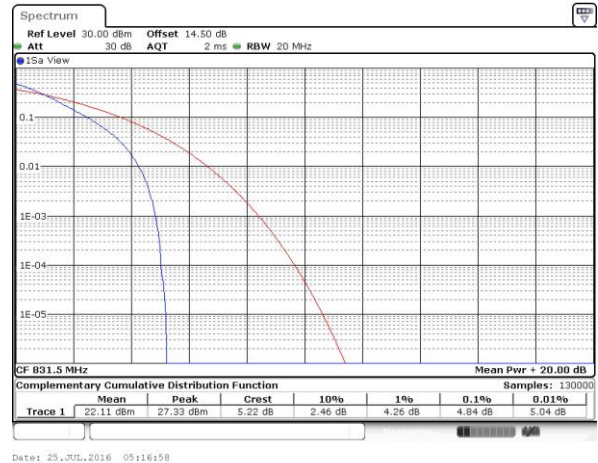


Middle Channel / 1RB




Middle Channel / Full RB

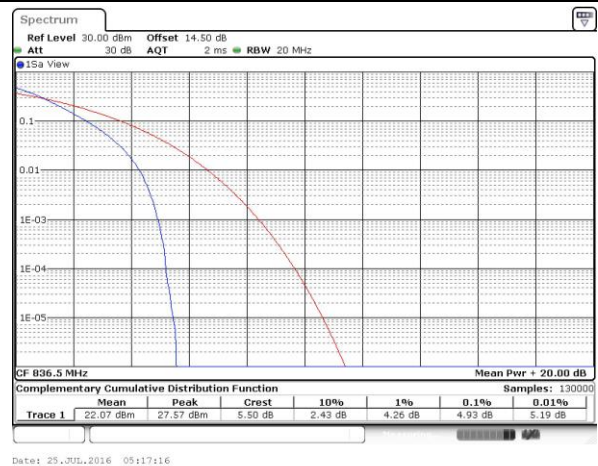

Highest Channel / 1RB

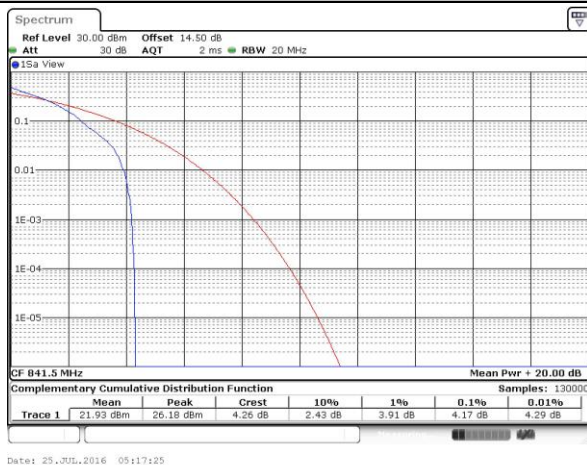


Highest Channel / Full RB

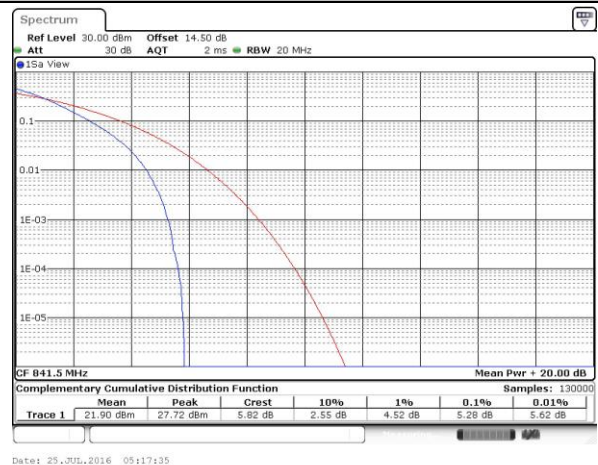




LTE Band 26 / 15MHz / 16QAM


Lowest Channel / 1RB

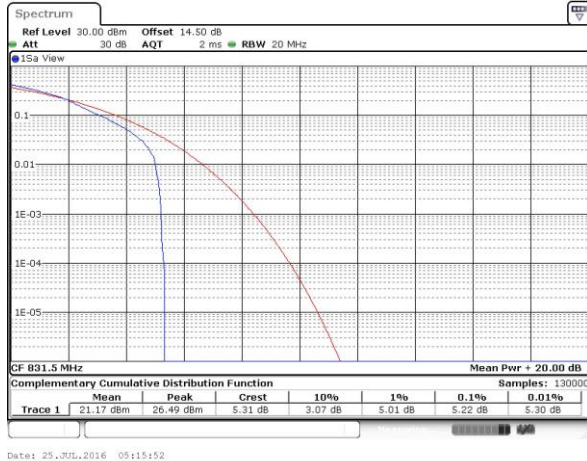


Lowest Channel / Full RB

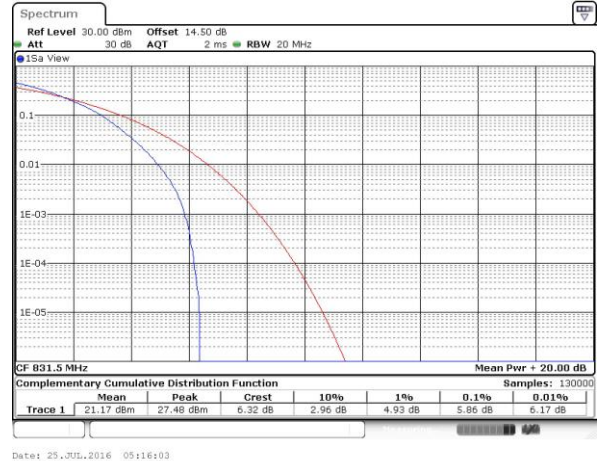


Middle Channel / 1RB

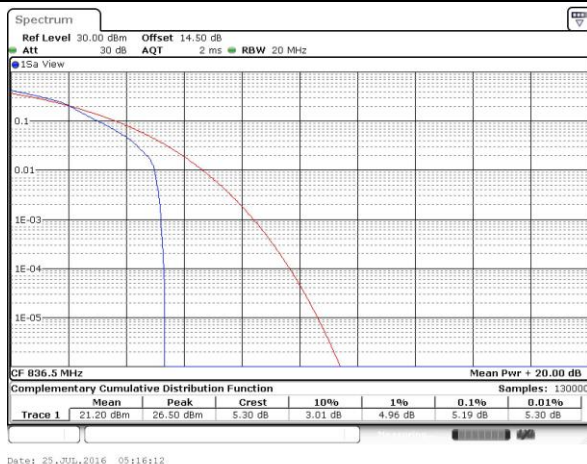


Middle Channel / Full RB

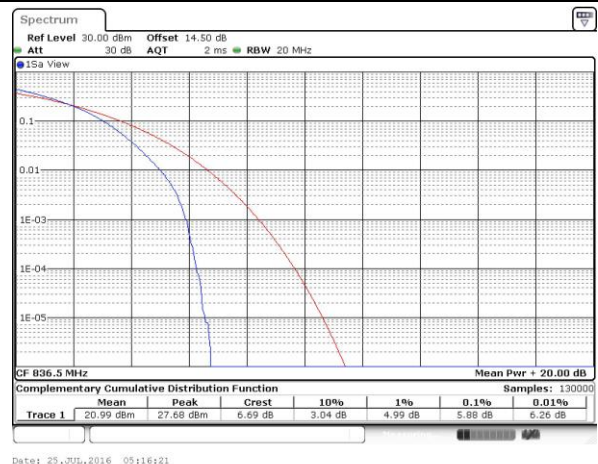

Highest Channel / 1RB

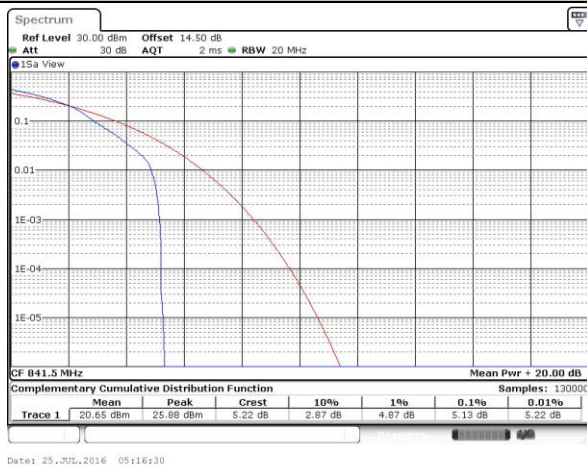


Highest Channel / Full RB

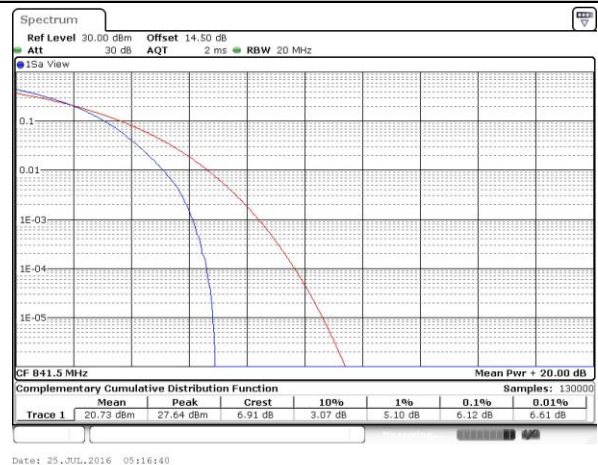




LTE Band 41 / 20MHz / QPSK


Lowest Channel / 1RB

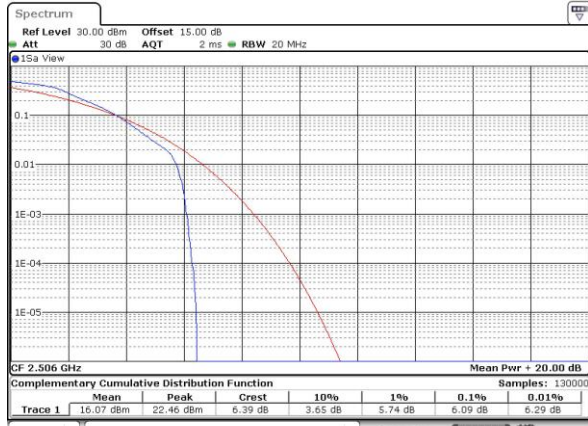

Lowest Channel / Full RB

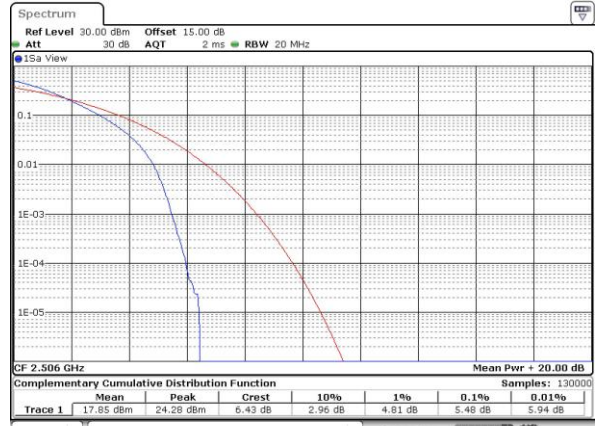


Middle Channel / 1RB

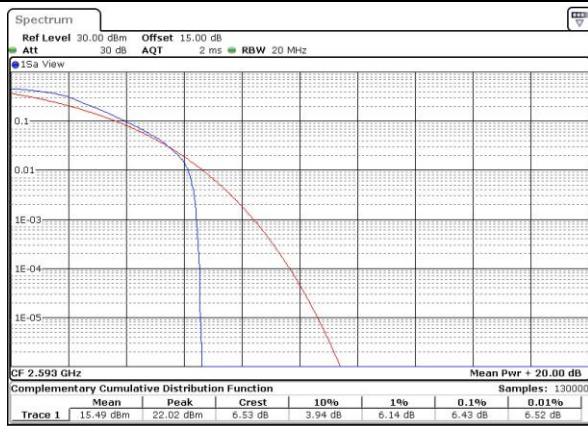

Middle Channel / Full RB



Highest Channel / 1RB

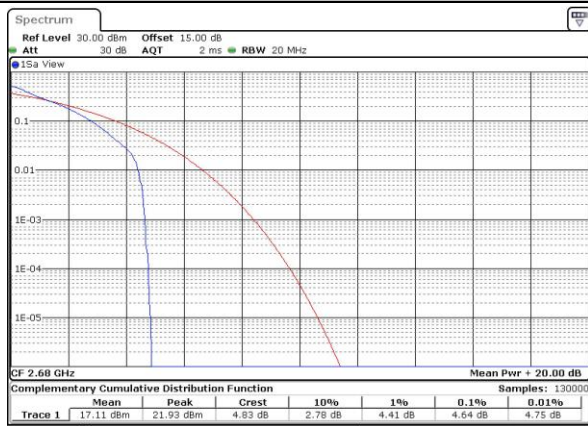


Highest Channel / Full RB






LTE Band 41 / 20MHz / 16QAM


Lowest Channel / 1RB

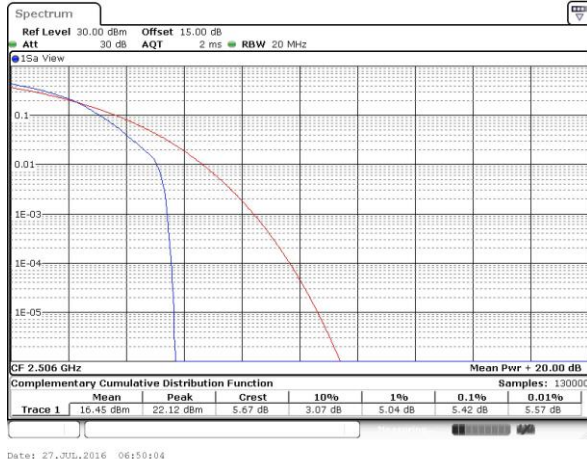


Lowest Channel / Full RB

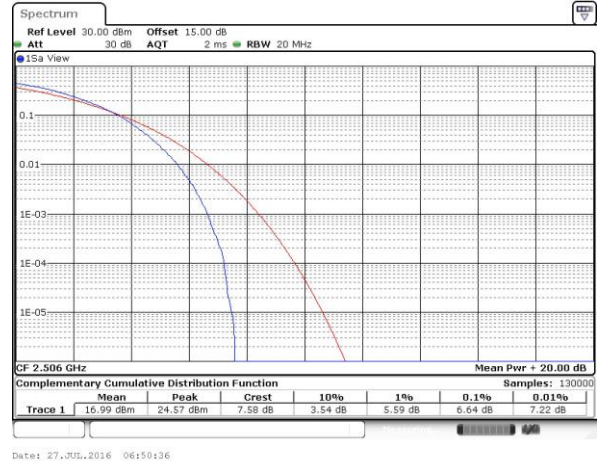


Middle Channel / 1RB

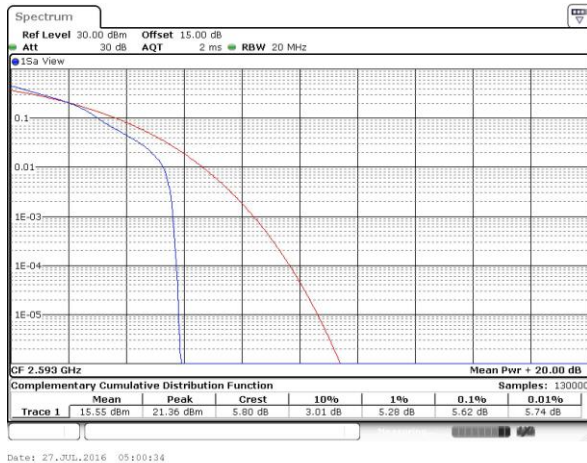


Middle Channel / Full RB

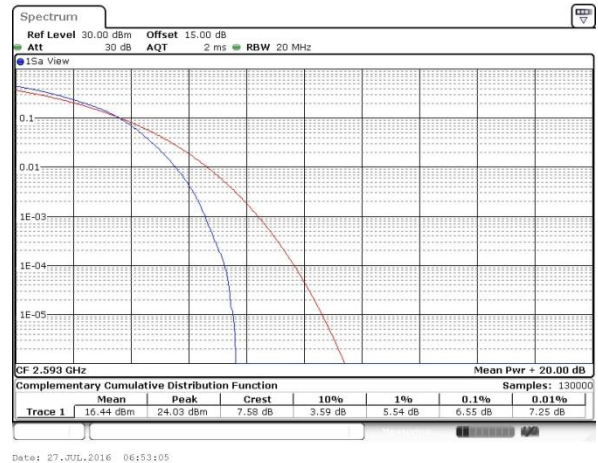

Highest Channel / 1RB

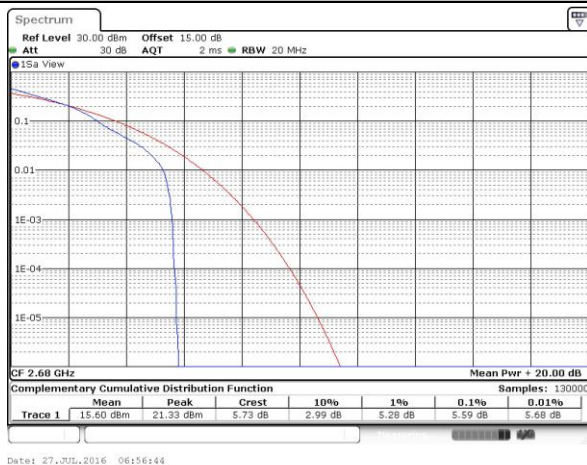

Highest Channel / Full RB

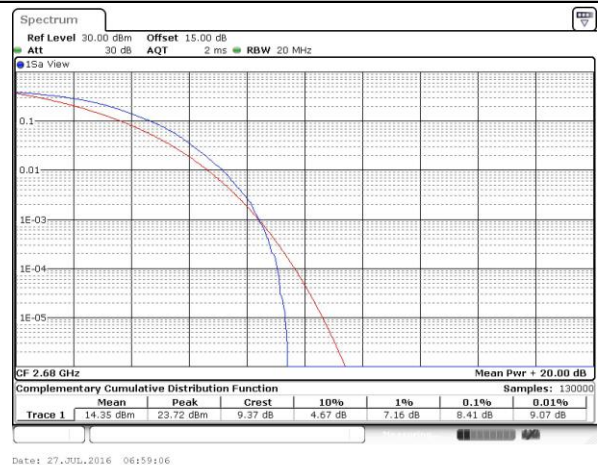

**26dB Bandwidth**


Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		Ch26765	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.28	1.29	3.05	3.02	4.80	4.90	9.69	9.73	14.18	14.30	14.21	14.57
Middle CH	1.29	1.27	3.01	3.01	4.98	4.93	9.79	9.83	14.27	14.21	-	-
Highest CH	1.26	1.27	2.97	3.03	4.93	4.90	9.87	9.87	14.33	14.36	-	-

Mode	LTE Band 41 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	5.48	4.82	9.61	9.83	14.21	14.33	20.14	20.06
Middle CH	-	-	-	-	4.92	4.83	9.77	9.65	14.30	14.27	20.06	20.10
Highest CH	-	-	-	-	4.90	4.84	9.79	9.71	14.15	15.32	19.90	20.14




LTE Band 26

Lowest Channel / 1.4MHz / QPSK

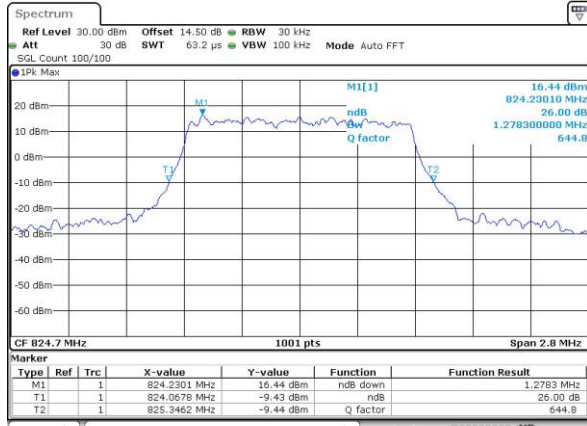


Date: 25.JUL.2016 04:27:40

Lowest Channel / 1.4MHz / 16QAM

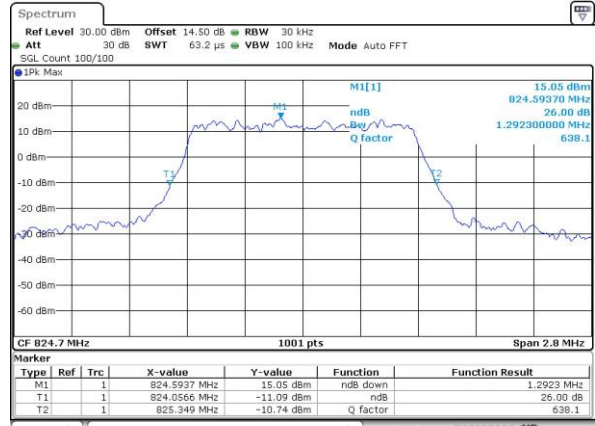


Date: 25.JUL.2016 04:27:29

Middle Channel / 1.4MHz / QPSK

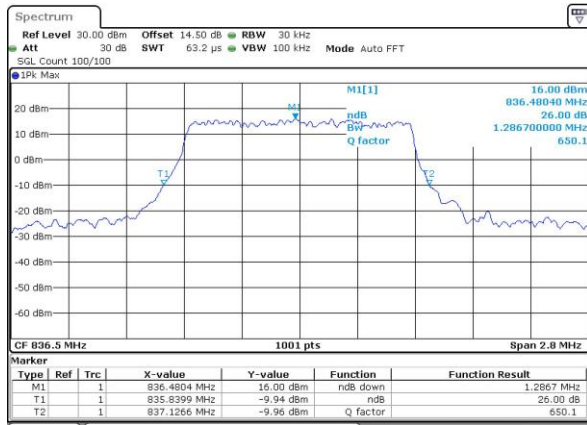


Date: 25.JUL.2016 04:38:01

Middle Channel / 1.4MHz / 16QAM

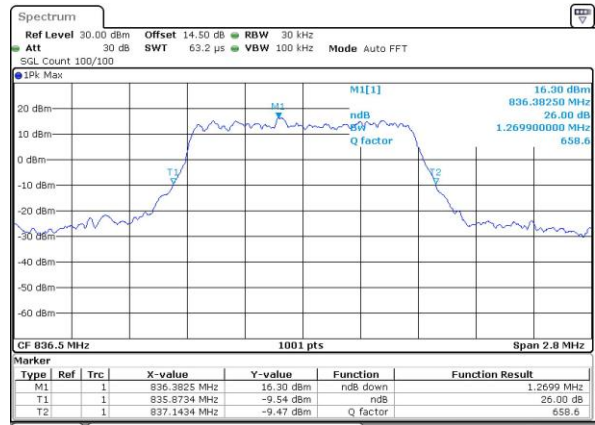


Date: 25.JUL.2016 04:38:12

Highest Channel / 1.4MHz / QPSK

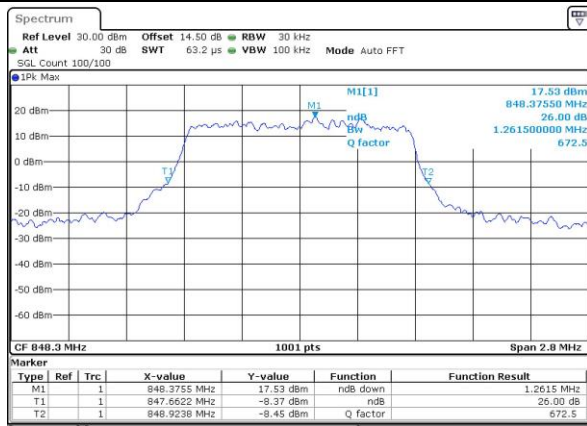

Date: 25.JUL.2016 04:40:38

Highest Channel / 1.4MHz / 16QAM

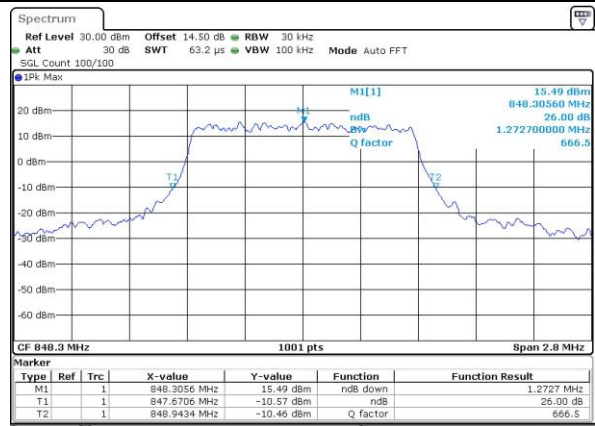


Date: 25.JUL.2016 04:40:48




LTE Band 26

Lowest Channel / 3MHz / QPSK

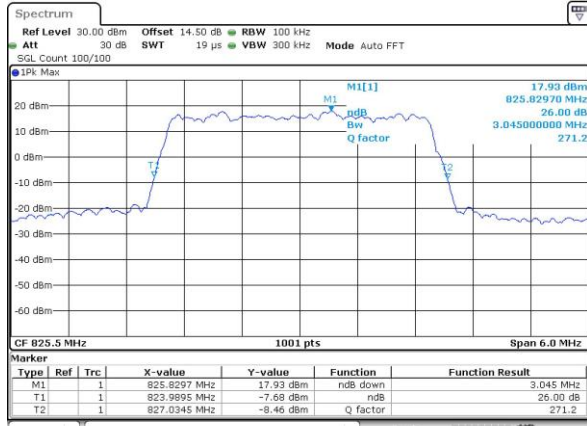


Date: 25.JUL.2016 04:43:14

Lowest Channel / 3MHz / 16QAM

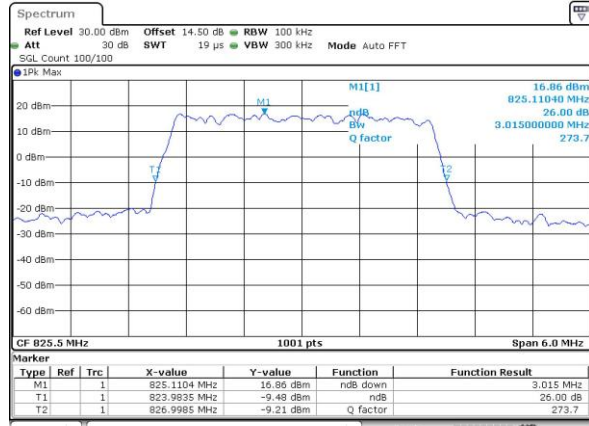


Date: 25.JUL.2016 04:43:25

Middle Channel / 3MHz / QPSK

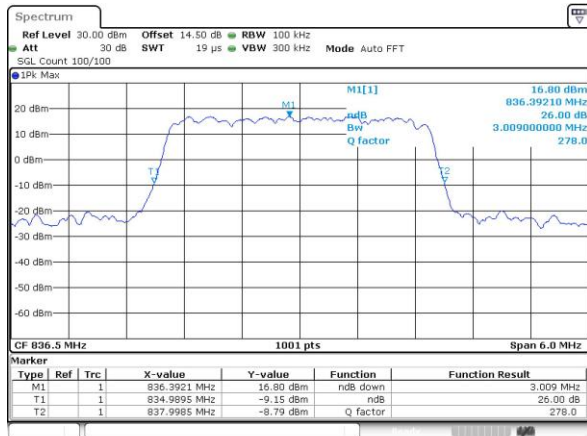


Date: 25.JUL.2016 04:45:01

Middle Channel / 3MHz / 16QAM

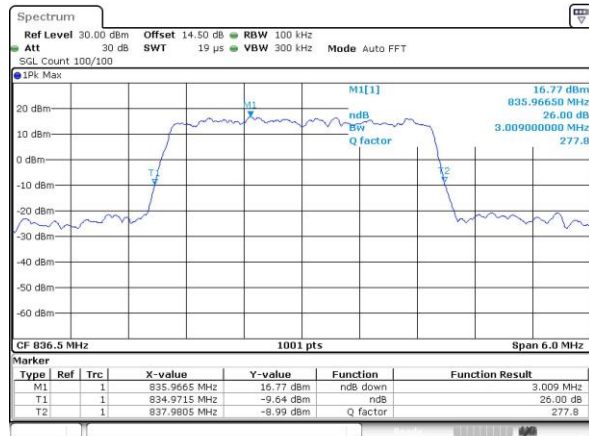


Date: 25.JUL.2016 04:46:01

Highest Channel / 3MHz / QPSK

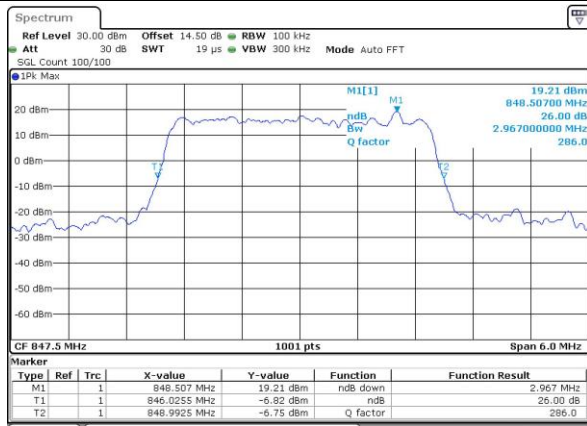

Date: 25.JUL.2016 04:48:27

Highest Channel / 3MHz / 16QAM

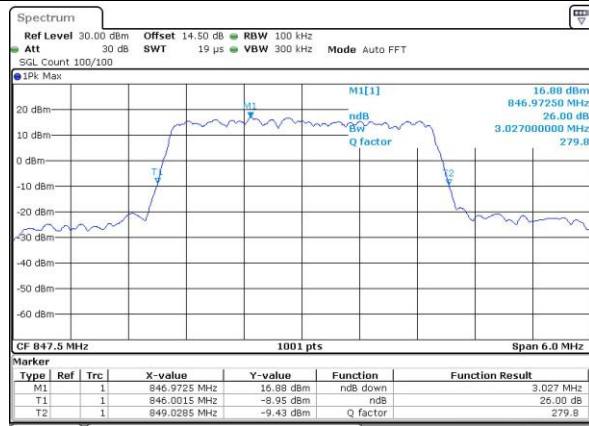


Date: 25.JUL.2016 04:48:37




LTE Band 26

Lowest Channel / 5MHz / QPSK

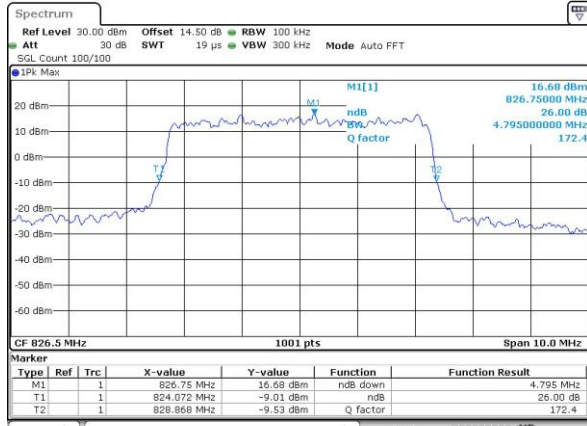


Date: 25.JUL.2016 04:51:03

Lowest Channel / 5MHz / 16QAM

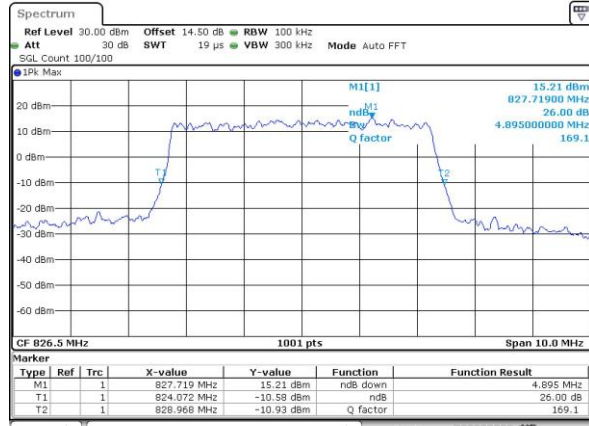


Date: 25.JUL.2016 04:51:14

Middle Channel / 5MHz / QPSK

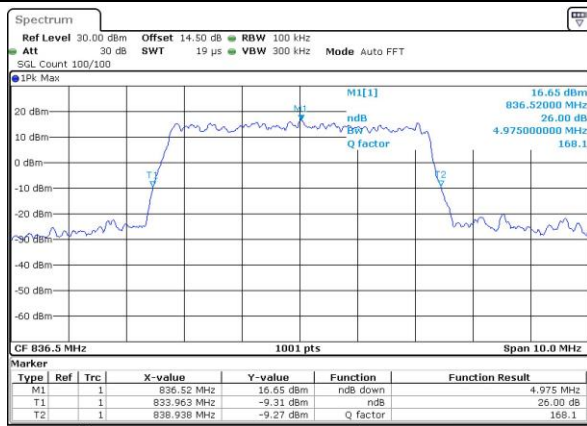


Date: 25.JUL.2016 04:53:39

Middle Channel / 5MHz / 16QAM

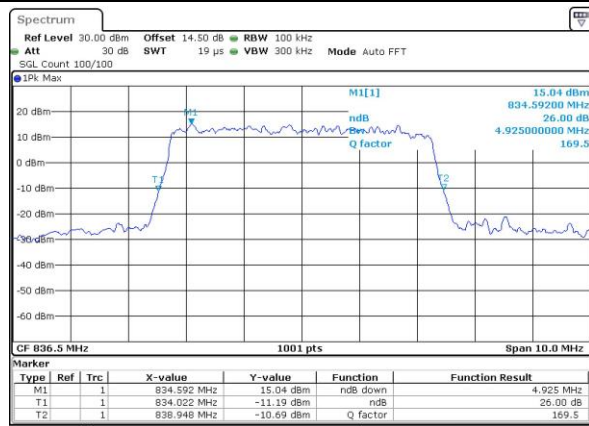


Date: 25.JUL.2016 04:53:49

Highest Channel / 5MHz / QPSK

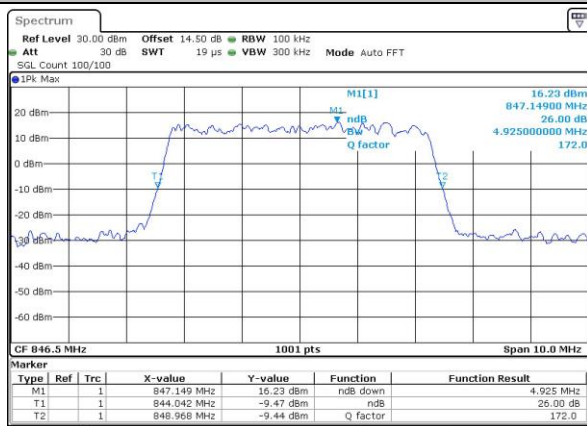

Date: 25.JUL.2016 04:56:15

Highest Channel / 5MHz / 16QAM

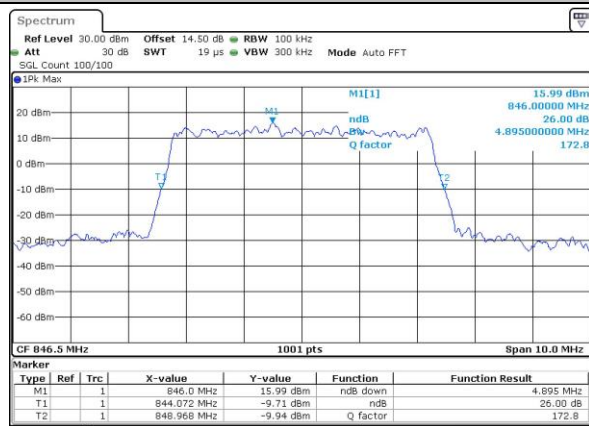


Date: 25.JUL.2016 04:56:25




LTE Band 26


Lowest Channel / 10MHz / QPSK

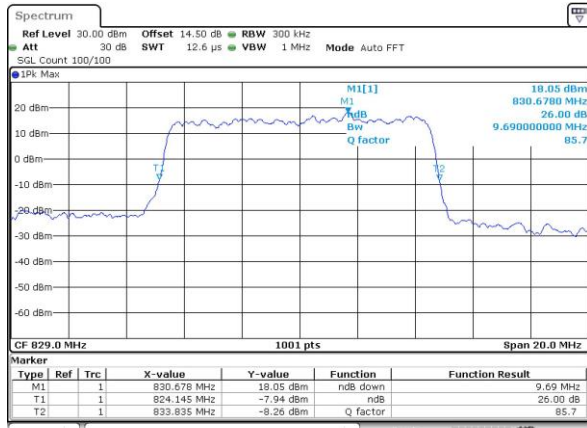


Lowest Channel / 10MHz / 16QAM

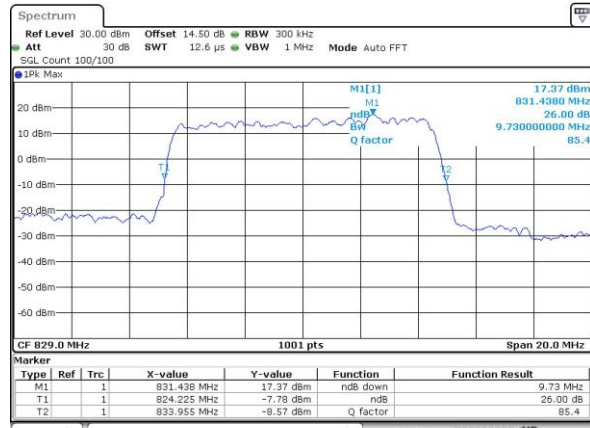


Middle Channel / 10MHz / QPSK

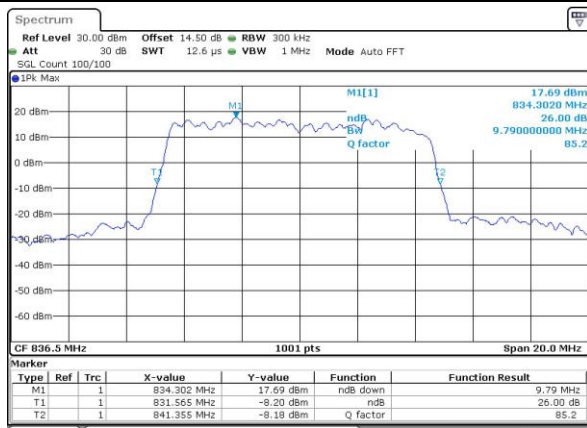


Middle Channel / 10MHz / 16QAM

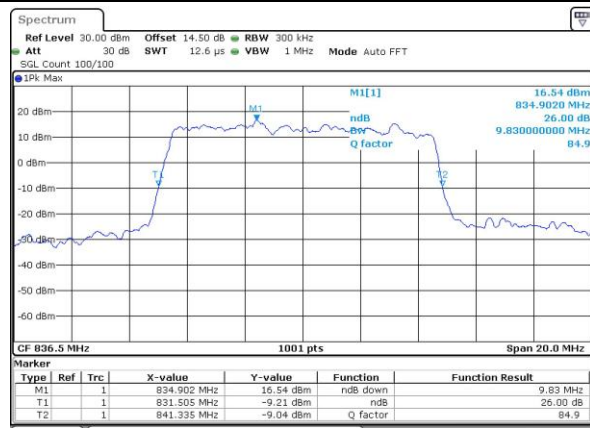

Highest Channel / 10MHz / QPSK

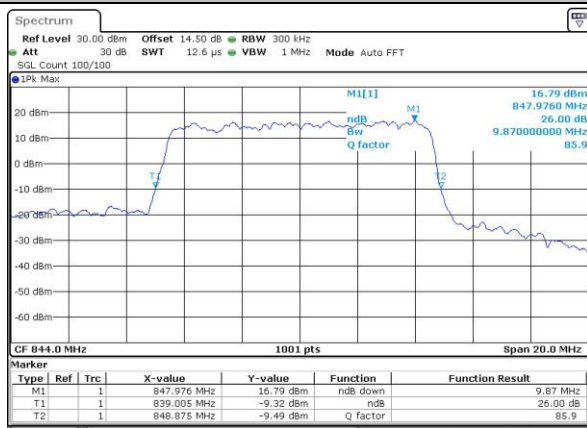


Highest Channel / 10MHz / 16QAM

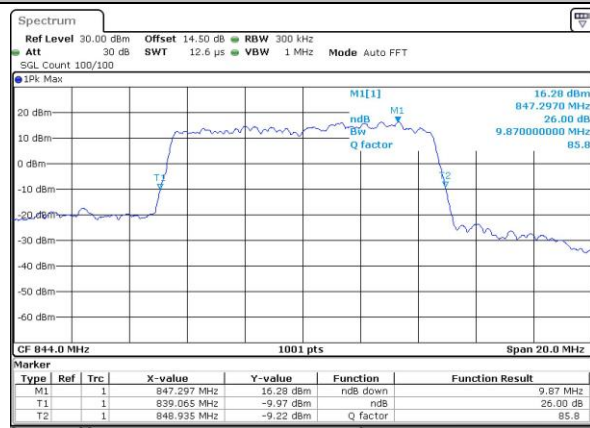




LTE Band 26

Lowest Channel / 15MHz / QPSK

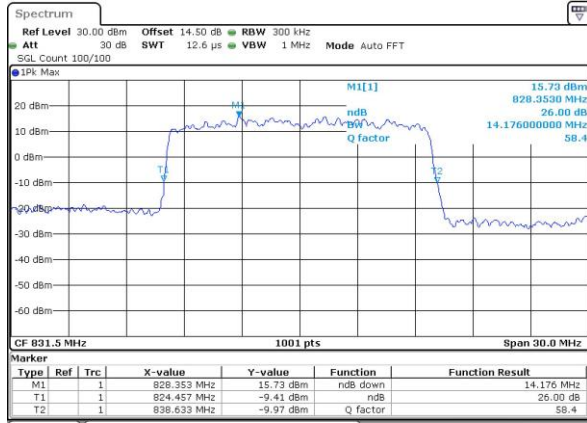


Date: 25.JUL.2016 05:06:40

Lowest Channel / 15MHz / 16QAM

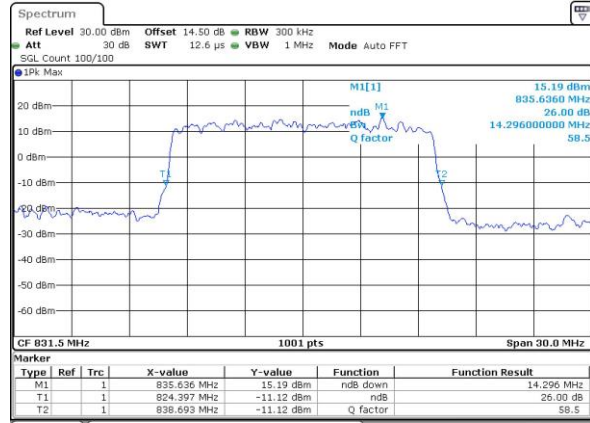


Date: 25.JUL.2016 05:06:50

Middle Channel / 15MHz / QPSK

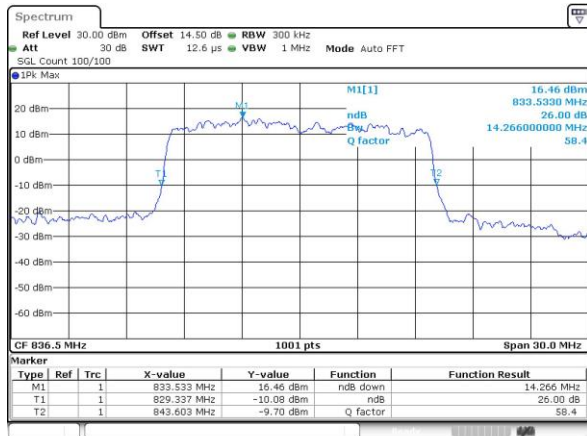


Date: 25.JUL.2016 05:09:16

Middle Channel / 15MHz / 16QAM

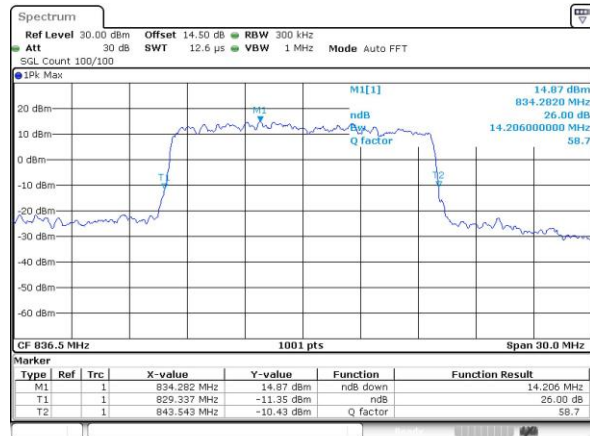


Date: 25.JUL.2016 05:09:26

Highest Channel / 15MHz / QPSK

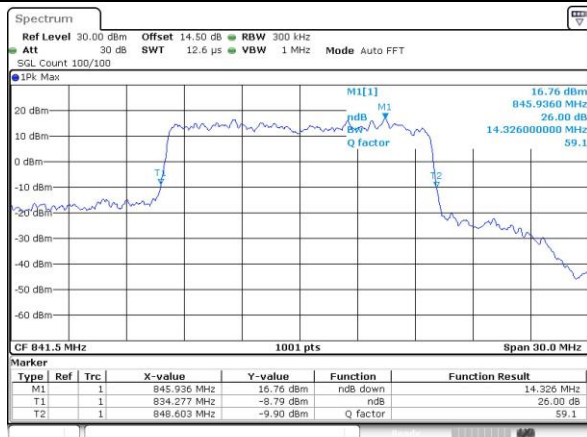

Date: 25.JUL.2016 05:11:52

Highest Channel / 15MHz / 16QAM

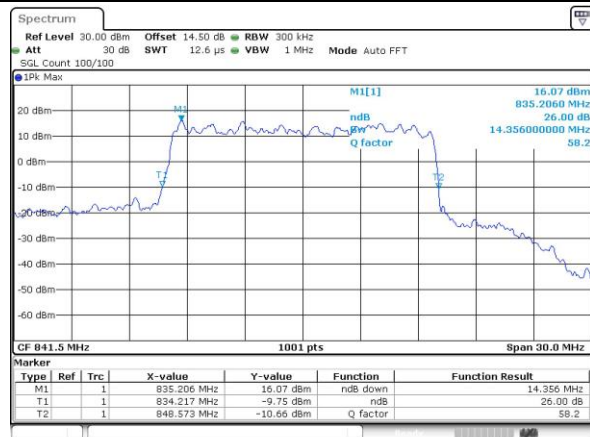


Date: 25.JUL.2016 05:12:02




LTE Band 26

Channel 26765 / 15MHz / QPSK

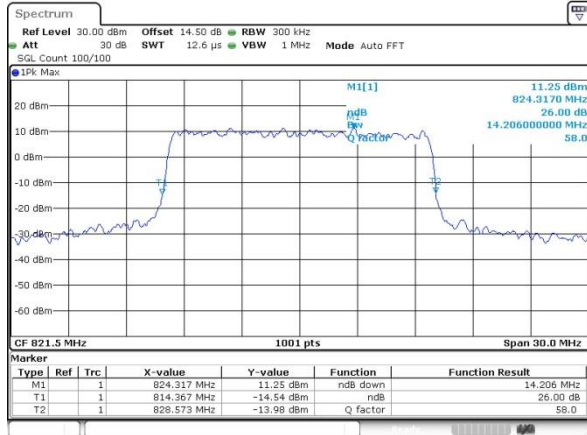

Date: 9.AUG.2016 09:45:22

Channel 26765 / 15MHz / 16QAM

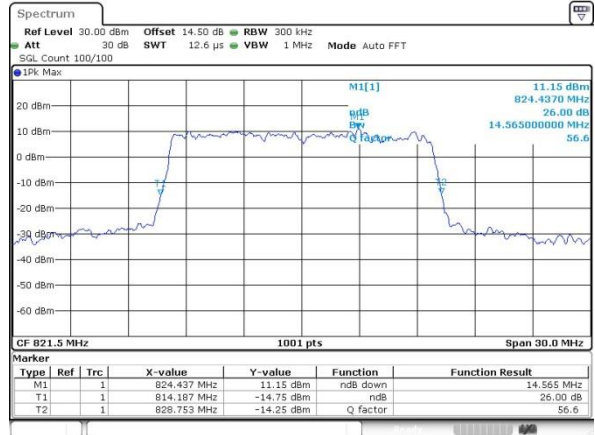


Date: 9.AUG.2016 09:45:38




LTE Band 41

Lowest Channel / 5MHz / QPSK

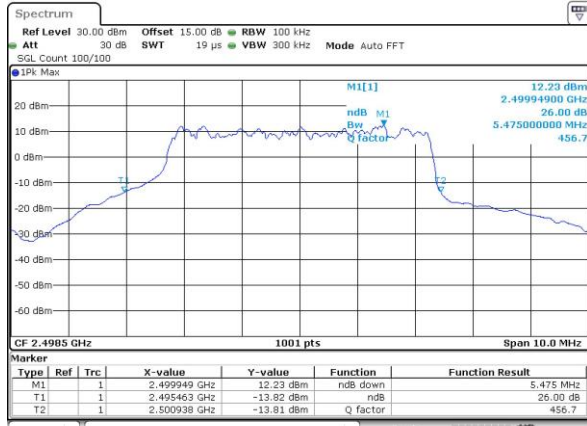


Date: 27.JUL.2016 04:51:56

Lowest Channel / 5MHz / 16QAM

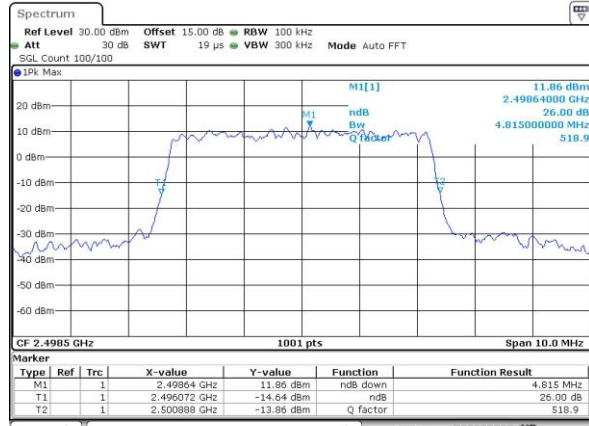


Date: 27.JUL.2016 04:52:07

Middle Channel / 5MHz / QPSK

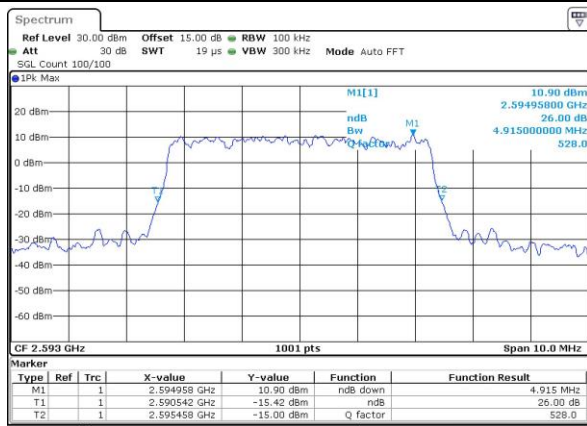


Date: 27.JUL.2016 04:52:39

Middle Channel / 5MHz / 16QAM

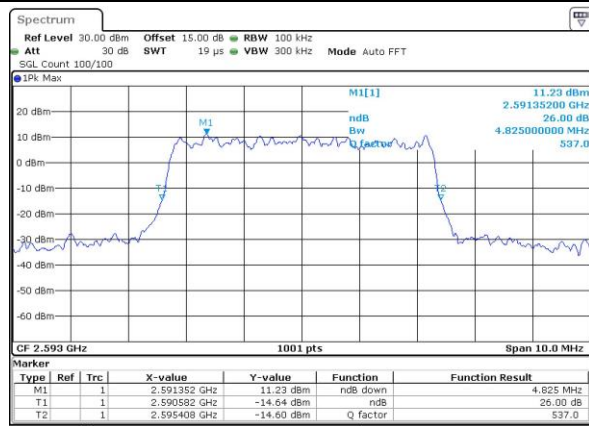


Date: 27.JUL.2016 04:52:49

Highest Channel / 5MHz / QPSK

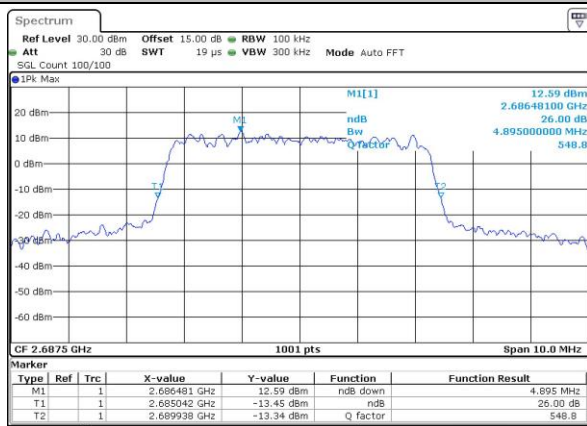

Date: 27.JUL.2016 04:53:21

Highest Channel / 5MHz / 16QAM

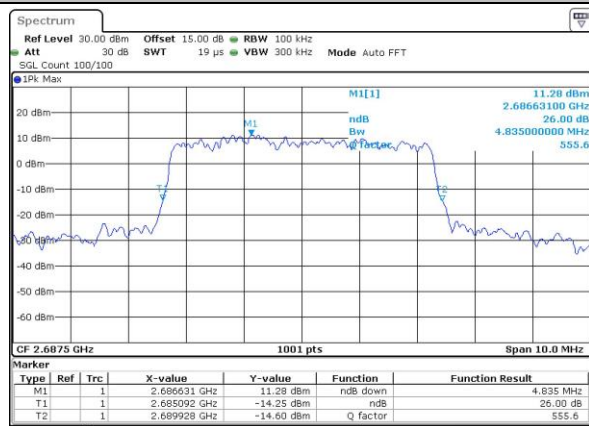


Date: 27.JUL.2016 04:53:32




LTE Band 41

Lowest Channel / 10MHz / QPSK

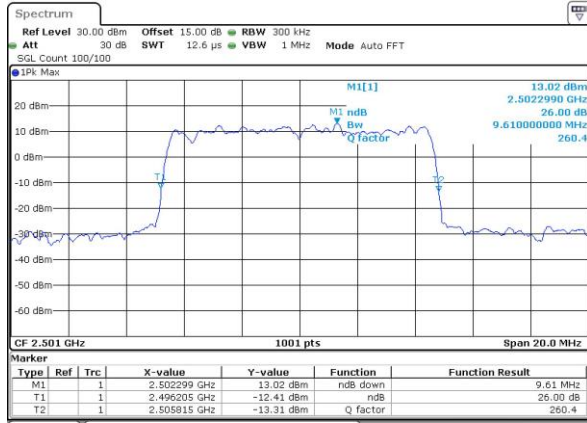


Date: 27.JUL.2016 04:54:03

Lowest Channel / 10MHz / 16QAM

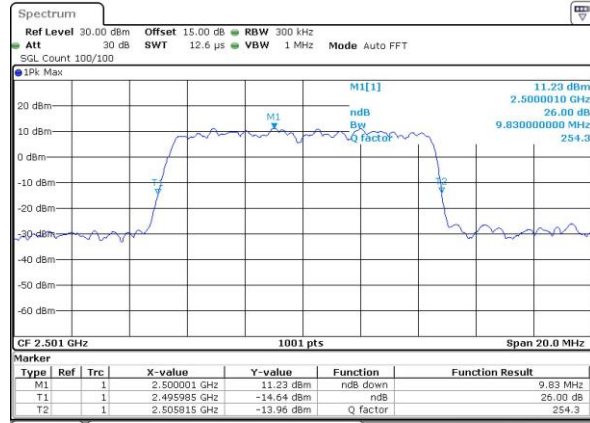


Date: 27.JUL.2016 04:54:14

Middle Channel / 10MHz / QPSK

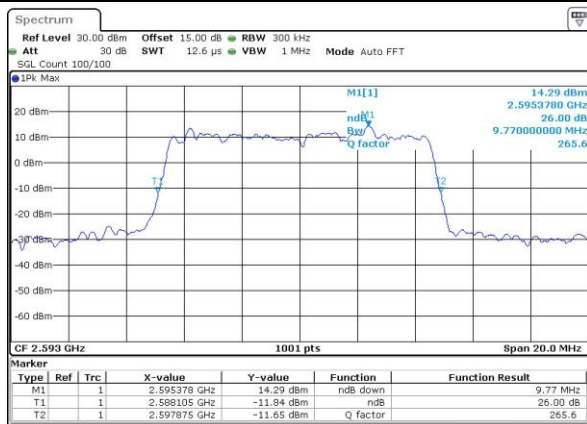


Date: 27.JUL.2016 04:54:46

Middle Channel / 10MHz / 16QAM

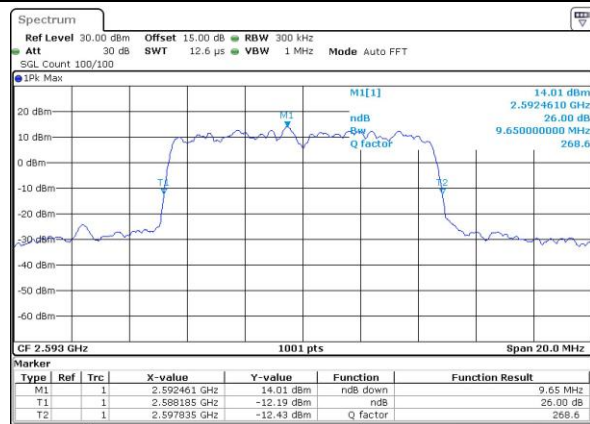


Date: 27.JUL.2016 04:54:56

Highest Channel / 10MHz / QPSK

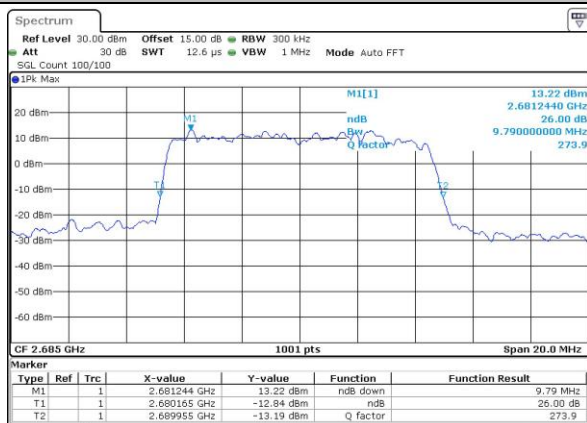

Date: 27.JUL.2016 04:55:28

Highest Channel / 10MHz / 16QAM

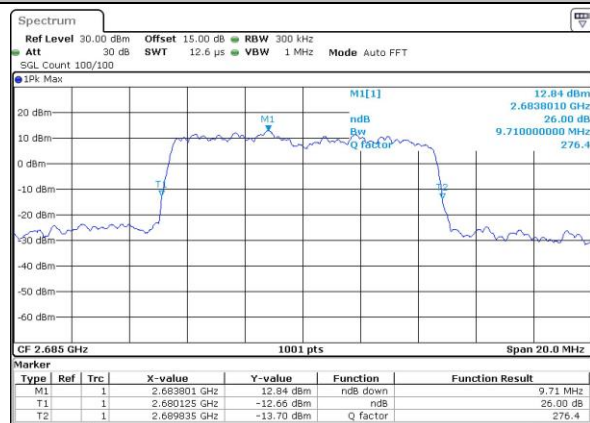


Date: 27.JUL.2016 04:55:39




LTE Band 41

Lowest Channel / 15MHz / QPSK

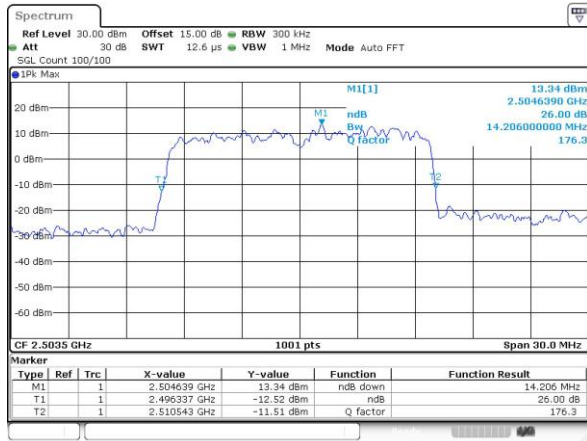


Date: 27.JUL.2016 04:56:11

Lowest Channel / 15MHz / 16QAM

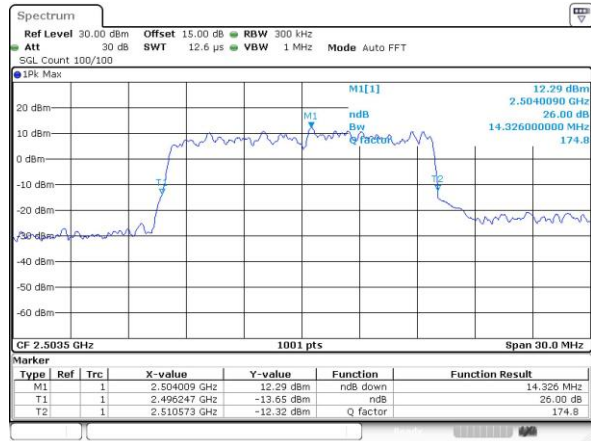


Date: 27.JUL.2016 04:56:21

Middle Channel / 15MHz / QPSK

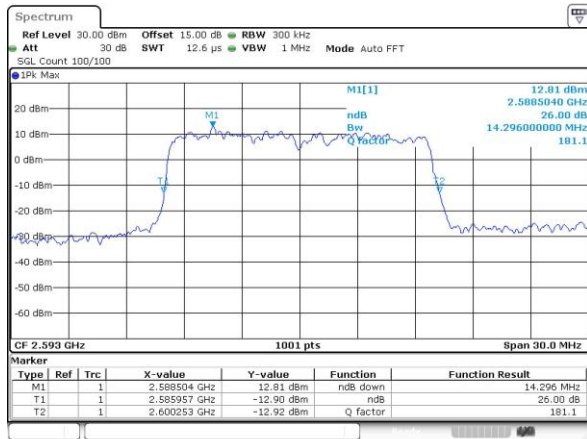


Date: 27.JUL.2016 04:56:53

Middle Channel / 15MHz / 16QAM

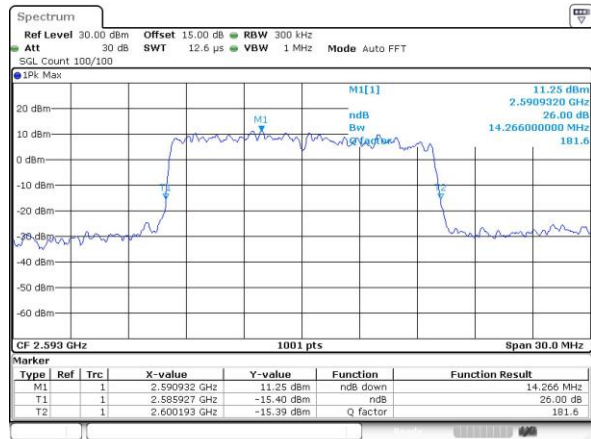


Date: 27.JUL.2016 04:57:04

Highest Channel / 15MHz / QPSK

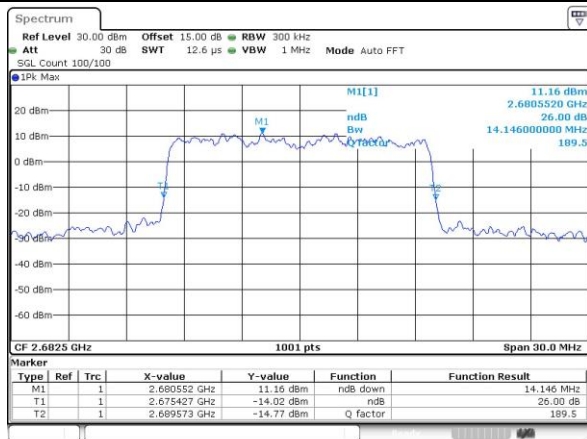

Date: 27.JUL.2016 04:57:36

Highest Channel / 15MHz / 16QAM

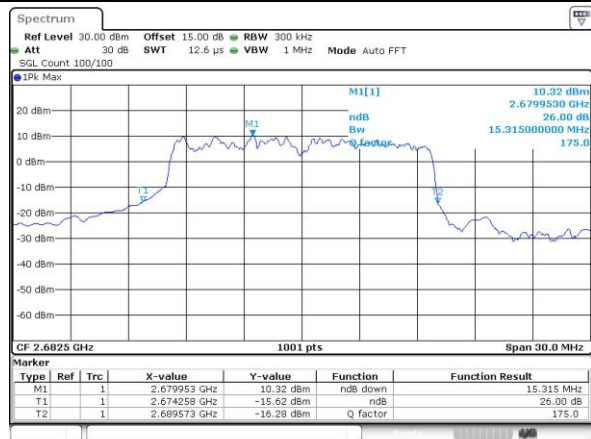


Date: 27.JUL.2016 04:57:46




LTE Band 41

Lowest Channel / 20MHz / QPSK

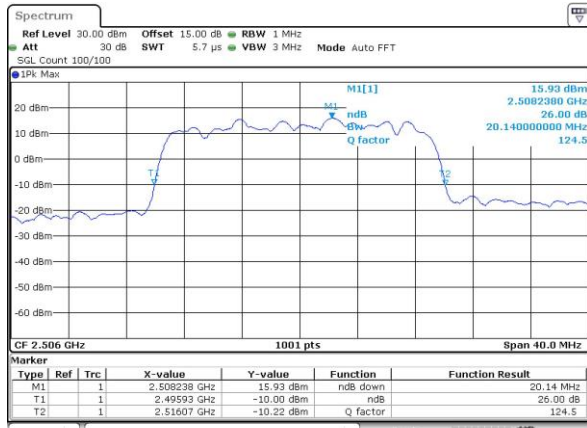


Date: 27.JUL.2016 04:58:18

Lowest Channel / 20MHz / 16QAM

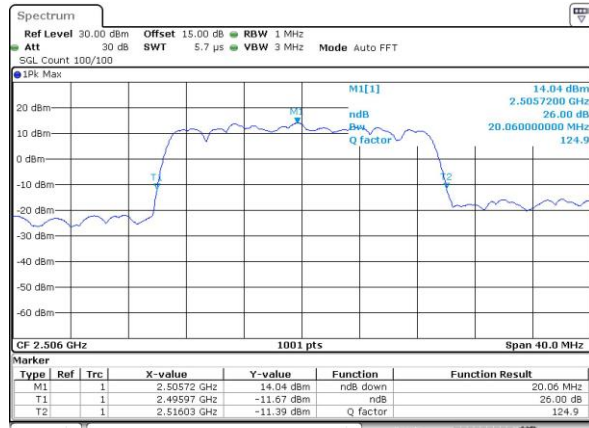


Date: 27.JUL.2016 04:58:29

Middle Channel / 20MHz / QPSK

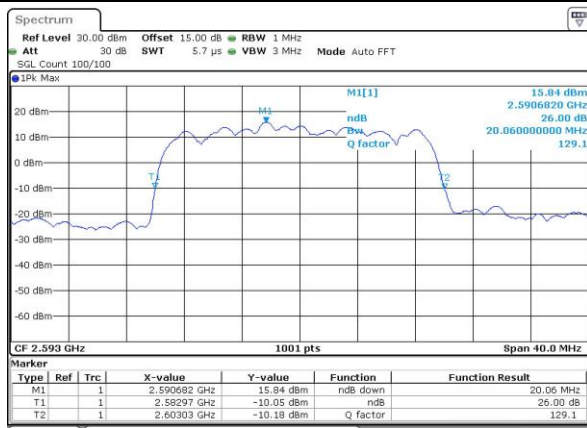


Date: 27.JUL.2016 04:59:01

Middle Channel / 20MHz / 16QAM

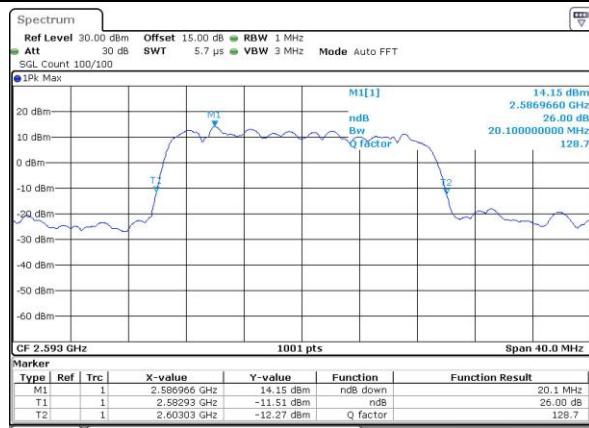


Date: 27.JUL.2016 04:59:11

Highest Channel / 20MHz / QPSK

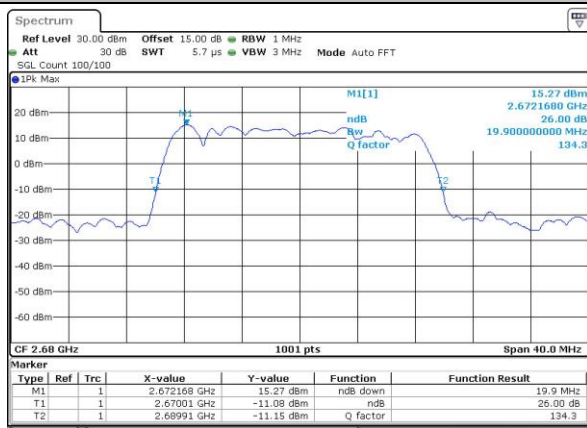

Date: 27.JUL.2016 04:59:43

Highest Channel / 20MHz / 16QAM

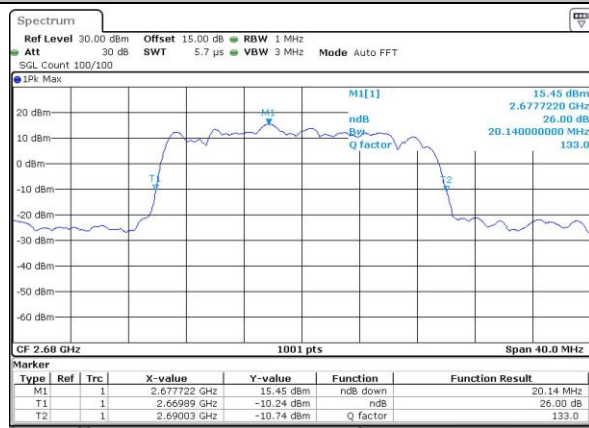

Date: 27.JUL.2016 04:59:54

**Occupied Bandwidth**


Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		Ch26765	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.10	1.09	2.73	2.72	4.49	4.49	9.17	9.01	13.46	13.37	13.34	13.43
Middle CH	1.10	1.10	2.71	2.70	4.50	4.48	8.99	8.95	13.43	13.43	-	-
Highest CH	1.10	1.09	2.70	2.69	4.50	4.47	9.07	9.01	13.43	13.40	-	-

Mode	LTE Band 41 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.50	4.48	9.01	8.99	13.43	13.37	18.26	18.34
Middle CH	-	-	-	-	4.50	4.50	9.05	9.05	13.43	13.34	18.42	18.22
Highest CH	-	-	-	-	4.49	4.48	9.07	9.03	13.37	13.31	18.06	18.22




LTE Band 26


Lowest Channel / 1.4MHz / QPSK

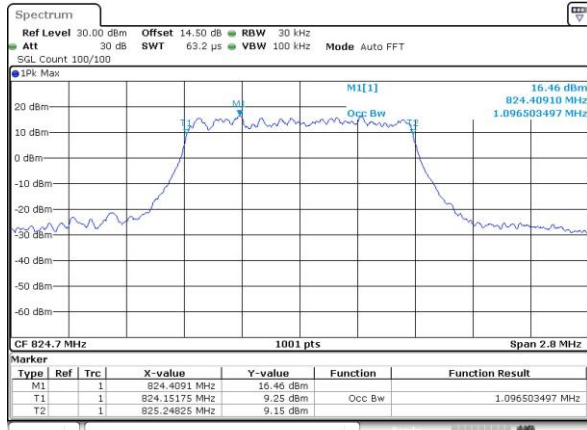


Lowest Channel / 1.4MHz / 16QAM

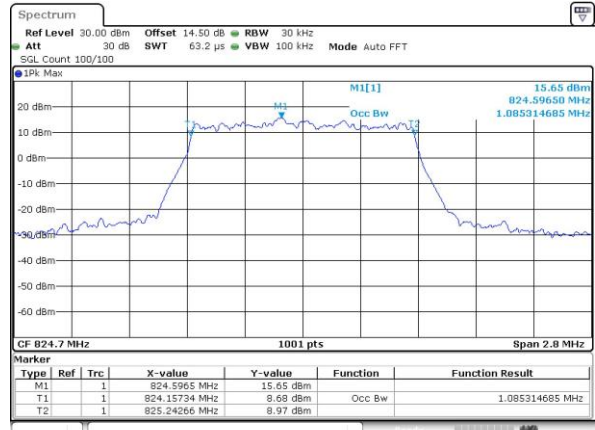


Middle Channel / 1.4MHz / QPSK

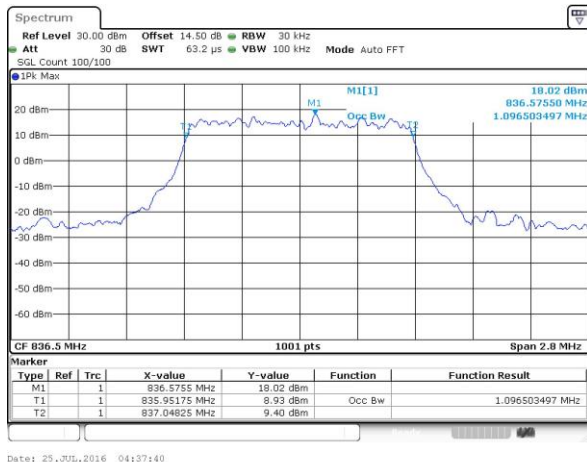

Middle Channel / 1.4MHz / 16QAM

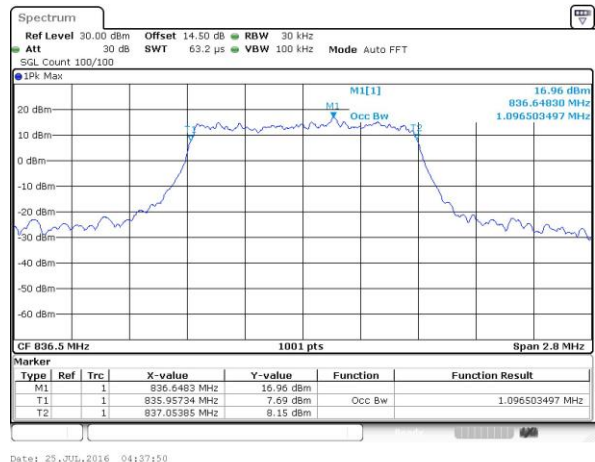

Highest Channel / 1.4MHz / QPSK

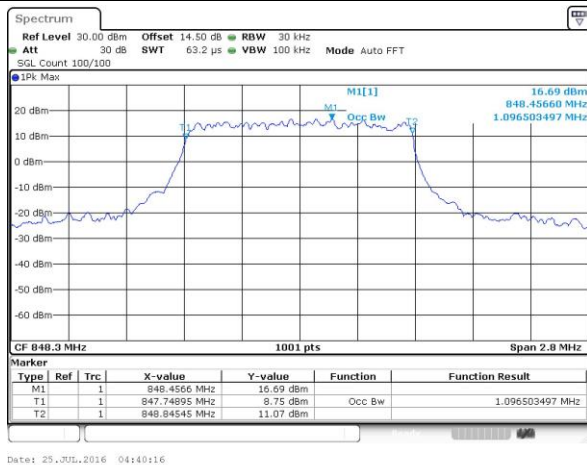

Highest Channel / 1.4MHz / 16QAM

