



FCC 47 CFR PART 15 SUBPART C

RF Test Report

Applicant : TBS Group Corporation

Product Type : Arofly ULTRA SMART BIKE METER SOLUTION (Bluetooth)

Trade Name : Arofly

Model Number : Arofly01

Test Specification FCC 47 CFR PART 15 SUBPART C

ANSI C63.10:2013

Receive Date : Aug. 04, 2016

Test Period : Oct. 13, 2016

Issue Date : Nov. 11, 2016

Issue by

A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,

Taoyuan City 33465, Taiwan (R.O.C)


Tel: +886-3-2710188 / Fax: +886-3-2710190

ilac-MRA



Taiwan Accreditation Foundation accreditation number: 1330


Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.





Revision History

Rev.	Issue Date	Revisions	Revised By
00	Oct. 24, 2016	Initial Issue	Janice Huang
01	Nov. 11, 2016	Revised report information.	Joyce Liao





Verification of Compliance

Issued Date: Nov. 11, 2016

TBS Group Corporation Applicant

Arofly ULTRA SMART BIKE METER SOLUTION (Bluetooth) **Product Type**

Trade Name Arofly

Model Number Arofly01

FCC ID 2AJGD-AROFLY01

EUT Rated Voltage DC₃V

Test Voltage DC₃V

FCC 47 CFR PART 15 SUBPART C Applicable Standard

ANSI C63.10:2013

Test Result Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,

Taoyuan City 33465, Taiwan (R.O.C)

Tel: +886-3-2710188 / Fax: +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

http://www.atl-lab.com.tw/e-index.htm

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Approved By

Reviewed By : EVC (Fly Lu) (Testing Engineer) (Eric Ou (Manager)




TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
	3.1. Mode of Operation	8
	3.2. EUT Exercise Software	8
	3.3. Configuration of Test System Details	9
	3.4. Test Site Environment	9
4	Radiated Emission Measurement	10
	4.1. Limit	10
	4.2. Test Instruments	10
	4.3. Setup	11
	4.4. Test Procedure	13
	4.5. Test Result	15
5	Maximum Conducted Output Power Measurement	22
	5.1. Limit	22
	5.2. Test Setup	22
	5.3. Test Instruments	22
	5.4. Test Procedure	22
	5.5. Test Result	22
6	6dB RF Bandwidth Measurement	23
	6.1. Limit	23
	6.2. Test Setup	23
	6.3. Test Instruments	23
	6.4. Test Procedure	23
	6.5. Test Result	24
	6.6. Test Graphs	25
7	Maximum Power Density Measurement	26
	7.1. Limit	26
	7.2. Test Setup	26
	7.3. Test Instruments	
	7.4. Test Procedure	26
	7.5. Test Result	27
	7.6. Test Graphs	28





8	Out of Band Conducted Emissions Measurement	29
	8.1. Limit	29
	8.2. Test Setup	
	8.3. Test Instruments	
	8.4. Test Procedure	
	8.5. Test Graphs	
	Antenna Measurement	
	9.1. Limit	
	9.2. Antenna Connector Construction	





1 General Information


1.1 Summary of Test Result

Standard	ltem	Result	Remark
15.207	AC Power Conducted Emission	N/A	Not applicable, This device use button cell battery
15.247(d)	Transmitter Radiated Emissions	PASS	
15.247(b)(3)	Max. Output Power	PASS	
15.247(a)(2)	6dB RF Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.247(d)	Out of Band Conducted Spurious Emission	PASS	
15.203	Antenna Requirement	PASS	

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
Conducted Emission	150kHz ~ 30MHz	2.8
	9kHz ~ 30MHz	1.457
	30MHz ~ 1000MHz	6.300
Radiated Emission	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	





2 EUT Description

Applicant	TBS Group Corporation 7F3, No.79, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
Manufacturer	Auden Techno Corp. No.19 Lane 772 HoPing Rd., BaDe Dist. Taoyuan city Taiwan R.O.C.
Product Type	Arofly ULTRA SMART BIKE METER SOLUTION (Bluetooth)
Trade Name	Arofly
Model No.	Arofly01
FCC ID	2AJGD-AROFLY01
Frequency Range	Bluetooth LE: 2402 ~ 2480 MHz
Modulation Type	GFSK
Antenna Type	PIFA Antenna
Antenna Gain	-1.07dBi
RF Output Power	0.0029 W / 4.62 dBm



Report Number: 1610FR15-01

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode	Test Mode	
Mode 1: Normal Operation Mode	Mode 1: Normal Operation Mode	
Mode 2: Bluetooth LE Link Mode	Mode 2: Bluetooth LE Link Mode	

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R&S	СВТ	100350	NA

3.2. EUT Exercise Software


1	Setup the EUT shown on 3.3.
2	Turn on the power of all equipment.
3	Turn on Bluetooth function and link to Bluetooth tester
4	EUT run test program.

Meas	urement Software
1	EZ-EMC Ver. ATL-03A1-1





3.3. Configuration of Test System Details

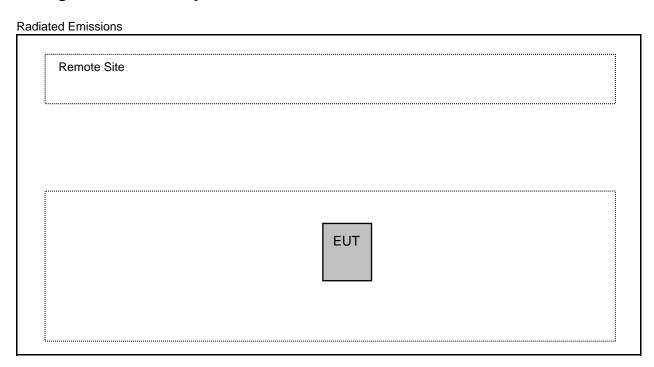

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950



Report Number: 1610FR15-01

4 Radiated Emission Measurement

4.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

not exceed the field strength levels specified in the following table.				
Frequency	Field Strength	Measurement Distance		
(MHz)	(μV/m at meter)	(meters)		
0.009 - 0.490	2400 / F (kHz)	300		
0.490 – 1.705	24000 / F (kHz)	30		
1.705 – 30.0	30	30		
30 - 88	100**	3		
88-216	150**	3		
216-960	200**	3		
Above 960	500	3		

^{**} Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

4.2. Test Instruments


		3 Meter Chamber			
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	01/08/2016	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/08/2016	1 year
Pre Amplifier Agilent		8449B	3008A02237	10/11/2016	1 year
Pre Amplifier Agilent		8447D	2944A11119	01/11/2016	1 year
Broadband Antenna Schwarzbeck		VULB9168	416	10/13/2016	1 year
Horn Antenna (1~18GHz)			9120D-550	06/06/2016	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/05/2016	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/01/2016	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	10/15/2015	1 year
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	10/15/2015	1 year
Microwave Cable EMCI		EMC104-SM-SM-600	140301	10/15/2015	1 year
Test Site	ATL	TE01	TE01	08/29/2016	1 year

Note: N.C.R. = No Calibration Request.





4.3. Setup

9kHz ~ 30MHz

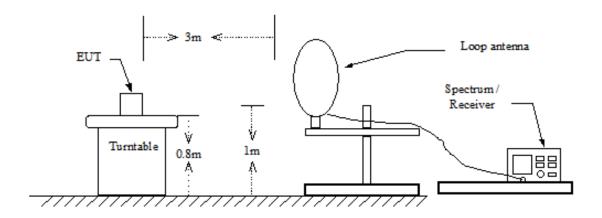


Below 1GHz

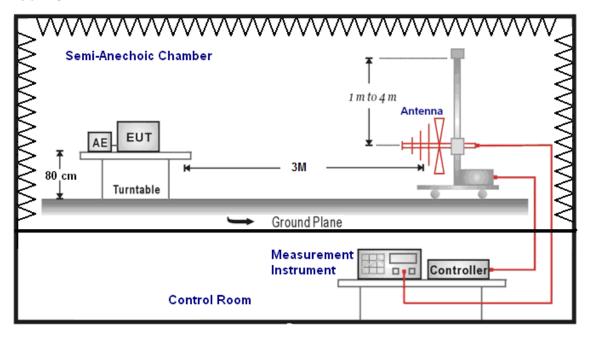






Above 1GHz

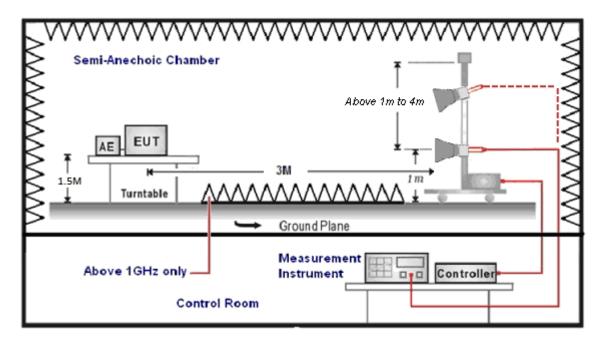





4.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height(below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >98% / 1/T for average measurements when Duty cycle <98%. A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).


For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).






The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

- (1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)
 - FI= Reading of the field intensity.
 - AF= Antenna factor.
 - CL= Cable loss.
 - P.S Amplitude is auto calculate in spectrum analyzer.
- (2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)
 - The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:
 - (a) For fundamental frequency: Transmitter Output < +30dBm
 - (b) For spurious frequency: Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.





4.5. Test Result

Below 1GHz

Standard: FCC Part 15C Test Distance: 3m

Test Mode: Mode 1 Power: DC 3V

Temp.(°ℂ)/Hum.(%RH): 26(°ℂ)/60%RH

Date: 10/13/2016

Test By: Eric Ou Yang

Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark	Ant.Polar.
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		H/V
258.5000	45.52	-10.13	35.39	46.00	-10.61	QP	Н
264.0000	40.69	-9.90	30.79	46.00	-15.21	QP	Н
323.0000	38.56	-8.20	30.36	46.00	-15.64	QP	Н
332.0000	37.60	-7.99	29.61	46.00	-16.39	QP	Н
479.0000	34.36	-4.04	30.32	46.00	-15.68	QP	Н
879.0000	26.98	2.45	29.43	46.00	-16.57	QP	Н
258.0000	45.88	-10.15	35.73	46.00	-10.27	QP	V
264.0000	43.38	-9.90	33.48	46.00	-12.52	QP	V
323.0000	37.81	-8.20	29.61	46.00	-16.39	QP	V
334.5000	35.56	-7.93	27.63	46.00	-18.37	QP	V
451.5000	31.73	-4.52	27.21	46.00	-18.79	QP	V
874.0000	27.54	2.37	29.91	46.00	-16.09	QP	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

^{2.}Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

 $^{3.}No\ emission\ found\ between\ lowest\ internal\ used/generated\ frequencies\ to\ 30MHz\ (9\ kHz~30MHz).$



Report Number: 1610FR15-01

Above 1GHz

Standard:	FCC	Part 15C		Test Distar	nce:	3m	3m	
Test Mode:	Mode	e 2		Power:	Power:			
Frequency:	2402	2402MHz			Temp.(°C)/Hum.(%RH):		%RH	
				Date:	Date:		10/13/2016	
	Test By:			Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V	
4804.000	42.73	6.64	49.37	74.00	-24.63	peak	Н	
7206.000	35.71	10.05	45.76	74.00	-28.24	peak	Н	
4804.000	40.61	6.64	47.25	74.00	-26.75	peak	V	
7206.000	41.33	10.05	51.38	74.00	-22.62	peak	V	

Standard:	FCC	Part 15C		Test Distar	nce:	3m	3m	
Test Mode:	Mode	e 2		Power:	Power:			
Frequency:	2440	MHz		Temp.(°ℂ)/	Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH):		%RH	
				Date:	Date:		6	
						Eric Ou Y	Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V	
4880.000	43.09	6.76	49.85	74.00	-24.15	peak	Н	
7320.000	36.05	10.12	46.17	74.00	-27.83	peak	Н	
4880.000	40.12	6.76	46.88	74.00	-27.12	peak	V	
7320.000	39.21	10.12	49.33	74.00	-24.67	peak	V	

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).



Report Number: 1610FR15-01

Standard:	FCC Part 15C	Test Distance:	3m
Test Mode:	Mode 2	Power:	DC 3V


Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Date: 10/13/2016

Test By: Eric Ou Yang

				,			3
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4960.000	42.02	6.87	48.89	74.00	-25.11	peak	Н
7440.000	33.95	10.21	44.16	74.00	-29.84	peak	Н
4960.000	38.79	6.87	45.66	74.00	-28.34	peak	V
7440.000	36.93	10.21	47.14	74.00	-26.86	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).





Band Edge


Standard: FCC Part 15C Test Distance: 3m

Test item: Radiated Emission Power: DC 3V

Mode: Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH


Frequency: 2402 MHz Date: 10/13/2016

Ant.Polar.: Horizontal

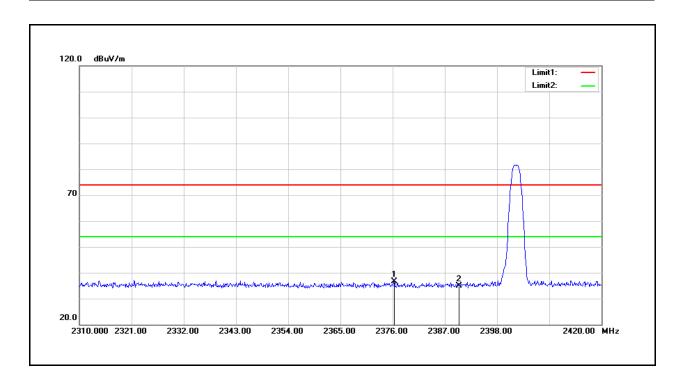

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2376.330	34.91	1.66	36.57	74.00	-37.43	peak
2	2390.000	33.28	1.70	34.98	74.00	-39.02	peak

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).






Standard: FCC Part 15C Test Distance: 3m

Test item: Radiated Emission Power: DC 3V

Mode: Mode 2 Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH


Frequency: 2402 MHz Date: 10/13/2016

Ant.Polar.: Vertical

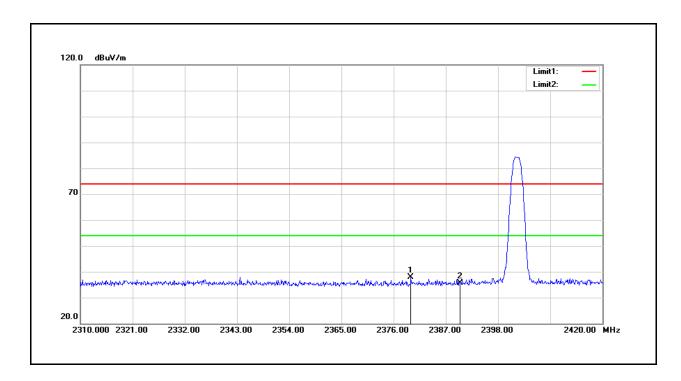

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.630	36.09	1.67	37.76	74.00	-36.24	peak
2	2390.000	34.02	1.70	35.72	74.00	-38.28	peak

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).






Standard: FCC Part 15C Test Distance: 3m

Test item: Radiated Emission Power: DC 3V

Mode: Mode 2 Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH


Frequency: 2480 MHz Date: 10/13/2016

Ant.Polar.: Horizontal

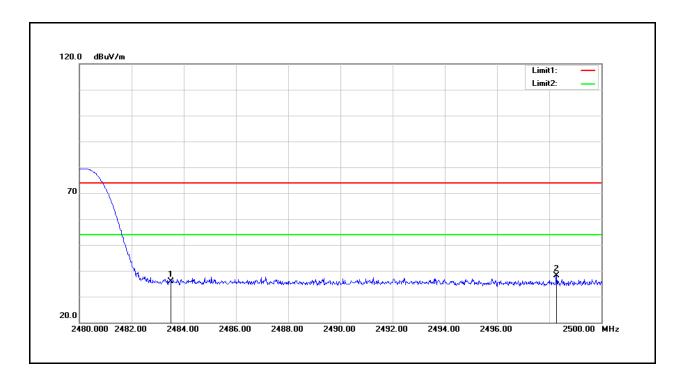

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.87	1.97	35.84	74.00	-38.16	peak
2	2498.280	36.18	2.02	38.20	74.00	-35.80	peak

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).






Standard: FCC Part 15C Test Distance: 3m

Test item: Radiated Emission Power: DC 3V

Mode: Mode 2 Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Frequency: 2480 MHz Date: 10/13/2016

Ant.Polar.: Vertical

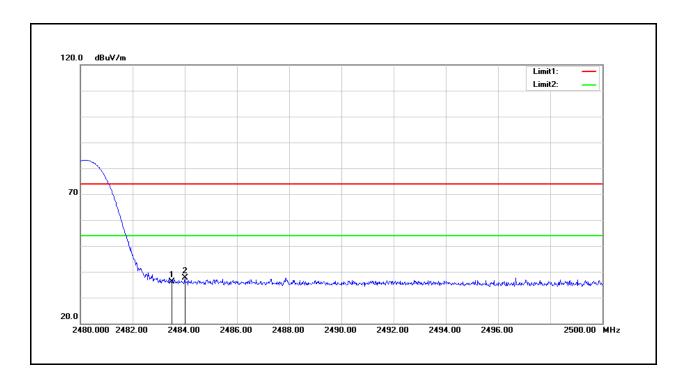

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.08	1.97	36.05	74.00	-37.95	peak
2	2484.000	35.77	1.97	37.74	74.00	-36.26	peak

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).




5 Maximum Conducted Output Power Measurement

5.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

5.2. Test Setup

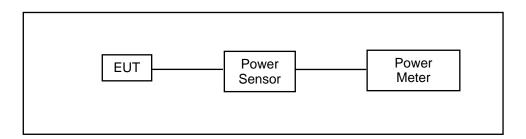

5.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/29/2016	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2016	1 year
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

Note: N.C.R. = No Calibration Request.

5.4. Test Procedure

T he tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..

5.5. Test Result

Frequency (MHz)	Average Power		Peak	Limit	
	(dBm)	(W)	(dBm)	(W)	(dBm)
2402	4.45	0.00279	4.62	0.00290	< 30
2440	4.16	0.00261	4.33	0.00271	< 30
2480	3.82	0.00241	4.00	0.00251	< 30

Note: The relevant measured result has the offset with cable loss already.



Report Number: 1610FR15-01


6 6dB RF Bandwidth Measurement

6.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

6.2. Test Setup

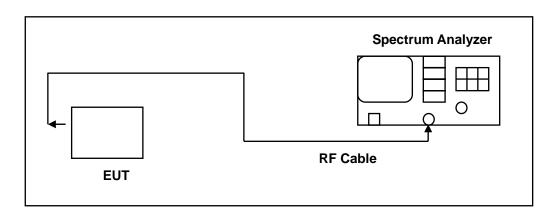

6.3. Test Instruments


Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements. 6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)






6.5. Test Result


Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	749.102	> 500
2440	745.550	> 500
2480	762.928	> 500





6.6. Test Graphs

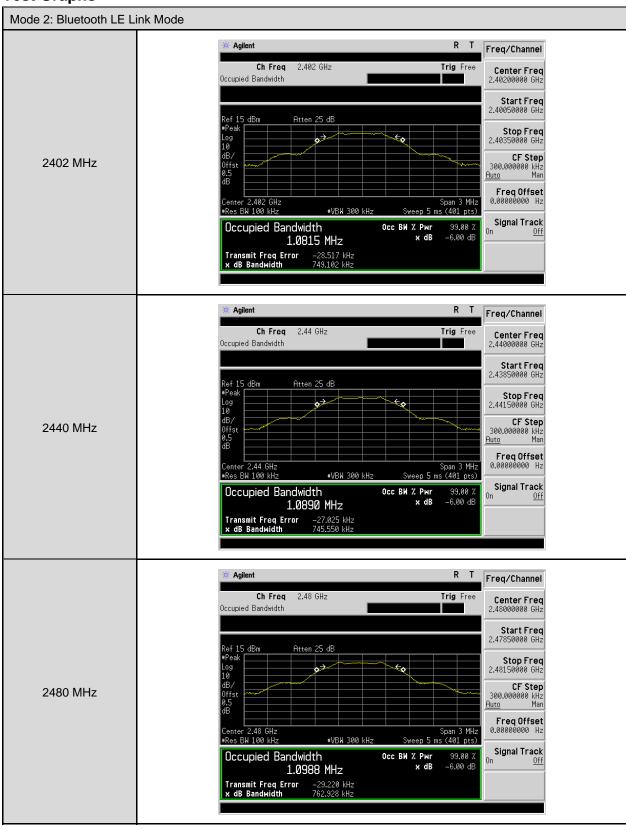






7 Maximum Power Density Measurement

7.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.2. Test Setup

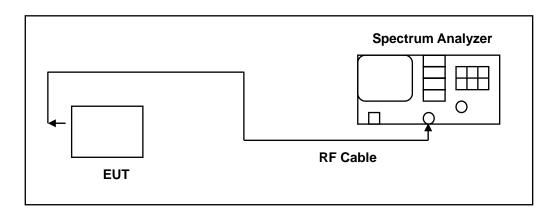

7.3. Test Instruments


Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.


- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS bandwidth.
- 3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- 4. Set the VBW \geq 3 \times RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.






7.5. Test Result


Frequency (MHz)	Measurement Results (dBm/3KHz)	Limit (dBm)
2402	-3.875	< 8
2440	-4.557	< 8
2480	-5.167	< 8





7.6. Test Graphs

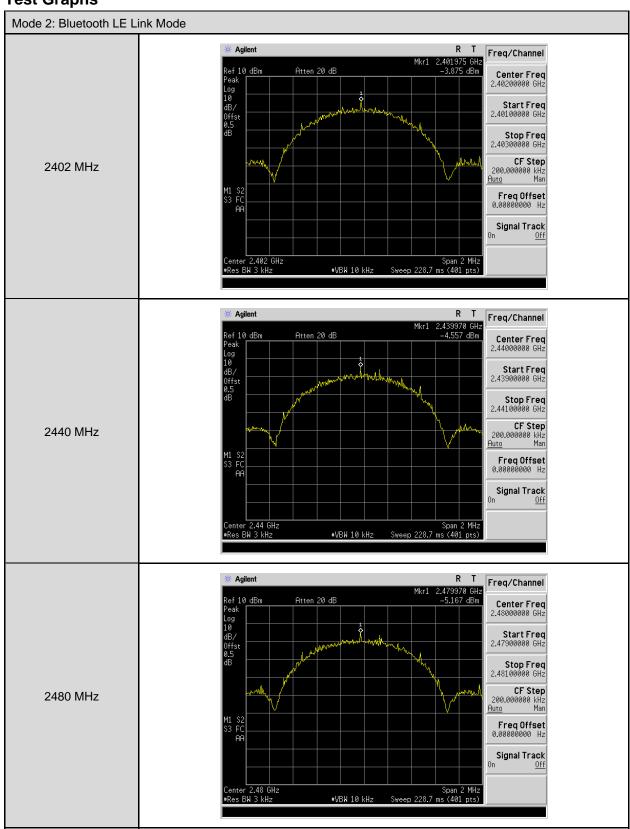






8 Out of Band Conducted Emissions Measurement

8.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

8.2. Test Setup

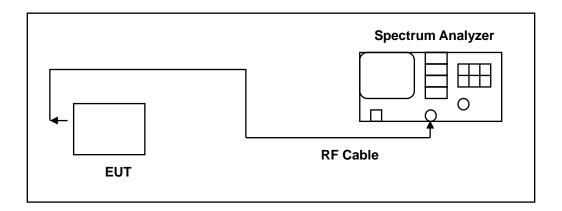


8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/08/2016	1 year
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure


In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.





8.5. Test Graphs

Reference level

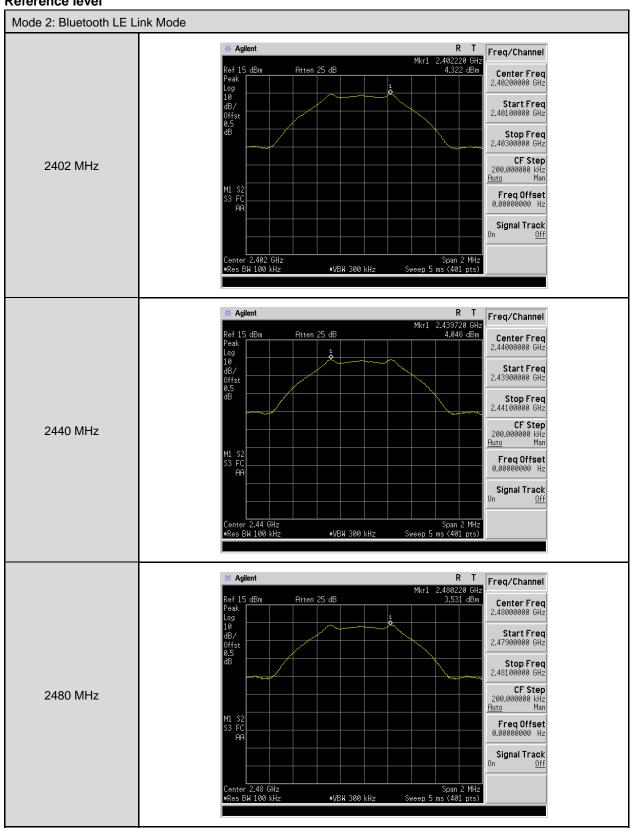




Out of Band Conducted Emissions





Conducted Band Edge

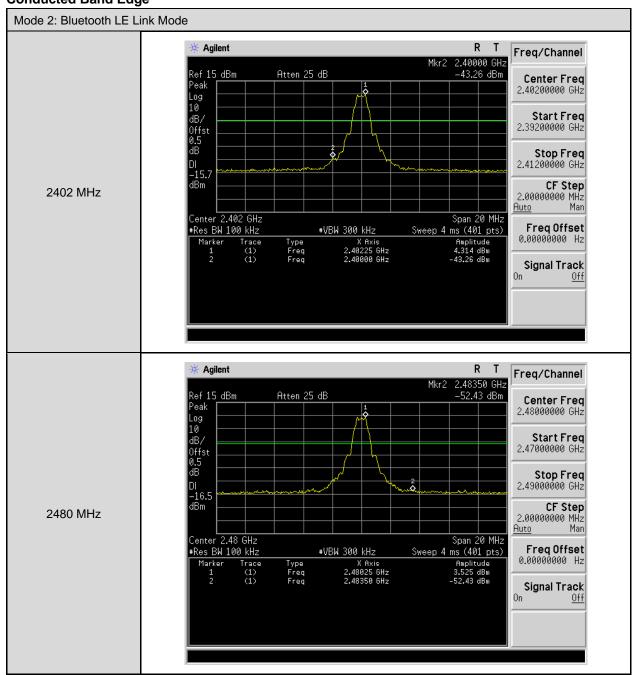



Report Number: 1610FR15-01

9 Antenna Measurement

9.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2. Antenna Connector Construction

See section 2 - antenna information.