Page 1 of 24 Report No.: UNI160815020-E

FCC TEST REPORT

Test report
On Behalf of
ShenZhen ZhiSu Electronics CO., LTD
For
bluetooth earphone
Model No.: C1-classic, C1-sport

FCC ID: 2AJITC1

Prepared for: ShenZhen ZhiSu Electronics CO., LTD

NO. 395, HuaRong Road, Dalang Street, LongHua District, ShenZhen City,

GuangDong, China

Prepared By: Laboratory of Shenzhen United Testing Technology Co., Ltd

Room 316-319, Block B, Honghualing Industrial Park of the Fifth Zone, Taoyuan

Street, Nanshan District, Shenzhen, Guangdong, China

Date of Test: August. 15, 2016 ~ August. 18, 2016

Date of Report: August. 18, 2016
Report Number: UNI160815020-E

Page 2 of 24 Report No.: UNI160815020-E

TE	ST RES	ULT CERTIFICATION				
Applicant's name:	ShenZhen	ZhiSu Electronics CO., LTD				
Address:	NO. 395, I City, Guan	HuaRong Road, Dalang Street, LongHua District, ShenZhen gDong , China				
Manufacture's Name:	ShenZhen	ZhiSu Electronics CO., LTD				
Address:	NO. 395, HuaRong Road, Dalang Street, LongHua District, ShenZhen City, GuangDong , China					
Product description						
Trade Mark:	convli					
Product name:	bluetooth 6	earphone				
Model and/or type reference :	C1-classic	, C1-sport				
Standards:	FCC Rules	s and Regulations Part 15 Subpart C Section 15.249 10: 2013				
owner and source of the mate takes no responsibility for and	erial. Labo will not as material d	ng Technology Co., Ltd is acknowledged as copyright ratory of Shenzhen United Testing Technology Co., Ltd ssume liability for damages resulting from the reader's ue to its placement and context.				
Date (s) of performance of tests	:	August. 15, 2016 ~ August. 18, 2016				
Date of Issue	:	August. 18, 2016				
Test Result	:	Pass				
Testing Engine	eer :	(Eric Xie)				
Technical Man	ager :	Dora Qin				

Authorized Signatory:

(Kait Chen)

(Dora Qin)

Table of Contents	Page
1. TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 Operation of EUT during testing	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 MEASUREMENT INSTRUMENTS LIST	7
3. CONDUCTED EMISSIONS TEST	8
3.1 Conducted Power Line Emission Limit	8
3.2 Test Setup	8
3.3 Test Procedure	8
3.4 Test Result	8
4 RADIATED EMISSION TEST	11
4.1 Radiation Limit	11
4.2 Test Setup	11
4.3 Test Procedure	12
4.4 Test Result	12
5 BAND EDGE	18
5.1 Limits	18
5.2 Test Procedure	18
5.3 Test Result	18
6 OCCUPIED BANDWIDTH MEASUREMENT	20
6.1 Test Setup	20
6.2 Test Procedure	20
6.3 Measurement Equipment Used	20
6.4 Test Result	20
7 ANTENNA REQUIREMENT	22
8 PHOTOGRAPH OF TEST	23
8.1 Radiated Emission	23
8.2 Conducted Emission	24

Page 4 of 24 Report No.: UNI160815020-E

1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST

CONDUCTED EMISSIONS TEST

RADIATED EMISSION TEST

BAND EDGE

OCCUPIED BANDWIDTH MEASUREMENT

ANTENNA REQUIREMENT

COMPLIANT

COMPLIANT

COMPLIANT

COMPLIANT

1.2 TEST FACILITY

Test Firm : Dongguan Dongdian Testing Service Co., Ltd

Certificated by FCC, Registration No.: 270092

Address No.17 Zongbu road 2, Songshan Lake Sci&Tech Park, DongGuan

City, Guangdong province,523808 China

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2 Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2 Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2 Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	bluetooth earphone
Model Name	C1-classic
Serial Model	C1-sport
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: C1-classic.
FCC ID	2AJITC1
Antenna Type	Patch Antenna
Antenna Gain	0dBi
BT Operation frequency	2402-2480MHz
Number of Channels	79CH
Modulation Type	GFSK
Power Source	DC Voltage
Power Rating	DC 3.7V for battery or DC 5V form adapter

2.1.1 Carrier Frequency of Channels

Channel List								
Channel	Frequency	Channel	Frequency	Channel	Frequency			
	(MHz)		(MHz)		(MHz)			
00	2402	27	2429	54	2456			
01	2403	28	2430	55	2457			
02	2404	29	2431	56	2458			
03	2405	30	2432	57	2459			
04	2406	31	2433	58	2460			
05	2407	32	2434	59	2461			
06	2408	33	2435	60	2462			
07	2409	34	2436	61	2463			
08	2410	35	2437	62	2464			
09	2411	36	2438	63	2465			
10	2412	37	2439	64	2466			
11	2413	38	2440	65	2467			
12	2414	39	2441	66	2468			
13	2415	40	2442	67	2469			
14	2416	41	2443	68	2470			
15	2417	42	2444	69	2471			
16	2418	43	2445	70	2472			
17	2419	44	2446	71	2473			
18	2420	45	2447	72	2474			
19	2421	46	2448	73	2475			
20	2422	47	2449	74	2476			
21	2423	48	2450	75	2477			
22	2424	49	2451	76	2478			
23	2425	50	2452	77	2479			
24	2426	51	2453	78	2480			
25	2427	52	2454					
26	2428	53	2455					

2.2 Operation of EUT during testing

Operating Mode

The mode is used: Transmitting mode

Low Channel: 2402MHz Middle Channel: 2441MHz High Channel: 2480MHz

2.3 DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing:

Operation of EUT during radiation testing:

Notebook

EUT

EUT

2.4 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 19, 2016	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	Feb. 19, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Feb. 19, 2016	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
5.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Feb. 19, 2016	1 Year
6.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Feb. 19, 2016	1 Year
7.	Pre-amplifier	Compliance Direction	PAP-0203	22008	Feb. 19, 2016	1 Year
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 19, 2016	1 Year
10.	LISN	SchwarzBeck	NSLK 8126	8126377	Feb. 19, 2016	1 Year
11.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Feb. 19, 2016	1 Year
12.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
13.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 19, 2016	1 Year
14.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Feb. 19, 2016	1 Year
15.	LISN	SchwarzBeck	NSLK 8126	8126377	Feb. 19, 2016	1 Year
16.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Feb. 19, 2016	1 Year
17.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
18.	Power Meter	R&S	NRVD	SEL0069	Feb. 19, 2016	1 Year
19.	Power Sensor	R&S	URV5-Z2	SEL0071	Feb. 19, 2016	1 Year
20.	Power Sensor	R&S	URV5-Z2	SEL0072	Feb. 19, 2016	1 Year
21.	Software EMC32	R&S	EMC32-S	SEL0082	N/A	N/A
22.	Log-periodic Antenna	Amplifier Reasearch	AC1-classic8 0	SEL0073	N/A	N/A
23.	Antenna Tripod	Amplifier Reasearch	TP1000A	SEL0074	N/A	N/A
24.	High Gain Horn Antenna(0.8-5GHz)	Amplifier Reasearch	AT4002A	SEL0075	N/A	N/A
25.	Spectrum analyzer	Agilent	N9020A	MY499110 048	Feb. 19, 2016	1 Year
26.	Spectrum analyzer	Agilent	E4407B	MY461843 26	Feb. 19, 2016	1 Year

3. CONDUCTED EMISSIONS TEST


3.1 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Eroguenev	Maximum RF Line Voltage (dBμV)					
Frequency (MHz)	CLAS	SS A	CLASS B			
(11112)	Q.P.	Ave.	Q.P.	Ave.		
0.15 - 0.50	79	66	66-56*	56-46*		
0.50 - 5.00	73	60	56	46		
5.00 - 30.0	73	60	60	50		

^{*} Decreasing linearly with the logarithm of the frequency
For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

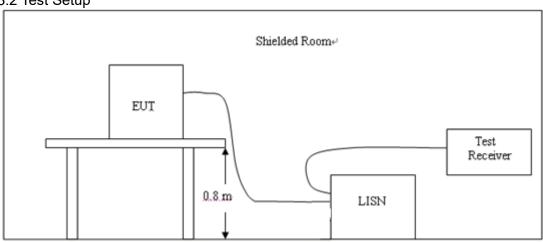


3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

3.4 Test Result


PASS

All the test modes completed for test. The worst case of Conducted Emission is CH 2402; the test data of this mode was reported.

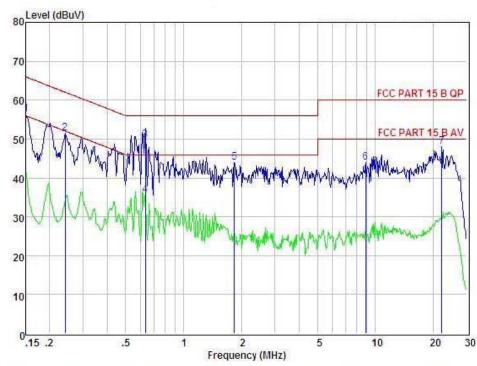

Cond	ition	: FCC	PART 15 B	QP	POL: LI	INE	Temp: 25.7	'C Hum:	51 %
Item	Freq	Read Level	LISN Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	0.150	46.86	0.03	-9.49	0.10	56.48	66.00	-9.52	Peak
2	0.242	41.86	0.03	-9.52	0.10	51.51	62.04	-10.53	Peak
3	0.634	40.08	0.03	-9.59	0.10	49.80	56.00	-6.20	QP
4	0.634	25.95	0.03	-9.59	0.10	35.67	46.00	-10.33	Average
5	1.839	34.04	0.05	-9.70	0.10	43.89	56.00	-12.11	Peak
6	8.916	33.77	0.16	-9.95	0.18	44.06	60.00	-15.94	Peak
7	22.298	37.37	0.40	-9.81	0.40	47.98	60.00	-12.02	Peak

Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss

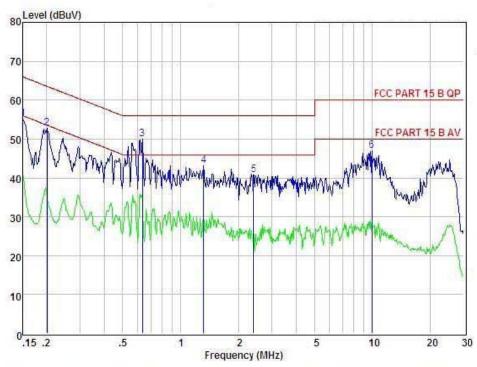

					The state of the s				
Condi	tion	: FCC	PART 15 B	QP	POL: NE	EUTRAL	Temp: 25.7	'C Hum:	51 %
Item	Freq	Read Level	LISN Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	0.150	45.55	0.03	-9.49	0.10	55.17	66.00	-10.83	Peak
2	0.202	43.06	0.03	-9.52	0.10	52.71	63.54	-10.83	Peak
3	0.634	40.18	0.03	-9.59	0.10	49.90	56.00	-6.10	Peak
4	1.324	33.28	0.05	-9.65	0.10	43.08	56.00	-12.92	Peak
5	2.409	30.83	0.06	-9.75	0.11	40.75	56.00	-15,25	Peak
6	9.966	36.67	0.18	-9.93	0.21	46.99	60.00	-13.01	Peak

Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss

4 RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup

(1) Radiated Emission Test-Up Frequency Below 30MHz

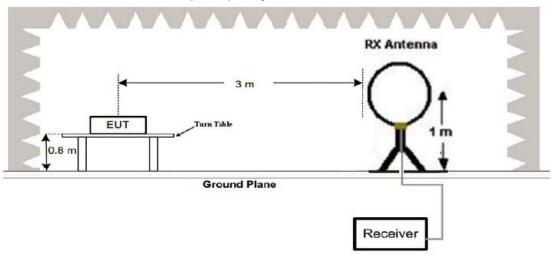


(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

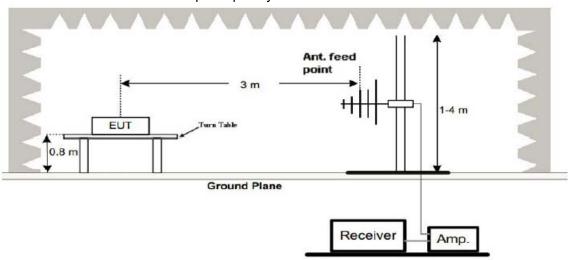

Page 12 of 24 Report No.: UNI160815020-E

(3) Radiated Emission Test-Up Frequency Above 1GHz

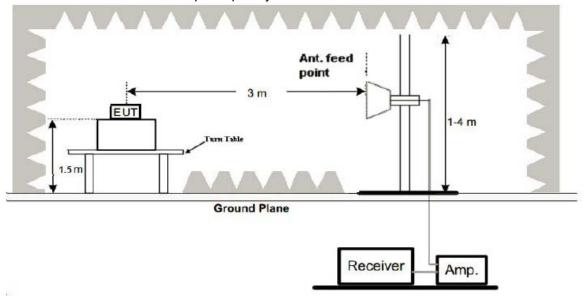

4.3 Test Procedure

- 1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).


Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.


4.4 Test Result

PASS

All the test modes completed for test. The worst case of Radiated Emission is CH 2402; the test data of this mode was reported.

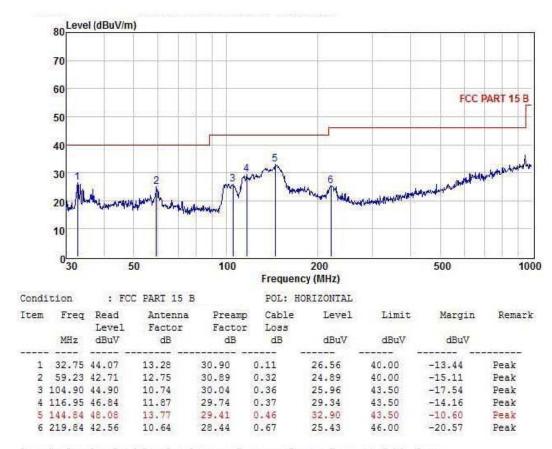

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

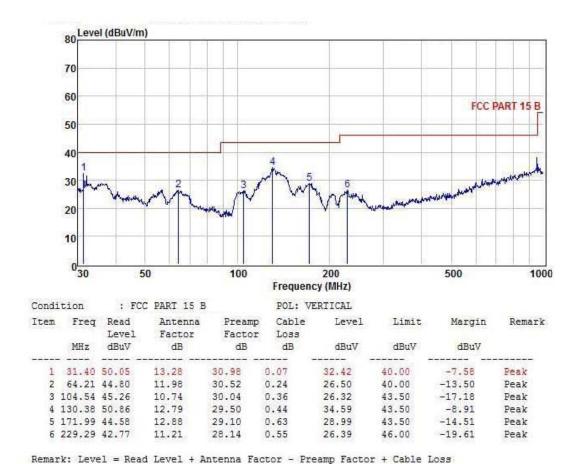

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

CH Low (2402MHz) Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2402	109.22	-5.84	103.38	114	-10.62	peak
2402	83.53	-5.84	77.69	94	-16.31	AVG
4804	59.75	-3.64	56.11	74	-17.89	peak
4804	45.20	-3.64	41.56	54	-12.44	AVG
7206	55.58	-0.95	54.63	74	-19.37	peak
7206	41.16	-0.95	40.21	54	-13.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2402	105.26	-5.84	99.42	114	-14.58	peak
2402	80.77	-5.84	74.93	94	-19.07	AVG
4804	57.42	-3.64	53.78	74	-20.22	peak
4804	41.86	-3.64	38.22	54	-15.78	AVG
7206	51.64	-0.95	50.69	74	-23.31	peak
7206	37.70	-0.95	36.75	54	-17.25	AVG
		-		-		

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2441MHz) Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2441	107.90	-5.71	102.19	114	-11.81	peak
2441	83.24	-5.71	77.53	94	-16.47	AVG
4882	58.08	-3.51	54.57	74	-19.43	peak
4882	42.93	-3.51	39.42	54	-14.58	AVG
7323	53.08	-0.82	52.26	74	-21.74	peak
7323	38.20	-0.82	37.38	54	-16.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2441	104.54	-5.71	98.83	114	-15.17	peak
2441	77.02	-5.71	71.31	94	-22.69	AVG
4882	55.93	-3.51	52.42	74	-21.58	peak
4882	41.54	-3.51	38.03	54	-15.97	AVG
7323	51.58	-0.82	50.76	74	-23.24	peak
7323	37.76	-0.82	36.94	54	-17.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2480MHz) Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2480	108.01	-5.65	102.36	114	-11.64	peak
2480	83.50	-5.65	77.85	94	-16.15	AVG
4960	58.99	-3.43	55.56	74	-18.44	peak
4960	44.18	-3.43	40.75	54	-13.25	AVG
7440	53.32	-0.75	52.57	74	-21.43	peak
7440	39.04	-0.75	38.29	54	-15.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2480	104.96	-5.65	99.31	114	-14.69	peak
2480	79.58	-5.65	73.93	94	-20.07	AVG
4960	56.48	-3.43	53.05	74	-20.95	peak
4960	41.88	-3.43	38.45	54	-15.55	AVG
7440	51.27	-0.75	50.52	74	-23.48	peak
7440	36.13	-0.75	35.38	54	-18.62	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of
- 15.205, then the general radiated emission limits in 15.209 apply.

 (4) Data of measurement within this frequency range shown "--- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Page 18 of 24 Report No.: UNI160815020-E

5 BAND EDGE

5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result

PASS

Radiated Band Edge Test:

Operation Mode: TX CH Low (2402MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	51.67	-5.81	45.86	74	-28.14	peak
2390	1	-5.81	1	54	1	AVG
2400	60.11	-5.84	54.27	74	-19.73	peak
2400	45.36	-5.84	39.52	54	-14.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	50.44	-5.81	44.63	74	-29.37	peak
2390	1	-5.81	1	54	1	AVG
2400	57.41	-5.84	51.57	74	-22.43	peak
2400	1	-5.65	1	54	1	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Operation Mode: TX CH High (2480MHz) Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	50.31	-5.65	44.66	74	-29.34	peak
2483.5	1	-5.65	1	54	1	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	50.90	-5.65	45.25	74	-28.75	peak
2483.5	1	-5.65	1	54	1	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

6 OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Setup

Same as Radiated Emission Measurement

6.2 Test Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation.
- 3. Based on FCC Part15 C Section 15.249(a): RBW= 30KHz. VBW= 100 KHz, Span=3MHz.
- 4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

6.3 Measurement Equipment Used

Same as Radiated Emission Measurement

6.4 Test Result


PASS

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	836.4	PASS
2441 MHz	835.0	PASS
2480 MHz	836.9	PASS

CH: 2402MHz



CH: 2441MHz

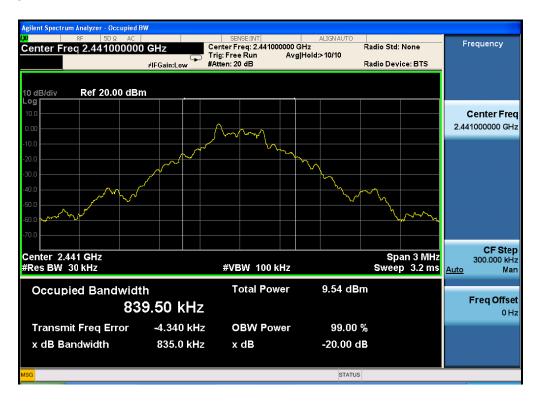

CH: 2480MHz



7 ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Patch Antenna, The directional gains of antenna used for transmitting is 0dBi.

ANTENNA

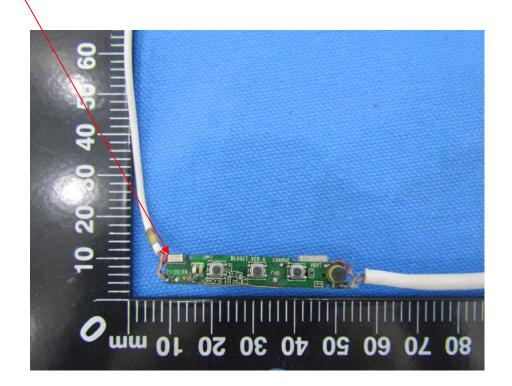

8 PHOTOGRAPH OF TEST

8.1 Radiated Emission





8.2 Conducted Emission

