



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, MARCH 2019 AMENDMENT 1

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Edco Electronics Inc.

FCC Address: 8484 Avenue de l'Esplanade Montreal, Quebec Montreal, H2P 2R7 Canada

IC Address: 8484 Avenue de l'Esplanade Montréal QC H2P 2R7 Canada

FCC ID: 2AJMW-M350W-D
IC: 20174-M350WD

Report Type: Original Report	Product Name: USB Dongle
Report Number: <u>RDG200109009-00</u>	
Report Date: <u>2020-03-27</u>	
Ivan Cao	
Reviewed By:	<u>Assistant Manager</u>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY.....	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF Exposure.....	9
APPLICABLE STANDARD	9
RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION	10
APPLICABLE STANDARD	10
FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	11
FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS.....	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(D) & RSS-247 CLAUSE 5.5,RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(A) (1)& RSS-247 CLAUSE 5.1 B) - CHANNEL SEPARATION TEST.....	24
APPLICABLE STANDARD	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE	24

TEST DATA	24
RSS-247 CLAUSE 5.1&RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH TESTING	26
APPLICABLE STANDARD	26
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii)& RSS-247 CLAUSE 5.1 d) - QUANTITY OF HOPPING CHANNEL TEST.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(a) (1) (iii)& RSS-247 Clause 5.1 d) - TIME OF OCCUPANCY (DWELL TIME).....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(b) (1), RSS-247 Clause 5.4 b) - PEAK OUTPUT POWER MEASUREMENT	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	39

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	USB Dongle
EUT Model:	M350W-D
Operation Frequency:	2402-2480MHz
Maximum Peak Output Power (Conducted):	0.62 dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC 5V from USB system
Serial Number:	RDG200109009-RF-S2
EUT Received Date:	2020/1/15
EUT Received Status:	Good

Objective

This report is prepared on behalf of **Edco Electronics Inc.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, March 2019 Amendment 1 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, March 2019 Amendment 1 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

Part of system submissions with FCC ID: 2AJMW-M350W
Part of system submissions with IC: 20174-M350W

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" and KDB 558074 D01 15.247 Meas Guidance v05r02. And RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, March 2019 Amendment 1 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “ Δ ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

The device employs total 79 channels as below table, and only choose 16 channel randomly for use:

Channel	Frequency (MHz)						
1	2402	21	2422	41	2442	60	2461
2	2403	22	2423	42	2443	61	2462
3	2404	23	2424	43	2444	62	2463
~	~	~	~	~	~	~	~
~	~	~	~	~	~	~	~
18	2419	38	2439	57	2458	78	2479
19	2420	39	2440	58	2459	79	2480
20	2421	40	2441	59	2460	/	/

EUT Exercise Software

The software "Semitek FCC v6.5.1" was used in testing for change channels, the maximum power level is default setting by system.

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
ThinkPad	Laptop	E450	PF-0MR8KV 16/08

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	Yes	No	2.0	Apdater	Laptop

Block Diagram of Test Setup

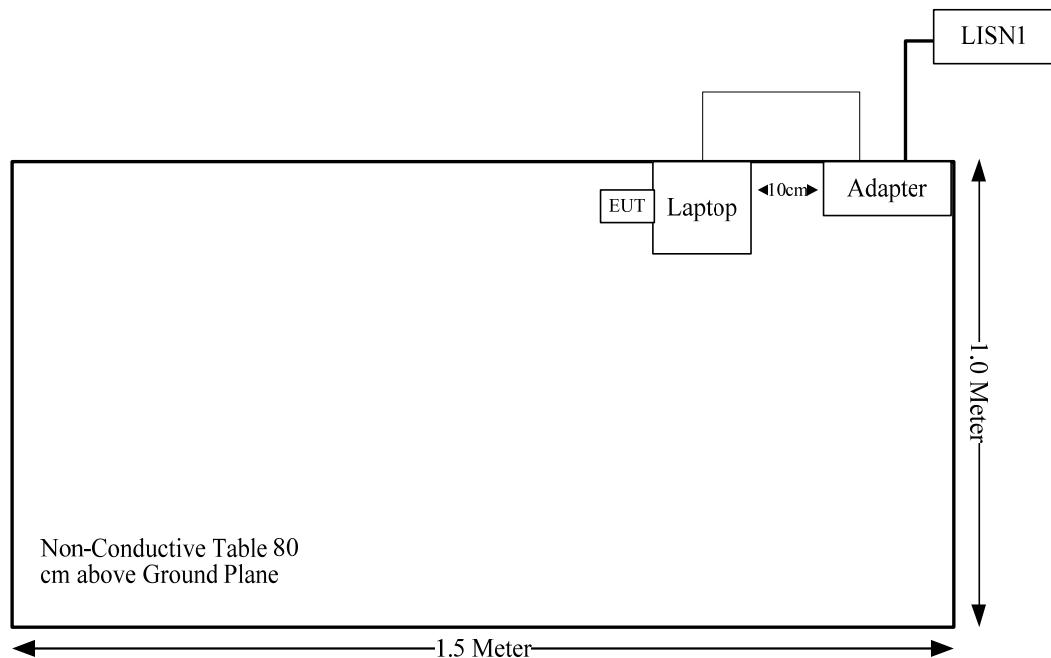

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
§15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
RSS-102 Clause 2.5.1	Exemption Limit For Routine Evaluation-SAR Evaluation	Compliance
FCC§15.203, RSS-GEN Clause 6.8	Antenna Requirement	Compliance
FCC§15.207 (a), RSS-Gen Clause 8.8	Conducted Emissions	Compliance
FCC§15.205, §15.209, FCC §15.247(d), RSS-247 Clause 5.5, RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC §15.247 (a)(1), RSS-247 Clause 5.1 b) RSS-Gen Clause 6.7	Emission Bandwidth	Compliance
FCC §15.247(a)(1), RSS-247 Clause 5.1 b)	Channel Separation Test	Compliance
FCC§15.247(a)(1)(iii), RSS-247 Clause 5.1 d)	Time of Occupancy (Dwell Time)	Compliance
FCC§15.247(a)(1)(iii), RSS-247 Clause 5.1 d)	Quantity of hopping channel Test	Compliance
FCC§15.247(b)(1), RSS-247 Clause 5.4 b)	Peak Output Power Measurement	Compliance
FCC§15.247(d) RSS-247 Clause 5.5	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF Exposure

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 1.0 dBm (1.26 mW).
 $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 $= 1.26 / 5 \cdot (\sqrt{2.480}) = 0.4 < 3.0$

Result: Compliance. The stand-alone SAR evaluation is not necessary.

RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION

Applicable Standard

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance⁴⁵

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤ 5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥ 50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Measurement Result:

The max tune-up conducted power is 1 dBm(1.26 mW), Antenna Gain: 0 dBi,

The exemption power(P) limits for routine evaluation in 2402-2480MHz is:

$(2480-2450)/(3500-2450) = (P - 4)/(2 - 4)$

$\Rightarrow P = 3.94 \text{ mW} @ 2480 \text{ MHz}$

$> 1.26 \text{ mW}$

So the stand-alone SAR evaluation can be exempted.

FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Information And Connector Construction

The EUT has one internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
PCB	50	0 dBi/2.4~2.5GHz


Result: Compliance.

FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a), RSS-GEN CLAUSE 8.8.

EUT Setup

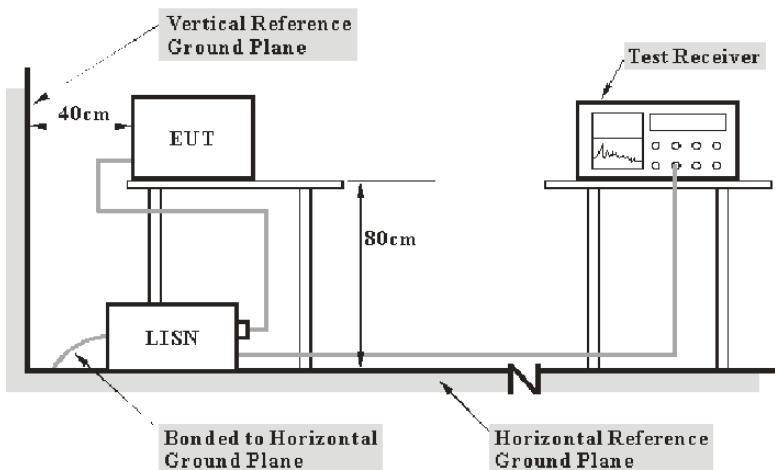

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_c + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2019-05-06	2020-05-06
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2019-09-06	2020-09-06
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	25.3°C
Relative Humidity:	69%
ATM Pressure:	101.2kPa
Test by:	Sem Xiang
Test Date:	2020-03-23

Test Result: Compliance


Test Mode: Transmitting

AC120V, 60 Hz, Line:

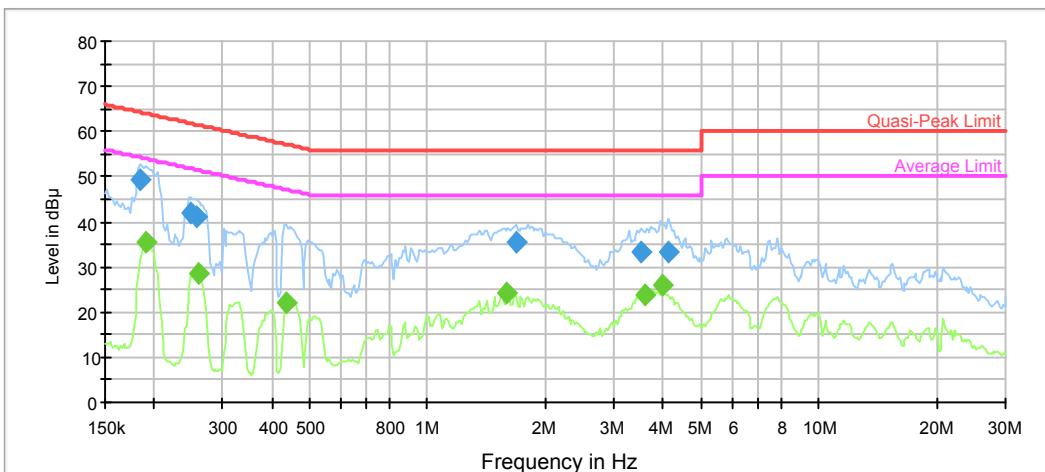

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.184859	49.3	9.000	L1	9.7	15.0	64.3
0.249162	41.8	9.000	L1	9.7	20.0	61.8
0.256712	41.3	9.000	L1	9.7	20.2	61.5
1.683392	35.6	9.000	L1	9.8	20.4	56.0
3.515338	33.3	9.000	L1	9.8	22.7	56.0
4.122010	33.4	9.000	L1	9.8	22.6	56.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.190460	35.3	9.000	L1	9.7	18.7	54.0
0.259279	28.4	9.000	L1	9.7	23.0	51.5
0.434989	22.0	9.000	L1	9.7	25.2	47.2
1.601690	24.3	9.000	L1	9.8	21.8	46.0
3.585996	23.9	9.000	L1	9.8	22.1	46.0
4.000782	25.8	9.000	L1	9.8	20.2	46.0


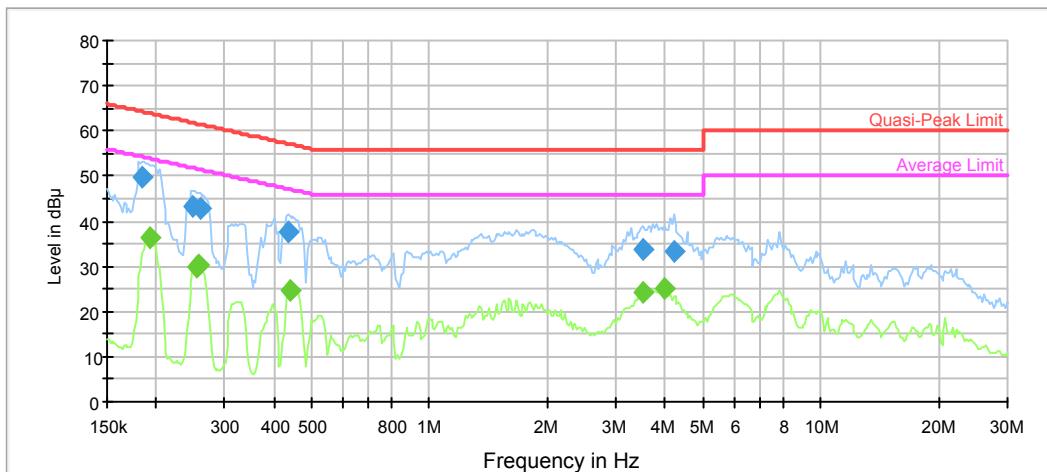
AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.184859	49.8	9.000	N	9.7	14.4	64.3
0.249162	43.1	9.000	N	9.7	18.7	61.8
0.259279	42.6	9.000	N	9.7	18.8	61.5
0.434989	37.7	9.000	N	9.6	19.5	57.2
3.515338	33.6	9.000	N	9.6	22.4	56.0
4.204862	33.4	9.000	N	9.7	22.6	56.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.192365	36.2	9.000	N	9.7	17.7	53.9
0.254170	30.0	9.000	N	9.7	21.6	51.6
0.256712	30.3	9.000	N	9.7	21.2	51.5
0.439339	24.9	9.000	N	9.6	22.2	47.1
3.515338	24.0	9.000	N	9.6	22.0	46.0
4.000782	25.0	9.000	N	9.7	21.0	46.0

**FCC §15.209, §15.205 & §15.247(D) & RSS-247 CLAUSE 5.5,RSS -GEN
CLAUSE 8.10- SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205; RSS-247 Clause 5.5, RSS-GEN Clause 8.10

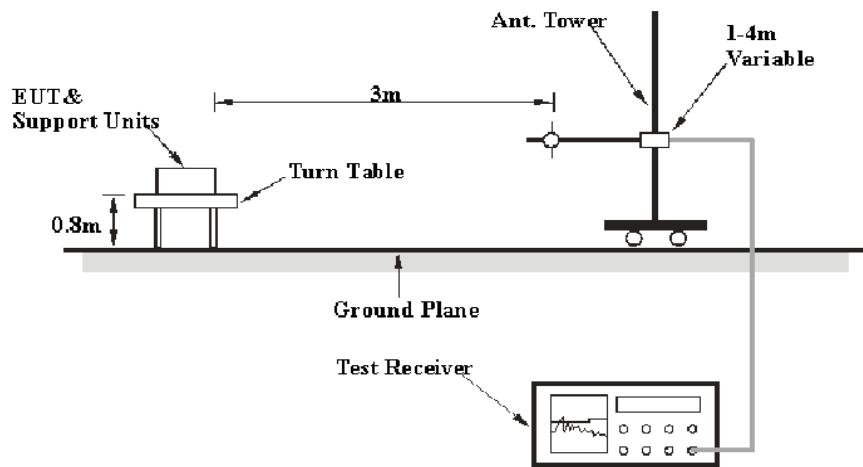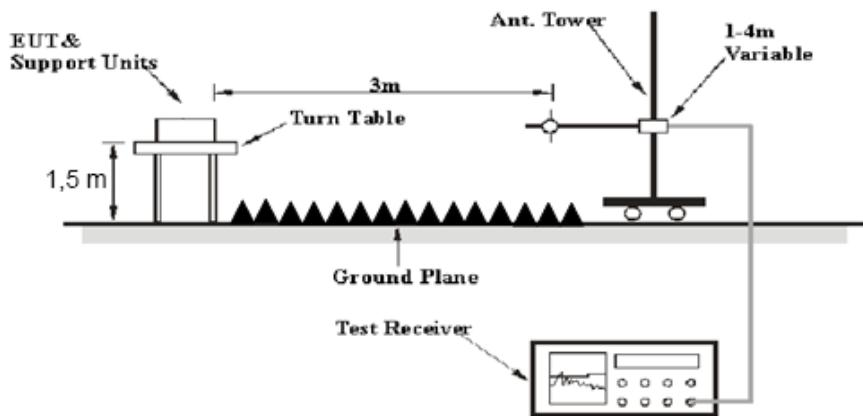EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 and the RSS-247 Clause 5.5, RSS-GEN Clause 8.10 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2019-08-03	2020-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2019-09-24	2020-09-24
Sonoma	Amplifier	310N	185914	2019-10-13	2020-10-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2019-08-03	2020-08-03
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2020-02-24	2021-02-24
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	25.5°C	24.7°C
Relative Humidity:	50%	49%
ATM Pressure:	101.4 kPa	101.1 kPa
Tester:	Vern Shen	Vern Shen
Test Date:	2020-03-26	2020-03-24

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots.

1) 30MHz-1GHz (high channel was the worst)

Horizontal:

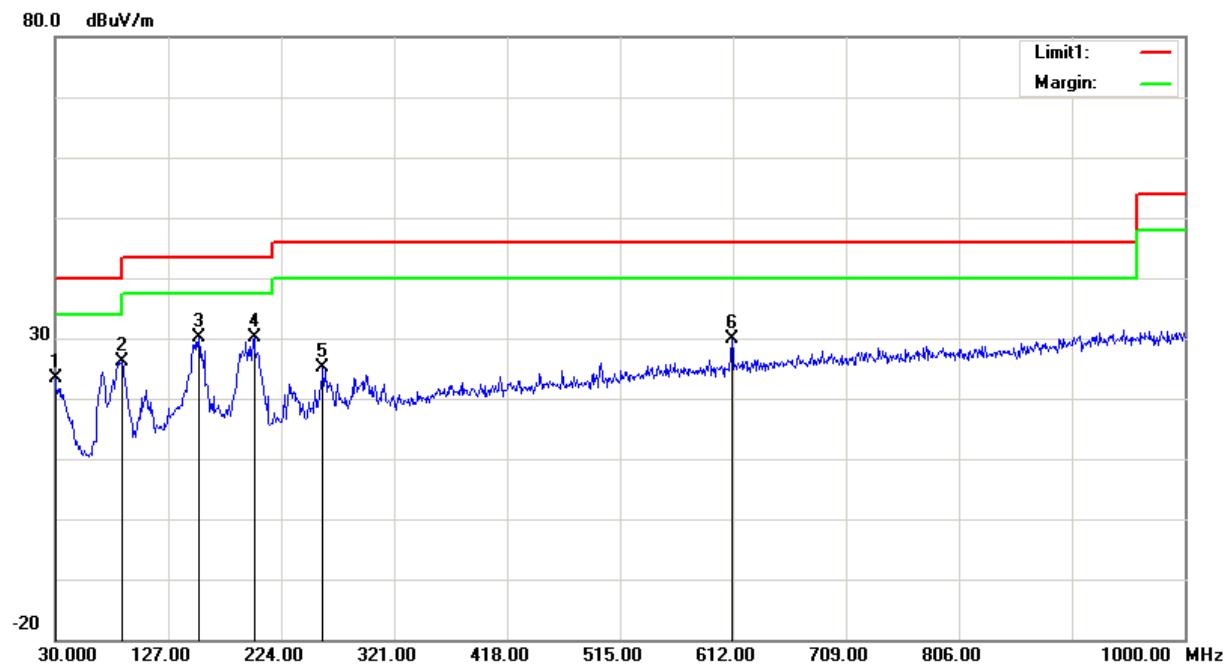

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.000	27.61	peak	-4.33	23.28	40.00	16.72
87.2300	41.46	peak	-15.38	26.08	40.00	13.92
153.1900	39.56	peak	-9.47	30.09	43.50	13.41
200.7200	39.46	peak	-9.45	30.01	43.50	13.49
259.8900	34.58	peak	-9.42	25.16	46.00	20.84
611.0300	30.97	peak	-1.02	29.95	46.00	16.05

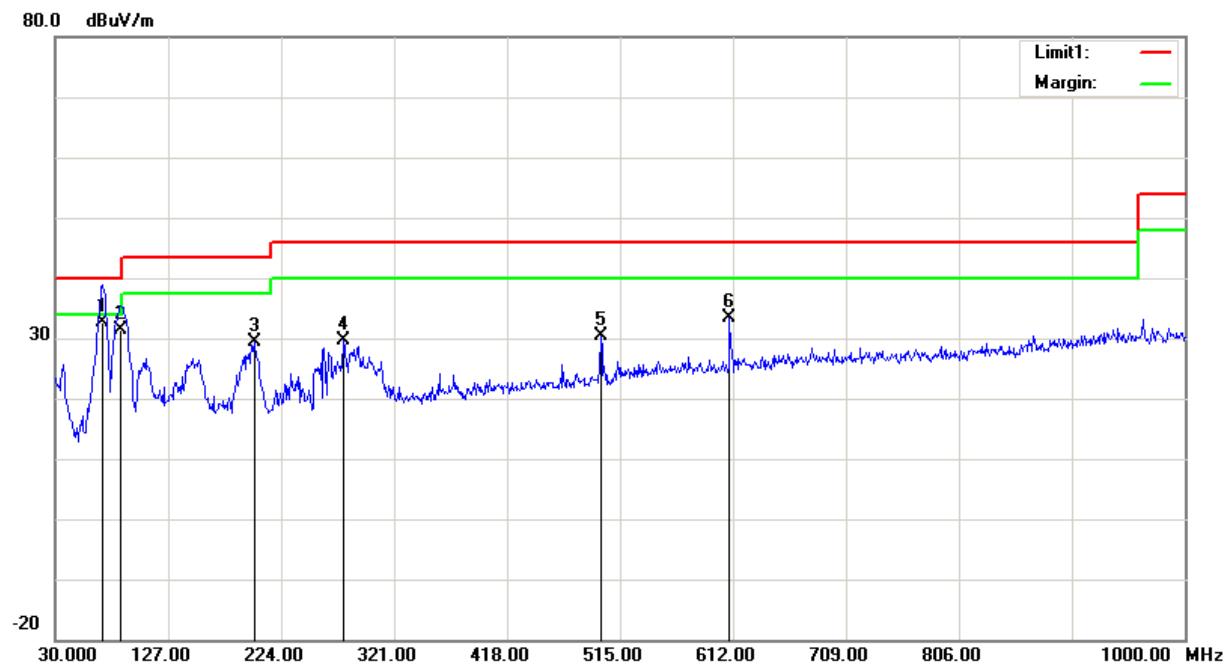Vertical:


Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
70.7400	49.09	QP	-16.49	32.60	40.00	7.40
86.2600	46.99	QP	-15.49	31.50	40.00	8.50
200.7200	38.84	peak	-9.45	29.39	43.50	14.11
277.3500	38.26	peak	-8.64	29.62	46.00	16.38
498.5100	33.87	peak	-3.48	30.39	46.00	15.61
609.0900	34.43	peak	-1.05	33.38	46.00	12.62

2) 1GHz-25GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	63.68	PK	H	24.82	3.34	0.00	91.84	N/A	N/A
2402.00	62.05	AV	H	24.82	3.34	0.00	90.21	N/A	N/A
2402.00	63.80	PK	V	24.82	3.34	0.00	91.96	N/A	N/A
2402.00	62.11	AV	V	24.82	3.34	0.00	90.27	N/A	N/A
2390.00	31.41	PK	V	24.80	3.33	0.00	59.54	74.00	14.46
2390.00	14.08	AV	V	24.80	3.33	0.00	42.21	54.00	11.79
4804.00	52.30	PK	V	29.71	4.58	27.36	59.23	74.00	14.77
4804.00	45.89	AV	V	29.71	4.58	27.36	52.82	54.00	1.18
7206.00	37.40	PK	V	33.93	5.59	27.19	49.73	74.00	24.27
7206.00	23.80	AV	V	33.93	5.59	27.19	36.13	54.00	17.87
Middle Channel: 2440 MHz									
2440.00	64.91	PK	H	24.89	3.36	0.00	93.16	N/A	N/A
2440.00	63.40	AV	H	24.89	3.36	0.00	91.65	N/A	N/A
2440.00	65.40	PK	V	24.89	3.36	0.00	93.65	N/A	N/A
2440.00	64.37	AV	V	24.89	3.36	0.00	92.62	N/A	N/A
4880.00	48.51	PK	V	29.86	4.56	27.55	55.38	74.00	18.62
4880.00	42.50	AV	V	29.86	4.56	27.55	49.37	54.00	4.63
7320.00	36.17	PK	V	34.11	5.69	27.26	48.71	74.00	25.29
7320.00	23.47	AV	V	34.11	5.69	27.26	36.01	54.00	17.99
High Channel: 2480 MHz									
2480.00	65.13	PK	H	24.96	3.38	0.00	93.47	N/A	N/A
2480.00	63.70	AV	H	24.96	3.38	0.00	92.04	N/A	N/A
2480.00	66.22	PK	V	24.96	3.38	0.00	94.56	N/A	N/A
2480.00	64.24	AV	V	24.96	3.38	0.00	92.58	N/A	N/A
2483.50	40.01	PK	V	24.97	3.38	0.00	68.36	74.00	5.64
2483.50	19.55	AV	V	24.97	3.38	0.00	47.90	54.00	6.10
4960.00	49.29	PK	V	30.02	4.58	27.37	56.52	74.00	17.48
4960.00	42.88	AV	V	30.02	4.58	27.37	50.11	54.00	3.89
7440.00	36.79	PK	V	34.30	5.79	27.22	49.66	74.00	24.34
7440.00	23.72	AV	V	34.30	5.79	27.22	36.59	54.00	17.41




Worst plots(Low channel)**Horizontal**

Fundamental
Test with Band
Rejection Filter

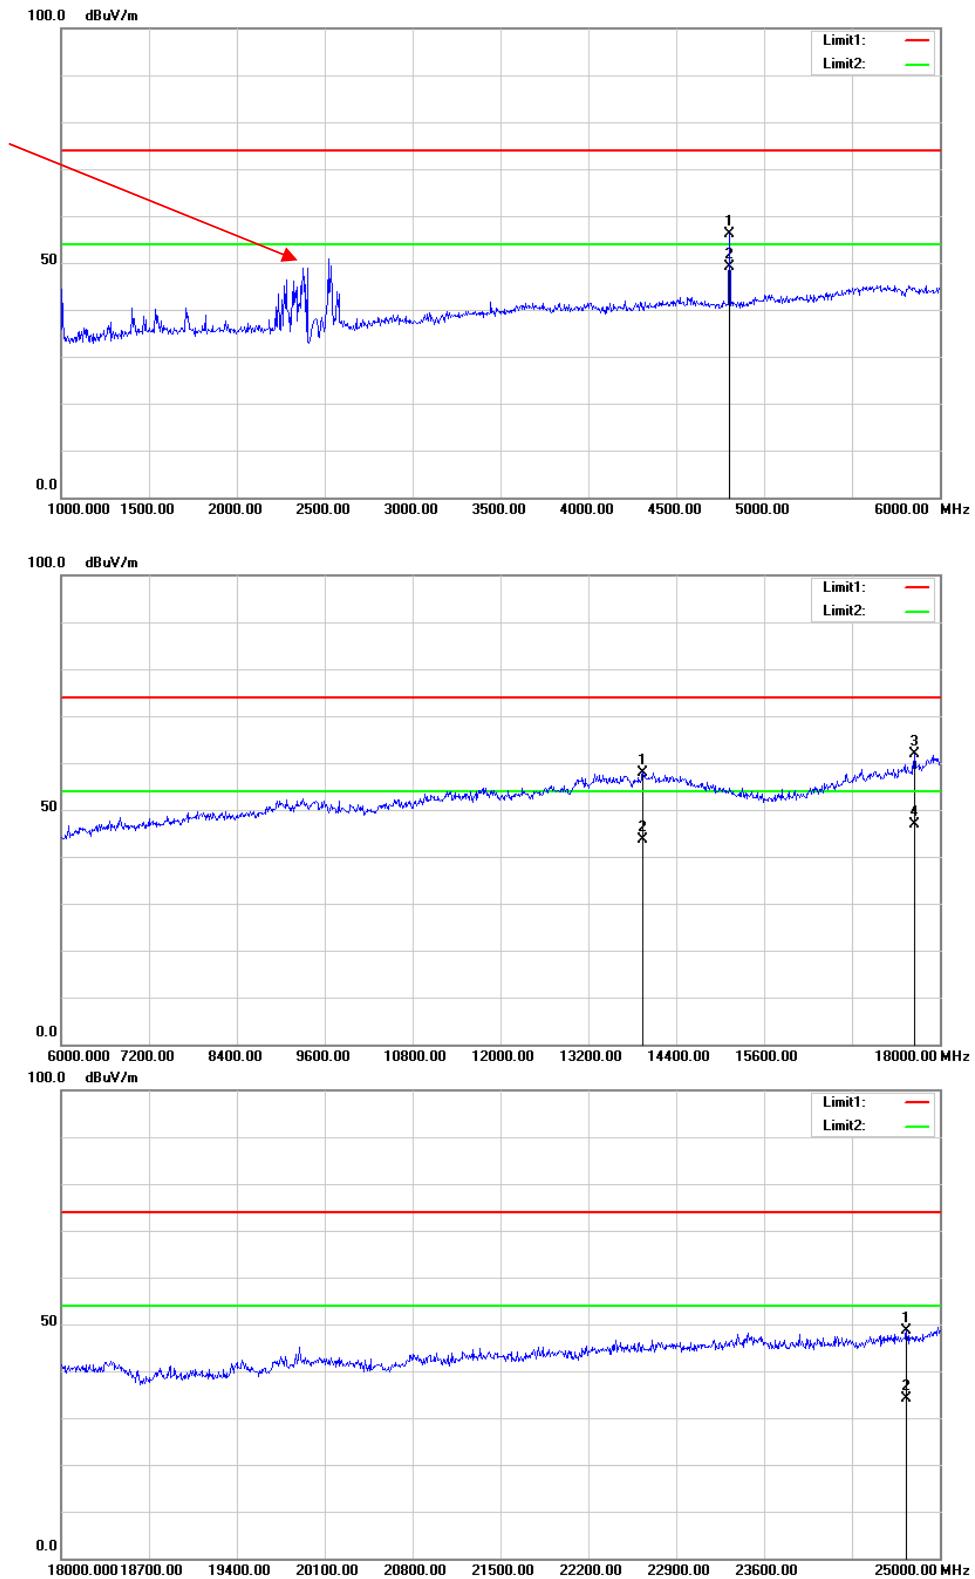

Vertical

Fundamental
Test with Band
Rejection Filter

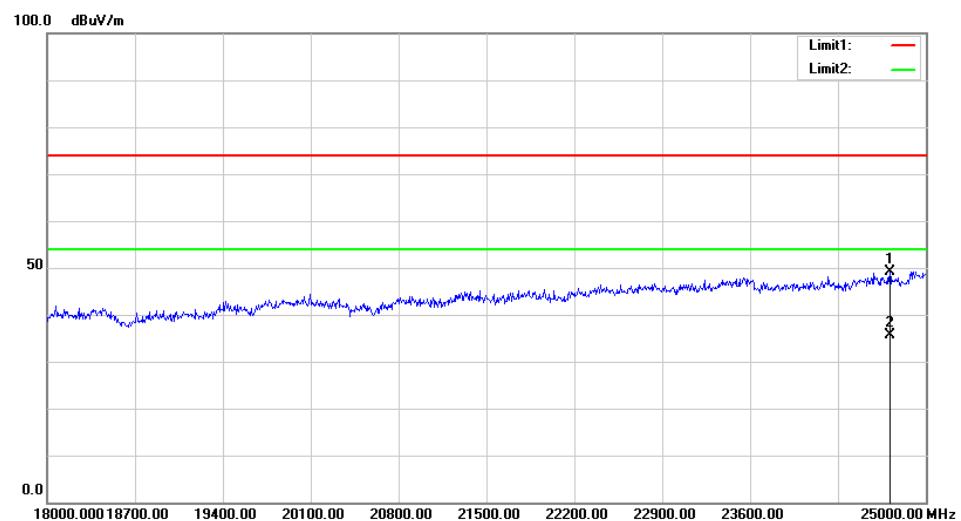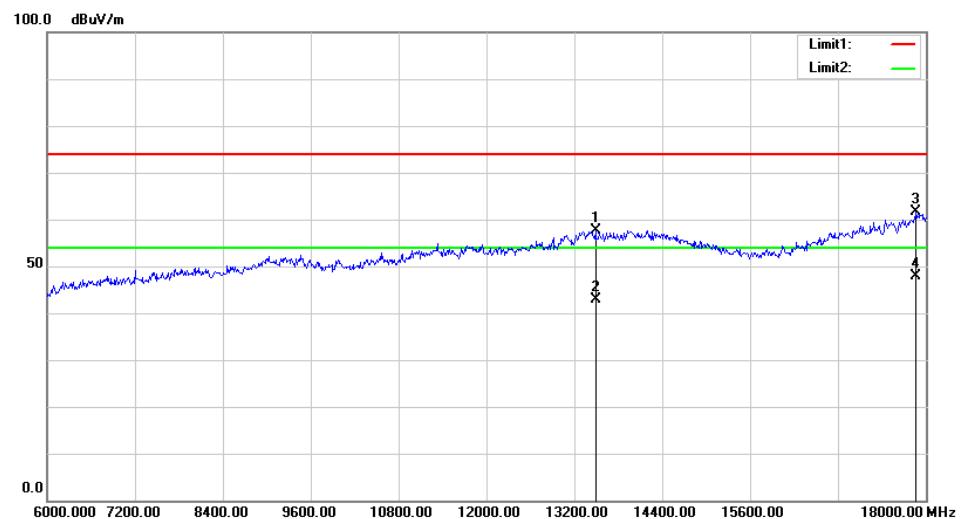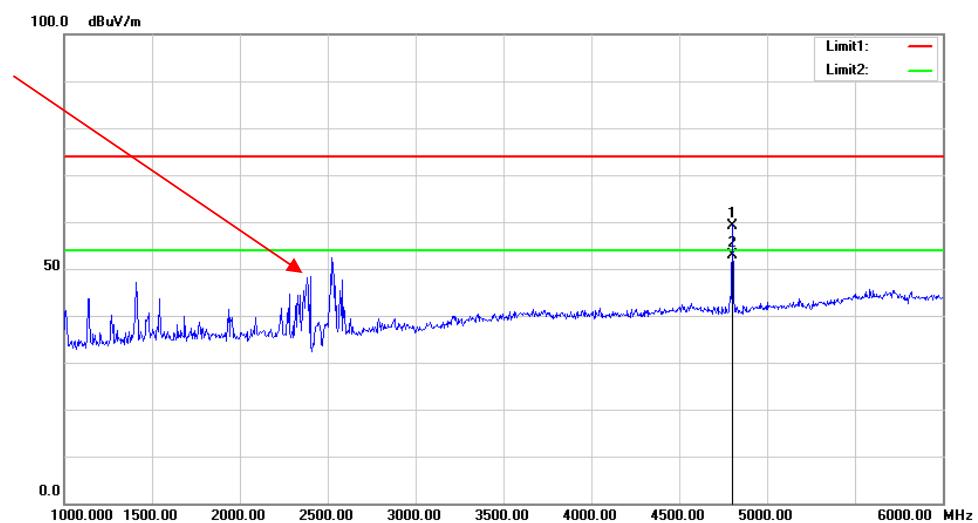

FCC §15.247(A) (1)& RSS-247 CLAUSE 5.1 B) - CHANNEL SEPARATION TEST**Applicable Standard**

According to FCC §15.247(a) (1), RSS-247 Clause 5.1 b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	24.1°C
Relative Humidity:	61%
ATM Pressure:	101.4 kPa
Tester:	Calvin Chen
Test Date:	2020-03-17


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
Low	2402	1.002	1.29

Note: Limit= $(2/3) \times 20\text{dB bandwidth}$

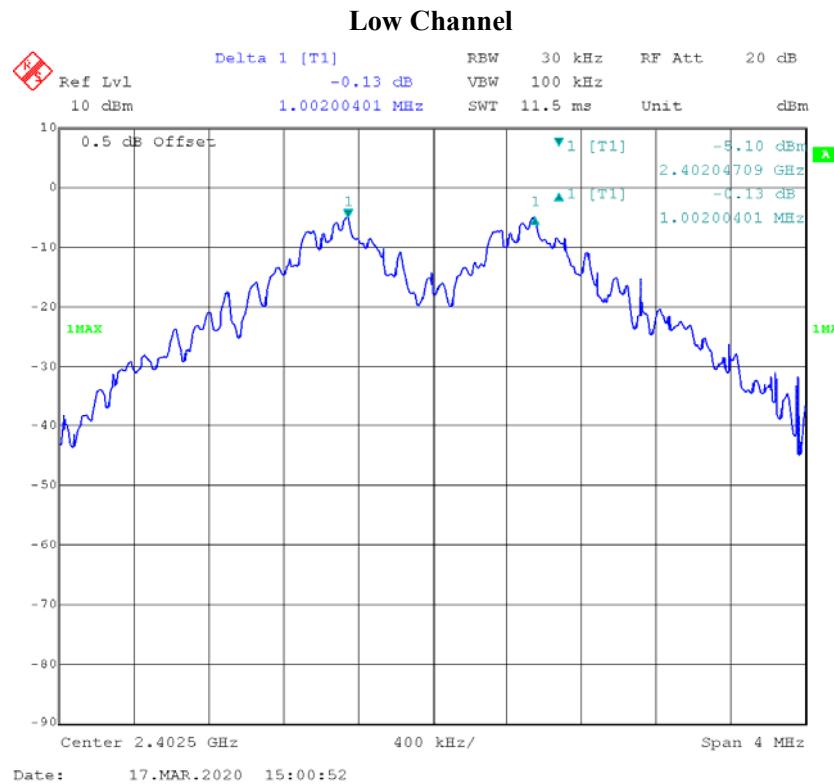

RSS-247 CLAUSE 5.1&RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH TESTING

Applicable Standard

According to FCC §15.247(a) (1)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 Clause 5.1 b):

- b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

According to RSS-Gen Clause 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.1°C
Relative Humidity:	61%
ATM Pressure:	101.4 kPa
Tester:	Calvin Chen
Test Date:	2020-03-17

Test Result: Compliance.


Please refer to following tables and plots



Test Mode: Transmitting



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% occupied Bandwidth (MHz)
Low	2402	1.93	1.87
Middle	2440	1.90	1.95
High	2480	1.92	1.88


20dB Bandwidth:

Low Channel

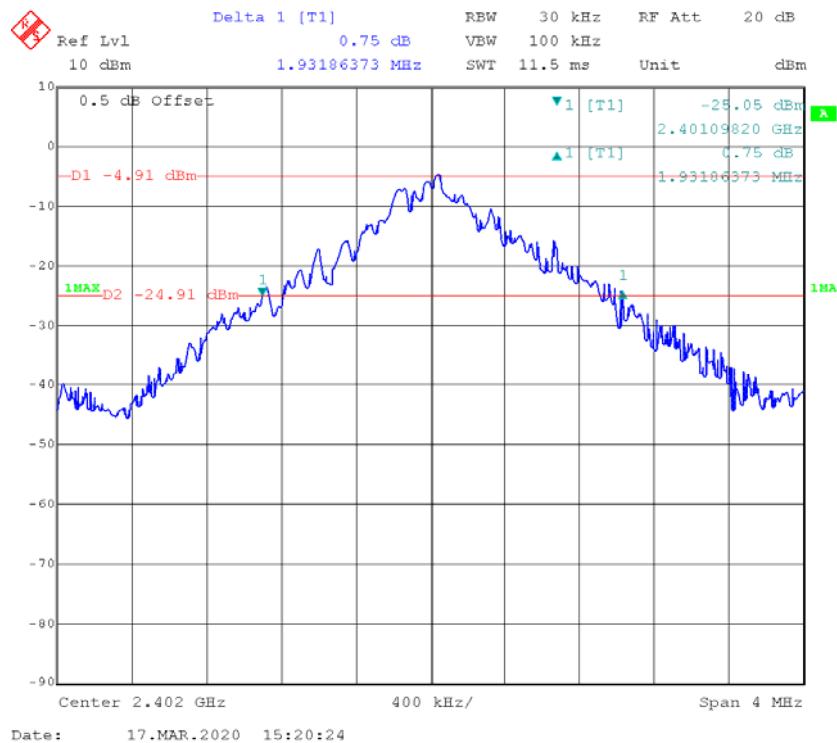

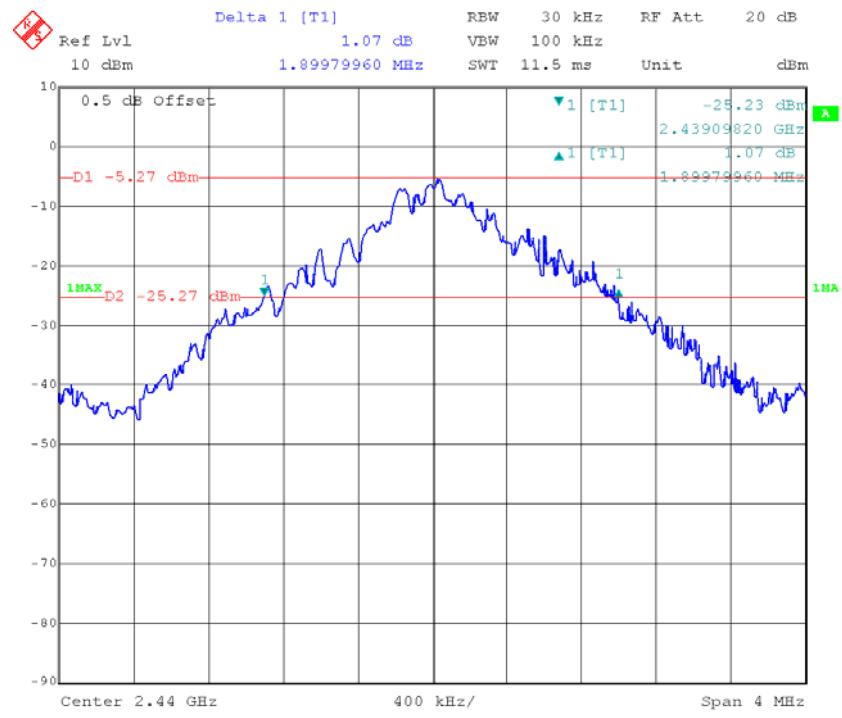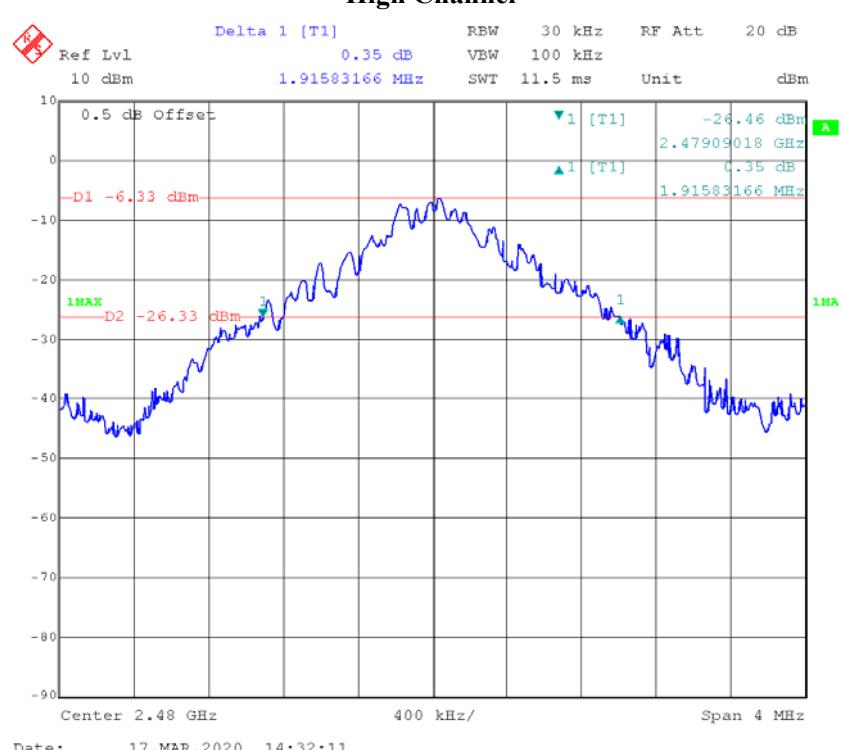Middle Channel**High Channel**

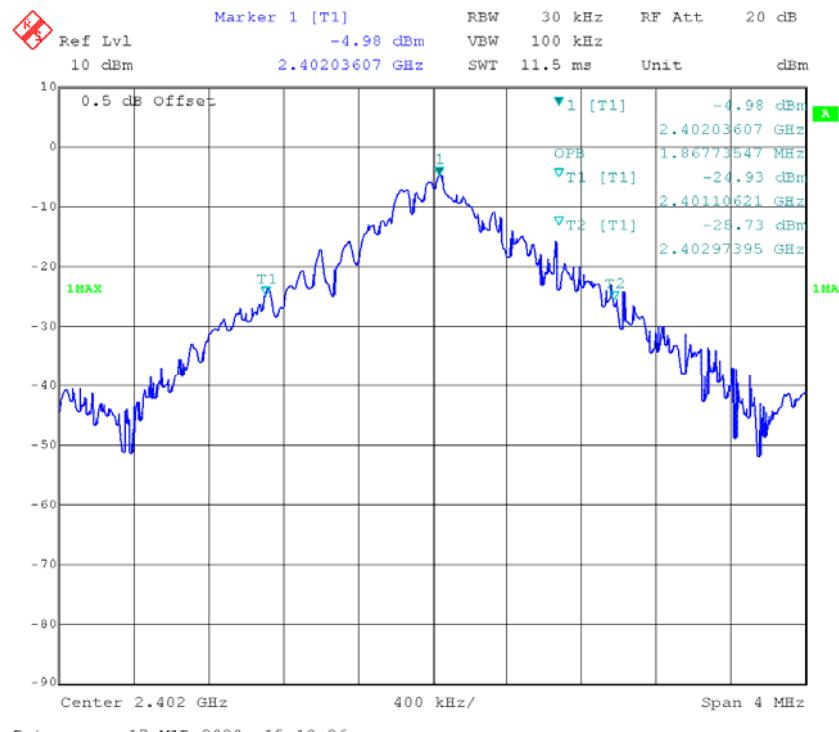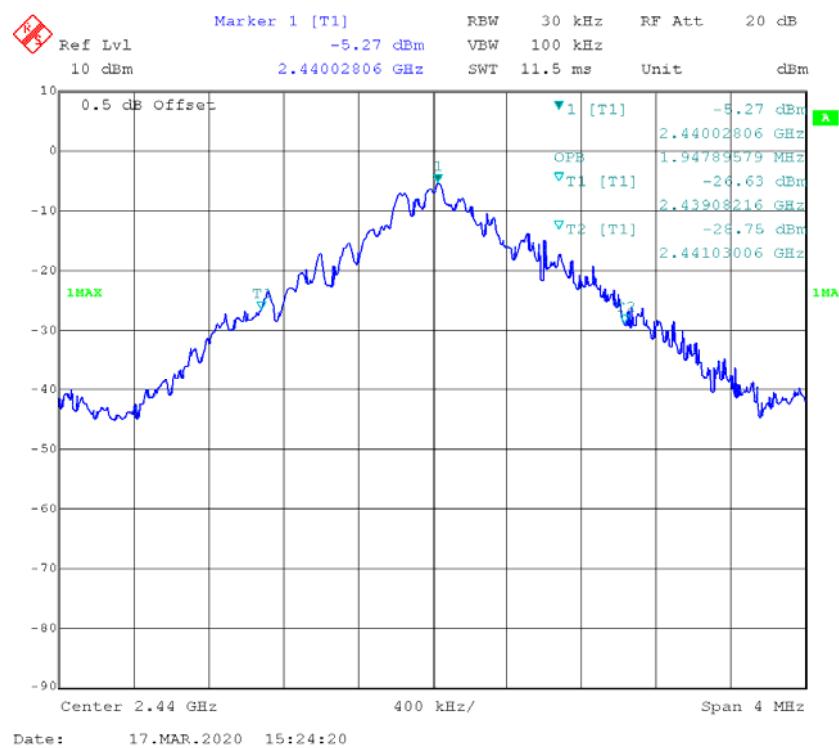99% Occupied Bandwidth:**Low Channel****Middle Channel**

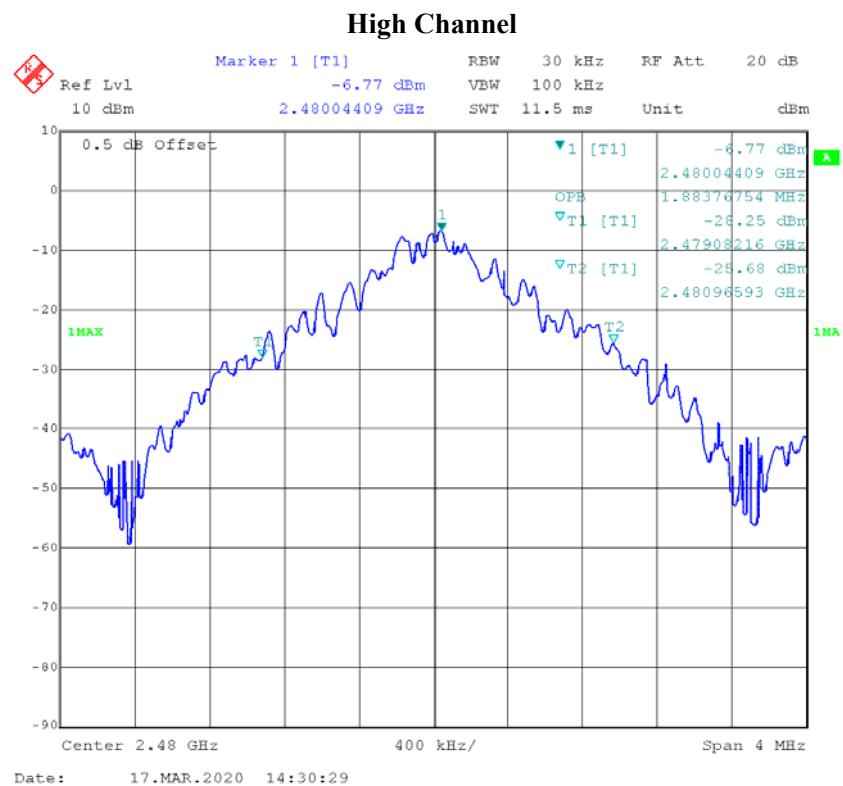

FCC §15.247(a) (1) (iii)& RSS-247 CLAUSE 5.1 d) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

According to FCC §15.247(a) (1) (iii), RSS-247 Clause 5.1 d)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.1°C
Relative Humidity:	61%
ATM Pressure:	101.4 kPa
Tester:	Calvin Chen
Test Date:	2020-03-17


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	16	≥15

Number of Hopping Channels

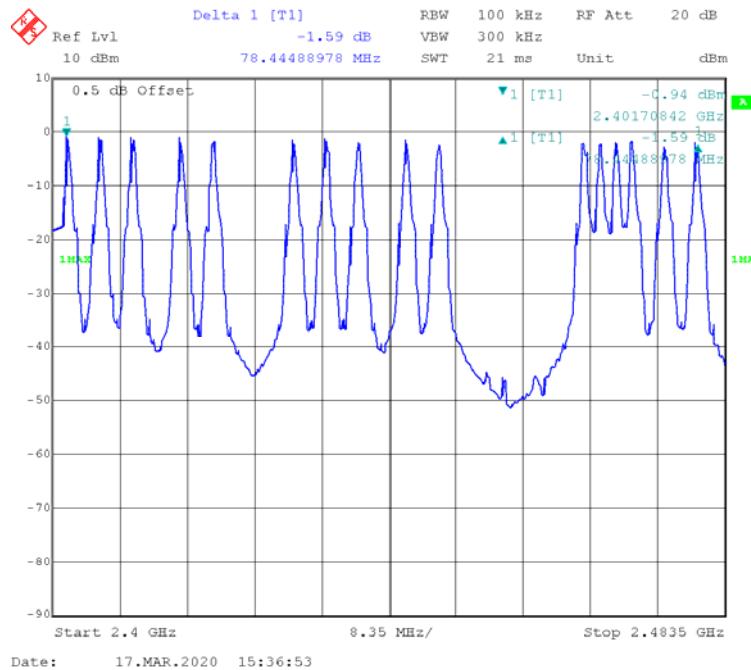

FCC §15.247(a) (1) (iii)& RSS-247 Clause 5.1 d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii), RSS-247 Clause 5.1 d)

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data



Environmental Conditions

Temperature:	22.2°C~24.1°C
Relative Humidity:	45%~61%
ATM Pressure:	101.1 kPa~101.4 kPa
Tester:	Calvin Chen
Test Date:	2020-03-17~2020-03-27

Test Mode: Transmitting

Channel	Frequency (MHz)	Pulse time (ms)	Hopping Numbers in Observation period	Result (s)	Limit (s)
Low	2402	0.067	45	0.003	0.4

Note:
Dwell time=Pulse time (ms) × Hopping Numbers in Observation period
Observation period =0.4×Hopping Channel Numbers=0.4×16=6.4s

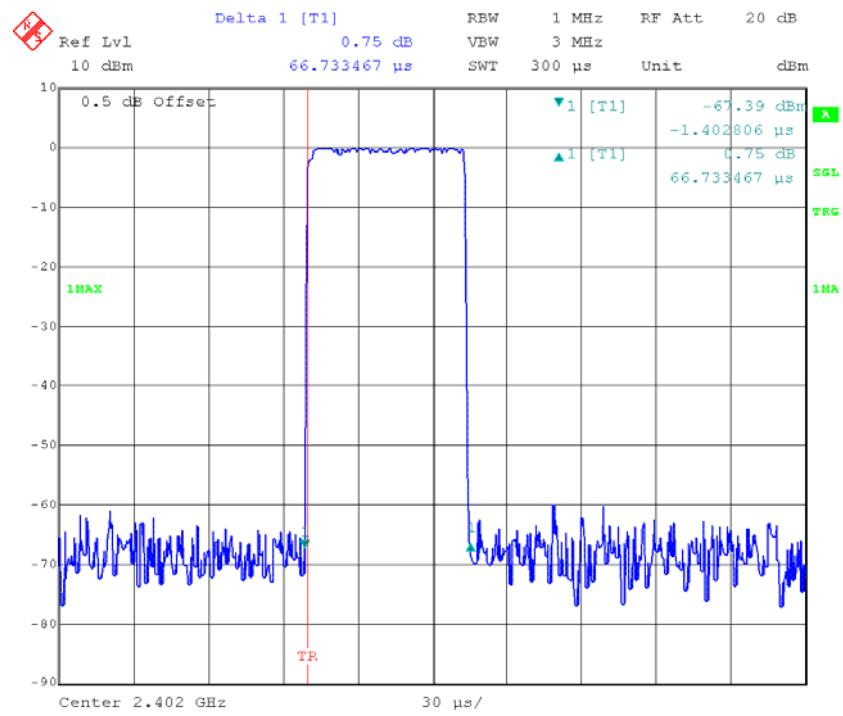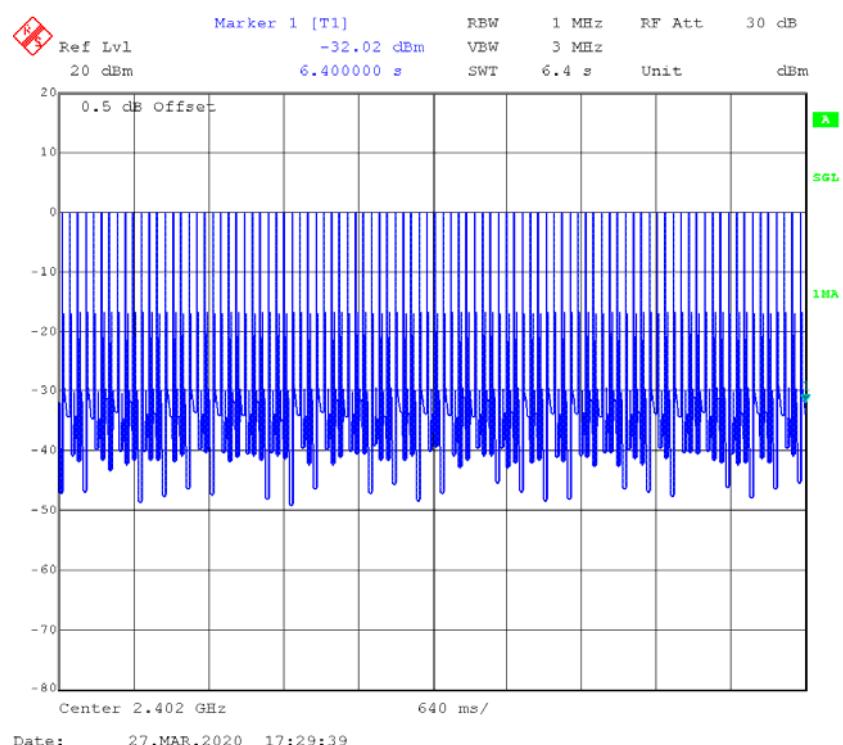Pulse time**Hopping Numbers in period**

FCC §15.247(b) (1), RSS-247 Clause 5.4 b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

According to RSS-247 Clause 5.4 b)

- b) For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2019-09-23	2020-09-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.1~24.6°C
Relative Humidity:	51~61%
ATM Pressure:	101.4 kPa
Tester:	Calvin Chen
Test Date:	2020-03-17~2020-03-27

Test Result: Compliance.

Test Mode: Transmitting

Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
2402	0.62	21
2440	0.51	21
2480	0.56	21

Note: The data above was tested in conducted mode, the antenna gain is 0 dBi, meet the EIRP limit of RSS-247.

FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.1~24.6°C
Relative Humidity:	51~61%
ATM Pressure:	101.4 kPa
Tester:	Calvin Chen
Test Date:	2020-03-17~2020-03-27


Test Result: Compliance

Single mode:

Band Edge, Left Side

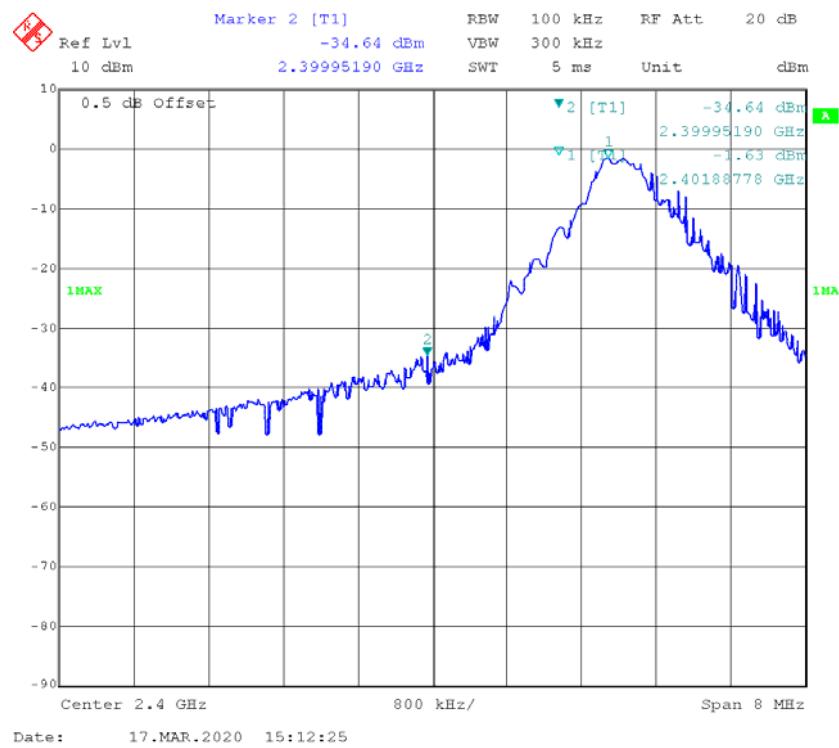


Band Edge, Right Side

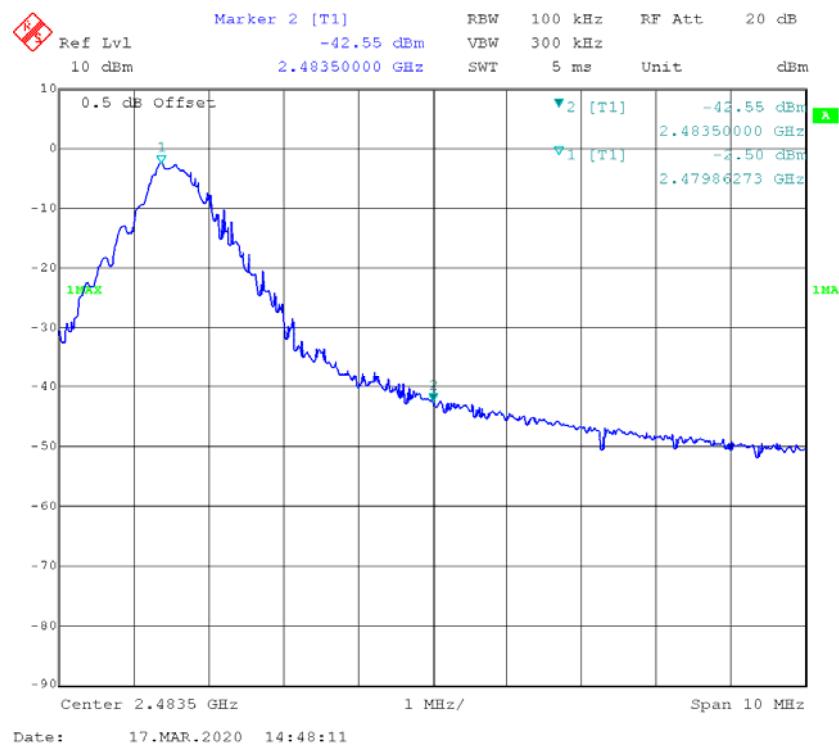


Hopping mode:

Band Edge, Left Side

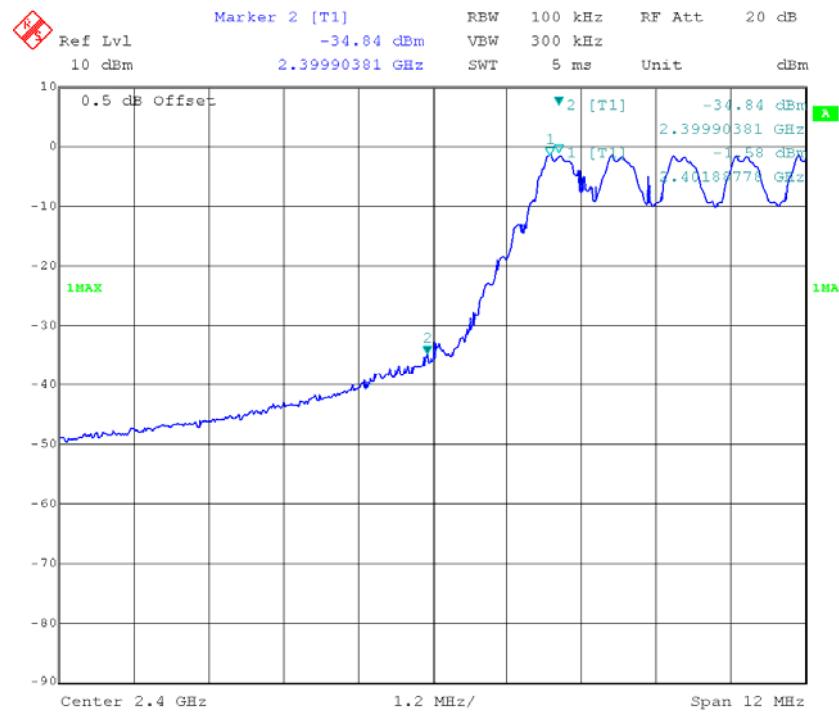

Band Edge, Right Side

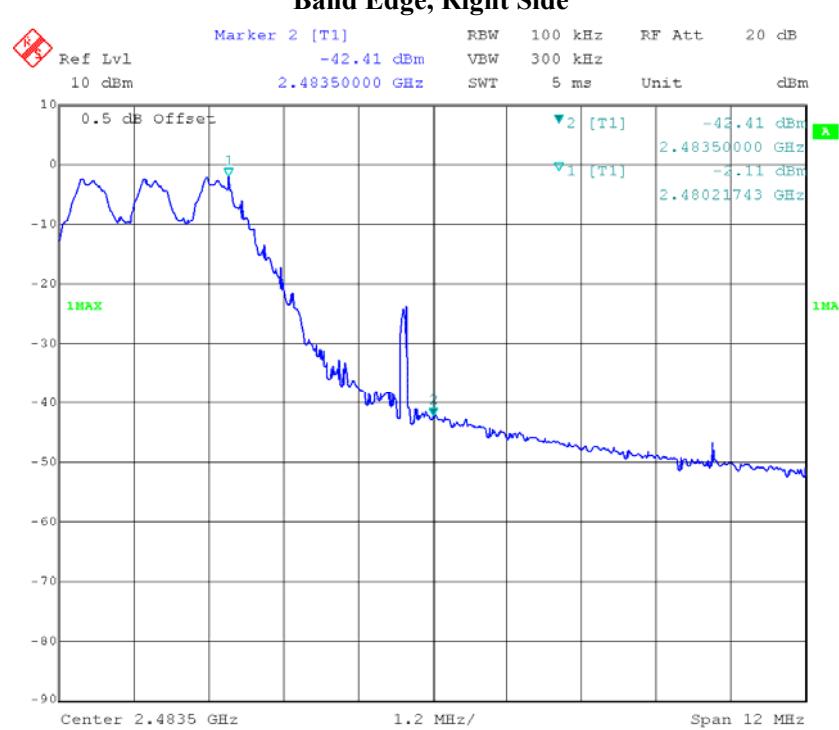

***** END OF REPORT *****