



# FCC RF Test Report

**APPLICANT** : HMD Global Oy  
**EQUIPMENT** : GSM/WCDMA/LTE Mobile Phone  
**BRAND NAME** : Nokia  
**MODEL NAME** : TA-1092  
**FCC ID** : 2AJOTTA-1092  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Oct. 29, 2018 and testing was completed on Nov. 21, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

**Sportun International (Kunshan) Inc.**  
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,  
Jiangsu Province 215335, China



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT .....	6
1.6 Re-use of Measured Data .....	7
1.7 Testing Location .....	9
1.8 Applicable Standards.....	9
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>10</b>
2.1 Carrier Frequency Channel .....	10
2.2 Test Mode .....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system .....	12
2.5 EUT Operation Test Setup .....	12
<b>3 TEST RESULT .....</b>	<b>13</b>
3.1 Radiated Band Edges and Spurious Emission Measurement .....	13
3.2 AC Conducted Emission Measurement.....	17
3.3 Antenna Requirements .....	19
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>20</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>21</b>
<b>APPENDIX A. AC CONDUCTED EMISSION TEST RESULT</b>	
<b>APPENDIX B. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX C. DUTY CYCLE PLOTS</b>	
<b>APPENDIX D. SETUP PHOTOGRAPHS</b>	
<b>APPENDIX E. REFERENCE REPORT</b>	



## REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	1
-	-	99% Bandwidth	-	Pass	1
-	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	1
-	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	1
-	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	1
3.1	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.23 dB at 45.52 MHz
3.2	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.13 dB at 3.276 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-
<b>Remark 1:</b> Test items are performed on original report which can be referred to Sporton report number FR832104B.					



## 1 General Description

### 1.1 Applicant

**HMD Global Oy**

Bertel Jungin aukio 9, 02600 Espoo, Finland

### 1.2 Manufacturer

**HMD Global Oy**

Bertel Jungin aukio 9, 02600 Espoo, Finland

### 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	GSM/WCDMA/LTE Mobile Phone
<b>Brand Name</b>	Nokia
<b>Model Name</b>	TA-1092
<b>FCC ID</b>	2AJOTTA-1092
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/ WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth BR/EDR/LE
<b>IMEI Code</b>	864520040008403/864520040008411
<b>HW Version</b>	HW0541
<b>SW Version</b>	000C_0_390
<b>EUT Stage</b>	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This project is FCC change ID application (original report FCC ID: 2AJOTTA-1080) and changed dual SIM card slot to single SIM card slots, changed Model Name and HW Version. Since the test result is not affected by the changes, so all the test results release from original report which can be referred to Sporton report number FR8O2901B, FCC ID: 2AJOTTA-1080.



## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	40
<b>Carrier Frequency of Each Channel</b>	40 Channel(37 hopping + 3 advertising channel)
<b>Antenna Type / Gain</b>	PIFA Antenna with gain -3.00 dBi
<b>Type of Modulation</b>	Bluetooth LE : GFSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Re-use of Measured Data

### 1.6.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: TA-1080, FCC ID: 2AJOTTA-1080) is electrically identical to the reference device (Model: TA-1084, FCC ID: 2AJOTTA-1084) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 484596 D01.

### 1.6.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration.

The re-used RF data includes the following bands provided in Appendix A (Sporton RF Report No. FR832104B for the reference device Model: TA-1084, FCC ID: 2AJOTTA-1084).

### 1.6.3 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test	Report Title/Section
DSS (BR/EDR)	2AJOTTA-1084	Part15C (FR832104A)	All sections applicable except AC Conducted Emission and Radiated Spurious Emission.
DTS (BLE)	2AJOTTA-1084	Part15C (FR832104B)	All sections applicable except AC Conducted Emission and Radiated Spurious Emission.
DTS (WLAN)	2AJOTTA-1084	Part15C (FR832104C)	All sections applicable except AC Conducted Emission and Radiated Spurious Emission.



#### 1.6.4 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for the following test items, the test result were consistent with FCC ID: 2AJOTTA-1084.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

Test Item	Mode	2AJOTTA-1084 Worst Result	2AJOTTA-1080 Worst Result	Difference (dB)
Peak Conducted Power (dBm)	802.11b	18.18	17.22	-0.96
	802.11g	23.18	22.85	-0.33
	11n HT20	23.04	21.81	-1.23
	11n HT40	23.29	22.72	-0.57
	BT (1Mbps)	9.83	9.69	-0.14
	BT (2Mbps)	10.67	10.49	-0.18
	BT (3Mbps)	10.88	10.88	0
	BT LE	1.12	1.14	0.02



## 1.7 Testing Location

Sportun Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

<b>Test Site</b>	Sportun International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
<b>Test Site No.</b>	<b>Sportun Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH04-KS	CN5013	630927

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05
- ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



## 2.2 Test Mode


a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth LE / GFSK
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter)

**Remark:** For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable.

## 2.3 Connection Diagram of Test System

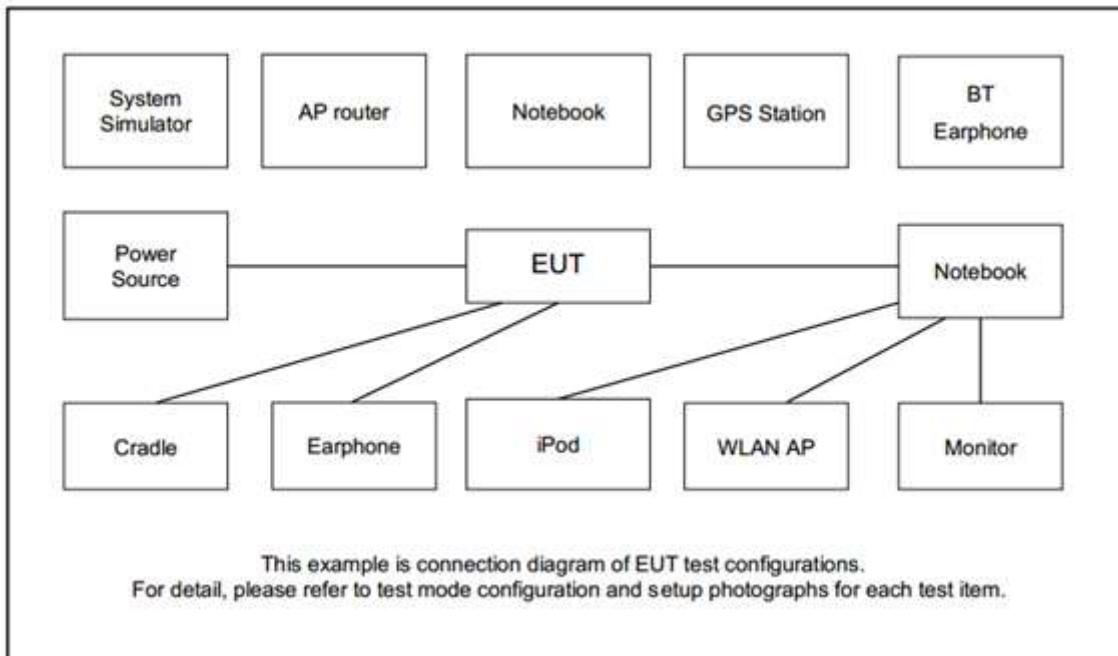

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.



### 3 Test Result

#### 3.1 Radiated Band Edges and Spurious Emission Measurement

##### 3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.1.4 Test Setup


For radiated emissions below 30MHz

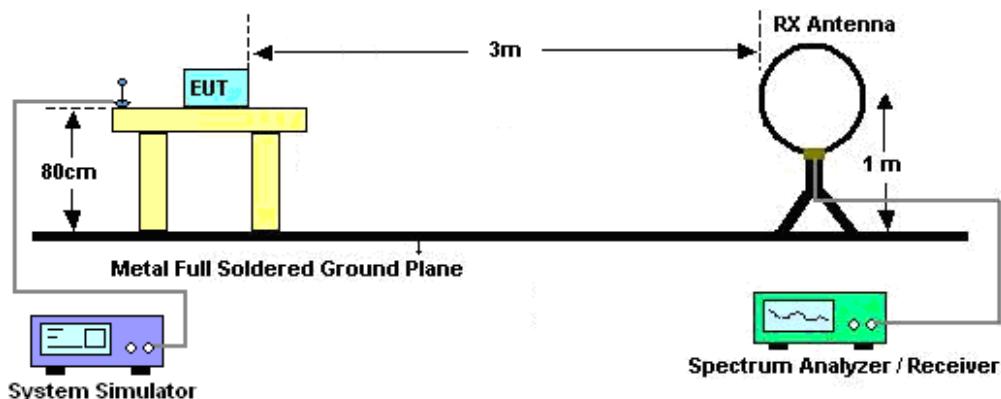

For radiated emissions from 30MHz to 1GHz

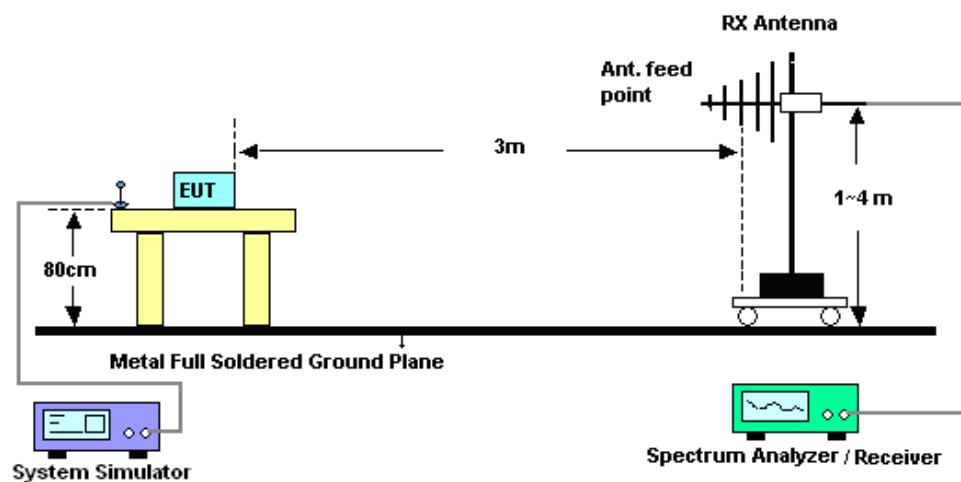

For radiated emissions above 1GHz

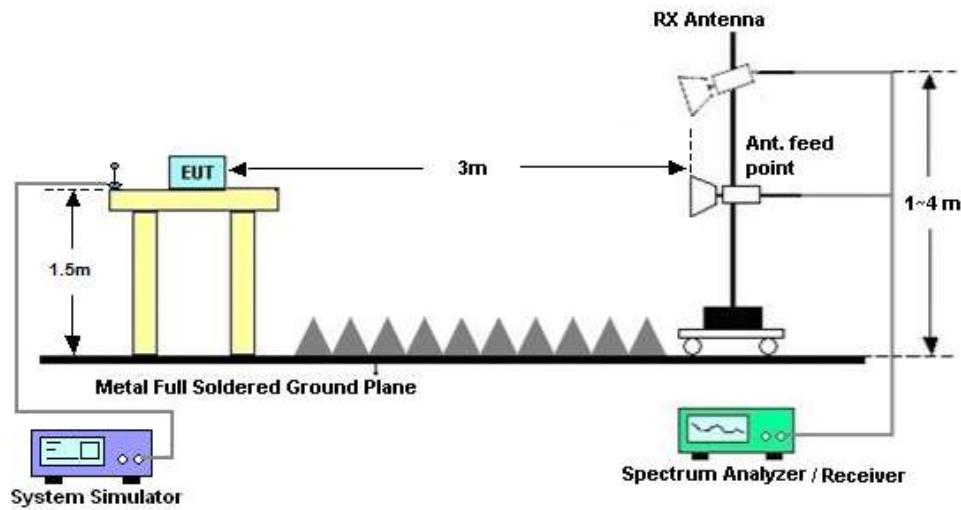



### 3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.1.7 Duty Cycle

Please refer to Appendix C.

### 3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



## 3.2 AC Conducted Emission Measurement

### 3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.2.4 Test Setup

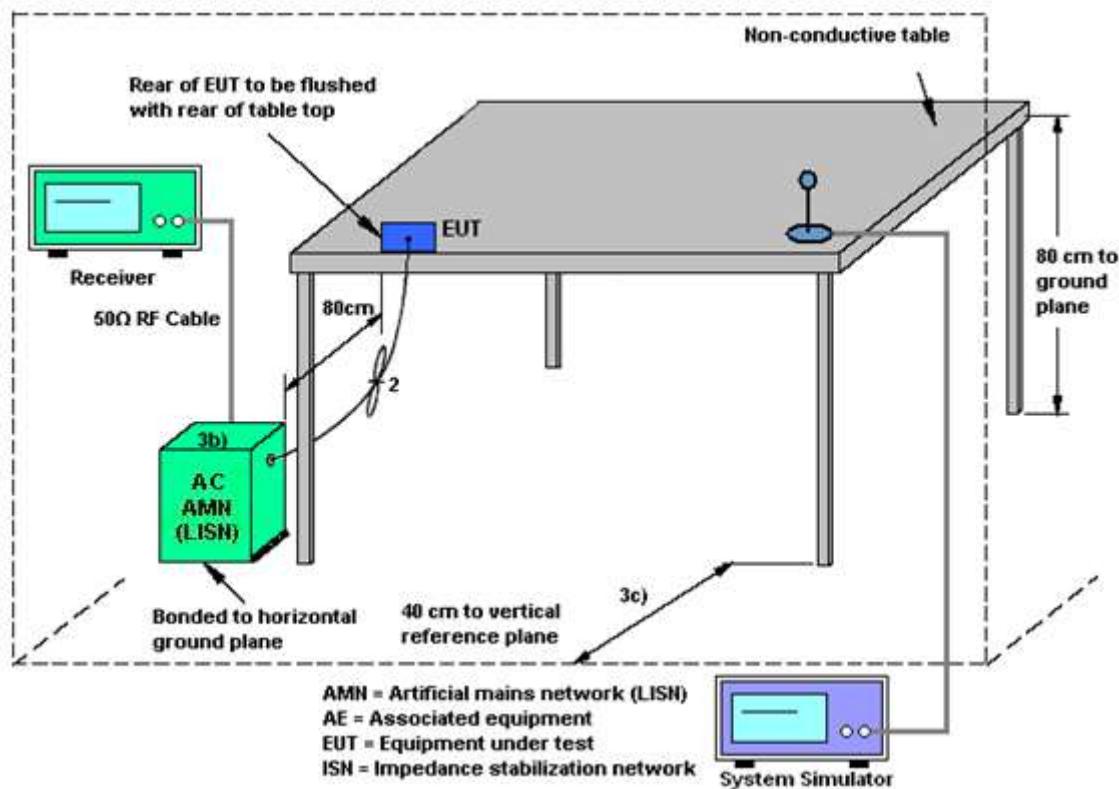

### 3.2.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



### 3.3 Antenna Requirements

#### 3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug.06, 2018	Nov. 17, 2018	Aug.05, 2019	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 08	10Hz-44G, MAX 30dB	Apr.17, 2018	Nov. 17, 2018	Apr. 16, 2019	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Nov. 17, 2018	Oct. 18, 2019	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 29, 2018	Nov. 17, 2018	Jan. 28, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1648	1GHz~18GHz	Dec. 16, 2017	Nov. 17, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170 49	BBHA1702 49	15GHz~40GHz	Feb. 07, 2018	Nov. 17, 2018	Feb. 06, 2019	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz ~3000MHz	Dec. 16, 2017	Nov. 17, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Feb. 8, 2018	Nov. 17, 2018	Feb. 07, 2019	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Nov. 17, 2018	Apr. 16, 2019	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY532702 03	500MHz~26.5GHz	Dec. 16, 2017	Nov. 17, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Nov. 17, 2018	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 17, 2018	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 17, 2018	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Nov. 21, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Nov. 21, 2018	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 23, 2017	Nov. 21, 2018	Nov. 22, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Nov. 21, 2018	Oct. 11, 2019	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
--	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
--	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
--	-------


### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
--	-------



## Appendix A. AC Conducted Emission Test Results

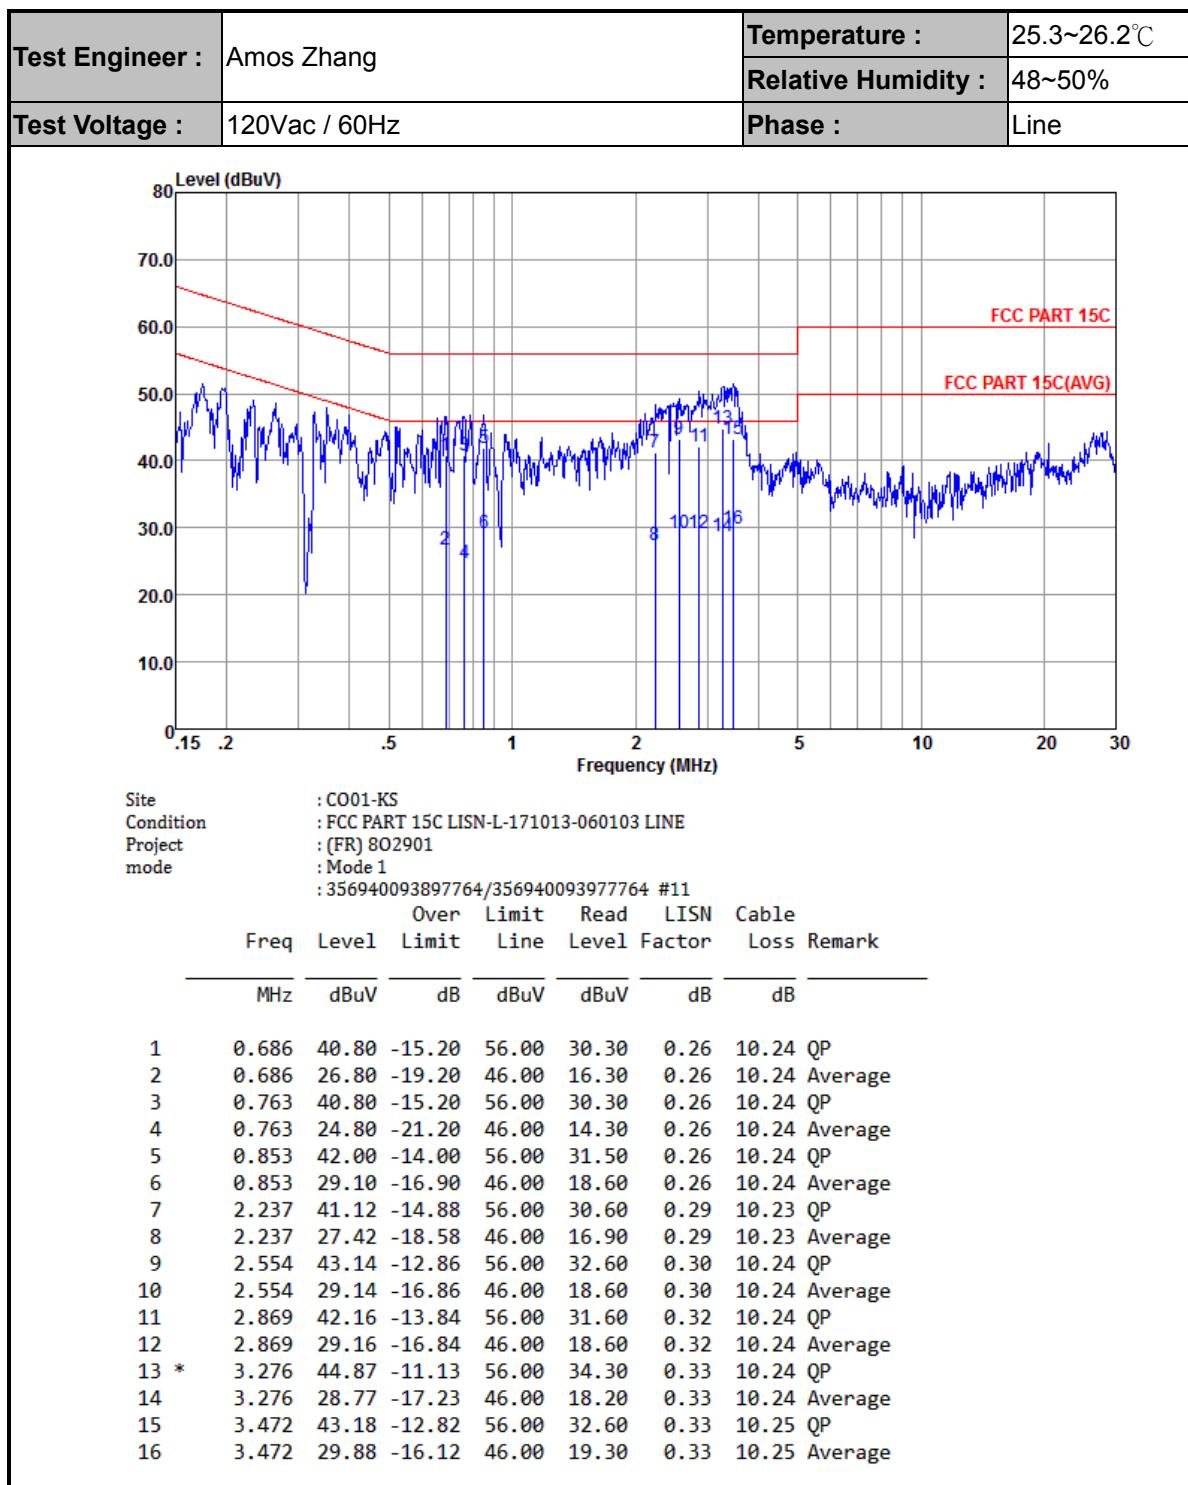

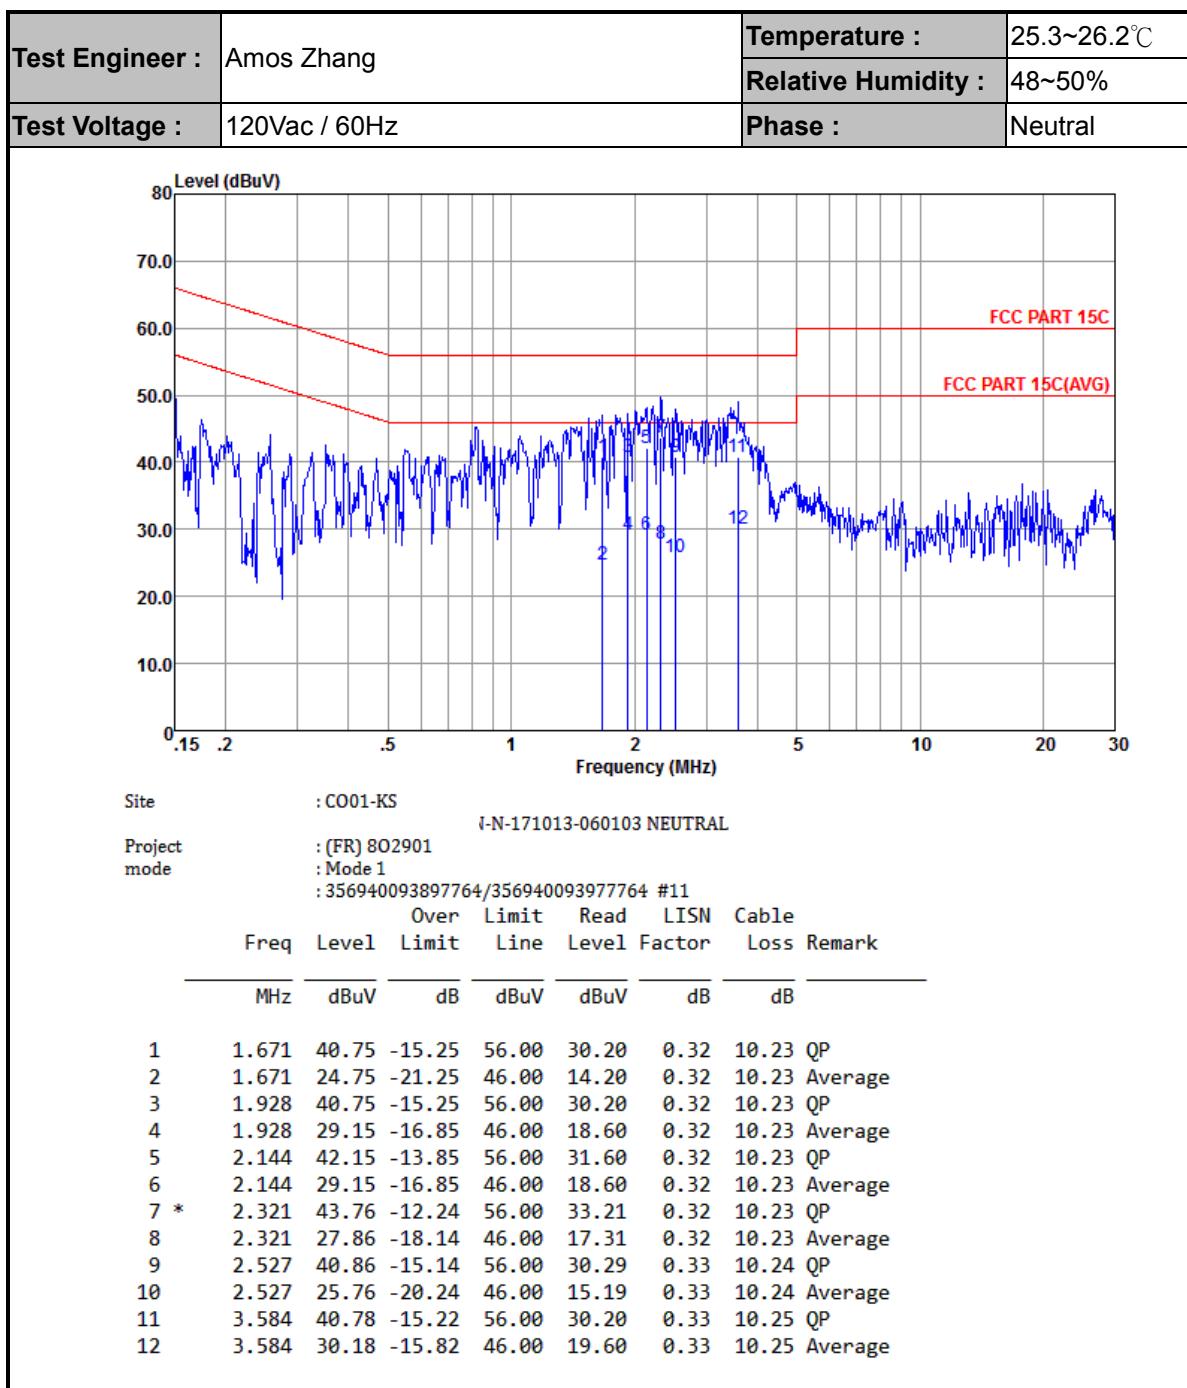



## Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2365.77	40.52	-33.48	74	42.44	25.49	5.59	33	100	57	P	H	
		2389.3	28.28	-25.72	54	30.05	25.6	5.63	33	100	57	A	H	
	*	2402	96.2	-	-	98	25.6	5.63	33.03	100	57	P	H	
	*	2402	95.31	-	-	97.11	25.6	5.63	33.03	100	57	A	H	
		2364.21	39.89	-34.11	74	41.78	25.49	5.59	32.97	400	129	P	V	
		2365.9	28.07	-25.93	54	29.99	25.49	5.59	33	400	129	A	V	
	*	2402	90.87	-	-	92.67	25.6	5.63	33.03	400	129	P	V	
	*	2402	89.97	-	-	91.77	25.6	5.63	33.03	400	129	A	V	
BLE CH 39 2480MHz		2483.5	48.67	-25.33	74	48.91	26.53	5.72	32.49	100	64	P	H	
		2483.5	32.02	-21.98	54	32.26	26.53	5.72	32.49	100	64	A	H	
	*	2480	96.46	-	-	96.7	26.53	5.72	32.49	100	64	P	H	
	*	2480	95.67	-	-	95.91	26.53	5.72	32.49	100	64	A	H	
		2483.62	45.61	-28.39	74	45.85	26.53	5.72	32.49	382	97	P	V	
		2483.56	30.81	-23.19	54	31.05	26.53	5.72	32.49	382	97	A	V	
	*	2480	93.85	-	-	94.09	26.53	5.72	32.49	382	97	P	V	
	*	2480	92.93	-	-	93.17	26.53	5.72	32.49	382	97	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>BLE CH 00 2402MHz</b>		4806	40.65	-33.35	74	63.47	30.88	8.43	62.13	100	0	P	H
		4806	40.34	-33.66	74	63.16	30.88	8.43	62.13	100	0	P	V
<b>BLE CH 19 2440MHz</b>		4878	36.39	-37.61	74	59.02	31.05	8.43	62.11	100	0	P	H
		7320	39.68	-34.32	74	56.81	35.56	10.08	62.77	100	0	P	H
		4878	36.21	-37.79	74	58.84	31.05	8.43	62.11	100	0	P	V
		7320	40.91	-33.09	74	58.04	35.56	10.08	62.77	100	0	P	V
<b>BLE CH 39 2480MHz</b>		4962	43.64	-30.36	74	66.01	31.27	8.44	62.08	100	0	P	H
		7440	40.05	-33.95	74	56.85	35.8	10.18	62.78	100	0	P	H
		4962	42.43	-31.57	74	64.8	31.27	8.44	62.08	100	0	P	V
		7440	41.14	-32.86	74	57.94	35.8	10.18	62.78	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
2.4GHz BLE LF		31.94	20.83	-19.17	40	30.24	23.08	0.48	32.97	100	236	P	H	
		117.3	15.01	-28.49	43.5	29.14	17.73	1.07	32.93	-	-	P	H	
		405.39	24.17	-21.83	46	33.47	21.7	2.13	33.13	-	-	P	H	
		644.01	23.47	-22.53	46	29.35	24.73	2.7	33.31	-	-	P	H	
		688.63	25.58	-20.42	46	31.15	24.87	2.84	33.28	-	-	P	H	
		859.35	25.81	-20.19	46	28.72	26.34	3.29	32.54	-	-	P	H	
		45.52	29.77	-10.23	40	45.99	16.15	0.59	32.96	100	213	P	V	
		92.08	15.3	-28.2	43.5	32.19	15.1	0.93	32.92	-	-	P	V	
		406.36	23.91	-22.09	46	33.19	21.72	2.13	33.13	-	-	P	V	
		530.52	22.48	-23.52	46	29.57	23.76	2.43	33.28	-	-	P	V	
		718.7	25.5	-20.5	46	30.68	25.12	2.92	33.22	-	-	P	V	
		951.5	27.42	-18.58	46	28.7	26.96	3.45	31.69	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>

**A calculation example for radiated spurious emission is shown as below:**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dB $\mu$ V/m) =Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)**For Peak Limit @ 2390MHz:**1. Level(dB $\mu$ V/m)= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)= 32.22(dB/m) + 4.58(dB) + 54.51(dB $\mu$ V) – 35.86 (dB)= 55.45 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)= 55.45(dB $\mu$ V/m) – 74(dB $\mu$ V/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**1. Level(dB $\mu$ V/m)= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)= 32.22(dB/m) + 4.58(dB) + 42.6(dB $\mu$ V) – 35.86 (dB)= 43.54 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)= 43.54(dB $\mu$ V/m) – 54(dB $\mu$ V/m)


= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**

## Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE	61.981	0.388	2.577	3KHz

### Bluetooth LE

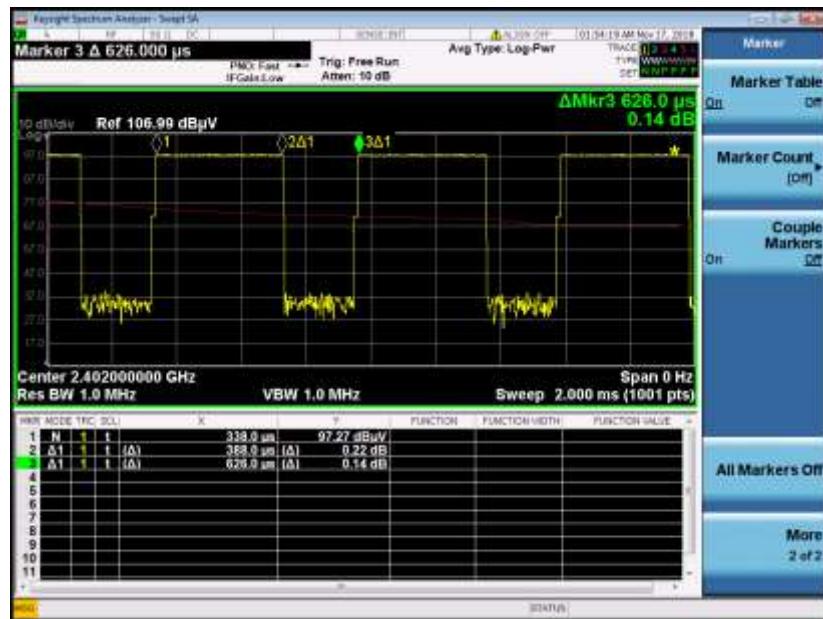



## **Appendix E. Reference Report**

Please refer to Sporton report number FR832104B which is issued separately.