



TEST REPORT

No. I22N00821-RF-GSM

for

HMD Global Oy

Smart Phone

Model Name: TA-1339

FCC ID: 2AJOTTA-1339

with

Hardware Version: V01B

Software Version: 000T_1_111

Issued Date: 2022-04-19

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn www.caict.ac.cn



No. I22N00821-RF-GSM

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22N00821-RF-GSM	Rev.0	1st edition	2022-04-19

CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. STATEMENT	11
8. TEST EQUIPMENTS UTILIZED.....	12
ANNEX A: MEASUREMENT RESULTS	13
A.1 OUTPUT POWER.....	13
A.2 FIELD STRENGTH OF SPURIOUS RADIATION.....	21
A.3 FREQUENCY STABILITY	28
A.4 OCCUPIED BANDWIDTH.....	31
A.5 EMISSION BANDWIDTH	44
A.6 BAND EDGE COMPLIANCE	56
A.7 CONDUCTED SPURIOUS EMISSION	63
A.8 PEAK-TO-AVERAGE POWER RATIO	79



No. I22N00821-RF-GSM

1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	Smart Phone
Model Name	TA-1339
Applicant's name	HMD Global Oy
Manufacturer's Name	HMD Global Oy

1.2. Test Standards

FCC Part 2/22/24 10-1-19 Edition
ANSI C63.26 2015
KDB971168 D01 v03r01

1.3. Test Result

All test items are pass. Please refer to "6 Summary of Test Results" for detail.

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000

1.5. Project Data

Testing Start Date: 2021-02-23 Testing End Date: 2022-04-18

1.6. Signature

王平

Wang Ping

(Prepared this test report)

董承叙

Huang Qiugui

(Reviewed this test report)

2018

Zhang Hao

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: HMD Global Oy
Address /Post: Bertel Jungin aukio 9, 02600 Espoo, Finland
Contact Person: Reza Serafat
Contact Email: reza.serafat@hmdglobal.com
Telephone: +393 31 6272922
Fax: /

2.2. Manufacturer Information

Company Name: HMD Global Oy
Address /Post: Bertel Jungin aukio 9, 02600 Espoo, Finland
Contact Person: Reza Serafat
Contact Email: reza.serafat@hmdglobal.com
Telephone: +393 31 6272922
Fax: /



3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)

3.1. About EUT

Description	Smart Phone
Model Name	TA-1339
FCC ID	2AJOTTA-1339
Frequency Bands	GSM850; GSM1900
Antenna	Integrated
Extreme vol. Limits	3.60V to 4.35V (nominal: 3.80V)
Extreme temp. Tolerance	-10°C to +55°C
Condition of EUT as received	No abnormality in appearance

Note1: Components list, please refer to documents of the manufacturer; it is also included in the original test record of SAICT.

Note2: The Declaration of changes from initial TA-1339 to variant TA-1339 are as below:

- 1) The SW Version is different. The initial is 000T_0_513. The variant is 000T_1_111.
- 2) The chip changed from SC9863A to SC9863A1
- 3) The variant TA-1339 added a Battery(AE1-2) Model:BL-29CI

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
UT09aa	357321210003348	V01B	000T_0_513	2021-02-22
UT03aa	357321210004569	V01B	000T_0_513	2021-02-19
UT01aa	357321212704901	V01B	000T_1_111	2022-04-01
UT03aa	357321212704885	V01B	000T_1_111	2022-04-01

*EUT ID: is used to identify the test sample in the lab internally.

UT01aa/UT09aa are used for conduction test, UT03aa is used for radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	USB Cable
AE4	Headset
AE1-1	
Model	BL-29CI
Manufacturer	Fenghua Battery Co.,Ltd.
Capacity	2950mAh
Nominal Voltage	3.8V
AE1-2	
Model	BL-29CI
Manufacturer	Shenzhen Aerospace Electronic Co.,Ltd.
Capacity	2950mAh
Nominal Voltage	3.8V



AE2

Model A18A-050100U-US2
Manufacturer Dongguan Aohai Technology Co.,Ltd.

AE3

Model MO34B1000100
Manufacturer FKY-QY Electronic Technology Co. Ltd

AE4

Model JWEP1199-M01H (178210504)
Manufacturer JUWEI ELECTRONICS CO.,LTD

*AE ID is used to identify the test sample in the lab internally.

AE: ancillary equipment

3.4. General Description

The Equipment Under Test (EUT) is a model Smart Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.



4. REFERENCE DOCUMENTS

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-19
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	Edition 10-1-19
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	Edition 10-1-19
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01



5. LABORATORY ENVIRONMENT

Shielded room did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz



6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

GSM850

Items	List	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P

PCS1900

Items	List	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/KDB971168 D01	A.8	P



7. STATEMENT

The EUT is a variant model of TA-1339, All the original values of this report are quoted directly from I21N000548-RF-GSM. We just do some spot check of Variant TA-1339.

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.



8. TEST EQUIPMENTS UTILIZED

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101676	2022-11-24
2	BiLog Antenna	3142E	ETS-Lindgren	0224831	2024-05-27
3	Horn Antenna	3117	ETS-Lindgren	00066577	2022-04-02
4	Horn Antenna	QSH-SL-18 -26-S-20	Q-par	17013	2023-01-06
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2022-12-05
6	Antenna	VUBA 9117	Schwarzbeck	207	2023-07-15
7	Antenna	QWH-SL-18 -40-K-SG	Q-par	15979	2023-01-06
8	preamplifier	83017A	Agilent	MY39501110	/
9	Signal Generator	SMB100A	R&S	179725	2022-11-24
10	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2023-05-29
11	Spectrum Analyzer	FSV40	R&S	101192	2022-01-13
12	Universal Radio Communication Tester	CMU200	R&S	114545	2022-01-13
13	Universal Radio Communication Tester	CMU200	R&S	123210	2022-12-13
14	Spectrum Analyzer	FSU	R&S	101506	2022-12-13
15	Temperature Chamber	SH-241	ESPEC	92007516	2022-10-15
16	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2022-11-13

Test software

Item	Name	Vesion
Radiated	EMC32	V10.50.40



ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 2.1046, 22.913, 24.232.

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains max output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

GSM850

	Power step	Nominal Peak output power (dBm)
GSM	5	33dBm(2W)
GPRS	3	33dBm(2W)
EGPRS	6	27dBm(0.5W)

Measurement result

GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	31.73
836.6	5	31.72
848.8	5	31.71

GPRS(GMSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	3	31.75
836.6	3	31.75
848.8	3	31.74

EGPRS(8PSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	6	25.05
836.6	6	25.43
848.8	6	24.69

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

PCS1900

	Power step	Nominal Peak output power (dBm)
GSM	0	30dBm(1W)
GPRS	3	30dBm(1W)
EGPRS	5	26dBm(0.4W)

Measurement result
GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	0	29.11
1880.0	0	28.97
1909.8	0	28.97

GPRS(GMSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	29.09
1880.0	3	29.01
1909.8	3	28.96

EGPRS(8PSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	5	24.95
1880.0	5	24.88
1909.8	5	24.86

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$



Spot check of Variant TA-1339

GSM850

	Power step	Nominal Peak output power (dBm)
GSM	5	33dBm(2W)
GPRS	3	33dBm(2W)
EGPRS	6	27dBm(0.5W)

Measurement result

GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	31.71

GPRS(GMSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
848.8	3	31.73

EGPRS(8PSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
836.6	6	25.27

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

PCS1900

	Power step	Nominal Peak output power (dBm)
GSM	0	30dBm(1W)
GPRS	3	30dBm(1W)
EGPRS	5	26dBm(0.4W)

Measurement result

GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
1909.8	0	29.03

GPRS(GMSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	28.99

EGPRS(8PSK,1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1880.0	5	24.82

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

A.1.3 Radiated

A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."


Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.1.3.2 Method of Measurement

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

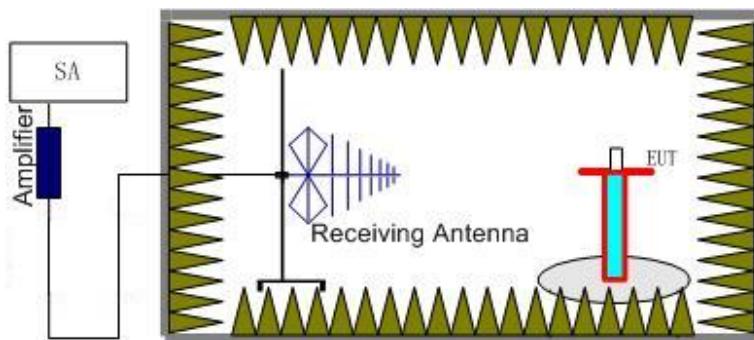

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

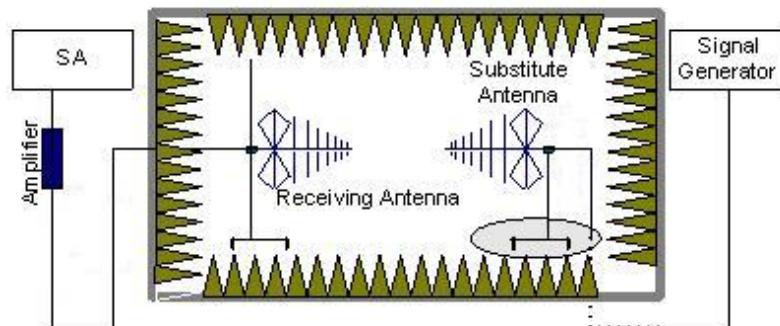

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the



receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain(dBi) (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dB$.

**GSM 850-ERP 22.913(a)****Limits**

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

Measurement result**GSM**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.20	-2.73	-33.60	-0.79	2.15	27.93	38.45	H
836.60	-2.76	-33.50	-0.74	2.15	27.85	38.45	H
848.80	-2.58	-33.50	-0.73	2.15	28.04	38.45	H

GPRS

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.20	-4.81	-33.60	-0.79	2.15	25.85	38.45	H
836.60	-4.88	-33.50	-0.74	2.15	25.73	38.45	H
848.80	-4.58	-33.50	-0.73	2.15	26.04	38.45	H

EGPRS-8PSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.20	-9.03	-33.60	-0.79	2.15	21.63	38.45	H
836.60	-8.66	-33.50	-0.74	2.15	21.95	38.45	H
848.80	-8.60	-33.50	-0.73	2.15	22.02	38.45	H

Frequency: 848.80MHz

Peak ERP(dBm)=P_{Mea}(-2.58dBm)-(P_{cl}+P_{Ag})(-33.50dB)+Ga(-0.73dB)-2.15dB=28.04dBm**ANALYZER SETTINGS: RBW = VBW = 3MHz**

Note: The maximum value of expanded measurement uncertainty for this test item is U =

2.72dB(30MHz-3GHz)/3.60dB(3GHz-18GHz)/3.58dB(18GHz-40GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.



No. I22N00821-RF-GSM

PCS1900-EIRP 24.232(c)

Limits

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

Measurement result

GSM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.20	-10.81	-29.30	8.10	26.59	33.00	H
1880.00	-10.39	-29.40	8.10	27.11	33.00	H
1909.80	-10.10	-29.30	8.10	27.30	33.00	H

GPRS

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.20	-14.73	-29.40	8.10	22.77	33.00	H
1880.00	-14.31	-29.30	8.10	23.09	33.00	H
1909.80	-14.17	-29.30	8.10	23.23	33.00	H

EGPRS-8PSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.20	-17.82	-29.40	8.10	19.68	33.00	H
1880.00	-16.86	-29.30	8.10	20.54	33.00	H
1909.80	-16.88	-29.30	8.10	20.52	33.00	H

Frequency: 1880.00MHz

Peak EIRP(dBm)= P_{Mea}(-10.10dBm) -(P_{cl}+P_{Ag})(-29.30dB)+Ga (8.10dB) =27.30dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

Note: The maximum value of expanded measurement uncertainty for this test item is U =

2.72dB(30MHz-3GHz)/3.60dB(3GHz-18GHz)/3.58dB(18GHz-40GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

**Spot check of Variant TA-1339****PCS1900-EIRP 24.232(c)****Limits**

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)

Measurement result**GSM**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1909.80	-10.24	-29.30	8.10	27.16	33.00	H

Frequency: 1909.80MHz

Peak EIRP(dBm)= P_{Mea}(-10.24dBm) -(P_{cl}+P_{Ag})(-29.30dB)+Ga (8.10dB) =27.16dBm**ANALYZER SETTINGS: RBW = VBW = 3MHz**

Note: The maximum value of expanded measurement uncertainty for this test item is U =

2.72dB(30MHz-3GHz)/3.60dB(3GHz-18GHz)/3.58dB(18GHz-40GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

A.2 FIELD STRENGTH OF SPURIOUS RADIATION

Reference


FCC: CFR 2.1053, 22.917, 24.238.

A.2.1 Measurement Method


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

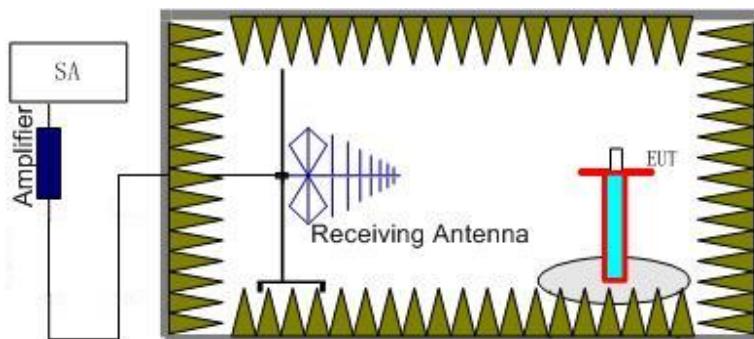

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

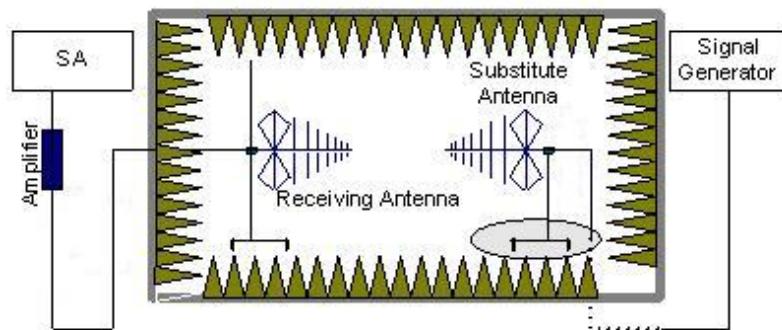

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere



with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) (G_a) should be recorded after test. A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dB$.

A.2.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
GSM 850MHz	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
GSM 1900MHz	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
1900MHz	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2



No. I22N00821-RF-GSM

GSM Mode Channel 128/824.2MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
1648.00	-55.67	0.80	8.10	-50.52	-13.00	H
2472.80	-53.04	0.90	9.80	-46.29	-13.00	H
3296.80	-71.04	1.10	11.50	-62.79	-13.00	V
4121.20	-65.03	1.20	12.40	-55.98	-13.00	H
4944.00	-69.71	1.30	12.50	-60.66	-13.00	H
5768.40	-70.88	1.50	13.10	-61.43	-13.00	H

GSM Mode Channel 190/836.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
1673.20	-59.85	0.80	8.10	-54.70	-13.00	V
2510.00	-49.90	0.90	10.70	-42.25	-13.00	H
3346.00	-62.66	1.10	11.50	-54.41	-13.00	V
4182.80	-70.37	1.20	12.40	-61.32	-13.00	H
5020.40	-69.94	1.30	12.50	-60.89	-13.00	H
5856.40	-70.07	1.40	13.10	-60.52	-13.00	H

GSM Mode Channel 251/848.8MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
1697.60	-52.28	0.80	8.10	-47.13	-13.00	H
2546.40	-52.99	0.90	10.70	-45.34	-13.00	V
3394.80	-61.66	1.10	11.50	-53.41	-13.00	H
4243.60	-71.15	1.20	12.40	-62.10	-13.00	H
5093.60	-70.02	1.20	12.50	-60.87	-13.00	H
5941.20	-69.67	1.50	13.10	-60.22	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.72\text{dB}(30\text{MHz}-3\text{GHz})/3.60\text{dB}(3\text{GHz}-18\text{GHz})/3.58\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

**GSM Mode Channel 512/1850.2MHz**

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
3700.00	-70.25	1.20	12.20	-59.25	-13.00	H
5550.80	-70.37	1.40	13.10	-58.67	-13.00	V
7400.80	-60.11	1.90	12.00	-50.01	-13.00	V
9251.20	-63.69	2.10	11.60	-54.19	-13.00	H
11101.90	-59.05	2.30	10.50	-50.85	-13.00	V
12949.30	-60.33	2.50	13.80	-49.03	-13.00	V

GSM Mode Channel 661/1880.0MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
3760.40	-69.73	1.10	12.20	-58.63	-13.00	H
5640.00	-69.87	1.30	13.10	-58.07	-13.00	V
7518.80	-58.75	1.90	11.30	-49.35	-13.00	V
9400.40	-63.33	2.10	11.60	-53.83	-13.00	H
11280.40	-57.40	2.60	10.50	-49.50	-13.00	V
13155.40	-59.27	2.30	13.30	-48.27	-13.00	V

GSM Mode Channel 810/1909.8MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Polarization
3819.20	-71.08	1.20	12.20	-60.08	-13.00	H
5728.00	-70.89	1.50	13.10	-59.29	-13.00	H
7640.80	-62.55	1.80	11.30	-53.05	-13.00	V
9548.40	-60.50	2.10	11.20	-51.40	-13.00	H
11457.40	-56.58	2.60	10.50	-48.68	-13.00	V
13358.80	-60.37	2.30	13.30	-49.37	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.72\text{dB}(30\text{MHz}-3\text{GHz})/3.60\text{dB}(3\text{GHz}-18\text{GHz})/3.58\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$



Spot check of Variant TA-1339
GSM Mode Channel 190/836.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit (dBm)	Polarization
2509.58	-45.64	0.90	10.70	-37.99	-13.00	V
8415.50	-47.72	1.80	11.30	-40.37	-13.00	H
9100.00	-47.39	2.20	11.60	-40.14	-13.00	V
9293.50	-46.78	2.00	11.60	-39.33	-13.00	V
9474.50	-47.08	2.10	11.60	-39.73	-13.00	H
9801.00	-47.13	2.30	11.20	-40.38	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.72\text{dB}(30\text{MHz}-3\text{GHz})/3.60\text{dB}(3\text{GHz}-18\text{GHz})/3.58\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

A.3.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.60V and 4.35V, with a nominal voltage of 3.80V. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec.

24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.3.3 Measurement results

GSM 850

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-17	0.020
3.80	-13	0.016
4.35	17	0.020

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	27	0.033
0	28	0.034
10	14	0.017
20	-19	0.023
30	15	0.018
40	12	0.014
50	14	0.017

EGPRS 850 - 8PSK

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-47	0.056
3.80	-46	0.055
4.35	-42	0.050

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-46	0.055
0	-48	0.058
10	-49	0.058
20	-56	0.067
30	-43	0.051
40	-50	0.060
50	-48	0.057

Expanded measurement uncertainty is 10Hz, $k = 2$

**PCS 1900****Frequency Error vs Voltage**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	18	0.010
3.80	25	0.013
4.35	-21	0.011

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	31	0.017
0	32	0.017
10	19	0.010
20	-12	0.007
30	14	0.008
40	-16	0.009
50	-20	0.011

EGPRS 1900 - 8PSK**Frequency Error vs Voltage**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-44	0.023
3.80	-46	0.025
4.35	-50	0.027

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-49	0.026
0	-41	0.022
10	-52	0.028
20	-48	0.025
30	-49	0.026
40	-47	0.025
50	-46	0.024

Expanded measurement uncertainty is 10Hz, $k = 2$

A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238.


A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 99% bandwidth.

GSM 850(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	245.99
836.6	246.79
848.8	241.99

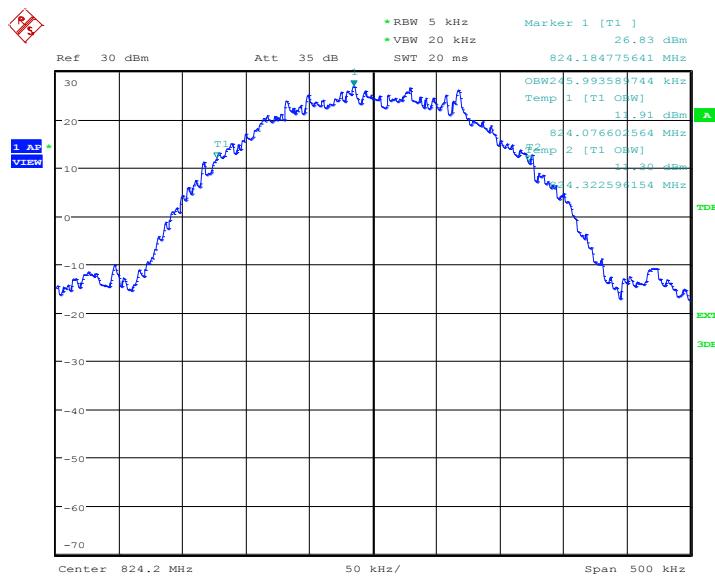GSM 850
Channel 128-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 12:10:11

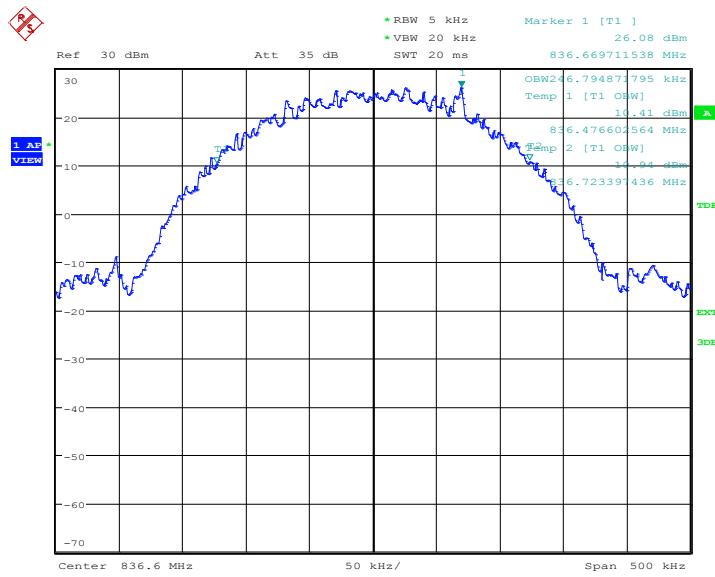Channel 190-Occupied Bandwidth (99% BW)


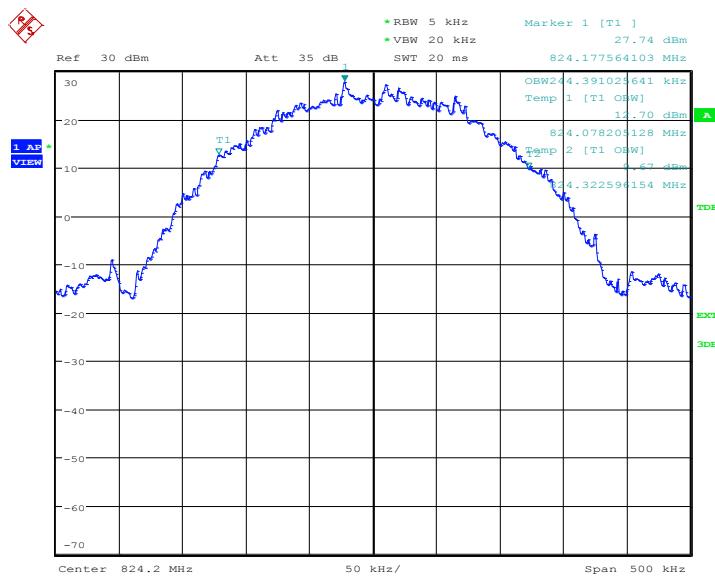
Date: 22.FEB.2021 12:10:42

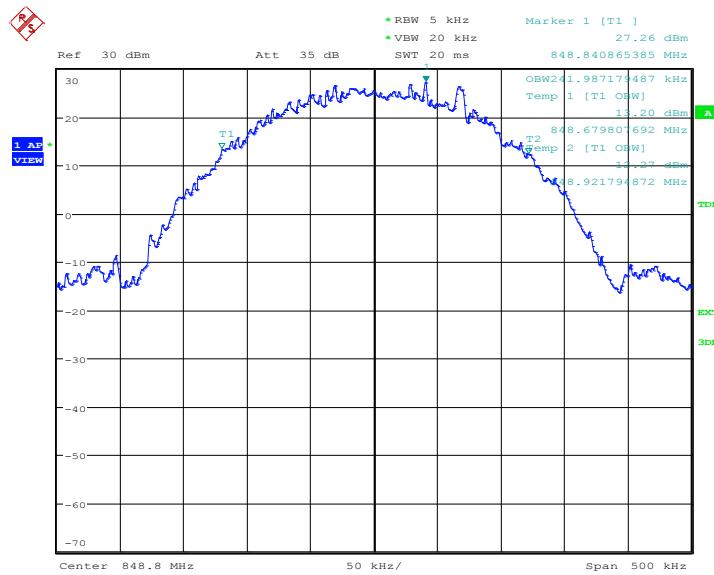Channel 251-Occupied Bandwidth (99% BW)


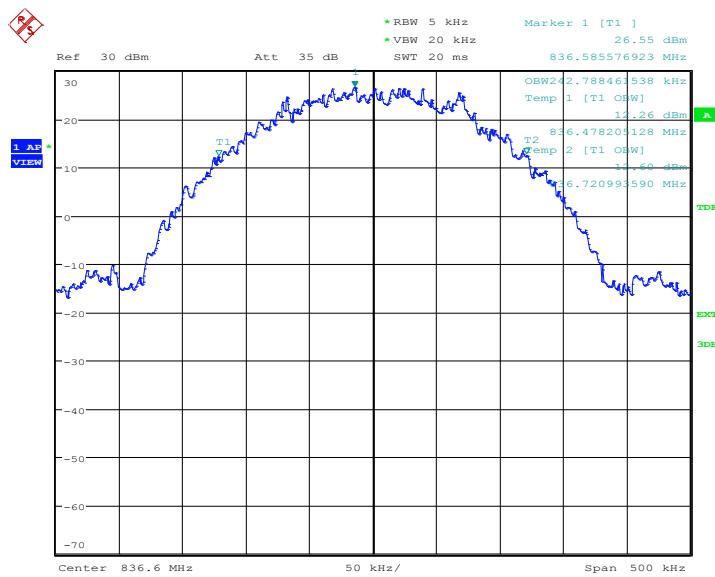
Date: 22.FEB.2021 12:11:14

GPRS 850(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	244.39
836.6	242.79
848.8	243.59

GPRS 850
Channel 128-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 13:00:20

Channel 190-Occupied Bandwidth (99% BW)


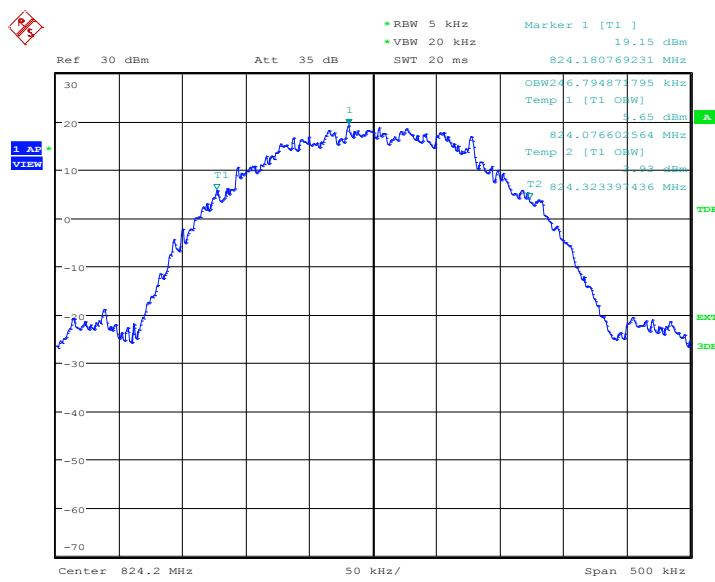
Date: 22.FEB.2021 13:00:52

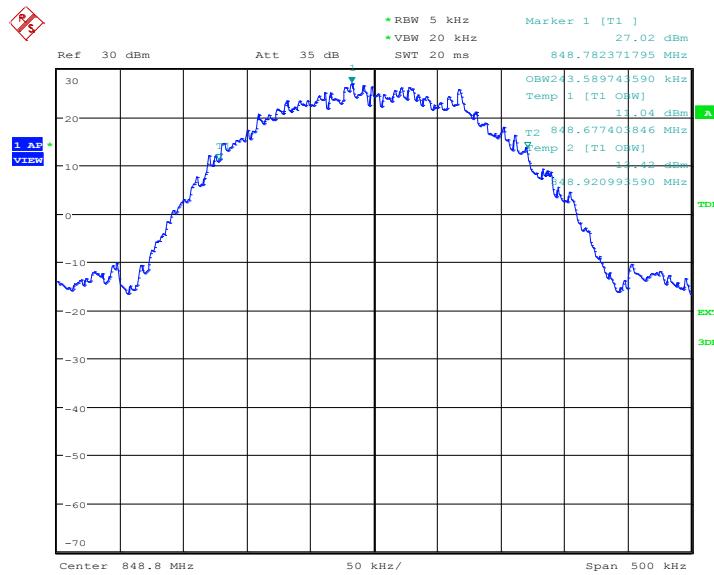Channel 251-Occupied Bandwidth (99% BW)


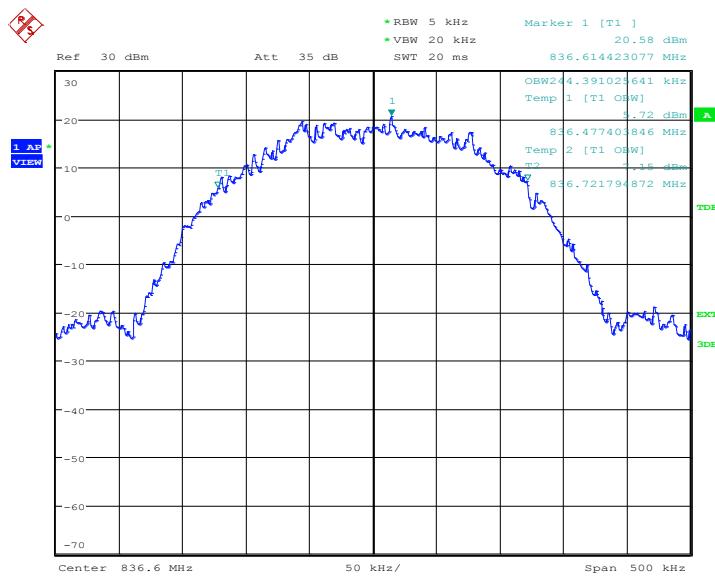
Date: 22.FEB.2021 13:01:24

EGPRS 850-8PSK(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	246.79
836.6	244.39
848.8	242.79

EGPRS 850-8PSK
Channel 128-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 13:17:56

Channel 190-Occupied Bandwidth (99% BW)


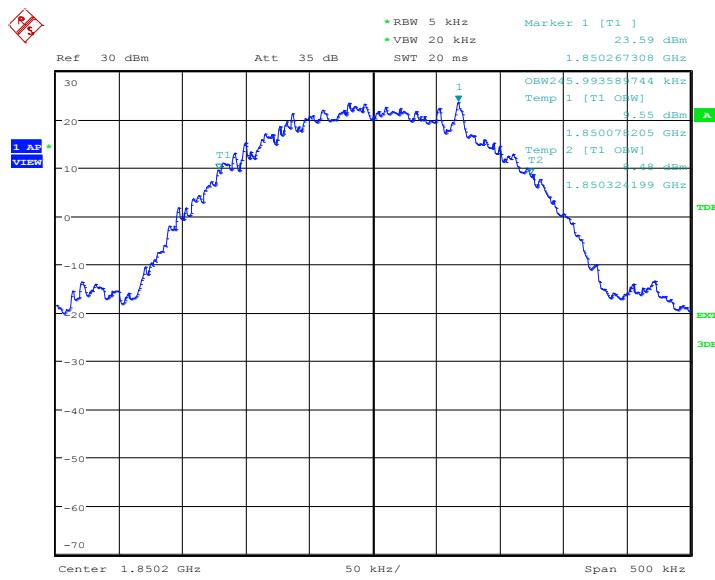
Date: 22.FEB.2021 13:18:28

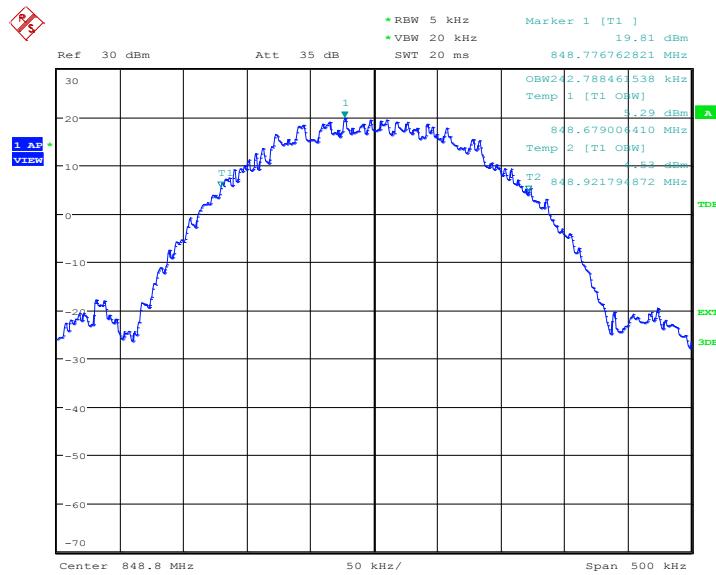Channel 251-Occupied Bandwidth (99% BW)


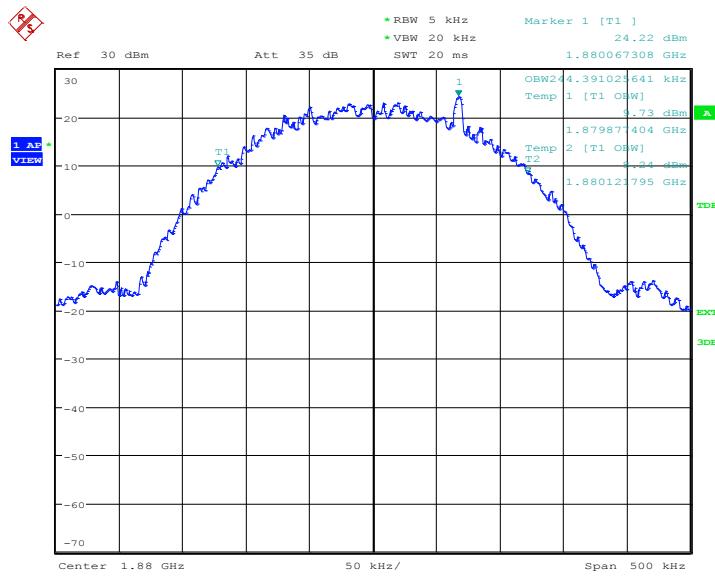
Date: 22.FEB.2021 13:19:00

PCS 1900(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	245.99
1880.0	244.39
1909.8	245.99


PCS 1900
Channel 512-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 12:43:40

Channel 661-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 12:44:11


Channel 810-Occupied Bandwidth (99% BW)

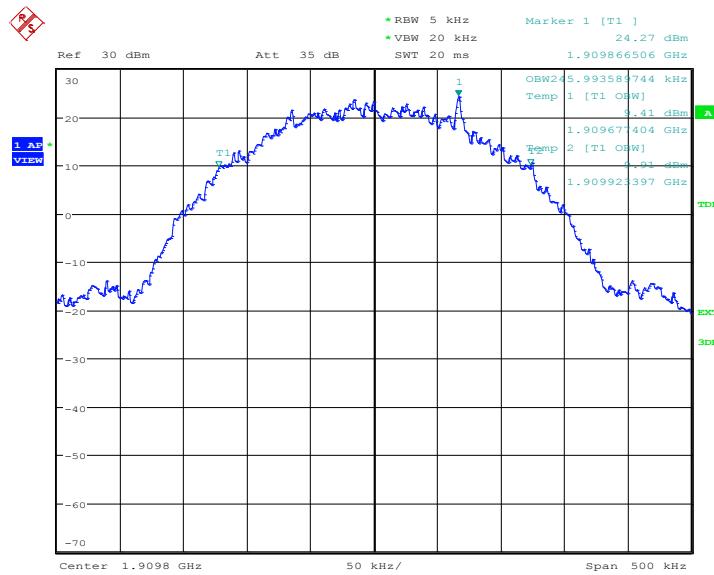


Date: 22.FEB.2021 12:44:43

GPRS 1900(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	244.39
1880.0	243.59
1909.8	245.19

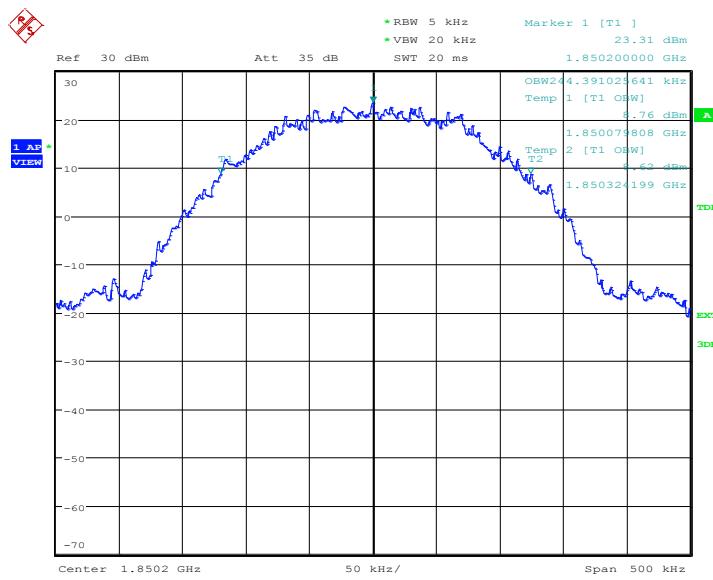GPRS 1900
Channel 512-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 13:08:32

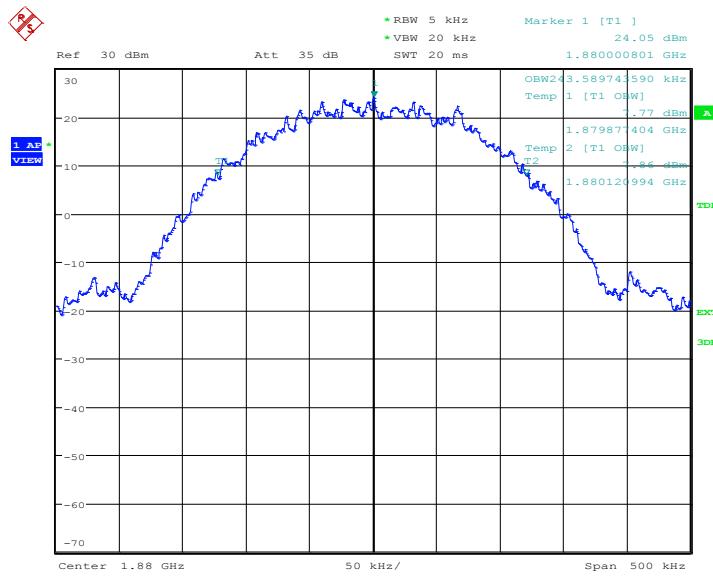Channel 661-Occupied Bandwidth (99% BW)


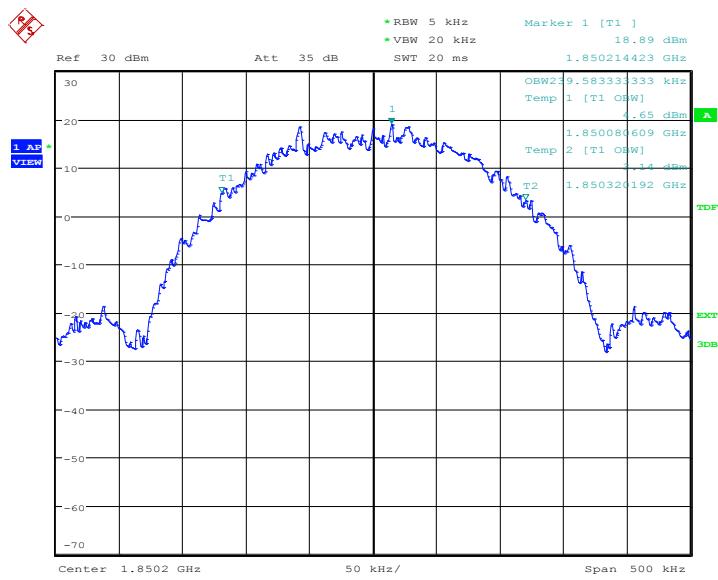
Date: 22.FEB.2021 13:09:03

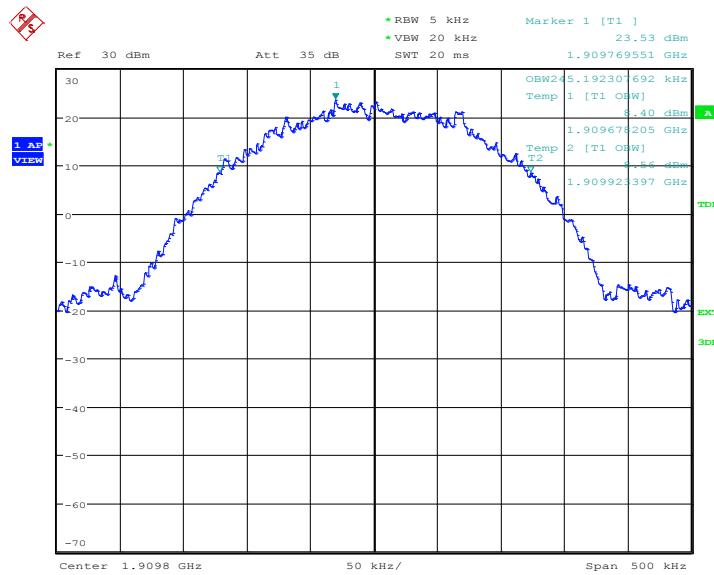Channel 810-Occupied Bandwidth (99% BW)


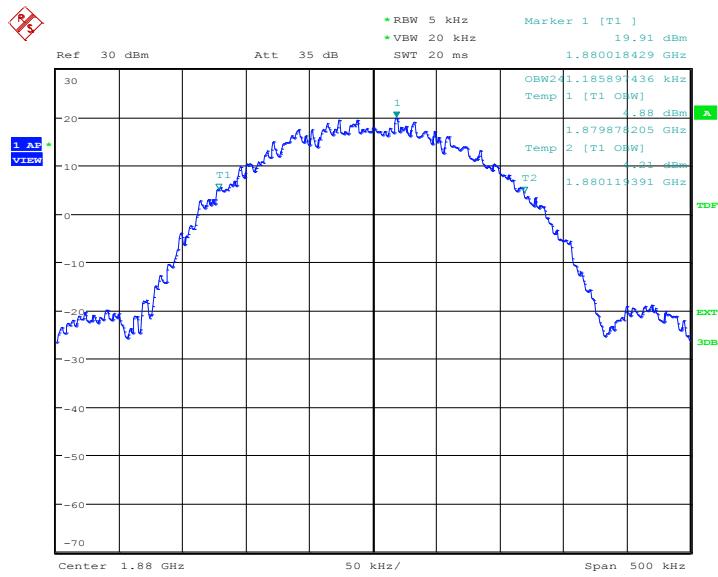
Date: 22.FEB.2021 13:09:35

EGPRS 1900-8PSK(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	239.58
1880.0	241.19
1909.8	241.19

EGPRS 1900-8PSK
Channel 512-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 13:27:15

Channel 661-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 13:27:46

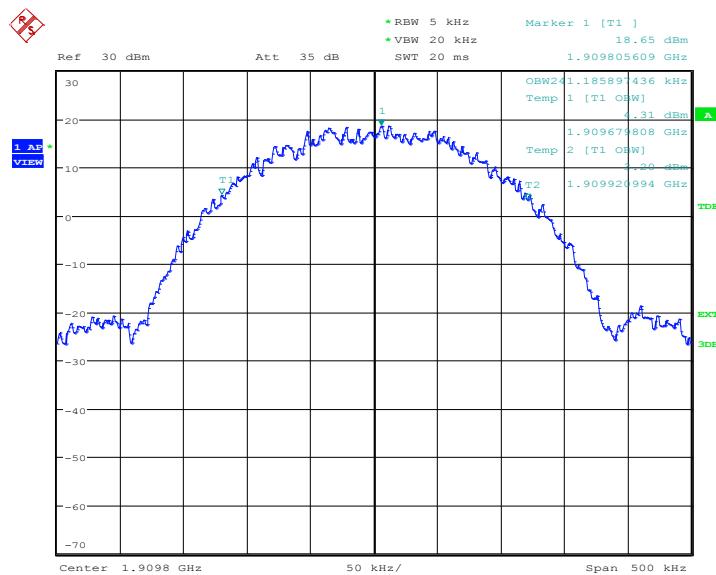Channel 810-Occupied Bandwidth (99% BW)


Date: 22.FEB.2021 13:28:18

 Note: Expanded measurement uncertainty is $U = 3428\text{Hz}$, $k = 2$

A.5 EMISSION BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238

A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 26dBc bandwidth.

GSM 850(-26dBc BW)


Frequency(MHz)	Emission Bandwidth (-26dBc BW)(kHz)
824.2	316.51
836.6	313.30
848.8	314.90

GSM 850


Channel 128-Emission Bandwidth (-26dBc BW)

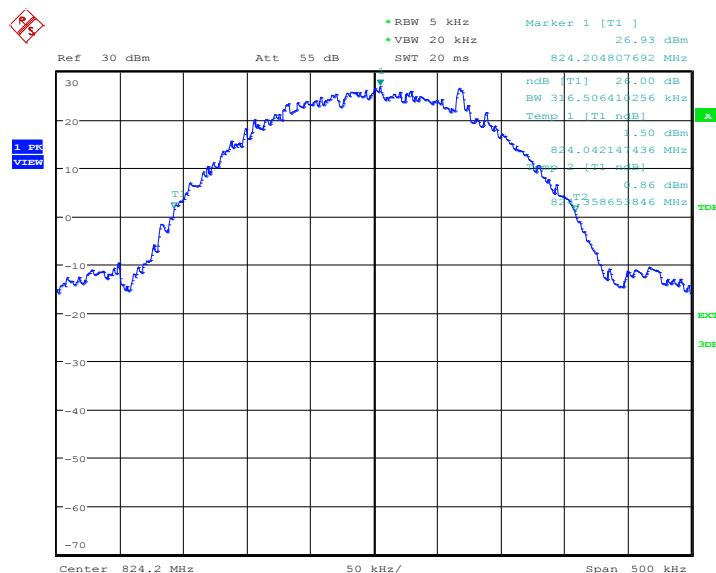

Date: 22.FEB.2021 12:12:21

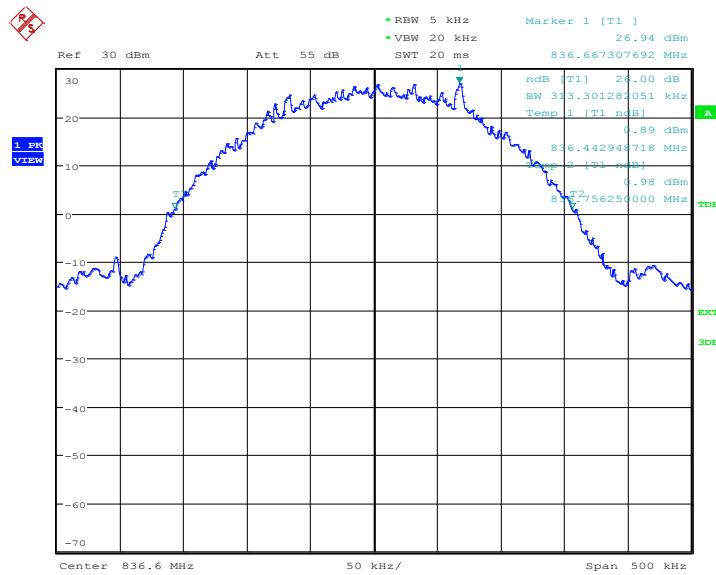Channel 190-Emission Bandwidth (-26dBc BW)


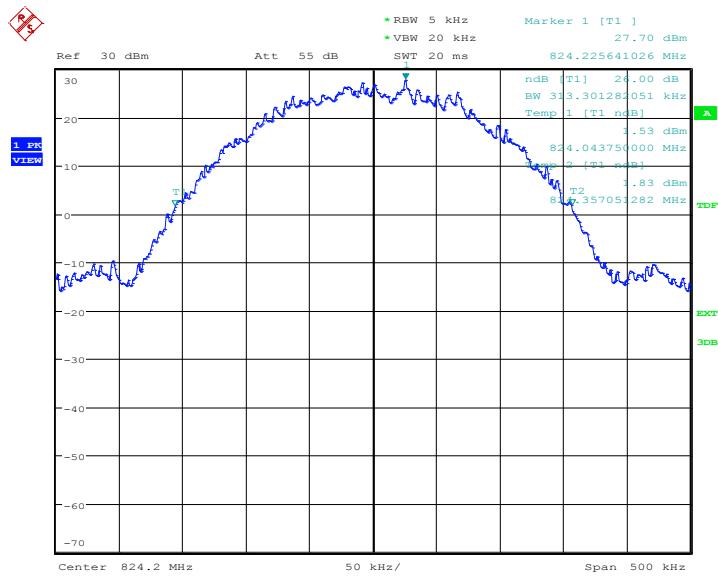
Date: 22.FEB.2021 12:13:28

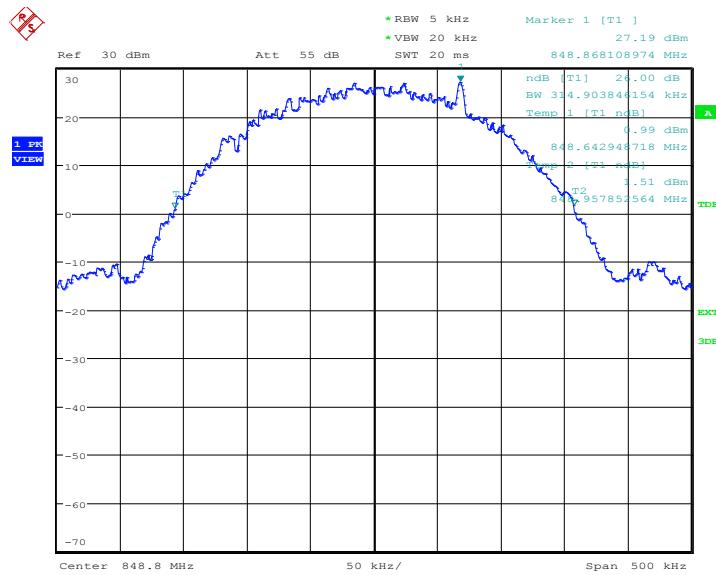Channel 251-Emission Bandwidth (-26dBc BW)


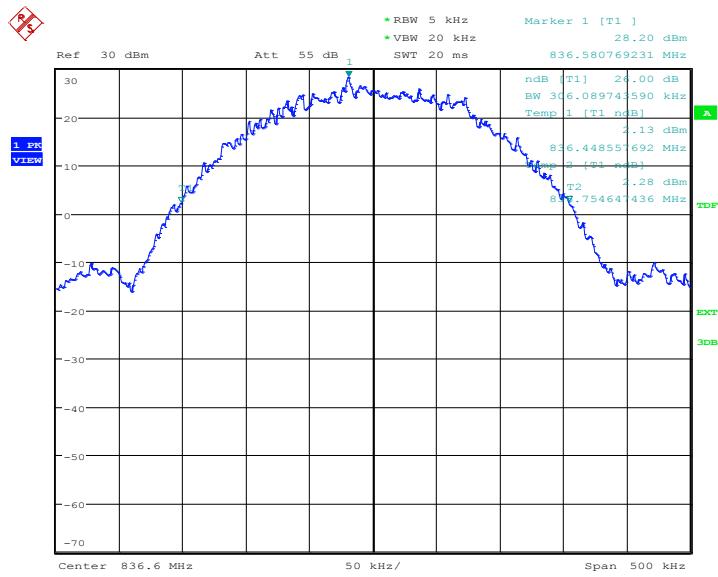
Date: 22.FEB.2021 12:14:34

GPRS 850(-26dBc BW)

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(kHz)
824.2	313.30
836.6	306.09
848.8	316.51


GPRS 850
Channel 128-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:02:31

Channel 190-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:03:38


Channel 251-Emission Bandwidth (-26dBc BW)

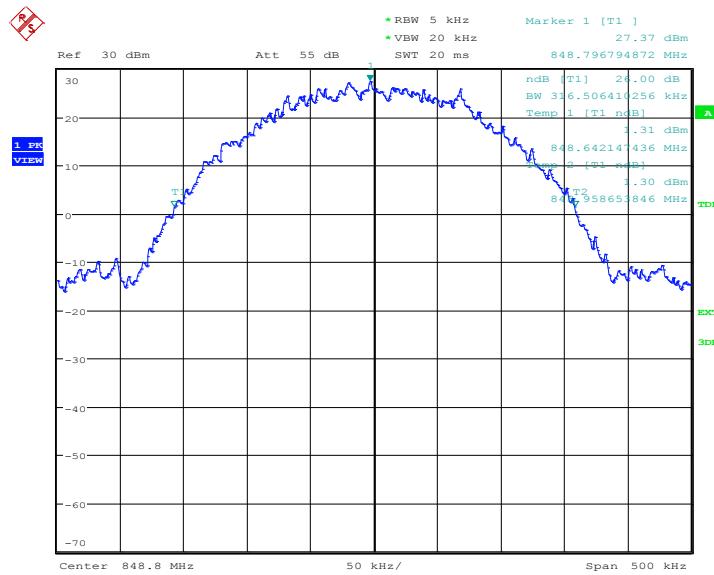


Date: 22.FEB.2021 13:04:45

EGPRS 850-8PSK(-26dBc BW)

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(kHz)
824.2	313.30
836.6	313.30
848.8	306.09

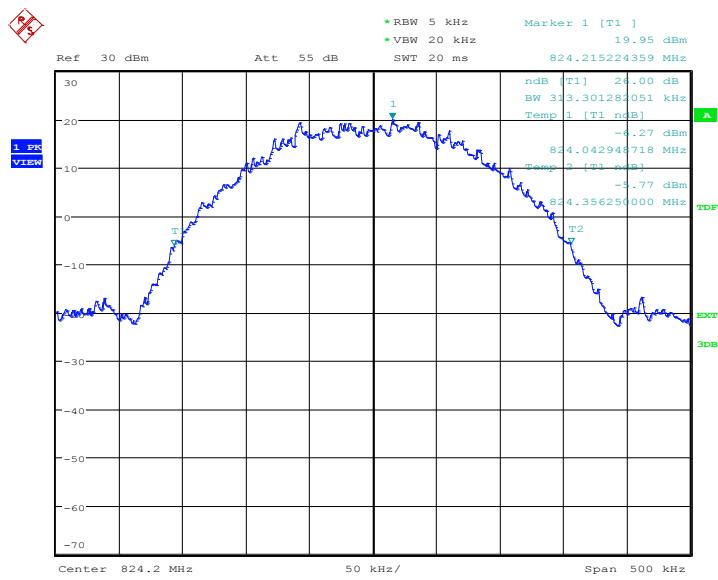
EGPRS 850-8PSK
Channel 128-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:20:07

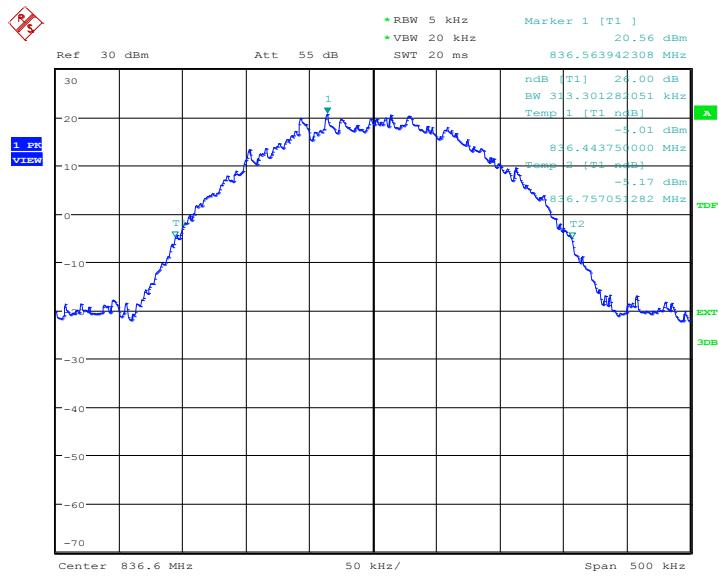Channel 190-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:21:14


Channel 251-Emission Bandwidth (-26dBc BW)

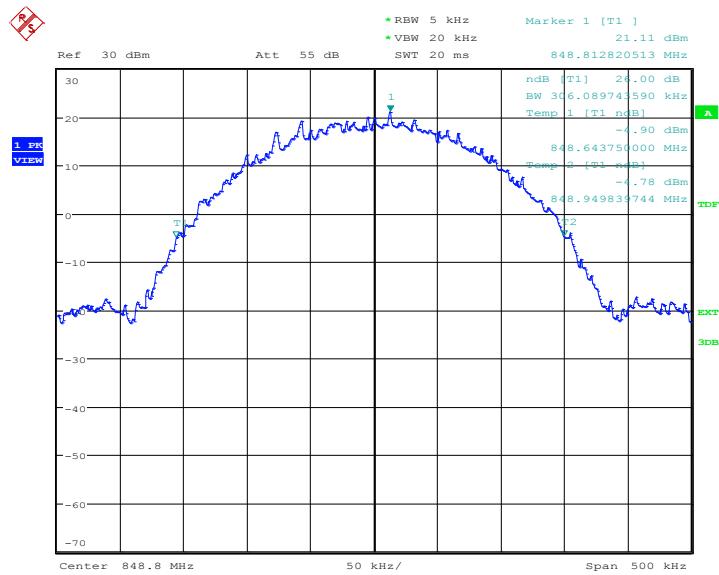


Date: 22.FEB.2021 13:22:20

PCS 1900(-26dBc BW)

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(kHz)
1850.2	313.30
1880.0	315.71
1909.8	318.11

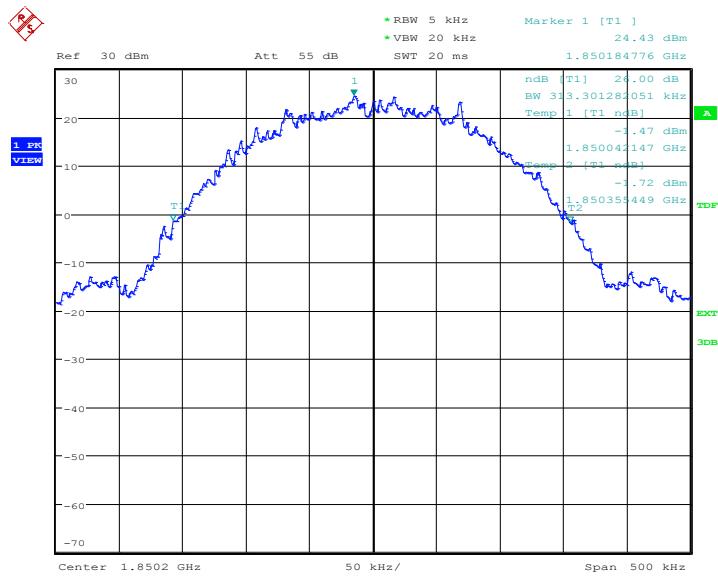
PCS 1900
Channel 512-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 12:45:51

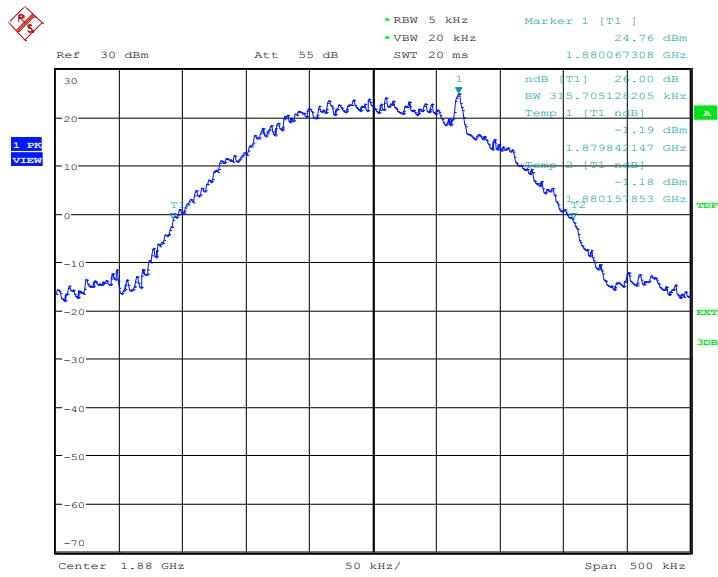Channel 661-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 12:46:57


Channel 810-Emission Bandwidth (-26dBc BW)

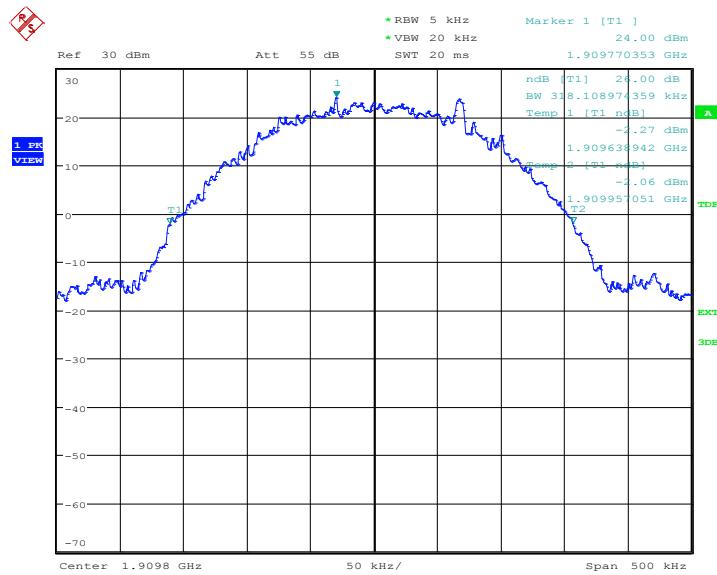


Date: 22.FEB.2021 12:48:04

GPRS 1900(-26dBc BW)

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(kHz)
1850.2	317.31
1880.0	314.10
1909.8	313.30

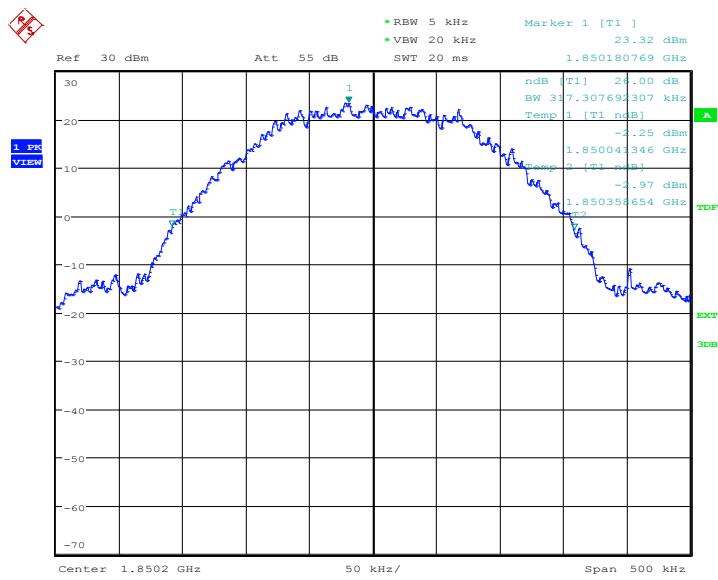
GPRS 1900
Channel 512-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:10:42

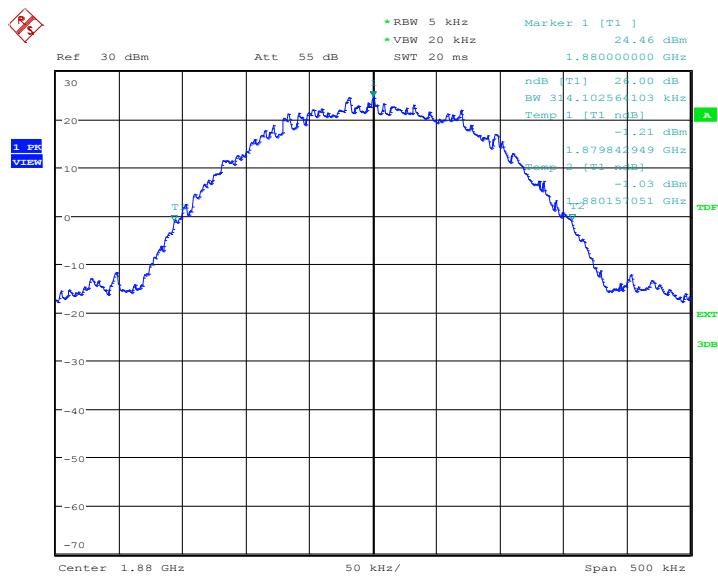Channel 661-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:11:49


Channel 810-Emission Bandwidth (-26dBc BW)

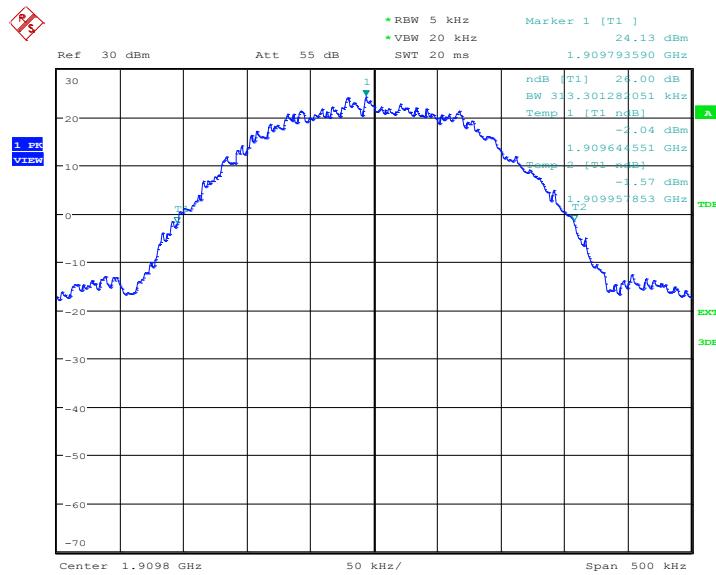


Date: 22.FEB.2021 13:12:55

EGPRS 1900-8PSK(-26dBc BW)

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(kHz)
1850.2	300.48
1880.0	302.88
1909.8	303.69

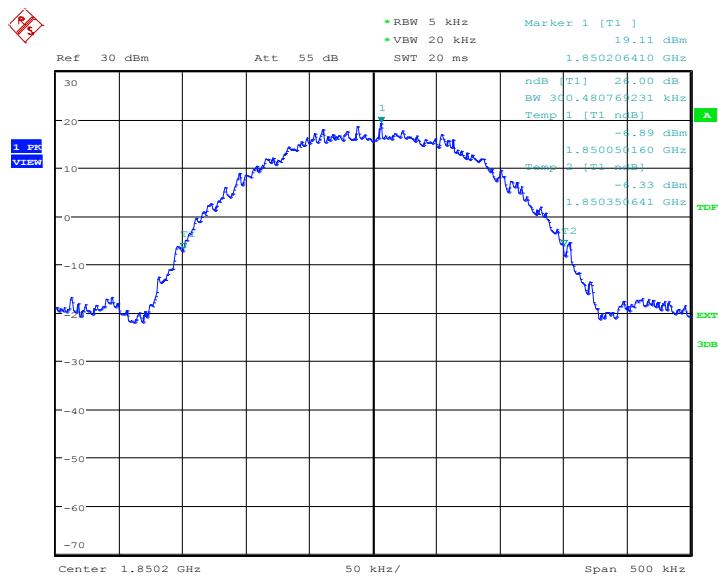
EGPRS 1900-8PSK
Channel 512-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:29:25

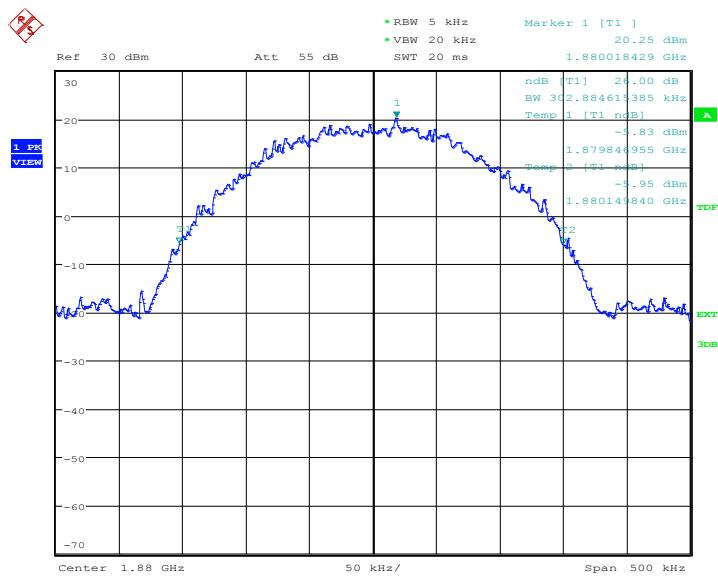Channel 661-Emission Bandwidth (-26dBc BW)


Date: 22.FEB.2021 13:30:32

Channel 810-Emission Bandwidth (-26dBc BW)

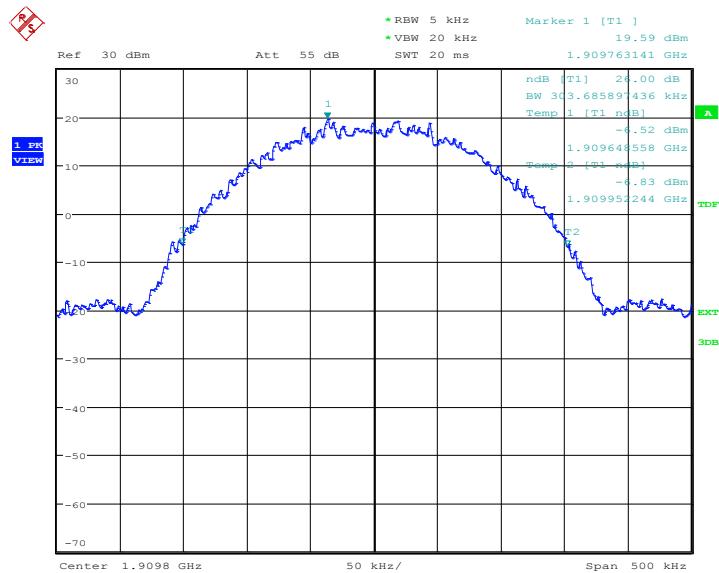

Date: 22.FEB.2021 13:31:39

 Note: Expanded measurement uncertainty is $U = 3428\text{Hz}$, $k = 2$

A.6 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 2.1051, 22.917, 24.238


Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm. A relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

Only worst case result is given below


GSM 850

LOW BAND EDGE BLOCK-A-Channel 128

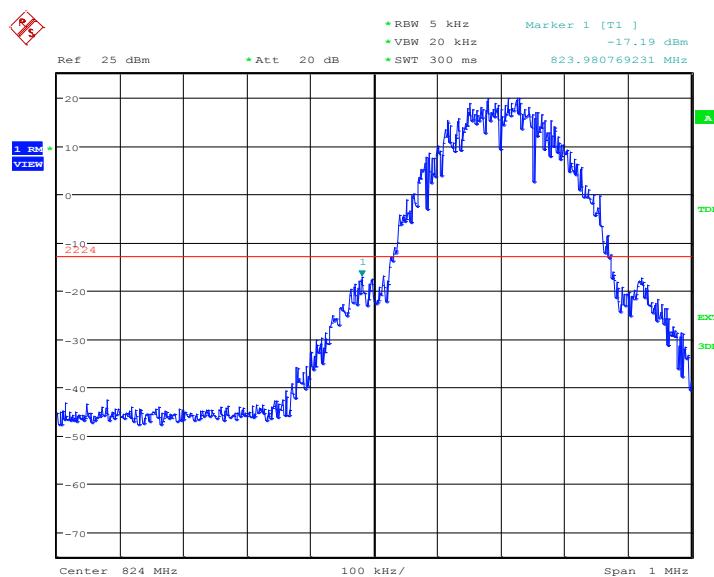


Date: 22.FEB.2021 12:14:42


HIGH BAND EDGE BLOCK-C –Channel 251

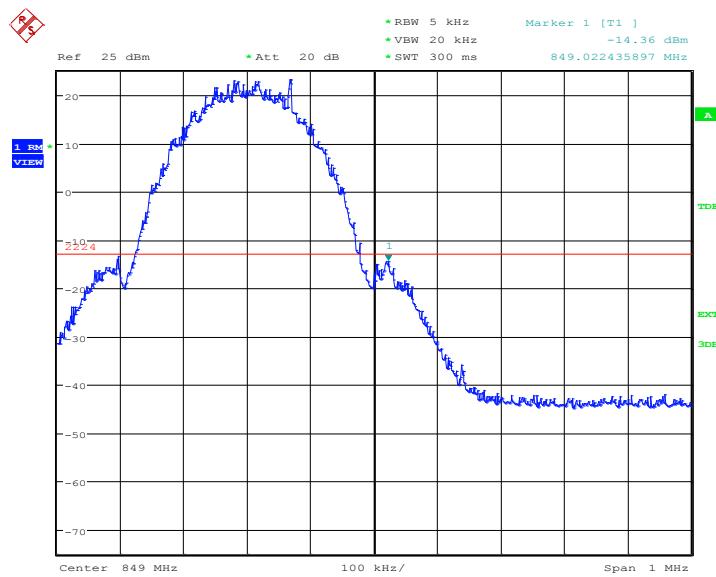

Date: 22.FEB.2021 12:16:44

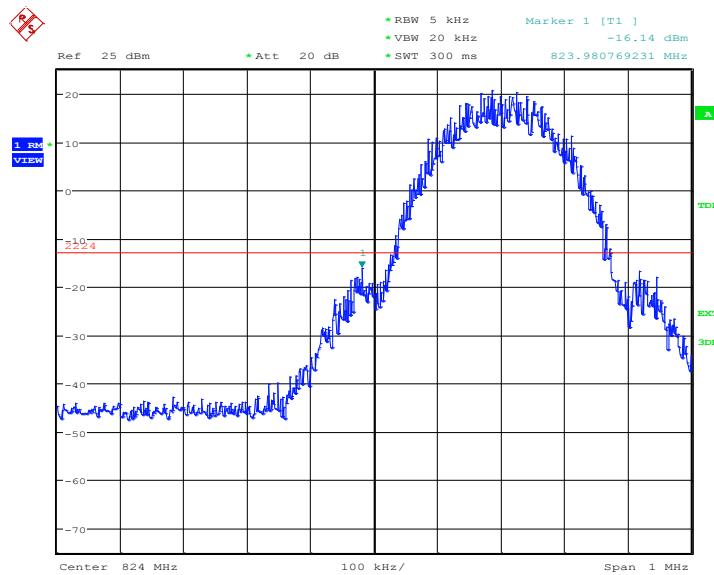
GPRS 850
LOW BAND EDGE BLOCK-A-Channel 128


Date: 22.FEB.2021 13:04:53

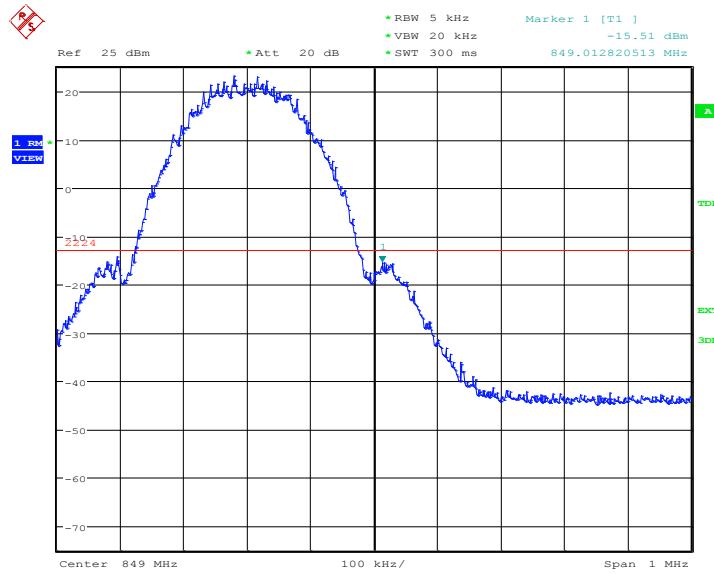HIGH BAND EDGE BLOCK-C-Channel 251


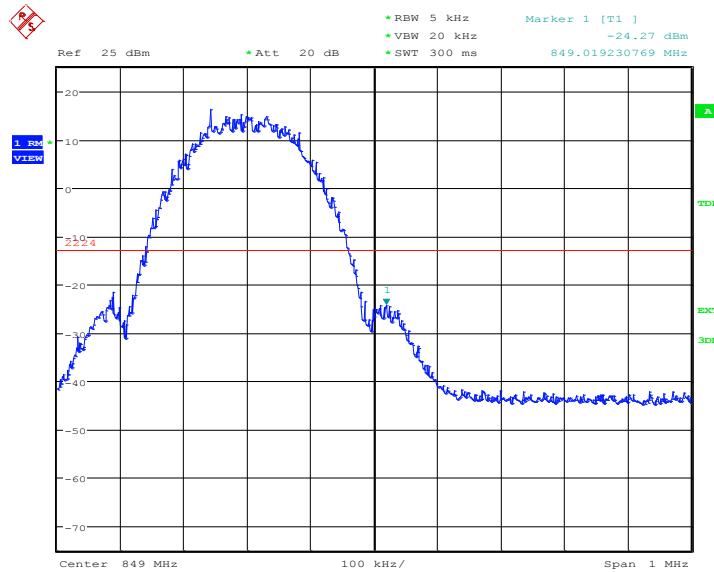
Date: 22.FEB.2021 13:06:55

EGPRS 850-8PSK
LOW BAND EDGE BLOCK-A -Channel 128

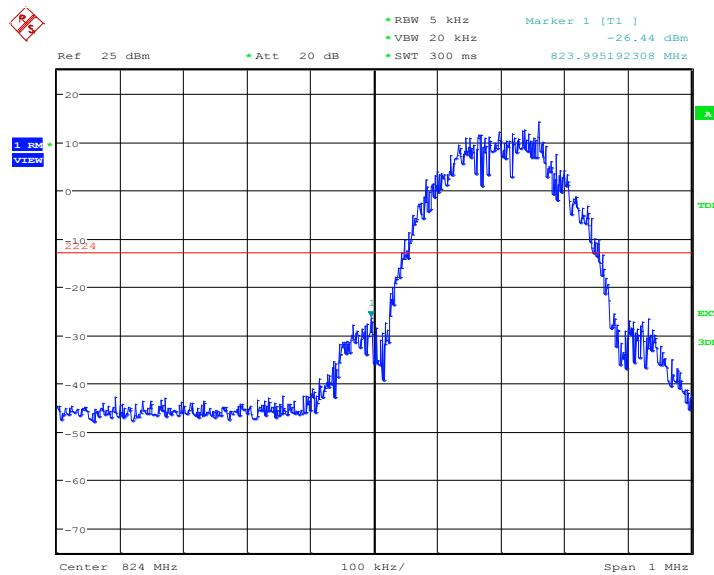


Date: 22.FEB.2021 13:22:28


HIGH BAND EDGE BLOCK-C –Channel 251




Date: 22.FEB.2021 13:24:31

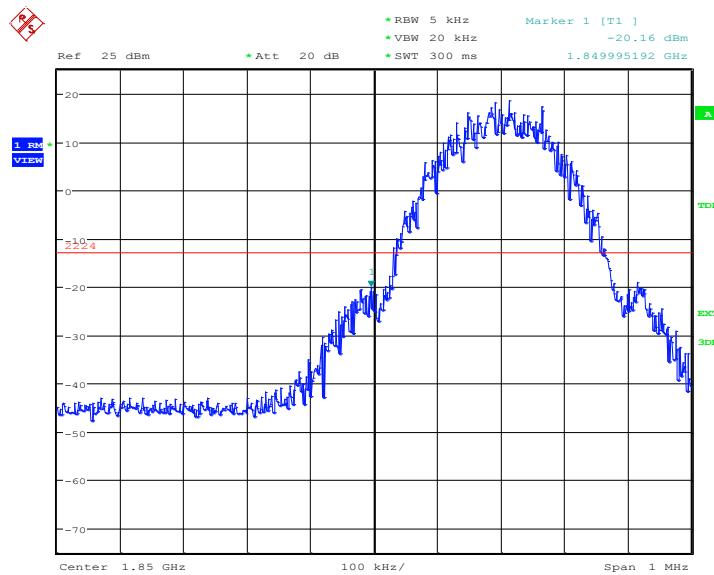PCS 1900
LOW BAND EDGE BLOCK-A-Channel 512


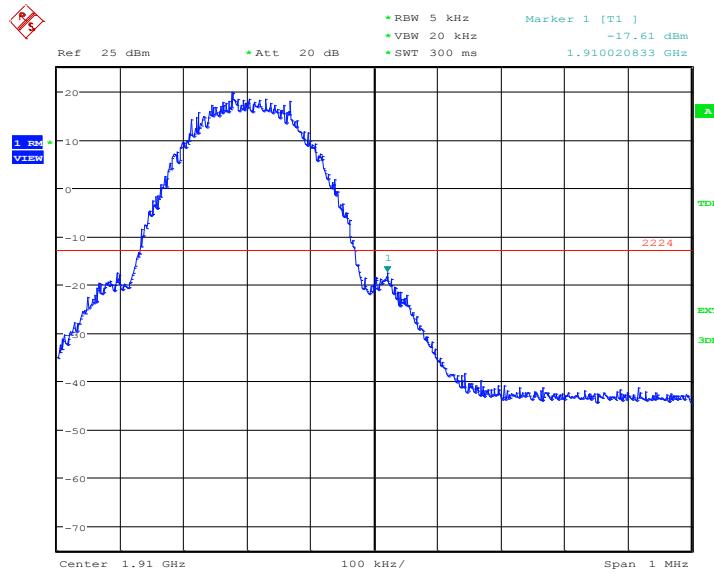
Date: 22.FEB.2021 12:48:12

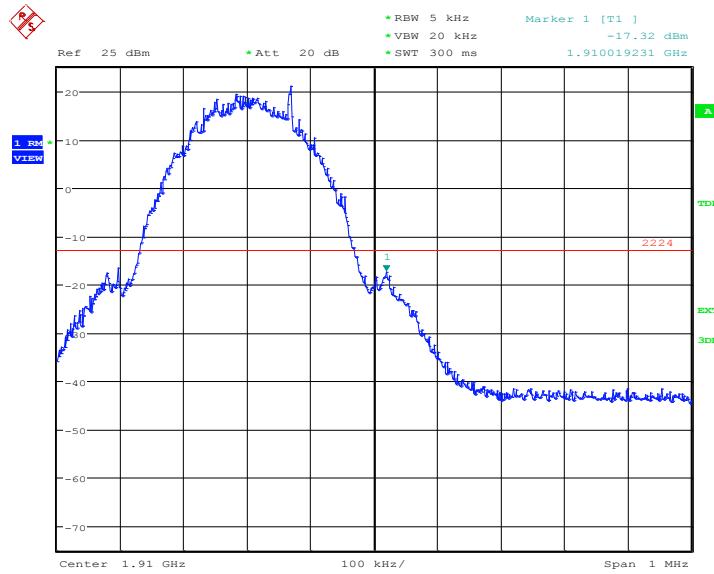HIGH BAND EDGE BLOCK-C-Channel 810


Date: 22.FEB.2021 12:50:14

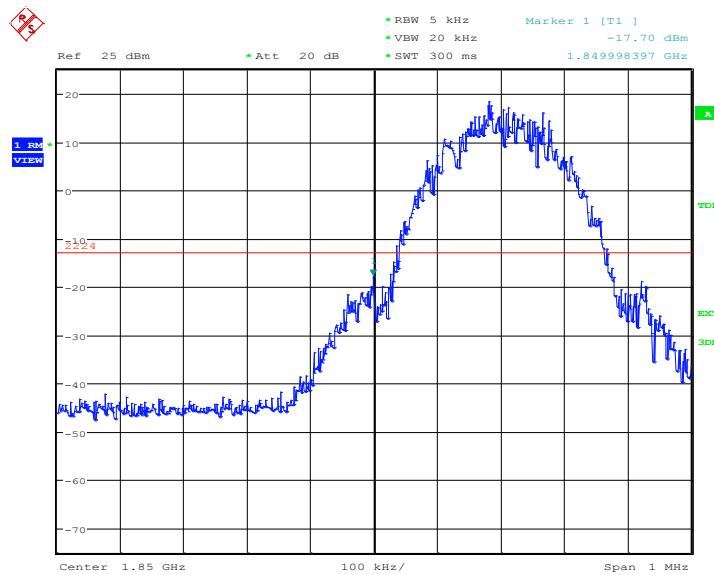
GPRS 1900
LOW BAND EDGE BLOCK-A-Channel 512


Date: 22.FEB.2021 13:13:03

HIGH BAND EDGE BLOCK-C-Channel 810


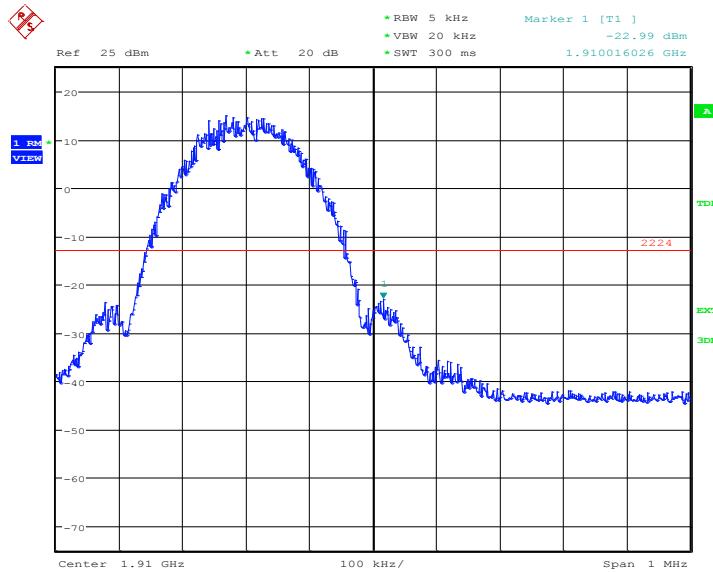
Date: 22.FEB.2021 13:15:06

EGPRS 1900-8PSK LOW BAND EDGE BLOCK-A-Channel 512

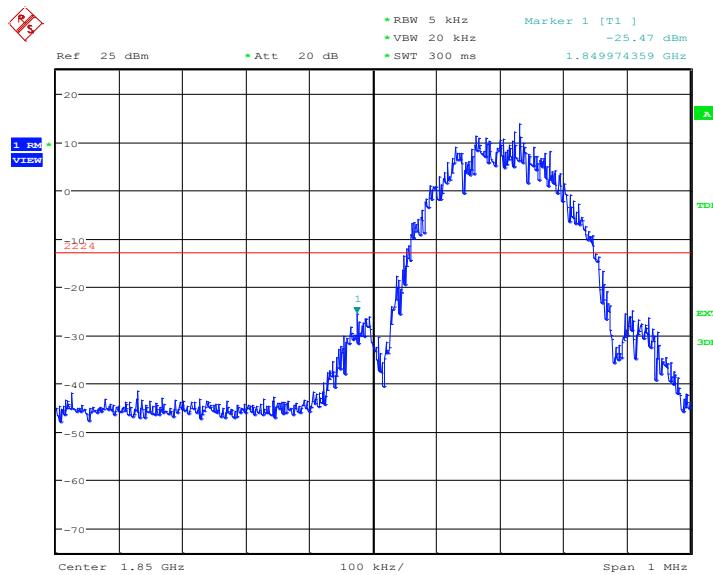

Date: 22.FEB.2021 13:31:47

HIGH BAND EDGE BLOCK-C –Channel 810



Date: 22.FEB.2021 13:33:49

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}(100\text{KHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz})$, $k = 1.96$

A.7 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1051, 22.917, 24.238

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1051 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM850 Transmitter

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

PCS1900 Transmitter

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

A. 7.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.7.3 Measurement result


Only worst case result is given below

GSM850

Channel 128: 30MHz – 1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

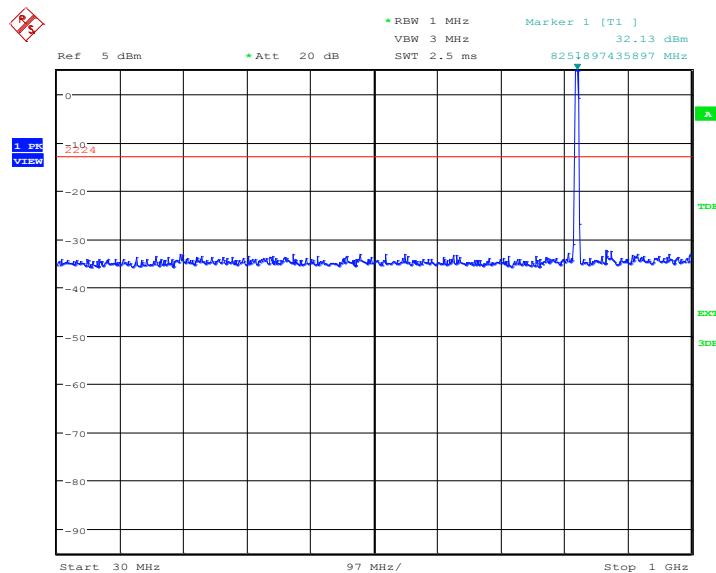

Date: 22.FEB.2021 12:17:28

Channel 128: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

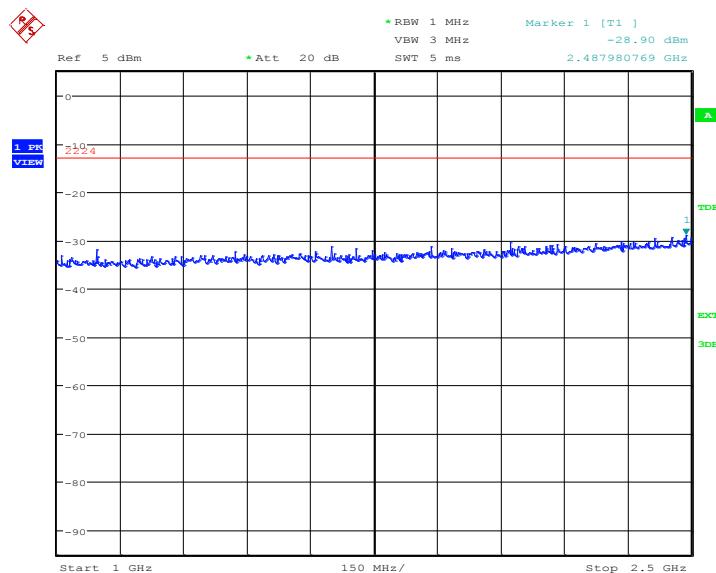

Date: 22.FEB.2021 12:17:55

Channel 128: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

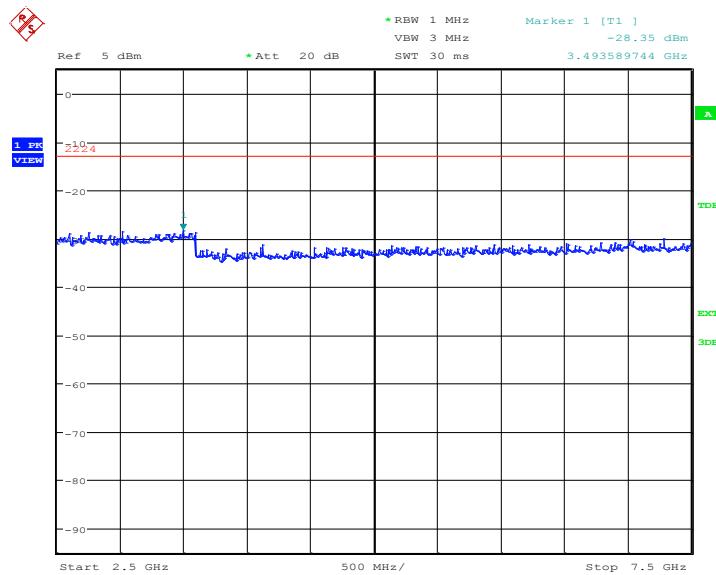

Date: 22.FEB.2021 12:18:22

Channel 128: 7.5GHz –10GHz


Spurious emission limit –13dBm.

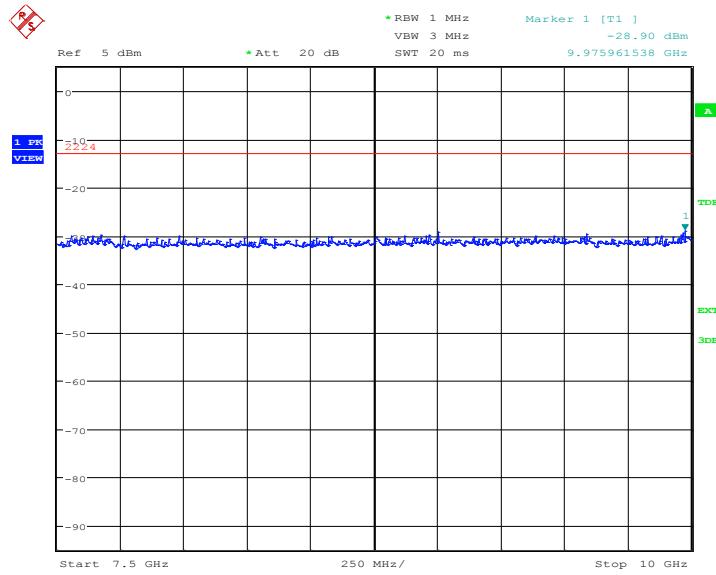

Date: 22.FEB.2021 12:18:48

Channel 190: 30MHz – 1GHz


Spurious emission limit –13dBm

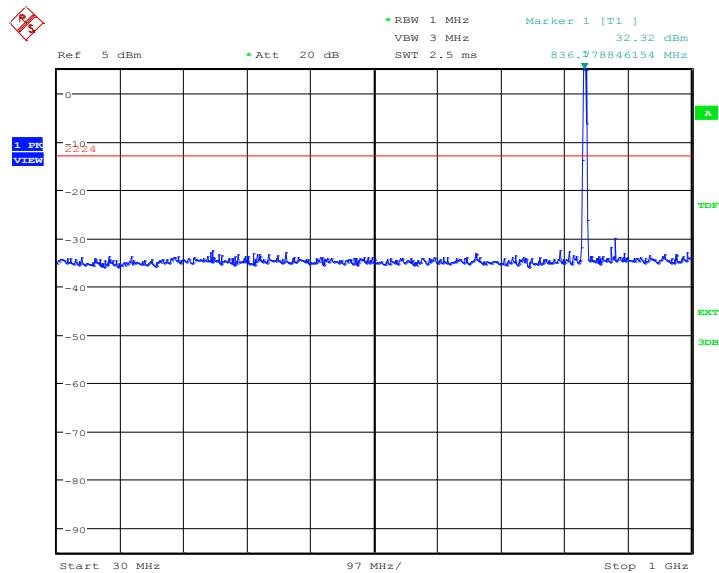NOTE: peak above the limit line is the carrier frequency.


Date: 22.FEB.2021 12:19:16

Channel 190: 1GHz –2.5GHz


Spurious emission limit –13dBm

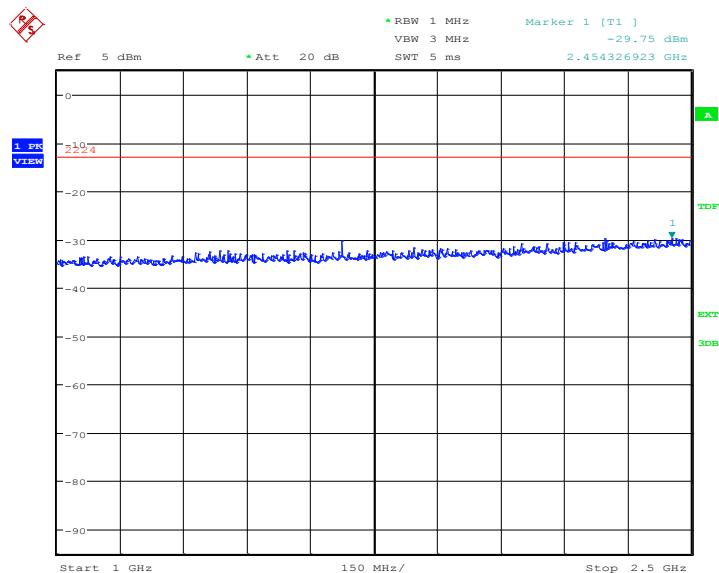

Date: 22.FEB.2021 12:19:43

Channel 190: 2.5GHz –7.5GHz


Spurious emission limit –13dBm

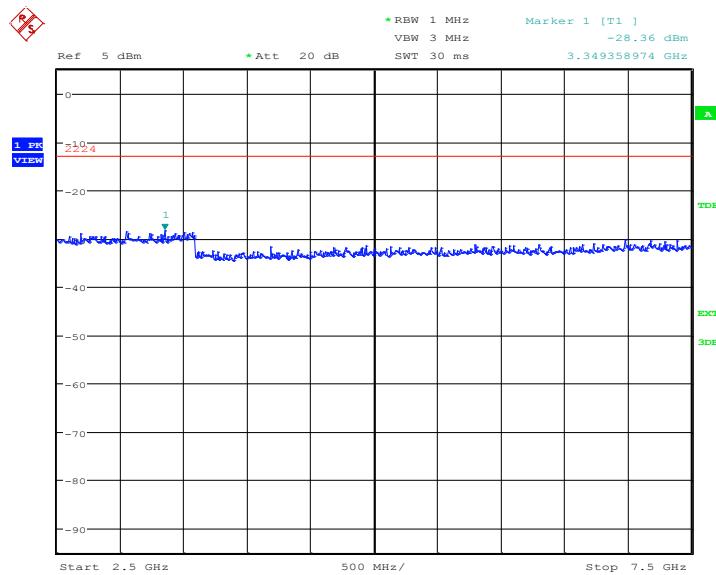

Date: 22.FEB.2021 12:20:09

Channel 190: 7.5GHz –10GHz


Spurious emission limit –13dBm

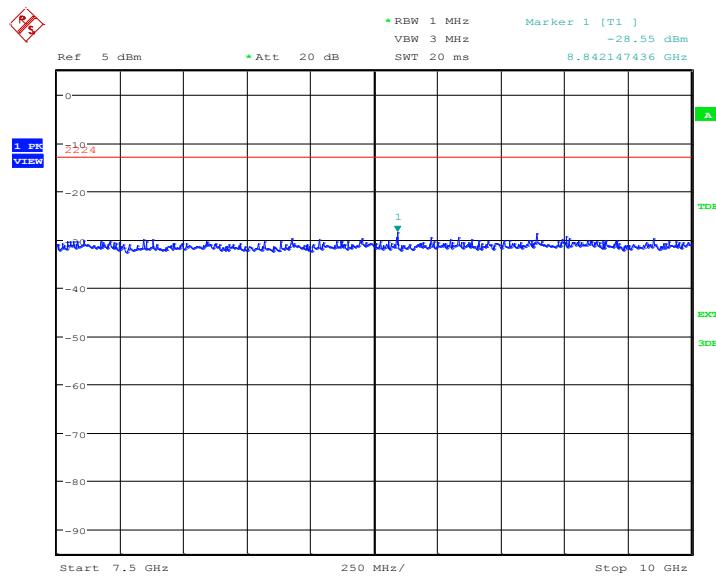

Date: 22.FEB.2021 12:20:36

Channel 251: 30MHz – 1GHz


Spurious emission limit –13dBm.

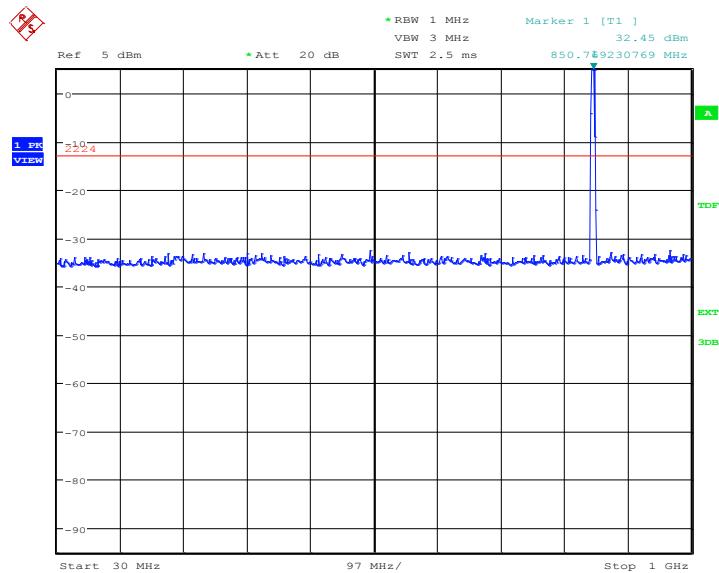NOTE: peak above the limit line is the carrier frequency.


Date: 22.FEB.2021 12:21:04

Channel 251: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

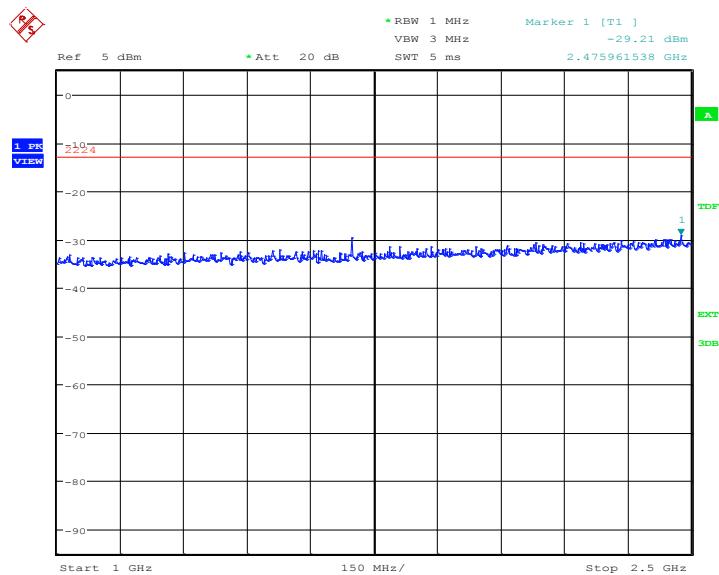

Date: 22.FEB.2021 12:21:31

Channel 251:2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

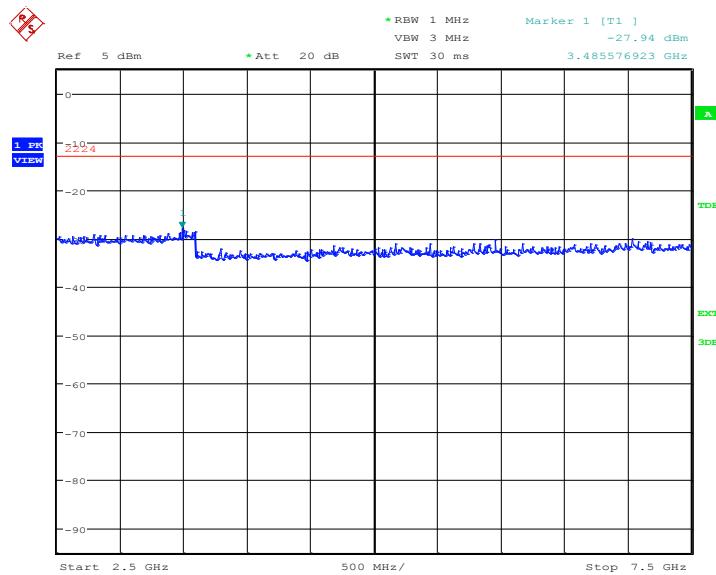

Date: 22.FEB.2021 12:21:57

Channel 251: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

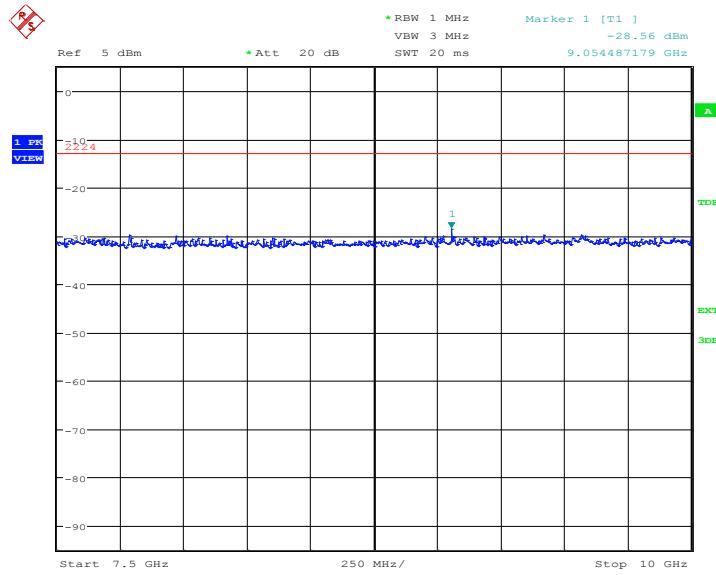

Date: 22.FEB.2021 12:22:24

PCS1900
Channel 512: 30MHz – 1GHz


Spurious emission limit –13dBm.

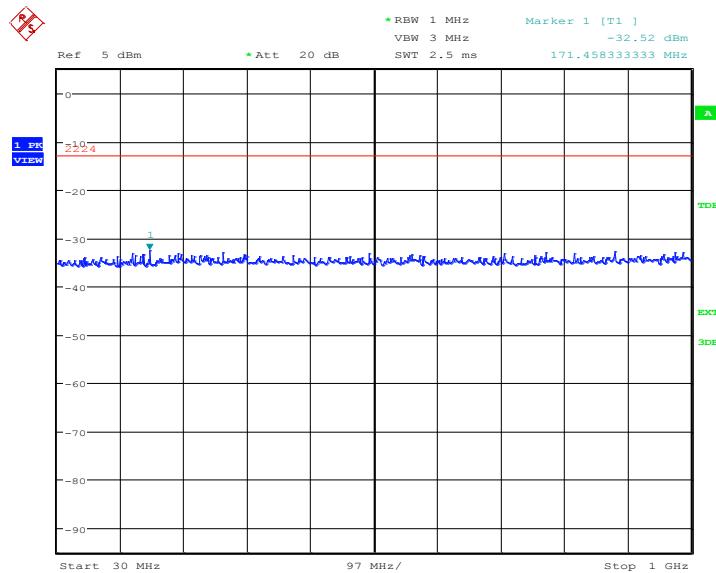

Date: 22.FEB.2021 12:50:57

Channel 512: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

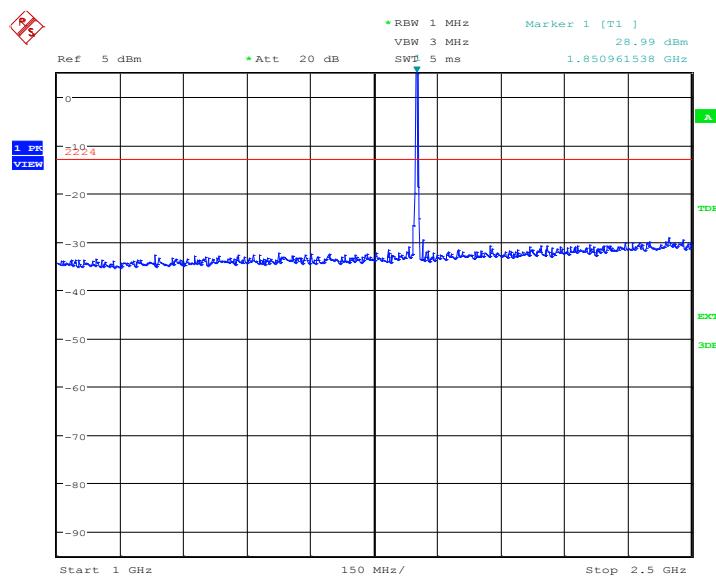NOTE: peak above the limit line is the carrier frequency.


Date: 22.FEB.2021 12:51:24

Channel 512: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

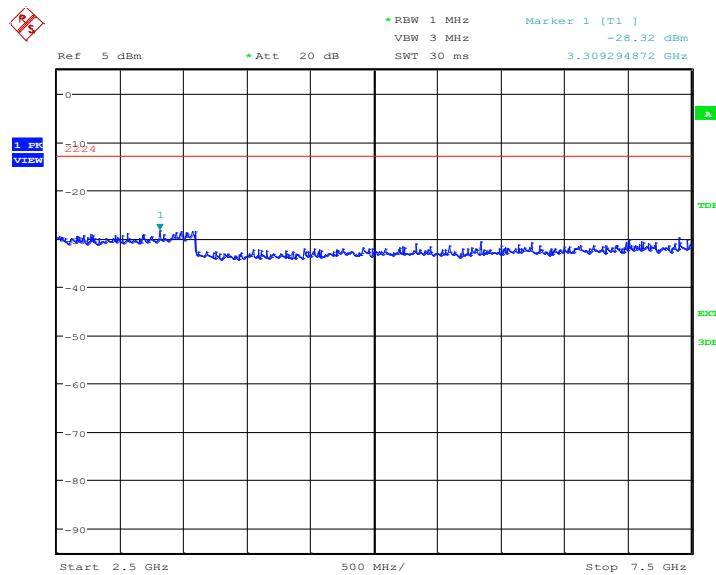

Date: 22.FEB.2021 12:51:51

Channel 512: 7.5GHz –10GHz


Spurious emission limit –13dBm.

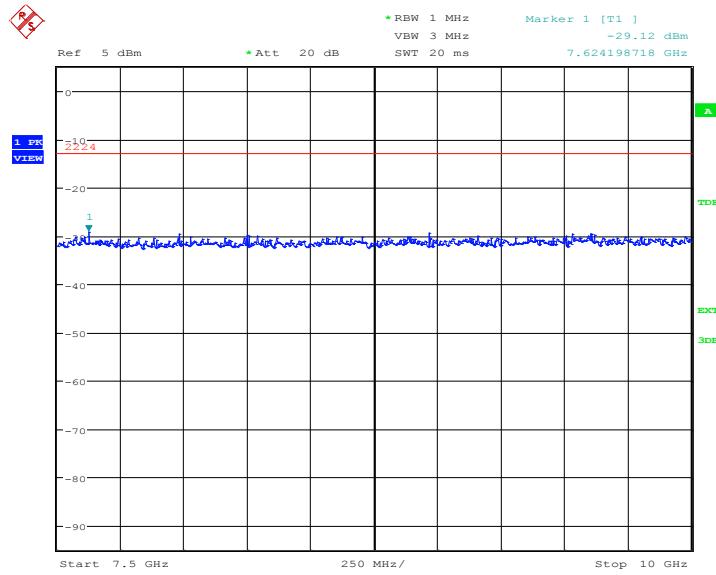

Date: 22.FEB.2021 12:52:18

Channel 512: 10GHz –15GHz


Spurious emission limit –13dBm.

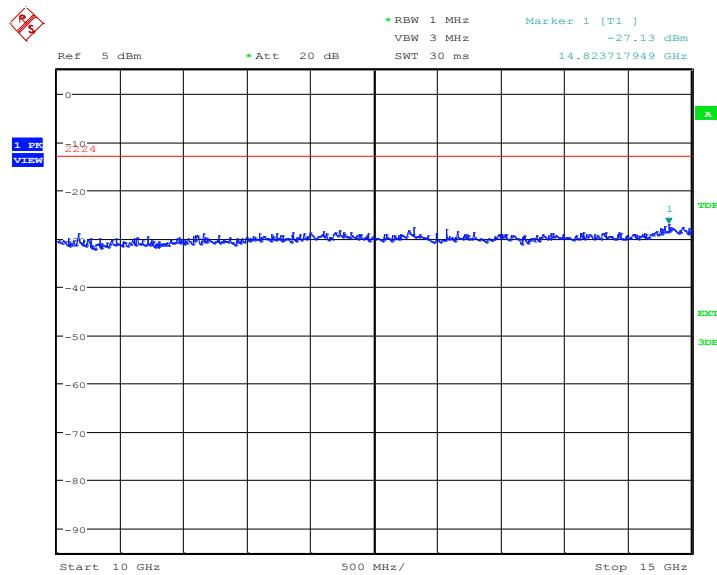

Date: 22.FEB.2021 12:52:45

Channel 512: 15GHz –20GHz


Spurious emission limit –13dBm.

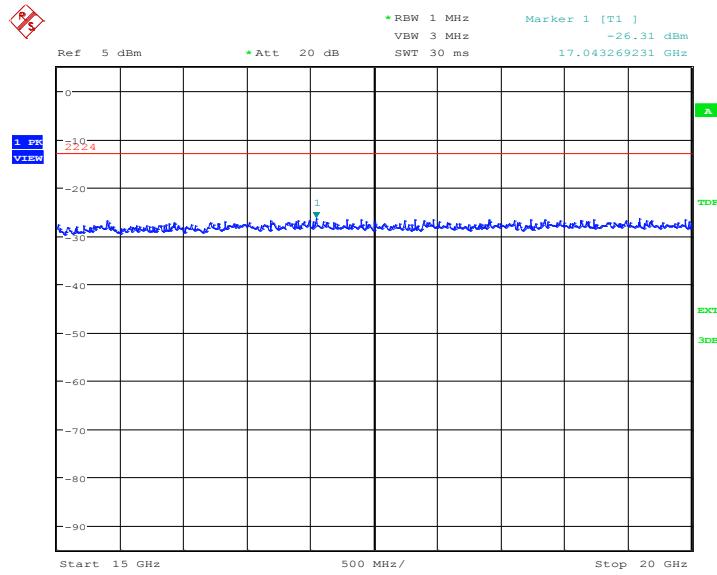

Date: 22.FEB.2021 12:53:12

Channel 661: 30MHz – 1GHz


Spurious emission limit –13dBm

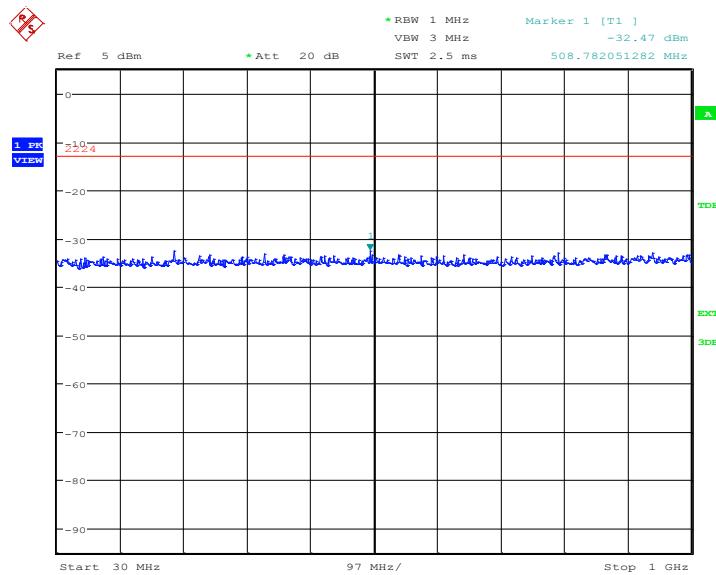

Date: 22.FEB.2021 12:53:39

Channel 661: 1GHz –2.5GHz


Spurious emission limit –13dBm

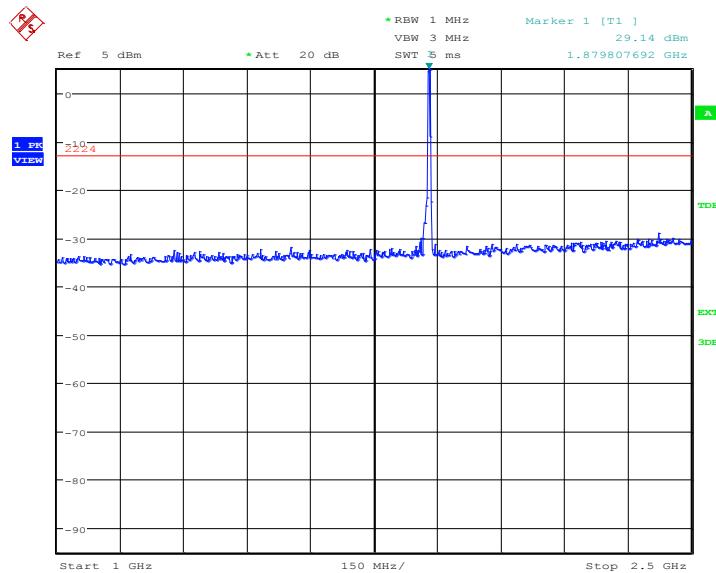NOTE: peak above the limit line is the carrier frequency.


Date: 22.FEB.2021 12:54:06

Channel 661: 2.5GHz –7.5GHz


Spurious emission limit –13dBm

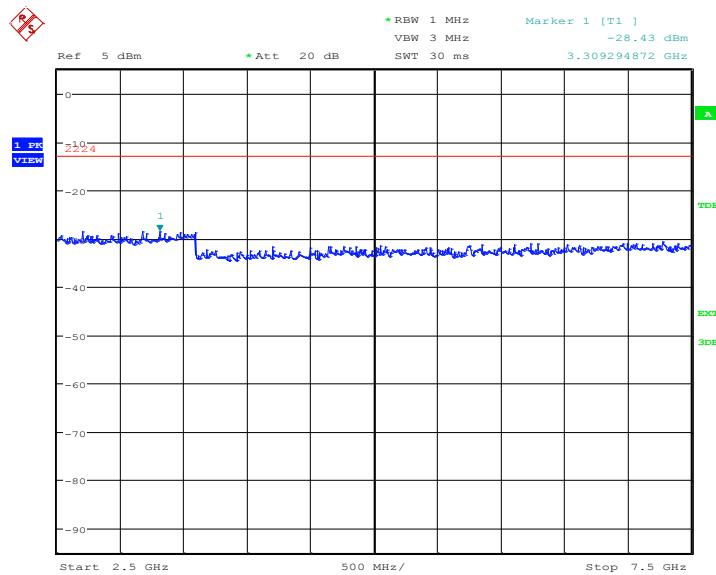

Date: 22.FEB.2021 12:54:33

Channel 661: 7.5GHz –10GHz


Spurious emission limit –13dBm

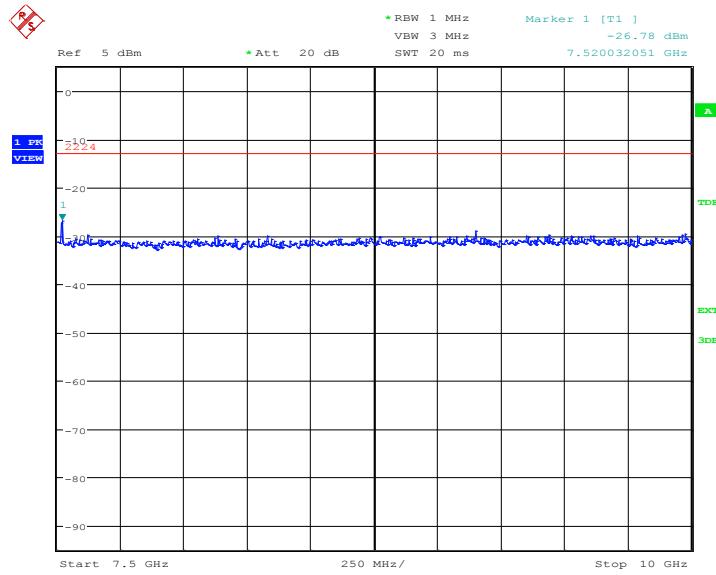

Date: 22.FEB.2021 12:54:59

Channel 661: 10GHz –15GHz


Spurious emission limit –13dBm.

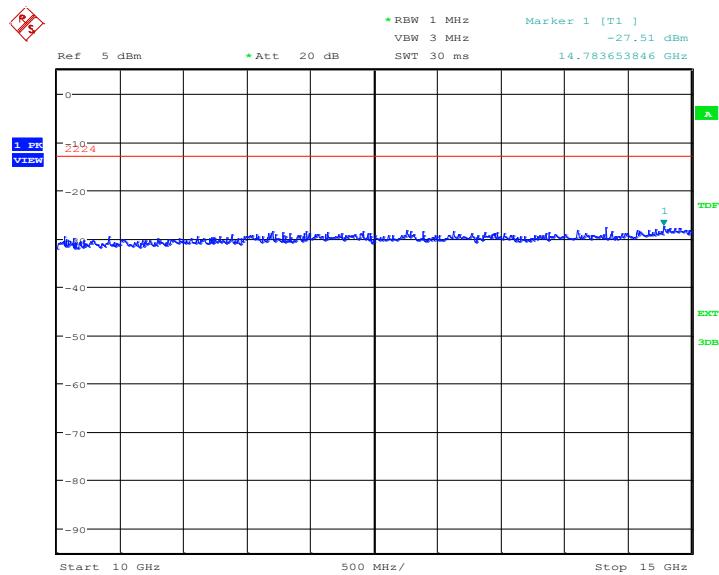

Date: 22.FEB.2021 12:55:26

Channel 661: 15GHz –20GHz


Spurious emission limit –13dBm.

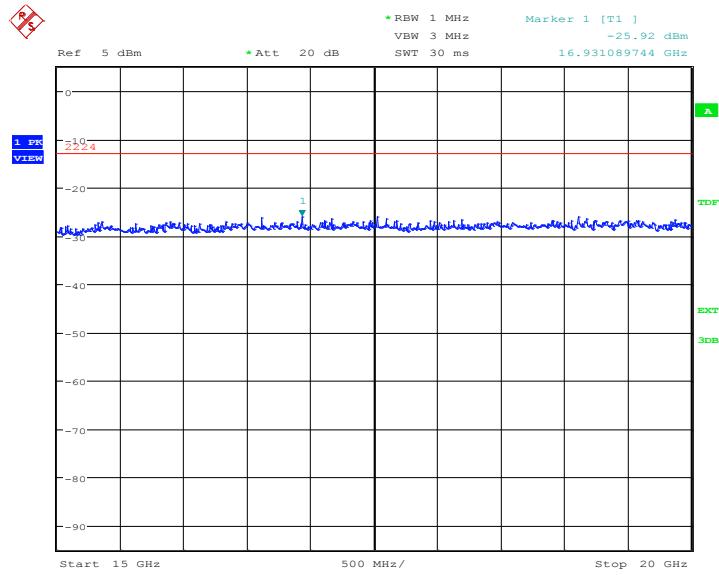

Date: 22.FEB.2021 12:55:53

Channel 810: 30MHz – 1GHz


Spurious emission limit –13dBm.

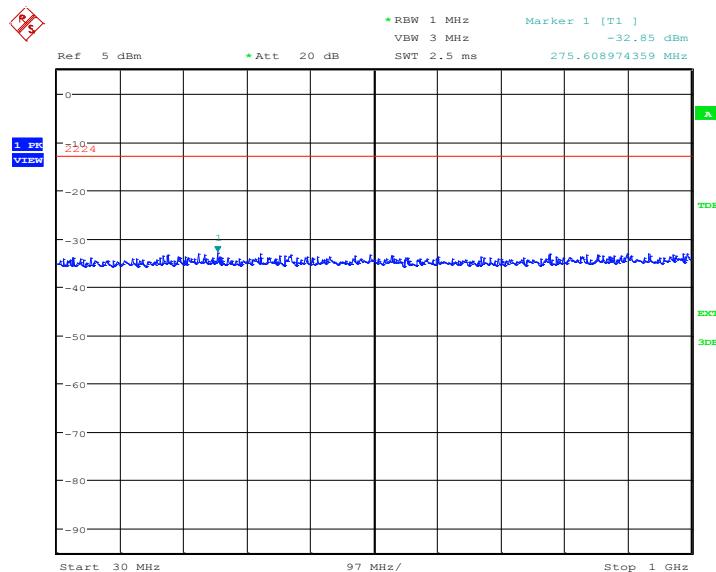

Date: 22.FEB.2021 12:56:21

Channel 810: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

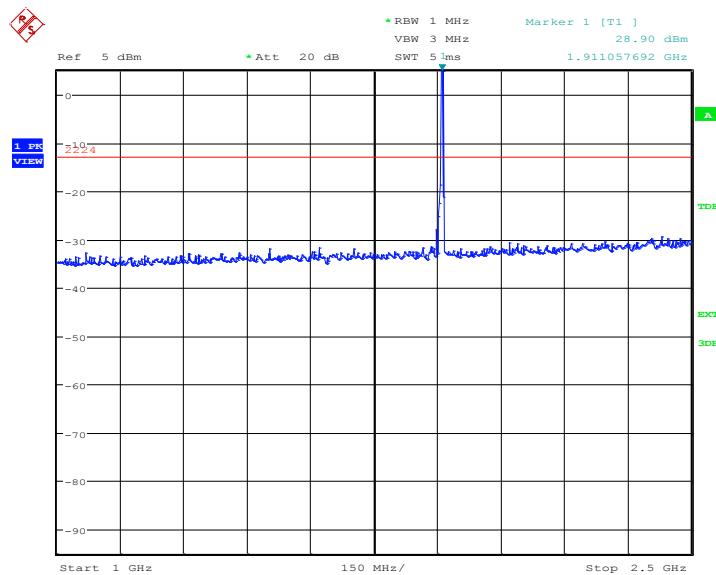NOTE: peak above the limit line is the carrier frequency.


Date: 22.FEB.2021 12:56:47

Channel 810:2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

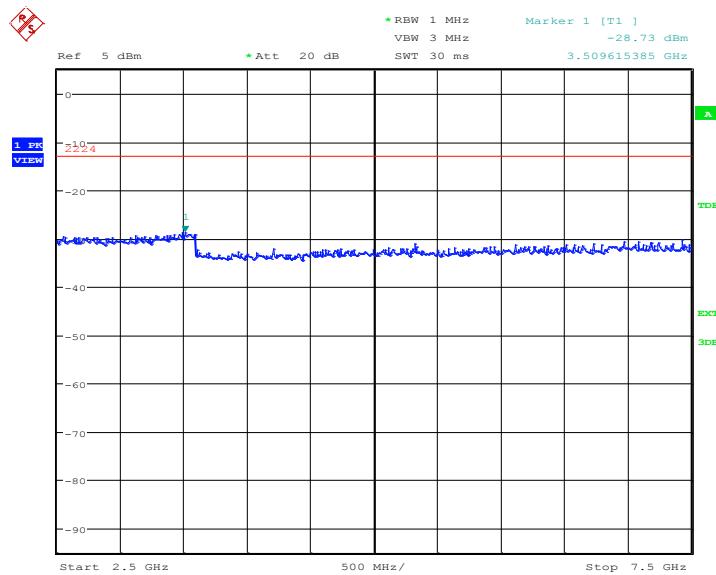

Date: 22.FEB.2021 12:57:14

Channel 810: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

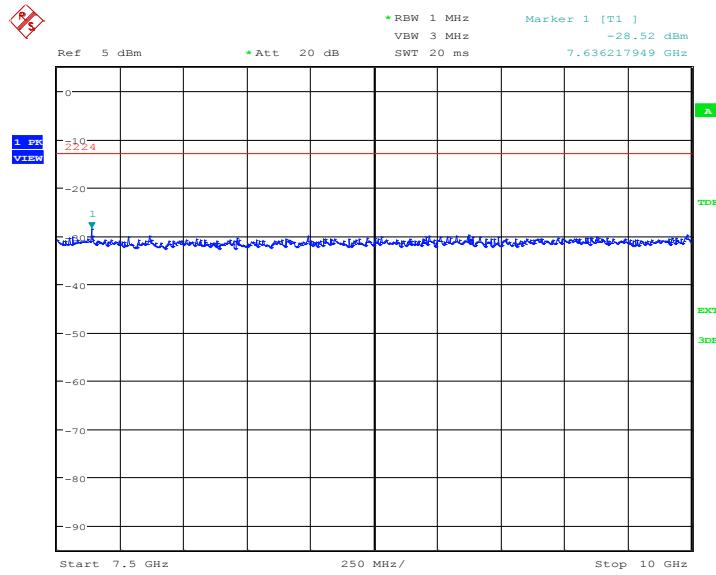

Date: 22.FEB.2021 12:57:41

Channel 810: 10GHz –15GHz


Spurious emission limit –13dBm.

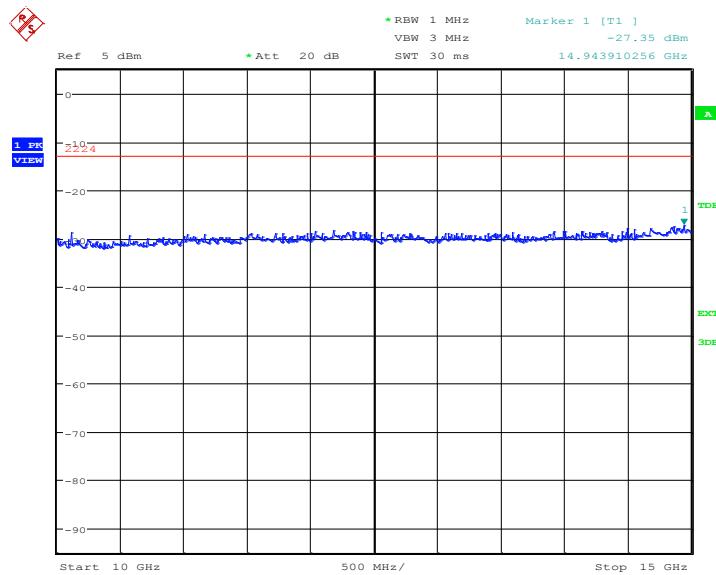

Date: 22.FEB.2021 12:58:08

Channel 810: 15GHz –20GHz

Spurious emission limit –13dBm.

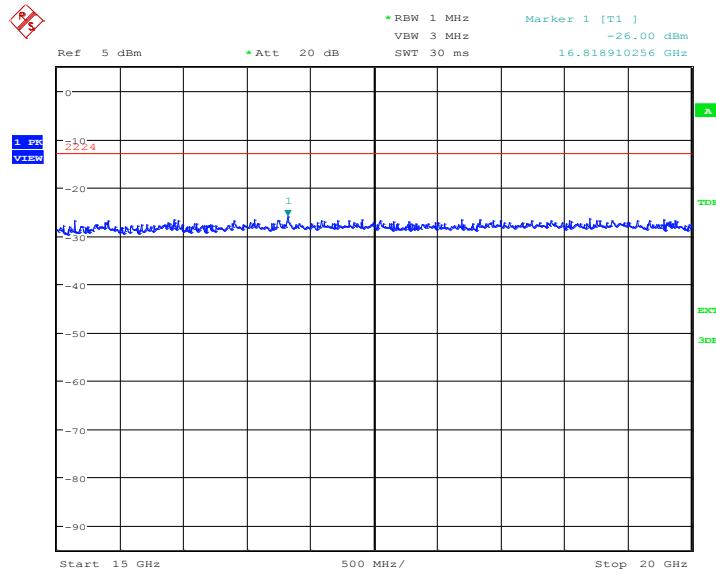

Date: 22.FEB.2021 12:58:35

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}(100\text{KHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz})$, $k = 1.96$

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232, KDB971168 D01.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit


not exceed 13 dB

A.8.2 Measurement results


Only worst case result is given below

GSM850

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
824.2	7.66
836.6	7.63
848.8	7.66

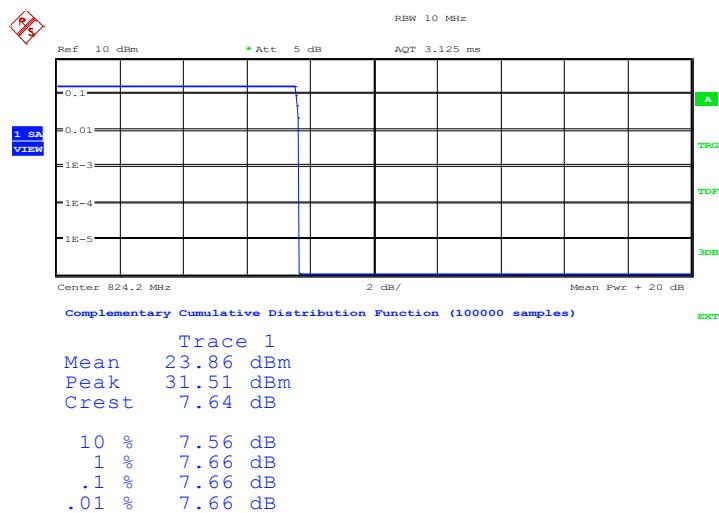
GSM 850
Channel 128- Peak-to-average Power Ratio


Date: 22.FEB.2021 12:16:50

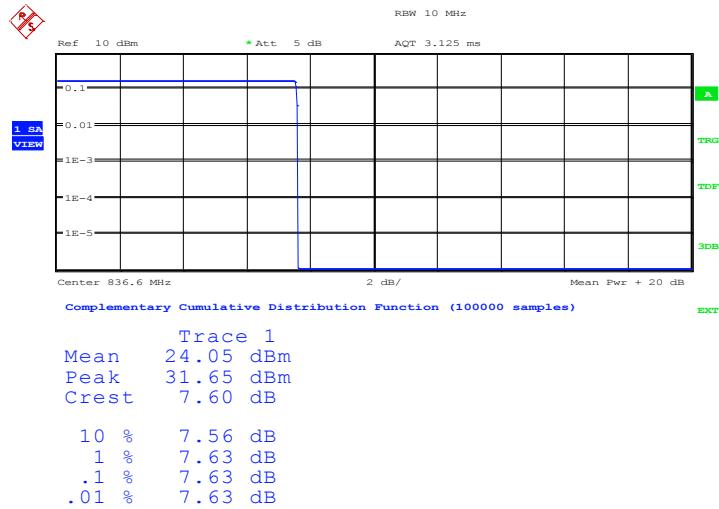Channel 190- Peak-to-average Power Ratio


Date: 22.FEB.2021 12:16:55


Channel 251- Peak-to-average Power Ratio

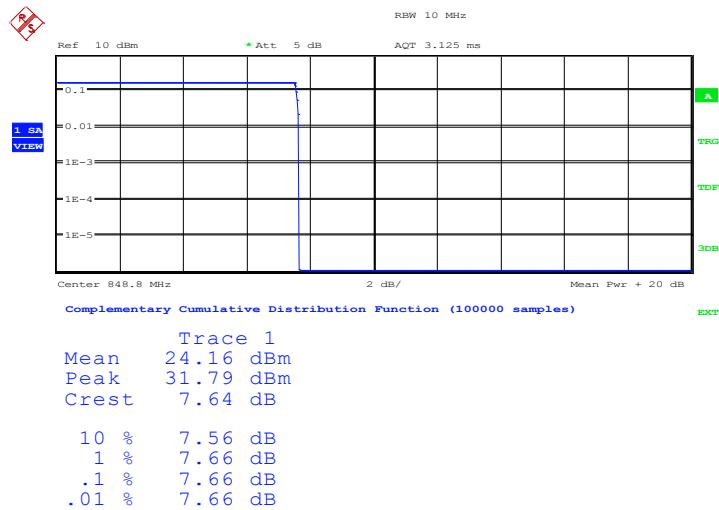


Date: 22.FEB.2021 12:17:01

GPRS 850 (PAPR)

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
824.2	7.66
836.6	7.66
848.8	7.69

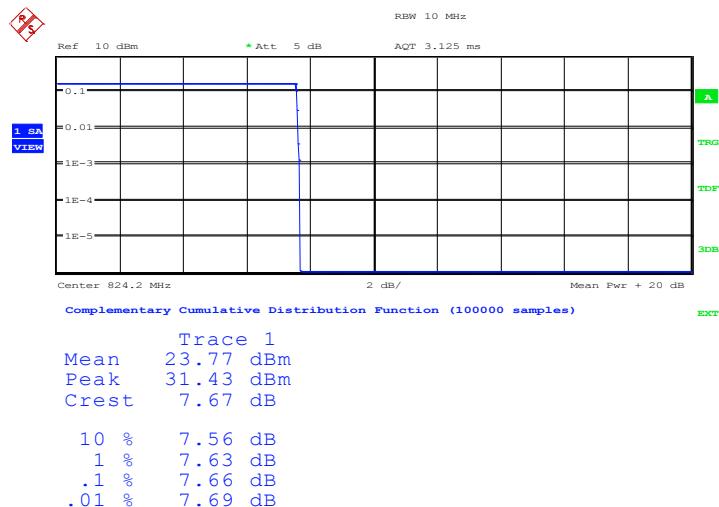
GPRS 850
Channel 128- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:07:00

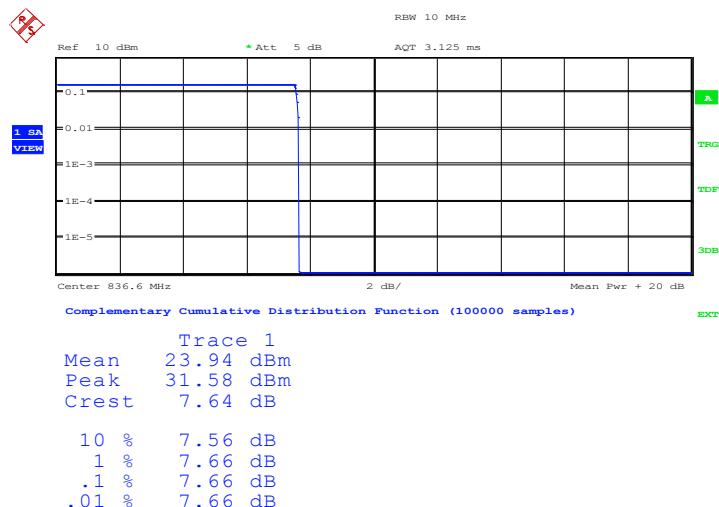Channel 190- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:07:06


Channel 251- Peak-To-Average Power Ratio(PAPR)

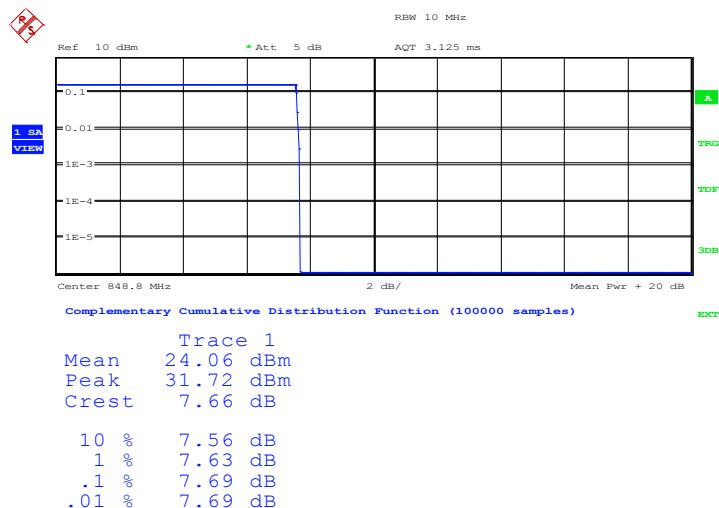


Date: 22.FEB.2021 13:07:11

EGPRS 850 (PAPR)

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
824.2	10.58
836.6	9.97
848.8	10.16

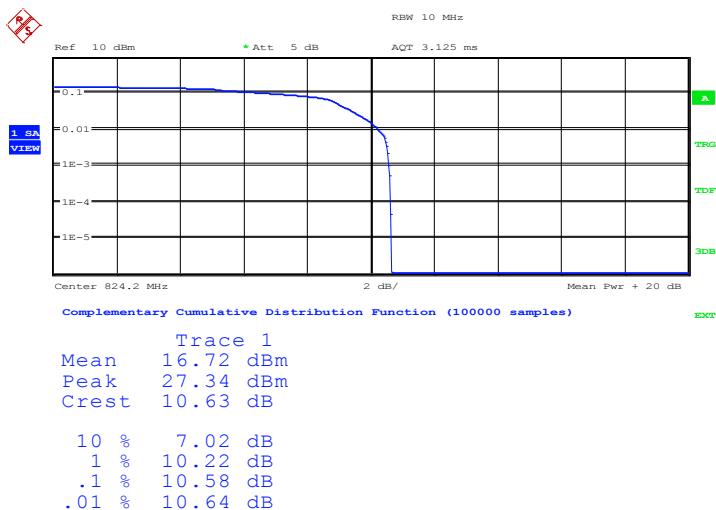
EGPRS 850
Channel 128- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:24:36

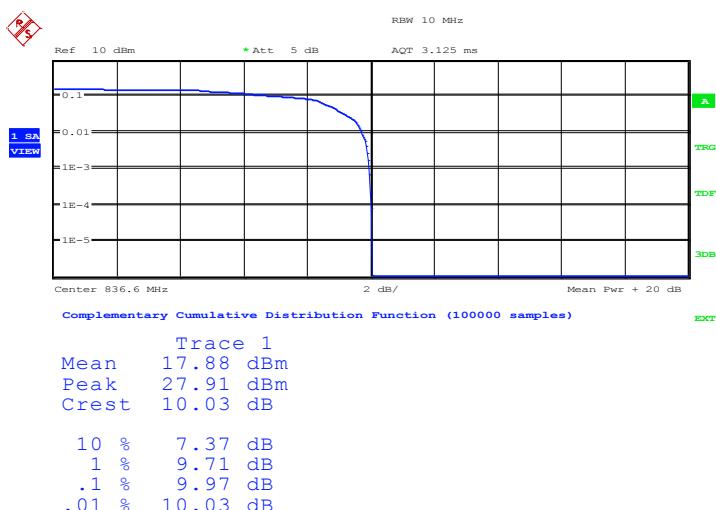Channel 190- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:24:42


Channel 251- Peak-To-Average Power Ratio(PAPR)

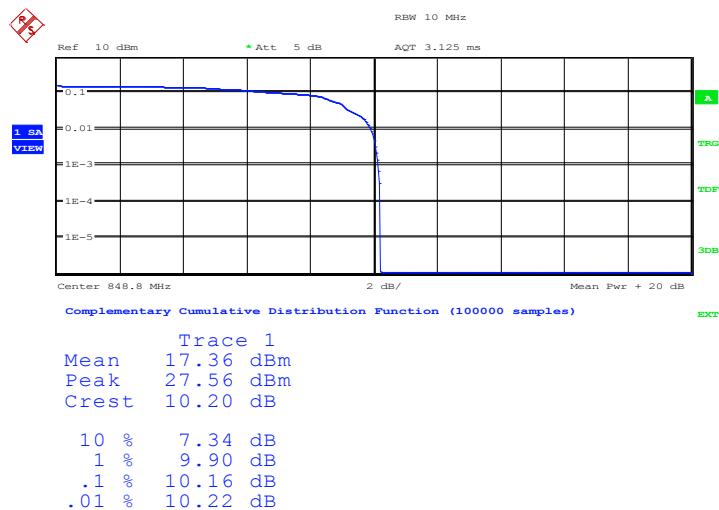


Date: 22.FEB.2021 13:24:47

PCS1900 (PAPR)

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	7.72
1880.0	7.69
1909.7	7.69

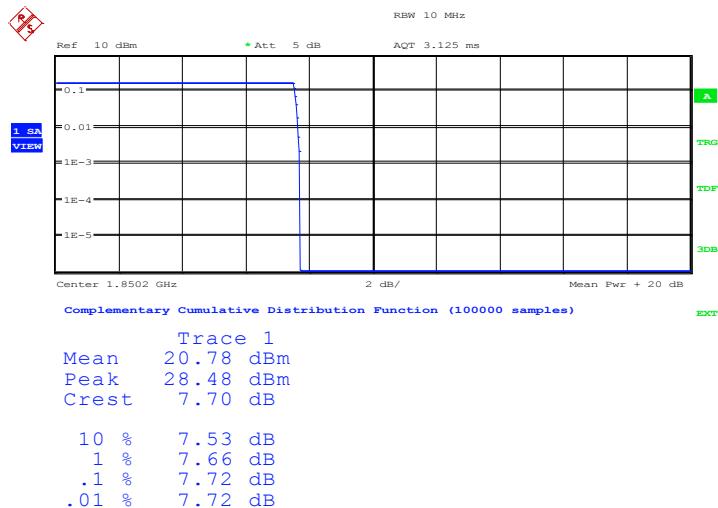
PCS 1900
Channel 512- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 12:50:19

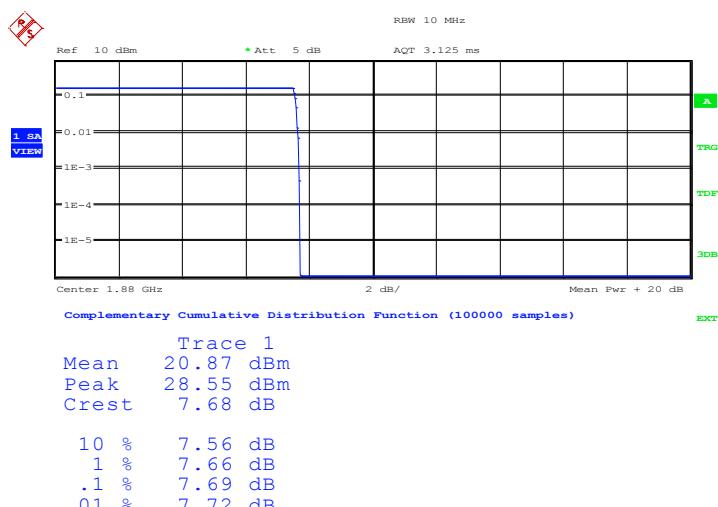Channel 661- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 12:50:25


Channel 810- Peak-To-Average Power Ratio(PAPR)

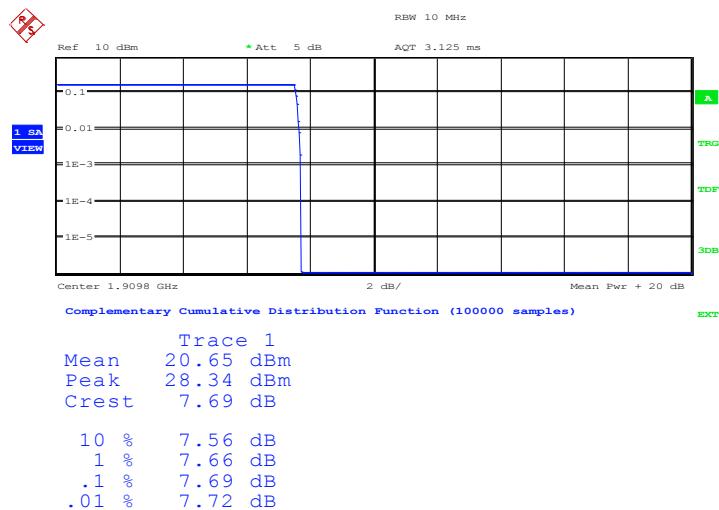


Date: 22.FEB.2021 12:50:30

GPRS1900 (PAPR)

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	7.69
1880.0	7.69
1909.7	7.69

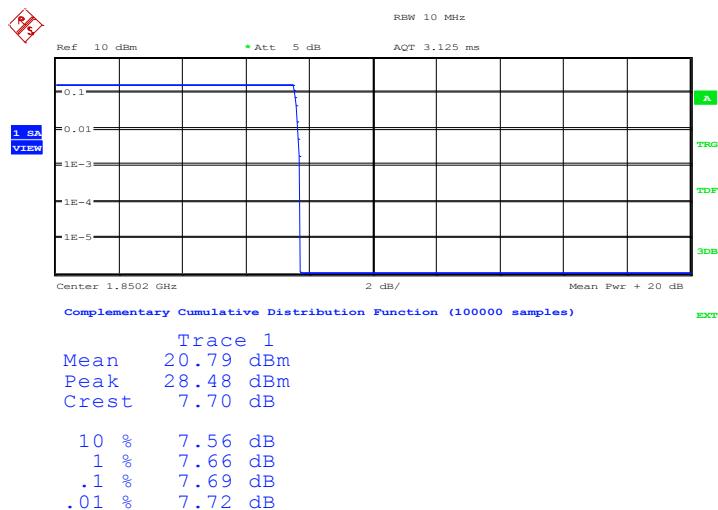
GPRS 1900
Channel 512- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:15:11

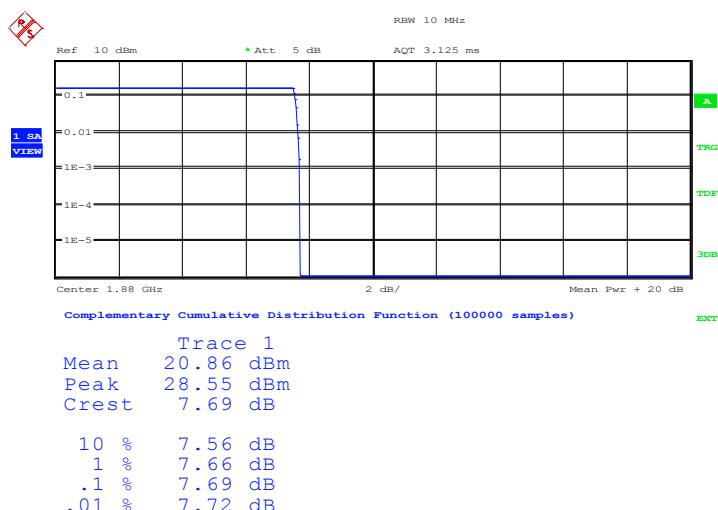Channel 661- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:15:17


Channel 810- Peak-To-Average Power Ratio(PAPR)

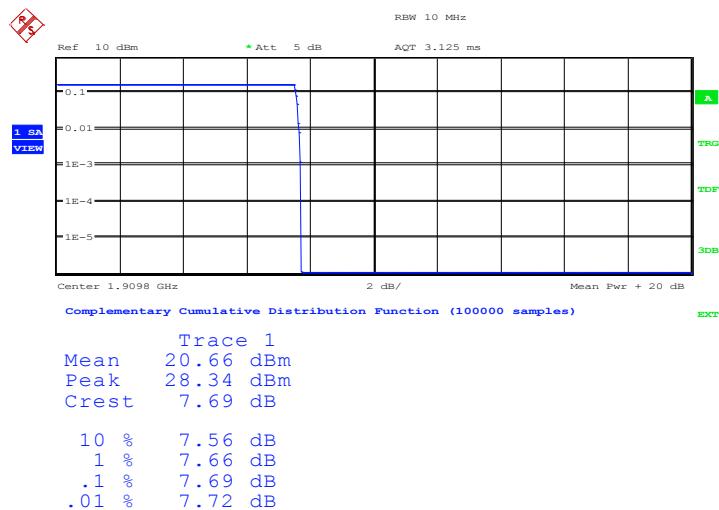


Date: 22.FEB.2021 13:15:22

EGPRS 1900 (PAPR)

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	10.06
1880.0	10.29
1909.7	10.16

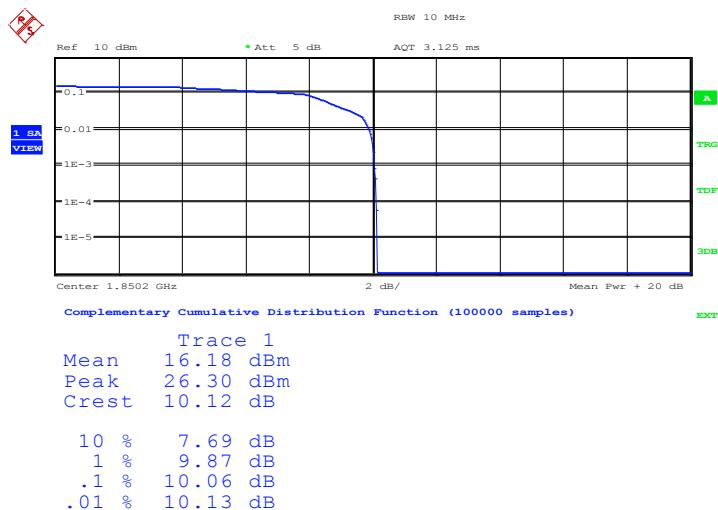
EGPRS 1900
Channel 512- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:33:55

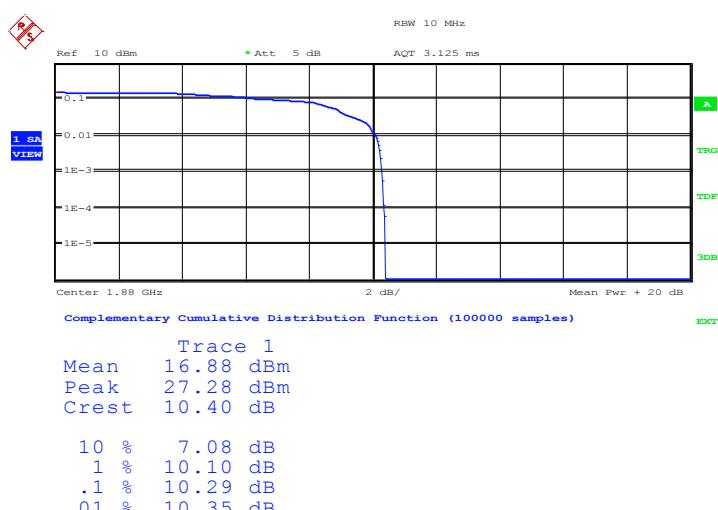Channel 661- Peak-To-Average Power Ratio(PAPR)


Date: 22.FEB.2021 13:34:00

Channel 810- Peak-To-Average Power Ratio(PAPR)

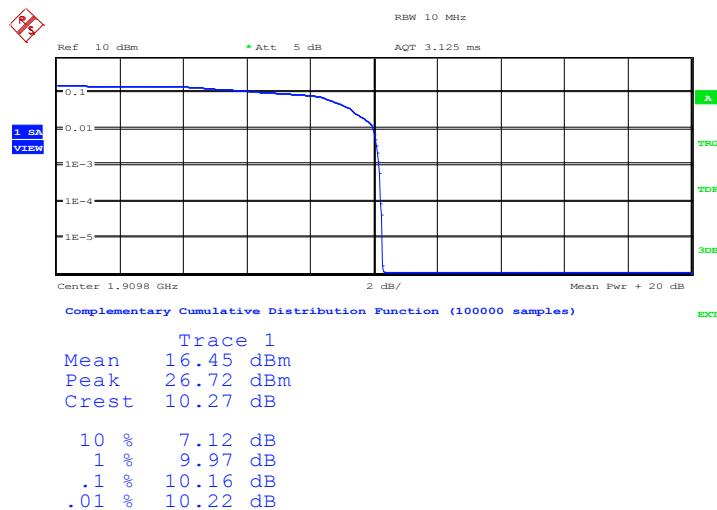

Date: 22.FEB.2021 13:34:05

 Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 2$

END OF REPORT