

FCC TEST REPORT(Bluetooth)

for

Haven Technologies, Inc

Bluetooth Noise-Isolating Earbuds

Model Number: IT-01

FCC ID:2AJRDIT-01

Prepared for : Haven Technologies, Inc
Address : 1025 Pine Hill Way, Carmel, Indiana 46021 USA
Prepared by : Keyway Testing Technology Co., Ltd.
Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China

Tel: 86-769-8718 2258

Fax: 86-769-8718 1058

Report No. : 16KWE094301F



Date of Test : Aug.16~Sep.02, 2016

Date of Report : Sep.05, 2016

TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	5
2.1. Product Function.....	5
2.2. Description of Device (EUT)	5
2.3. Difference between Model Numbers	5
2.4. Independent Operation Modes	5
2.5. Test Supporting System	5
2.6. Test Facilities	6
2.7. List of Test and Measurement Instruments	7
3. TEST SET-UP AND OPERATION MODES.....	8
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software	8
3.4. Special Accessories and Auxiliary Equipment.....	8
3.5. Countermeasures to Achieve EMC Compliance	8
3.6. Test Environment:	8
4. MAXIMUM PEAK OUTPUT POWER.....	9
4.1. Limits	9
4.2. Test Procedure.....	9
5. EMISSION TEST RESULTS.....	15
5.1. Conducted Emission at the Mains Terminals Test.....	15
5.2. Radiated Emission Test.....	20
6. 20DB BANDWIDTH	34
6.1. Limits	34
6.2. Test setup	34
7. FREQUENCY SEPARATION.....	41
7.1. Limits	41
7.2. Test setup	41
8. NUMBER OF HOPPING FREQUENCY	48
8.1. Limits	48
8.2. Test setup	48
9. DWELL TIME	50
9.1. Limits	50
9.2. Test setup	50
10. BAND EDGE COMPLIANCE TEST	57
10.1. Limits	57
10.2. Test setup	57
10.3. TEST Procedure	58
11. ANTENNA REQUIREMENTS	66
11.1. Limits	66
11.2. Result	66
12. PHOTOGRAPHS OF TEST SET-UP	67
13. PHOTOGRAPHS OF THE EUT	69

Keyway Testing Technology Co., Ltd.

Applicant:	Haven Technologies, Inc		
Address:	1025 Pine Hill Way, Carmel, Indiana 46021 USA		
Manufacturer:	ASKA Electronics Co., Ltd		
Address:	3F, building 19#, Da Ling Bian Road, Shahu Community, Tangxia Town, Dongguan, Guangdong, China		
E.U.T:	Bluetooth Noise-Isolating Earbuds		
Model Number:	IT-01		
Serial Model:	N/A		
Trade Name:	ISOtunes PRO	Serial No.:	-----
Date of Receipt:	Aug.16, 2016	Date of Test:	Aug. 16~Sep.02, 2016
Test Specification:	FCC Part 15, Subpart C Section 15.247: 2015 ANSI C63.10:2013		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
	Issue Date: Sep. 05, 2016		
Tested by:  Keven Wu / Engineer	Reviewed by:  Mike Xu / Supervisor	Approved by:  Andy Gao / Supervisor	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a)/15.209	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

2.GENERAL PRODUCT INFORMATION

2.1.Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	Bluetooth Noise-Isolating Earbuds
Model No.:	IT-01
Serial Model:	N/A
Model Difference	N/A
Operation Frequency:	2402MHz ~2480MHz
Channel numbers:	79 Channels
Channel spacing	1MHz
Modulation technology:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Bit Rate of Transmitter	1Mbps/2Mbps/3Mbps
Antenna Type:	Helical antenna
Antenna gain:	1.0dBi
Power supply:	DC 3.7V from battery

2.3. Difference between Model Numbers

None.

2.4. Independent Operation Modes

The basic operation modes are:

2.4.1. EUT work BT mode and Test mode as below:

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	BT link

2.5. Test Supporting System

N/A

2.6. Test Facilities

Lab Qualifications : 944 Shielded Room built by ETS-Lindgren, USA
Date of completion: March 28, 2011

966 Chamber built by ETS-Lindgren, USA
Date of completion: March 28, 2011

Certificated by TUV Rheinland, Germany.
Registration No.: UA 50207153
Date of registration: July 13, 2011

Certificated by UL, USA
Registration No.: 100567-237
Date of registration: September 1, 2011

Certificated by Intertek
Registration No.: 2011-RTL-L1-31
Date of registration: October 11, 2011

Certificated by Industry Canada
Registration No.: 9868A
Date of registration: December 8, 2011

Certificated by FCC, USA
Registration No.: 370994
Date of registration: February 21, 2012

Certificated by CNAS China
Registration No.: CNAS L5783
Date of registration: August 8, 2012

Name of Firm : Keyway Testing Technology Co., Ltd.

Site Location : Building 1, Baishun Industrial Zone, Zhangmutou
Town, Dongguan, Guangdong, China

2.7. List of Test and Measurement Instruments

2.7.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,16	Apr. 27,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,16	Apr. 27,17
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,16	Apr. 27,17
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,16	Apr. 27,17

2.7.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,16	Apr. 27,17
System Simulator	Agilent	E5515C	GB43130245	Apr. 27,16	Apr. 27,17
Power Splitter	Weinschel	1506A	NW425	Apr. 27,16	Apr. 27,17
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,16	Apr. 27,17
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,16	Apr. 27,17
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 27,16	Apr. 27,17
Signal Amplifier	SONOMA	310	187016	Apr. 27,16	Apr. 27,17
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,16	Apr. 27,17
RF Cable	IMRO	IMRO-400	966 Cable 1#	Apr. 27,16	Apr. 27,17
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 27,16	Apr. 27,17
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,16	Apr. 27,17
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,16	Apr. 27,17
Spectrum Analyzer	Agilent	E4407B	MY44211125	Apr. 27,16	Apr. 27,17
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,16	Apr. 27,17
High Pass filter	Micro	HPM50111	324216	Apr. 27,16	Apr. 27,17
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 27,16	Apr. 27,17
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 27,16	Apr. 27,17
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 27,16	Apr. 27,17
DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,16	Apr. 27,17
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,16	Apr. 27,17
Splitter	Agilent	11636B	0025164	Apr. 27,16	Apr. 27,17
Attenuation	MCE	24-10-34	BN9258	Apr. 27,16	Apr. 27,17
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 22,16	Apr. 22,17

3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: Bluetooth Noise-Isolating Earbuds)

3.3. Test Operation Mode and Test Software

None.

3.4. Special Accessories and Auxiliary Equipment

Adapter:	Manufacturer: Cenique Infotainment Group Limited I/P: AC 100~240V 50/60Hz 0.15A O/P: DC 5V 1A DC Line: Unshielded, detachable 1.2m
----------	---

3.5. Countermeasures to Achieve EMC Compliance

N/A

3.6. Test Environment:

Ambient conditions in the test laboratory:

Items	Actual
Temperature (°C)	21~23
Humidity (%RH)	50~65

4. MAXIMUM PEAK OUTPUT POWER

4.1. Limits


FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	0.125 w or 20.96dBm	2400-2483.5	PASS


4.2. Test Procedure


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold


Test data:


1Mbps			
Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH00	2402	1.877	30
CH39	2441	1.458	30
CH78	2480	2.777	30
2Mbps			
CH00	2402	0.559	20.96
CH39	2441	-0.182	20.96
CH78	2480	0.857	20.96
3Mbps			
CH00	2402	0.804	20.96
CH39	2441	0.017	20.96
CH78	2480	1.040	20.96

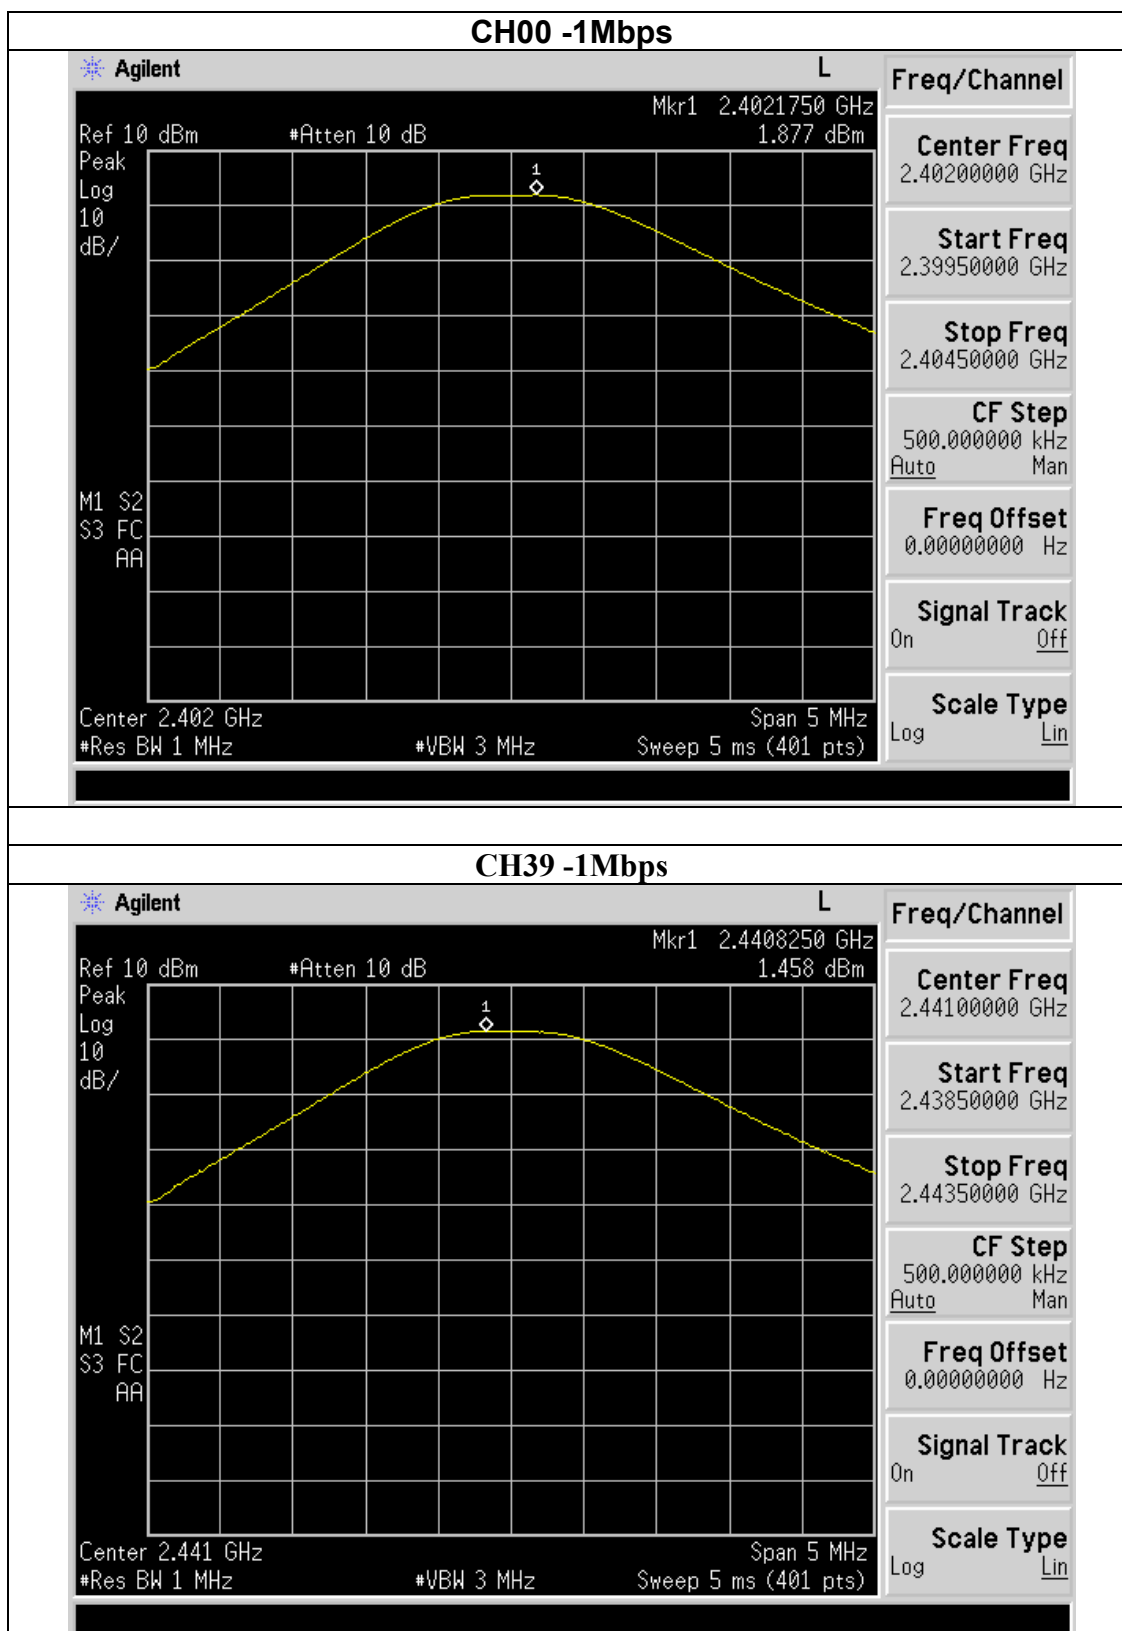

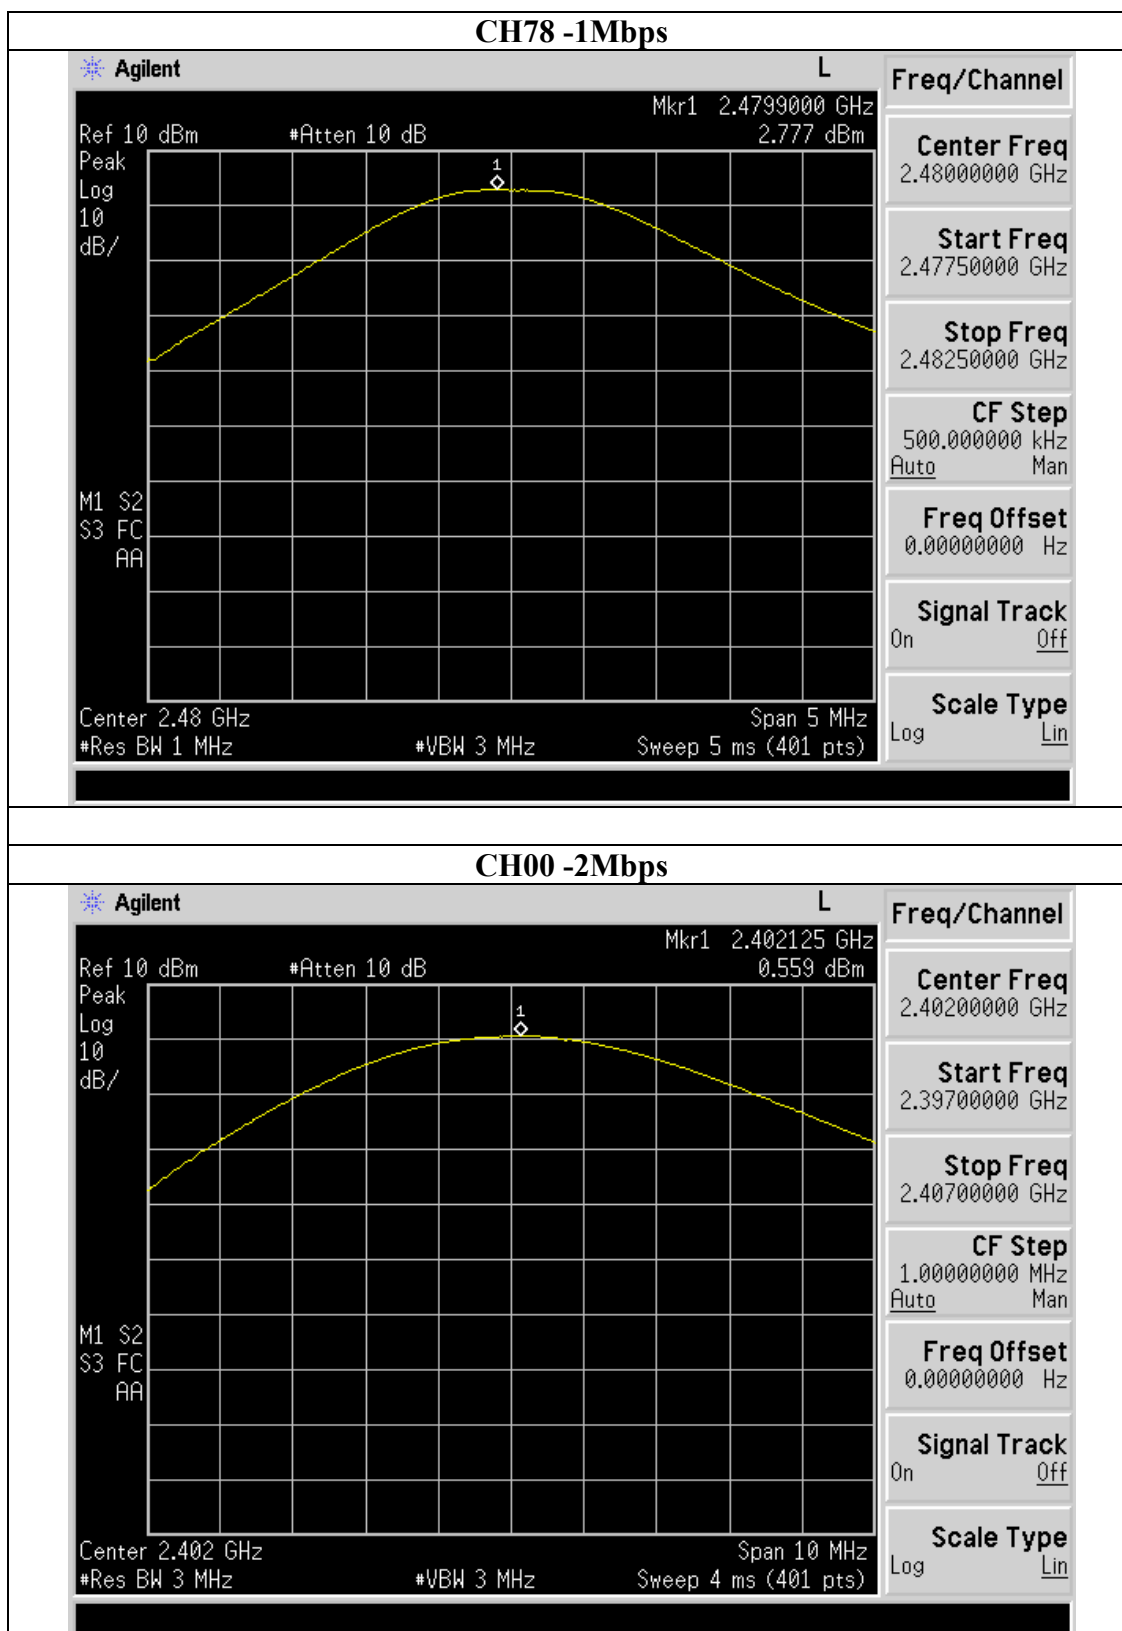

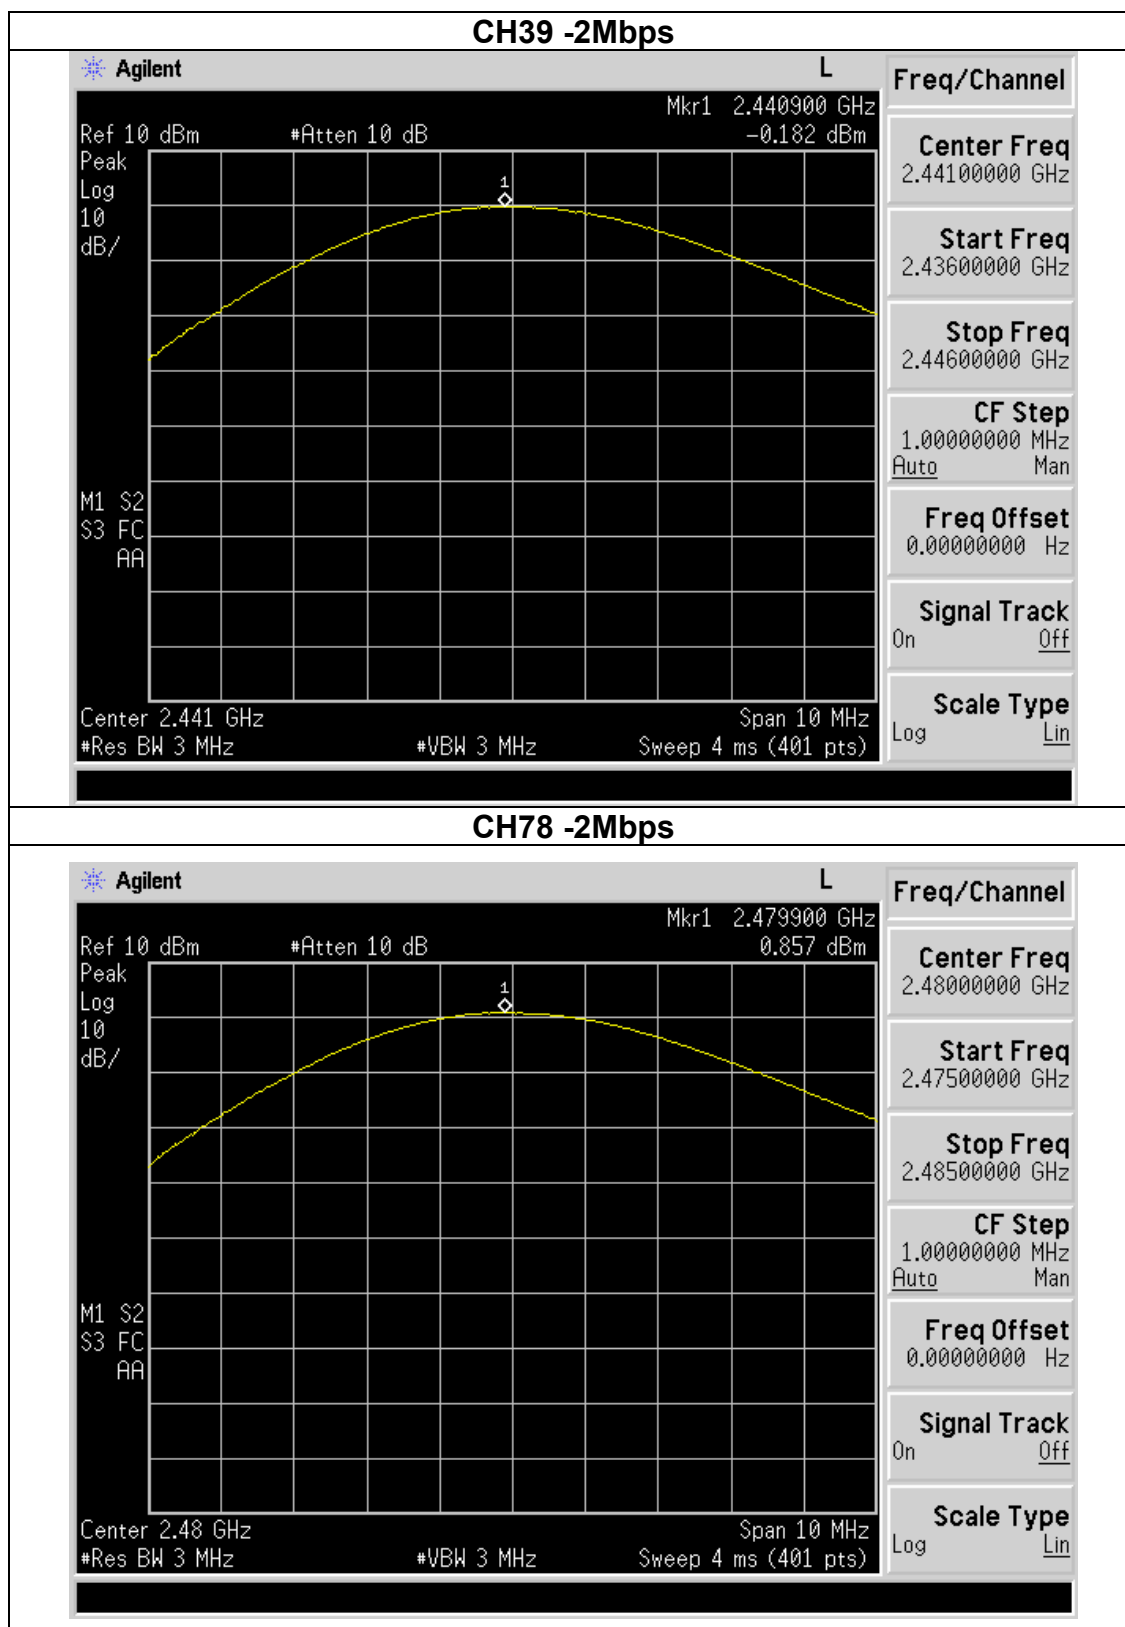

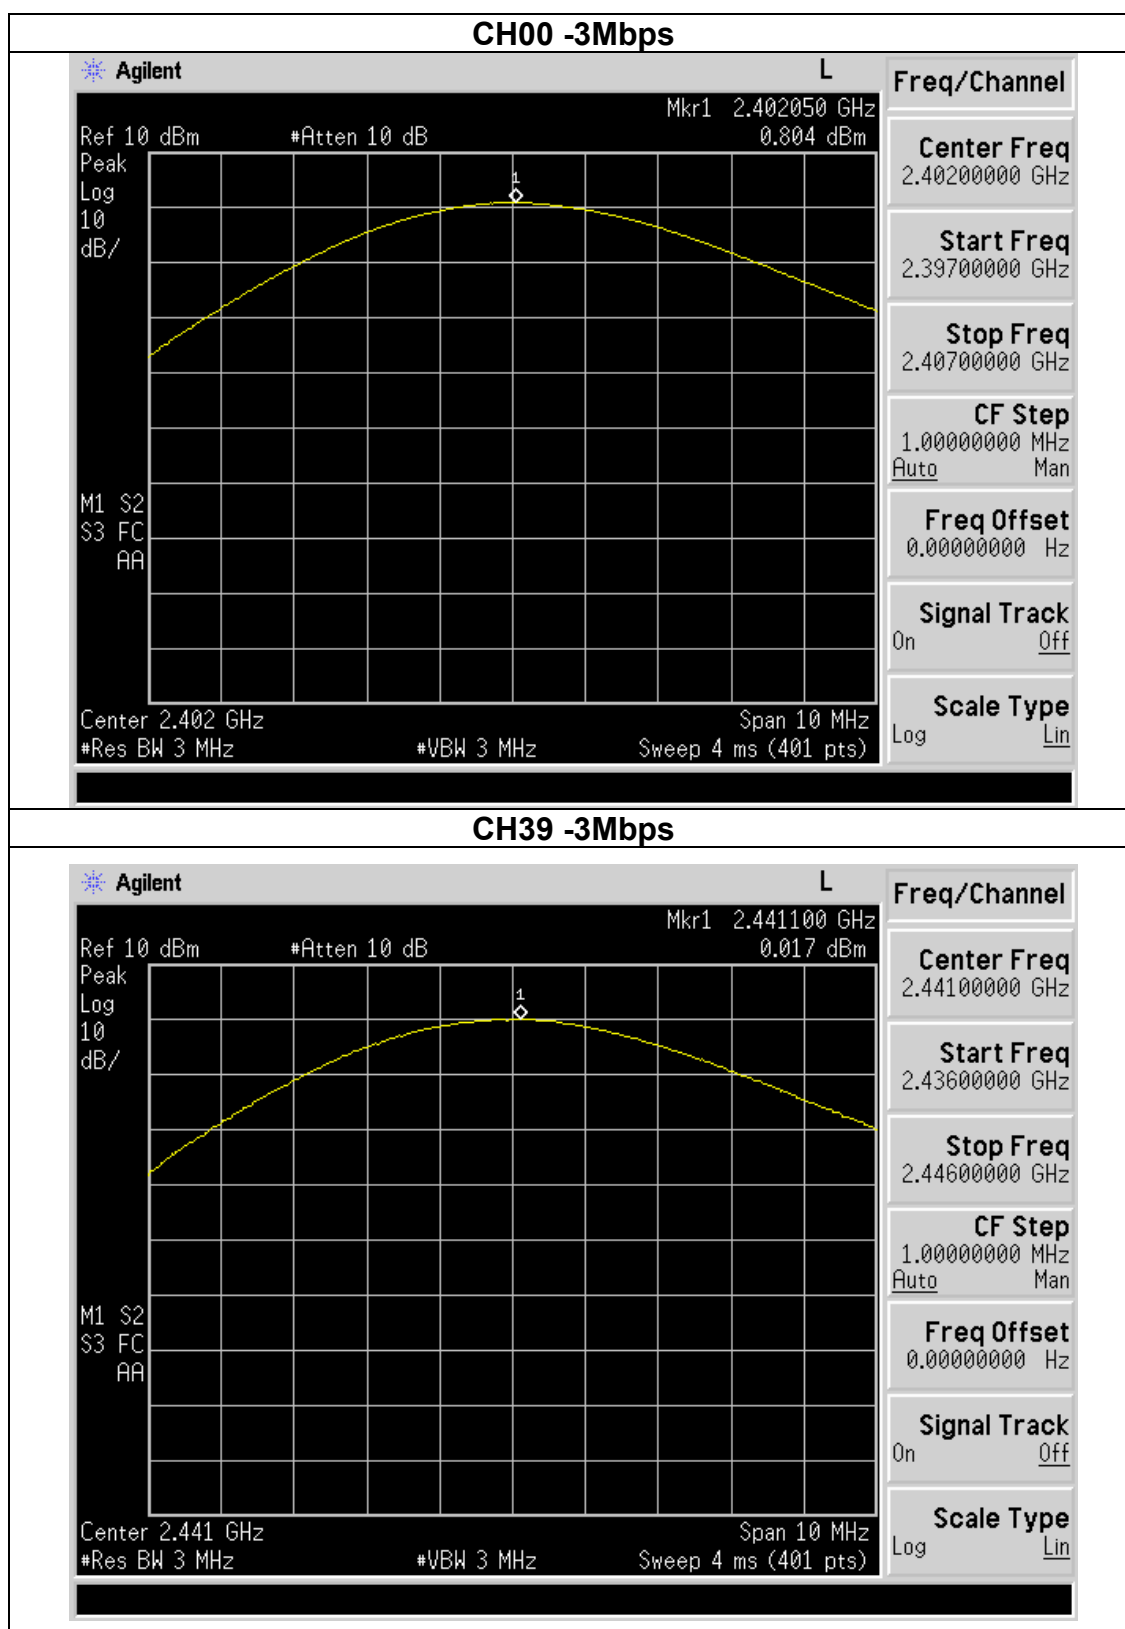

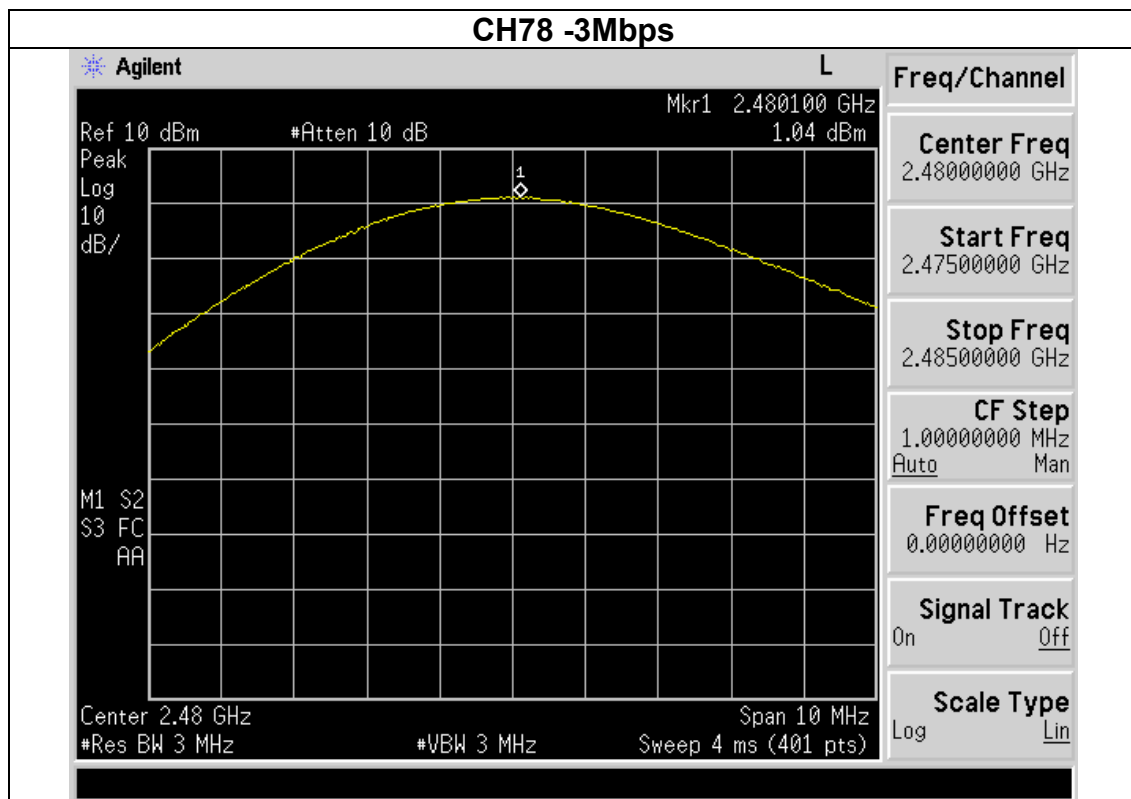

5. EMISSION TEST RESULTS

5.1. Conducted Emission at the Mains Terminals Test

5.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

5.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the center so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.


Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

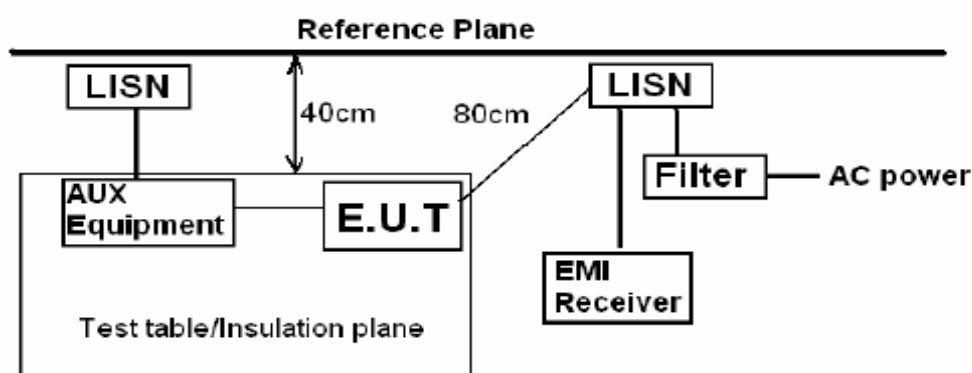

Remark:
E.U.T.: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m


5.1.3. Test result

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

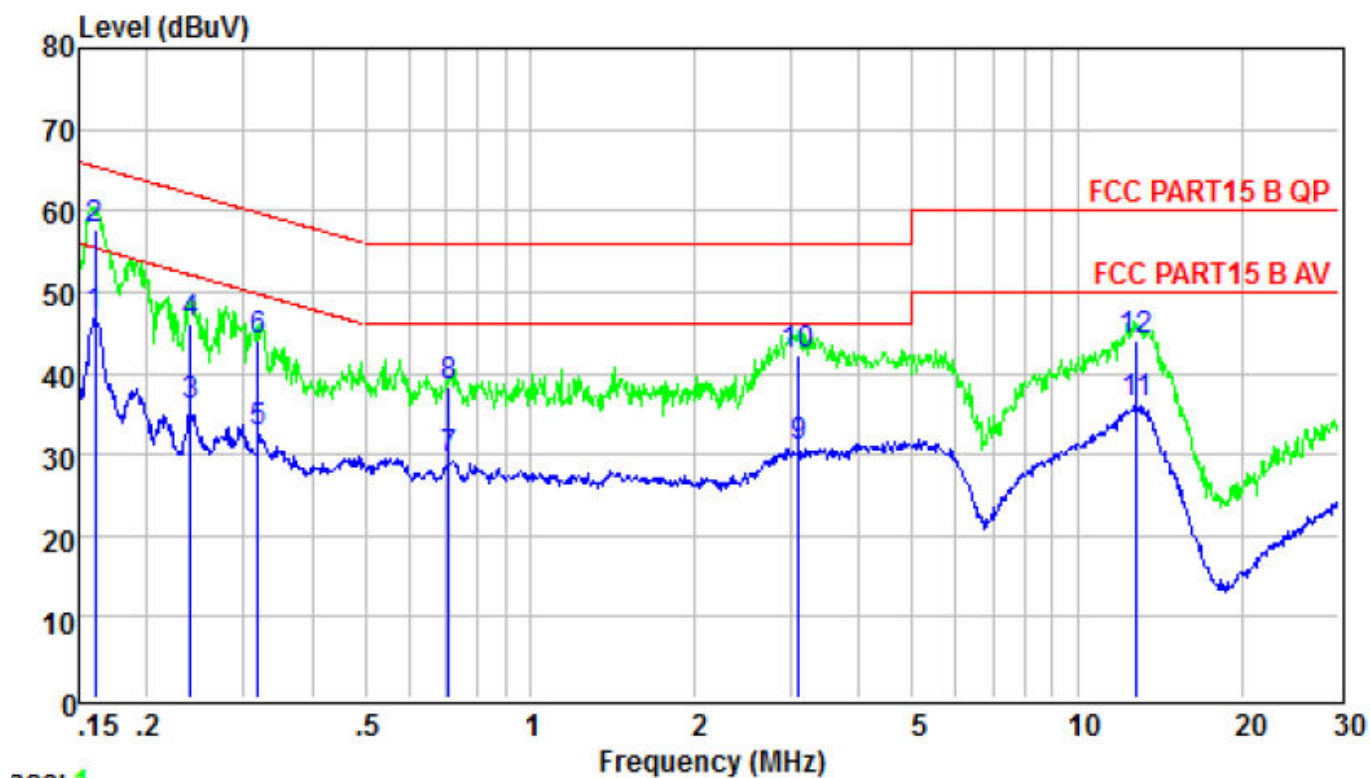


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
1	0.161	46.91	55.43	-8.52	Average
2	0.161	57.70	65.43	-7.73	QP
3	0.240	35.88	52.08	-16.20	Average
4	0.240	45.96	62.08	-16.12	QP
5	0.318	32.60	49.75	-17.15	Average
6	0.318	44.08	59.75	-15.67	QP
7	0.712	29.30	46.00	-16.70	Average
8	0.712	38.42	56.00	-17.58	QP
9	3.090	30.86	46.00	-15.14	Average
10	3.090	42.15	56.00	-13.85	QP
11	12.852	36.21	50.00	-13.79	Average
12	12.852	44.09	60.00	-15.91	QP

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

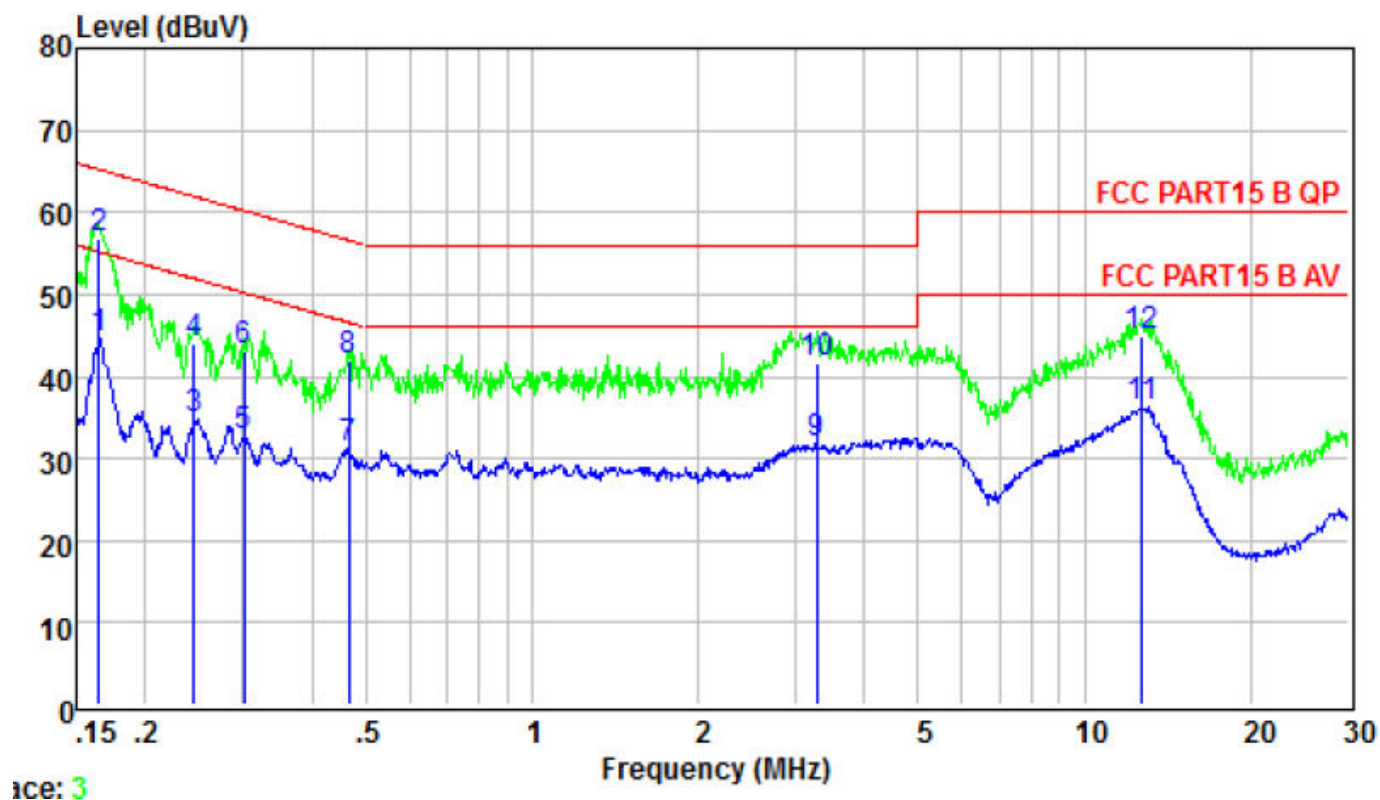


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.165	44.58	55.21	-10.63	Average
2	0.165	56.95	65.21	-8.26	QP
3	0.244	34.91	51.95	-17.04	Average
4	0.244	44.15	61.95	-17.80	QP
5	0.302	32.71	50.19	-17.48	Average
6	0.302	43.11	60.19	-17.08	QP
7	0.466	31.17	46.58	-15.41	Average
8	0.466	42.08	56.58	-14.50	QP
9	3.276	31.80	46.00	-14.20	Average
10	3.276	41.69	56.00	-14.31	QP
11	12.716	36.31	50.00	-13.69	Average
12	12.716	44.97	60.00	-15.03	QP

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 4

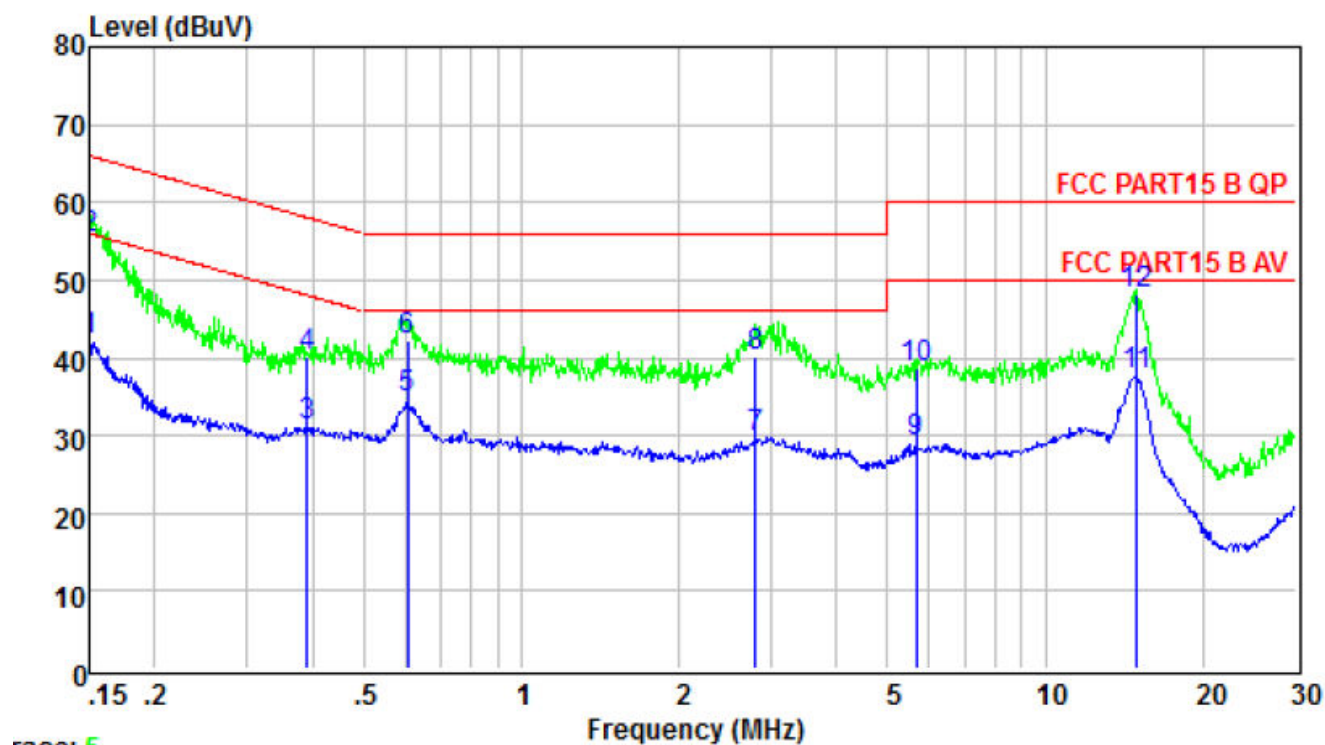

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
				dB	
1	0.150	42.30	56.00	-13.70	Average
2	0.150	55.42	66.00	-10.58	QP
3	0.391	31.10	48.03	-16.93	Average
4	0.391	40.02	58.03	-18.01	QP
5	0.608	34.70	46.00	-11.30	Average
6	0.608	42.15	56.00	-13.85	QP
7	2.794	29.77	46.00	-16.23	Average
8	2.794	40.26	56.00	-15.74	QP
9	5.653	29.06	50.00	-20.94	Average
10	5.653	38.65	60.00	-21.35	QP
11	14.907	37.66	50.00	-12.34	Average
12	14.907	48.05	60.00	-11.95	QP

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 4

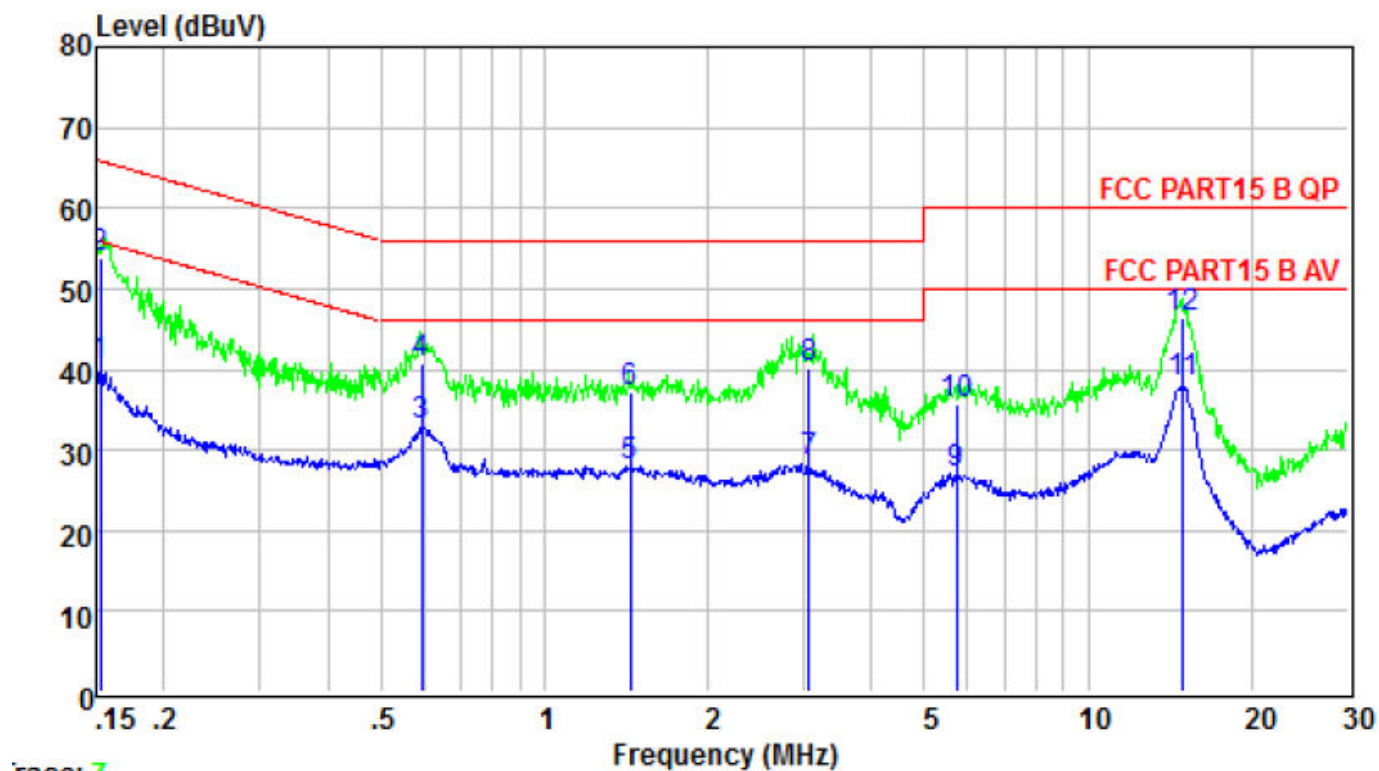

Trace: 7

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.152	40.45	55.87	-15.42	Average
2	0.152	53.69	65.87	-12.18	QP
3	0.595	32.89	46.00	-13.11	Average
4	0.595	40.69	56.00	-15.31	QP
5	1.441	28.06	46.00	-17.94	Average
6	1.441	37.11	56.00	-18.89	QP
7	3.058	28.45	46.00	-17.55	Average
8	3.058	40.15	56.00	-15.85	QP
9	5.713	27.03	50.00	-22.97	Average
10	5.713	35.77	60.00	-24.23	QP
11	14.907	38.27	50.00	-11.73	Average
12	14.907	46.32	60.00	-13.68	QP

5.2. Radiated Emission Test

5.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

5.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

5.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground blow 1G and 1.5m above 1G. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, the EUT was placed on a turn table which was 1.5 m above the ground, for all test, used peak detector.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.

2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.


3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.


5. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).

6. We pretest all modulation, The worst was GFSK, the worst data was show in the report.


Radiated Emission Test-Up Frequency Below 30MHz

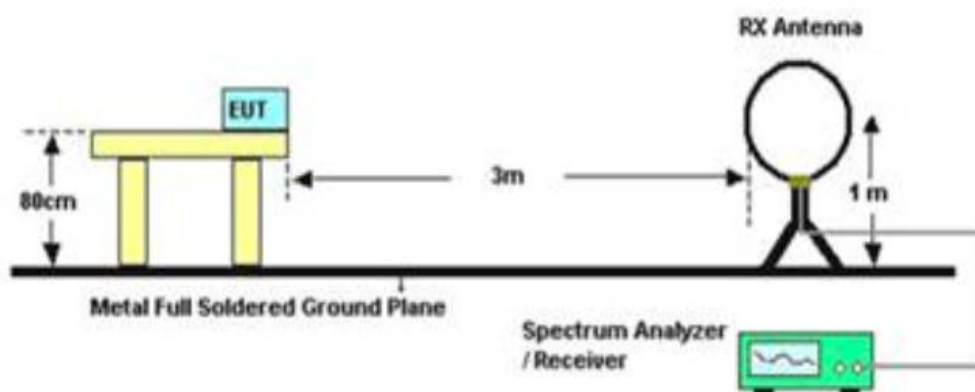

30MHz- 1GHz

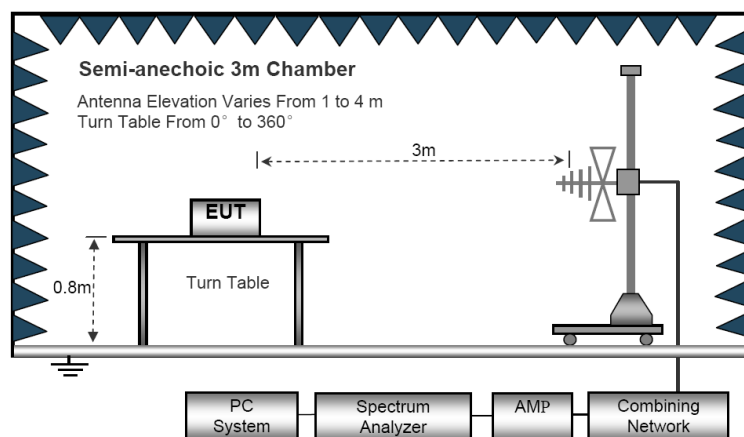

Above 1GHz

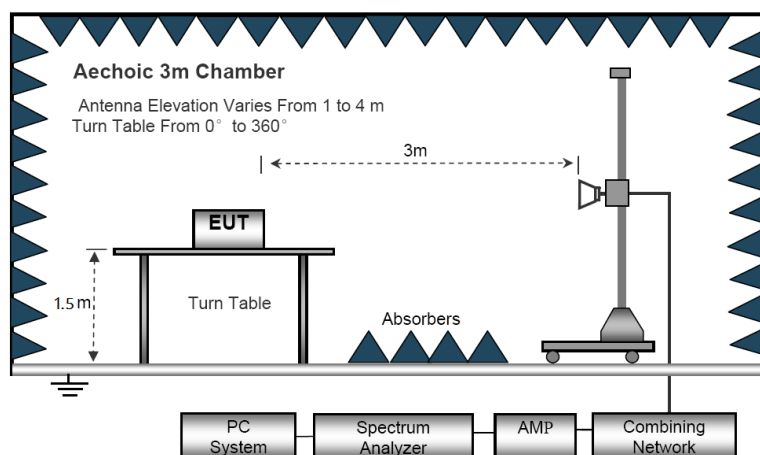

Below 30MHz

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	3.7V		


30- 1GHz

Vertical

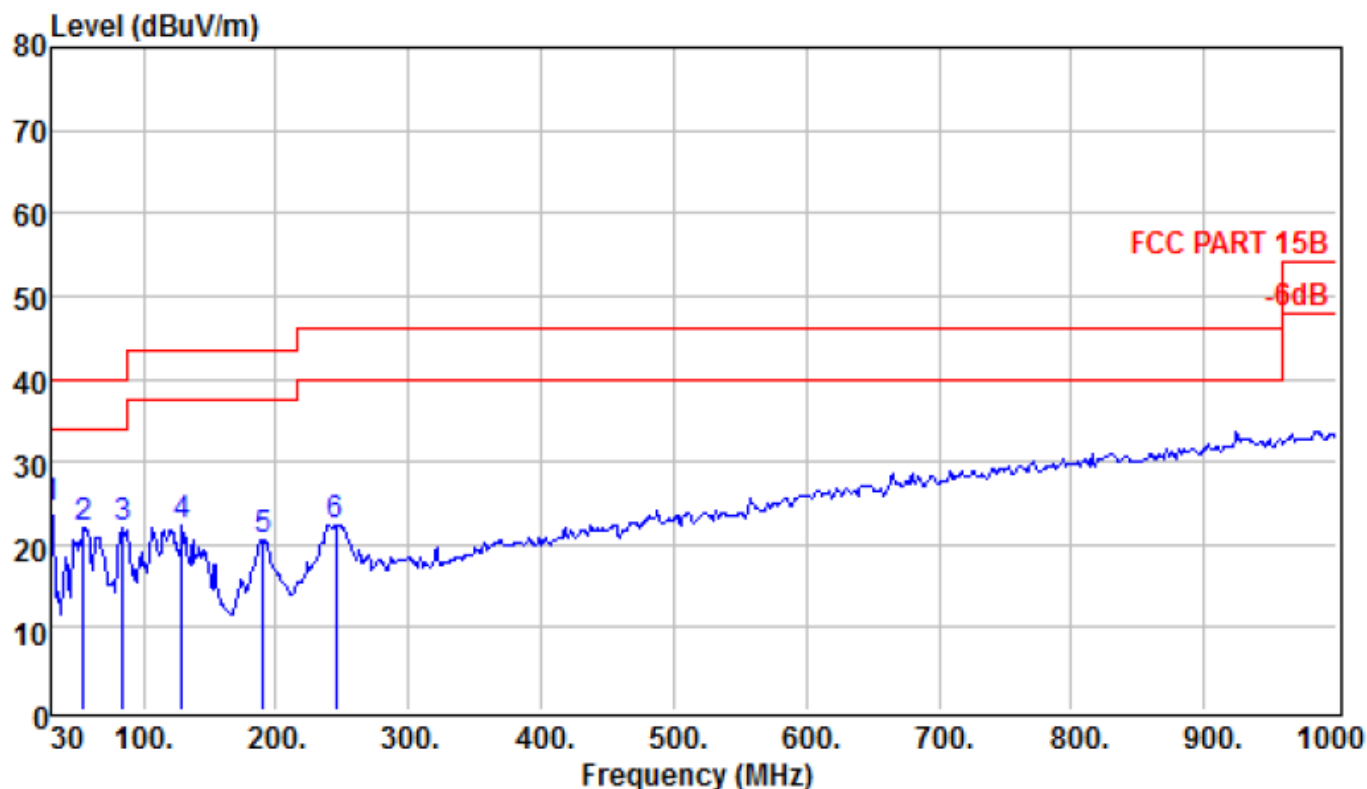

	Freq	Read Level	Preamplifier Factor	Cable Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	30.000	36.39	31.41	0.56	18.80	24.34	40.00	-15.66	QP
2	54.250	44.61	31.37	0.75	8.16	22.15	40.00	-17.85	QP
3	84.320	43.91	31.35	0.94	8.48	21.98	40.00	-18.02	QP
4	128.940	44.03	31.21	1.12	8.32	22.26	43.50	-21.24	QP
5	190.050	40.27	31.12	1.39	10.10	20.64	43.50	-22.86	QP
6	245.340	38.89	30.96	1.70	12.77	22.40	46.00	-23.60	QP

Horizontal

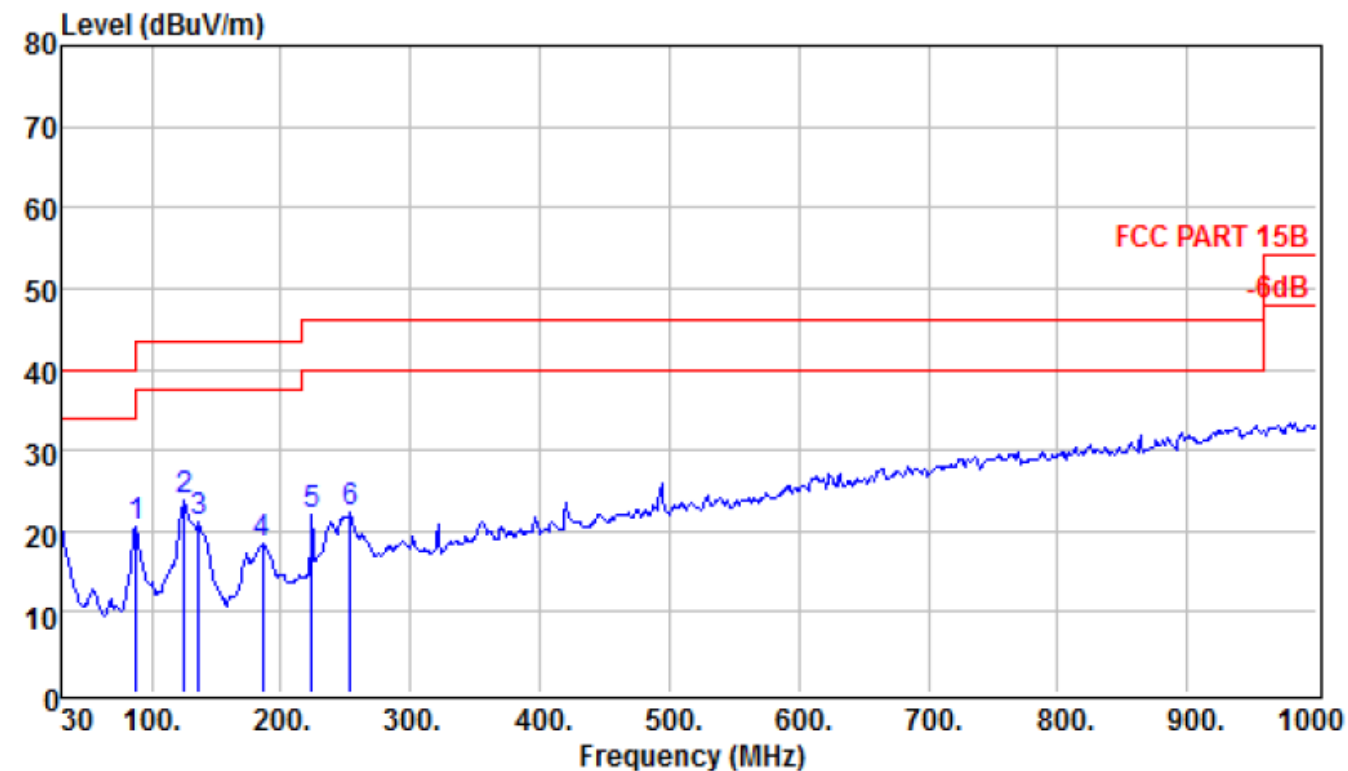

	Freq	Read Level	Preamplifier Factor	Cable Loss	Antenna Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	88.200	41.96	31.35	0.94	8.90	20.45	43.50	-23.05	QP
2	125.060	45.35	31.22	1.12	8.40	23.65	43.50	-19.85	QP
3	136.700	42.69	31.20	1.12	8.37	20.98	43.50	-22.52	QP
4	185.200	37.99	31.14	1.39	10.24	18.48	43.50	-25.02	QP
5	224.000	39.23	30.95	1.53	12.15	21.96	46.00	-24.04	QP
6	253.100	38.65	30.97	1.70	12.91	22.29	46.00	-23.71	QP

NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamplifier factor,


Over Limit= Absolute Level – Limit

1Mbps (Middle channel) is the worst mode, only worst data is presented in the report.

Above 1GHz


EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2402
Test Voltage :	DC 3.7V		

Vertical

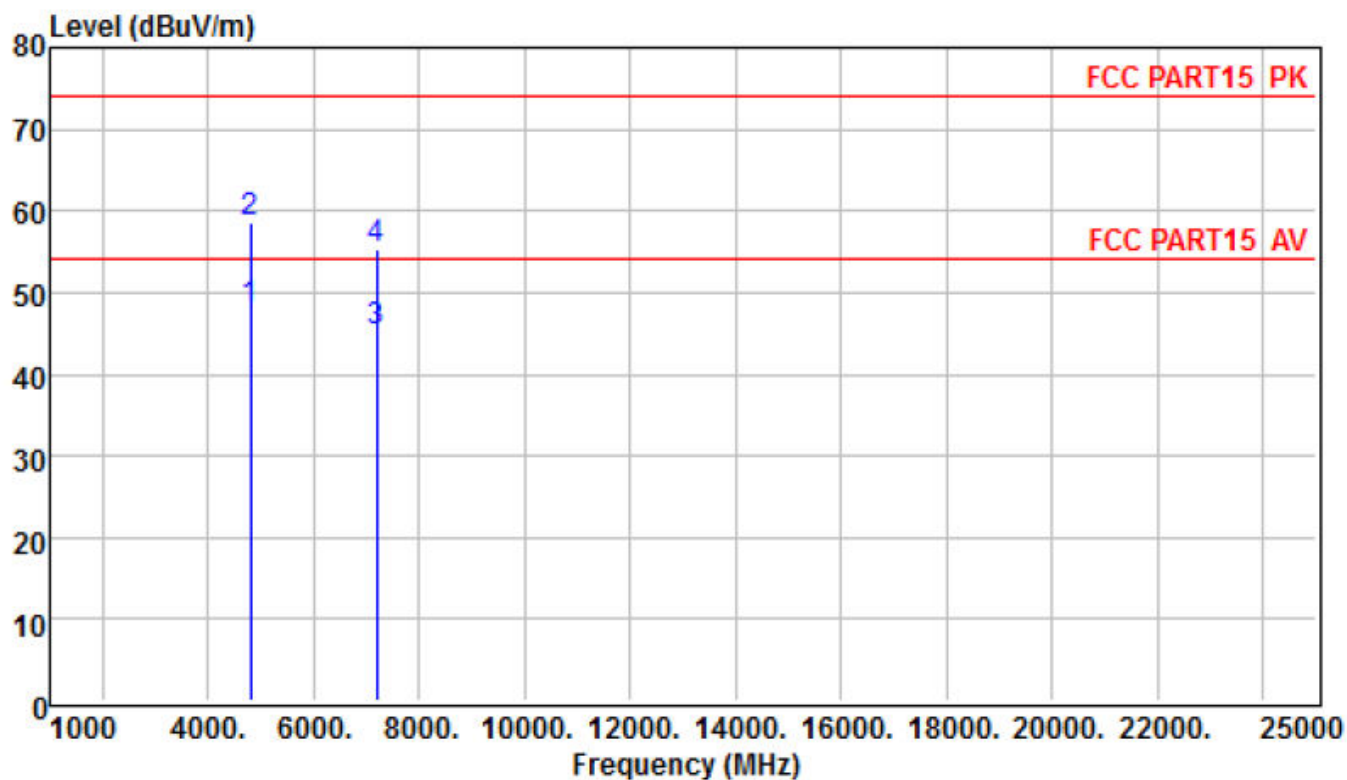


	Freq	Read Level	Preamp Factor	Cable Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	30.33	27.49	11.96	32.94	47.74	54.00	-6.26	Average
2	4804.000	41.16	27.49	11.96	32.94	58.57	74.00	-15.43	Peak
3	7206.000	31.24	27.94	16.61	25.28	45.19	54.00	-8.81	Average
4	7206.000	41.23	27.94	16.61	25.28	55.18	74.00	-18.82	Peak

Horizontal

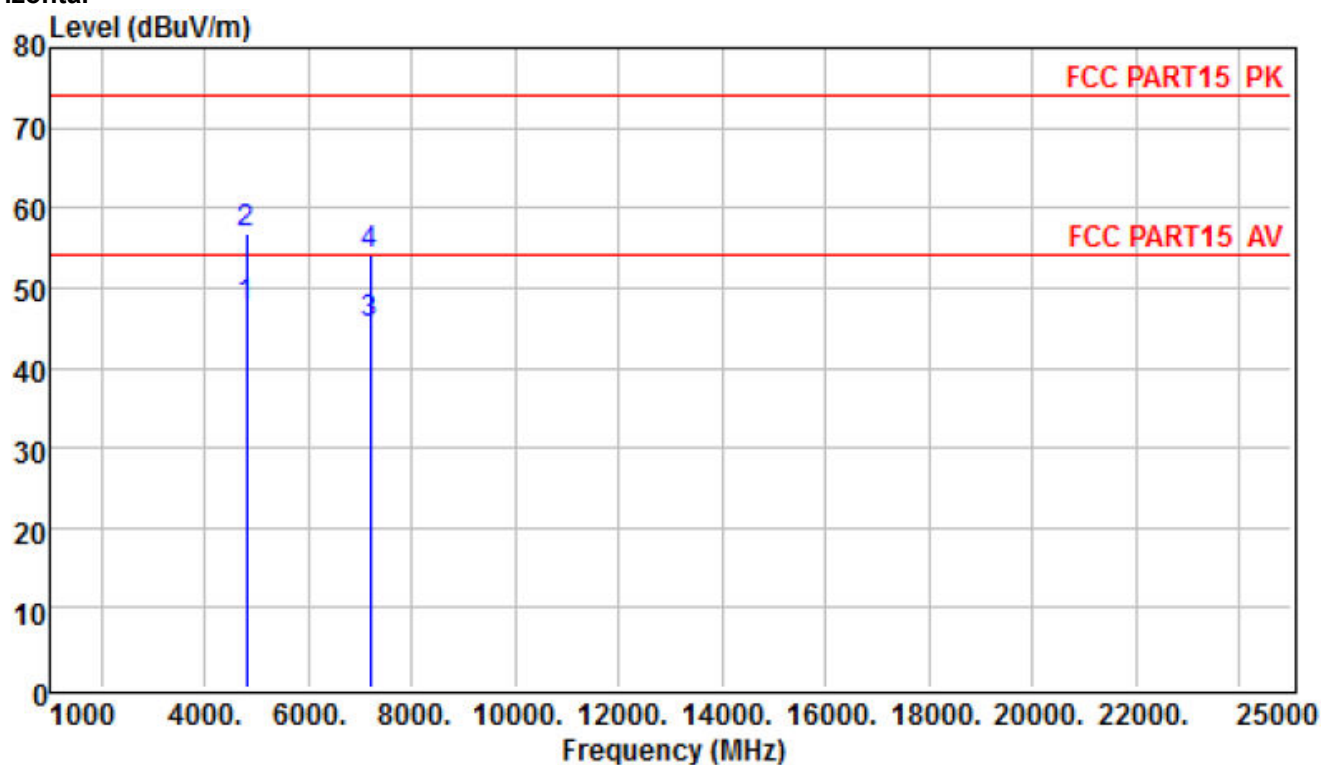


	Freq	Read Level	Preamp Factor	CableAntenna Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	4804.000	30.15	27.49	11.96	32.94	47.56	54.00	-6.44	Average
2	4804.000	39.44	27.49	11.96	32.94	56.85	74.00	-17.15	Peak
3	7206.000	31.54	27.94	16.61	25.28	45.49	54.00	-8.51	Average
4	7206.000	40.11	27.94	16.61	25.28	54.06	74.00	-19.94	Peak

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2441
Test Voltage :	DC 3.7V		

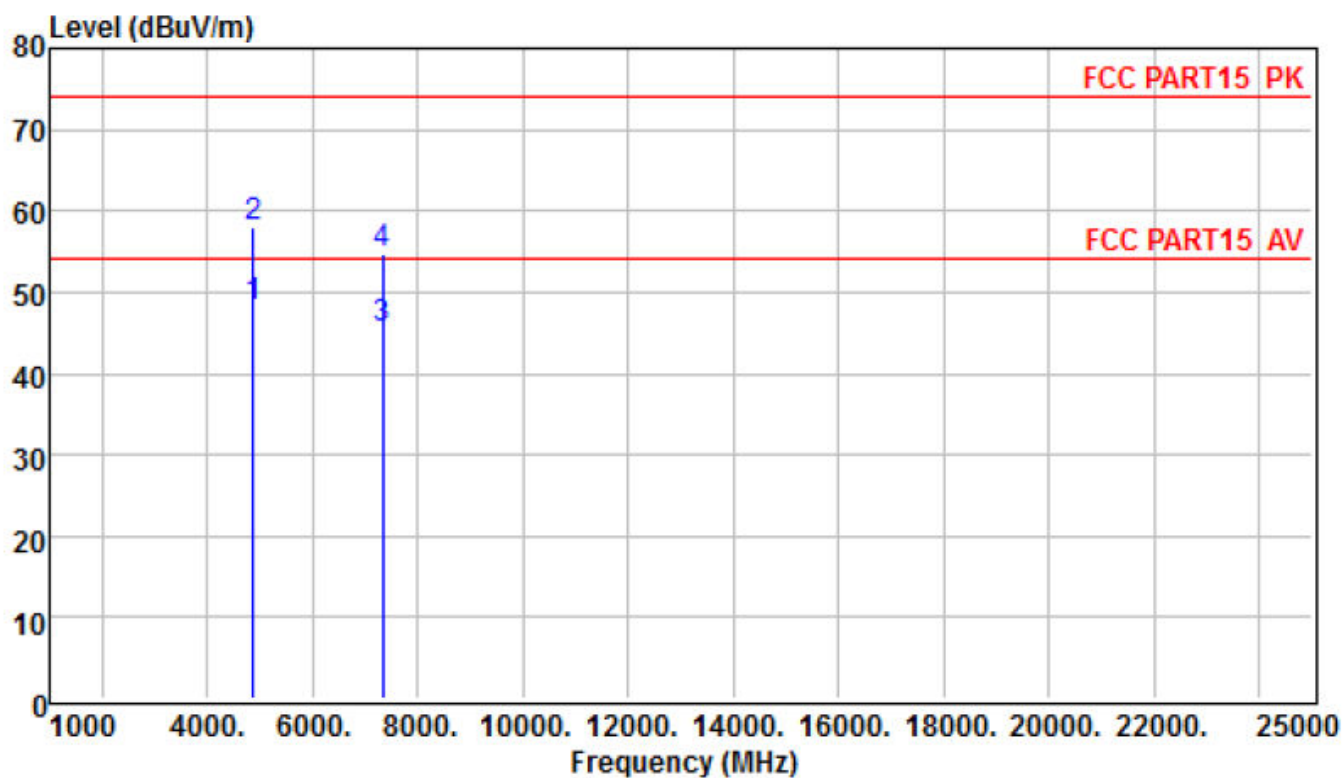Vertical


	Freq	Read Level	Preamp Factor	Cable Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	4882.000	31.43	27.53	12.14	32.11	48.15	54.00	-5.85	Average
2	4882.000	41.34	27.53	12.14	32.11	58.06	74.00	-15.94	Peak
3	7323.000	32.53	27.96	16.62	24.33	45.52	54.00	-8.48	Average
4	7323.000	41.74	27.96	16.62	24.33	54.73	74.00	-19.27	Peak

Horizontal

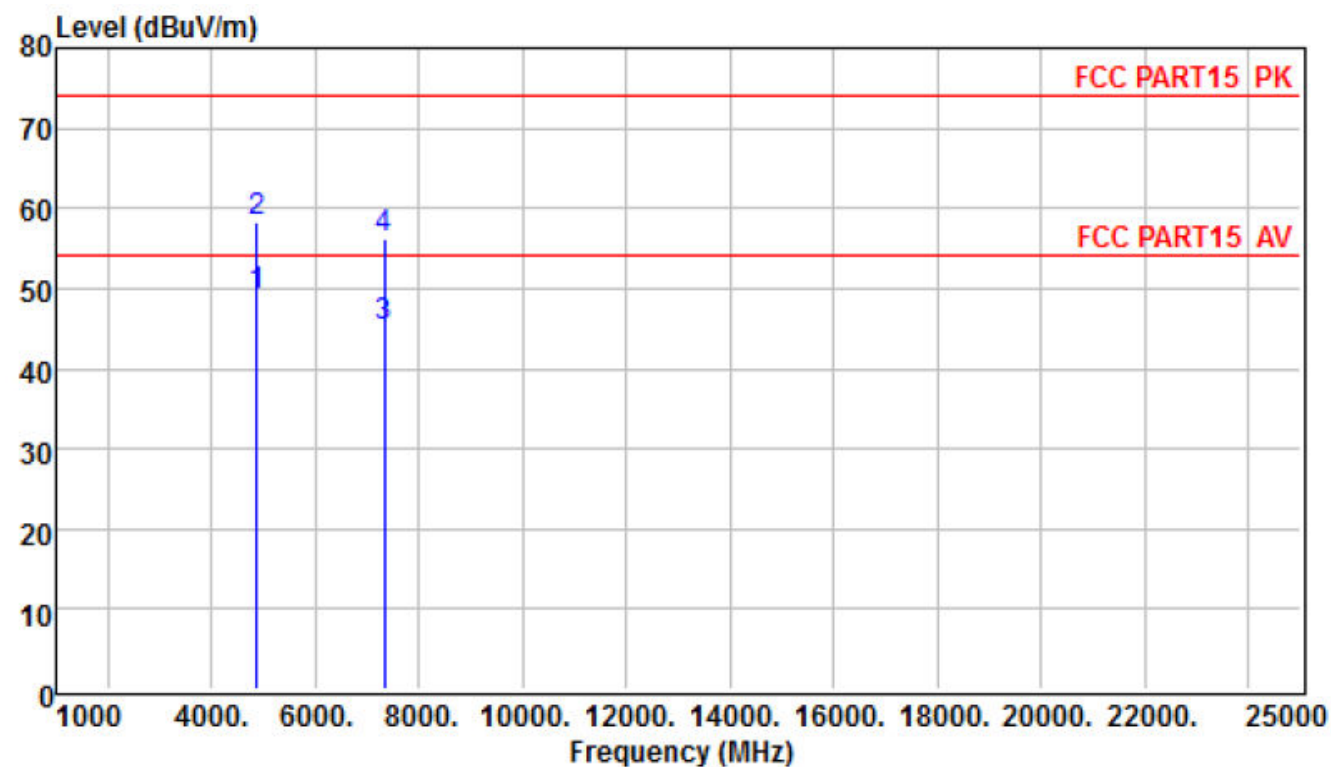


	Freq	Read Level	Preamp Factor	Cable Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	4882.000	32.43	27.53	12.14	32.11	49.15	54.00	-4.85	Average
2	4882.000	41.65	27.53	12.14	32.11	58.37	74.00	-15.63	Peak
3	7323.000	32.11	27.96	16.62	24.33	45.10	54.00	-8.90	Average
4	7323.000	43.31	27.96	16.62	24.33	56.30	74.00	-17.70	Peak

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2480
Test Voltage :	DC 3.7V		

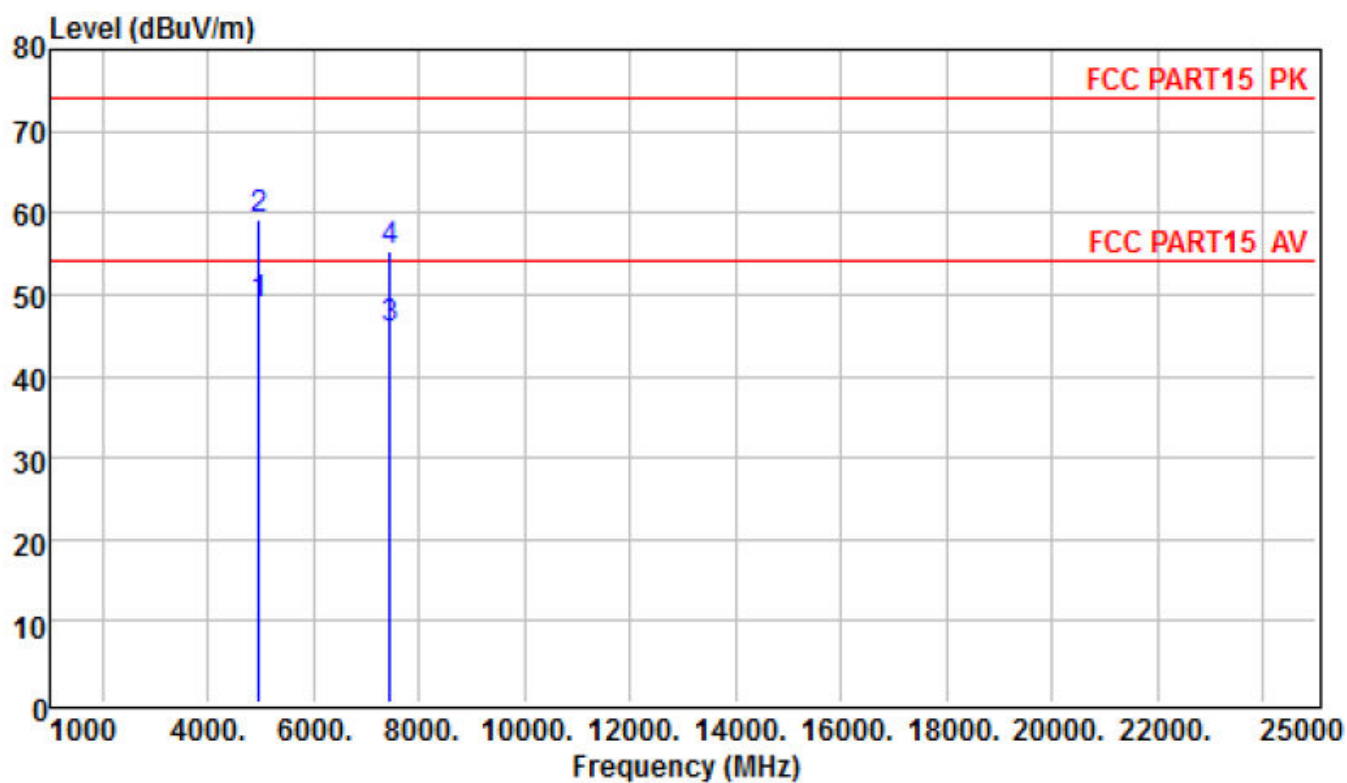Vertical

	Freq	Read Level	Preamp Factor	Cable Loss	Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	4960.000	32.66	27.58	12.36	31.32	48.76	54.00	-5.24	Average
2	4960.000	43.18	27.58	12.36	31.32	59.28	74.00	-14.72	Peak
3	7440.000	32.87	27.99	16.62	24.38	45.88	54.00	-8.12	Average
4	7440.000	42.44	27.99	16.62	24.38	55.45	74.00	-18.55	Peak

Horizontal

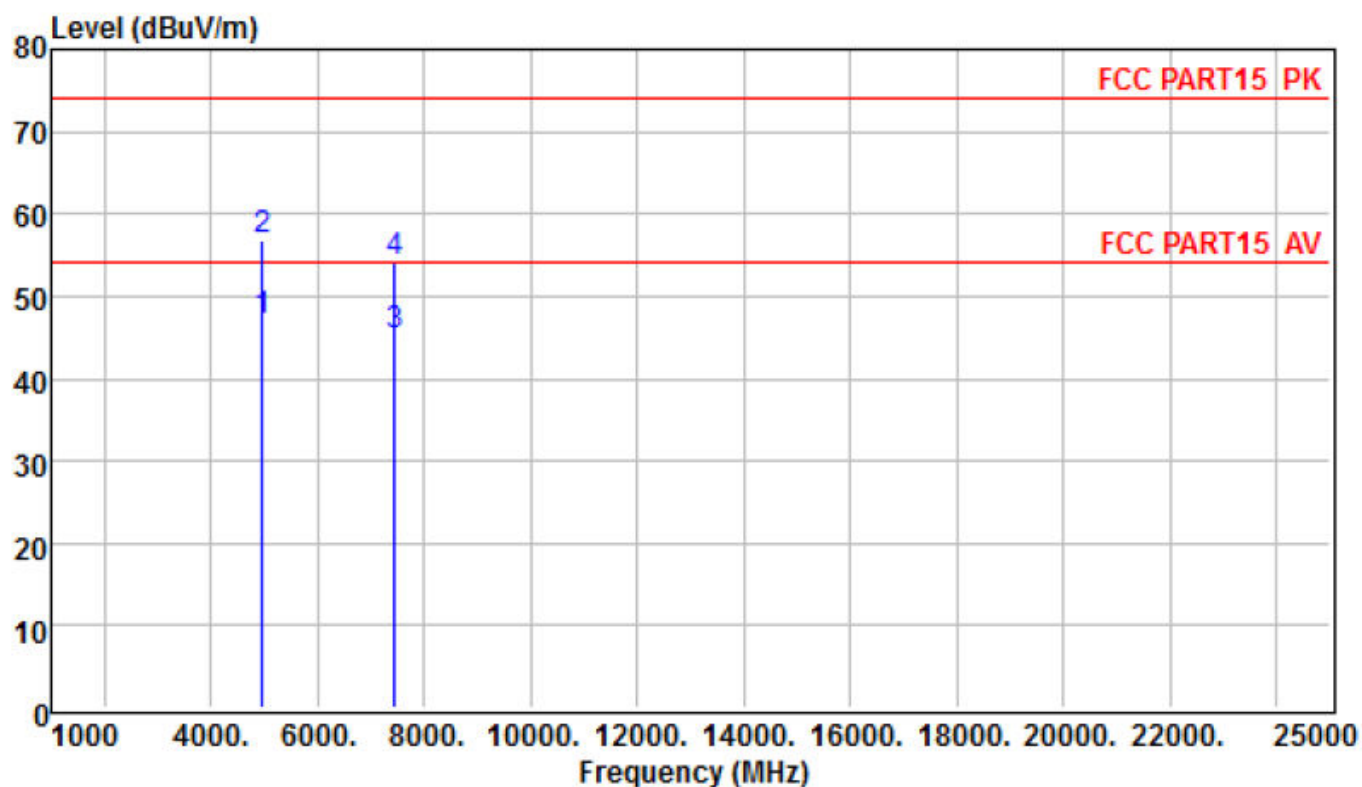

	Freq	Read Level	Preamplifier Factor	Cable Loss	Antenna Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	4960.000	30.99	27.58	12.36	31.32	47.09	54.00	-6.91	Average
2	4960.000	40.68	27.58	12.36	31.32	56.78	74.00	-17.22	Peak
3	7440.000	32.08	27.99	16.62	24.38	45.09	54.00	-8.91	Average
4	7440.000	41.07	27.99	16.62	24.38	54.08	74.00	-19.92	Peak

NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamplifier factor,

Over Limit= Absolute Level – Limit

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

1Mbps is the worst mode.

EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)

For radiated bandedge test as follows:

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 3.7V		

Frequency (MHz)	Meter Reading (dBμV)	antenna Factor (dB)	cable loss (dB)	preamp factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
1Mbps Non-hopping									
2390	37.12	30.44	8.94	26.32	50.18	74	-23.82	peak	Vertical
2390	35.87	30.44	8.94	26.32	48.93	74	-25.07	peak	Horizontal
2483.5	37.56	30.05	9.07	26.34	50.34	74	-23.66	peak	Vertical
2483.5	37.73	30.05	9.07	26.34	50.51	74	-23.49	peak	Horizontal
1Mbps hopping									
2390	36.43	30.44	8.94	26.32	49.49	74	-24.51	peak	Vertical
2390	37.34	30.44	8.94	26.32	50.4	74	-23.6	peak	Horizontal
2483.5	36.86	30.05	9.07	26.34	49.64	74	-24.36	peak	Vertical
2483.5	37.34	30.05	9.07	26.34	50.12	74	-23.88	peak	Horizontal
2Mbps Non-hopping									
2390	34.65	30.44	8.94	26.32	47.71	74	-26.29	peak	Vertical
2390	36.32	30.44	8.94	26.32	49.38	74	-24.62	peak	Horizontal
2483.5	36.65	30.05	9.07	26.34	49.43	74	-24.57	peak	Vertical
2483.5	37.84	30.05	9.07	26.34	50.62	74	-23.38	peak	Horizontal
2Mbps hopping									
2390	35.55	30.44	8.94	26.32	48.61	74	-25.39	peak	Vertical
2390	36.34	30.44	8.94	26.32	49.4	74	-24.6	peak	Horizontal
2483.5	36.42	30.05	9.07	26.34	49.2	74	-24.8	peak	Vertical
2483.5	37.42	30.05	9.07	26.34	50.2	74	-23.8	peak	Horizontal
3Mbps Non-hopping									
2390	37.72	30.44	8.94	26.32	50.78	74	-23.22	peak	Vertical
2390	36.12	30.44	8.94	26.32	49.18	74	-24.82	peak	Horizontal
2483.5	38.45	30.05	9.07	26.34	51.23	74	-22.77	peak	Vertical
2483.5	35.32	30.05	9.07	26.34	48.1	74	-25.9	peak	Horizontal
3Mbps hopping									
2390	33.54	30.44	8.94	26.32	46.6	74	-27.4	peak	Vertical
2390	35.12	30.44	8.94	26.32	48.18	74	-25.82	peak	Horizontal
2483.5	36.56	30.05	9.07	26.34	49.34	74	-24.66	peak	Vertical
2483.5	37.12	30.05	9.07	26.34	49.9	74	-24.1	peak	Horizontal

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Spurious Emission in Restricted Band:

All the modulation modes have been tested and all other emissions more than 20dB below the limit, the worst result was report as below:

Polar (H/V)	Frequency	Meter Reading	antenna Factor	cable loss	preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1Mbps Non-hopping									
Vertical	3262.000	34.43	30.26	10.68	26.63	48.74	74	-25.26	Pk
Horizontal	3262.000	35.25	30.26	10.68	26.63	49.56	74	-24.44	PK
Vertical	3336.000	35.63	30.33	10.75	26.66	50.05	74	-23.95	Pk
Horizontal	3336.000	34.25	30.33	10.75	26.66	48.67	74	-25.33	PK
1Mbps hopping									
Vertical	3351.000	35.65	30.34	10.78	26.67	50.1	74	-23.9	Pk
Horizontal	3351.000	34.43	30.34	10.78	26.67	48.88	74	-25.12	PK
Vertical	4130.000	36.22	30.69	10.95	27.08	50.78	74	-23.22	Pk
Horizontal	4130.000	35.87	30.69	10.95	27.08	50.43	74	-23.57	PK

6. 20DB BANDWIDTH

6.1. Limits

According to FCC Section 15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth($10 \cdot \log 1\% = 20\text{dB}$)taking the RF output power

6.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting.

2. Set the spectrum analyzer:

Span: approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20dB bandwidth

VBW $\geq$ RBW

Sweep=auto

Detector function=peak


Trace=max hold

Test data:


EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /C78(1Mbps)		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	882.795	PASS
2441 MHz	868.769	PASS
2480 MHz	885.517	PASS


Test plot as follows:

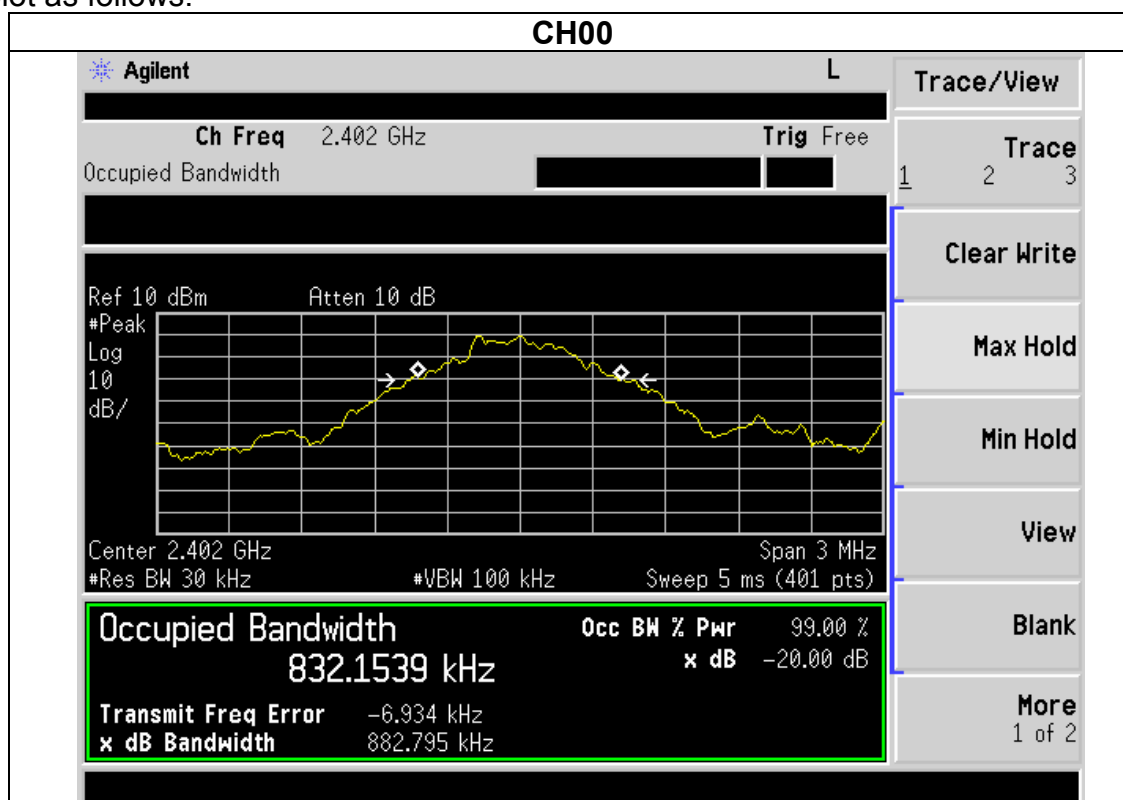

CH39 -1Mbps

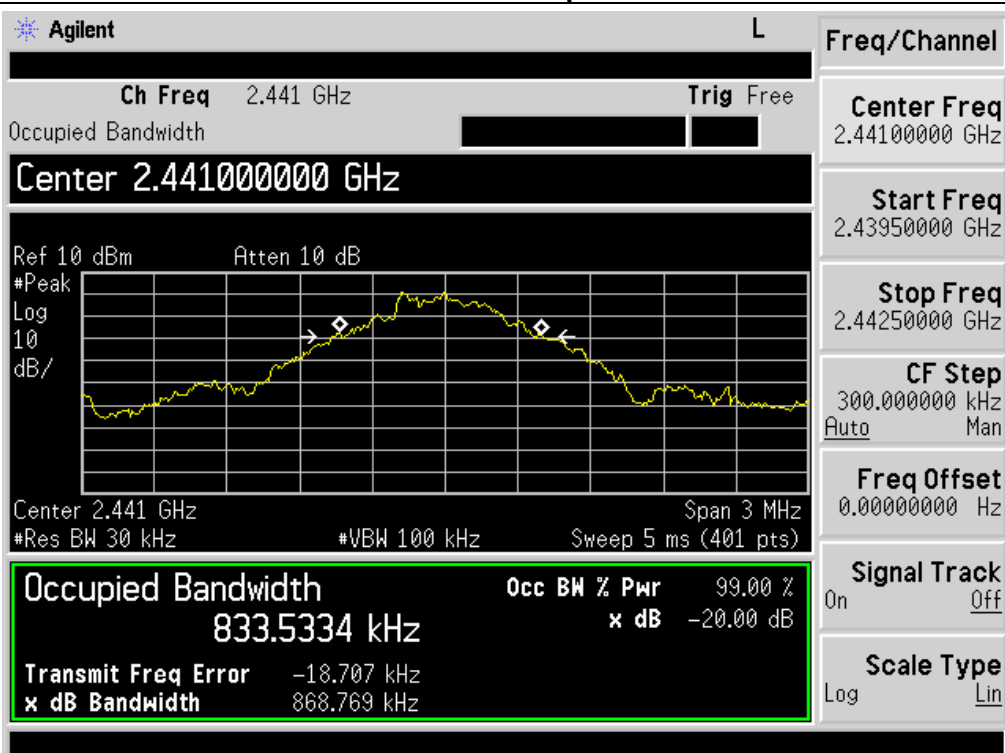


CH78 -1Mbps

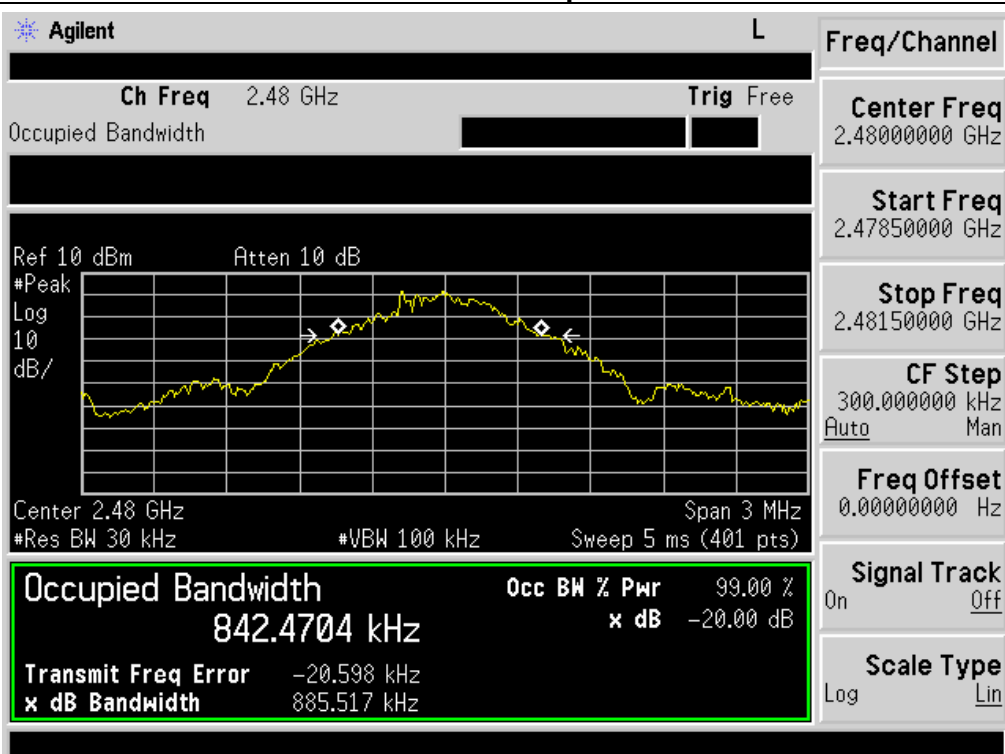


EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /C78(2Mbps)		


Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.213	PASS
2441 MHz	1.223	PASS
2480 MHz	1.208	PASS

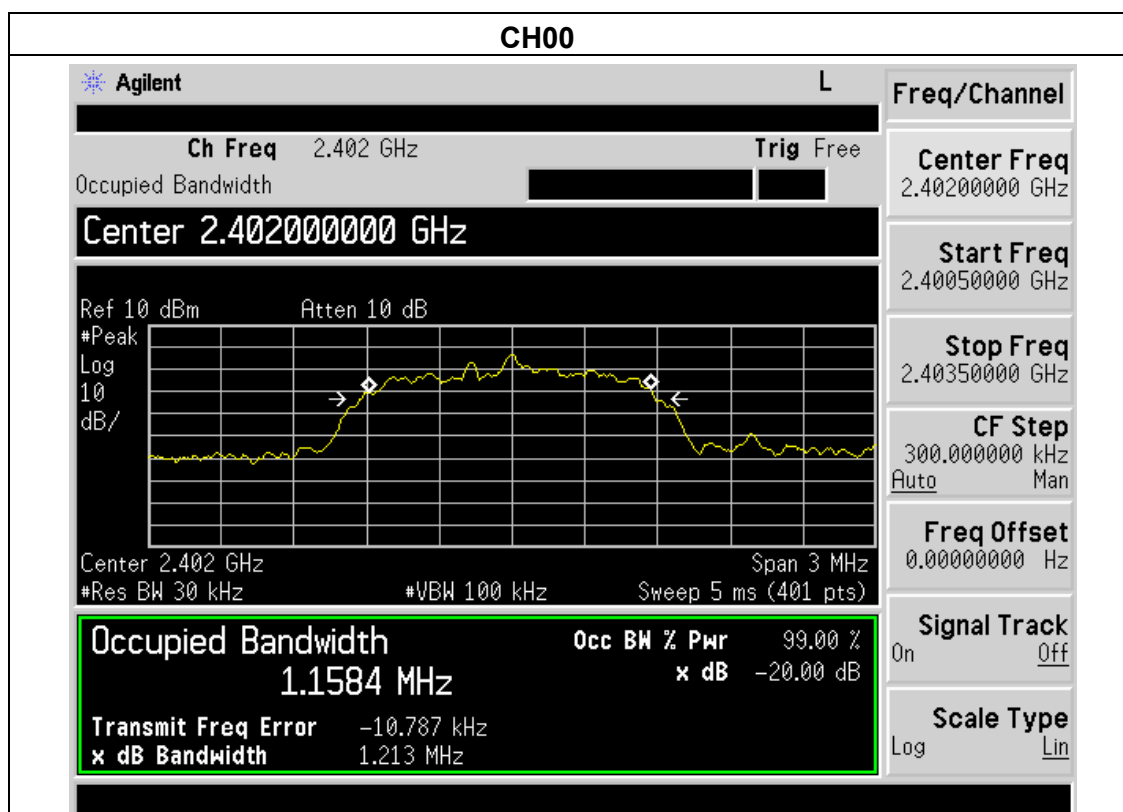

CH39

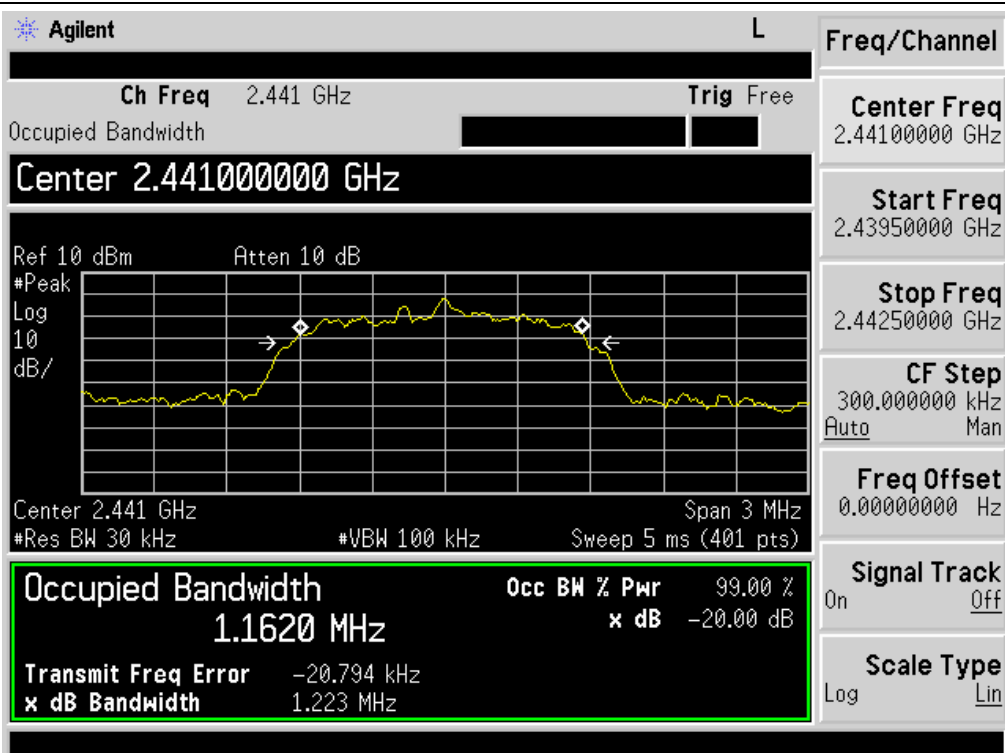


CH78

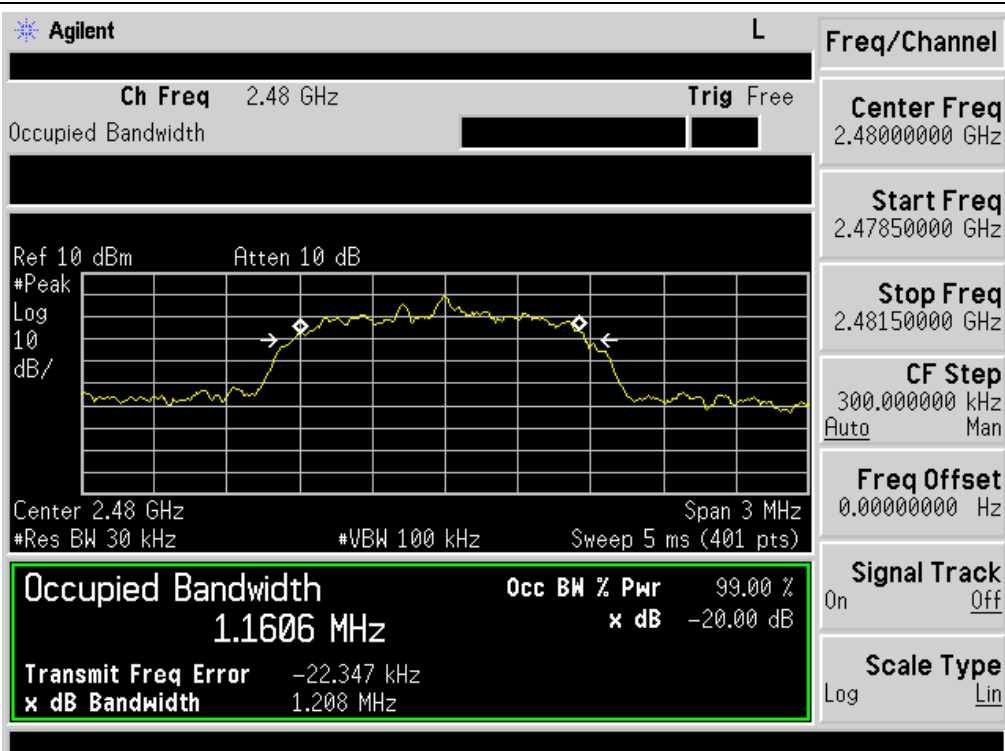


EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(3Mbps)		


Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.215	PASS
2441 MHz	1.226	PASS
2480 MHz	1.215	PASS

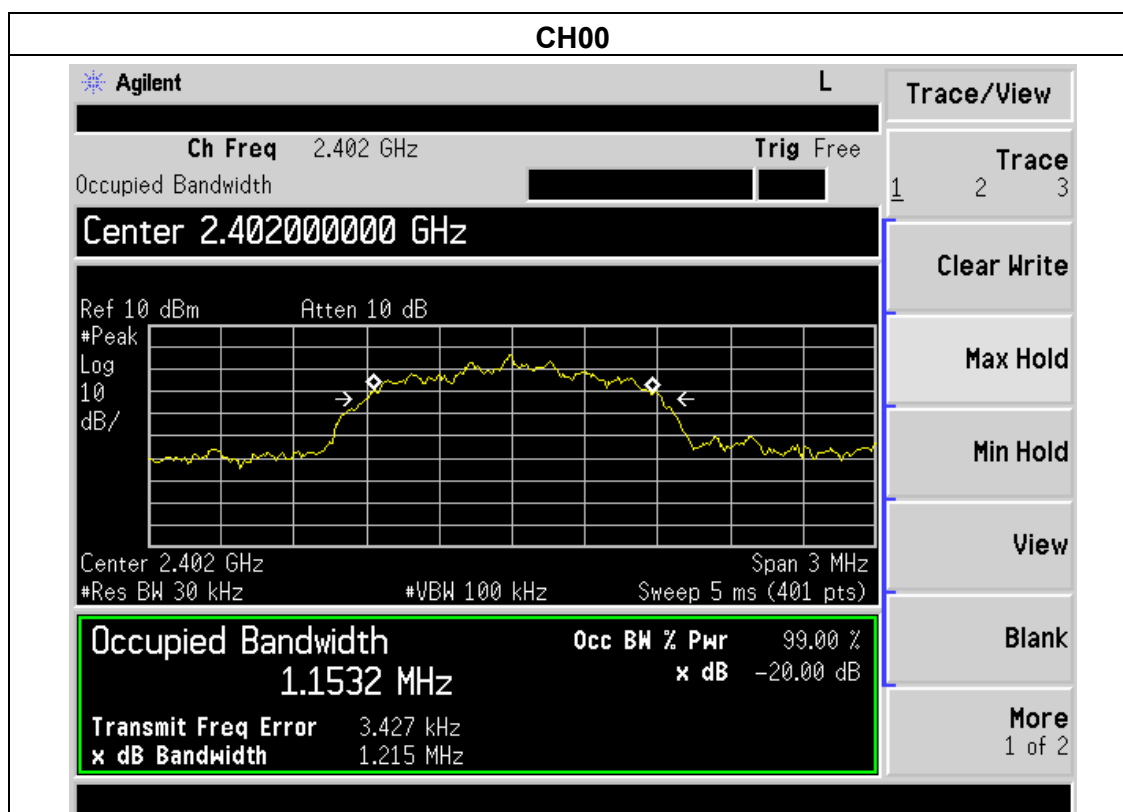

CH39

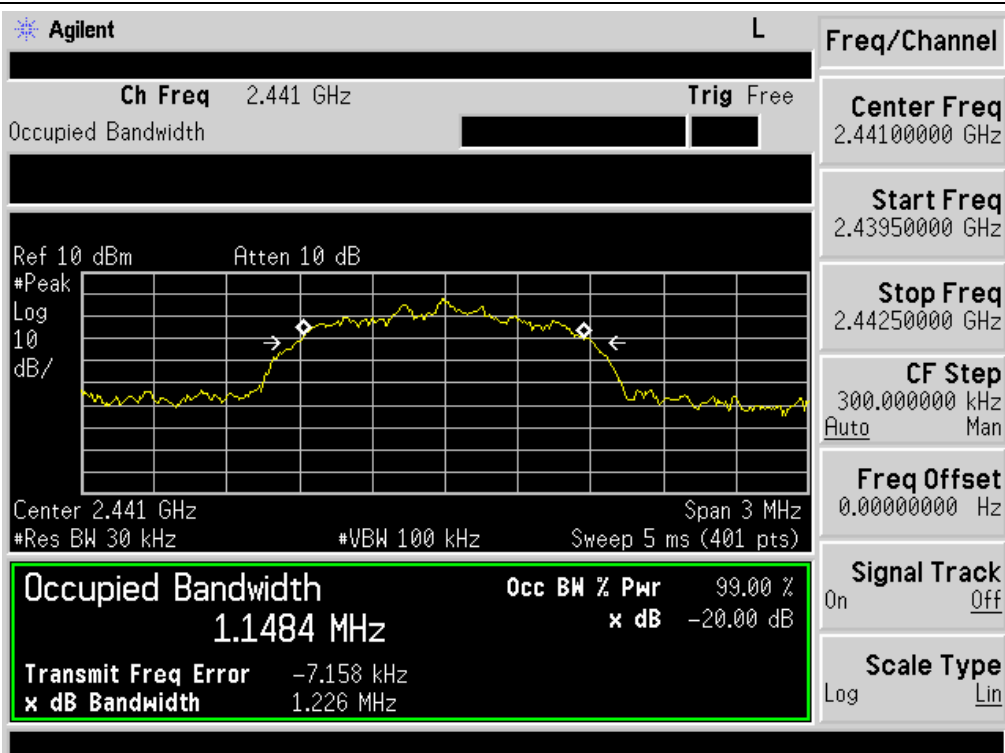

CH78

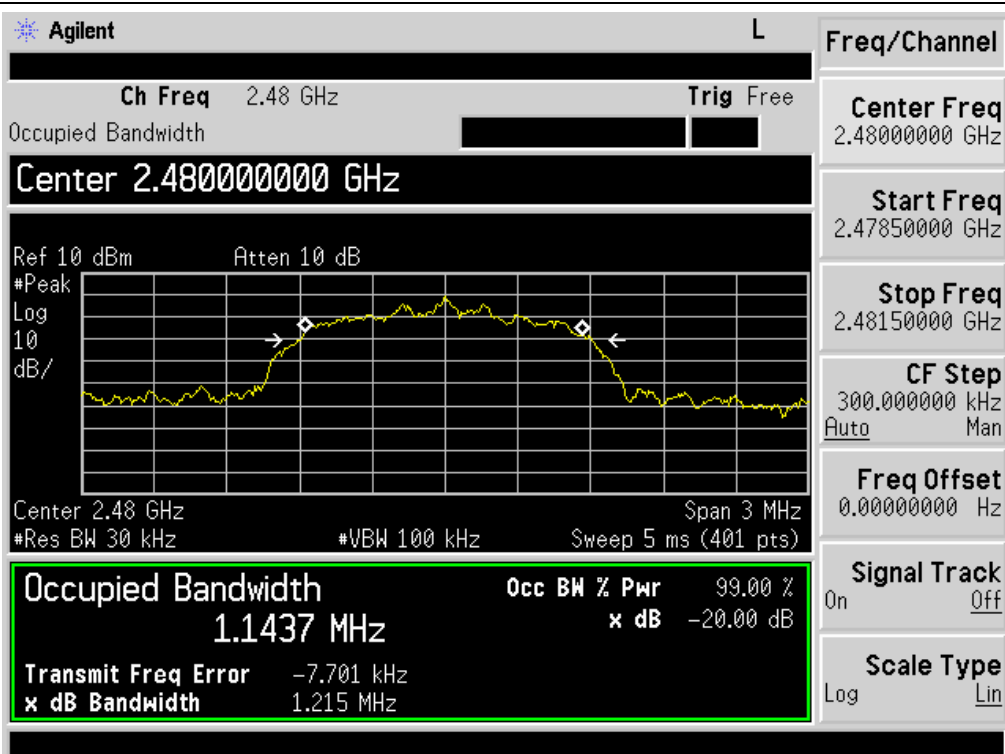

7. FREQUENCY SEPARATION

7.1. Limits

According to FCC Section 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: wide enough to capture the peaks of two adjacent channels

RBW $\geq 1\%$ of the span(30KHz)

VBW $\geq$ RBW(100KHz)

Sweep=auto

Detector function=peak

Trace=max hold


Test data:

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(1Mbps)		


Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.000	Complies
2441 MHz	1.000	Complies
2480 MHz	1.005	Complies

Ch. Separation Limits: > 20dB bandwidth


Test plot as follows:

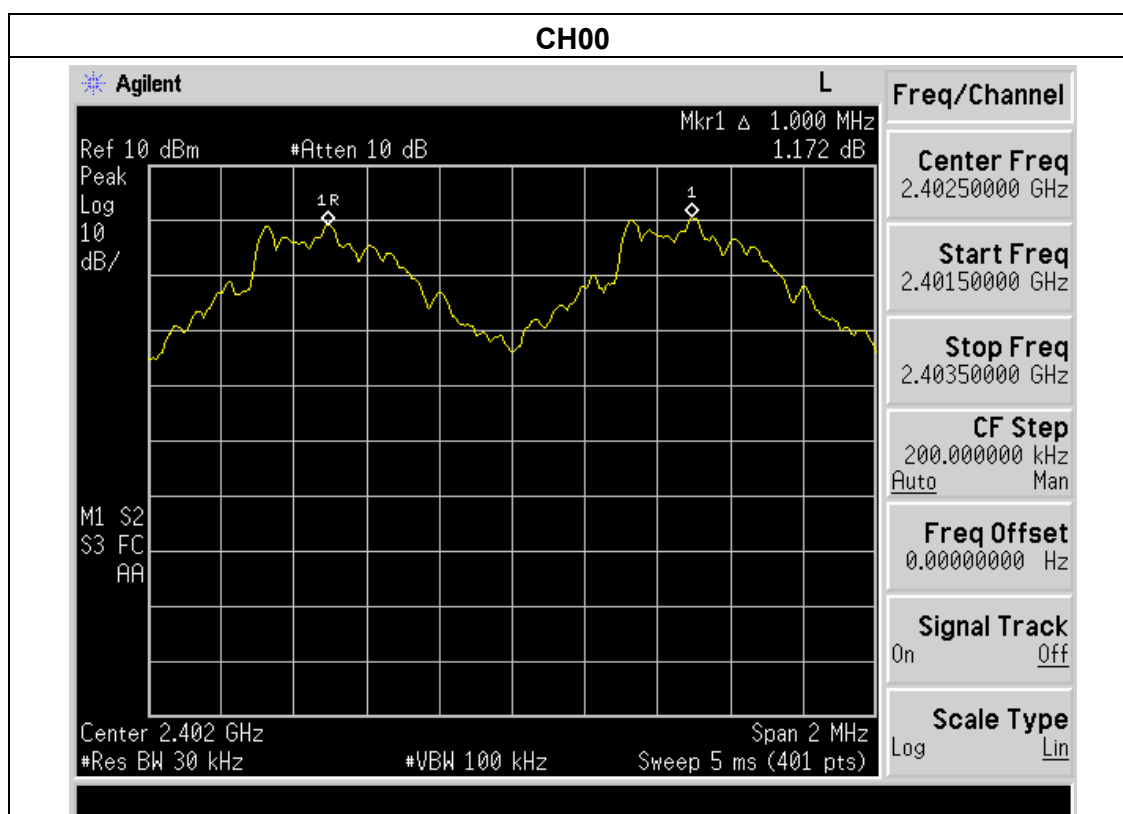

CH39

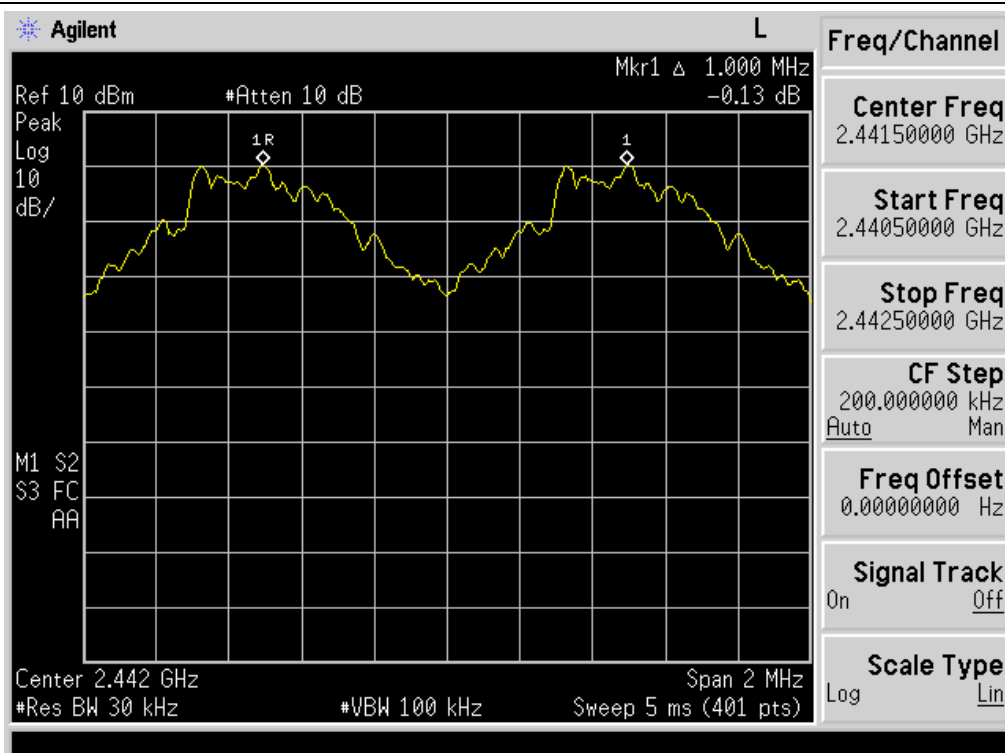


CH78

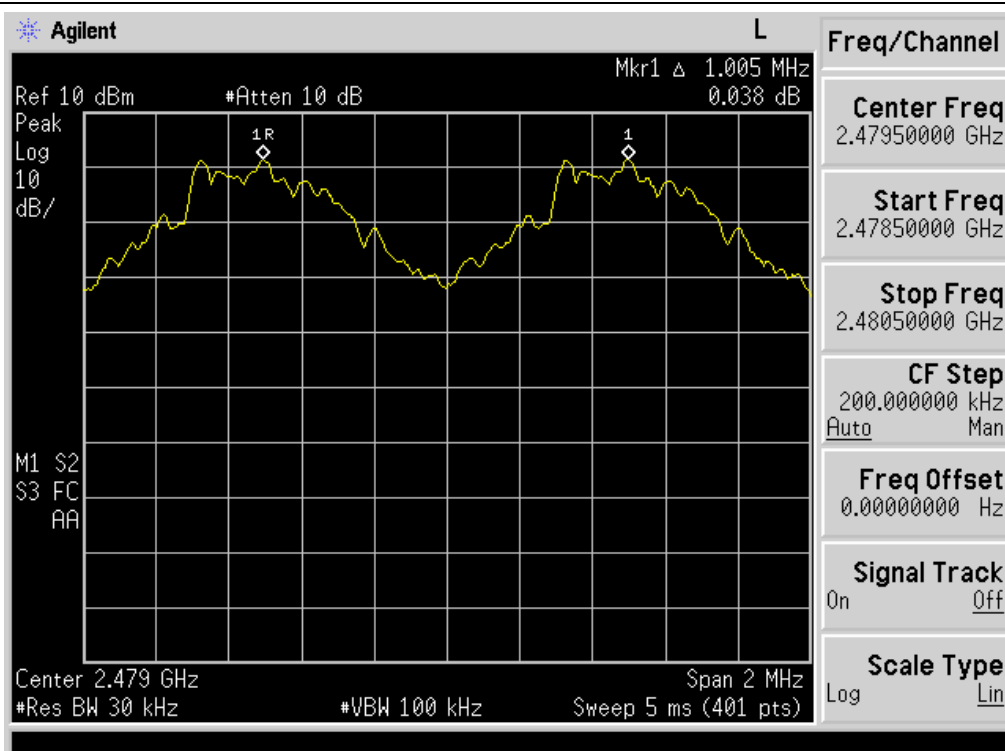


EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(2Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.000	Complies
2441 MHz	1.000	Complies
2480 MHz	1.000	Complies


Ch. Separation Limits: >2/3 of 20dB bandwidth

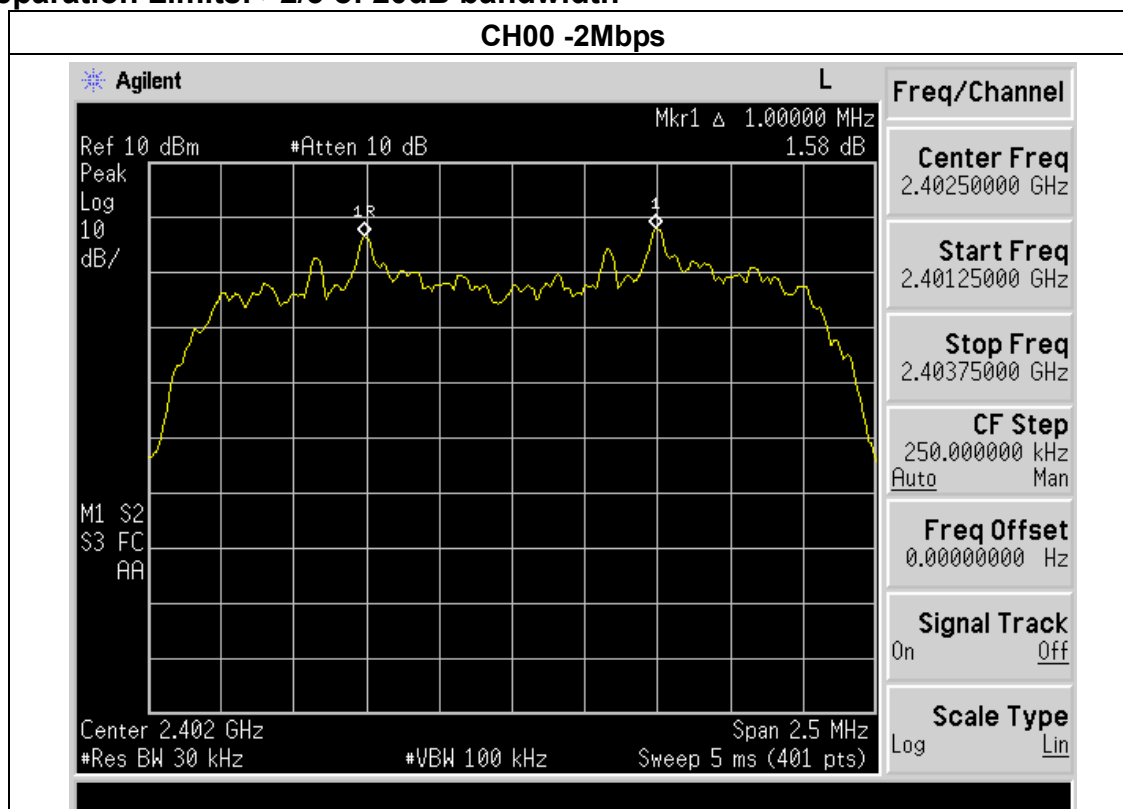

CH39 -2Mbps

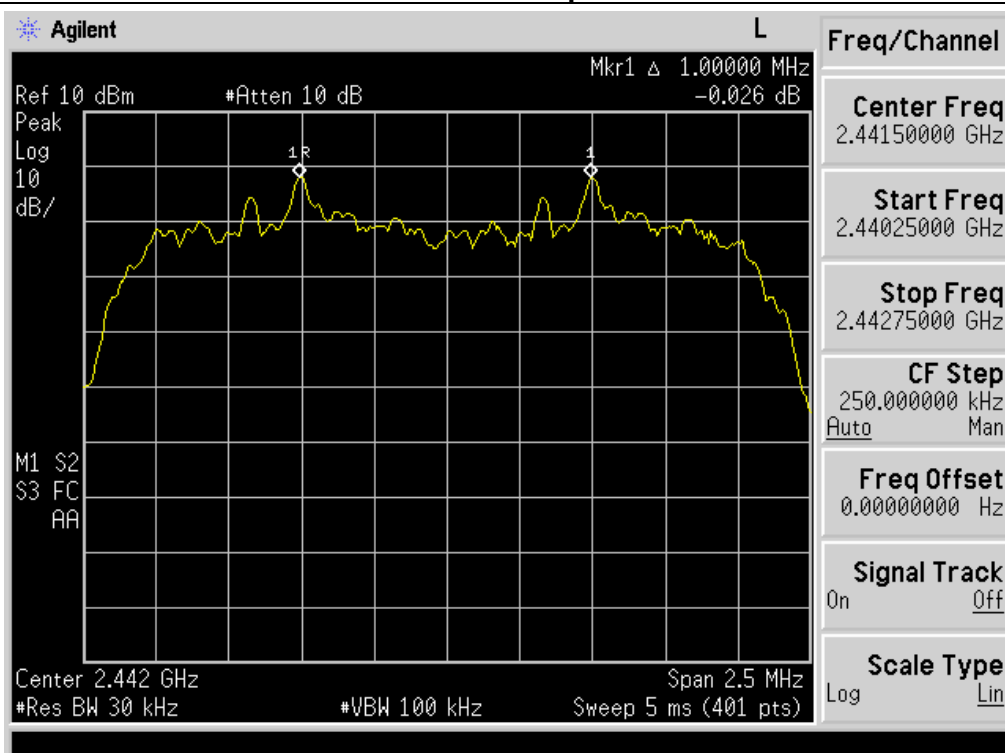


CH78 -2Mbps

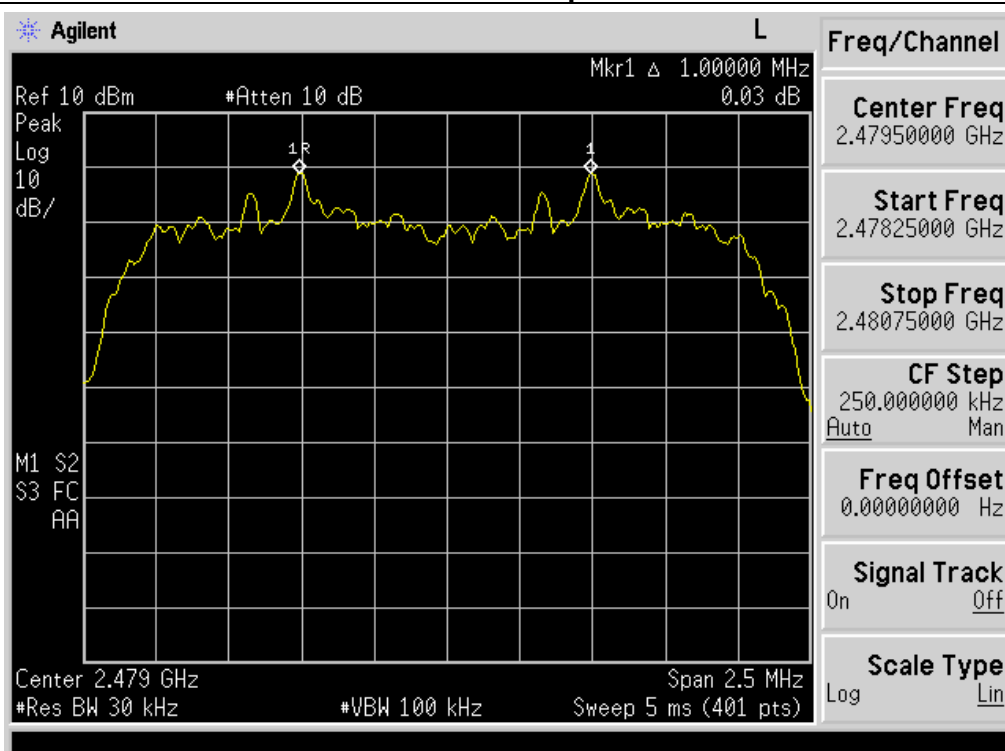


EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(3Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.000	Complies
2441 MHz	1.000	Complies
2480 MHz	1.000	Complies


Ch. Separation Limits: >2/3 of 20dB bandwidth

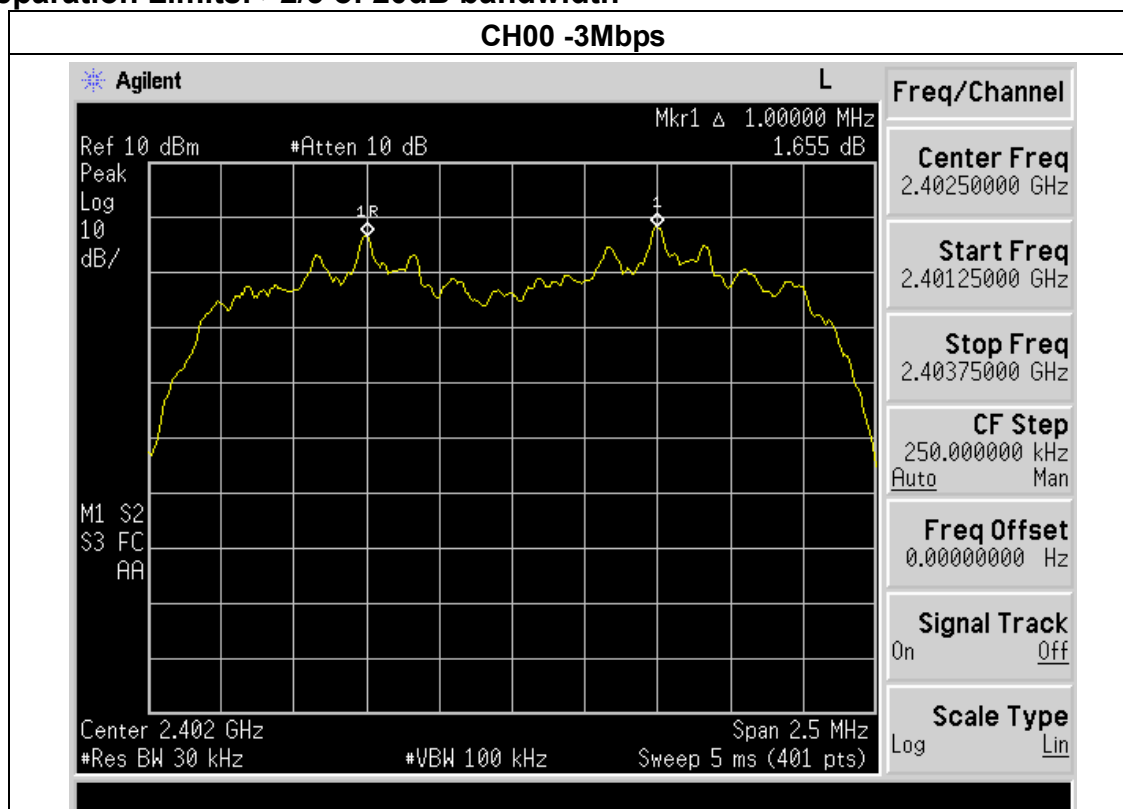

CH39 -3Mbps

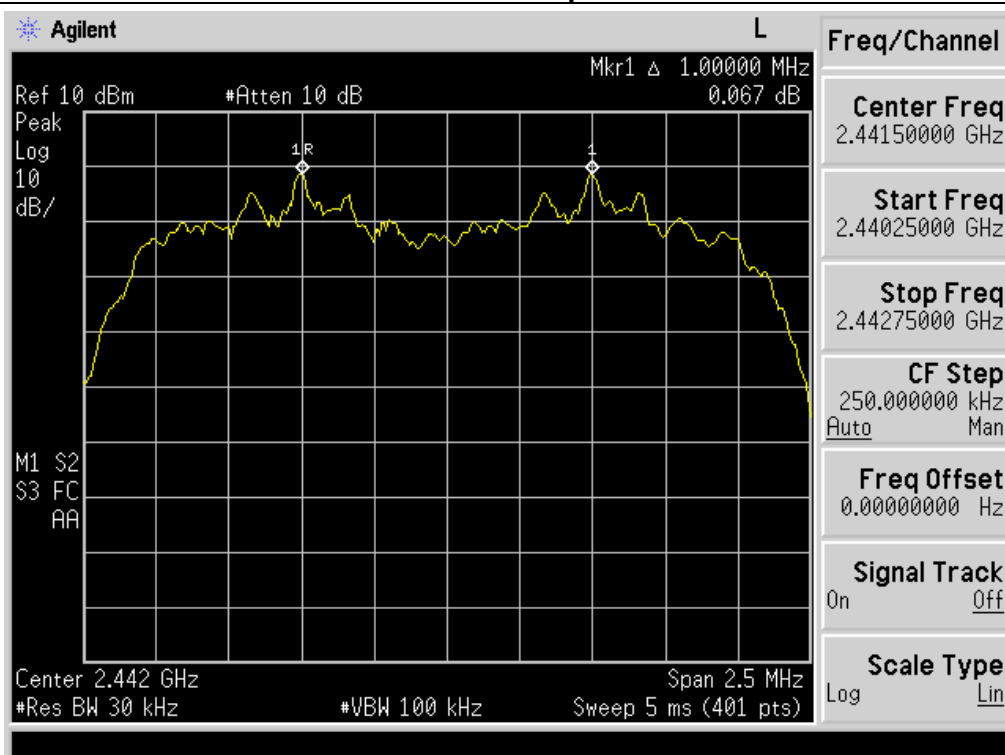

CH78 -3Mbps

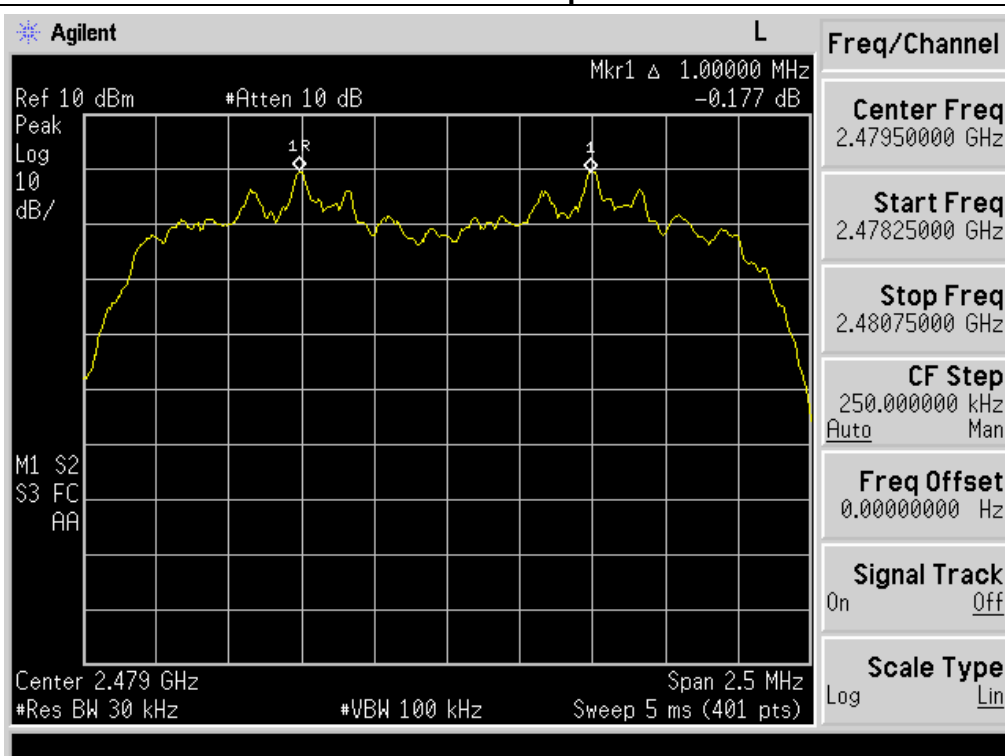

8. NUMBER OF HOPPING FREQUENCY

8.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

8.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: the frequency band of operation

RBW =100KHz

VBW=300KHz

Sweep=auto

Detector function=peak


Trace=max hold

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	1M		

Test data:

Measured channel numbers	Limit	Result
79	≥ 15	PASS

Test plot as follows:

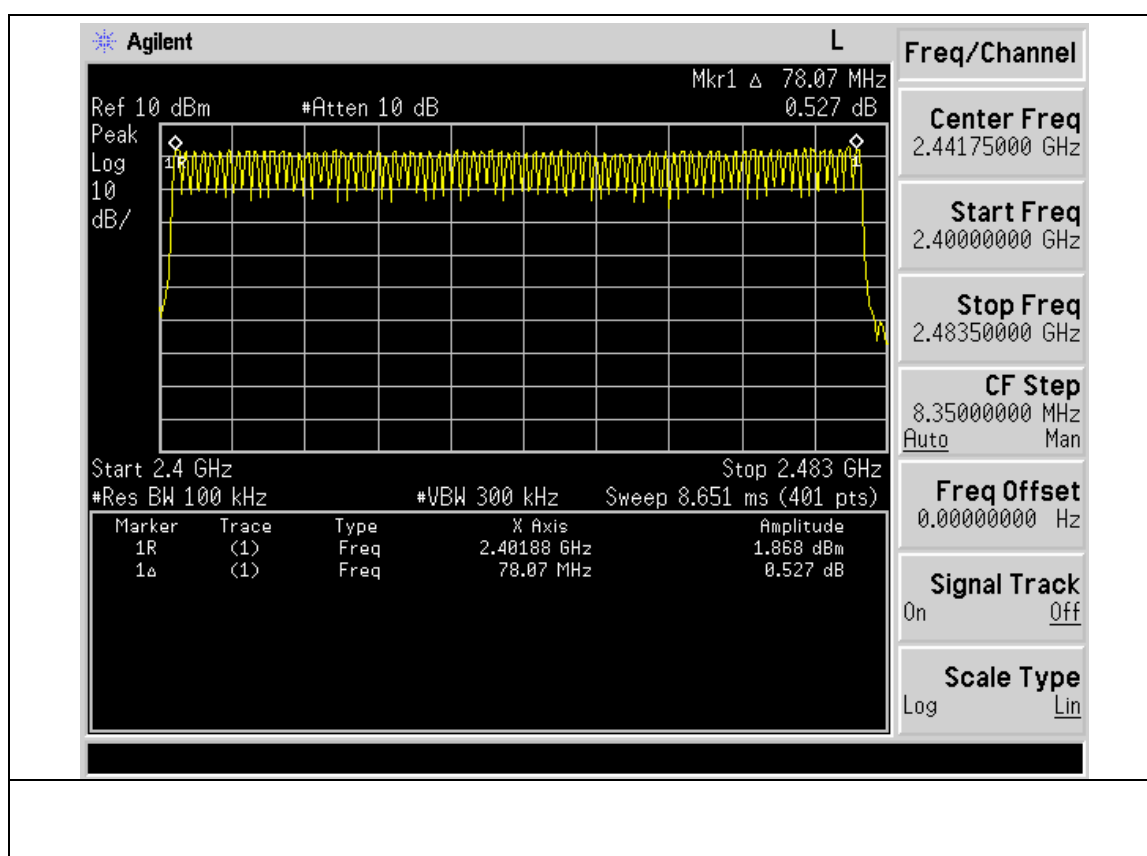

9. DWELL TIME

9.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

9.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode power.

2. Set the spectrum analyzer:

Span= 0Hz, RBW =1000 kHz, VBW = 3000 kHz

Use a video trigger with the trigger level set to enable triggering only on full pulses.

Detector function=peak, Sweep Time is more than once pulse time.

Set the EUT for DH5, DH3 and DH1 packet transmitting

Measure the maximum time duration of one single pulse.

A Period Time = (channel number)*0.4

DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)


DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)


DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

Test data:


Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH1	2441 MHz	0.45	0.14	0.4
2DH1	2441 MHz	0.47	0.15	0.4
3DH1	2441 MHz	0.46	0.15	0.4

Test plot as follows as below:

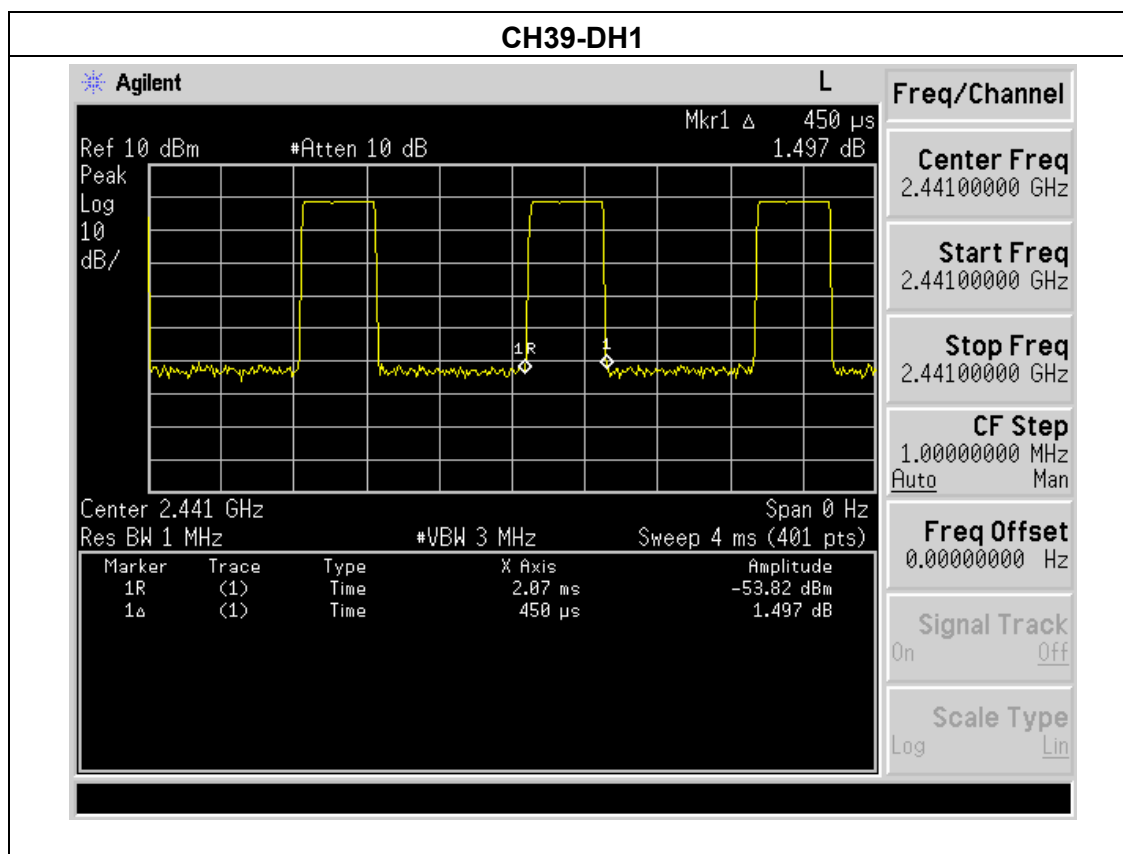


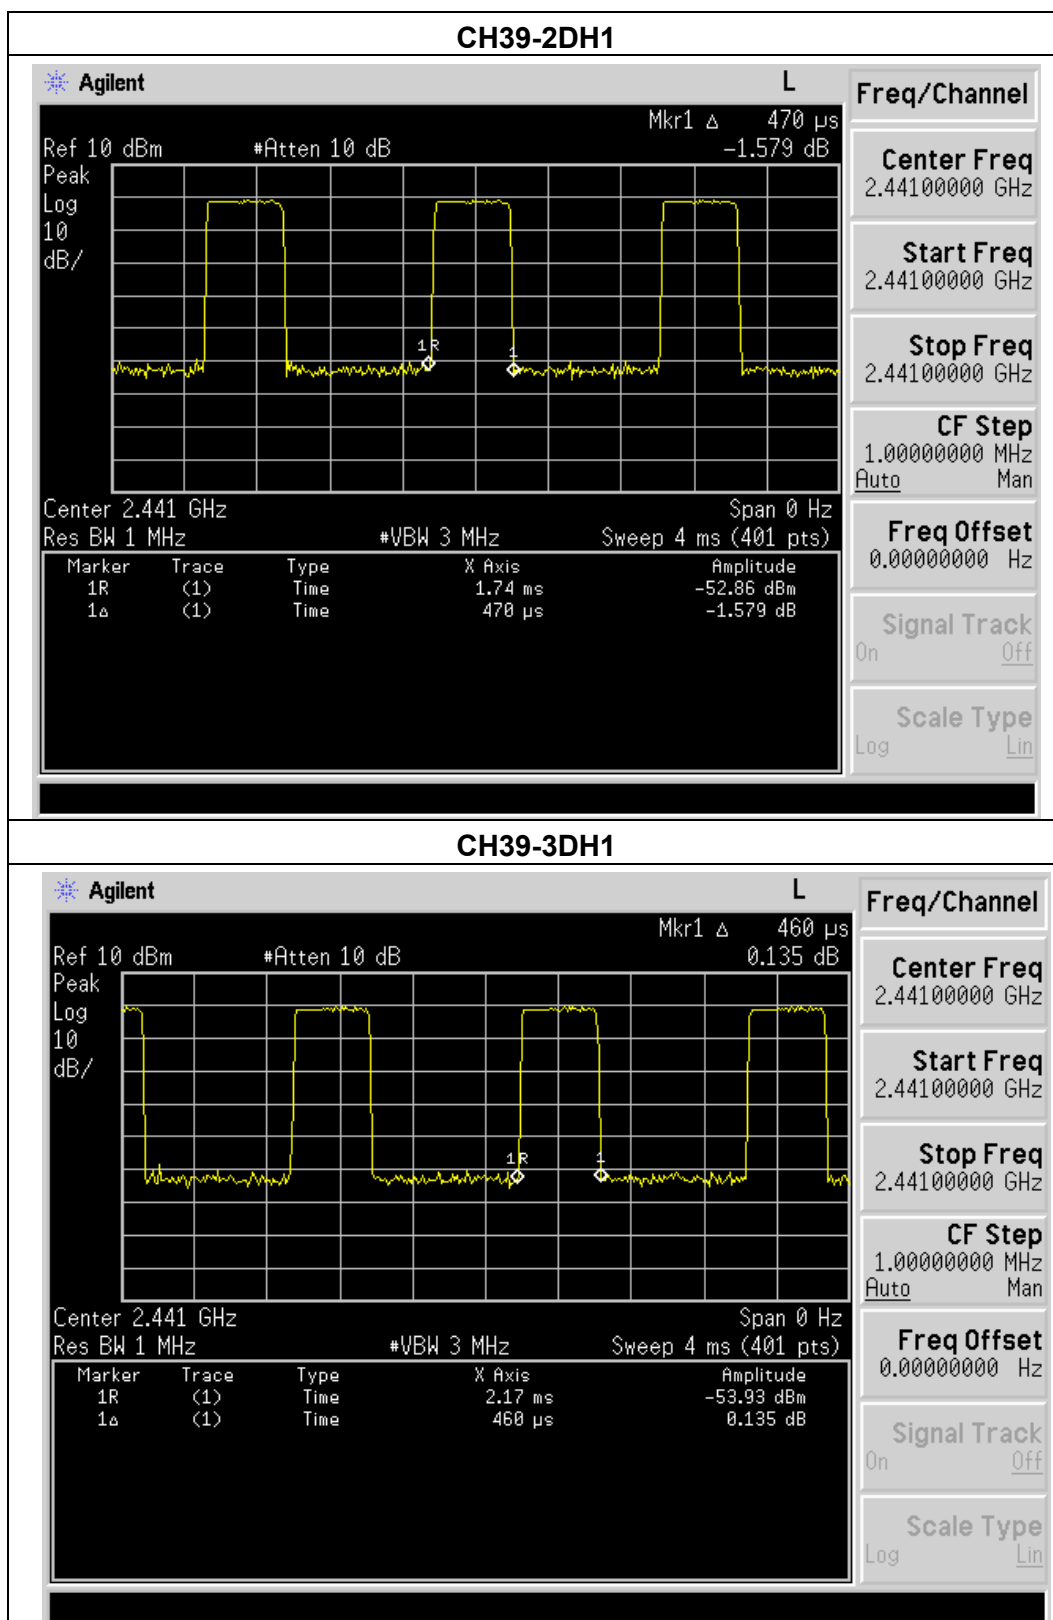


Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH3	2441 MHz	1.70	0.27	0.4
2DH3	2441 MHz	1.72	0.28	0.4
3DH3	2441 MHz	1.71	0.27	0.4

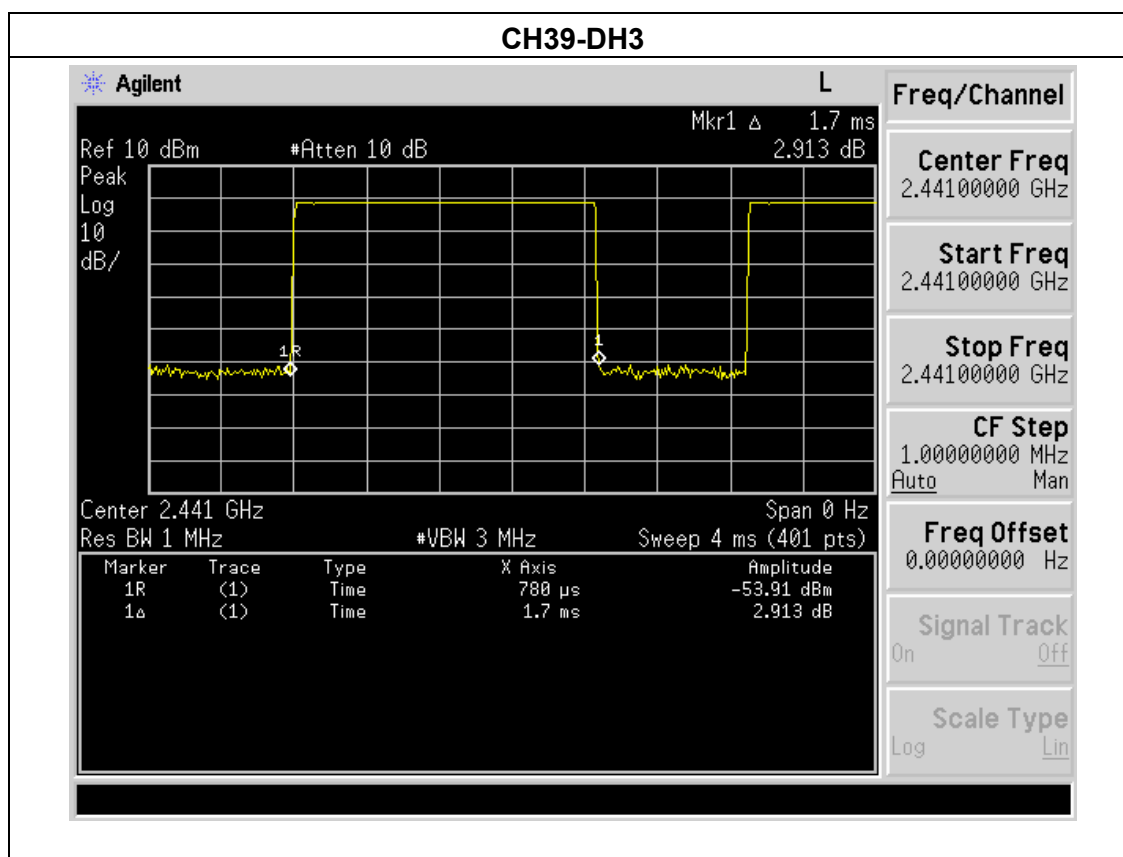


CH39-2DH3

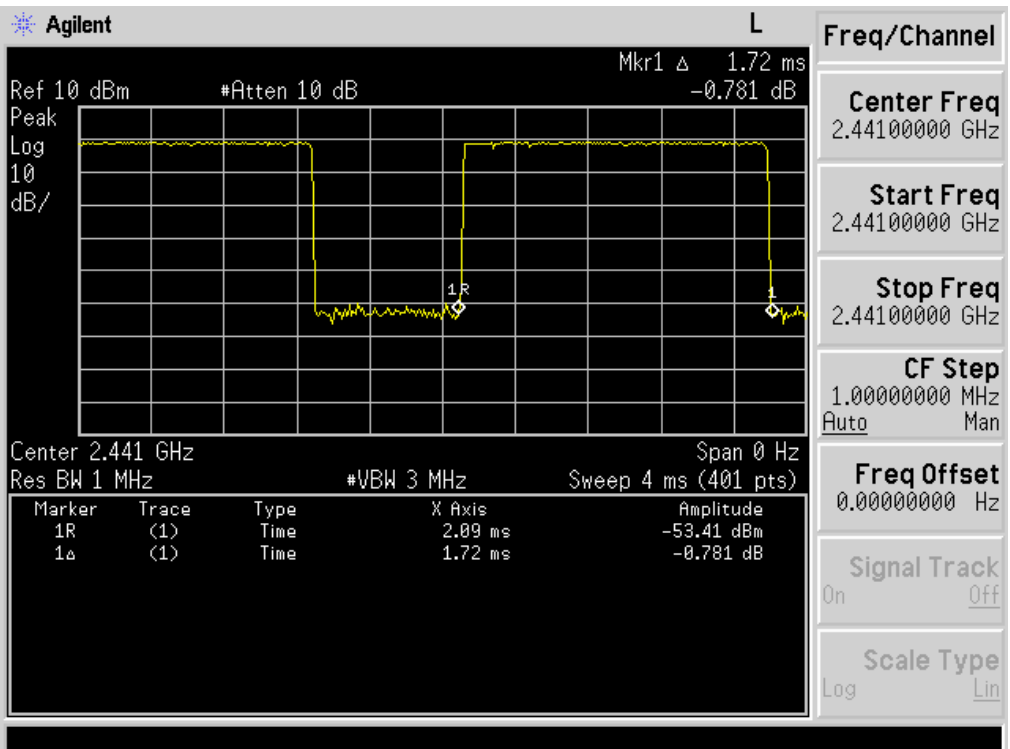


CH39-3DH3

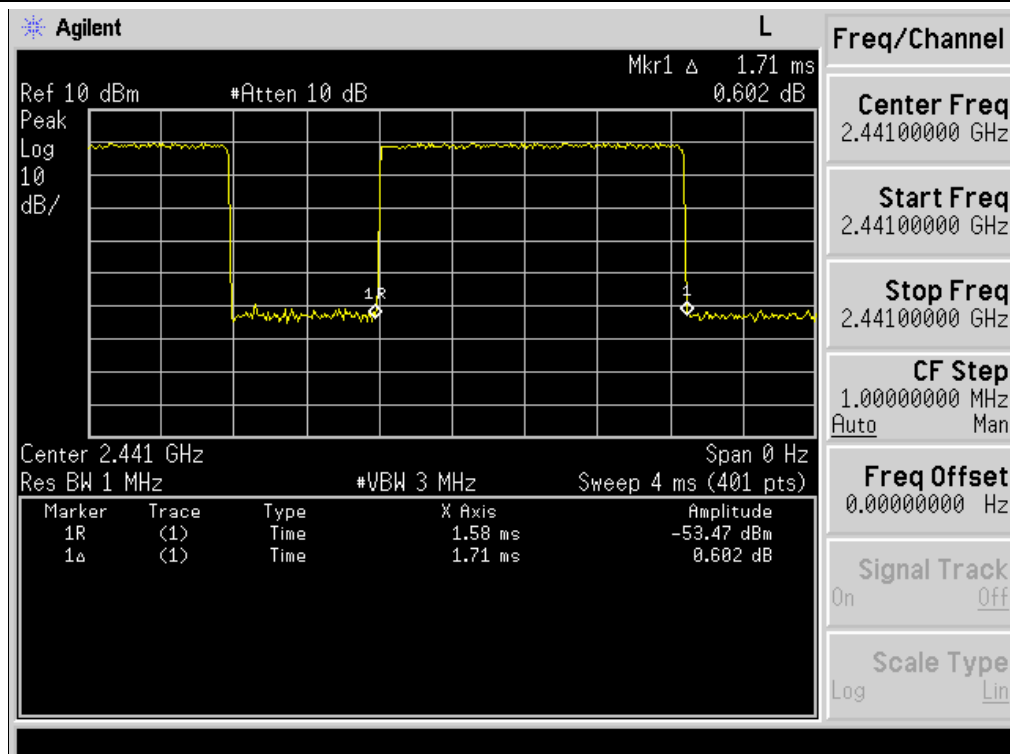


Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH5	2441 MHz	2.95	0.31	0.4
2DH5	2441 MHz	2.97	0.32	0.4
3DH5	2441 MHz	2.95	0.31	0.4

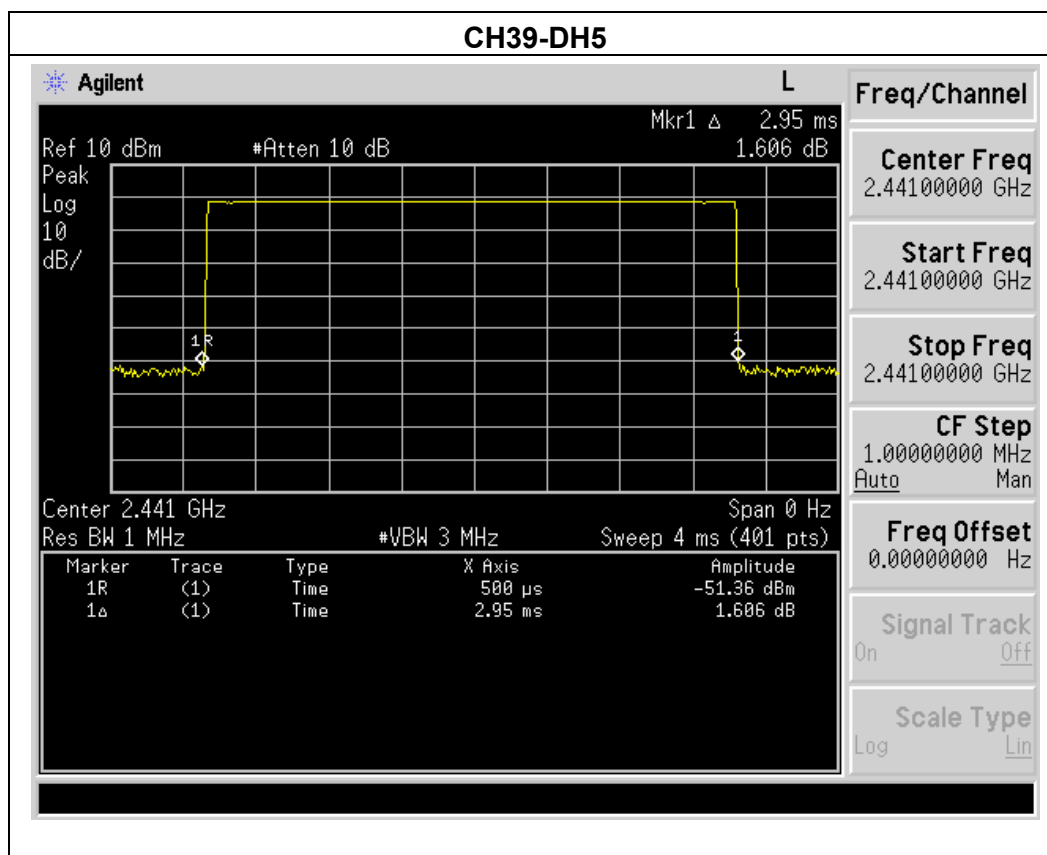

CH39-2DH5

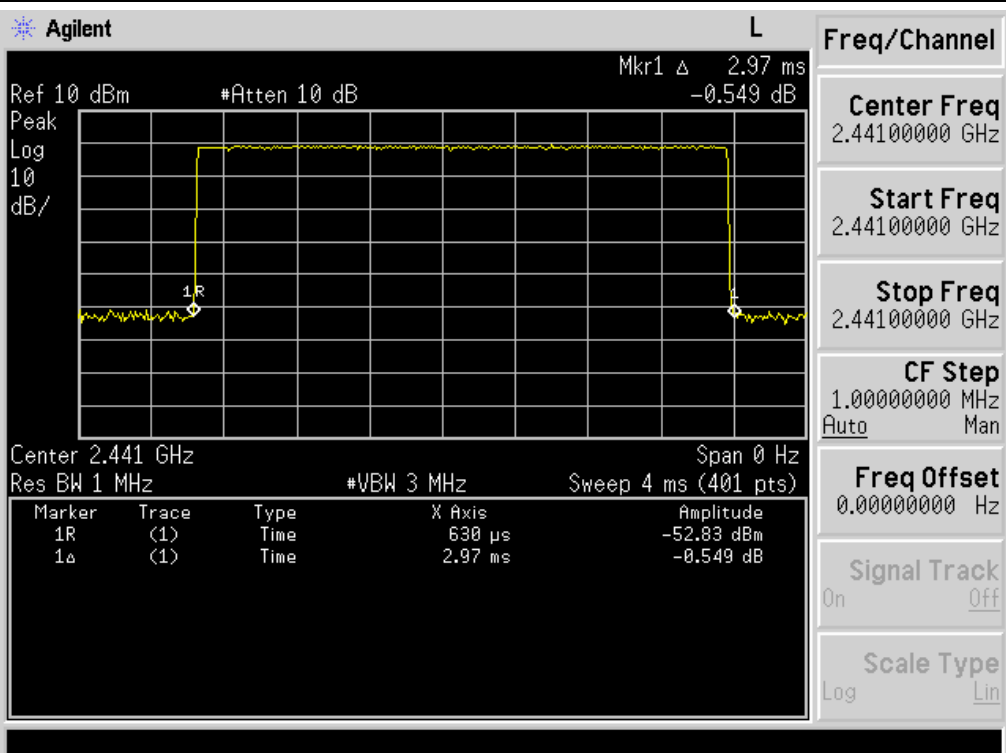

CH39-3DH5

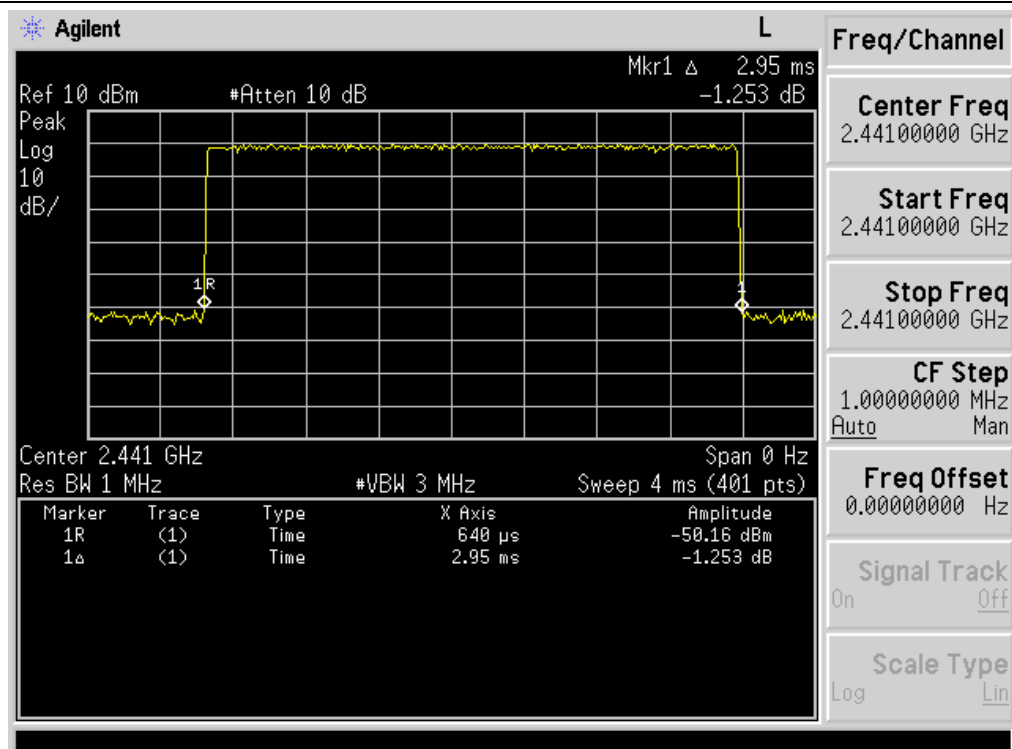


10. BAND EDGE COMPLIANCE TEST

10.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see §15.205(c)).

10.2. Test setup

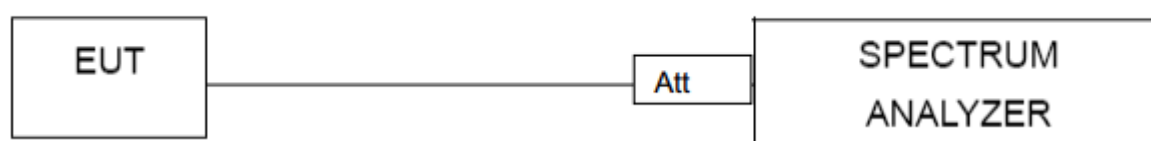



10.3.TEST Procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete



For conducted test:



Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
GFSK Non-hopping			
Left Band	51.05	20	Pass
Right Band	56.98	20	Pass
$\pi/4$ -DQPSK Non-hopping			
Left Band	48.32	20	Pass
Right Band	55.53	20	Pass
8DPSK Non-hopping			
Left Band	49.09	20	Pass
Right Band	58.64	20	Pass
GFSK hopping			
Left Band	52.30	20	Pass
Right Band	60.07	20	Pass
$\pi/4$ -DQPSK hopping			
Left Band	52.73	20	Pass
Right Band	55.96	20	Pass
8DPSK hopping			
Left Band	60.72	20	Pass
Right Band	57.42	20	Pass



BDR mode (GFSK): Band Edge-Left Side

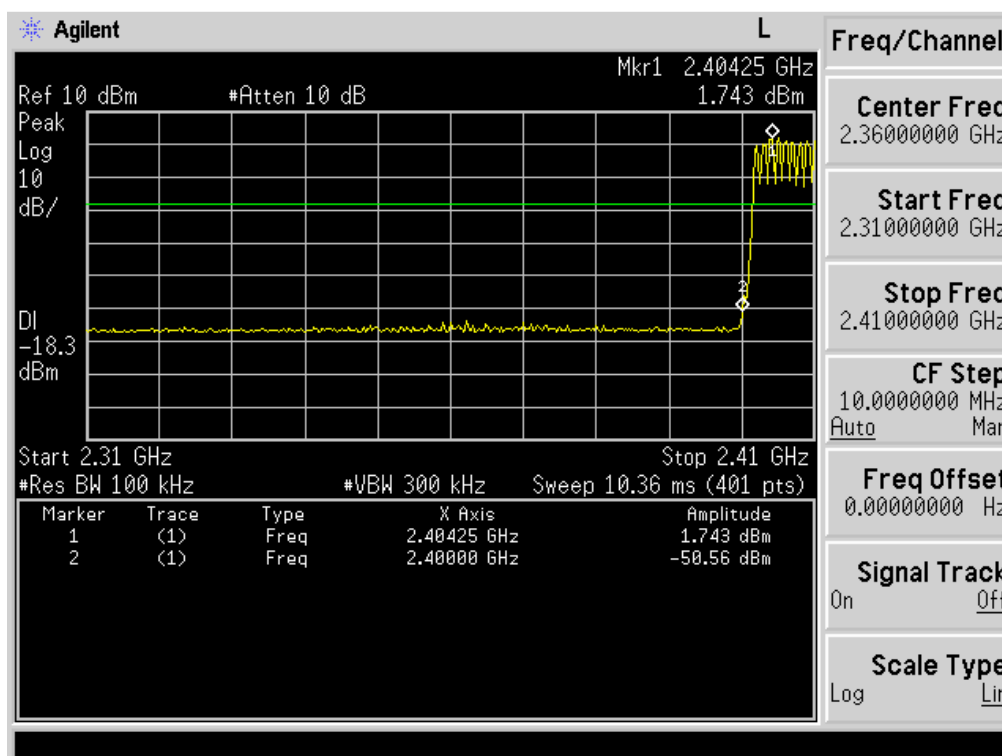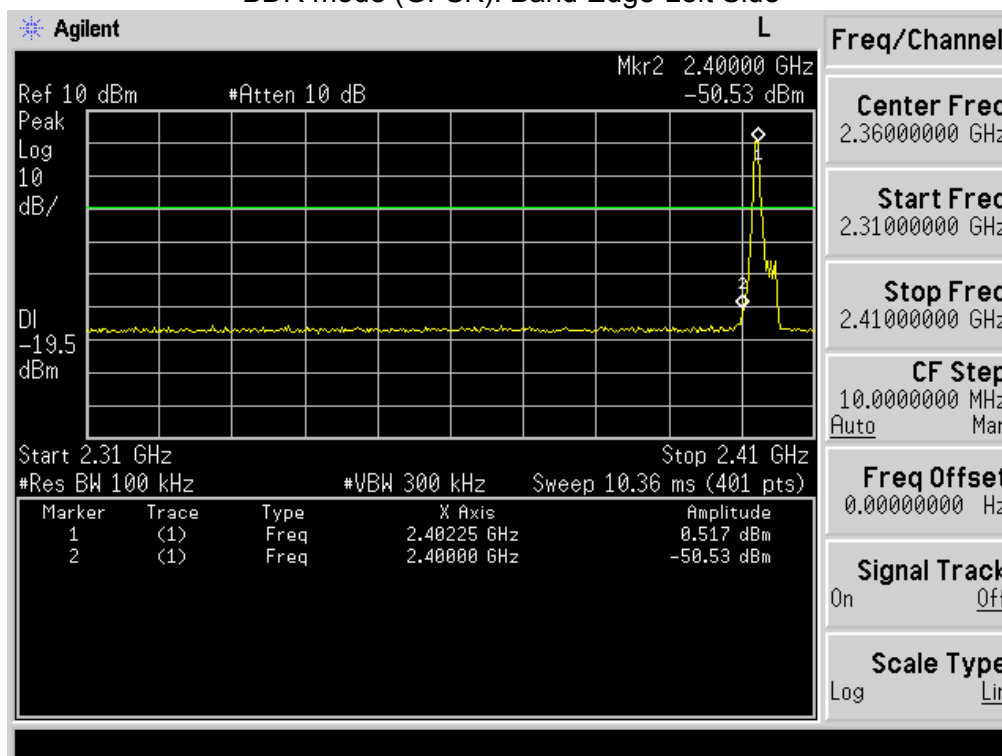



BDR mode (GFSK): Band Edge-Right Side

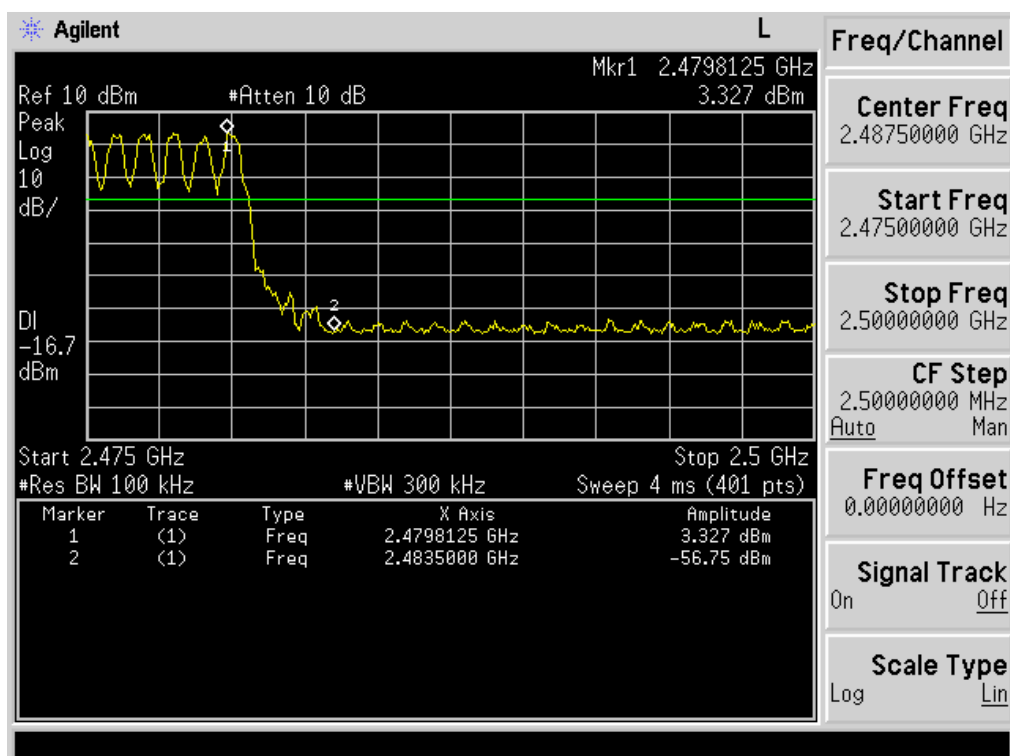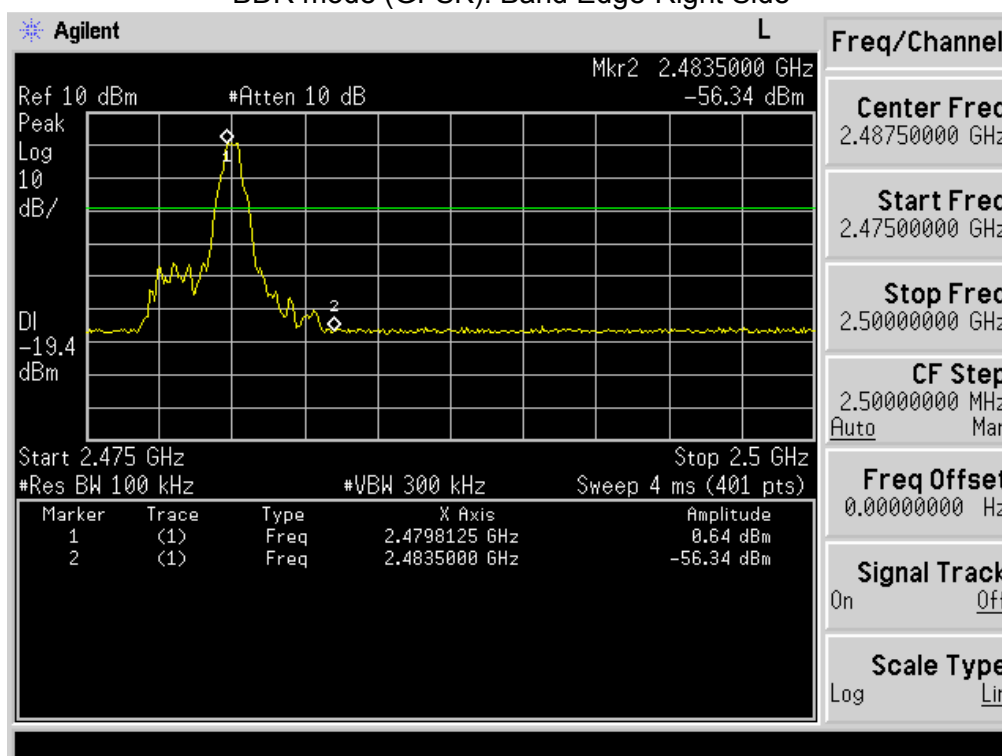

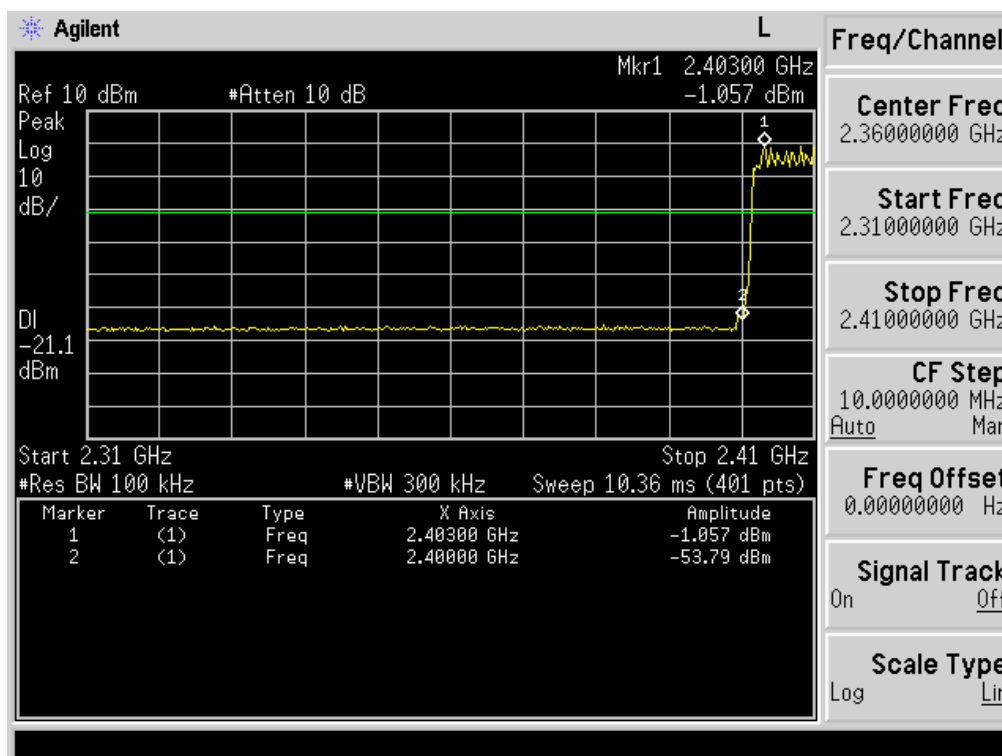
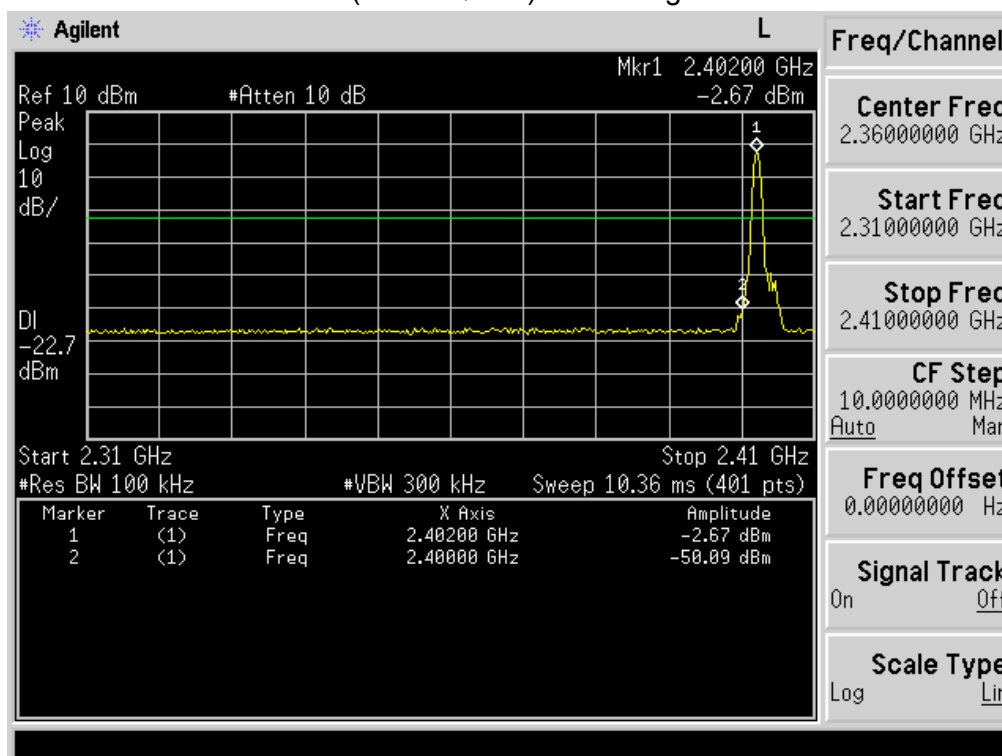
EDR mode ($\pi/4$ -DQPSK): Band Edge-Left Side

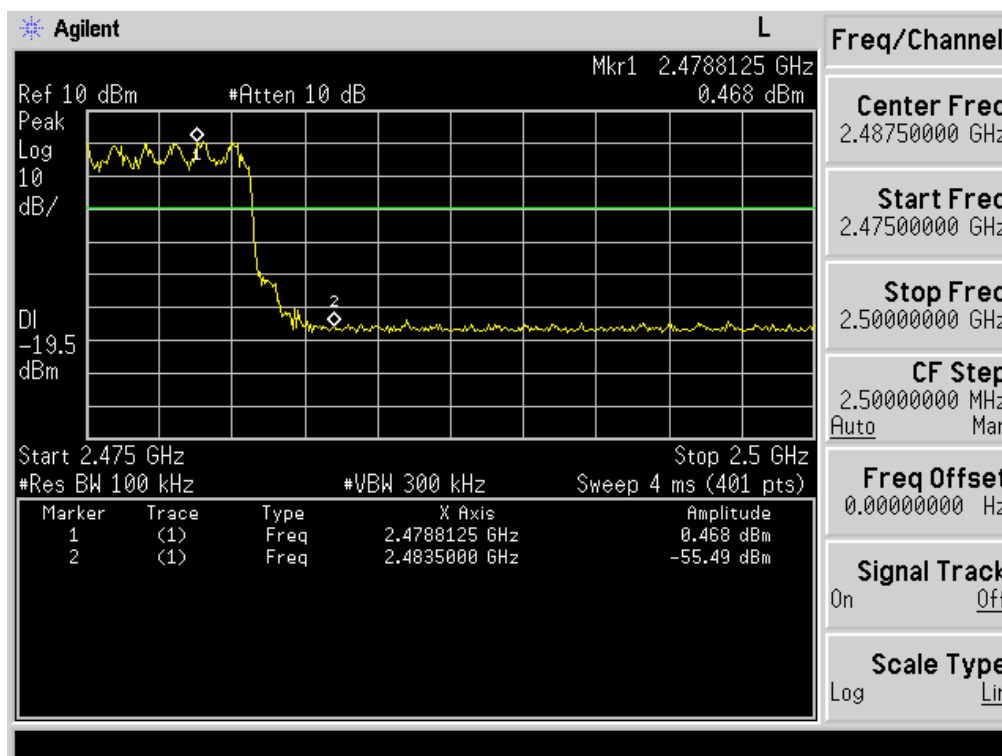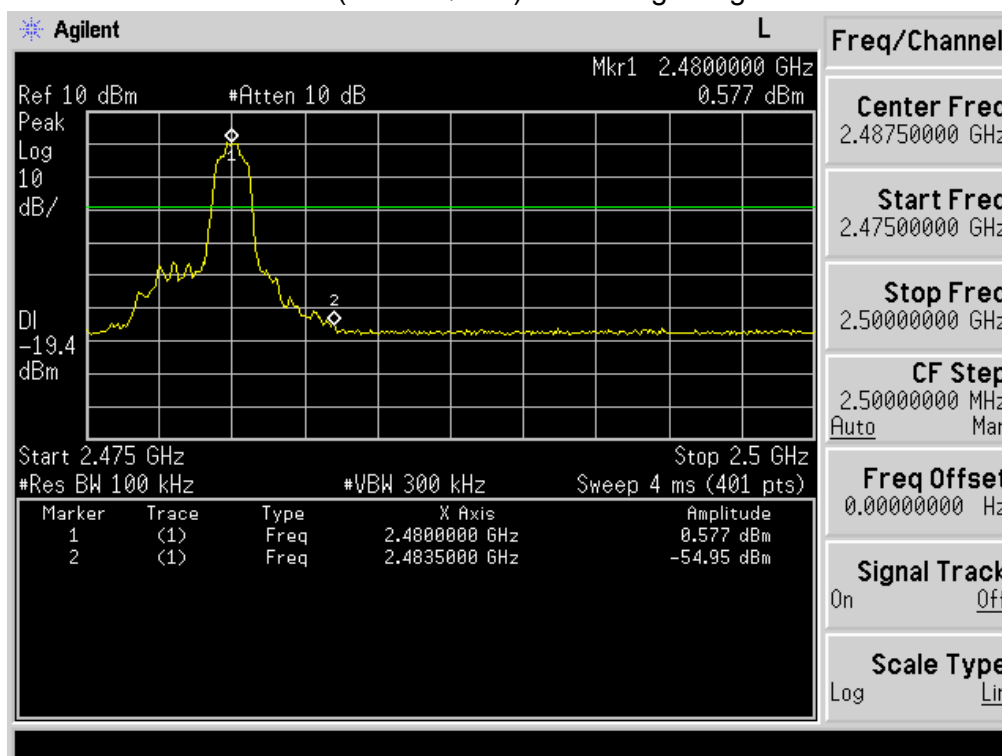EDR mode ($\pi/4$ -DQPSK): Band Edge- Right Side

EDR mode(8DPSK): Band Edge-Left Side

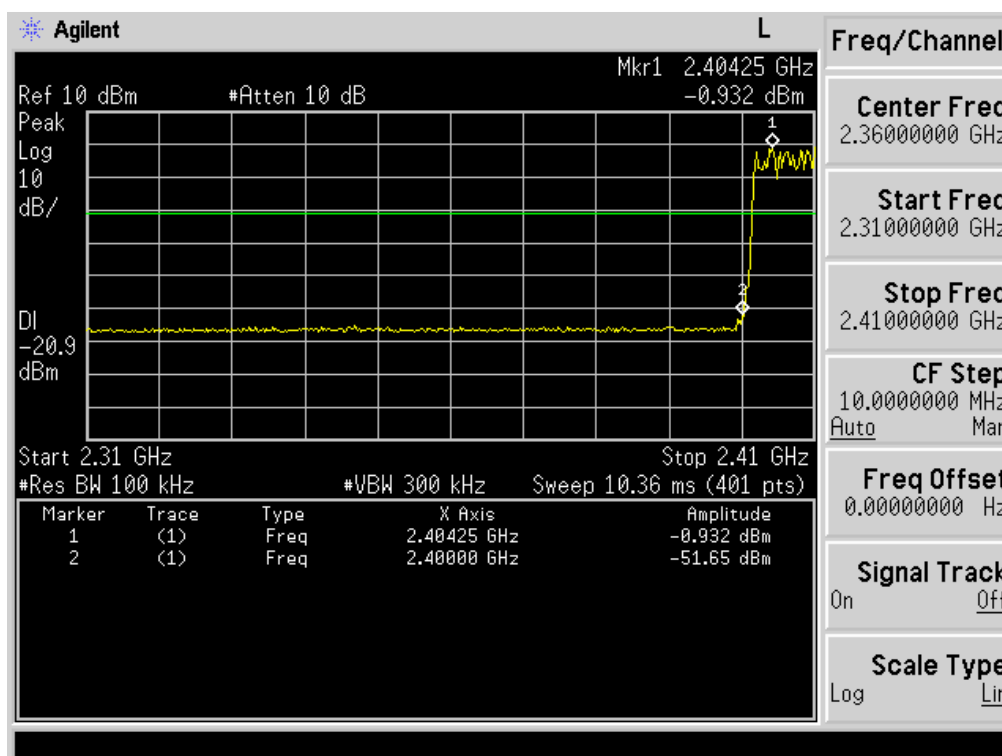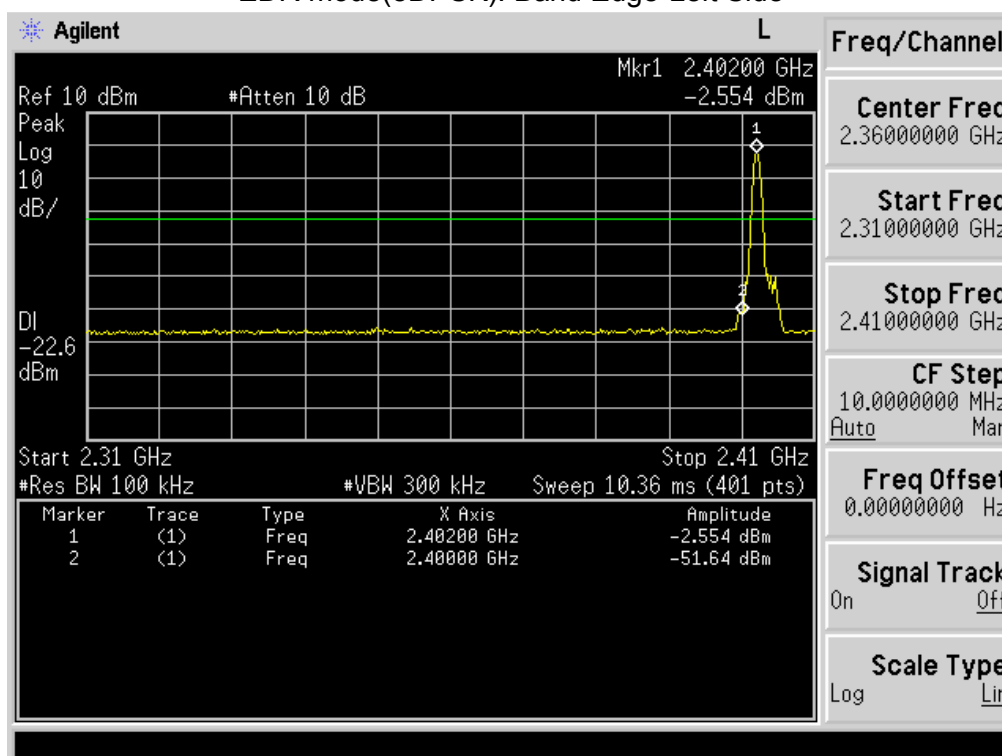

EDR mode(8DPSK): Band Edge-Right Side

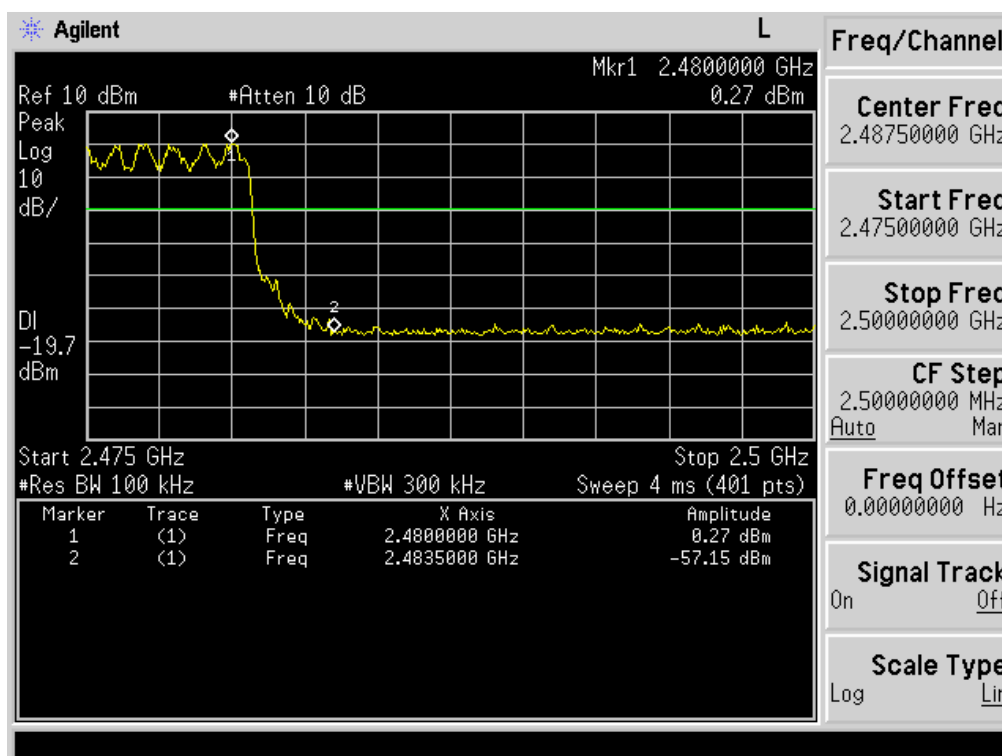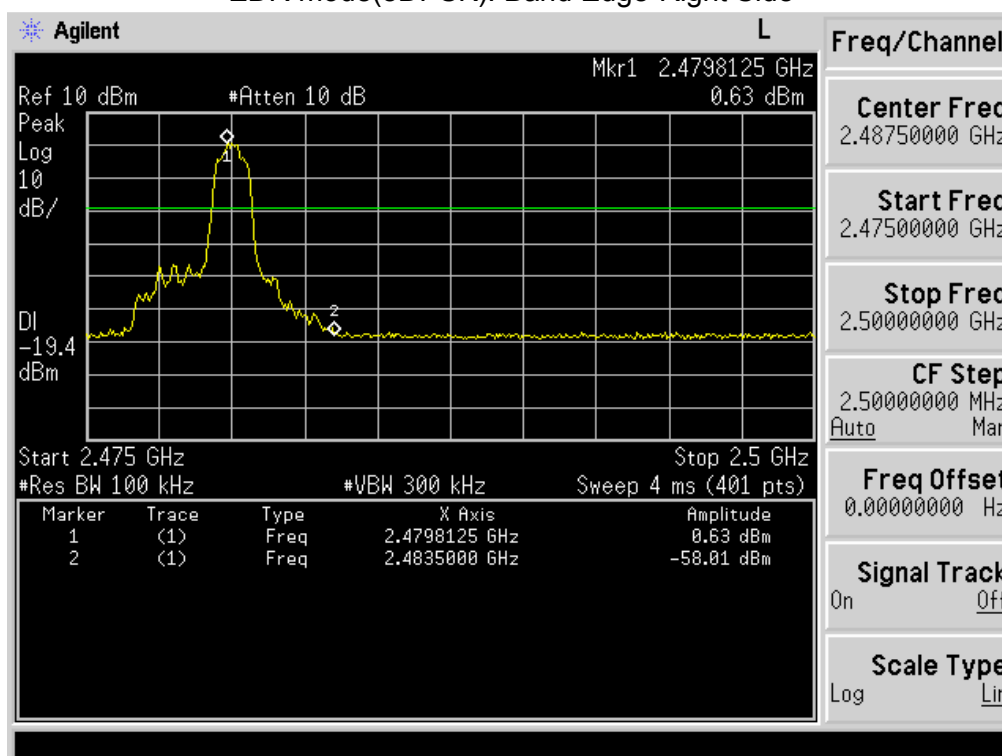

NOTE:

Hopping enabled and disabled have evaluated, and the worst data was reported

11. ANTENNA REQUIREMENTS

11.1.Limits



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result


The antennas used for this product is Helical antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.0dBi.

12. PHOTOGRAPHS OF TEST SET-UP

Radiated Emission Test

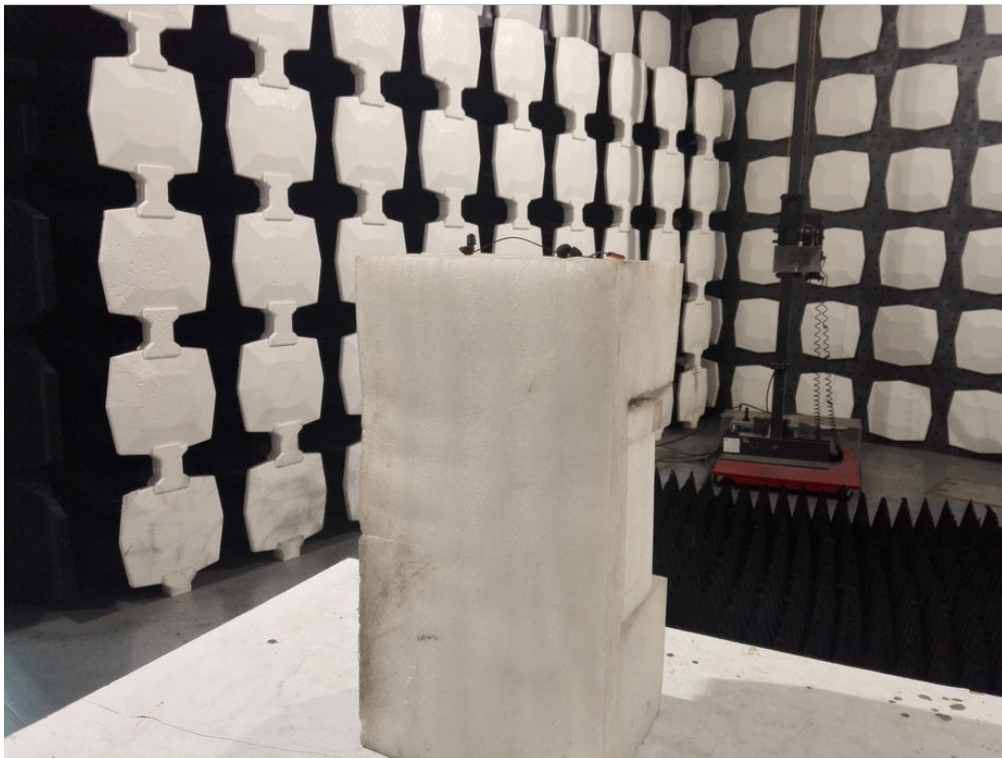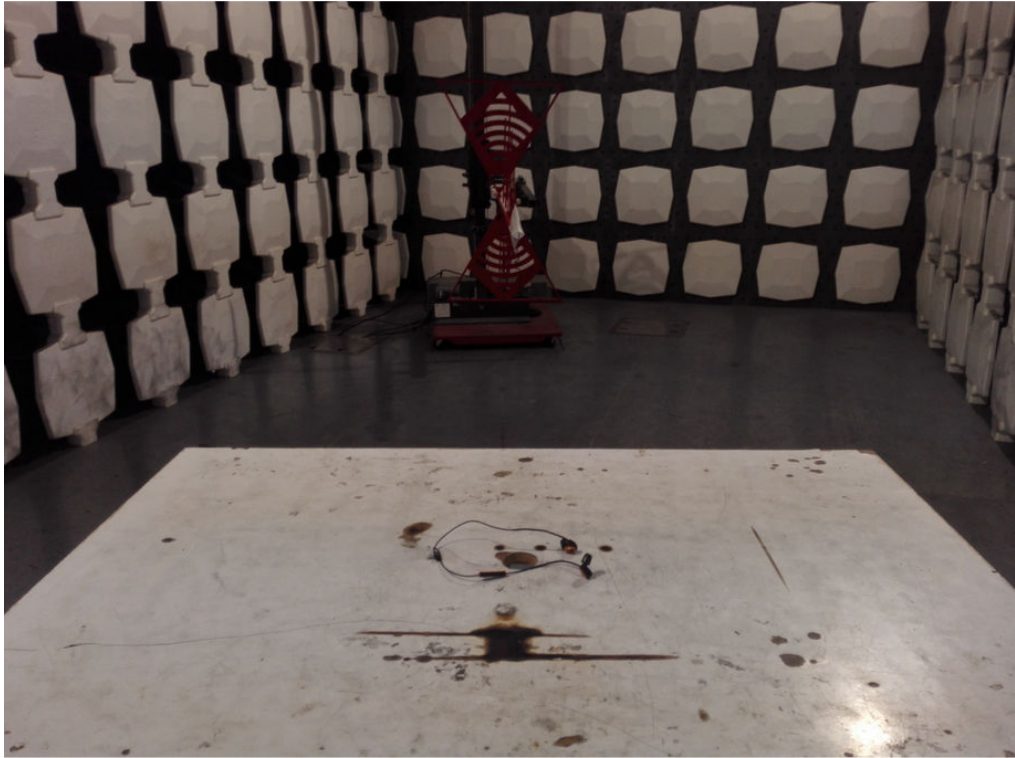

Conducted Emission

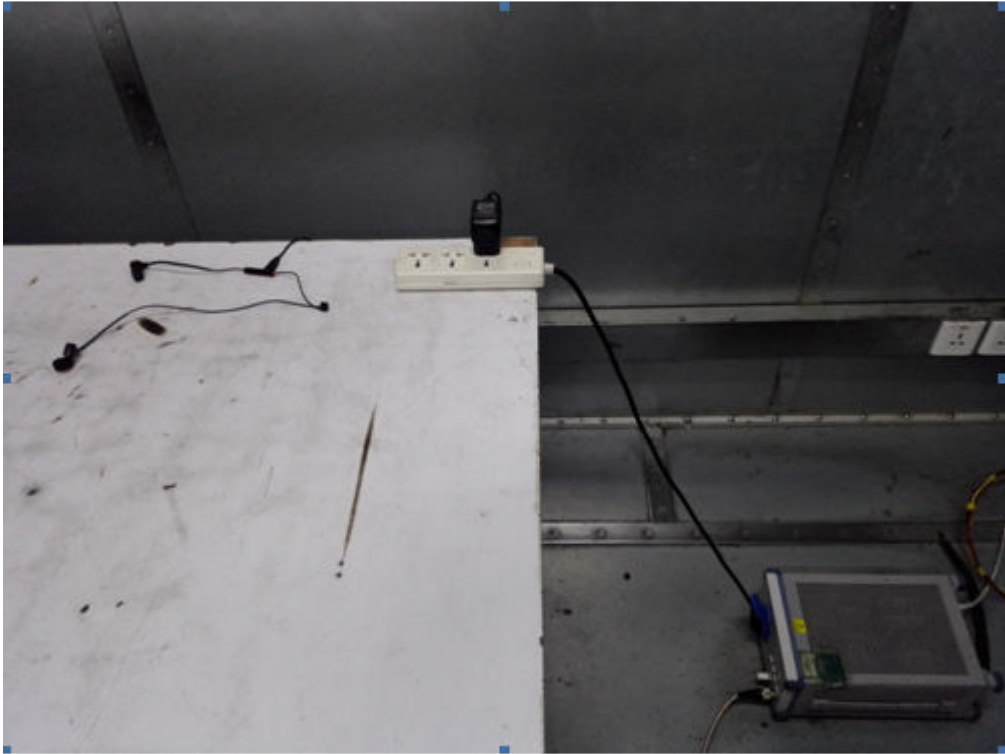




13. PHOTOGRAPHS OF THE EUT








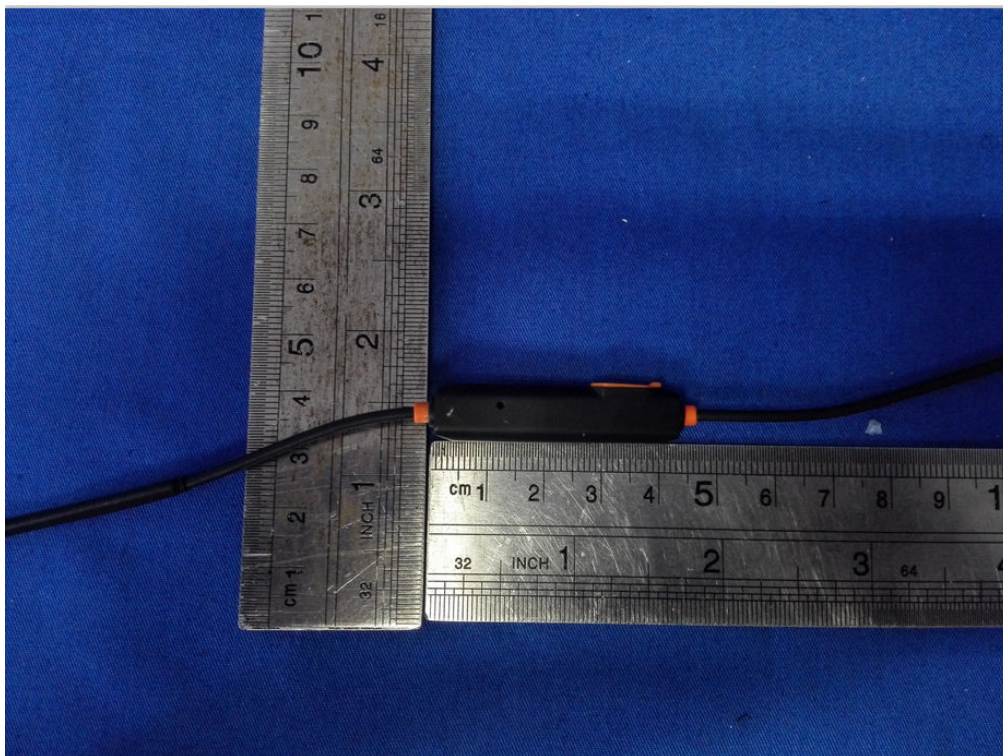

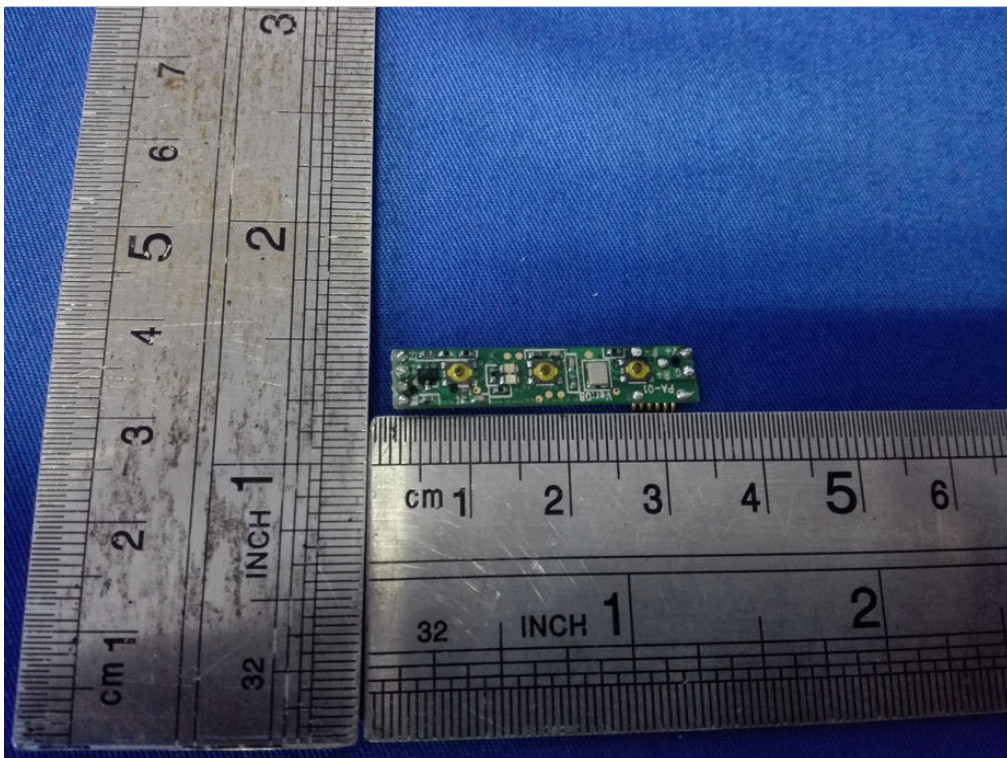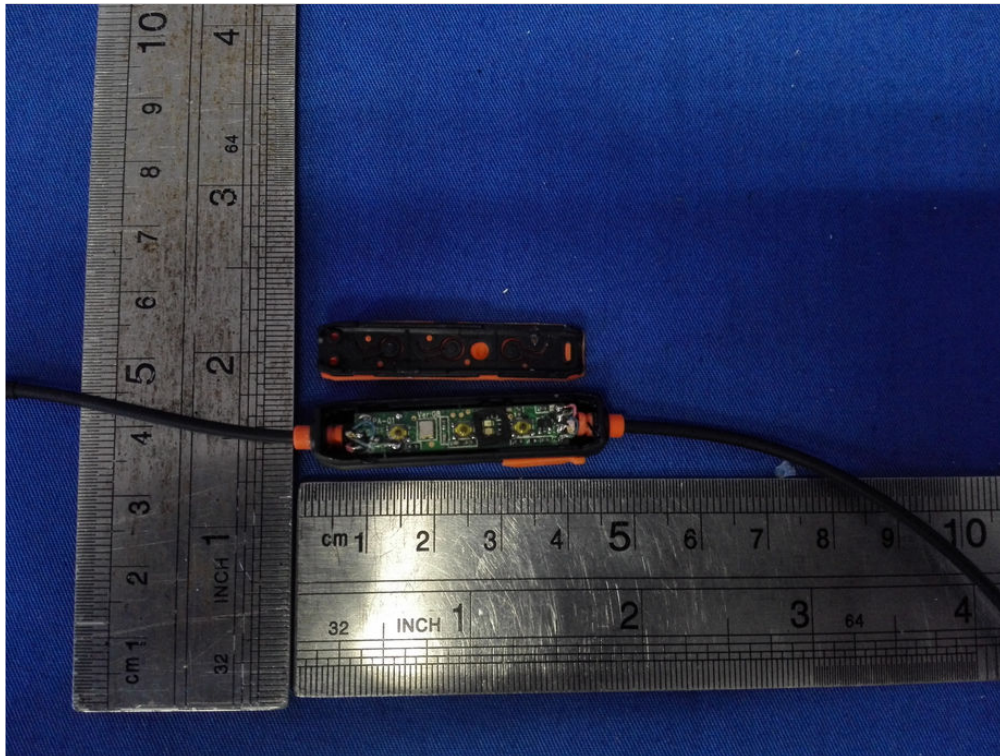

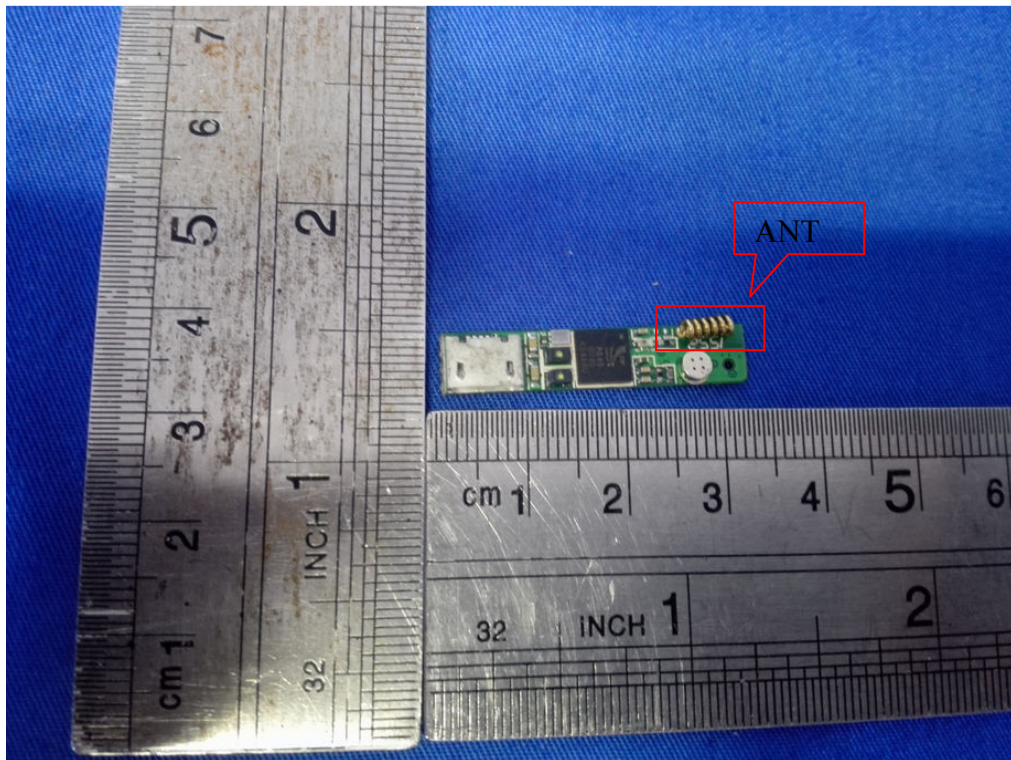

-----End-----