

TEST REPORT

Applicant: NAYAX LTD
Address: 3 Arik Einstein St., Herzliya, 4659071, Israel
Equipment Type: Payment Terminal Device
Model Name: VPOSM4
Brand Name: NAYAX
FCC ID: 2AK6L-VPOSM4
ISED Number: 10840A-VPOSM4
Test Standard: 47 CFR Part 15 Subpart C
ANSI C63.10-2013
RSS-210 Issue 11
RSS-Gen Issue 5
Sample Receipt Date: Mar. 04, 2025
Test Date: Mar. 06, 2025 - Mar. 07, 2025
Date of Issue: May 19, 2025

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center

Prepared by: Chai YongChai Yong**Reviewed by:** Huang ChengkunHuang Chengkun**Approved by:** Zhang Yanqing

(Laboratory Manager)

Zhang Yanqing

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>May 19, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Technical Information	6
3 SUMMARY OF TEST RESULTS	7
3.1 Test Standards	7
3.2 Verdict	7
3.3 Decision Rule	8
3.4 Test Uncertainty	8
4 GENERAL TEST CONFIGURATIONS	9
4.1 Test Environments	9
4.2 Description of Test Setup	9
5 TEST ITEMS	11
5.1 Antenna Requirements	11
5.2 Emission Bandwidth	13
5.3 Field Strength of Fundamental Emissions and Radiated Emissions	15
5.4 Frequency Tolerance	17
5.5 Conducted Emission	18
ANNEX A TEST RESULT	19
A.1 Emission Bandwidth	19

A.2 Field Strength of Fundamental Emissions	20
A.3 Radiated Emissions	21
A.4 Frequency Stability	25
A.5 Conducted Emissions	26
ANNEX B TEST SETUP PHOTOS	30
ANNEX C EUT EXTERNAL PHOTOS	30
ANNEX D EUT INTERNAL PHOTOS	30

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China
Accreditation Certificate	<p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352.</p> <p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 29671.</p>

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	NAYAX LTD
Address	3 Arik Einstein St., Herzliya, 4659071, Israel

2.2 Manufacturer Information

Manufacturer	NAYAX LTD
Address	3 Arik Einstein St., Herzliya, 4659071, Israel

2.3 General Description for Equipment under Test (EUT)

EUT Name	Payment Terminal Device
Model Name Under Test	VPOSM4
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	VPOSM405141217100
Software Version	p1611_oneant_combo_nayax_202408021255_userdebug
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	2G Network GPRS/EDGE 850/1900MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/7/12/17/19 TDD LTE Band 38/41 Bluetooth(BR+EDR+BLE 1M 2M) 2.4G WiFi 802.11b, 802.11g, 802.11n(HT20/40) 5G WiFi 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80), GPS, Galileo, BeiDou, GLONASS, NFC
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Type	ASK
Product Type	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
	13.56 MHz
Receiver Categorization	3
Number of Channel	1
Tested Channel	1
Antenna Type	Coil Antenna

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C	Intentional Radiators
2	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
4	RSS-210 Issue 11	Licence-Exempt Radio Apparatus: Category I Equipment

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-Gen 6.8	--	Pass ^{Note}
2	Emissions Bandwidth	15.215	RSS-Gen 6.7	ANNEX A.1	Pass
3	Field Strength of Fundamental Emissions	15.225(a)	RSS-210 B.6	ANNEX A.2	Pass
4	Radiated Emissions	15.225(d) 15.209	RSS-210 B.6	ANNEX A.3	Pass
5	Frequency Stability	15.225(e)	RSS-210 B.6	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-Gen 8.8	ANNEX A.5	Pass
Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203					

3.3 Decision Rule

- No Need
- Use General conformity decision rule (Consider uncertainty or not No Yes)
- Use Special Conformity Decision Rule (Consider uncertainty or not No Yes)

3.4 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (150 kHz-30 MHz)	2.6 dB
Radiated emissions (9 kHz-30 MHz)	4.3 dB
Radiated emissions (30 MHz-1 GHz)	4.4 dB

4 GENERAL TEST CONFIGURATIONS


4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	30% to 60%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	24 V _{DC}


4.2 Description of Test Setup

4.3.1 For Radiated Test (Below 30 MHz)

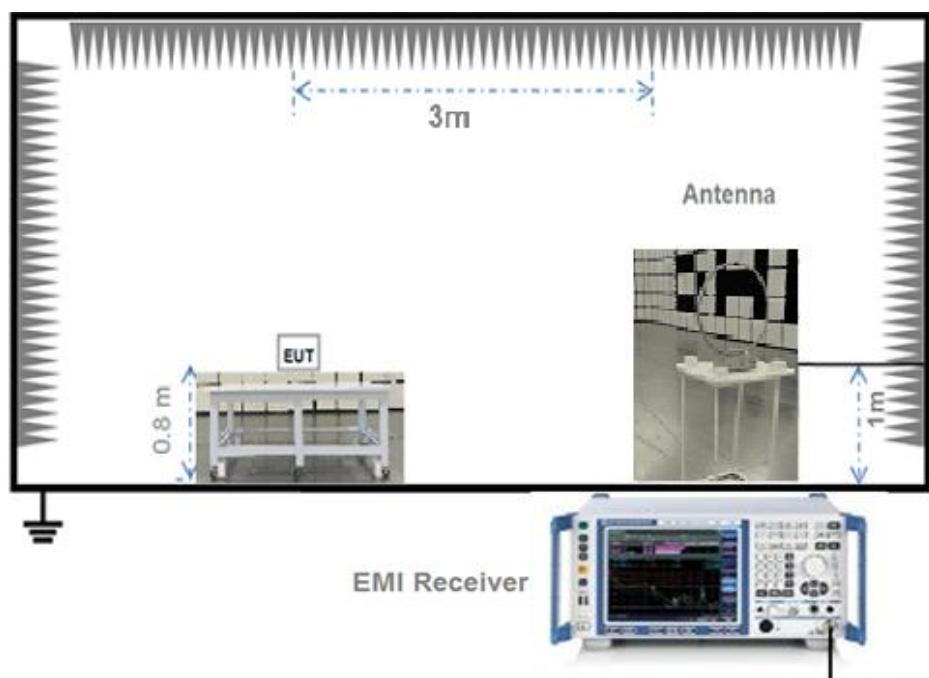


(Diagram 1)

4.3.2 For Radiated Test (30 MHz-1 GHz)

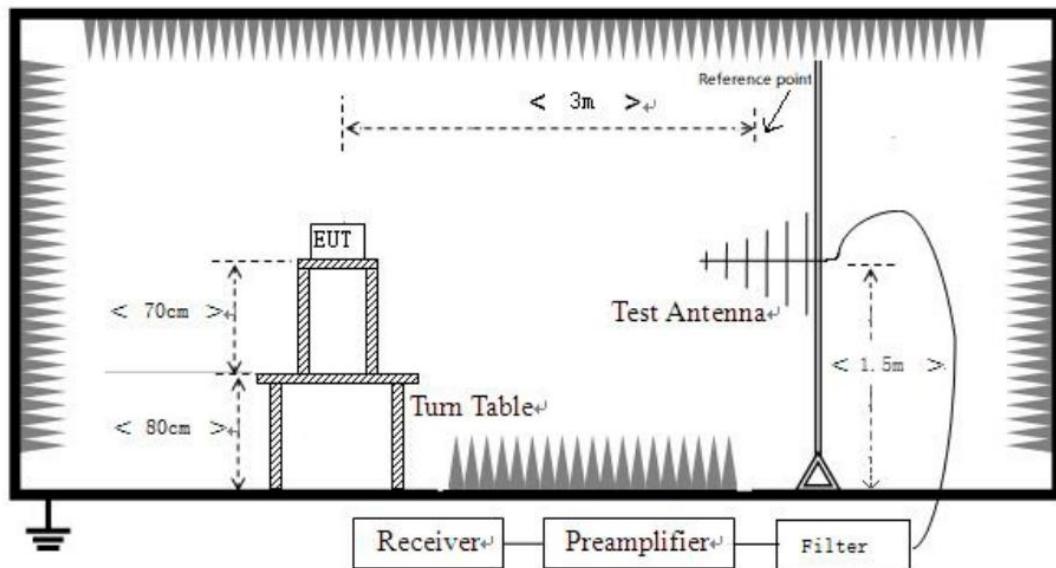

(Diagram 2)

4.3.3 For AC Power Supply Port Test

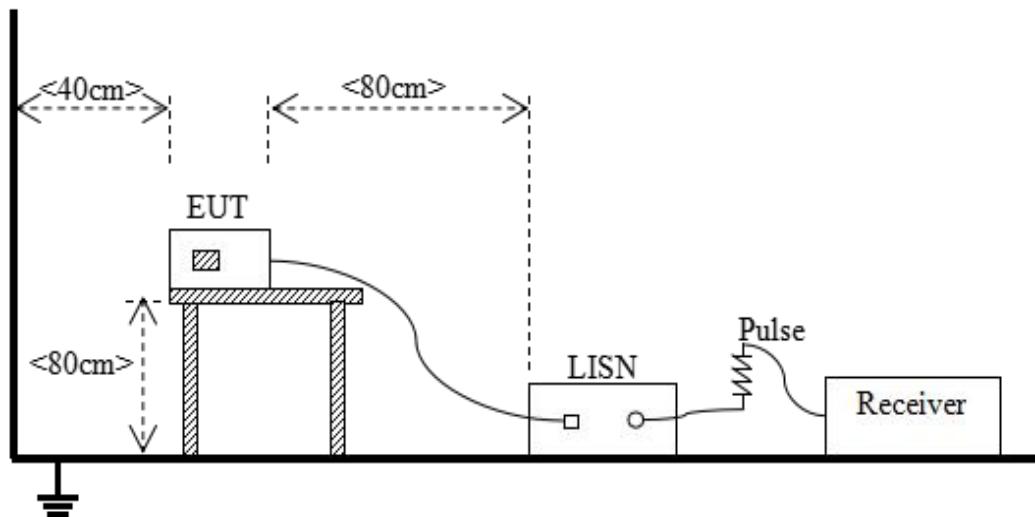

(Diagram 3)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-Gen 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer EUT internal photos.

5.2 Emission Bandwidth

5.2.1 Definition

15.215(c);

Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

RSS-Gen 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

5.2.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW

RBW = 1% to 5% the OBW

VBW \geq 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

The 99% emission bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = between 1.5 to 5 times the OBW

RBW = 1% to 5% OBW

VBW \geq 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.2.4 Test Result

Please refer to ANNEX A.1

5.3 Field Strength of Fundamental Emissions and Radiated Emissions

5.3.1 Limit

FCC §15.225(a), (b), (c), RSS-210 B.6

According to FCC section 15.225, for <30 MHz, Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set 10 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10 kHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated spurious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows; 3 m Limit(dB μ V/m) = 20log(X)+40log(30/3)= 20log(15848)+40log(30/3) = 124dB μ V

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency range (MHz)	Field Strength@30m		Field Strength@10m		Field Strength@3m	
	μ V/m	dB μ V/m		dB μ V/m		dB μ V/m
Below 13.110	30	29.5		48.58		69.5
13.110 ~ 13.410	106	40.5		59.58		80.5
13.410 ~ 13.553	334	50.5		69.58		90.5
13.553 ~13.567	15848	84		103.08		124
13.567 ~ 13.710	334	50.5		69.58		90.5
13.710 ~14.010	106	40.5		59.58		80.5
Above 14.010	30	29.5		48.58		69.5

NOTE:

1. Field Strength (dB μ V/m) = 20*log[Field Strength (μ V/m)].
2. In the emission tables above, the tighter limit applies at the band edges.

FCC §15.225(d)

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dB μ V/m@3m (AV) and 74dB μ V/m@3m (PK).

5.3.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented. The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.3.4 Test Result

Please refer to ANNEX A.2 and A.3

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.

5.4 Frequency Tolerance

5.4.1 Limit

FCC §15.225(e)

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

RSS-210 B.6

- (a) at the temperatures of -30°C (-22°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage; and
- (b) at the temperature of +20°C (+68°F) and at $\pm 15\%$ of the manufacturer's rated supply voltage.

If the frequency stability limits are only met within a temperature range that is smaller than the -30°C to +50°C range specified in (a), the frequency stability requirement will be deemed to be met if the transmitter is automatically prevented from operating outside this smaller temperature range and if the published operating characteristics for the equipment are revised to reflect this restricted temperature range.

5.4.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

1. The test is performed in a Temperature Chamber.
2. The EUT is configured as MS + DC Power Supply.

5.4.4 Test Result

Please refer to ANNEX A.4.

5.5 Conducted Emission

5.5.1 Limit

FCC §15.207, RSS-Gen

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.5.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.5.4 Test Result

Please refer to ANNEX A.5.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Over limit = Results – Limit.

ANNEX A TEST RESULT

A.1 Emission Bandwidth

Sample No.	S13	Temperature	21.8°C
Humidity	54%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2025.03.07

Test Data

Frequency (MHz)	Emission Bandwidth(20dB down) (kHz)	Occupied Bandwidth(99%) (kHz)
13.5597	44.83	39.06

Test plots

Emission Bandwidth & 99% Occupied Bandwidth



Emissions Bandwidth						
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	<input checked="" type="checkbox"/>
Test Antenna-Loop	SCHWARZBECK	FMZB 1519B	BH-EMC-L067	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>

A.2 Field Strength of Fundamental Emissions

Note: Field Strength of Fundamental Emissions tests were performed in X, Y, Z axis direction of EUT. And only the worst axis test condition was recorded in this test report.


Sample No.	S13	Temperature	21.8°C
Humidity	54%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2025.03.07

Test Data

Field Strength of Fundamental Emissions Value					
Frequency (MHz)	Detector	Field Strength (dB μ V/m)	Limit @3m (dB μ V/m)	EUT	Margin (dB)
13.560	PEAK	75.15	124.0	X axis	48.85

Test Plot

Test Antenna-LOOP, EUT X axis

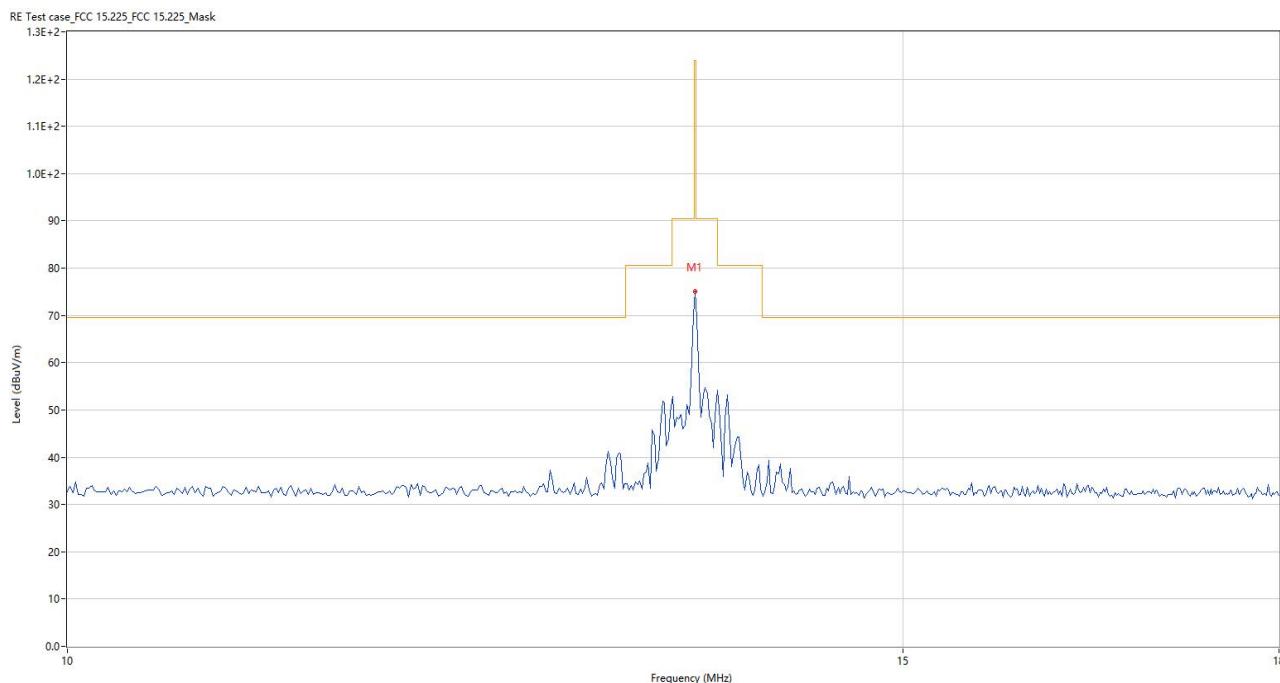

Field Strength Of Fundamental Emissions						
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	<input checked="" type="checkbox"/>
Test Antenna-Loop	SCHWARZBECK	FMZB 1519B	BH-EMC-L067	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>

A.3 Radiated Emissions


Note 1: This frequency which near 13.560 MHz with circle should be ignored because they are NFC carrier frequency.

Note 2: All Radiated Emissions tests were performed in X, Y, Z axis direction of EUT. And only the worst axis test condition was recorded in this test report.

Sample No.	S13	Temperature	21.8°C
Humidity	54%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2025.03.07

The Data and Plots (9 kHz ~ 30 MHz)(at 3m chamber)

Below 30 MHz, Test Antenna LOOP, EUT X axis

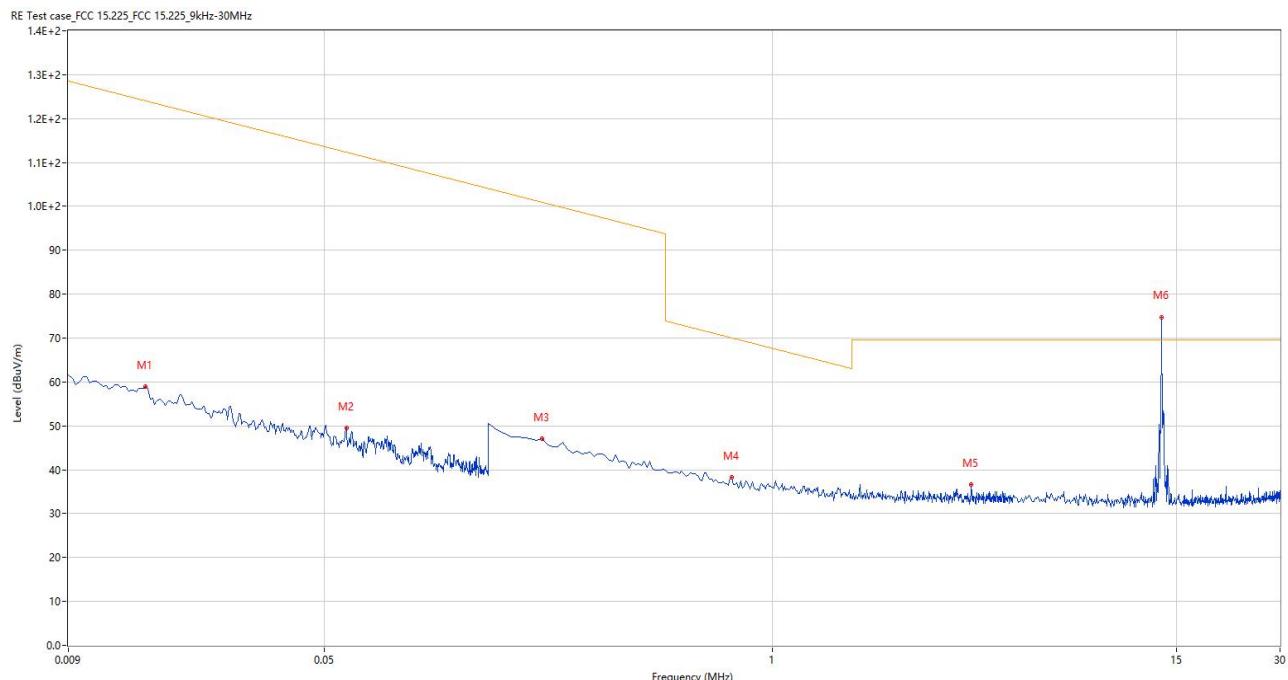

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	0.015	58.85	19.66	124.0	65.15	Peak	217.00	100	Vertical	Pass
2	0.058	49.58	19.19	112.3	62.72	Peak	227.00	100	Vertical	Pass
3	0.215	47.02	19.02	101.0	53.98	Peak	199.00	100	Vertical	Pass
4	0.764	38.26	19.02	69.9	31.64	Peak	233.00	100	Vertical	Pass
5	3.796	36.62	19.37	69.5	32.88	Peak	0.00	100	Vertical	Pass
6	13.554	74.75	19.21	69.5	-5.25	Peak	200.00	100	Vertical	N/A


Note 1: This frequency which near 13.560 MHz with circle should be ignored because they are NFC carrier frequency.

Field Strength Of Fundamental Emissions							
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use	
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	<input checked="" type="checkbox"/>	
Test Antenna-Loop	SCHWARZBECK	FMZB 1519B	BH-EMC-L067	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>	
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>	
Description	Manufacturer	Name	Version	/		Use	
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>	

Sample No.	S13	Temperature	21.8°C
Humidity	54%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2025.03.07


Test Data and Plots

30 MHz to 1 GHz, Test Antenna Vertical, EUT X axis

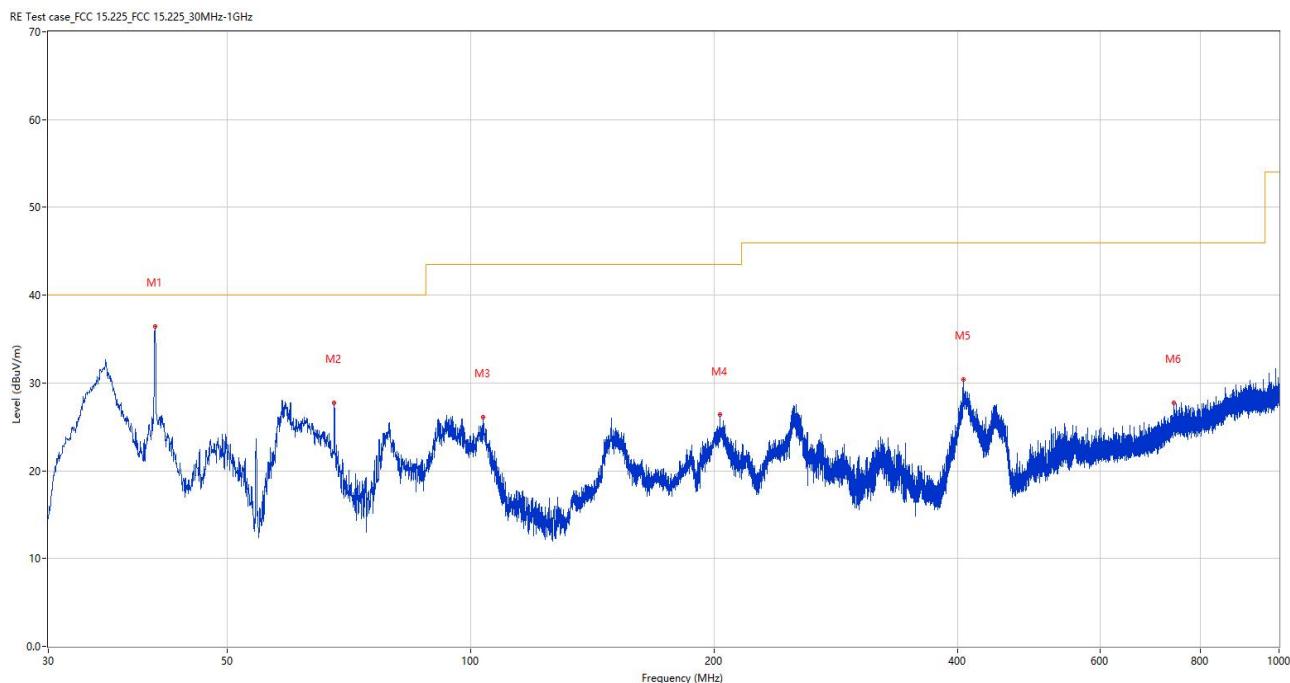

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.670	36.40	-25.71	40.0	3.60	Peak	251.00	100	Vertical	Pass
2	67.782	27.76	-28.24	40.0	12.24	Peak	208.00	100	Vertical	Pass
3	103.575	26.14	-26.10	43.5	17.36	Peak	180.00	200	Vertical	Pass
4	203.388	26.36	-26.23	43.5	17.14	Peak	22.00	200	Vertical	Pass
5	406.748	30.44	-20.24	46.0	15.56	Peak	360.00	100	Vertical	Pass
6	740.331	27.75	-12.12	46.0	18.25	Peak	22.00	200	Vertical	Pass

30 MHz to 1 GHz, Test Antenna Horizontal, EUT X axis

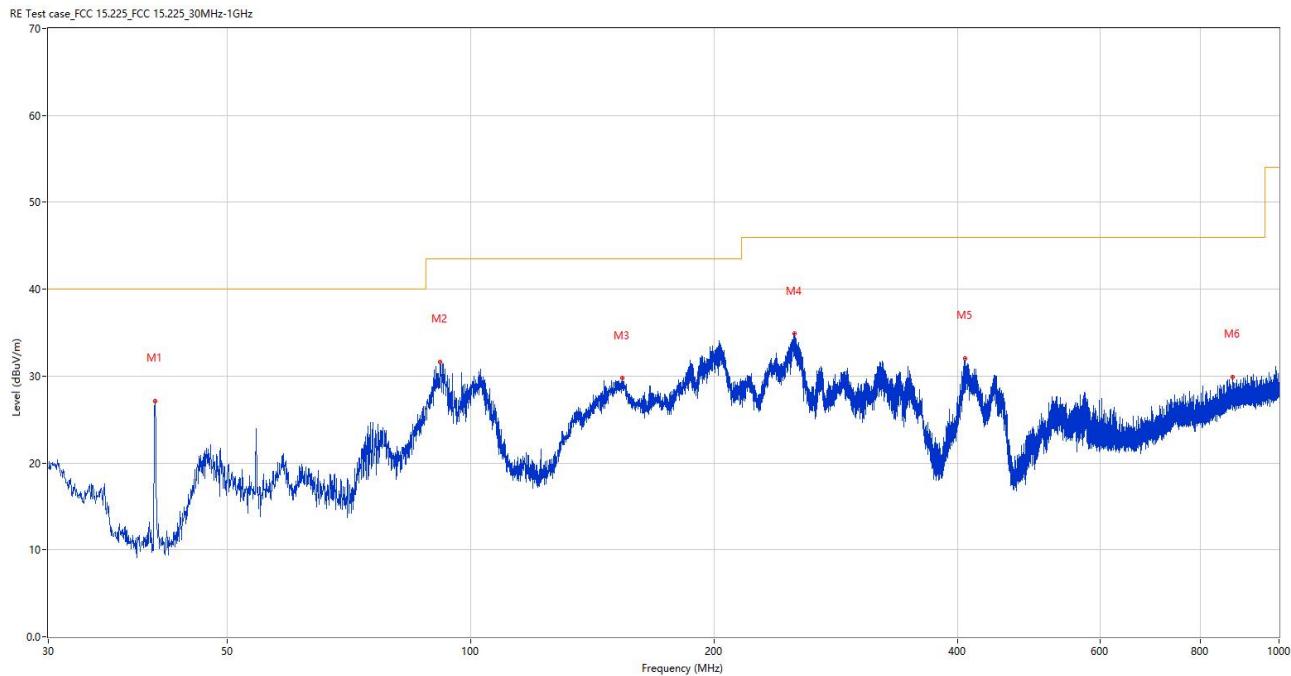

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.670	27.14	-25.71	40.0	12.86	Peak	162.00	200	Horizontal	Pass
2	91.692	31.66	-27.55	43.5	11.84	Peak	101.00	200	Horizontal	Pass
3	153.772	29.74	-29.35	43.5	13.76	Peak	0.00	200	Horizontal	Pass
4	251.257	34.86	-24.05	46.0	11.14	Peak	237.00	100	Horizontal	Pass
5	409.318	32.01	-20.16	46.0	13.99	Peak	286.00	100	Horizontal	Pass
6	876.567	29.84	-9.65	46.0	16.16	Peak	188.00	100	Horizontal	Pass

Radiated Emissions							
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use	
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	<input checked="" type="checkbox"/>	
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	BH-EMC-L008	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>	
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>	
Description	Manufacturer	Name	Version	/		Use	
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>	

A.4 Frequency Stability

Note 1: The operating temperature range of the EUT is -30°C to 50°C.

Sample No.	S13	Temperature	21.8°C
Humidity	54%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2025.03.07

OPERATING FREQUENCY:	13560000 Hz
REFERENCE VOLTAGE:	24V
DEVIATION LIMIT:	±0.01%

VOLTAGE (%)	Test Conditions		Frequency(Hz)	Deviation(%)	verdict
	Power (VDC)	Temperature (°C)			
100	24V	-30	13559792	-0.001534	Pass
100		-20	13560000	0.000000	
100		-10	13559792	-0.001534	
100		0	13560000	0.000000	
100		+10	13560000	0.000000	
100		+20	13560025	0.000184	
100		+25	13560025	0.000184	
100		+30	13559792	-0.001534	
100		+40	13559792	-0.001534	
100		+50	13560000	0.000000	
MIN(85)	20.4V	+20	13559792	-0.001534	
MAX(115)	27.6V	+20	13560000	0.000000	


Frequency Stability						
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2024.07.09	2025.07.08	<input checked="" type="checkbox"/>
Test Antenna-Loop	SCHWARZBECK	FMZB 1519B	BH-EMC-L067	2024.03.11	2026.03.10	<input checked="" type="checkbox"/>
Temperature Chamber	YOMA	DTL-0035	TJ8980-012	2024.04.12	2025.04.12	<input checked="" type="checkbox"/>
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>

A.5 Conducted Emissions

Note 1: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Note 2: This frequency which near 13.560 MHz with circle should be ignored because they are NFC carrier frequency.

Sample No.	S13	Temperature	22.4°C
Humidity	51%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Xu Ying	Test Date	2025.03.07

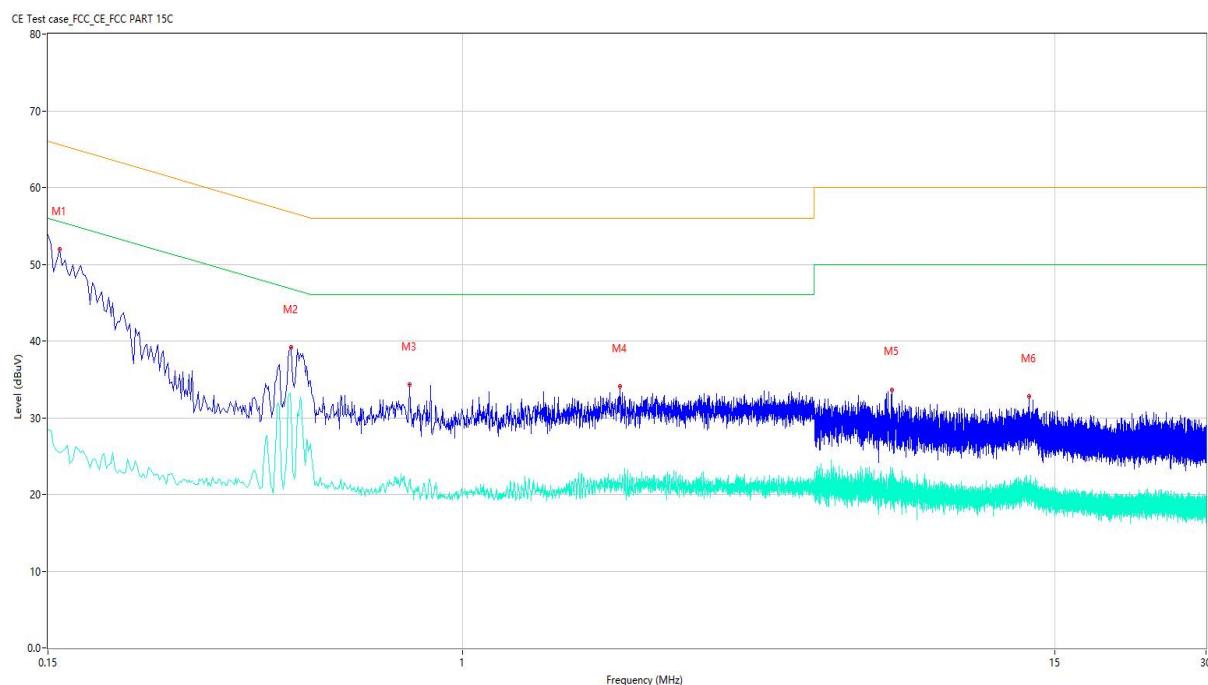Test Data and Plots**PHASE L**

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	51.94	9.75	65.57	13.63	Peak	L	Pass
1**	0.158	25.49	9.75	55.57	30.08	AV	L	Pass
2	0.456	39.20	9.74	56.77	17.57	Peak	L	Pass
2**	0.456	31.24	9.74	46.77	15.53	AV	L	Pass
3	0.784	34.29	9.72	56.00	21.71	Peak	L	Pass
3**	0.784	21.95	9.72	46.00	24.05	AV	L	Pass
4	2.052	34.08	9.68	56.00	21.92	Peak	L	Pass
4**	2.052	21.93	9.68	46.00	24.07	AV	L	Pass
5	7.134	33.66	9.57	60.00	26.34	Peak	L	Pass
5**	7.134	23.11	9.57	50.00	26.89	AV	L	Pass
6	13.362	32.77	9.33	60.00	27.23	Peak	L	Pass
6**	13.362	21.41	9.33	50.00	28.59	AV	L	Pass

PHASE N

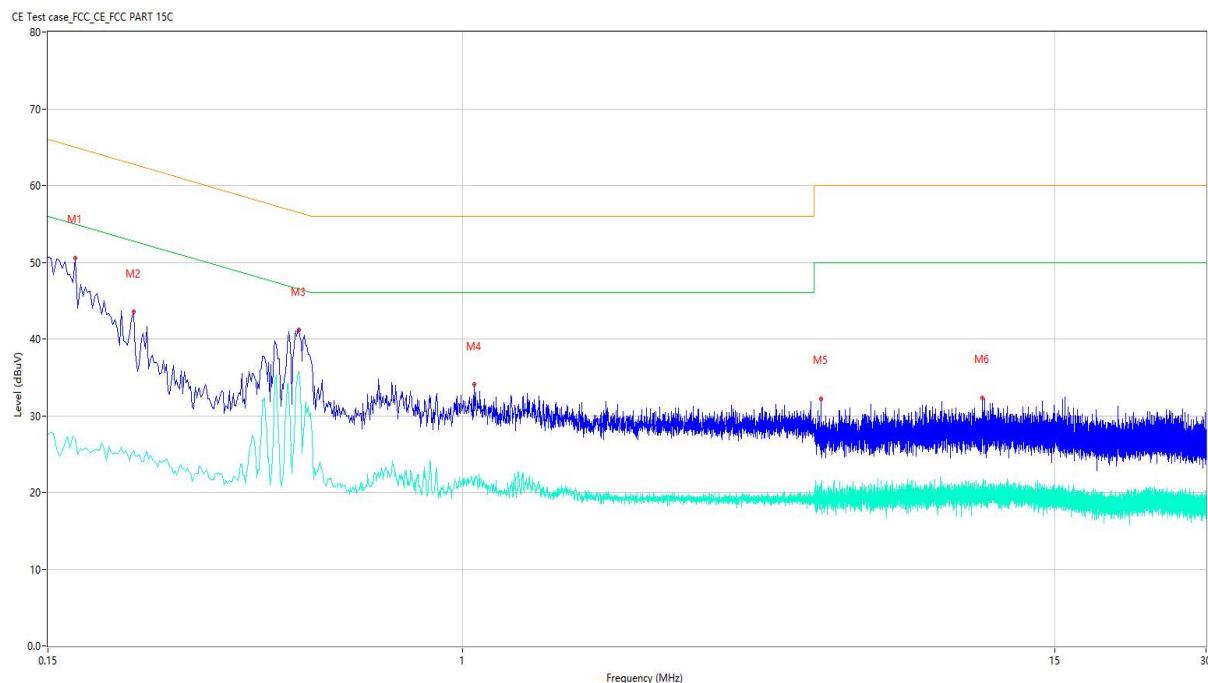

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.170	50.57	9.75	64.96	14.39	Peak	N	Pass
1**	0.170	26.97	9.75	54.96	27.99	AV	N	Pass
2	0.222	43.53	9.74	62.74	19.21	Peak	N	Pass
2**	0.222	25.48	9.74	52.74	27.26	AV	N	Pass
3	0.472	41.19	9.74	56.48	15.29	Peak	N	Pass
3**	0.472	35.70	9.74	46.48	10.78	AV	N	Pass
4	1.054	34.04	9.70	56.00	21.96	Peak	N	Pass
4**	1.054	21.81	9.70	46.00	24.19	AV	N	Pass
5	5.160	32.24	9.63	60.00	27.76	Peak	N	Pass
5**	5.160	21.18	9.63	50.00	28.82	AV	N	Pass
6	10.790	32.36	9.44	60.00	27.64	Peak	N	Pass
6**	10.790	20.88	9.44	50.00	29.12	AV	N	Pass

Conducted disturbance Test						
Description	Manufacturer	Model	Equipment No	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2024.04.06	2025.04.05	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2025.02.11	2026.02.10	<input checked="" type="checkbox"/>
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2025.02.11	2026.02.10	<input checked="" type="checkbox"/>
Shielded Room	YiHeng	5m*4m*3.2m	BH-EMC-L006	2024.02.22	2027.02.21	<input checked="" type="checkbox"/>
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH2480553-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH2480553-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH2480553-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--