


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G onboardANT					
Center Frequency	Horizontal			Vertical		
	2400Mhz	2450Mhz	2500Mhz	2400Mhz	2450Mhz	2500Mhz
	2.35	2.88	2.65	1.23	1.83	1.35
MAX.Gain	2.88dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	14.5mm					
Manufacture	Shenzhen Feikejie Technology Co., Ltd.					
Address	214, Building 2, Sanwei 1st Team Industrial Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen City					


Antenna Photo & Length(mm)

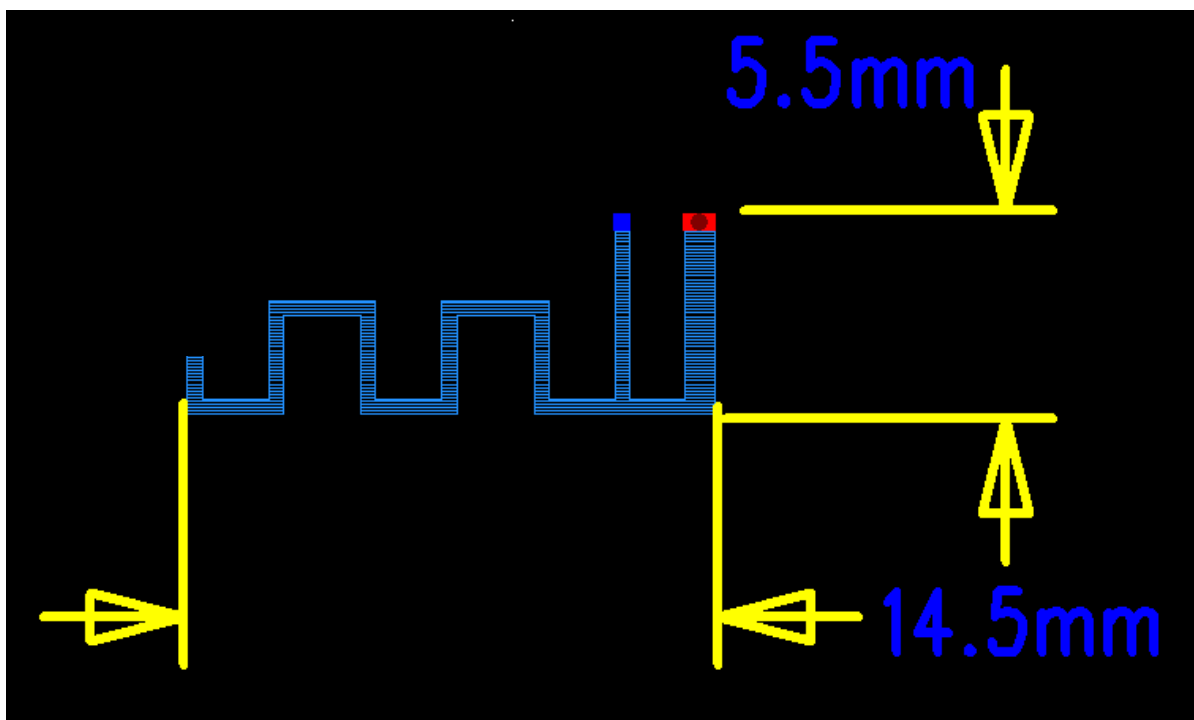

Horizontal:2400MHz 2450MHz 2500MHz

Power (dBm)

Max:0 Min:-40 Scale:5/div

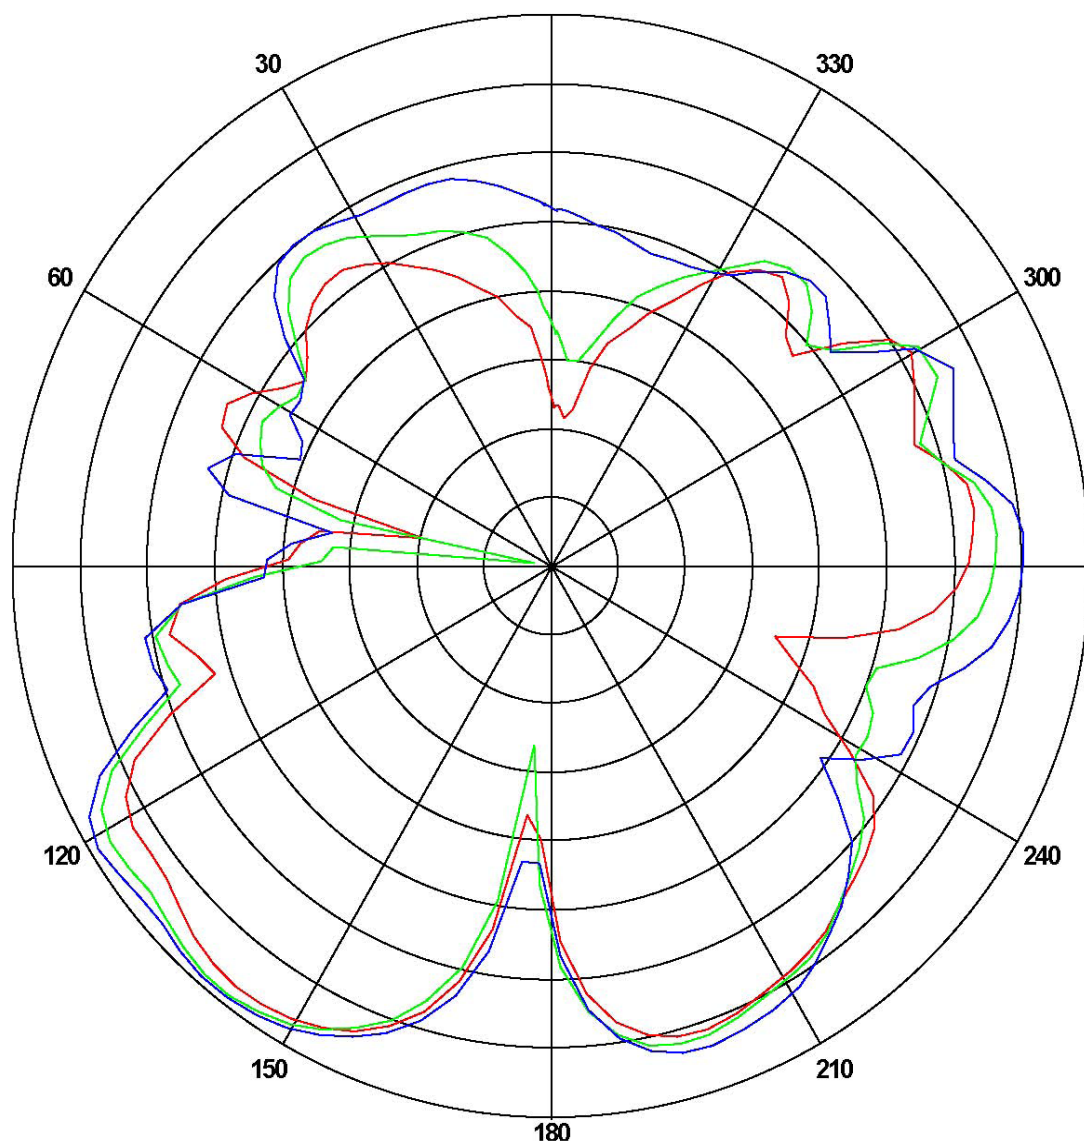


Frequency (MHz) (MHz)	Gain (dB)		
	Max	Min	Avg
2400	2.35155	-25.1817	-2.55237
2450	2.88432	-26.3575	-2.66975
2500	2.65527	-20.6988	-2.57921

Vertical:2400MHz 2450MHz 2500MHz

Power (dBm)

Max:0 Min:-30 Scale:5/div

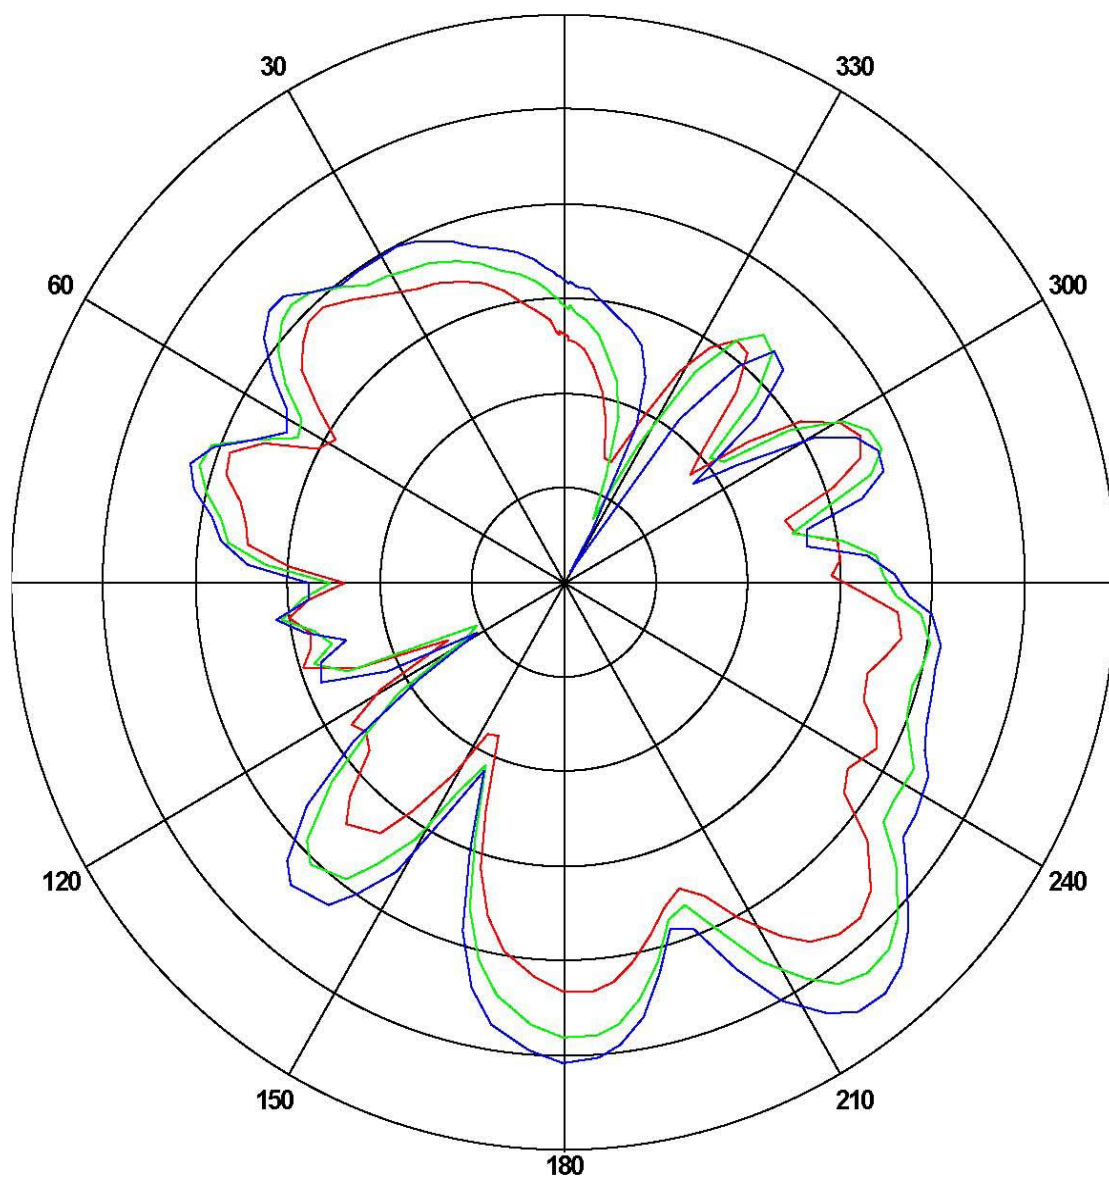

Frequency (MHz) (MHz)	Gain (dB)		
	Max	Min	Avg
2400	1.2318	-17.3597	-5.1531
2450	1.8395	-22.5682	-2.8495
2500	2.3576	-24.5503	-3.6429