






#### Test Graphs of Conducted Output Power Spectral Density for band 5.725-5.85 GHz




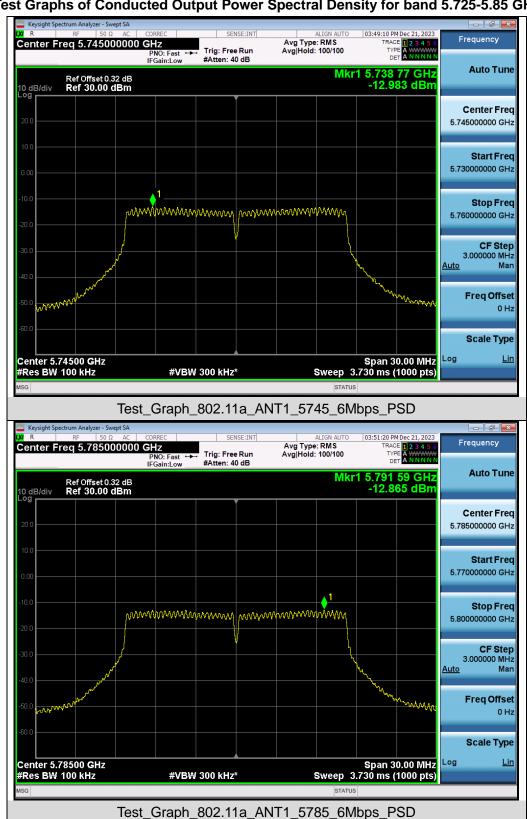

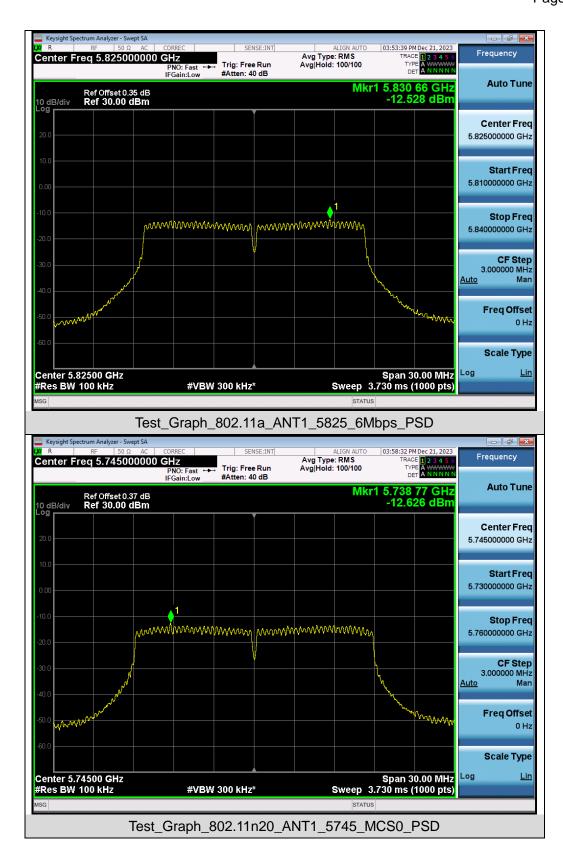





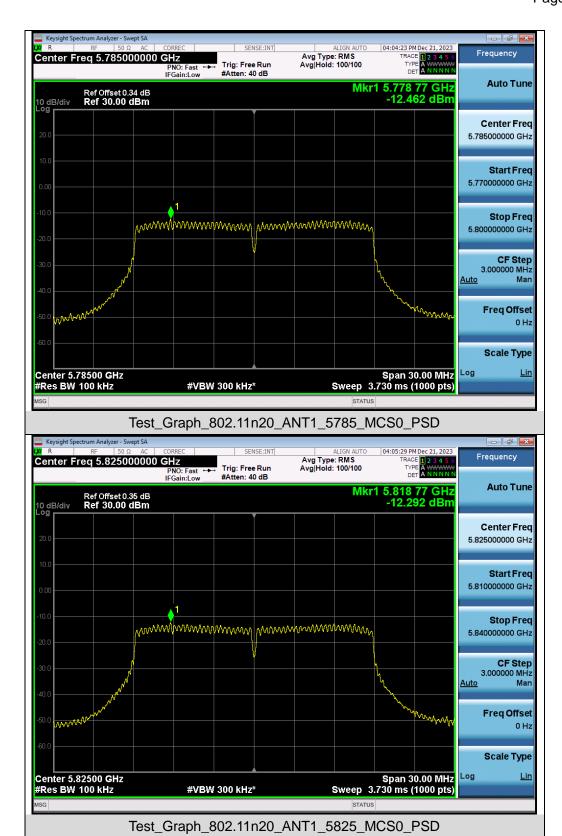







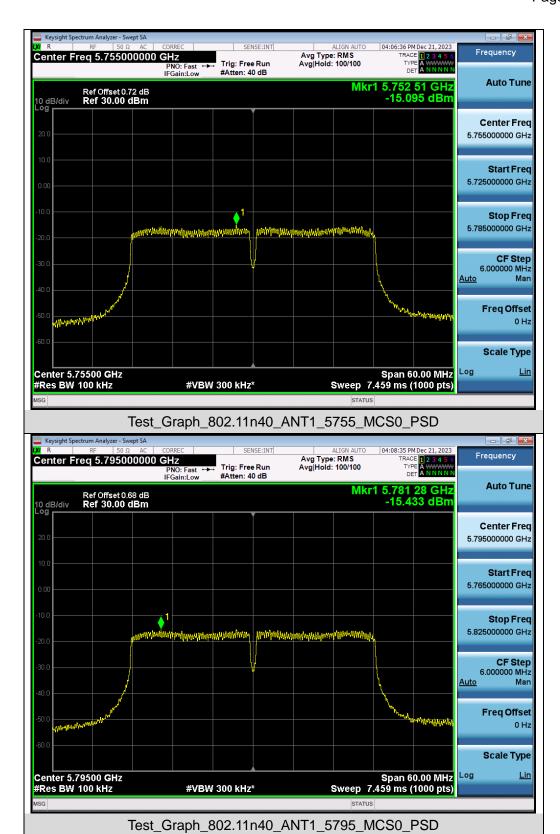







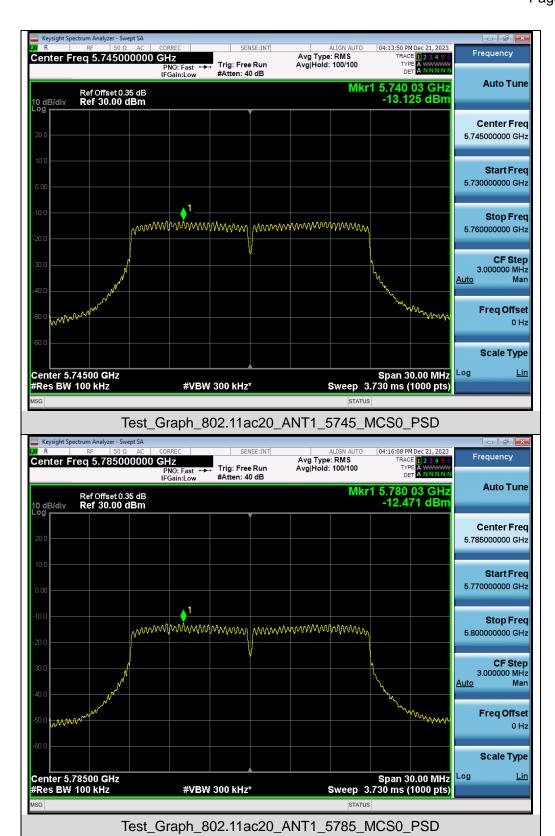







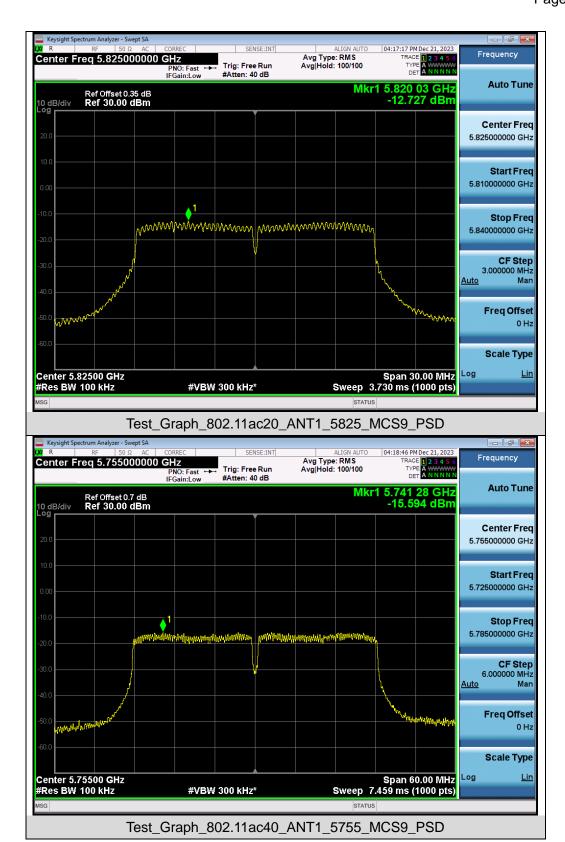





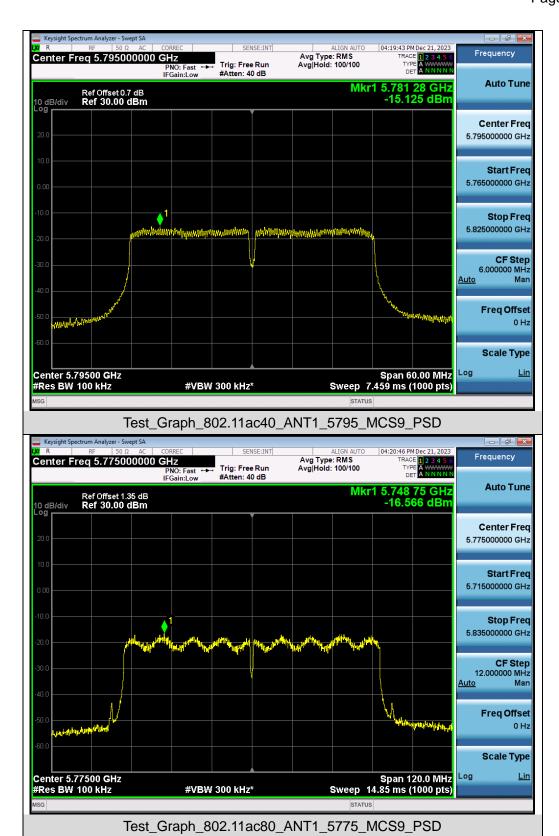





## 10. Conducted Band Edge and Out-of-Band Emissions

#### 10.1 Provisions Applicable

	Applicable to	Limit	
Restricted bands	789033 D02 General UNII Test Procedures New Rules v02r01	Field strength at 3m (dBuV/m)	
		PK: 74	AV: 54
Out of the restricted bands	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)
	FCC 15.407(b)(1)	PK: -27	PK: 68.2
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See Note 2	

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


E = 
$$\frac{1000000 \sqrt{30 P}}{2}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

#### 10.2 Measurement Procedure


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.(Test frequency below 1GHz)
- 5. RBW = 1 MHz; VBW= 3 MHz; Sweep = auto; Detector function = peak.(Test frequency Above 1GHz)
- 6. Set SPA Trace 1 Max hold, then View.
- 7. Mark the maximum useless stray point and compare it with the limit value to record the result.

## 10.3 Measurement Setup (Block Diagram of Configuration)

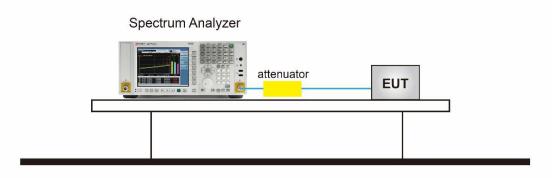

Any report havi g/Inspection


Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





#### 10.4 Measurement Results


# Test Graphs of Spurious Emissions outside of the 5.15-5.25 GHz band for transmitters operating in the 5.15-5.25 GHz band

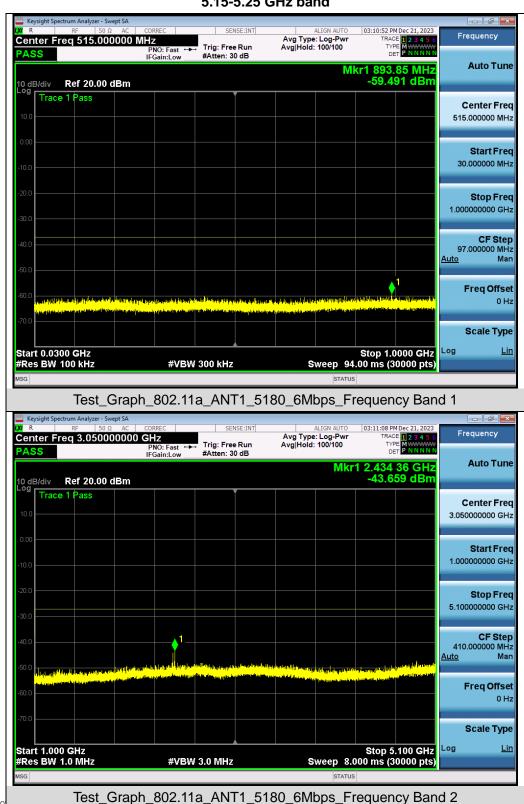


Any report having no esting/Inspection

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




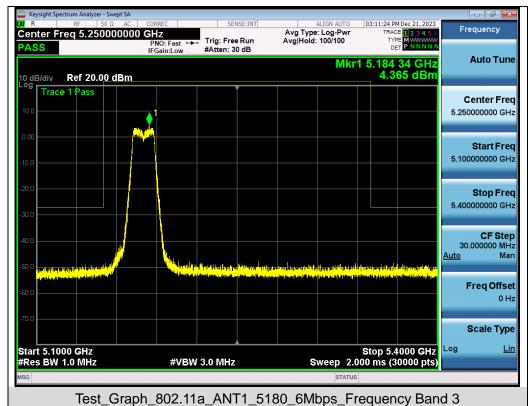








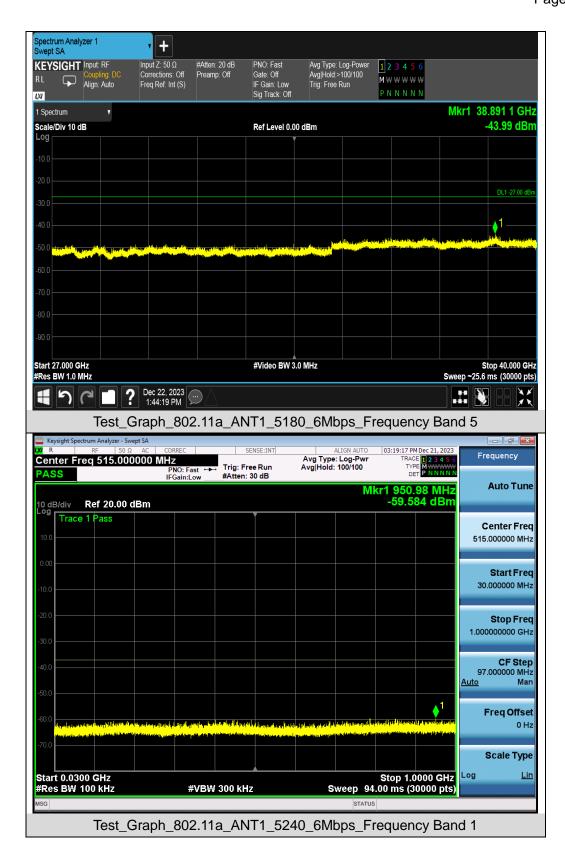




0 Hz

Scale Type

Log

Stop 5.4000 GHz Sweep 2.000 ms (30000 pts)



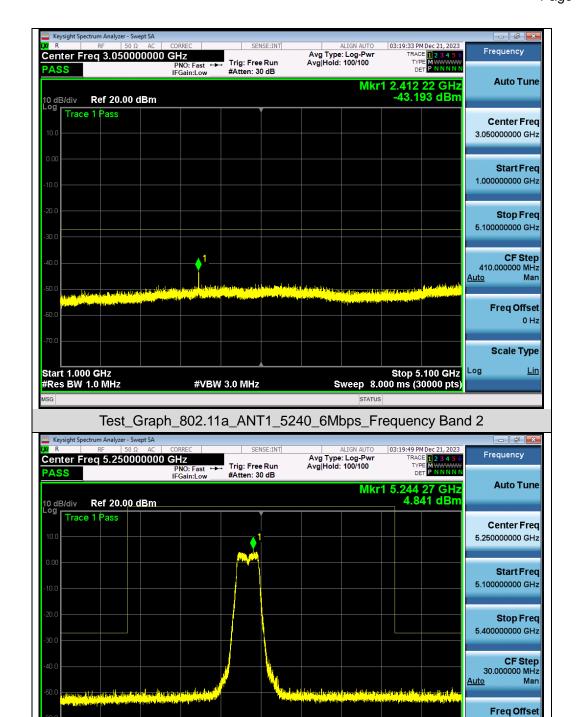


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11a ANT1 5240 6Mbps Frequency Band 3


#VBW 3.0 MHz

Start 5.1000 GHz #Res BW 1.0 MHz






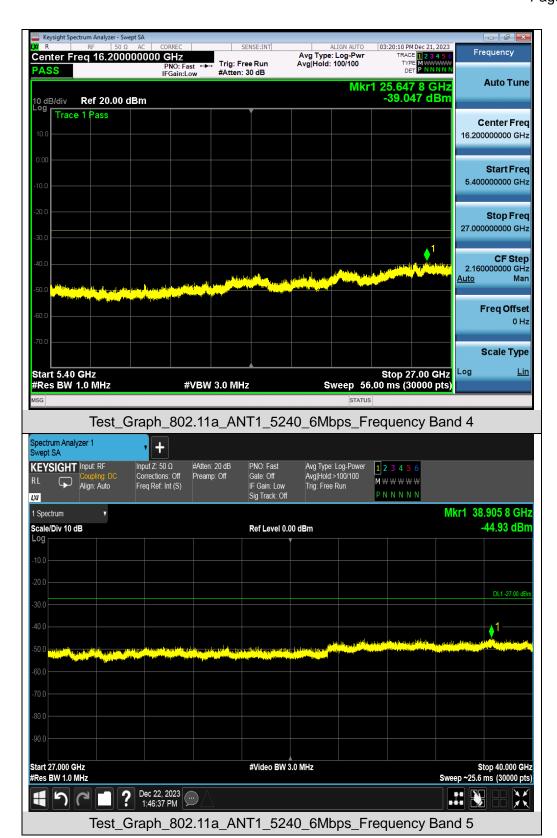





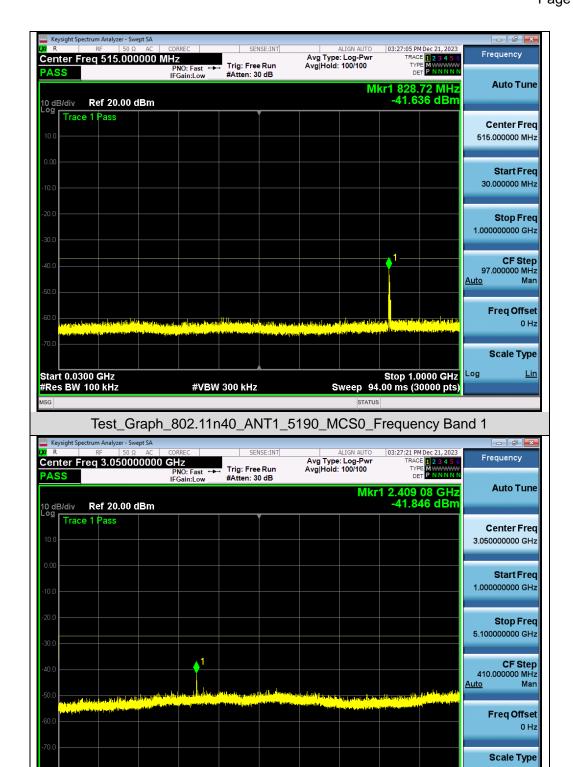


Test Graph 802.11n40 ANT1 5190 MCS0 Frequency Band 2


#VBW 3.0 MHz

Stop 5.100 GHz Sweep 8.000 ms (30000 pts)


Start 1.000 GHz #Res BW 1.0 MHz






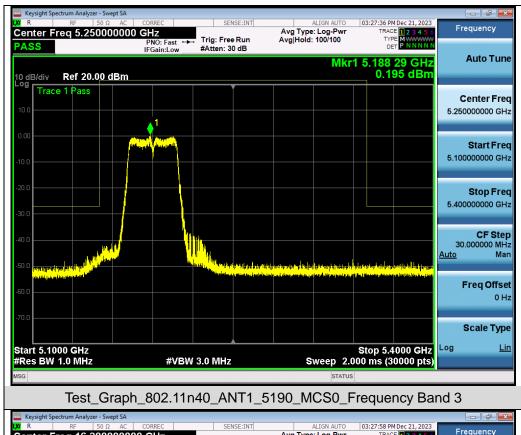








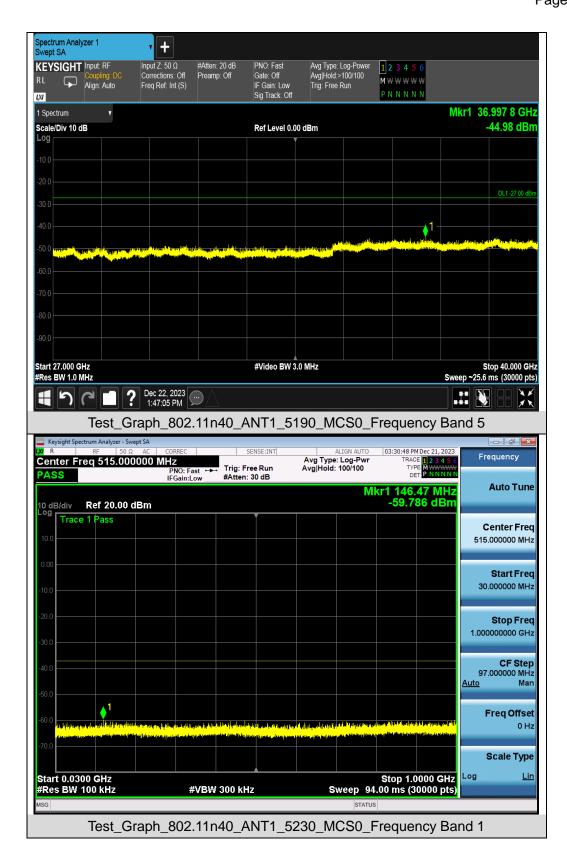




0 Hz

Scale Type

Log

Stop 5.4000 GHz Sweep 2.000 ms (30000 pts)



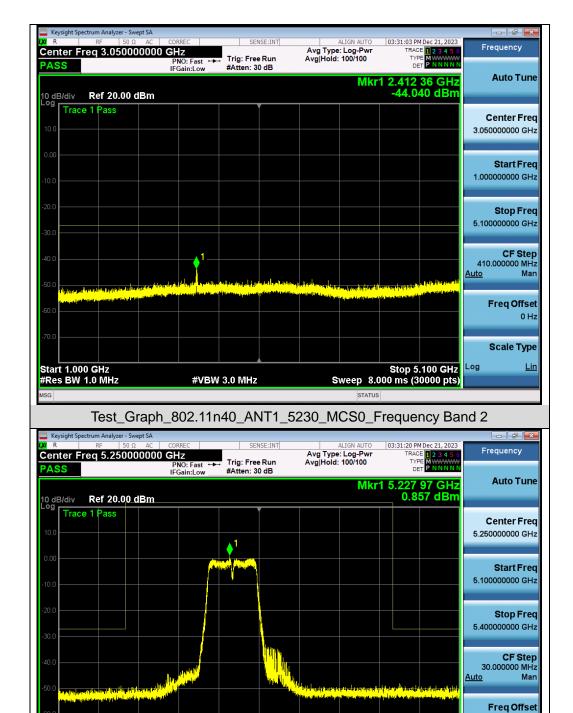


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11n40 ANT1 5230 MCS0 Frequency Band 3


#VBW 3.0 MHz

Start 5.1000 GHz #Res BW 1.0 MHz





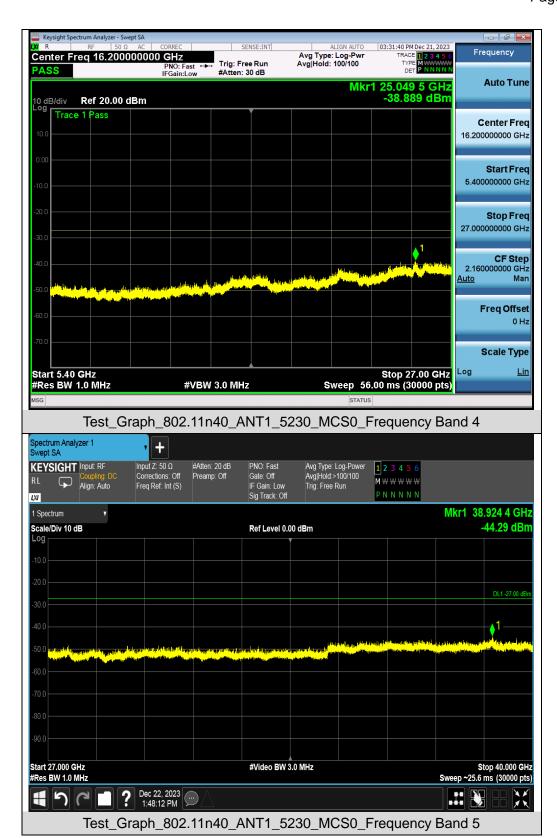




0 Hz

Scale Type

Stop 5.100 GHz Sweep 8.000 ms (30000 pts)



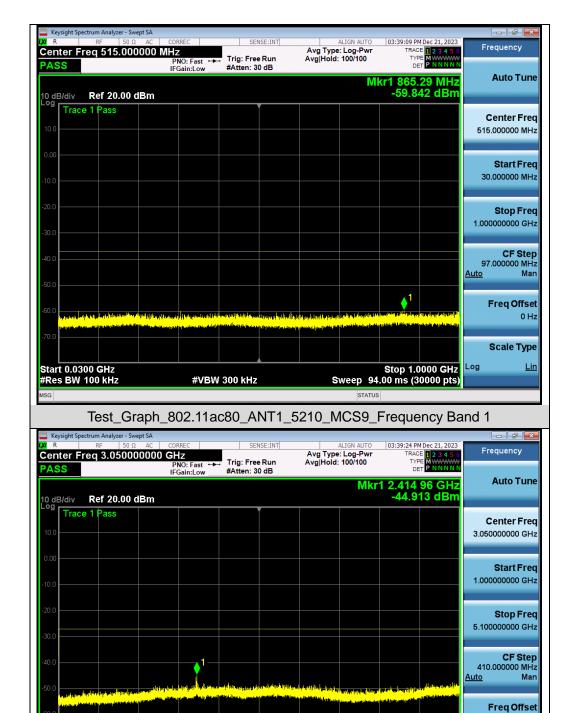


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_802.11ac80\_ANT1\_5210\_MCS9\_Frequency Band 2

#VBW 3.0 MHz


Start 1.000 GHz #Res BW 1.0 MHz






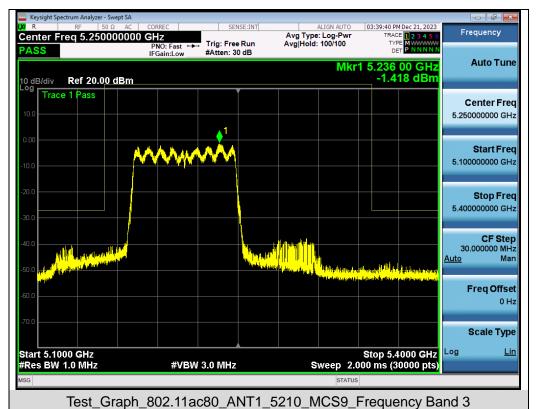









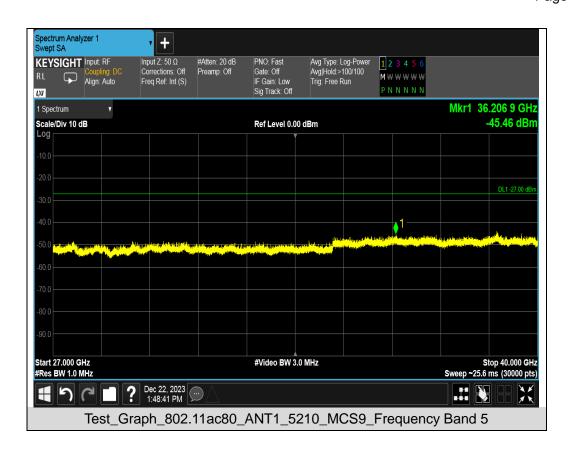








## Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

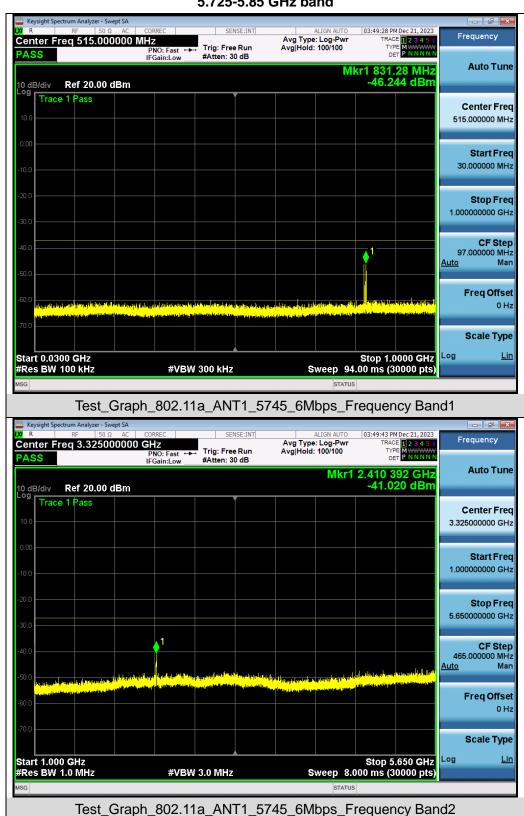







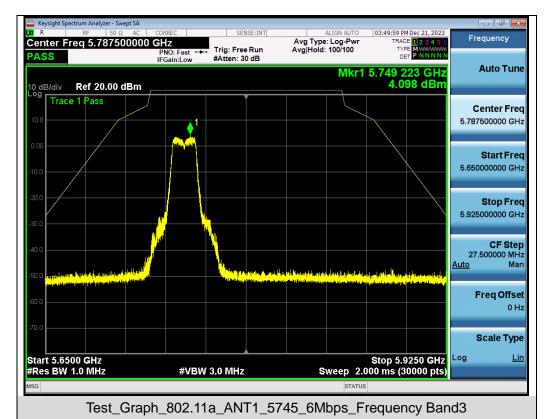


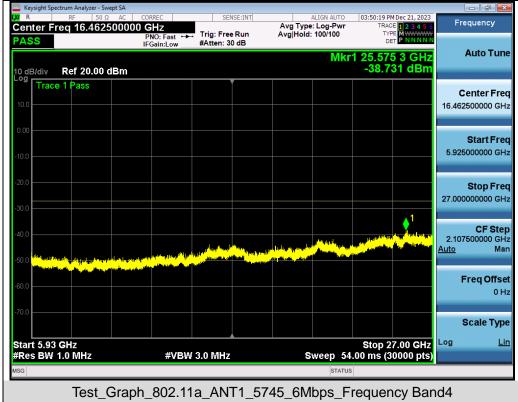






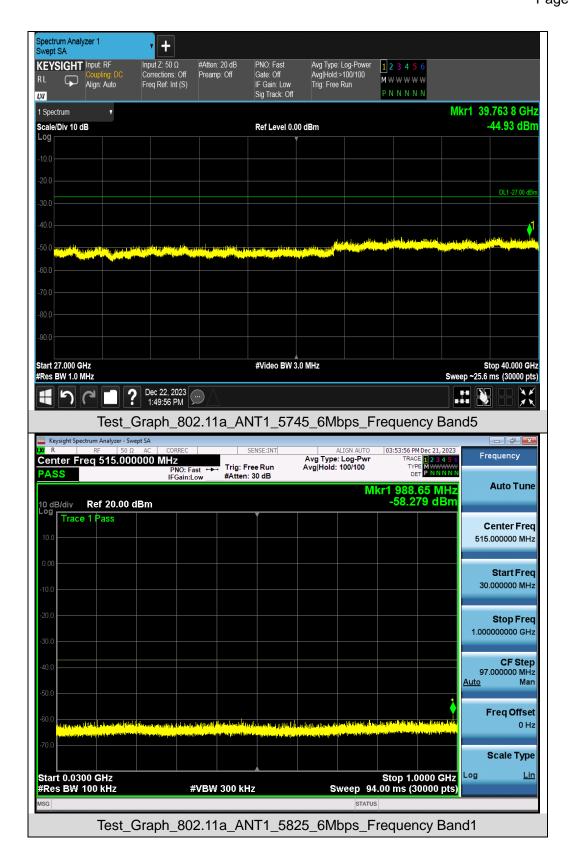





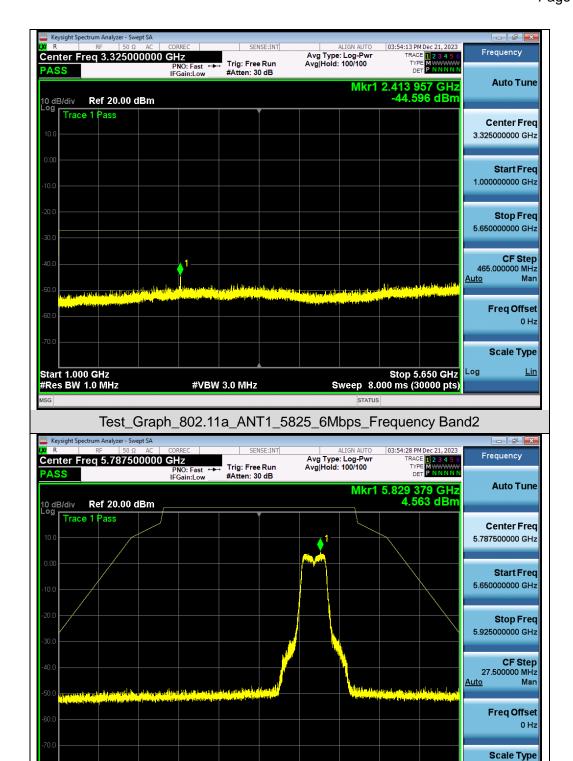


Test Graph 802.11a ANT1 5825 6Mbps Frequency Band3


#VBW 3.0 MHz


Stop 5.9250 GHz Sweep 2.000 ms (30000 pts)

Start 5.6500 GHz #Res BW 1.0 MHz







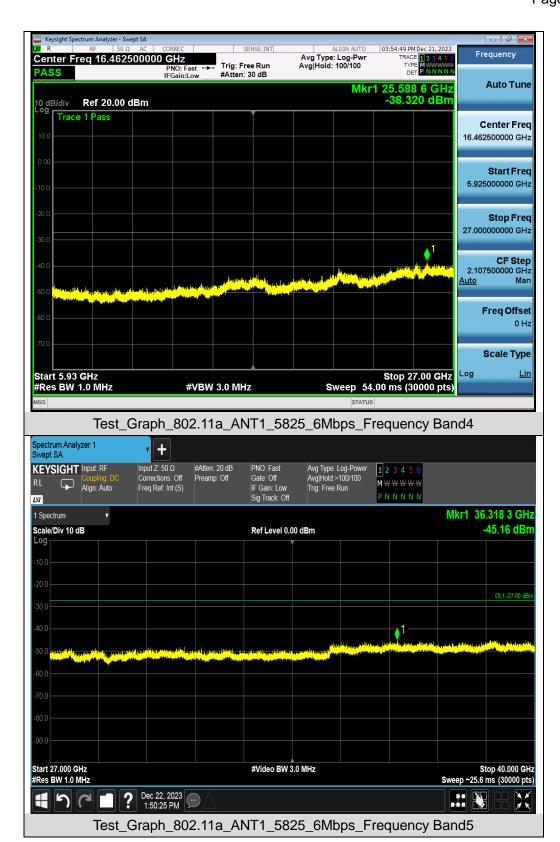






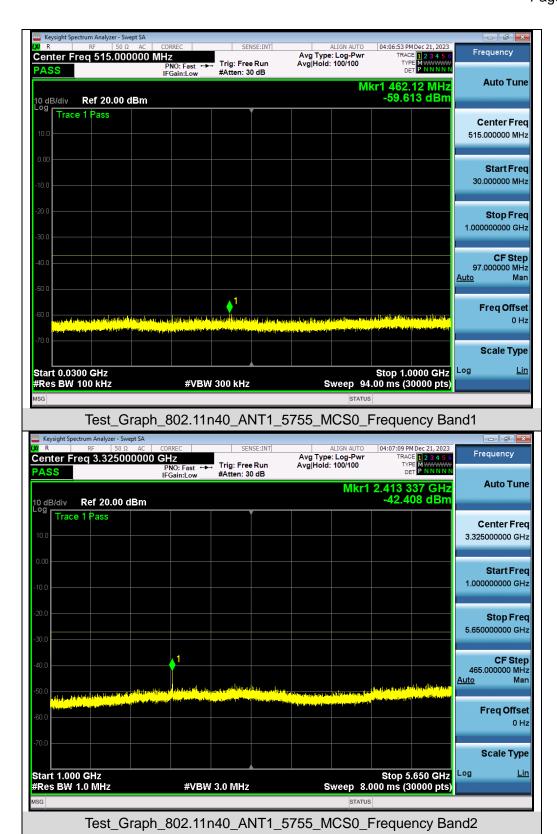







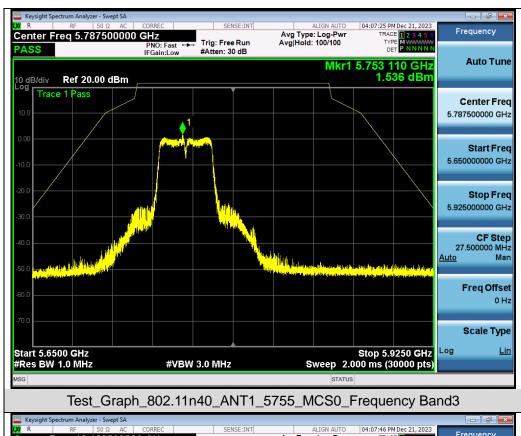









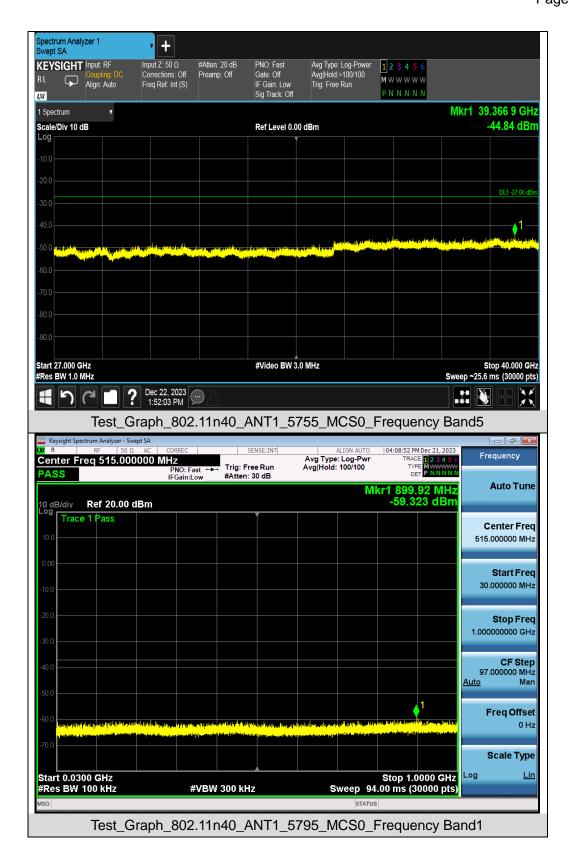





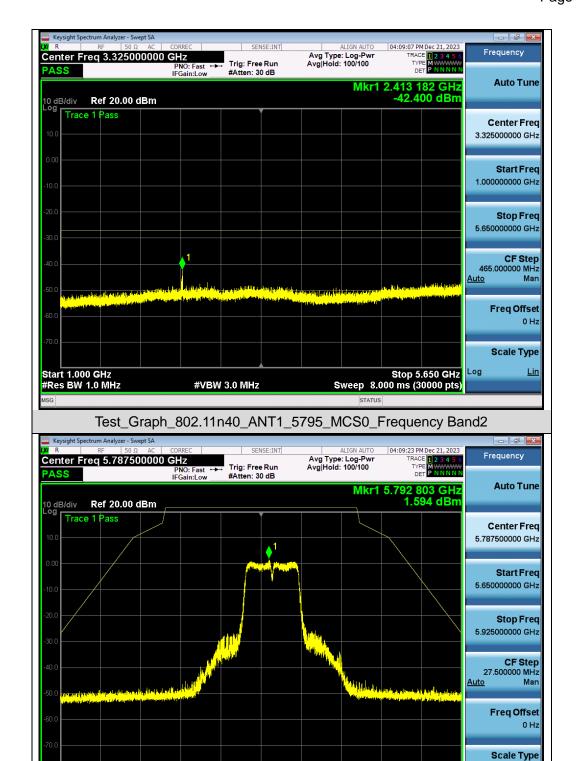


Test Graph 802.11n40 ANT1 5795 MCS0 Frequency Band3


**#VBW 3.0 MHz** 


Stop 5.9250 GHz Sweep 2.000 ms (30000 pts) Log

Start 5.6500 GHz #Res BW 1.0 MHz





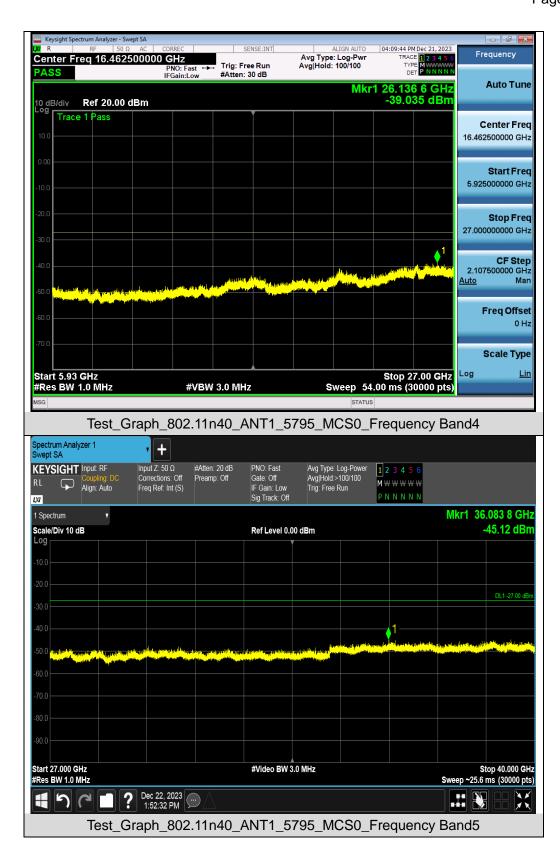




Scale Type

Log

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)



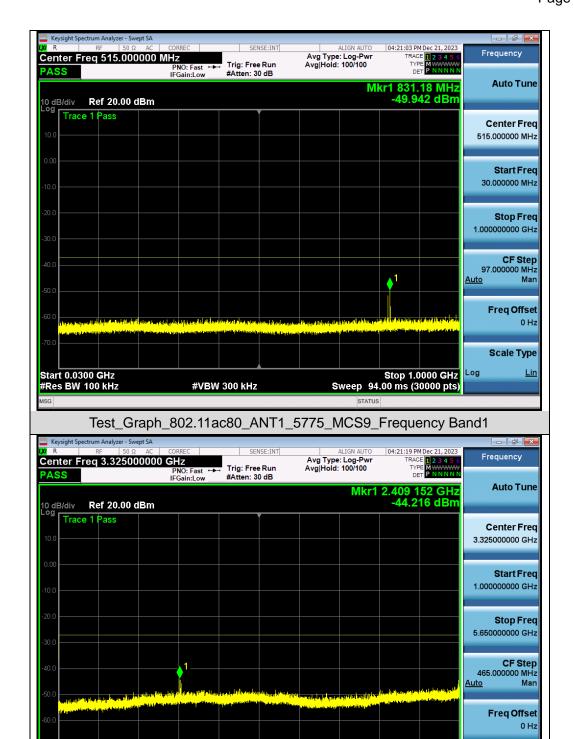

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11ac80\_ANT1\_5775\_MCS9\_Frequency Band2


#VBW 3.0 MHz

Start 1.000 GHz #Res BW 1.0 MHz












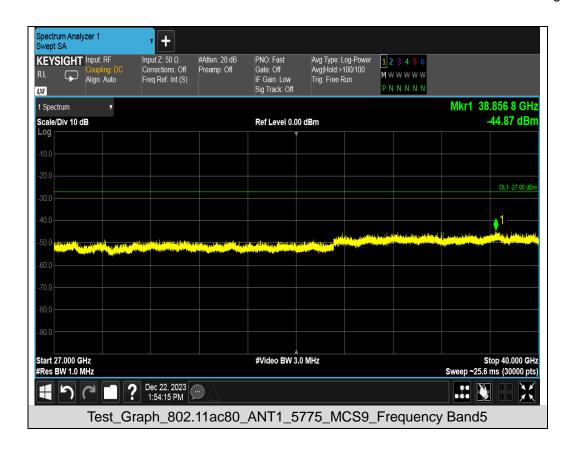



# 11. Radiated Spurious Emission

#### 11.1 Measurement Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dBuV/m) = 20 \log Emission level (uV/m)$ .
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the
  peak field strength of any emission shall not exceed the maximum permitted average limits, specified
  above by more than 20dB under any condition of modulation.

	Applicable to	Limit			
Restricted	789033 D02 General UNII Test	Field strength at 3m (dBuV/m)			
bands	Procedures New Rules v02r01	PK: 74	AV: 54		
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)		
Out of the	FCC 15.407(b)(1)				
restricted bands	15.407(b)(2)	PK: -27	PK: 68.2		
	15.407(b)(3)				
	15.407(b)(4)	See Note 2			

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

E = 
$$\frac{1000000 \sqrt{30 P}}{3}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Page 94 of 115

#### 11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 95 of 115

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

### **♦** Procedure for Unwanted Emissions Measurements Below 1000MHz:

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

# **♦** Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:


- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

### Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

#### Procedures for Average Unwanted Emissions Measurements Above 1000MHz:


- RBW = 1 MHz
- VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep) ≥ RBW/2.
- Averaging type = power averaging (RMS)
- The correction factor shall be offset is 10  $\log (1/x)$ , where x is the duty cycle.






# 11.3 Measurement Setup (Block Diagram of Configuration)


# Radiated Emission Test Setup 9kHz-30MHz

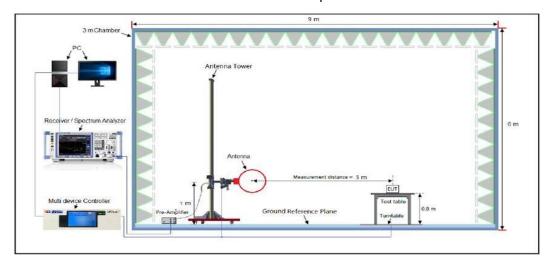

### Radiated Emission Test Setup 30MHz-1000MHz

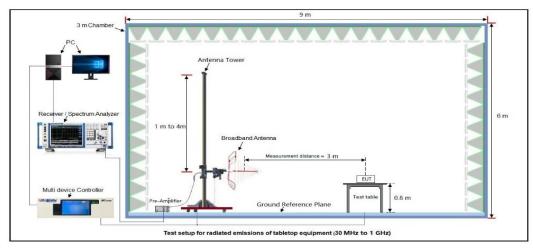

### Radiated Emission Test Setup Above 1000MHz

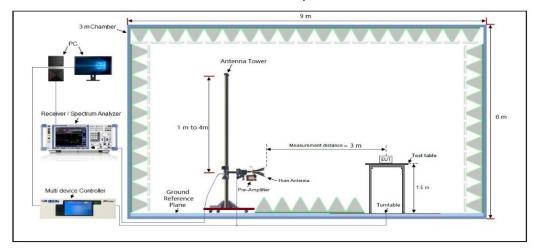

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




#### 11.4 Measurement Result

### **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

### Radiated Emission Test Results at 30MHz-1GHz

EUT Name	USB ADAPTER	Model Name	WB603
Temperature	23.5℃	Relative Humidity	61.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n(40MHz)_5795MHz	Antenna	Horizontal

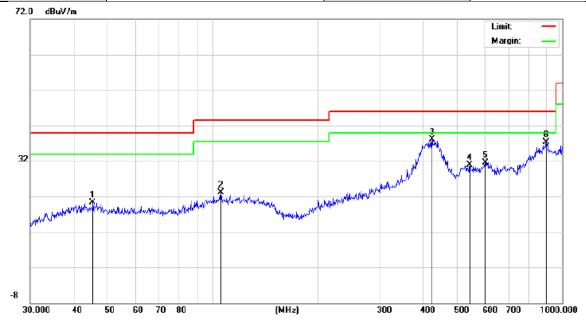


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		45.2165	6.84	13.53	20.37	40.00	-19.63	peak
2	1	05.2717	6.76	16.25	23.01	43.50	-20.49	peak
3	* 4	23.5403	16.45	21.56	38.01	46.00	-7.99	peak
4	5	43.2741	6.89	23.95	30.84	46.00	-15.16	peak
5	6	01.4265	6.44	25.11	31.55	46.00	-14.45	peak
6	9	00.1473	5.50	31.78	37.28	46.00	-8.72	peak

# **Result: Pass**



EUT Name	USB ADAPTER	Model Name	WB603
Temperature	23.5℃	Relative Humidity	61.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n(40MHz)_5795MHz	Antenna	Vertical

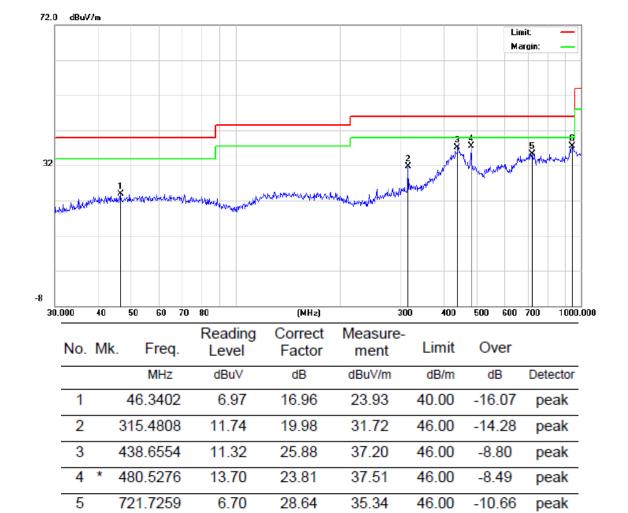

# **Result: Pass**

6

#### Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

942.1305

2. All test modes had been pre-tested, Refer to Chapter 5 of the report for details.

6.55

30.91

37.46

46.00

-8.54

peak



Page 99 of 115

### **Radiated Emissions Test Results Above 1GHz**

EUT Name	USB ADAPTER	Model Name	WB603	
Temperature	mperature 23.5°C R		61.8%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20_5180MHz	Antenna	Horizontal/Vertical	

# Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10360.042	47.61	9.14	56.75	68.20	-11.45	peak	
15540.063	40.38	10.22	50.60	74.00	-23.40	peak	
15540.063	31.59	10.22	41.81	54.00	-12.19	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

# Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
10360.042	46.28	9.14	55.42	68.20	-12.78	peak	
15540.063	41.11	10.22	51.33	74.00	-22.67	peak	
15540.063	30.97	10.22	41.19	54.00	-12.81	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

### **Result: Pass**



Page 100 of 115

# **Radiated Emissions Test Results Above 1GHz**

EUT Name	USB ADAPTER	Model Name	WB603
Temperature	23.5°C	Relative Humidity	61.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20_5200MHz	Antenna	Horizontal/Vertical

### Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10400.042	47.61	9.14	56.75	68.20	-11.45	peak	
15600.063	41.01	10.22	51.23	74.00	-22.77	peak	
15600.063	32.55	10.22	42.77	54.00	-11.23	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

# Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10400.042	46.28	9.14	55.42	68.20	-12.78	peak	
15600.063	40.29	10.22	50.51	74.00	-23.49	peak	
15600.063	31.24	10.22	41.46	54.00	-12.54	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

**Result: Pass** 



Page 101 of 115

# **Radiated Emissions Test Results Above 1GHz**

EUT Name	USB ADAPTER	Model Name	WB603
Temperature	23.5°C	Relative Humidity	61.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20_5240MHz	Antenna	Horizontal/Vertical

# Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10480.042	47.61	9.27	56.88	68.20	-11.32	peak		
15720.063	42.61	10.38	52.99	74.00	-21.01	peak		
15720.063	32.48	10.38	42.86	54.00	-11.14	AVG		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

# Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)				
10480.042	48.61	9.27	57.88	68.20	-10.32	peak			
15720.063	43.54	10.38	53.92	74.00	-20.08	peak			
15720.063	32.69	10.38	43.07	54.00	-10.93	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

**Result: Pass** 



Page 102 of 115

# **Radiated Emissions Test Results Above 1GHz**

EUT Name	USB ADAPTER	Model Name	WB603
Temperature	23.5°C	Relative Humidity	61.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20_5745MHz	Antenna	Horizontal/Vertical

### Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11490.042	47.52	9.42	56.94	74.00	-17.06	peak		
11490.042	35.46	9.42	44.88	54.00	-9.12	AVG		
17235.063	41.57	10.51	52.08	68.20	-16.12	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

# Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11490.042	45.29	9.42	54.71	74.00	-19.29	peak		
11490.042	36.24	9.42	45.66	54.00	-8.34	AVG		
17235.063	40.58	10.51	51.09	68.20	-17.11	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

**Result: Pass** 



Page 103 of 115

### **Radiated Emissions Test Results Above 1GHz**

EUT Name	USB ADAPTER	Model Name	WB603
Temperature	23.5℃	Relative Humidity	61.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20_5785MHz	Antenna	Horizontal/Vertical

# Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type				
11570.042	47.34	9.42	56.76	74.00	-17.24	peak				
11570.042	38.62	9.42	48.04	54.00	-5.96	AVG				
17355.063	42.15	10.51	52.66	68.20	-15.54	peak				
Remark:	Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.										

# Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11570.042	48.62	9.42	58.04	74.00	-15.96	peak		
11570.042	38.41	9.42	47.83	54.00	-6.17	AVG		
17355.063	43.05	10.51	53.56	68.20	-14.64	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

### **Result: Pass**



Page 104 of 115

### **Radiated Emissions Test Results Above 1GHz**

EUT Name	USB ADAPTER	Model Name	WB603
Temperature	23.5℃	Relative Humidity	61.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20_5825MHz	Antenna	Horizontal/Vertical

### Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11650.042	47.63	9.62	57.25	74.00	-16.75	peak		
11650.042	37.54	9.62	47.16	54.00	-6.84	AVG		
17475.063	42.04	10.75	52.79	68.20	-15.41	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

### Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11650.042	46.25	9.62	55.87	74.00	-18.13	peak		
11650.042	35.94	9.62	45.56	54.00	-8.44	AVG		
17475.063	40.29	10.75	51.04	68.20	-17.16	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

### **Result: Pass**

#### Note:


- The amplitude of other spurious emissions from 1GHz to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Amplifier gain, Margin=Measure Result-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been pre-tested. Refer to Chapter 5 of the report for details.




Test Result for Band edge Emission at Restricted bands

EUT	USB ADAPTER	Model Name	WB603
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal


### Test Graph for Peak Measurement

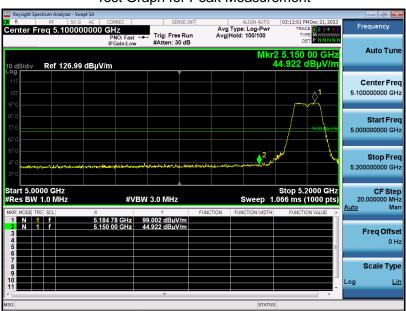

Test Graph for Average Measurement

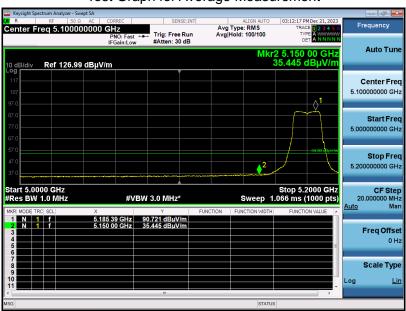


**RESULT: PASS** 






EUT	USB ADAPTER	Model Name	WB603
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement

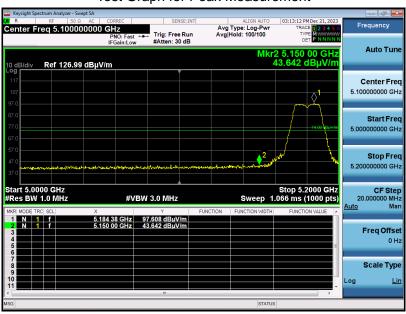


Test Graph for Average Measurement

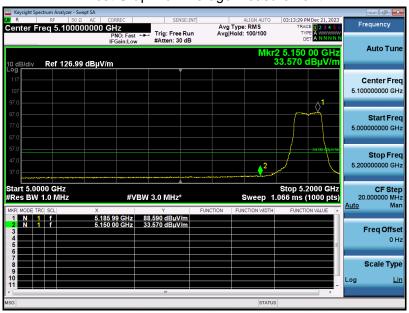




EUT	USB ADAPTER	Model Name	WB603
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement

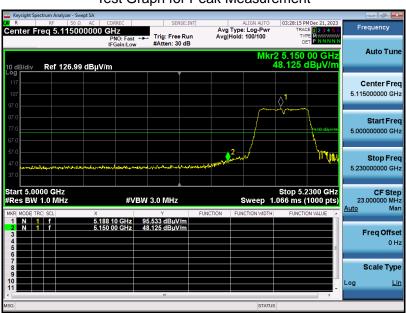

Test Graph for Average Measurement









EUT	USB ADAPTER	Model Name	WB603
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

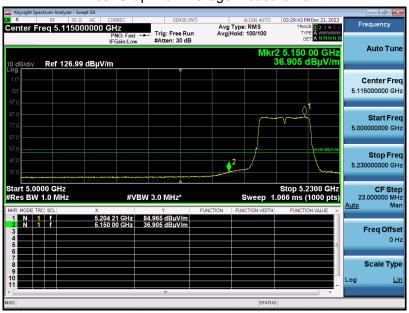







EUT	USB ADAPTER	Model Name	WB603
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

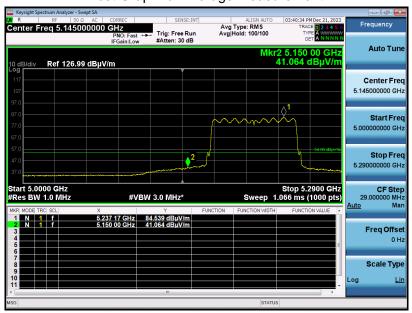







EUT	USB ADAPTER	Model Name	WB603
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement

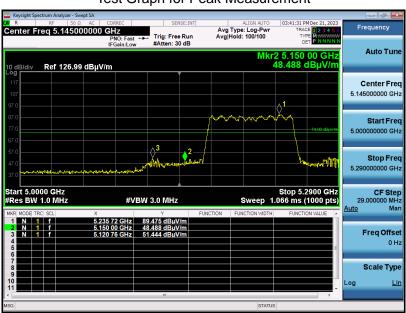

Test Graph for Average Measurement

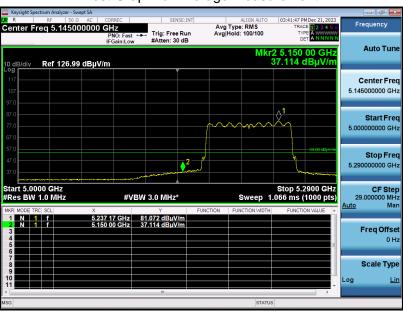

#### Note:

- 1. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.
- 2. All test modes had been pre-tested, Refer to Chapter 5 of the report for details.

  Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



# 12. AC Power Line Conducted Emission Test


### 12.1 Measurement limit

F	Maximum RF	Line Voltage
Frequency	Q.P (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

# 12.2 Block Diagram of Line Conducted Emission Test

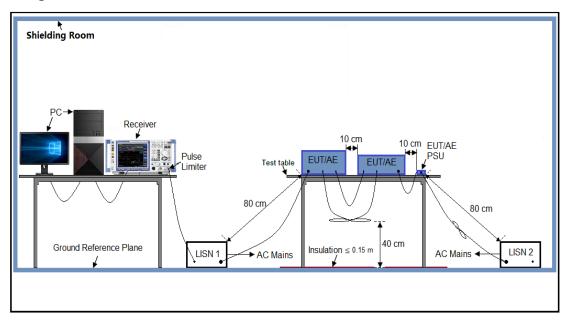



Page 112 of 115

### 12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.
- 4. The worst mode is 802.11n20 5180MHz, antenna 1 and antenna 2 work together.




# 12.5 Test Result of Line Conducted Emission Test

	A	C Power I	Line Cond	ideled Li	1111551011 16	:51	
est Mode	802.11n(40MHz	z)_5795MH	z	LIS	SN Line	Hot S	ide
Level	I [dBµ∨]						
80					,,,,		
70			 				
60			L		!		
50 40 V					;		
30 12-	WANA AND A MARKET AND	Marin India	kata adap = = = =	 	!		
20	War and Company	*	<u>×                                      </u>	PHILIPPINAL WALL	in the second		Web Tanana
10			L				On Charletter
0		·     -	I 				
-10 150	0k 300k 400k	600k 800k 1	M 2	M 3M	4M 5M 6M	8M 10M	20M 30M
			Frequ	ency [Hz]			
x x x ME	ES agc_fin						
	EASUREMENT		: "agc_	fin"			
	EASUREMENT 023/12/19 9:5 Frequency MHz	57	: "agc_ Transd dB	fin"  Limit  dBµV	Margin dB	Detector	Line
	023/12/19 9:5 Frequency	57 Level	Transd	Limit	_	Detector	Line Ll
	023/12/19 9:5 Frequency MHz 0.154000 0.178000	57 Level dBµV 43.10 38.00	Transd dB	Limit dBµV 66 65	dB 22.7 26.6		
	023/12/19 9:5 Frequency MHz 0.154000 0.178000 0.522000	57 Level dBµV 43.10 38.00 27.80	Transd dB 6.1 6.1 6.2	Limit dBµV 66 65 56	dB 22.7 26.6 28.2	QP QP QP	L1 L1 L1
	023/12/19 9:5 Frequency MHz 0.154000 0.178000 0.522000 0.966000	57 Level dBµV 43.10 38.00 27.80 22.90	Transd dB 6.1 6.1 6.2 6.2	Limit dBµV 66 65 56	22.7 26.6 28.2 33.1	QP QP QP QP	L1 L1 L1 L1
	023/12/19 9:5 Frequency MHz 0.154000 0.178000 0.522000	57 Level dBµV 43.10 38.00 27.80	Transd dB 6.1 6.1 6.2	Limit dBµV 66 65 56	dB 22.7 26.6 28.2	QP QP QP	L1 L1 L1
20	023/12/19 9:5 Frequency MHz  0.154000 0.178000 0.522000 0.966000 1.014000	57 Level dBµV 43.10 38.00 27.80 22.90 22.90 22.10	Transd dB 6.1 6.1 6.2 6.2 6.2 6.2	Limit dBµV 66 65 56 56 56	22.7 26.6 28.2 33.1 33.1	QP QP QP QP QP	L1 L1 L1 L1 L1
20 M	023/12/19 9:5 Frequency MHz  0.154000 0.178000 0.522000 0.966000 1.014000 1.358000  EASUREMENT	57 Level dBµV  43.10 38.00 27.80 22.90 22.10  RESULT	Transd dB 6.1 6.2 6.2 6.2 6.2	Limit dBµV 66 65 56 56 56 56	dB 22.7 26.6 28.2 33.1 33.1 33.9	QP QP QP QP QP	L1 L1 L1 L1 L1 L1
20 M	023/12/19 9:5 Frequency MHz  0.154000 0.178000 0.522000 0.966000 1.014000 1.358000	57 Level dBµV  43.10 38.00 27.80 22.90 22.10  RESULT	Transd dB 6.1 6.2 6.2 6.2 6.2 6.2	Limit dBµV 66 65 56 56 56 56	dB 22.7 26.6 28.2 33.1 33.1 33.9	QP QP QP QP QP	L1 L1 L1 L1 L1 L1
20 M	023/12/19 9:3 Frequency MHz  0.154000 0.178000 0.522000 0.966000 1.014000 1.358000  EASUREMENT  023/12/19 9:3 Frequency MHz	Level dBμV 43.10 38.00 27.80 22.90 22.90 22.10 RESULT 57 Level	Transd dB 6.1 6.2 6.2 6.2 6.2 6.2	Limit dBµV 66 65 56 56 56 56	dB 22.7 26.6 28.2 33.1 33.1 33.9 Margin dB	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
20 M	023/12/19 9:3 Frequency MHz  0.154000 0.178000 0.522000 0.966000 1.014000 1.358000  EASUREMENT  023/12/19 9:3 Frequency MHz  0.158000 0.530000	57 Level dBμV  43.10 38.00 27.80 22.90 22.10   RESULT  57 Level dBμV  28.20 22.60	Transd dB 6.1 6.2 6.2 6.2 6.2 6.2 Transd dB 6.1 6.2	Limit dBµV 66 65 56 56 56 56 40 Limit dBµV	dB 22.7 26.6 28.2 33.1 33.1 33.9  Margin dB 27.4 23.4	QP QP QP QP QP QP AV	L1 L1 L1 L1 L1 L1 L1 L1
20 M	023/12/19 9:3 Frequency MHz  0.154000 0.178000 0.522000 0.966000 1.014000 1.358000  EASUREMENT  023/12/19 9:3 Frequency MHz  0.158000 0.530000 1.126000	57 Level dBμV 43.10 38.00 27.80 22.90 22.10 RESULT 57 Level dBμV 28.20 22.60 16.50	Transd dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 6.2 6.2 6.2 6.2	Limit dBµV 66 65 56 56 56 56 46 46 46	dB  22.7 26.6 28.2 33.1 33.1 33.9  Margin dB  27.4 23.4 29.5	QP QP QP QP QP QP AV AV	L1
20 M	023/12/19 9:3 Frequency MHz  0.154000 0.178000 0.522000 0.966000 1.014000 1.358000  EASUREMENT  023/12/19 9:3 Frequency MHz  0.158000 0.530000 1.126000 4.810000	57 Level dBμV  43.10 38.00 27.80 22.90 22.10   RESULT  57 Level dBμV  28.20 22.60	Transd dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 6.2 6.2 6.3	Limit dBµV 66 65 56 56 56 56 56 46 46 46 46	dB  22.7 26.6 28.2 33.1 33.1 33.9  Margin dB  27.4 23.4 29.5 34.2	QP QP QP QP QP QP AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1

# **Result: Pass**



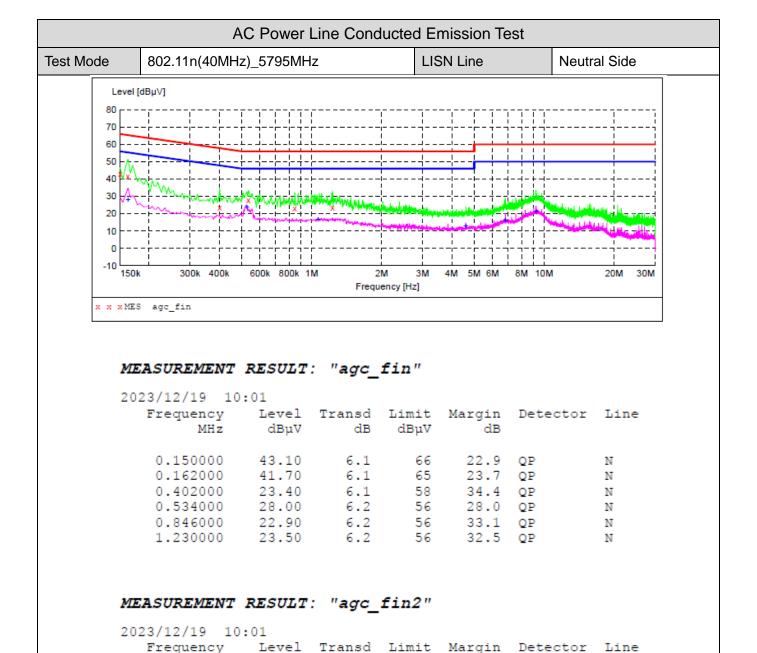

### **Result: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

dΒμV

55

46

46

46

50

50

dB

ΑV

ΑV

ΑV

ΑV

ΑV

ΑV

N

Ν

Ν

Ν

Ν

Ν

27.2

22.0

29.3

32.9

33.4

28.3

dΒ

6.1

6.2

6.2

6.3

6.5

6.6

MHz

0.162000

0.526000

1.066000

4.602000

6.810000

9.206000

dΒμV

28.20

24.00

16.70

13.10

16.60

21.70



Page 115 of 115

# **Appendix I: Photographs of Test Setup**

Refer to the Report No.: AGC00688231203AP02

Appendix II: Photographs of EUT

Refer to the Report No.: AGC00688231203AP03

----End of Report----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.