



## FCC Part 15.247

### TEST REPORT

For

**Hontus, Ltd.**

**11450 NW 122nd Street, Building 100 Miami, Florida USA 33178, United States**

**FCC ID: 2AKE6SPACECASE-2000**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Space Case Lite
<b>Report Producer:</b> <u>Jane Lee</u>	
<b>Report Number:</b> <u>RTWL170830001-00A</u>	
<b>Report Date:</b> <u>2017-09-21</u>	
<b>Reviewed By:</b> <u>Jerry Chang</u>	
Bay Area Compliance Laboratories Corp.(Taiwan) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2) 2647 6898 Fax: +886 (2) 2647 6895 <a href="http://www.bacl.com.tw">www.bacl.com.tw</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan)

**REVISION HISTORY**

<b>Revision</b>	<b>No.</b>	<b>Report Number</b>	<b>Issue Date</b>	<b>Description</b>	<b>Author/ Revised by</b>
1.0	RTWL17830001	RTWL170830001-00A	2017.09.21	Original Report	Jane

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION.....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	OBJECTIVE.....	5
1.3	RELATED SUBMITTAL(S)/GRANT(S) .....	6
1.4	TEST METHODOLOGY .....	6
1.5	TEST FACILITY .....	6
<b>2</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
2.1	DESCRIPTION OF TEST CONFIGURATION.....	7
2.2	EQUIPMENT MODIFICATIONS .....	7
2.3	EUT EXERCISE SOFTWARE.....	7
2.4	SUPPORT EQUIPMENT LIST AND DETAILS .....	7
2.5	EXTERNAL CABLE LIST AND DETAILS .....	7
2.6	BLOCK DIAGRAM OF TEST SETUP.....	8
2.7	DUTY CYCLE .....	10
<b>3</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>4</b>	<b>FCC §15.247(I), §1.1310, § 2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b>	<b>12</b>
4.1	APPLICABLE STANDARD .....	12
4.2	RF EXPOSURE EVALUATION RESULT .....	12
<b>5</b>	<b>FCC §15.203 – ANTENNA REQUIREMENTS.....</b>	<b>13</b>
5.1	APPLICABLE STANDARD .....	13
5.2	ANTENNA LIST AND DETAILS .....	13
<b>6</b>	<b>FCC §15.207 - AC LINE CONDUCTED EMISSIONS.....</b>	<b>14</b>
6.1	APPLICABLE STANDARD .....	14
6.2	MEASUREMENT UNCERTAINTY .....	14
6.3	EUT SETUP.....	14
6.4	EMI TEST RECEIVER SETUP .....	15
6.5	TEST PROCEDURE .....	15
6.6	CORRECTED FACTOR & MARGIN CALCULATION.....	15
6.7	TEST EQUIPMENT LIST AND DETAILS .....	15
6.8	TEST ENVIRONMENTAL CONDITIONS.....	16
6.9	TEST RESULTS .....	16
<b>7</b>	<b>FCC §15.209, §15.205 , §15.247(D) – SPURIOUS EMISSIONS.....</b>	<b>19</b>
7.1	APPLICABLE STANDARD .....	19
7.2	MEASUREMENT UNCERTAINTY .....	20
7.3	EUT SETUP.....	20
7.4	EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	21
7.5	TEST PROCEDURE .....	21
7.6	CORRECTED FACTOR & MARGIN CALCULATION.....	22
7.7	TEST RESULTS SUMMARY .....	22
7.8	TEST EQUIPMENT LIST AND DETAILS .....	23
7.9	TEST ENVIRONMENTAL CONDITIONS.....	23
7.10	TEST RESULTS .....	24
<b>8</b>	<b>FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH .....</b>	<b>30</b>
8.1	APPLICABLE STANDARD .....	30
8.2	TEST PROCEDURE .....	30
8.3	TEST EQUIPMENT LIST AND DETAILS .....	30
8.4	TEST ENVIRONMENTAL CONDITIONS.....	30
8.5	TEST RESULTS .....	31
<b>9</b>	<b>FCC §15.247(B)(3) – MAXIMUM OUTPUT POWER .....</b>	<b>33</b>

9.1	APPLICABLE STANDARD .....	33
9.2	TEST PROCEDURE .....	33
9.3	TEST EQUIPMENT LIST AND DETAILS .....	33
9.4	TEST ENVIRONMENTAL CONDITIONS.....	34
9.5	TEST RESULTS .....	34
<b>10</b>	<b>FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>35</b>
10.1	APPLICABLE STANDARD .....	35
10.2	TEST PROCEDURE .....	35
10.3	TEST EQUIPMENT LIST AND DETAILS .....	35
10.4	TEST ENVIRONMENTAL CONDITIONS.....	35
10.5	TEST RESULTS .....	36
<b>11</b>	<b>FCC §15.247(E) – POWER SPECTRAL DENSITY .....</b>	<b>38</b>
11.1	APPLICABLE STANDARD .....	38
11.2	TEST PROCEDURE .....	38
11.3	TEST EQUIPMENT LIST AND DETAILS .....	38
11.4	TEST ENVIRONMENTAL CONDITIONS.....	39
11.5	TEST RESULTS .....	39

## 1 General Information

---

### 1.1 Product Description for Equipment Under Test (EUT)

**Applicant:** Hontus, Ltd.

11450 NW 122nd Street, Building 100 Miami, Florida USA 33178,  
United States

**Manufacturer:** Hontus, Ltd.

11450 NW 122nd Street, Building 100 Miami, Florida USA 33178,  
United States

**Product:** Space Case Lite

**Main Model:** PT002-20IN-SBLK

**Series Model:** PT002-20IN-PCFT, PT002-20IN-PBLK, PT002-20IN-PSLK

**Trade Name:** Travel Planet

**Frequency Range:** 2402-2480 MHz

**Transmit Power:** BLE Mode: -2.91dBm

**Modulation Technique:** BLE Mode: GFSK

**Transmit Data Rate:** BLE Mode: 1 Mbps

**Number of Channels:** BLE Mode: 40 Channels

**Antenna Specification:** Chip Antenna/Gain: 3.45 dBi

**Voltage Range:** 5Vdc from USB

**Date of Test:** Aug 30, 2017 ~Sep 20, 2017

*\*All measurement and test data in this report was gathered from production sample serial number: 170830001*

*(Assigned by BACL, Taiwan). The EUT supplied by the applicant was received on 2017-08-30.*

### 1.2 Objective

This report is prepared on behalf of *Hontus, Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine compliance with FCC Part 15.247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

**1.3 Related Submittal(s)/Grant(s)**

N/A

**1.4 Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

KDB 558074 D01 DTS Meas Guidance v04

**1.5 Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located on  
 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.  
 68-3, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. (Taiwan) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3180) and the FCC designation No.TW3180 under the Mutual Recognition Agreement (MRA) in FCC Test. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 974454. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## 2 System Test Configuration

### 2.1 Description of Test Configuration

For BLE mode, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2442
2	2404	--	--
3	2406	--	--
4	2408	38	2476
--	--	39	2478
20	2440	40	2480

EUT was tested with Channel 1, 20 and 40.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power and PSD across all date rates bandwidths, and modulations

### 2.2 Equipment Modifications

No modification was made to the EUT

### 2.3 EUT Exercise Software

Used "Smart RF Studio 7" software.

Test Software Version		Engineering Mode		
Test Frequency		Low	Mid	High
Power Level Setting	BLE Mode	0	0	0

### 2.4 Support Equipment List and Details


Description	Manufacturer	Model Number	BSMI	FCC ID / DOC	S/N
Notebook	DELL	P62G	N/A	PD98260N GU	36113452562

### 2.5 External Cable List and Details

Cable Description	Length (m)	From	To
N/A	N/A	N/A	N/A


## 2.6 Block Diagram of Test Setup

See test photographs attached in Exhibit A for the actual connections between EUT and support equipment.  
Conduction:

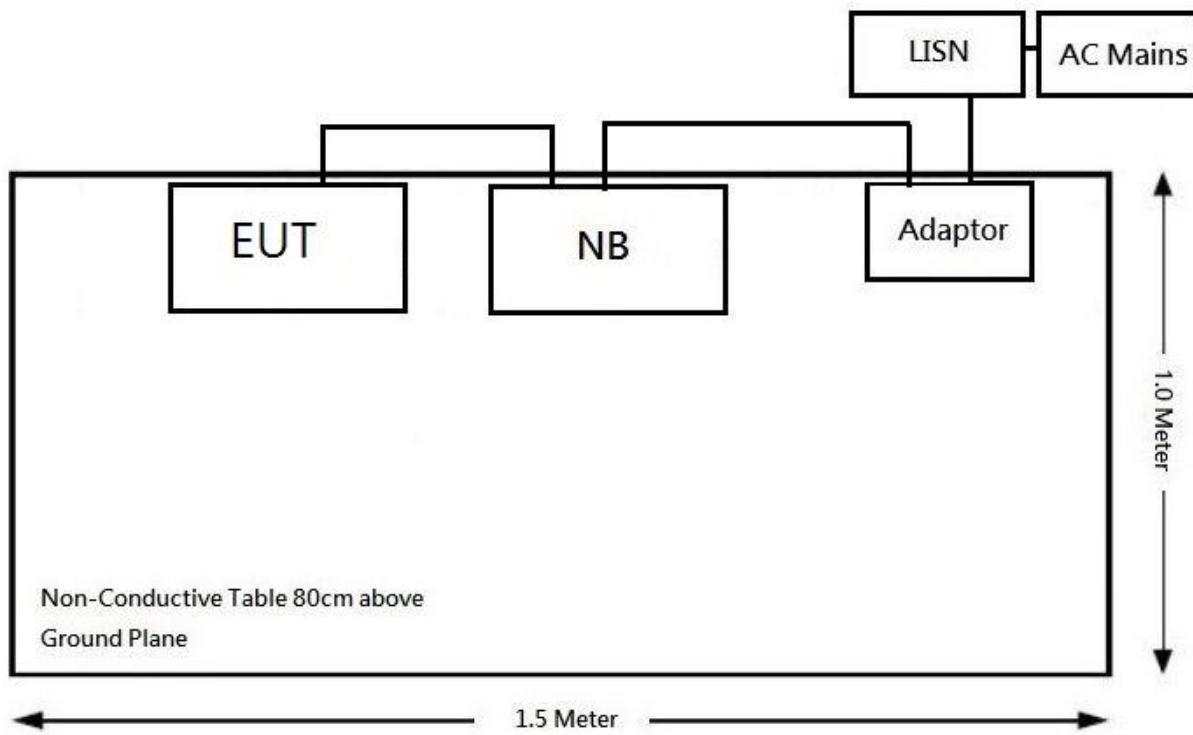


Radiation

Below 1GHz:

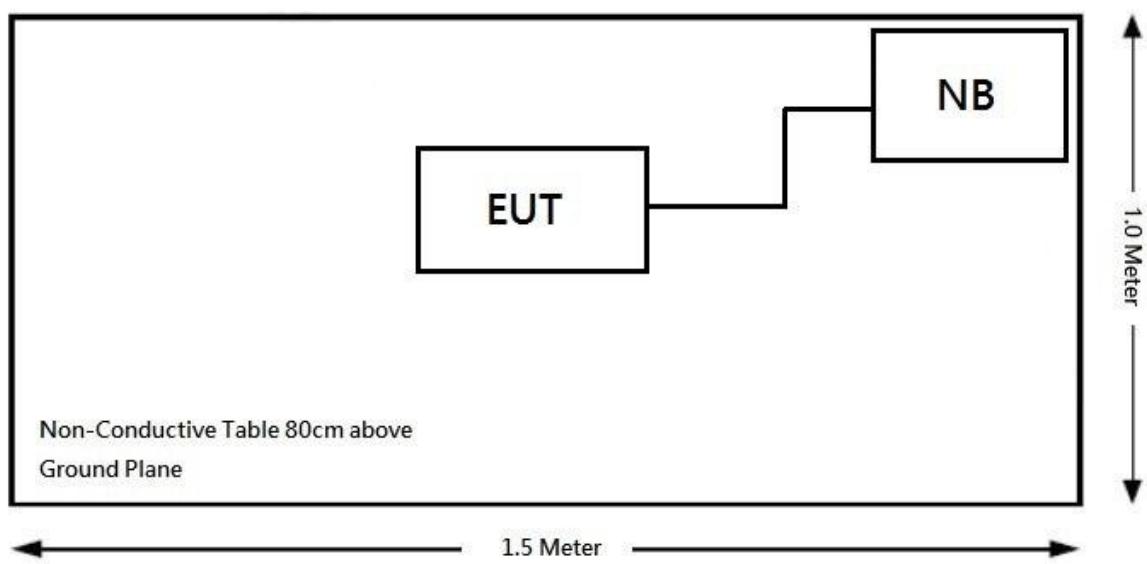

Above 1GHz:

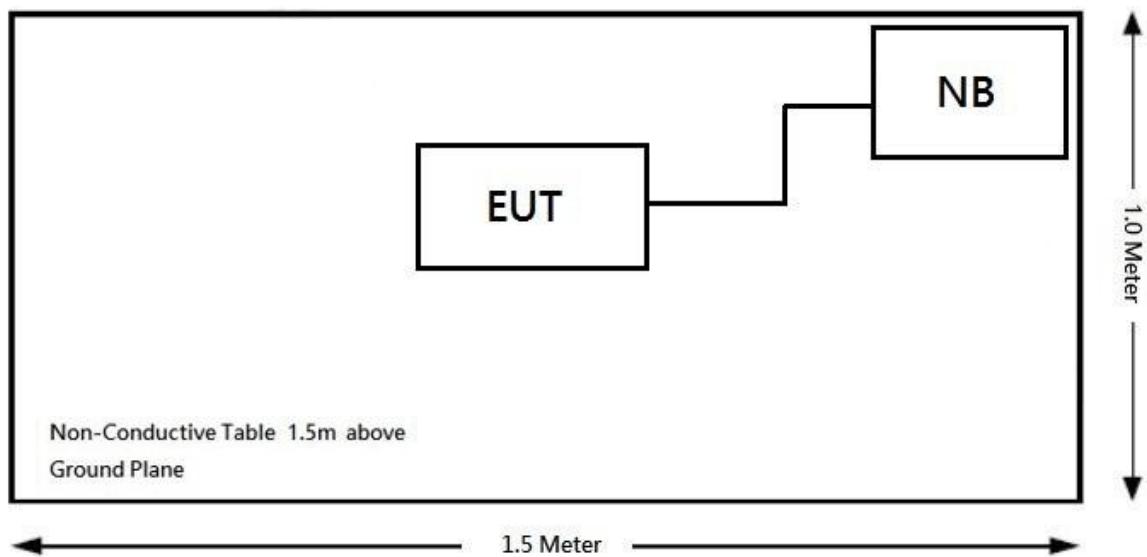

## 2.7 Duty Cycle


According to KDB 558074 D01 DTS Meas Guidance v04 section 6.0:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

Radio Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
BLE	10	10	100	0

Note: Duty Cycle Correction Factor =  $10 \times \log(1/\text{duty cycle})$

Please refer to the following plots.

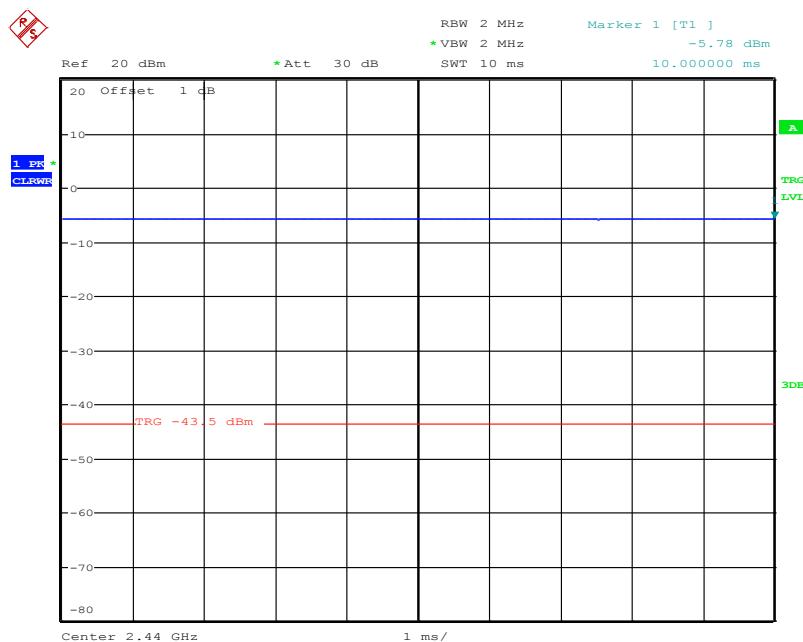

Date: 4.SEP.2017 14:51:30

### 3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1310 ,§ 2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## 4 FCC § 15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE)

### 4.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR<sup>2</sup> = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### 4.2 RF Exposure Evaluation Result

#### MPE evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
BLE	2480	3.45	2.21	-2.5	0.562	20	0.0003	1

**Result:** MPE evaluation meet 20 cm the requirement of standard.

## 5 FCC §15.203 – Antenna Requirements

### 5.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6 dBi

### 5.2 Antenna List and Details

Manufacturer	Antenna Type	Antenna Gain	Result
WinWave Electronic Co., Ltd.	Chip Antenna	3.45 dBi	Compliance

The EUT has an internal antenna arrangement, which was permanently attached, fulfill the requirement of this section.

## 6 FCC §15.207 - AC Line Conducted Emissions

### 6.1 Applicable Standard

FCC §15.207


### 6.2 Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN/ISN and receiver, LISN/ISN voltage division factor, LISN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Taiwan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Expanded Measurement uncertainty
AC Mains	4.64 dB (k=2, 95% level of confidence)

### 6.3 EUT Setup

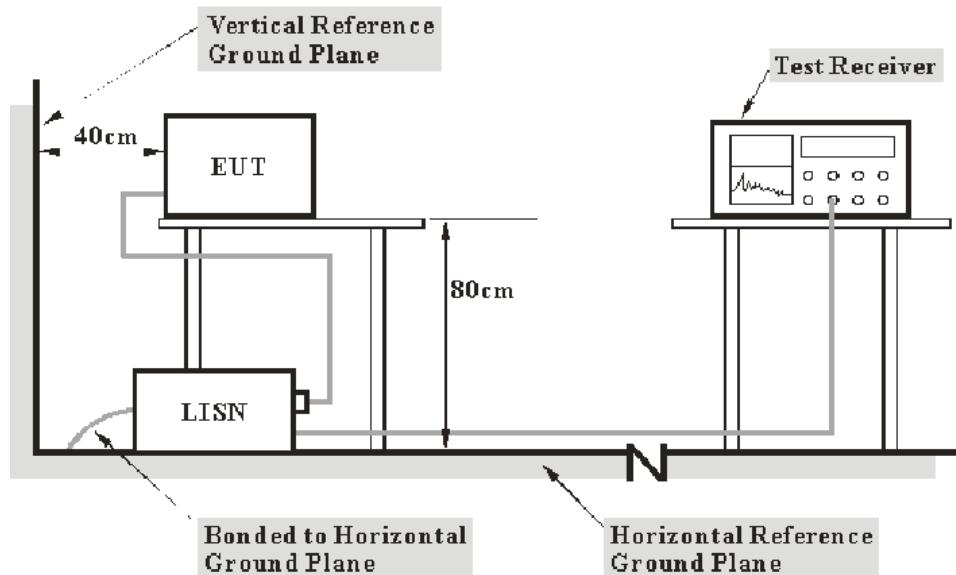

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

## 6.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz. During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz

## 6.5 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

## 6.6 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

## 6.7 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Date	Calibration Due Date
LISN	Rohde & Schwarz	ENV216	101248	2017/07/20	2018/07/19
LISN	EMCO	3816/2	00075848	2017/08/02	2018/08/01
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2016/11/03	2017/11/02
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM025	2017/08/11	2018/08/10
RF Cable	EMEC	EM-CB5D	001	2017/07/24	2018/07/23
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed according to TAF requirements, traceable to the ETC.

## 6.8 Test Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	58 %
<b>ATM Pressure:</b>	1010 hPa


*The testing was performed by Andy Shih on 2017-09-08.*

## 6.9 Test Results

Please refer to the following plots and tables.

*Test mode: Charge + Transmitting mode*

## Main: AC 120V/60 Hz, Line

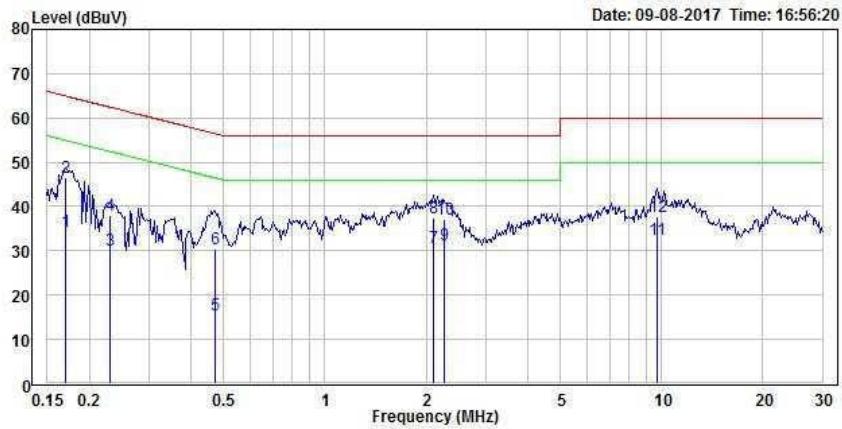

Condition: Line


EUT :

Mode :

Note :

	Freq	Level	Limit	Over	Read	Remark	Pol/Phase
			Line	Line	Factor		
	MHz	dBuV	dBuV	dB	dB	dBuV	
1	0.170	34.45	54.94	-20.49	19.50	14.95	Average Line
2	0.170	46.39	64.94	-18.55	19.50	26.89	QP Line
3	0.231	29.98	52.43	-22.45	19.50	10.48	Average Line
4	0.231	38.16	62.43	-24.27	19.50	18.66	QP Line
5	0.472	15.41	46.47	-31.06	19.51	-4.10	Average Line
6	0.472	30.51	56.47	-25.96	19.51	11.00	QP Line
7	2.096	30.66	46.00	-15.34	19.58	11.08	Average Line
8	2.096	37.30	56.00	-18.70	19.58	17.72	QP Line
9	2.270	31.19	46.00	-14.81	19.59	11.60	Average Line
10	2.270	37.04	56.00	-18.96	19.59	17.45	QP Line
11	9.678	32.62	50.00	-17.38	19.77	12.85	Average Line
12	9.678	37.64	60.00	-22.36	19.77	17.87	QP Line

## Main: AC 120V/60 Hz, Neutral

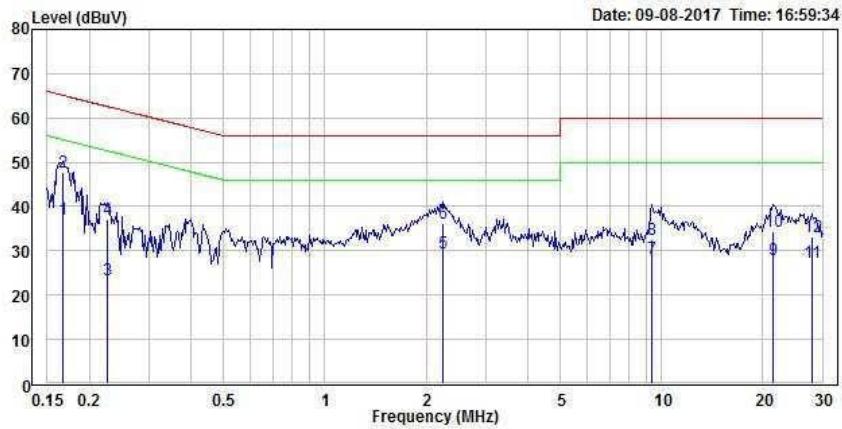

Condition: Neutral

EUT :

Mode :

Note :

	Freq	Level	Limit	Over	Read	Remark	Pol/Phase
			Line	Limit Factor	Level		
	MHz	dBuV	dBuV	dB	dB	dBuV	
1	0.166	37.19	55.14	-17.95	19.63	17.56	Average
2	0.166	47.62	65.14	-17.52	19.63	27.99	QP
3	0.225	23.28	52.63	-29.35	19.63	3.65	Average
4	0.225	37.02	62.63	-25.61	19.63	17.39	QP
5	2.234	29.63	46.00	-16.37	19.73	9.90	Average
6	2.234	36.11	56.00	-19.89	19.73	16.38	QP
7	9.374	28.32	50.00	-21.68	19.91	8.41	Average
8	9.374	32.70	60.00	-27.30	19.91	12.79	QP
9	21.468	27.93	50.00	-22.07	20.07	7.86	Average
10	21.468	34.34	60.00	-25.66	20.07	14.27	QP
11	27.924	27.27	50.00	-22.73	20.12	7.15	Average
12	27.924	33.22	60.00	-26.78	20.12	13.10	QP

## 7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

### 7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4. 5 – 5. 15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5. 35 – 5. 46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3 3458 – 3 358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## 7.2 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Taiwan) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report.


Frequency	Measurement uncertainty
30 MHz~200 MHz	3.76 dB (k=2, 95% level of confidence)
200 MHz~1 GHz	4.12 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	4.84 dB (k=2, 95% level of confidence)
6 GHz~18 GHz	5.16 dB (k=2, 95% level of confidence)
18 GHz~26 GHz	4.84 dB (k=2, 95% level of confidence)
26 GHz~40 GHz	4.30 dB (k=2, 95% level of confidence)

## 7.3 EUT Setup

Below 1 GHz:

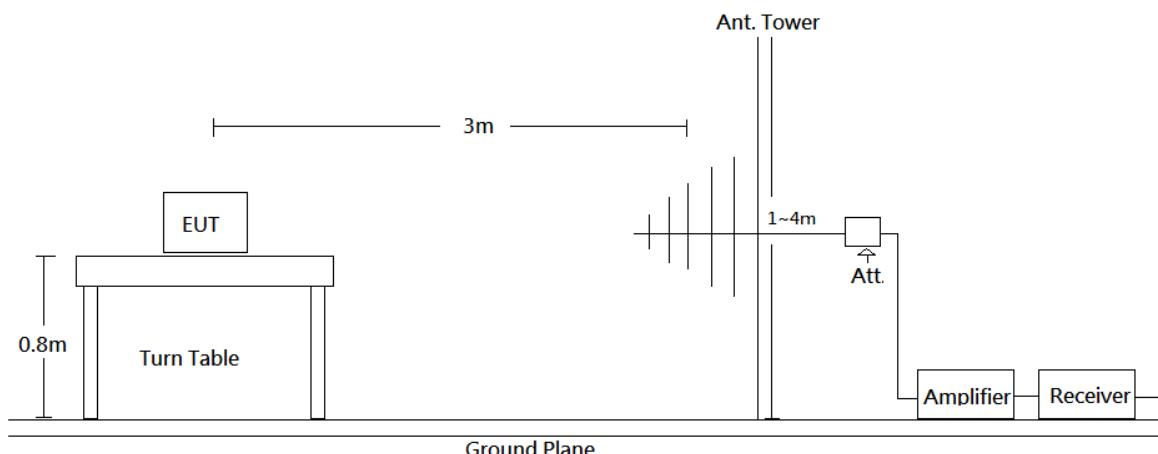

Above 1 GHz:

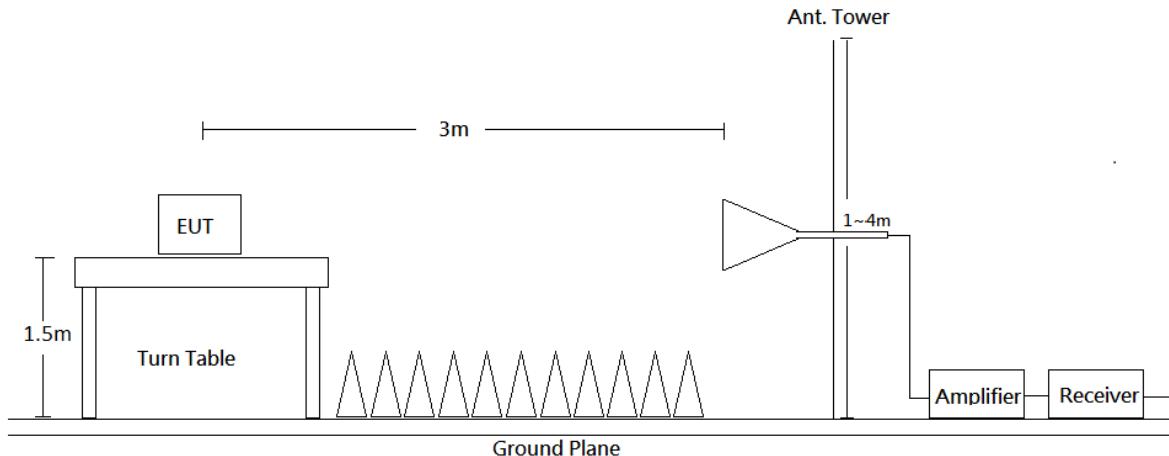

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

#### 7.4 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Detector	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	QP		QP
Above 1 GHz	1 MHz	3 MHz	PK		PK
	1 MHz	3 MHz	RMS	>98%	Ave
	1 MHz	1/T	PK	<98%	Ave

#### 7.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

## 7.6 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Result - Limit

## 7.7 Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.209 Limit. Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$Lm + U(Lm) \leq Llim + Ucispr$$

In BACL,  $U(Lm)$  is less than  $Ucispr$ , if  $Lm$  is less than  $Llim$ , it implies that the EUT complies with the limit.

## 7.8 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
966A Room					
Bilog Antenna	Sunol & Mini-Circuits	JB6/UNAT-6+	A050115 / 15542_01	2016/11/16	2017/11/15
Horn Antenna	EMCO	3115	9311-4158	2017/05/31	2018/05/30
Horn Antenna	ETS-Lindgren	3116	00062638	2017/09/02	2018/09/01
Preamplifier	Sonoma	310N	130602	2017/07/03	2018/07/02
Preamplifier	EMEC	EM01G18G	060697	2017/04/14	2018/04/13
Preamplifier	EMEC	EM18G40G	060656	2016/12/13	2017/12/12
EMI Test Receiver	R & S	ESR7	101419	2016/11/03	2017/11/02
Spectrum Analyzer	Rohde & Schwarz	FSV40	101203	2017/07/13	2018/07/12
Microflex Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2016/11/02	2017/11/01
Microflex Cable	UTIFLEX	UFA210A-1-3149-300300	MFR64639 226389-001	2016/11/29	2017/11/28
Microflex Cable	ROSNOL	K1K50-UP0264-K1K50-450CM	160309-1	2017/03/24	2018/03/23
Microflex Cable	ROSNOL	K1K50-UP0264-K1K50-80CM	160309-2	2017/01/20	2018/01/19
Turn Table	Champro	TT-2000	060772-T	N.C.R	N.C.R
Antenna Tower	Champro	AM-BS-4500-B	060772-A	N.C.R	N.C.R
Controller	Champro	EM1000	060772	N.C.R	N.C.R
Software	Farad	EZ_EMC	BACL-03A1	N.C.R	N.C.R
Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

**\*Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## 7.9 Test Environmental Conditions

<b>Temperature:</b>	25° C
<b>Relative Humidity:</b>	58 %
<b>ATM Pressure:</b>	1010 hPa

The testing was performed by Ian Tu on 2017-09-04.


## 7.10 Test Results

Mode: *Transmitting Mode*


**BLE Mode** (*Pre-scan with three orthogonal axis, and worse case as Y axis*)

**Horizontal** (*worst case is BLE mode low channel*)


30MHz-1GHz:

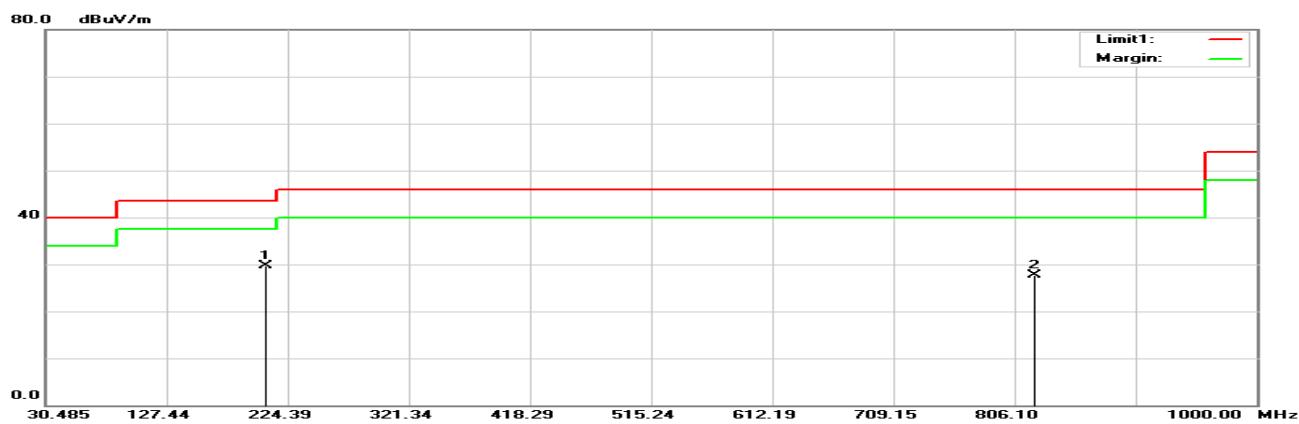

1GHz-18GHz:

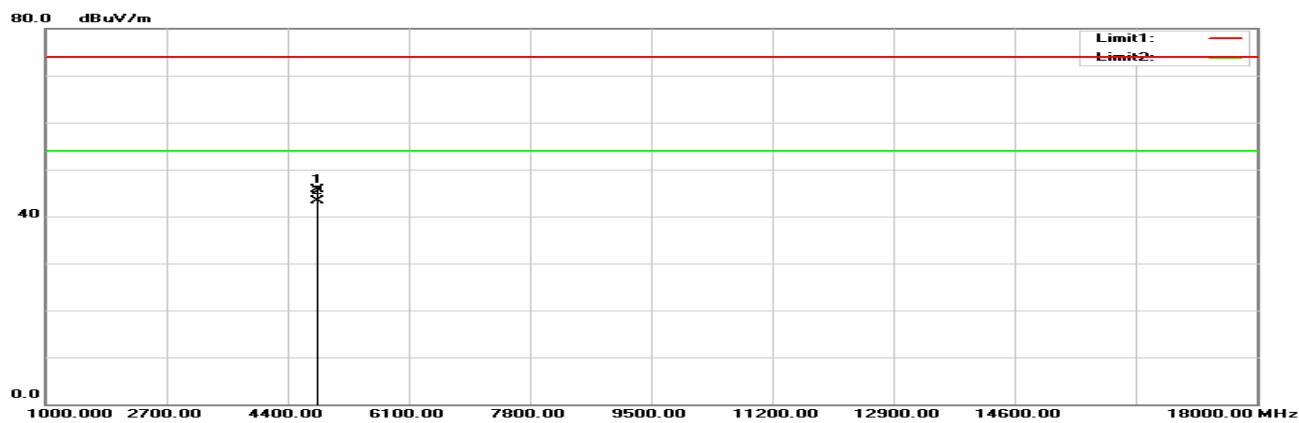


18GHz-26.5GHz:

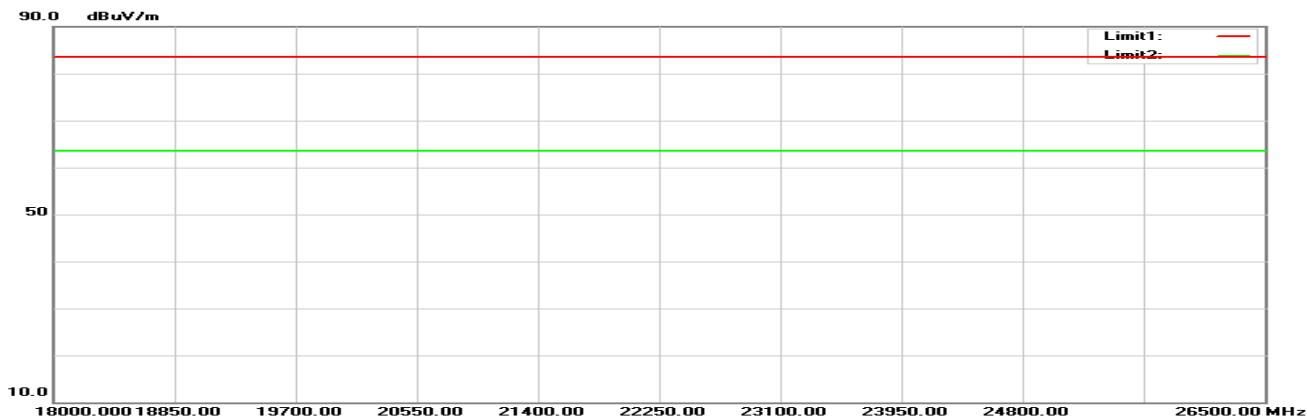


**Vertical (worst case is BLE mode low channel)**


30MHz-1GHz:

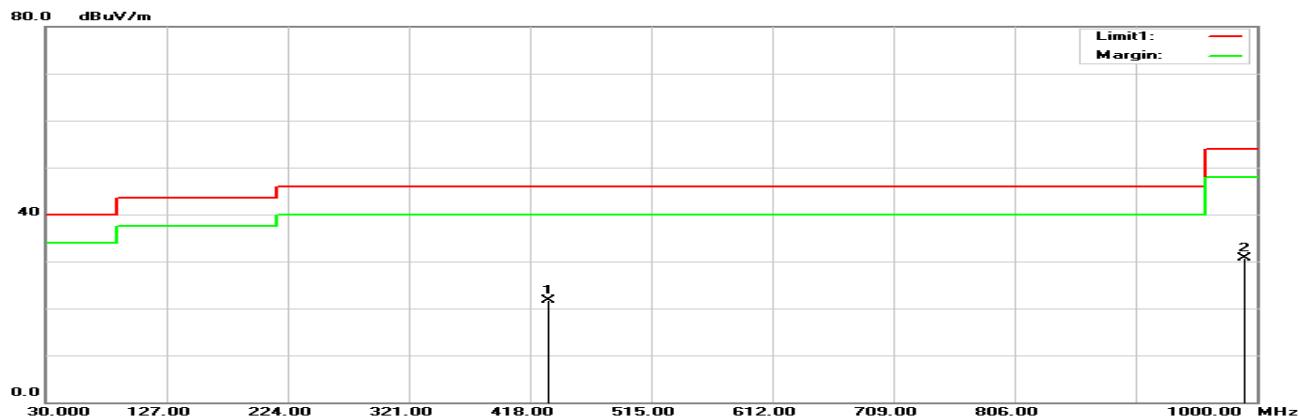

1GHz-18GHz:

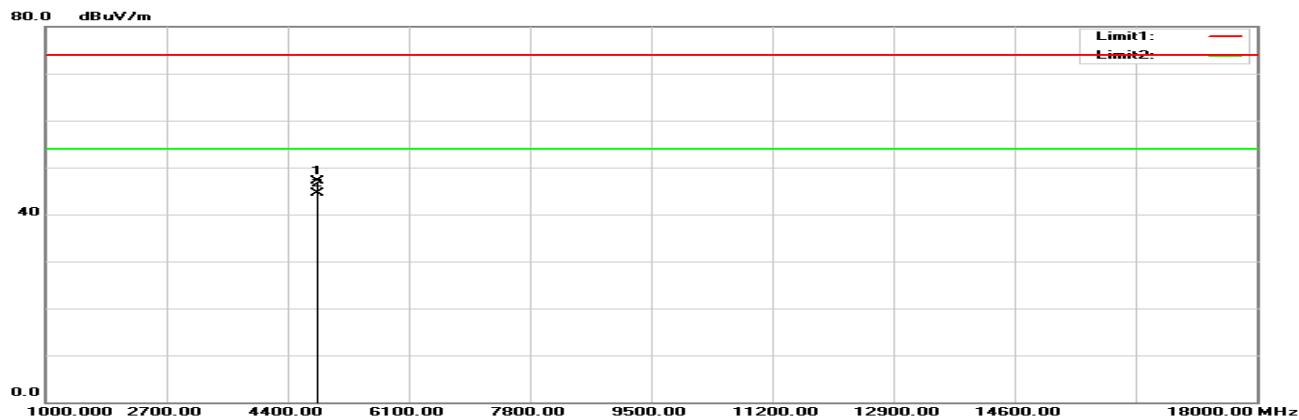

18GHz-26.5GHz:

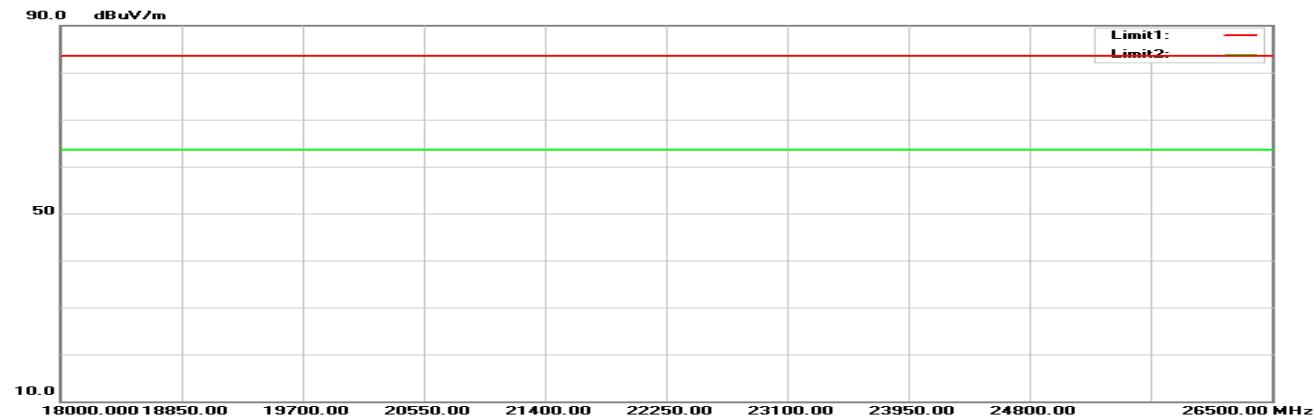

**Horizontal**

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
BLE Low Channel								
206.5400	41.96	-12.19	29.77	43.50	-13.73	100	109	QP
822.4900	27.77	-0.13	27.64	46.00	-18.36	100	234	QP
2387.330	49.85	-4.89	44.96	74.00	-29.04	150	242	peak
2387.330	47.23	-4.89	42.34	54.00	-11.66	150	242	AVG
2402.000	92.70	-4.86	87.84	N/A	N/A	150	10	peak
2402.000	88.04	-4.86	83.18	N/A	N/A	150	10	AVG
4808.000	44.78	0.99	45.77	74.00	-28.23	150	127	peak
4808.000	42.23	0.99	43.22	54.00	-10.78	150	127	AVG
BLE Mid Channel								
205.0850	41.44	-11.87	29.57	43.50	-13.93	100	90	QP
880.6900	28.11	1.03	29.14	46.00	-16.86	100	44	QP
2440.000	93.26	-4.77	88.49	N/A	N/A	150	6	peak
2440.000	92.64	-4.77	87.87	N/A	N/A	150	6	AVG
2495.600	48.56	-4.65	43.91	74.00	-30.09	150	280	peak
2495.600	35.23	-4.65	30.58	54.00	-23.42	150	280	AVG
4880.000	41.96	1.23	43.19	74.00	-30.81	150	129	peak
4880.000	37.26	1.23	38.49	54.00	-15.51	150	129	AVG
BLE High Channel								
205.5700	41.26	-11.98	29.28	43.50	-14.22	100	100	QP
886.0250	28.29	1.13	29.42	46.00	-16.58	100	67	QP
2480.000	89.56	-4.68	84.88	N/A	N/A	150	173	peak
2480.000	88.81	-4.68	84.13	N/A	N/A	150	173	AVG
2486.110	53.39	-4.67	48.72	74.00	-25.28	150	173	peak
2486.110	43.48	-4.67	38.81	54.00	-15.19	150	173	AVG
4960.000	40.35	1.51	41.86	74.00	-32.14	100	125	peak
4960.000	35.24	1.51	36.75	54.00	-17.25	100	125	AVG

Result = Reading + Correct Factor

Margin = Result - Limit

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

**Vertical**

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
BLE Low Channel								
433.0350	28.69	-6.94	21.75	46.00	-24.25	100	176	QP
990.7850	27.02	3.70	30.72	54.00	-23.28	100	25	QP
2382.010	50.82	-4.91	45.91	74.00	-28.09	150	152	peak
2382.010	45.51	-4.91	40.60	54.00	-13.40	150	152	AVG
2402.000	98.16	-4.86	93.30	N/A	N/A	150	159	peak
2402.000	97.78	-4.86	92.92	N/A	N/A	150	159	AVG
4808.000	46.11	0.99	47.10	74.00	-26.90	150	243	peak
4808.000	43.49	0.99	44.48	54.00	-9.52	150	243	AVG
BLE Mid Channel								
397.1450	29.04	-7.79	21.25	46.00	-24.75	100	109	QP
970.9000	27.00	3.20	30.20	54.00	-23.80	100	64	QP
2440.000	98.27	-4.77	93.50	N/A	N/A	150	160	peak
2440.000	97.04	-4.77	92.27	N/A	N/A	150	160	AVG
2498.200	51.52	-4.64	46.88	74.00	-27.12	150	271	peak
2498.200	35.21	-4.64	30.57	54.00	-23.43	150	271	AVG
4880.000	42.85	1.23	44.08	74.00	-29.92	150	300	peak
4880.000	37.01	1.23	38.24	54.00	-15.76	150	300	AVG
BLE High Channel								
119.2400	32.65	-10.89	21.76	43.50	-21.74	100	60	QP
764.7750	28.66	-1.43	27.23	46.00	-18.77	100	271	QP
2480.000	94.44	-4.68	89.76	N/A	N/A	150	163	peak
2480.000	93.68	-4.68	89.00	N/A	N/A	150	163	AVG
2485.930	55.99	-4.67	51.32	74.00	-22.68	150	163	peak
2485.930	43.07	-4.67	38.40	54.00	-15.60	150	163	AVG
4960.000	40.85	1.51	42.36	74.00	-31.64	100	87	peak
4960.000	33.19	1.51	34.70	54.00	-19.30	100	87	AVG

Result = Reading + Correct Factor


Margin = Result - Limit

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain


Spurious emissions more than 20 dB below the limit were not reported

**Conducted Spurious Emissions:**


Channel	Frequency (MHz)	Delta Peak to Band Emission (dBC)	Limit (dBC)	RESULT
Low	2402	44.90	$\geq 20$	PASS
Mid	2440	43.96	$\geq 20$	PASS
High	2480	37.63	$\geq 20$	PASS

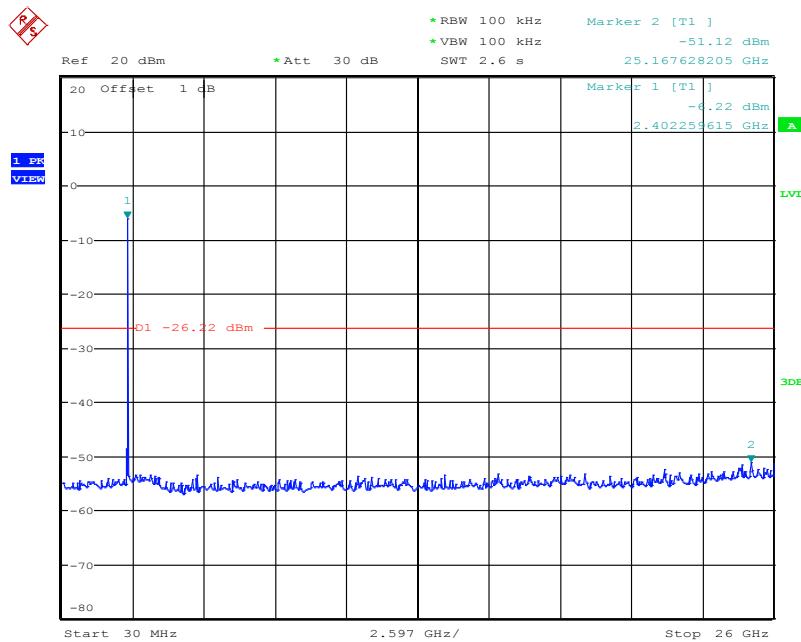**Low Channel**

Date: 4.SEP.2017 14:19:04

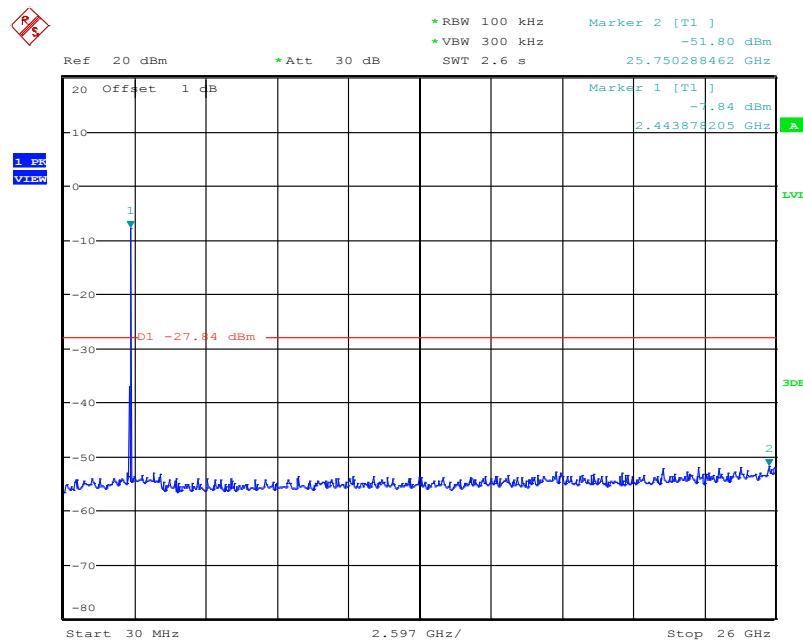**Middle Channel**

Date: 4.SEP.2017 14:25:14

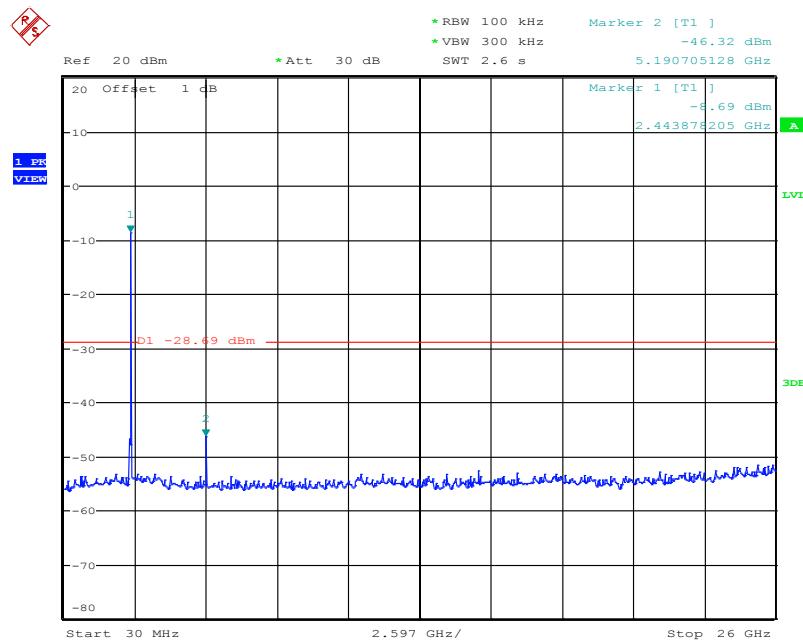**High Channel**

Date: 4.SEP.2017 14:59:17

## 8 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

### 8.1 Applicable Standard

According to FCC §15.247(a) (2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.2 Test Procedure

According to ANSI C63.10-2013

#### 6 dB Emission Bandwidth

The steps for the first option are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 8.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

**\*Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### 8.4 Test Environmental Conditions

Temperature:	26° C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa


*The testing was performed by Ian Tu on 2017-09-04.*

## 8.5 Test Results


Channel	Frequency (MHz)	6 dB OBW (MHz)	Limit (MHz)	Result
Low	2402	0.706	> 0.5	Compliance
Middle	2440	0.716	> 0.5	Compliance
High	2480	0.668	> 0.5	Compliance

Please refer to the following plots


### Low Channel

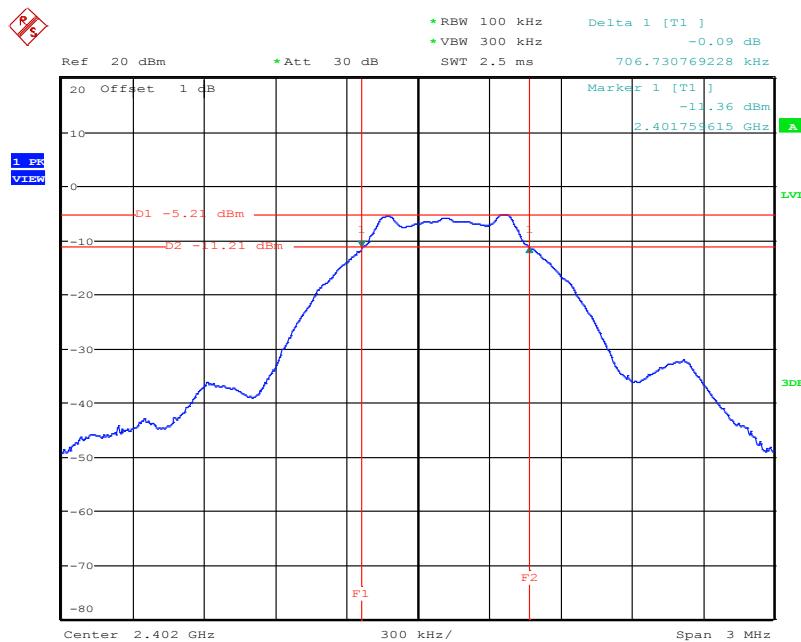

Date: 4.SEP.2017 14:11:48

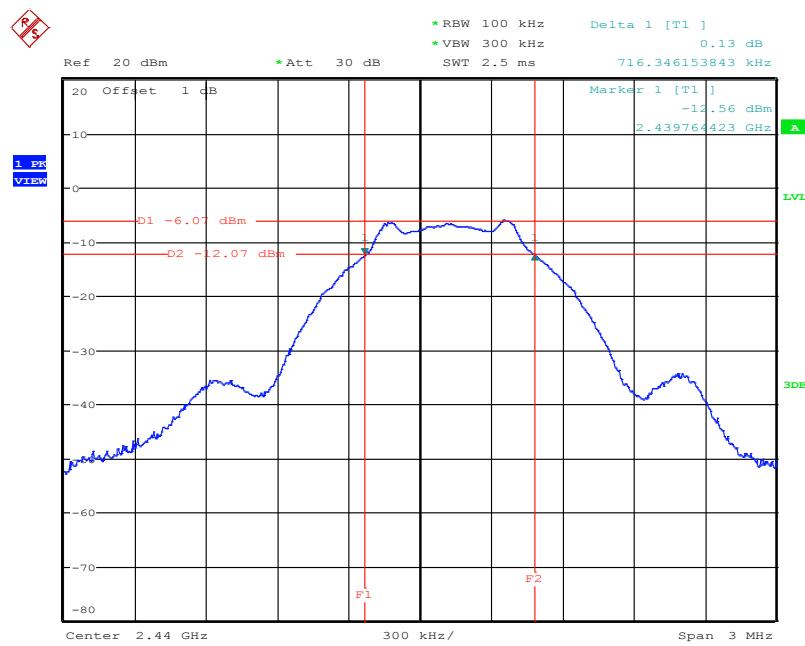**Middle Channel**

Date: 4.SEP.2017 14:22:56

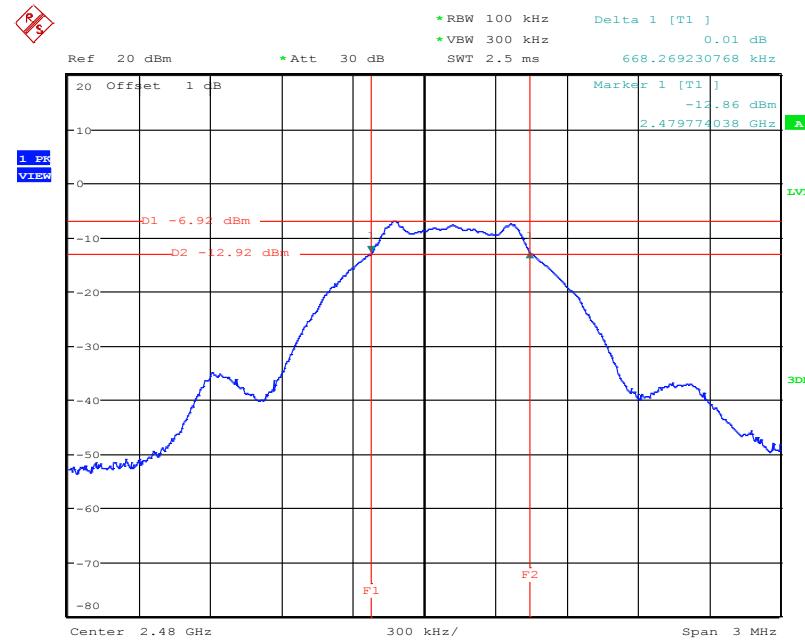**High Channel**

Date: 4.SEP.2017 14:57:00

## 9 FCC §15.247(b)(3) – Maximum Output Power

### 9.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 9.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.



### 9.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Power Sensor	KEYSIGHT	U2021XA	MY54080018	2017/03/21	2018/03/20
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

**\*Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

#### 9.4 Test Environmental Conditions

<b>Temperature:</b>	26° C
<b>Relative Humidity:</b>	58 %
<b>ATM Pressure:</b>	1010 hPa

The testing was performed by Ian Tu on 2017-09-04.

#### 9.5 Test Results

Channel	Frequency (MHz)	Maximum peak Conducted Output Power (dBm)	Limit (dBm)	Result
Low	2402	-2.91	30	Compliance
Middle	2440	-3.11	30	Compliance
High	2480	-4.05	30	Compliance

## 10 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

### 10.1 Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 10.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 10.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

**\*Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### 10.4 Test Environmental Conditions

<b>Temperature:</b>	26° C
<b>Relative Humidity:</b>	58 %
<b>ATM Pressure:</b>	1010 hPa


The testing was performed by Ian Tu from 2017-09-01 to 2017-09-04.

## 10.5 Test Results


Please refer to the following plots

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	RESULT
Low	2402	40.05	$\geq 20$	PASS
High	2480	39.30	$\geq 20$	PASS

### Band Edge, Left Side

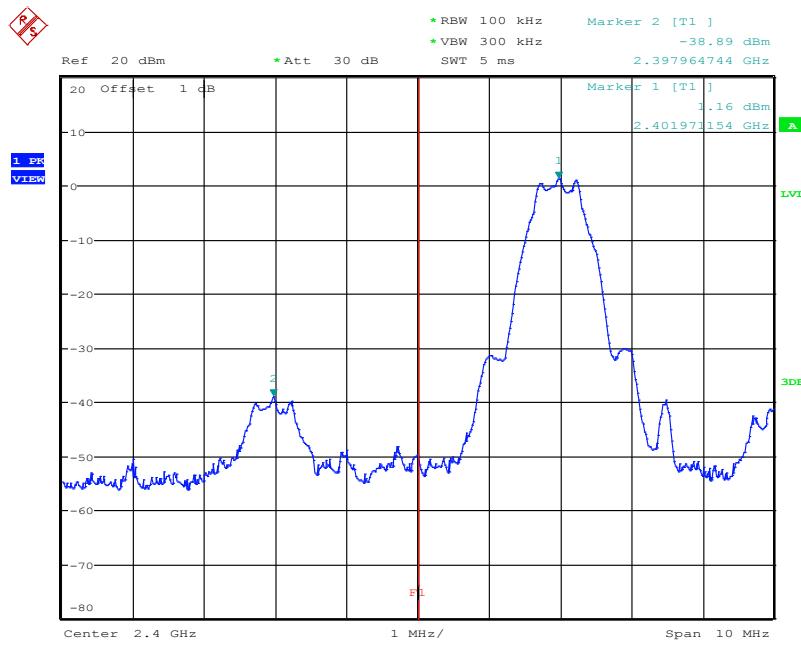

Date: 1.SEP.2017 10:51:44

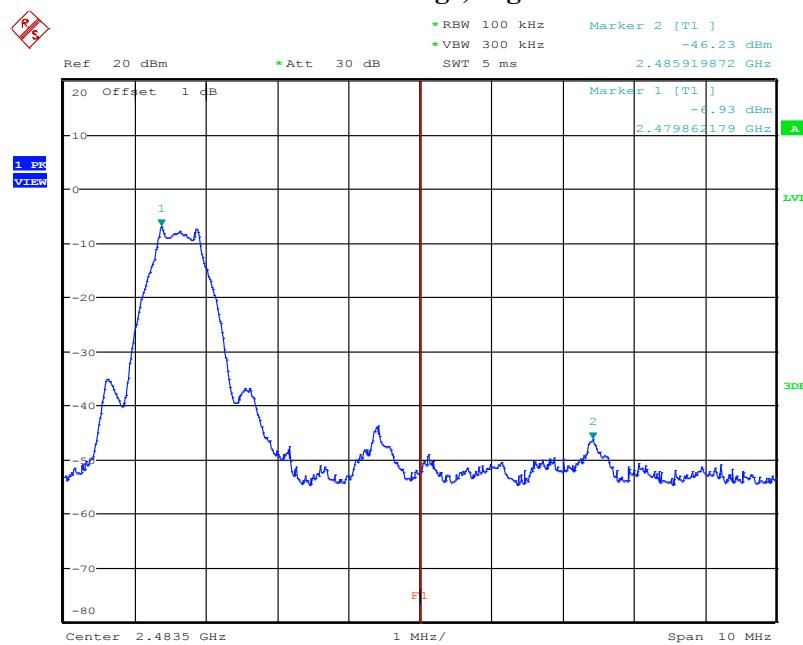**Band Edge, Right Side**

Date: 4.SEP.2017 14:58:06

## 11 FCC §15.247(e) – Power Spectral Density

### 11.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 11.2 Test Procedure

According to ANSI C63.10-2013

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

### 11.3 Test Equipment List and Details

Descriptions	Manufacturers	Models	Serial Numbers	Calibration Date	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2017/05/08	2018/05/07
Cable	WOKEN	SFL402	S02-160323-07	2017/02/22	2018/02/21

**\*Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Taiwan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## 11.4 Test Environmental Conditions


Temperature:	26° C
Relative Humidity:	58 %
ATM Pressure:	1010 hPa

The testing was performed by Ian Tu on 2017-09-04.


## 11.5 Test Results

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
Low	2402	-17.25	8	Compliance
Middle	2440	-17.27	8	Compliance
High	2480	-18.97	8	Compliance


Please refer to the following plots

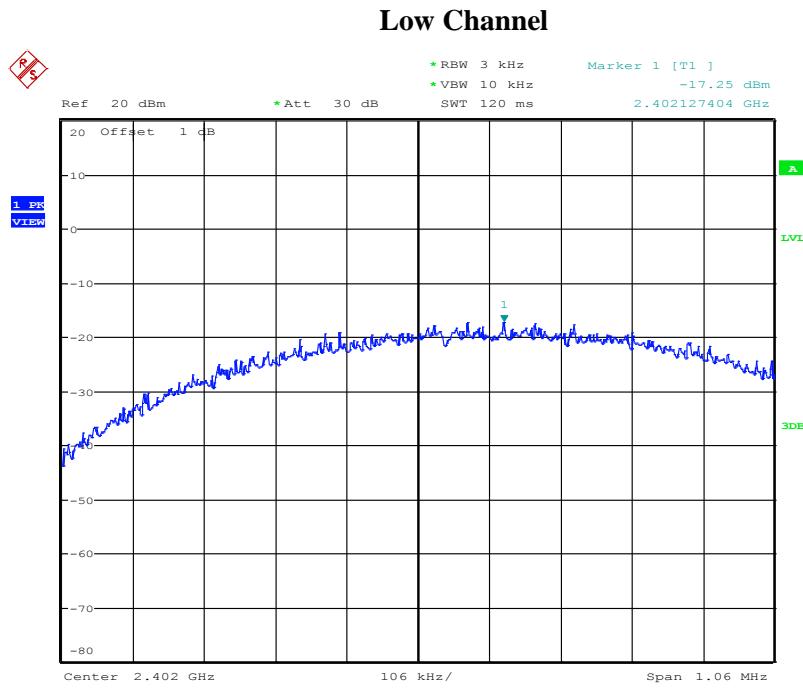

Date: 4.SEP.2017 14:20:20

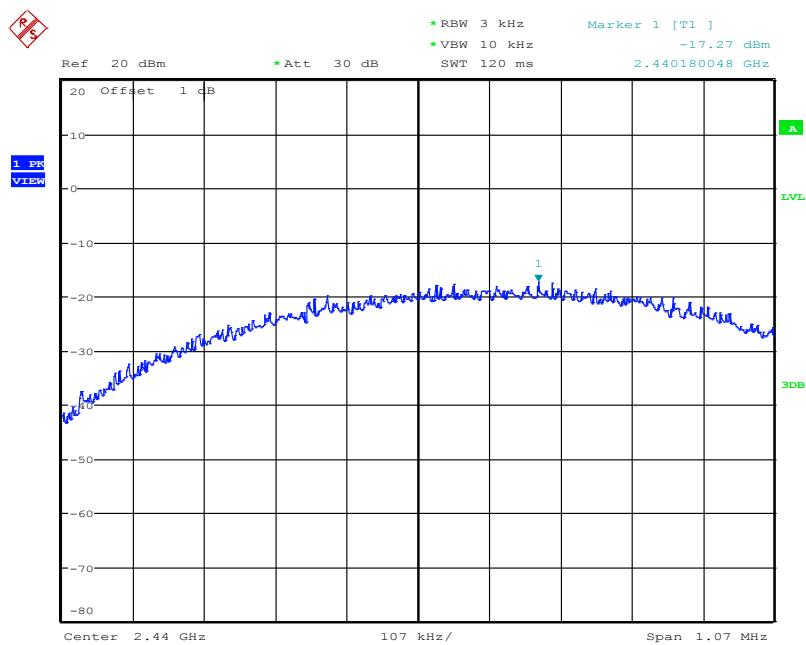**Middle Channel**

Date: 4.SEP.2017 14:26:29

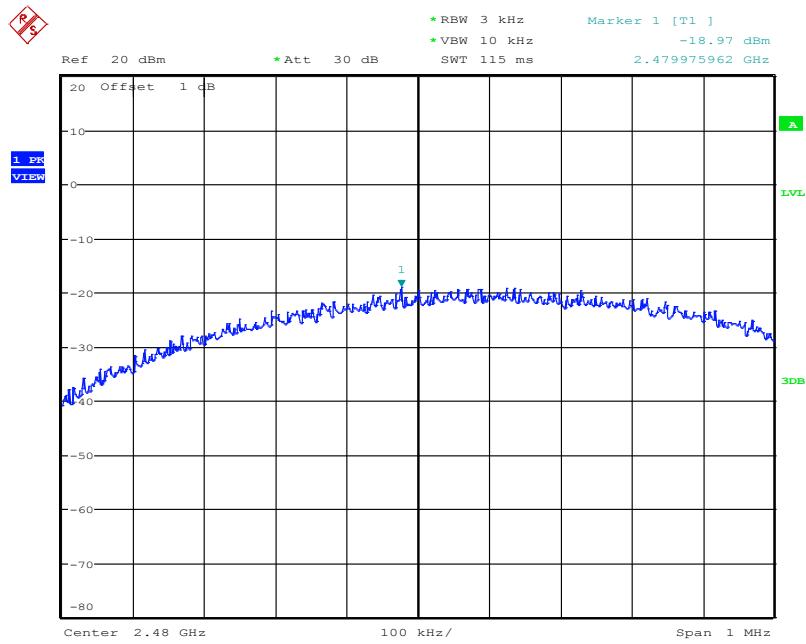**High Channel**

Date: 4.SEP.2017 15:01:36

**----- END OF REPORT -----**