



FCC Part 15, Subpart C, Section 15.231  
Test Report

On

315 MHz Keyfob Transmitter  
FCC ID: 2AKF9-TA15V12

**Customer Name:** Abrites Ltd.

**Customer P.O:** 20170001/1

**Date of Report:** August 28, 2017

**Test Report No:** R-2648P-2

**Test Start Date:** February 1, 2017

**Test Finish Date:** August 9, 2017

**Test Technician:** D. Fiore, M. Nowak

**Approved By:** C. T. Reitz

**Report Prepared By:** P. Reed

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

## Technical Information

**Report Number:** R-2648P-2

**Customer:** Abrites Ltd.

**Address:** 147 Chemi Vrah Blvd.  
1407, Sofia, Bulgaria

**Manufacturer:** Abrites Ltd.

**Manufacturer Address:** 47 Chemi Vrah Blvd.  
1407, Sofia, Bulgaria

**Test Sample:** 315 MHz Keyfob Transmitter

**Model Number:** TA15

**FCC ID:** 2AKF9-TA15V12

**Type:** Security / Remote Control Transmitter

**Power Requirements:** 3 VDC Derived from a CR2032 Battery

**Frequency of Operation:** 315 MHz

**Equipment Class:** DSC

**Equipment Use:** Portable < 2.5 cm

**Test Specification:**

FCC Rules and Regulations Part 15, Subpart C, Section 15.231

**Test Procedure:**

ANSI C63.10:2013

**Test Site:**

ANSI C63.4:2014

**Test Facility:**

Retlif Testing Laboratories  
3131 Detwiler Road  
Harleysville, PA 19438

FCC Designation Number: US5342



Retlif Testing Laboratories

Report No. R-2648P-2

## Tests Performed

The test methods performed on the 315 MHz Keyfob Transmitter are shown below:

FCC Part 15, Subpart C	Test Method
15.231(b)	Field Strength of Emissions
15.231(b)(2)	Duty Cycle Determination
15.231(b)(3)	Field Strength of Spurious Emissions
15.231(c)	Bandwidth of Emission

## General Test Requirements

1. The measurement procedures of ANSI C63.10:2013 were utilized as specified in FCC Part 15, Subpart C, Section 15.31(a)(3).
2. All radiated emissions measurements were performed on an Open Area Test Site (OATS), listed with the FCC, in accordance with FCC Section 15.31(d).
3. The level of the fundamental field strength was recorded with a new battery installed in the EUT, in accordance with FCC Section 15.231(c).
4. All measurements were performed at the specified 3 meter test distance as required by FCC Section 15.31(f).
5. The EUT was rotated throughout 360 degrees for all radiated emissions measurements as specified in FCC Section 15.31(f)(5).
6. All readily accessible EUT controls were adjusted in such a manner as to maximize the level of emissions in accordance with FCC Section 15.31(g).
7. Appropriate accessories were attached to all EUT ports during the performance of radiated emissions measurements as required by FCC Section 15.31(i).
8. The EUT operated at a discrete frequency of 315 MHz.
9. The frequency spectrum was investigated from the lowest frequency generated in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency in accordance with FCC Section 15.33(a)(1).
10. All measurements were taken with a peak detector function as specified in FCC Section 15.35(a). The duty cycle, calculated in accordance with FCC Section 15.35(c), was applied to the peak readings in order to obtain the average value of emissions. The peak value of emissions was verified to meet the 20 dB requirement of FCC Section 15.35(b).



Retlif Testing Laboratories

Report No. R-2648P-2

## Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



David M. Rybicki  
EMC Test Engineer  
NVLAP Approved Signatory



Colleen T. Reitz  
Laboratory Supervisor  
NVLAP Approved Signatory

### Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

### Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



Retlif Testing Laboratories

Report No. R-2648P-2

## Requirements and Test Results

### **Requirement:**

#### **FCC Section 15.231(a) – Periodic operation in the band 40.66 – 40.7 MHz and above 70 MHz**

The provisions of this Section are restricted to periodic operation within the band 40.66-40.7 MHz and above 70 MHz. Except as shown in Paragraph (c) of this Section, the intentional radiator is restricted to the transmissions of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal.

- **Results:**

The device was operated at a frequency of 315 MHz and is for the transmission of a control signal used for remote keyless vehicle entry.

### **Requirement:**

#### **FCC Sections 15.231(a)(1)-(5)**

#### **Periodic operation in the band 40.66 – 40.7 MHz and above 70 MHz**

The following conditions were met in order to comply with the provisions for momentary operation:

FCC 15.231(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

- **Results:**

The device is a manually operated, push to operate transmitter under manual control. The device ceased transmission within 5 seconds of deactivation. This was verified by a spectrum analyzer and manual deactivation of the transmitter in accordance with C63.10, 2013, Paragraph 7.4.



**Retlif Testing Laboratories**

Report No. R-2648P-2

## Requirements and Test Results (con't)

FCC 15.231(a)(2): A transmitter activated automatically shall cease transmission within 5 seconds after activation.

- Results:  
Transmission is not automatically activated.

FCC 15.231(a)(3): Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

- Results:  
The transmitter does not perform periodic transmissions.

FCC 15.231(a)(4): Intentional radiators which are employed for radio control purposes during emergencies involving fire, security and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

- Results:  
This device is not employed for radio control purposes during emergencies involving fire, security and safety for life.

FCC 15.231(a)(5): Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

- Results:  
The device is not employed for security systems.



**Retlif Testing Laboratories**

Report No. R-2648P-2

## Requirements and Test Results (con't)

### Requirement:

#### FCC Section 15.231(b) – Field Strength of Emissions

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the limits specified in Table 1.

Table 1 – Test Limits, Field Strength of Emissions

Fundamental Frequency (MHz)	Field Strength of Fundamental microvolts/meter @ 3 meters (watts, e.i.r.p.) Quasi Peak or Average	Field Strength of Spurious Emissions microvolts/meter @ 3 meters Quasi Peak or Average
260 to 470	3,750 to 12,500**	375 to 1,250**

\*\*Linear Interpolations  
For 260-470 MHz: FS (microvolts/m) = (41.67 x F) – 7,083  
The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

The Fundamental and Harmonic Emissions limits for a device operating at 315 MHz are listed in Table 2.

Table 2 – Fundamental and Harmonic Limits

Frequency of Operation (MHz)	Fundamental ( $\mu$ V/m)		Harmonics ( $\mu$ V/m)	
	Average	Peak	Average	Peak
315	6,041	60,418	604.1	6,041

- Results:

The Fundamental and Harmonics field strengths did not exceed the limits specified in Table 2 at a test distance of 3 meters, taken with an Average Detector. See Table 3 for the Fundamental and Harmonic emissions test results.

Table 3 – Fundamental and Harmonics Test Results

Fundamental Frequency (MHz)	Maximum Fundamental ( $\mu$ V/m)	Maximum Harmonics ( $\mu$ V/m)
315	5,081.59	369.83



Retlif Testing Laboratories

Report No. R-2648P-2

## Requirements and Test Results (con't)

### Requirement:

#### FCC Section 15.231(b)(2) – Duty Cycle Determination-Pulsed Operation

Intentional radiators operating under the provisions of the Section shall demonstrate compliance with the limits on the field strength emissions, as shown in Table 1, based on the average value of the measured emissions. As an alternative, compliance with the limits in the Table 1 may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in Section 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of Section 15.205 shall be demonstrated using the measurement instrumentation specified in that Section.

The unit's RF output was directly coupled to the input of the spectrum analyzer. The analyzer was set for a frequency span of 0 Hz. The sweep time was then adjusted in order to display one full pulse train. The transmitter on time was then summed and compared to the time for one full cycle in order to obtain the duty cycle. (See plots for additional information).

The emissions did not exceed the limits specified in Table 1. See below for the exact method of calculating the average field strength.

Transmitter On Time = 47.0 milliseconds (maximum per cycle)

Transmitter Cycle Time = 100 milliseconds (100 ms maximum)

Transmitter Duty Cycle = 47.0 %

### CALCULATION

94 pulses of 0.500 msec = 47.0 milliseconds

Duty Cycle (47.0/100) = 47.0 %

Correction Factor =  $20 \log (0.47)$  = -6.56 dB



Retlif Testing Laboratories

Report No. R-2648P-2

## Requirements and Test Results (con't)

### Requirement:

#### **FCC Section 15.231(b)(3) – Field Strength of Spurious Emissions**

The limits on the field strength of the spurious emissions specified in Table 1 are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in Table 1 or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

- Results:

No spurious emissions were observed within 20 dB of the specified limit.

### Requirement:

#### **FCC Section 15.231(c) – Bandwidth of Emissions**

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

- Results:

The 20 dB bandwidth was measured and found to be 46.50 kHz.



**Retlif Testing Laboratories**

Report No. R-2648P-2

## General Requirements FCC and IC

### **Spectrum Analyzer Desensitization Considerations**

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized:

$$\text{minimum bandwidth} = 1/\{\text{minimum pulse width (in seconds)} \times 1.5\} = \text{Hz}$$

Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 0.500 ms yields a minimum required bandwidth of 1.33 kHz. FCC specified bandwidths of 100 kHz and 1 MHz were utilized below and above 1 GHz, respectively.

### Open Area Test Site

For testing radiated measurements from 1 GHz to 40 GHz, a test site must satisfy either option in Section 5.5 of ANSI C63.4:2014.

**First Option:** Section 5.5.1 a) 1) of ANSI C63.4:2014, requires compliance with the site validation criterion called out in CISPR 16-1-4: 2010-04, which is the site validation by means of SVSWR measurements.

**Second Option:** Section 5.5.1 a) 2) of ANSI C63.4:2014, alternative site validation without SVSWR measurements – test site shall have a minimum area of the ground plane covered with RF absorbing material as specified in this clause and as shown in Figure 6 of ANSI C63.4:2014.

The Open Area Test Site used within this test program utilized the second option, with the RF Absorber placed directly on the ground plane. The RF Absorber had a maximum thickness of 30 cm and a minimum rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.



**Retlif Testing Laboratories**

Report No. R-2648P-2

## Equipment Lists

### FCC Section 15.231(b) - Field Strength of Emissions

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8016	ETS / EMCO	ANTENNA, LOG PERIODIC	200 MHz - 1 GHz	3146	7/18/2016	1/31/2018
8017	ETS / EMCO	ANTENNA, DOUBLE RIDGED GUIDE	1 - 18 GHz	3115	3/10/2016	9/30/2017
8071	AGILENT / HP	ANALYZER, SPECTRUM	100Hz - 2.5 GHz/2 - 22GH	8566B	9/12/2016	9/30/2017
8072	AGILENT / HP	ANALYZER, SPECTRUM, DISPLAY		85662A	9/12/2016	9/30/2017
8300	RETLIF	OPEN AREA TEST SITE, ATTENUATION	3/10 Meter OATS	RPA	8/7/2014	8/31/2017
8300C	UNKNOWN	CABLE, COAXIAL	3/10 METER	3 METER CABLE	10/25/2016	10/31/2017
8317	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5 GHz, 30 dB	8449B	5/18/2017	5/31/2018
8411	SONOMA INSTRUMENT	PRE-AMPLIFIER	9 KHz - 1 GHz	310N	9/19/2016	9/30/2017
8685	RETLIF	CABLE, COAXIAL	10 kHz - 18 GHz	3' TYPE N	6/21/2017	6/30/2018
8687	RETLIF	CABLE, COAXIAL	10 kHz - 18 GHz	10' TYPE N	6/21/2017	6/30/2018

### FCC Section 15.231(b)(2) - Duty Cycle Determination - Pulsed Operation

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8410A	ETS / EMCO	Field Probe, 6 cm Loop	790 MHz	7405-901	No Calibration Required	
R687	AGILENT / HP	ANALYZER, SPECTRUM	100 Hz - 26.5 GHz	E7405A;B	2/10/2017	2/28/2018

### FCC Section 15.231(b)(3) - Field Strength of Spurious Emissions

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8016	ETS / EMCO	ANTENNA, LOG PERIODIC	200 MHz - 1 GHz	3146	7/18/2016	1/31/2018
8019	ETS / EMCO	ANTENNA, BICONICAL	20 - 200 MHz	3104	2/1/2017	8/31/2018
8071	AGILENT / HP	ANALYZER, SPECTRUM	100Hz - 2.5 GHz/2 - 22GH	8566B	9/12/2016	9/30/2017
8072	AGILENT / HP	ANALYZER, SPECTRUM, DISPLAY		85662A	9/12/2016	9/30/2017
8080	ROHDE & SCHWARZ	RECEIVER, EMI	20 - 1300 MHz	354-3000.56ESVP	8/26/2016	8/31/2017
8300	RETLIF	OPEN AREA TEST SITE, ATTENUATION	3/10 Meter OATS	RPA	8/7/2014	8/31/2017
8300C	UNKNOWN	CABLE, COAXIAL	3/10 METER	3 METER CABLE	10/25/2016	10/31/2017
8411	SONOMA INSTRUMENT	PRE-AMPLIFIER	9 KHz - 1 GHz	310N	9/19/2016	9/30/2017

### FCC Section 15.231(c) - Bandwidth of Emission

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8410A	ETS / EMCO	Field Probe, 6 cm Loop	790 MHz	7405-901	No Calibration Required	
R687	AGILENT / HP	ANALYZER, SPECTRUM	100 Hz - 26.5 GHz	E7405A;B	2/10/2017	2/28/2018

### FCC Section 15.231(a) – Timing Requirements

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
8410A	ETS / EMCO	Field Probe, 6 cm Loop	790 MHz	7405-901	No Calibration Required	
R687	AGILENT / HP	ANALYZER, SPECTRUM	100 Hz - 26.5 GHz	E7405A;B	2/10/2017	2/28/2018



**Retlif Testing Laboratories**

Report No. R-2648P-2

**FCC Section 15.231(b) - Field Strength of Emissions  
Test Data**



**Retlif Testing Laboratories**

**Report No. R-2648P-2**

<b>Test Method:</b>		FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)					
		IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands					
<b>Customer:</b>	Abrites			<b>Job No.:</b>	R-2648P-2		
<b>Test Sample:</b>	315.00 MHz Remote Keyless Transmitter						
<b>Model No.:</b>	TA15						
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315 MHz						
<b>Technician:</b>	M. Nowak			<b>Date:</b>	08/09/2017, 08/10/2017		
<b>Notes:</b>	Detector: Peak, Unless otherwise specified			Test Distance: 3 Meters			
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)/Meters	X / Y / Z	dB $\mu$ V	dB	dB $\mu$ V/m	uV/m	uV/m
315.00	V / 2.05	X / 73.6	51.00	18.40	69.40	2951.21	60418
315.00	V / 2.16	Y / 258.6	49.80	18.40	68.20	2570.40	
315.00	V / 1.31	Z / 273.1	35.70	18.40	54.10	506.99	
315.00	H / 2.70	X / 360.0	47.60	18.40	66.00	1995.26	
315.00	H / 2.69	Y / 165.1	47.80	18.40	66.20	2041.74	
315.00	H / 1.00	Z / 132.7	55.72	18.40	74.12	5081.59	60418
630.00	V / 1.00	X / 234.3	24.81	24.91	49.72	306.20	6041
630.00	V / 1.00	Y / 250.8	26.21	24.91	51.12	359.75	
630.00	V / 1.00	Z / 147.8	8.79	24.91	33.70	48.42	
630.00	H / 2.46	X / 312.2	18.21	24.91	43.12	143.22	
630.00	H / 2.51	Y / 333.6	20.11	24.91	45.02	178.24	
630.00	H / 1.61	Z / 277.6	24.31	24.91	49.22	289.07	6041
945.00	V / 1.37	X / 235.9	7.02	30.38	37.40	74.13	6041
945.00	V / 2.01	Y / 280.3	5.52	30.38	35.90	62.37	
*945.00	V / 1.00	Z / 180.0	1.12	30.38	31.50	37.58	
945.00	H / 1.49	X / 165.1	-2.38	30.38	28.00	25.12	
945.00	H / 1.00	Y / 340.8	9.82	30.38	40.20	102.33	
945.00	H / 1.00	Z / 27.0	7.52	30.38	37.90	78.52	6041
1260.00	V / 1.83	X / 263.0	55.30	-7.43	47.87	247.46	6041
1260.00	V / 1.00	Y / 298.80	49.50	-7.43	42.07	126.91	
1260.00	V / 1.00	Z / 44.4	44.60	-7.43	37.17	72.19	
1260.00	H / 1.00	X / 100.4	42.90	-7.43	35.47	59.36	
1260.00	H / 1.00	Y / 336.4	55.70	-7.43	48.27	259.12	
1260.00	H / 1.36	Z / 174.9	57.80	-7.43	50.37	329.99	6041
1575.00	V / 1.79	X / 293.0	56.50	-8.04	48.46	264.86	5000
1575.00	V / 1.00	Y / 246.9	39.40	-8.04	31.36	36.98	
1575.00	V / 1.61	Z / 65.4	47.00	-8.04	38.96	88.72	
1575.00	H / 1.24	X / 306.1	42.30	-8.04	34.26	51.64	
1575.00	H / 1.45	Y / 0.0	59.40	-8.04	51.36	369.83	
1575.00	H / 1.73	Z / 360.0	58.70	-8.04	50.66	341.19	5000



Retlif Testing Laboratories

Report No. R-2648P-2

<b>Test Method:</b>	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)									
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands									
<b>Customer:</b>	Abrites			<b>Job No.:</b>	R-2648P-2					
<b>Test Sample:</b>	315.00 MHz Remote Keyless Transmitter									
<b>Model No.:</b>	TA15									
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315 MHz									
<b>Technician:</b>	M. Nowak			<b>Date:</b>	08/09/2017, 08/10/2017					
<b>Notes:</b>	Detector: Peak, unless otherwise specified				Test Distance: 3 Meters					
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit			
MHz	(V/H)-Meters	X / Y / Z	dB $\mu$ V	dB	dB $\mu$ V/m	uV/m	uV/m			
1890.00	V / 1.47	X / 22.5	38.70	-5.20	33.50	47.32	6041			
1890.00	V / 1.24	Y / 106.50	36.00	-5.20	30.80	34.67	1			
1890.00	V / 1.26	Z / 73.0	36.60	-5.20	31.40	37.15	1			
1890.00	H / 1.00	X / 65.1	36.00	-5.20	30.80	34.67	1			
1890.00	H / 1.37	Y / 45.8	40.40	-5.20	35.20	57.54	1			
1890.00	H / 1.16	Z / 156.1	39.50	-5.20	34.30	51.88	6041			
2205.00	V / 1.47	X / 311.5	47.40	-4.98	42.42	132.13	5000			
2205.00	V / 1.10	Y / 88.6	37.80	-4.98	32.82	43.75	1			
2205.00	V / 1.00	Z / 281.2	42.00	-4.98	37.02	70.96	1			
2205.00	H / 1.00	X / 104.5	33.60	-4.98	28.62	26.98	1			
2205.00	H / 1.53	Y / 347.6	48.30	-4.98	43.32	146.55	1			
2205.00	H / 1.62	Z / 163.9	45.70	-4.98	40.72	108.64	5000			
2520.00	V / 1.71	X / 345.30	37.40	-3.84	33.56	47.64	6041			
2520.00	V / 1.00	Y / 298.10	29.80	-3.84	25.96	19.87	1			
2520.00	V / 1.00	Z / 180.0	29.70	-3.84	25.86	19.63	1			
2520.00	H / 1.00	X / 34.5	27.30	-3.84	23.46	14.89	1			
2520.00	H / 1.64	Y / 0.0	38.60	-3.84	34.76	54.70	1			
2520.00	H / 1.04	Z / 175.8	35.10	-3.84	31.26	36.56	6041			
2835.00	V / 1.55	X / 36.6	47.70	-2.78	44.92	176.19	5000			
2835.00	V / 1.68	Y / 183.6	40.50	-2.78	37.72	76.91	1			
2835.00	V / 1.00	Z / 242.6	45.30	-2.78	42.52	133.66	1			
2835.00	H / 1.74	X / 336.8	43.10	-2.78	40.32	103.75	1			
2835.00	H / 1.60	Y / 347.9	50.50	-2.78	47.72	243.22	1			
2835.00	H / 1.00	Z / 155.6	44.50	-2.78	41.72	121.90	5000			
3150.00	V / 1.42	X / 319.7	35.00	-1.28	33.72	48.53	6041			
3150.00	V / 1.73	Y / 20.40	37.10	-1.28	35.82	61.80	1			
3150.00	V / 1.70	Z / 279.3	38.20	-1.28	36.92	70.15	1			
3150.00	H / 1.62	X / 191.6	38.00	-1.28	36.72	68.55	1			
3150.00	H / 1.76	Y / 243.6	41.20	-1.28	39.92	99.08	1			
3150.00	H / 1.00	Z / 303.1	36.60	-1.28	35.32	58.34	6041			
	The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20 dB below the specified limit. Emissions from the EUT do not exceed the specified limits. NOTE: * Indicates minimum system sensitivity.									



Retlif Testing Laboratories

Report No. R-2648P-2

<b>Test Method:</b>	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)									
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands									
<b>Customer:</b>	Abrites			<b>Job No.:</b>	R-2648P-2					
<b>Test Sample:</b>	315.00 MHz Remote Keyless Transmitter									
<b>Model No.:</b>	TA15									
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315 MHz									
<b>Technician:</b>	M. Nowak			<b>Date:</b>	08/09/2017, 08/10/2017					
<b>Notes:</b>	Average values calculated from Peak readings			Duty Cycle:	47%	Correction -6.56 dB				
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit			
MHz	(V/H)-Meters	X / Y / Z	dB $\mu$ V/m	dB	dB $\mu$ V/m	uV/m	uV/m			
315.00	V / 2.05	X / 73.6	69.40	-6.56	62.84	1386.76	6041			
315.00	V / 2.16	Y / 258.6	68.20	-6.56	61.64	1207.81	1			
315.00	V / 1.31	Z / 273.1	54.10	-6.56	47.54	238.23	1			
315.00	H / 2.70	X / 360.0	66.00	-6.56	59.44	937.56	1			
315.00	H / 2.69	Y / 165.1	66.20	-6.56	59.64	959.40	1			
315.00	H / 1.00	Z / 132.7	74.12	-6.56	67.56	2387.81	6041			
630.00	V / 1.00	X / 234.3	49.72	-6.56	43.16	143.88	604.1			
630.00	V / 1.00	Y / 250.8	51.12	-6.56	44.56	169.04	1			
630.00	V / 1.00	Z / 147.8	33.70	-6.56	27.14	22.75	1			
630.00	H / 2.46	X / 312.2	43.12	-6.56	36.56	67.30	1			
630.00	H / 2.51	Y / 333.6	45.02	-6.56	38.46	83.75	1			
630.00	H / 1.61	Z / 277.6	24.31	-6.56	17.75	7.72	604.1			
945.00	V / 1.37	X / 235.9	37.40	-6.56	30.84	34.83	604.1			
945.00	V / 2.01	Y / 280.3	35.90	-6.56	29.34	29.31	1			
*945.00	V / 1.00	Z / 180.0	31.50	--	31.50	37.58	1			
945.00	H / 1.49	X / 165.1	28.00	-6.56	21.44	11.80	1			
945.00	H / 1.00	Y / 340.8	40.20	-6.56	33.64	48.08	1			
945.00	H / 1.00	Z / 27.0	37.90	-6.56	31.34	36.90	604.1			
1260.00	V / 1.83	X / 263.0	47.87	-6.56	41.31	116.28	604.1			
1260.00	V / 1.00	Y / 298.8	42.07	-6.56	35.51	59.63	1			
1260.00	V / 1.00	Z / 44.4	37.17	-6.56	30.61	33.92	1			
1260.00	H / 1.00	X / 100.4	35.47	-6.56	28.91	27.89	1			
1260.00	H / 1.00	Y / 336.4	48.27	-6.56	41.71	121.76	1			
1260.00	H / 1.36	Z / 174.9	50.37	-6.56	43.81	155.06	604.1			
1575.00	V / 1.79	X / 293.0	48.46	-6.56	41.90	124.45	500			
1575.00	V / 1.00	Y / 246.9	31.36	-6.56	24.80	17.38	1			
1575.00	V / 1.61	Z / 65.40	38.96	-6.56	32.40	41.69	1			
1575.00	H / 1.24	X / 306.1	34.26	-6.56	27.70	24.27	1			
1575.00	H / 1.45	Y / 0.0	51.36	-6.56	44.80	173.78	1			
1575.00	H / 1.73	Z / 360.0	50.66	-6.56	44.10	160.32	500			



**Retlif Testing Laboratories**

Report No. R-2648P-2

<b>Test Method:</b>	FCC Part 15 Subpart C, Field Strength of Emissions, Paragraph 15.231(b)									
	IC RSS-210, A1.1.2 (1) Field Strengths and Frequency Bands									
<b>Customer:</b>	Abrites			<b>Job No.:</b>	R-2648P-2					
<b>Test Sample:</b>	315.00 MHz Remote Keyless Transmitter									
<b>Model No.:</b>	TA15									
<b>Operating Mode:</b>	Continuously transmitting a RF signal at 315 MHz									
<b>Technician:</b>	M. Nowak			<b>Date:</b>	08/09/2017, 08/10/2017					
<b>Notes:</b>	Average values calculated from Peak readings			Duty Cycle: 47%	Correction -6.56 dB					
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Duty Cycle Correction	Corrected Reading	Converted Reading	Avg. Limit			
MHz	(V/H)-Meters	X / Y / Z	dB $\mu$ V/m	dB	dB $\mu$ V/m	uV/m	uV/m			
1890.00	V / 1.47	X / 22.5	33.50	-6.56	26.94	22.23	604.1			
1890.00	V / 1.24	Y / 106.50	30.80	-6.56	24.24	16.29	1			
1890.00	V / 1.26	Z / 73.0	31.40	-6.56	24.84	17.46	1			
1890.00	H / 1.00	X / 65.1	30.80	-6.56	24.24	16.29	1			
1890.00	H / 1.37	Y / 45.8	35.20	-6.56	28.64	27.04	1			
1890.00	H / 1.16	Z / 156.1	34.30	-6.56	27.74	24.38	604.1			
2205.00	V / 1.47	X / 311.5	42.42	-6.56	35.86	62.09	500			
2205.00	V / 1.10	Y / 88.6	32.82	-6.56	26.26	20.56	1			
2205.00	V / 1.00	Z / 281.2	37.02	-6.56	30.46	33.34	1			
2205.00	H / 1.00	X / 104.5	28.62	-6.56	22.06	12.68	1			
2205.00	H / 1.53	Y / 347.6	43.32	-6.56	36.76	68.87	1			
2205.00	H / 1.62	Z / 163.9	40.72	-6.56	34.16	51.05	500			
2520.00	V / 1.71	X / 345.30	33.56	-6.56	27.00	22.39	604.1			
2520.00	V / 1.00	Y / 298.10	25.96	-6.56	19.40	9.33	1			
2520.00	V / 1.00	Z / 180.0	25.86	-6.56	19.30	9.23	1			
2520.00	H / 1.00	X / 34.5	23.46	-6.56	16.90	7.00	1			
2520.00	H / 1.64	Y / 0.0	34.76	-6.56	28.20	25.70	1			
2520.00	H / 1.04	Z / 175.8	31.26	-6.56	24.70	17.18	604.1			
2835.00	V / 1.55	X / 36.6	44.92	-6.56	38.36	82.79	500			
2835.00	V / 1.68	Y / 183.6	37.72	-6.56	31.16	36.14	1			
2835.00	V / 1.00	Z / 242.6	42.52	-6.56	35.96	62.81	1			
2835.00	H / 1.74	X / 336.8	40.32	-6.56	33.76	48.75	1			
2835.00	H / 1.60	Y / 347.9	47.72	-6.56	41.16	114.29	1			
2835.00	H / 1.00	Z / 155.6	41.72	-6.56	35.16	57.28	500			
3150.00	V / 1.42	X / 319.7	33.72	-6.56	27.16	22.80	604.1			
3150.00	V / 1.73	Y / 20.40	35.82	-6.56	29.26	29.04	1			
3150.00	V / 1.70	Z / 279.3	36.92	-6.56	30.36	32.96	1			
3150.00	H / 1.62	X / 191.6	36.72	-6.56	30.16	32.21	1			
3150.00	H / 1.76	Y / 243.6	39.92	-6.56	33.36	46.56	1			
3150.00	H / 1.00	Z / 303.1	35.32	-6.56	28.76	27.42	604.1			
	The frequency range was scanned from 30 MHz to 3.2 GHz. All emissions not recorded were more than 20dB below the specified limit. Emissions from the EUT do not exceed the specified limits. NOTE: * Indicates minimum system sensitivity.									



**Retlif Testing Laboratories**

Report No. R-2648P-2


**FCC Part 15, Subpart C, Section 15.231(b), Duty Cycle Determination  
Test Data**



**Retlif Testing Laboratories**

Report No. R-2648P-2

\* Agilent 14:08:34 Aug 7, 2017

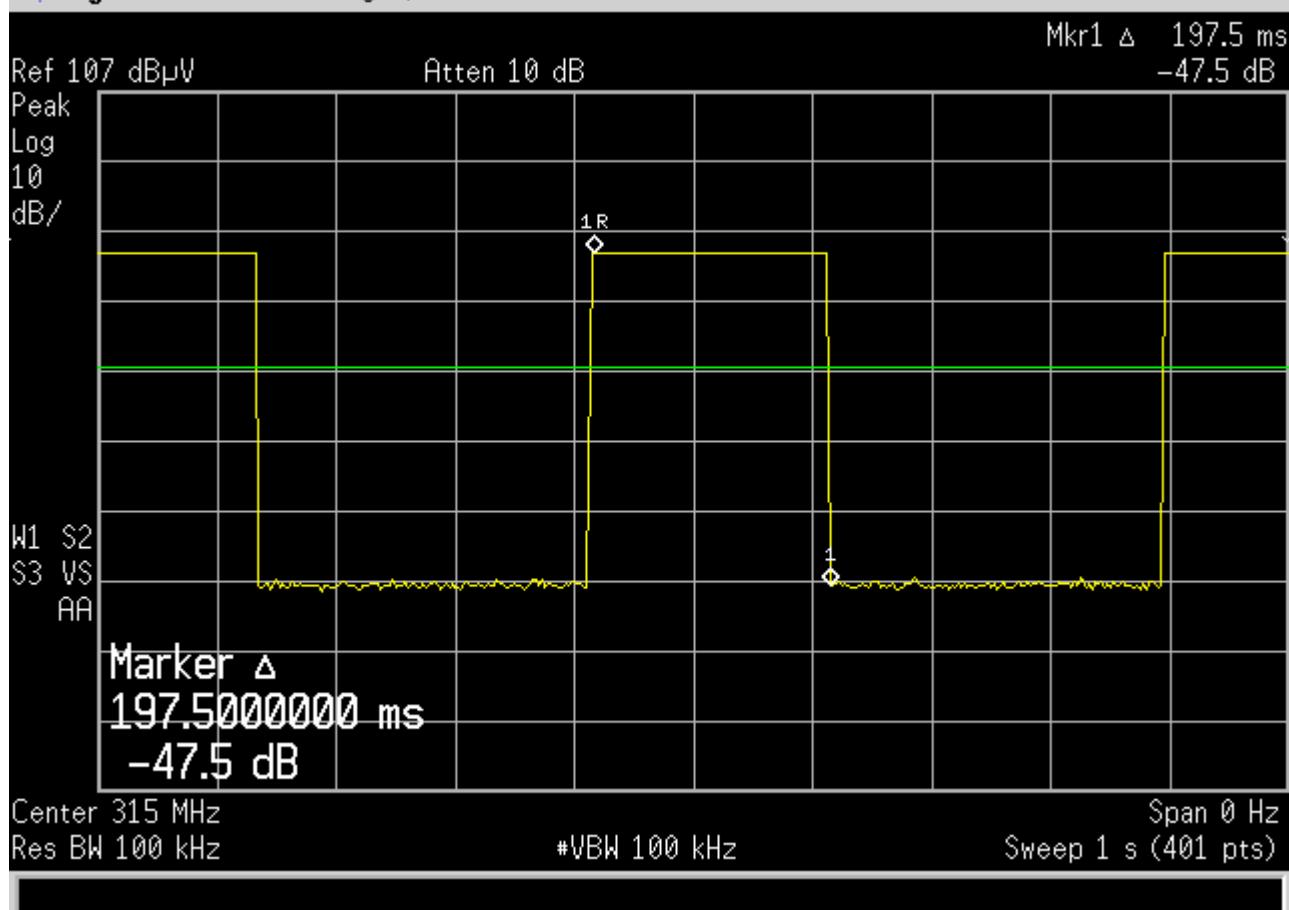


**Test Method: FCC Part 15.231(b), Duty Cycle Determination**

**Notes:** Measurement of cycle time > 100 ms



**Retlif Testing Laboratories**

Report No. R-2648P-2

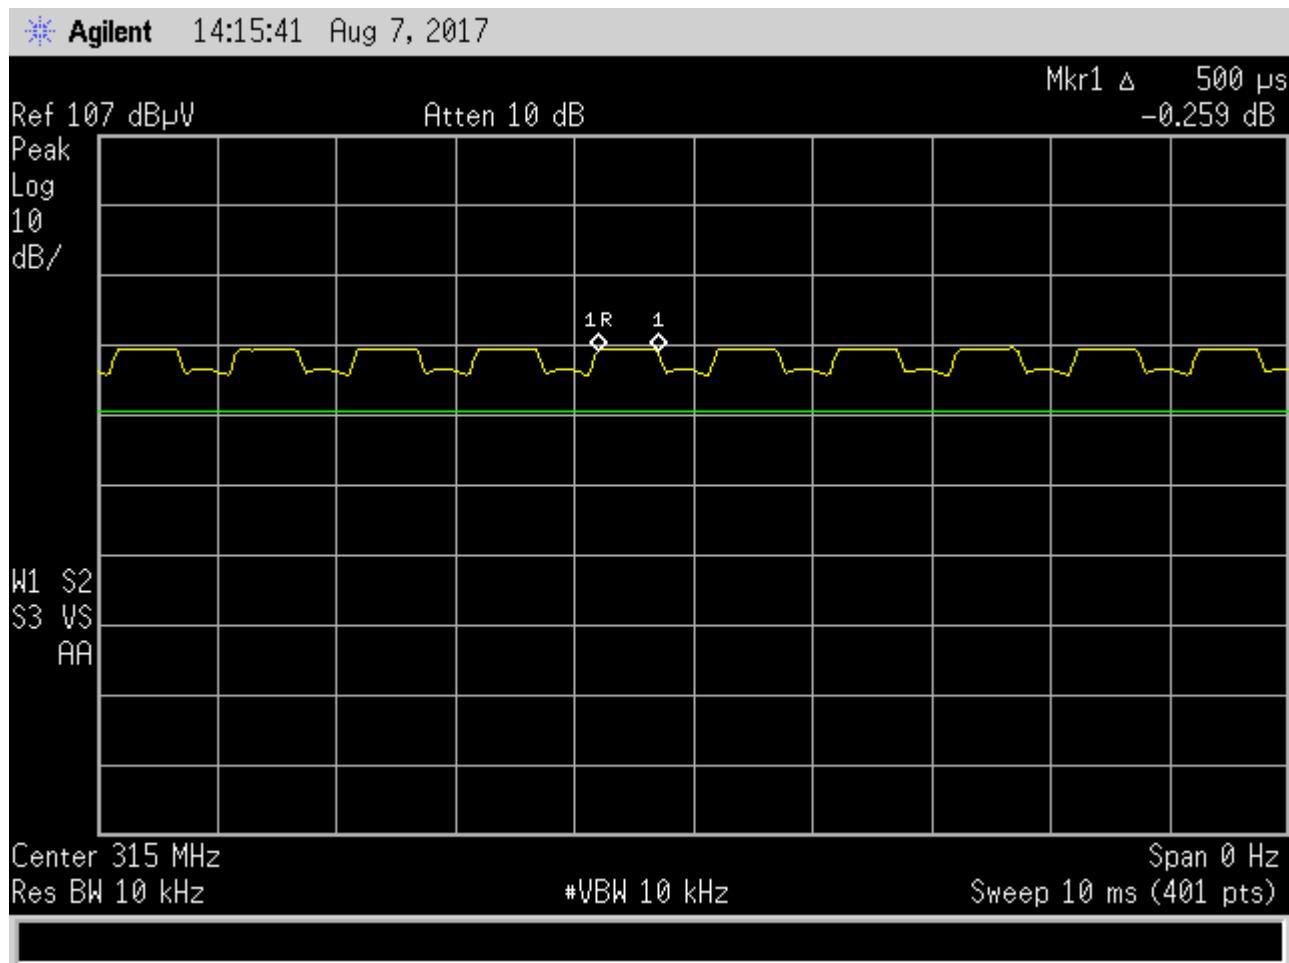

Test Method: FCC Part 15.231(b), Duty Cycle Determination


Notes: Pulse width on time = 500  $\mu$ S



Retlif Testing Laboratories

Report No. R-2648P-2

\* Agilent 14:16:52 Aug 7, 2017

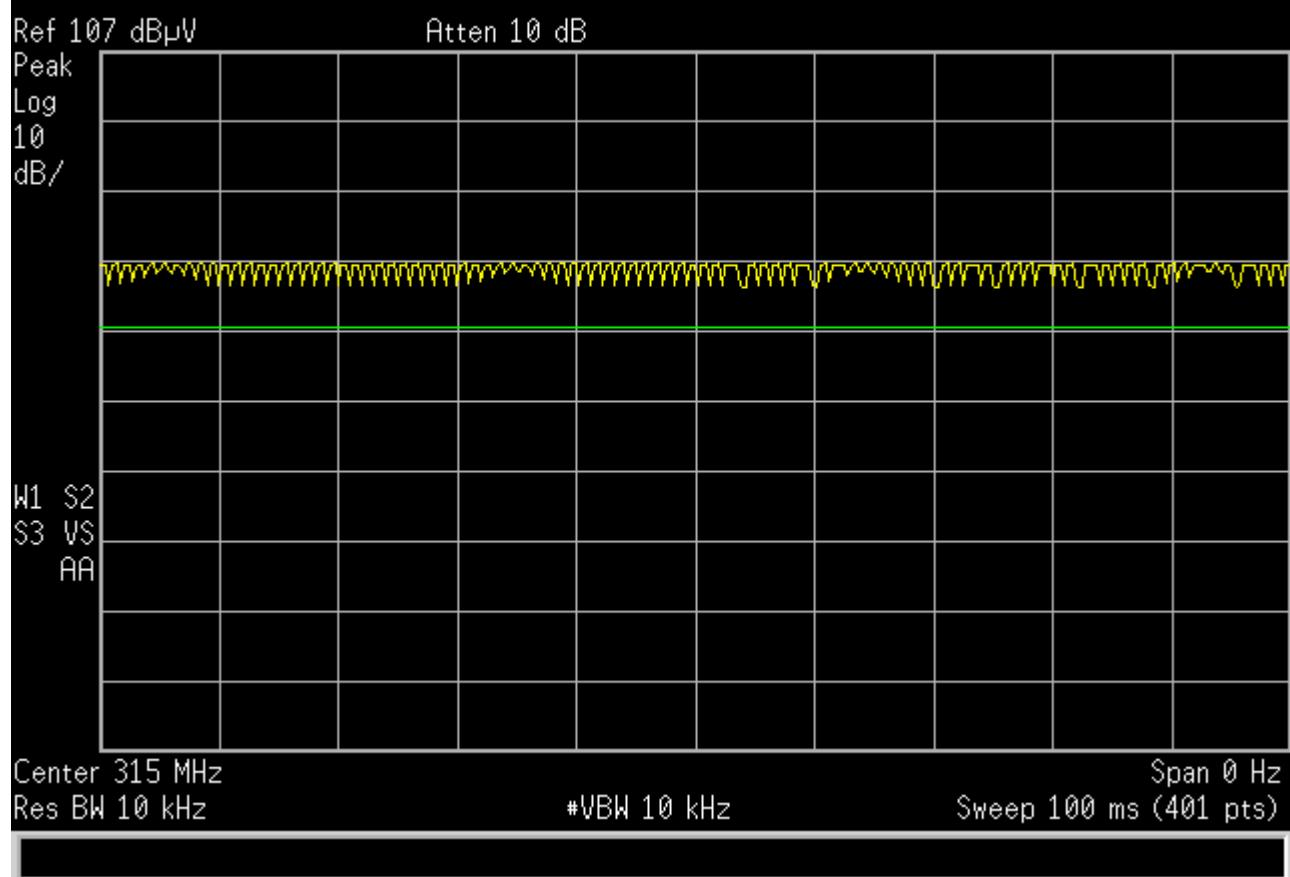

**Test Method: FCC Part 15.231(b), Duty Cycle Determination**

**Notes:** Number of Pulses = 94 @ 0.500ms



**Retlif Testing Laboratories**

Report No. R-2648P-2

**Field Strength of Spurious Emissions  
FCC Part 15, Subpart C, Section 15.231(b)  
Test Data**



**Retlif Testing Laboratories**

**Report No. R-2648P-2**

<b>Test Method:</b>		FCC Part 15 Subpart C, Field Strength of Spurious Emissions, Section 15.231(b).					
<b>IC RSS-210, A1.1.2 (3) Field Strength of Unwanted Emissions</b>							
<b>Customer:</b>	Abrites				<b>Job No.:</b>	R-2648P-2	
<b>Test Sample:</b>	315.00 MHz Remote Keyless Transmitter						
<b>Model No.:</b>	TA15				<b>Serial No.:</b>	N/A	
<b>Operating Mode:</b>	Continuously Transmitting an RF Signal at 315.00 MHz						
<b>Technician:</b>	D.Fiore				<b>Date:</b>	02/01/2017	
<b>Notes:</b>	Test Distance: 3 Meters Detector: Quasi-Peak from 30 MHz to 1 GHz						
Transmit Frequency	Test Frequency	Antenna/ EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Limit At 3 Meters
MHz	MHz	Polarization	dBuV	dB	dBuV/m	uV/m	uV/m
315.00	30.00	-	-	-	-	-	100.00
		-	-	-	-	-	
	*36.00	H/1.00	2.20	11.69	13.89	4.95	
		-	-	-	-	-	
	88.00	-	-	-	-	-	100.00
	88.00	-	-	-	-	-	150.00
		-	-	-	-	-	
	*110.00	H/1.00	0.60	13.79	14.39	5.24	
	*195.00	H/1.00	1.56	19.85	21.41	11.76	
	*202.00	H/1.00	8.50	13.90	22.40	13.18	
		-	-	-	-	-	
	216.00	-	-	-	-	-	150.00
	216.00	-	-	-	-	-	200.00
		-	-	-	-	-	
	*610.00	H/1.00	1.70	24.21	25.91	19.74	
		-	-	-	-	-	
	960.00	-	-	-	-	-	200.00
	960.00	-	-	-	-	-	500.00
		-	-	-	-	-	
	*995.00	H/1.00	3.80	31.88	35.68	60.81	
		-	-	-	-	-	
315.00	1000.00	-	-	-	-	-	500.00
The frequency range was scanned from 9 kHz to 1.0 GHz.							
The emissions observed from the EUT do not exceed the specified limits.							
Emissions not recorded were more than 20dB under the specified limit.							
*Noise Floor Measurements (minimum sensitivity of the receiver system).							



**Retlif Testing Laboratories**

Report No. R-2648P-2

**FCC Part 15, Subpart C, Section 15.231 (c), Bandwidth of Emission  
Test Data**



**Retlif Testing Laboratories**

**Report No. R-2648P-2**

Agilent 06:22:06 Aug 8, 2017

Mkr1  $\Delta$  46.50 kHz  
0.116 dB

Ref 107 dB $\mu$ V

Atten 10 dB


Peak  
Log  
10  
dB/

M1 S2  
S3 FS  
AA

Center 315 MHz  
#Res BW 10 kHz

VBW 10 kHz

Span 100 kHz  
#Sweep 100 ms (401 pts)

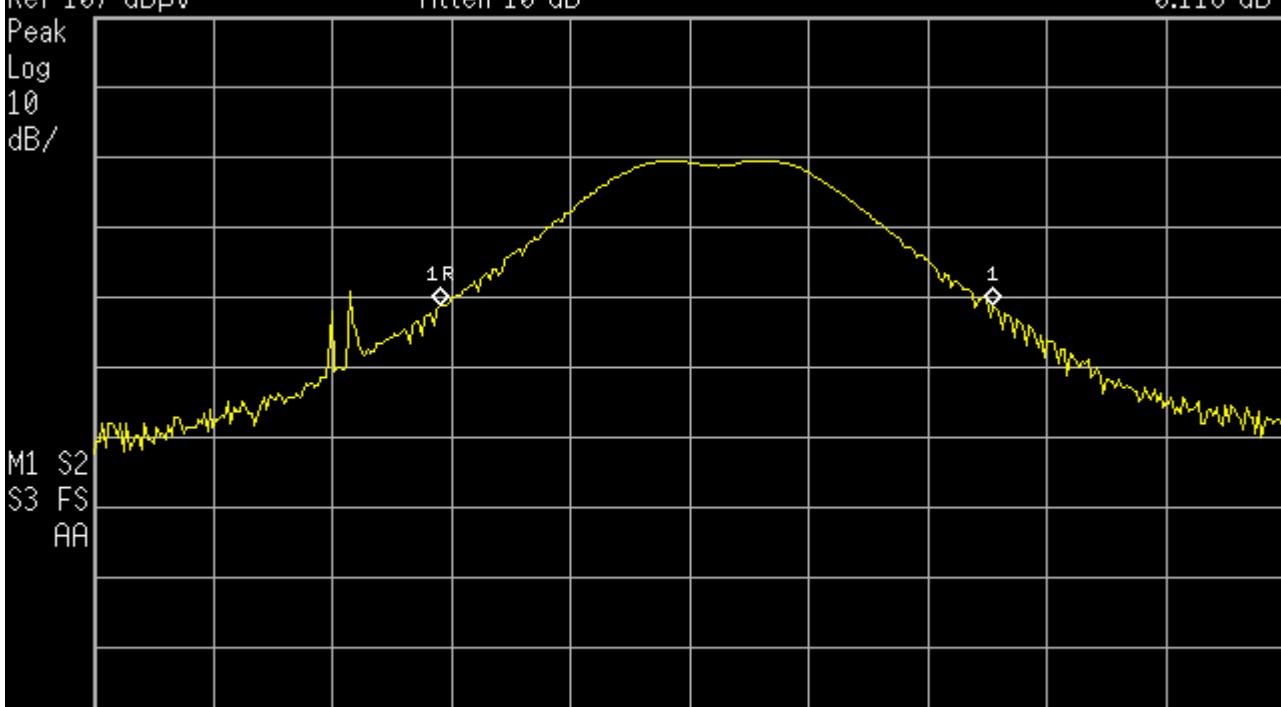

46.50 kHz Bandwidth



Retlif Testing Laboratories

Report No. R-2648P-2


**FCC Part 15, Subpart C, Section 15.231(a)(1), Timing Requirements  
Test Data**



**Retlif Testing Laboratories**

**Report No. R-2648P-2**

Agilent 06:28:05 Aug 8, 2017

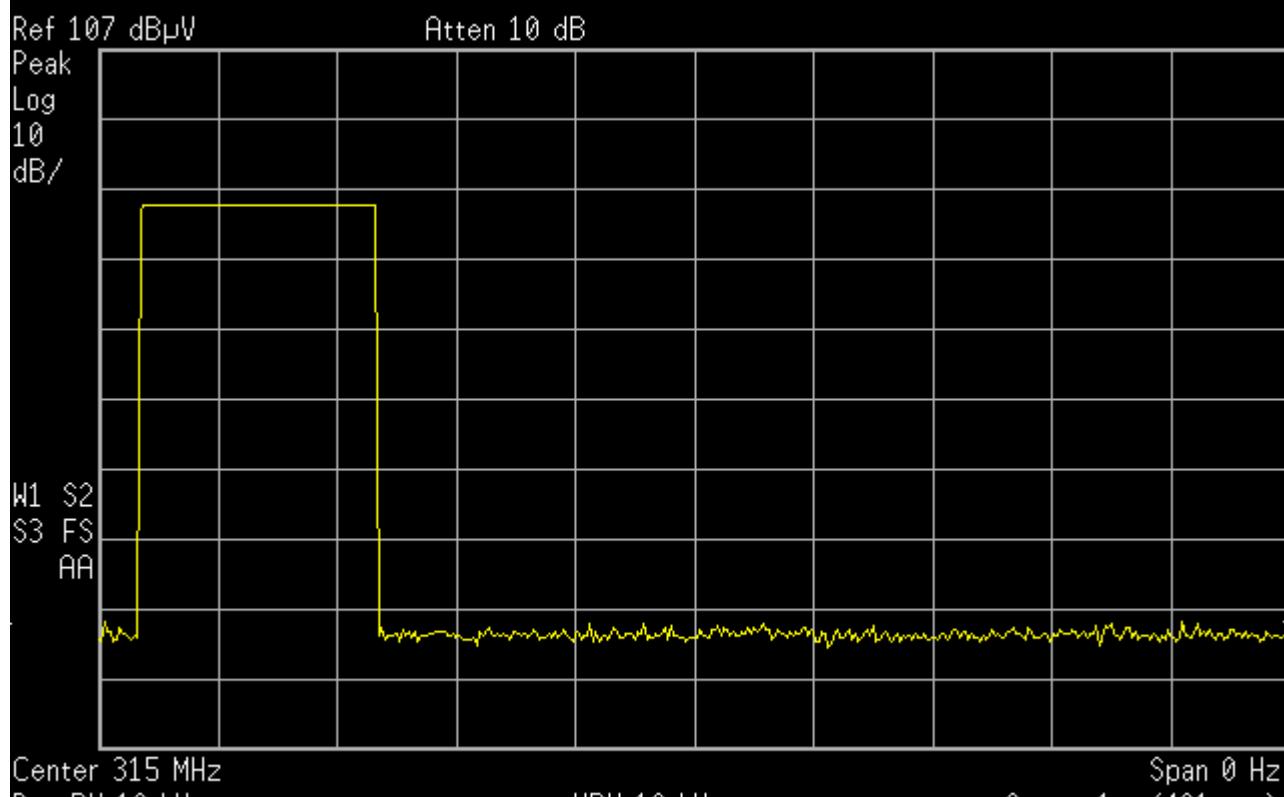

**Test Method: FCC Part 15.231(a)(1), Transmitter Deactivation Time**

**Notes:** The transmitter was verified to cease transmitting within 5 seconds of manual deactivation.



**Retlif Testing Laboratories**

Report No. R-2648P-2