



# FCC RADIO TEST REPORT

## FCC ID: 2AKFMUWAP2

**Product :** Smart APP Enabled Pet Ball Launcher

**Trade Name :** N/A

**Model Name :** UWAP2

**Serial Model :** N/A

**Report No. :** POCE-161116042F

### **Prepared for**

Xiamen YOU WEI Import & Export Co.,Ltd

Unit 1601, No.478, Xinglin Wan Road, Jimei District, Xiamen City,  
Fujian Province, China

### **Prepared by**

Shenzhen POCE Technology Co.,Ltd.

Room 502, Bldg. 1, Xinghua Garden, Baoan Road Xixiang,  
Baoan District, Shenzhen, China

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Xiamen YOU WEI Import & Export Co.,Ltd  
Address ..... : Unit 1601, No.478, Xinglin Wan Road, Jimei District, Xiamen City, Fujian Province, China

**Manufacture's Name** ..... : Xiamen YOU WEI Import & Export Co.,Ltd  
Address ..... : Unit 1601, No.478, Xinglin Wan Road, Jimei District, Xiamen City, Fujian Province, China

### Product description

Product name ..... : Smart APP Enabled Pet Ball Launcher

Model and/or type reference : UWAP2

Serial Model ..... : N/A

**Standards** ..... : FCC Part15.247

Test procedure ..... ANSI C63.10: 2013

This device described above has been tested by POCE, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of POCE, this document may be altered or revised by POCE, personal only, and shall be noted in the revision of the document.

**Date of Test** ..... :

Date (s) of performance of tests ..... : 10 Nov. 2016 ~22 Nov. 2016

Date of Issue ..... : 22 Nov. 2016

Test Result ..... : **Pass**

Testing Engineer : 

(Ken Li)

Technical Manager : 

(Jimmy Yao)

Authorized Signatory : 

(Terry Yang)

**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>26</b>
4.1 APPLIED PROCEDURES / LIMIT	26
4.1.1 TEST PROCEDURE	26
4.1.2 DEVIATION FROM STANDARD	26
4.1.3 TEST SETUP	26
4.1.4 EUT OPERATION CONDITIONS	26
4.1.5 TEST RESULTS	27
<b>5 . BANDWIDTH TEST</b>	<b>33</b>
5.1 APPLIED PROCEDURES / LIMIT	33
5.1.1 TEST PROCEDURE	33

## Table of Contents

	Page
<b>5.1.2 DEVIATION FROM STANDARD</b>	33
<b>5.1.3 TEST SETUP</b>	33
<b>5.1.4 EUT OPERATION CONDITIONS</b>	33
<b>5.1.5 TEST RESULTS</b>	34
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>40</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	40
<b>6.1.1 TEST PROCEDURE</b>	40
<b>6.1.2 DEVIATION FROM STANDARD</b>	40
<b>6.1.3 TEST SETUP</b>	40
<b>6.1.4 EUT OPERATION CONDITIONS</b>	40
<b>6.1.5 TEST RESULTS</b>	41
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>42</b>
<b>7.1 DEVIATION FROM STANDARD</b>	42
<b>7.2 TEST SETUP</b>	42
<b>7.3 EUT OPERATION CONDITIONS</b>	42
<b>7.4 TEST RESULTS</b>	43
<b>8 . ANTENNA REQUIREMENT</b>	<b>47</b>
<b>8.1 STANDARD REQUIREMENT</b>	47
<b>8.2 EUT ANTENNA</b>	47

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

<b>FCC Part15 (15.247) , Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1)" N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

Shenzhen POCE Technology Co.,Ltd.

Address: Room 502, Bldg. 1, Xinghua Garden, Baoan Road Xixiang, Baoan District, Shenzhen, China

FCC-Registration No.: 222278

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart APP Enabled Pet Ball Launcher	
Trade Name	N/A	
Model Name	UWAP2	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Smart APP Enabled Pet Ball Launcher	
	Operation Frequency:	802.11b/g/n(20MHz):2412~2462 MHz
	Modulation Type:	CCK/OFDM/DBPSK/DAPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20M): 78/52/6.5Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 16.12 dBm (Max.)
Channel List	Please refer to the Note 2.	
Adapter	Input: AC 100-240V, 50/60Hz Output:DC12V,2A	

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.

Table for Filed Antenna

Ant .	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	Integrated antenna	N/A	1.33	Wifi Antenna

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	Link Mode


For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	Link Mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) The device continues to emission, duty cycle=100%

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

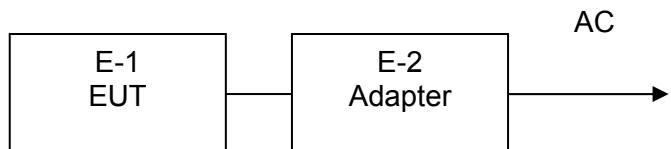

## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Smart APP Enabled Pet Ball Launcher	N/A	UWAP2	N/A	EUT
E-2	Adapter	N/A	RQ-1220MB	N/A	adapter

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY4510840	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2015.12.22	2016.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.06.07	2017.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2016.06.08	2017.06.07	1 year

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

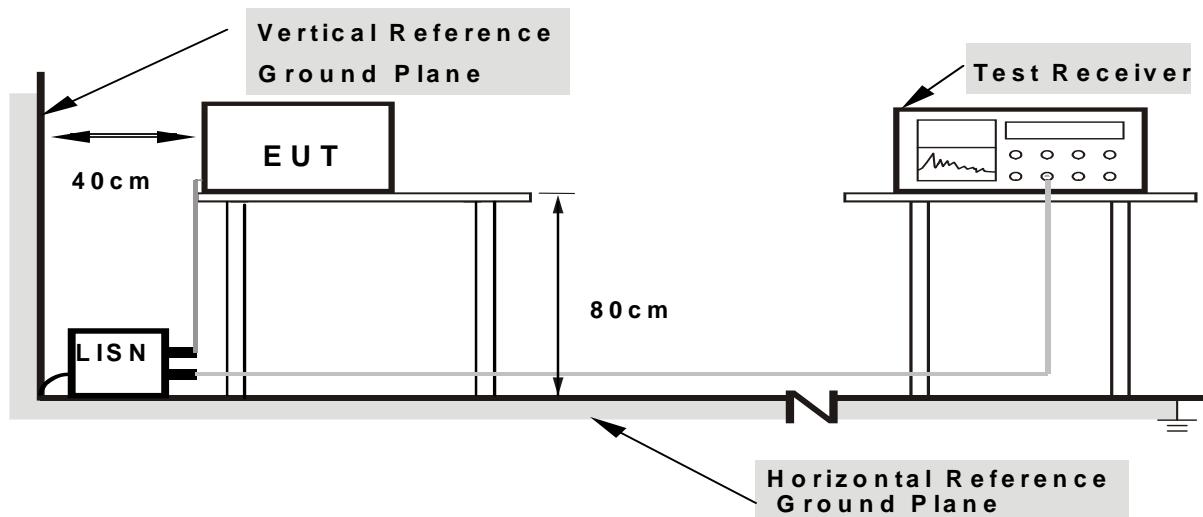

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name. :	UWAP2
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V	Test Mode :	Mode 4

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V)	(dB $\mu$ V)	(dB)	
0.2819	40.79	10.43	51.22	60.76	-9.54	QP
0.2819	31.20	10.43	41.63	50.76	-9.13	AVG
0.3379	35.69	10.42	46.11	59.25	-13.14	QP
0.3379	33.77	10.42	44.19	49.25	-5.06	AVG
1.2900	31.32	10.41	41.73	56.00	-14.27	QP
1.2900	28.28	10.41	38.69	46.00	-7.31	AVG
1.5660	36.45	10.42	46.87	56.00	-9.13	QP
1.5660	30.45	10.42	40.87	46.00	-5.13	AVG
3.3620	40.91	10.57	51.48	56.00	-4.52	QP
3.3620	30.91	10.57	41.48	46.00	-4.52	AVG
3.4220	41.91	10.60	52.51	56.00	-3.49	QP
3.4220	31.93	10.60	42.53	46.00	-3.47	AVG

#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

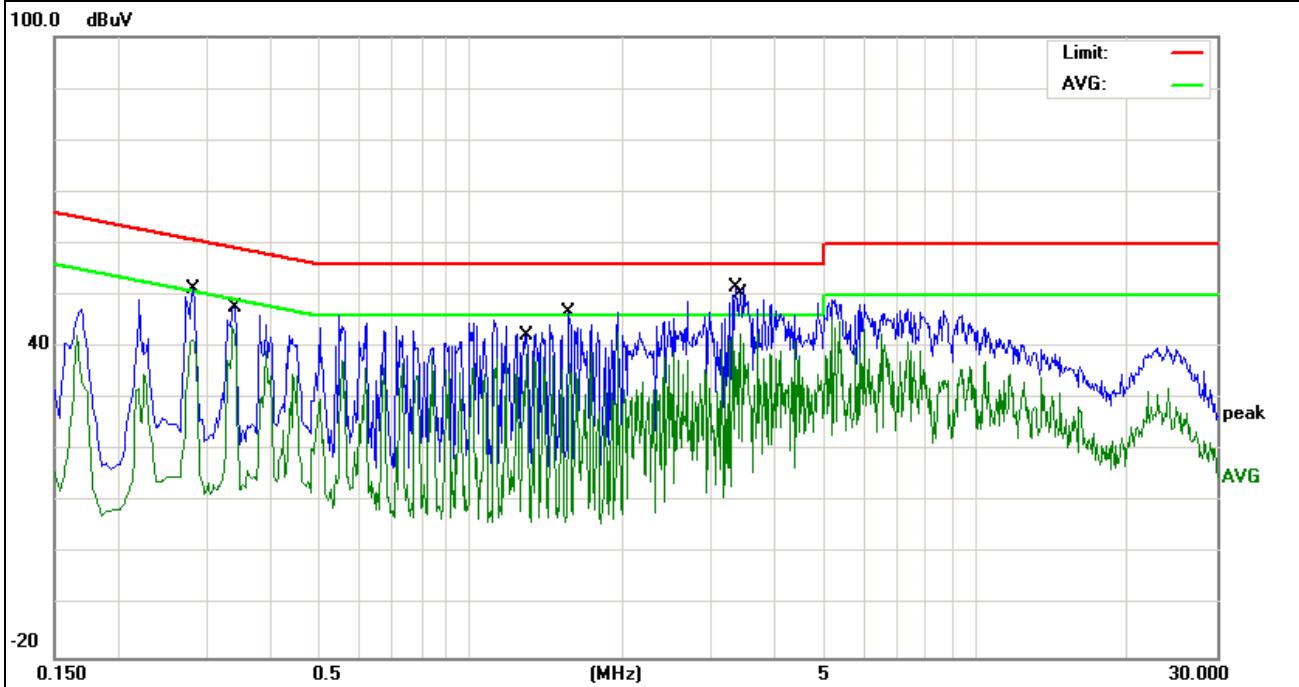


EUT :	Smart APP Enabled Pet Ball Launcher	Model Name. :	UWAP2
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Margin (dB)	Detector Type
0.3339	38.02	10.42	48.44	59.35	-10.91	
0.3339	28.02	10.42	38.44	49.35	-10.91	AVG
0.4467	32.41	10.41	42.82	56.94	-14.12	QP
0.4467	30.39	10.41	40.80	46.94	-6.14	AVG
2.2340	36.46	10.42	46.88	56.00	-9.12	QP
2.2340	28.84	10.42	39.26	46.00	-6.74	AVG
2.2900	37.52	10.42	47.94	56.00	-8.06	QP
2.2900	27.52	10.42	37.94	46.00	-8.06	AVG
3.9180	29.50	10.62	40.12	56.00	-15.88	QP
3.9180	22.32	10.62	32.94	46.00	-13.06	AVG
4.8578	38.78	10.64	49.42	56.00	-6.58	QP
4.8578	18.17	10.64	28.81	46.00	-17.19	AVG

## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

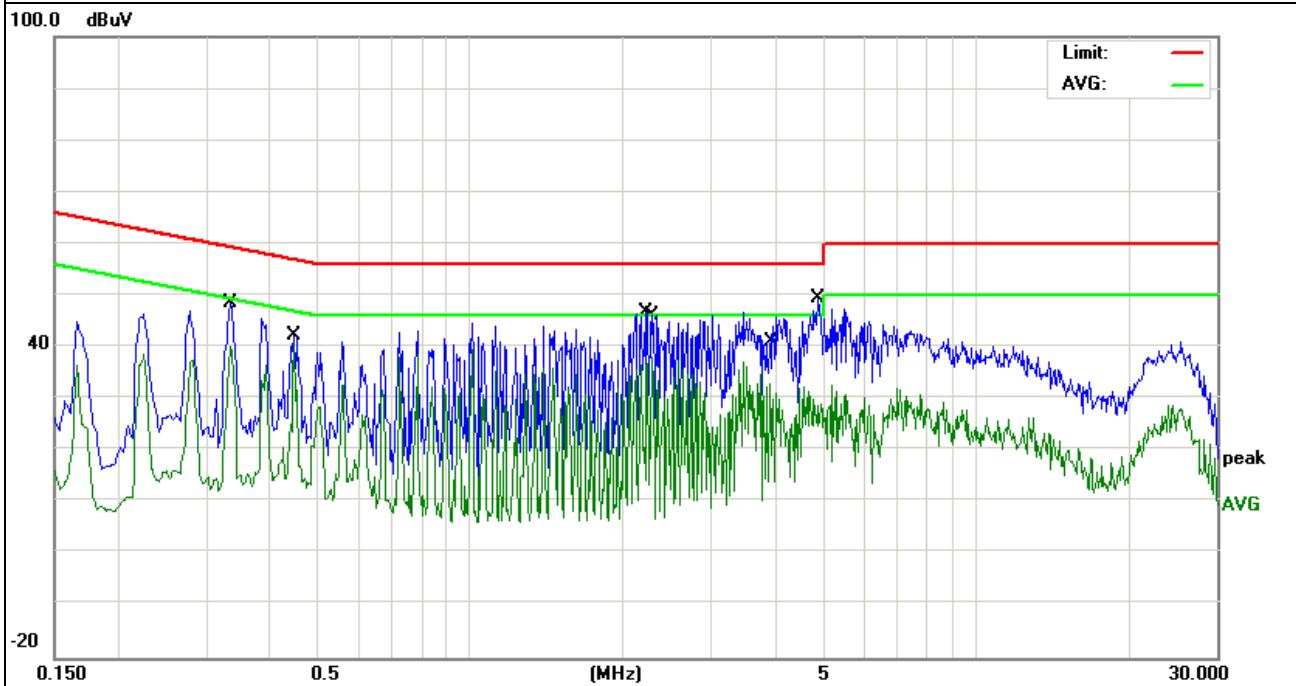

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### **3.2.2 TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### **3.2.3 DEVIATION FROM TEST STANDARD**


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

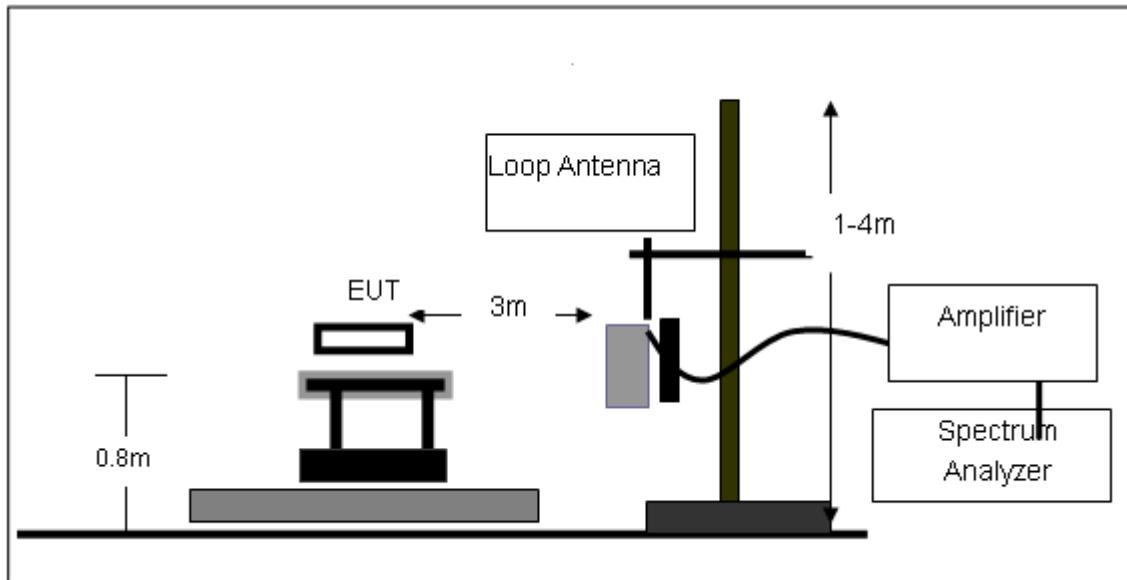

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

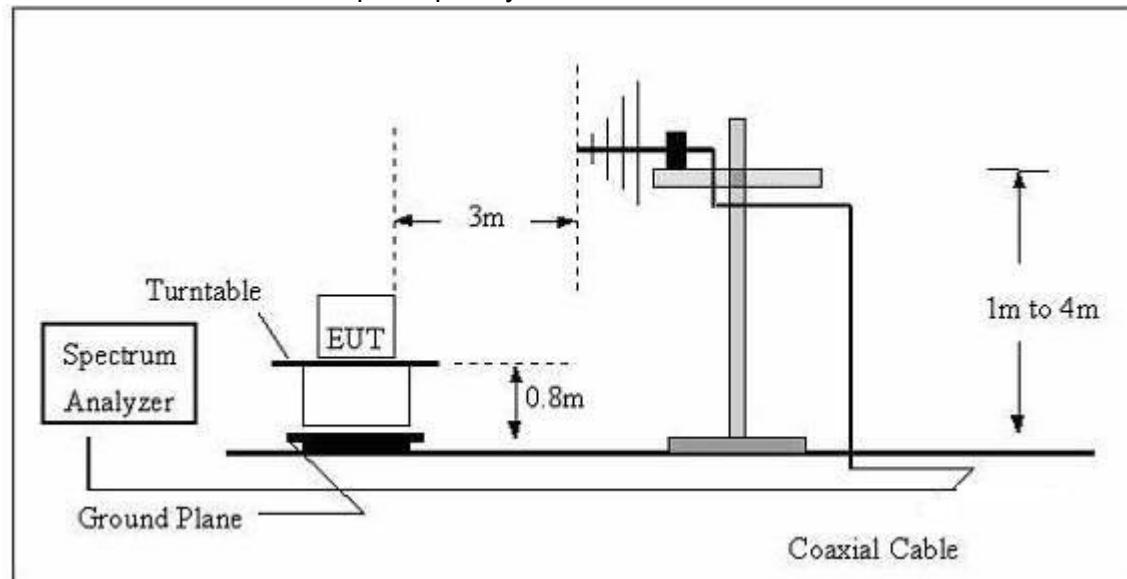

(C) Radiated Emission Test-Up Frequency Above 1GHz

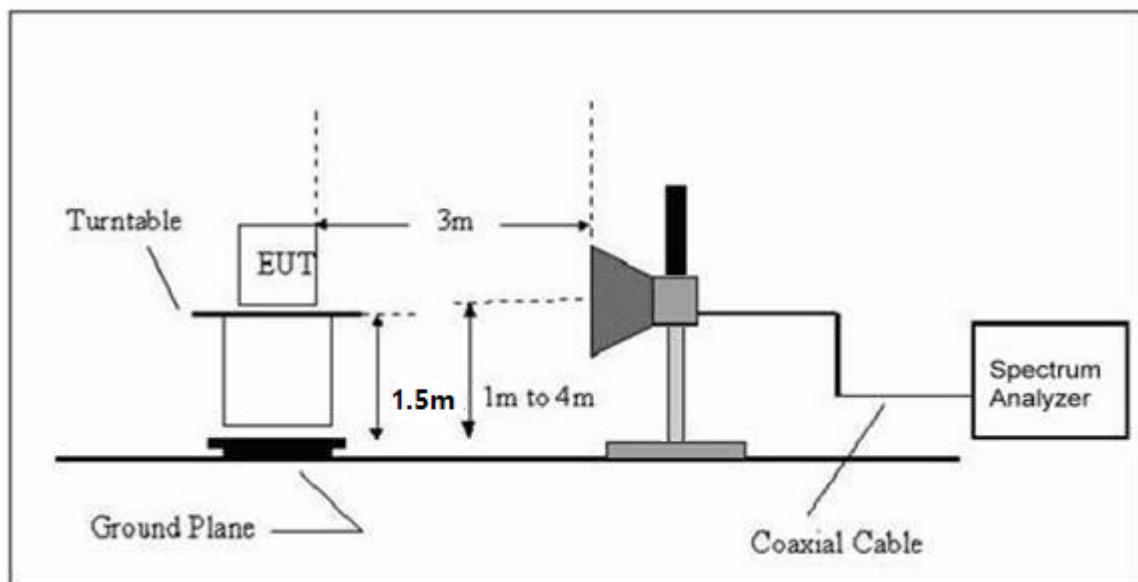

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	Smart APP Enabled Pet Ball Launcher	Model Name. :	UWAP2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);  
 Limit line = specific limits(dBuV) + distance extrapolation factor.


### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V
Test Mode :	TX	Polarization :	Horizontal

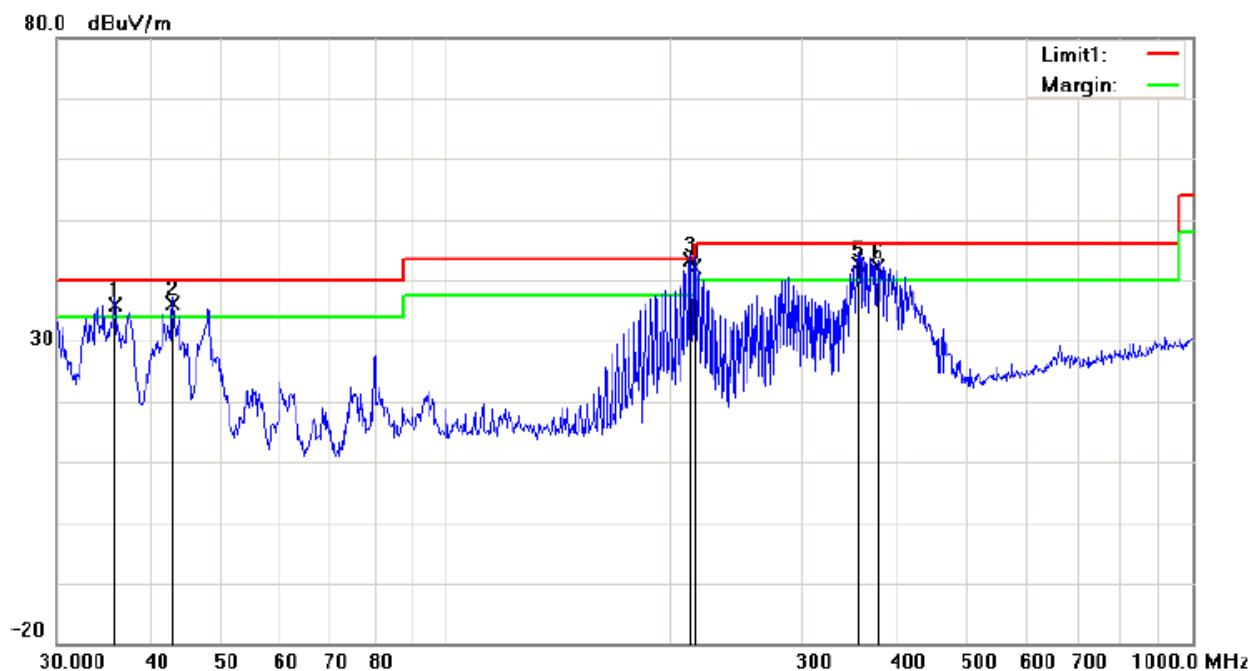

No	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Height	Degree
1	H	35.8747	40.58	QP	-4.58	36.00	40.00	-4.00	100	69
2	H	42.8998	45.66	QP	-9.53	36.13	40.00	-3.87	100	31
3	H	212.2695	52.25	QP	-8.85	43.40	43.50	-0.10	100	318
4	H	215.2678	50.97	QP	-8.87	42.10	43.50	-1.40	100	26
5	H	356.6758	47.93	QP	-5.30	42.63	46.00	-3.37	100	248
6	H	378.5843	47.03	QP	-4.80	42.23	46.00	-3.77	100	175

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V
Test Mode :	TX	Polarization :	Vertical

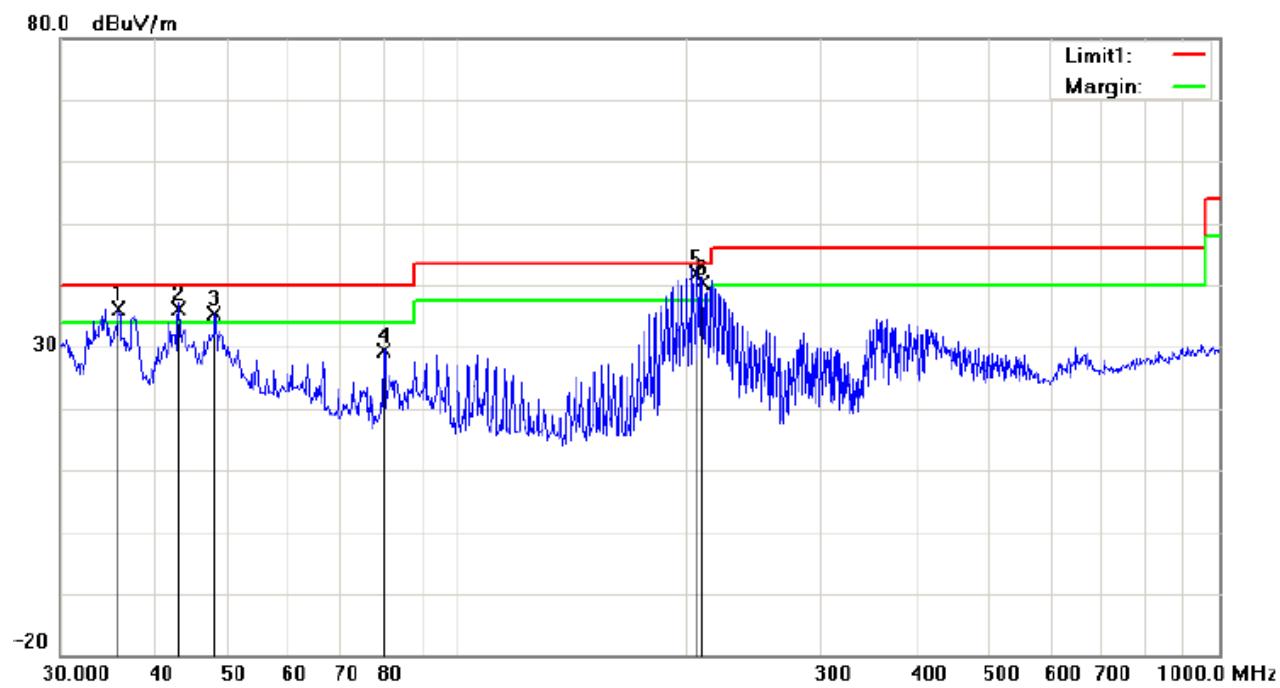

No	P/L	Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Height	Degree
1	V	35.7491	40.65	QP	-4.49	36.16	40.00	-3.84	100	119
2	V	42.8998	45.77	QP	-9.53	36.24	40.00	-3.76	100	128
3	V	47.8260	47.63	QP	-12.20	35.43	40.00	-4.57	100	37
4	V	79.8003	43.14	peak	-13.77	29.37	40.00	-10.63	100	263
5	V	205.6751	50.71	QP	-8.79	41.92	43.50	-1.58	100	46
6	V	209.3129	49.16	QP	-8.82	40.34	43.50	-3.16	100	314

### 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Remark	Comment
Low Channel (2412 MHz)-Above 1G							
4824.119	56.85	10.44	67.29	74.00	-6.71	Pk	Vertical
4824.119	32.14	10.44	42.58	54.00	-11.42	AV	Vertical
7236.124	50.79	12.39	63.18	74.00	-10.82	Pk	Vertical
7236.124	33.56	12.39	45.95	54.00	-8.05	AV	Vertical
4824.367	54.47	10.44	64.91	74.00	-9.09	Pk	Horizontal
4824.367	29.68	10.44	40.12	54.00	-13.88	AV	Horizontal
7236.192	46.52	12.39	58.91	74.00	-15.09	Pk	Horizontal
7236.192	30.06	12.39	42.45	54.00	-11.55	AV	Horizontal
Mid Channel (2437 MHz)-Above 1G							
4874.133	50.44	10.40	60.84	74.00	-13.16	Pk	Vertical
4874.133	31.28	10.40	41.68	54.00	-12.32	AV	Vertical
7311.198	48.96	12.75	61.71	74.00	-12.29	Pk	Vertical
7311.198	29.71	12.75	42.46	54.00	-11.54	AV	Vertical
4874.091	52.26	10.40	62.66	74.00	-11.34	Pk	Horizontal
4874.091	30.03	10.40	40.43	54.00	-13.57	AV	Horizontal
7311.335	47.42	12.75	60.17	74.00	-13.83	Pk	Horizontal
7311.335	30.09	12.75	42.84	54.00	-11.16	AV	Horizontal
High Channel (2482 MHz)- Above 1G							
4924.149	49.86	10.39	60.25	74.00	-13.75	Pk	Vertical
4924.149	29.66	10.39	40.05	54.00	-13.95	AV	Vertical
7386.173	47.42	12.68	60.10	74.00	-13.90	Pk	Vertical
7386.173	29.83	12.68	42.51	54.00	-11.49	AV	Vertical
4924.126	49.41	10.39	59.80	74.00	-14.20	Pk	Horizontal
4924.126	29.98	10.39	40.37	54.00	-13.63	AV	Horizontal
7386.144	47.12	12.68	59.80	74.00	-14.20	Pk	Horizontal
7386.144	29.62	12.68	42.30	54.00	-11.70	AV	Horizontal

#### Note:

All the modulation modes have been tested, and the worst result was report  
 "802.11b" mode is the worst mode.

Emission Level= Reading Level+Probe Factor +Cable Loss.

All other emissions more than 20dB below the limit.

## Band Edge Emission:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
802.11b							
2350.68	62.76	-13.06	49.7	74	-24.3	Pk	Vertical
2350.68	56.9	-13.06	43.84	54	-10.16	AV	Vertical
2400	65.57	-13.06	52.51	74	-21.49	Pk	Vertical
2400	57.3	-13.06	44.24	54	-9.76	AV	Vertical
2392.63	62.65	-13.06	49.59	74	-24.41	Pk	Horizontal
2392.63	56.84	-13.06	43.78	54	-10.22	AV	Horizontal
2400	65.86	-13.06	52.8	74	-21.2	Pk	Horizontal
2400	56.92	-13.06	43.86	54	-10.14	AV	Horizontal
2483.5	64.4	-12.78	51.62	74	-22.38	Pk	Vertical
2483.5	54.55	-12.78	41.77	54	-12.23	AV	Vertical
2483.5	62.76	-13.06	49.7	74	-24.3	Pk	Horizontal
2483.5	56.9	-13.06	43.84	54	-10.16	AV	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
802.11g							
2373.97	63.64	-13.06	50.58	74	-23.42	Pk	Vertical
2373.97	57.78	-13.06	44.72	54	-9.28	AV	Vertical
2400	66.45	-13.06	53.39	74	-20.61	Pk	Vertical
2400	58.18	-13.06	46.12	54	-8.88	AV	Vertical
2365.38	63.53	-13.06	50.47	74	-23.53	Pk	Horizontal
2365.38	57.72	-13.06	44.66	54	-9.34	AV	Horizontal
2400	66.74	-13.06	53.68	74	-20.32	Pk	Horizontal
2400	57.8	-13.06	44.74	54	-9.26	AV	Horizontal
2483.5	65.28	-12.78	52.5	74	-21.5	Pk	Vertical
2483.5	54.2	-12.78	41.42	54	-12.58	AV	Vertical
2483.5	65.21	-12.78	52.43	74	-21.57	Pk	Horizontal
2483.5	54.1	-12.78	41.32	54	-12.68	AV	Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
802.11n(20)							
2383.78	63.07	-13.06	50.01	74	-23.99	Pk	Vertical
2383.78	56.28	-13.06	43.22	54	-10.78	AV	Vertical
2400	65.95	-13.06	52.89	74	-21.11	Pk	Vertical
2400	56.03	-13.06	42.97	54	-11.03	AV	Vertical
2365.02	62.96	-13.06	49.9	74	-24.1	Pk	Horizontal
2365.02	56.09	-13.06	43.03	54	-10.97	AV	Horizontal
2400	65.87	-13.06	52.81	74	-21.19	Pk	Horizontal
2400	56.97	-13.06	43.91	54	-10.09	AV	Horizontal
2483.5	64.26	-12.78	51.48	74	-22.52	Pk	Vertical
2483.5	53.27	-12.78	40.49	54	-13.51	AV	Vertical
2483.5	64.04	-12.78	51.26	74	-22.74	Pk	Horizontal
2483.5	53.13	-12.78	40.35	54	-13.65	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

## 4. POWER SPECTRAL DENSITY TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

#### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW  $\geq$  3 kHz.
4. Set the VBW  $\geq$  3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP




#### 4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.1.5 TEST RESULTS

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC 120V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-16.50	8	PASS
2437 MHz	-16.09	8	PASS
2462 MHz	-15.80	8	PASS


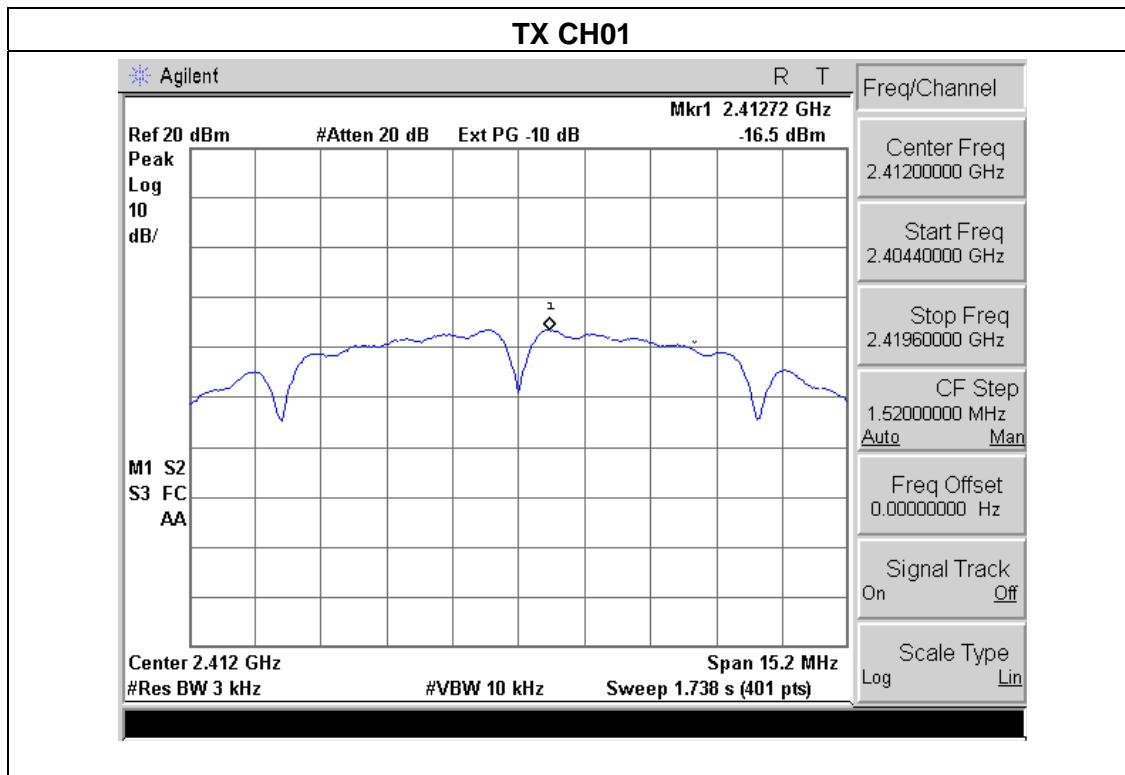


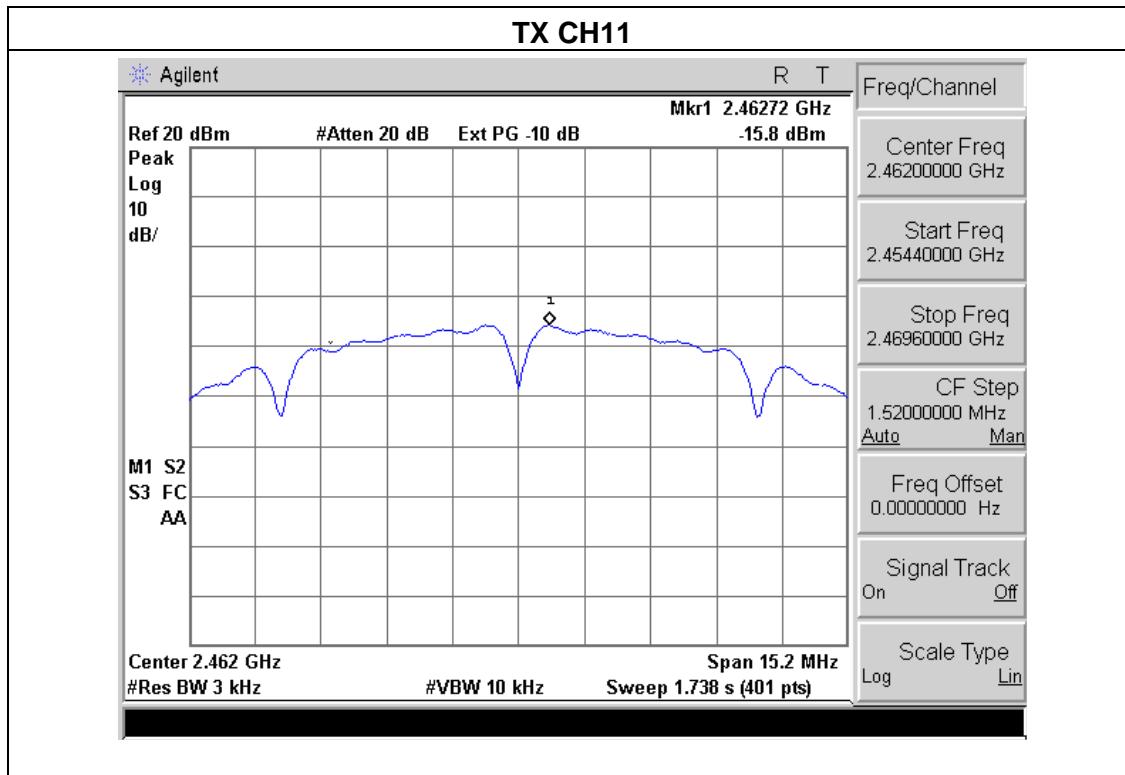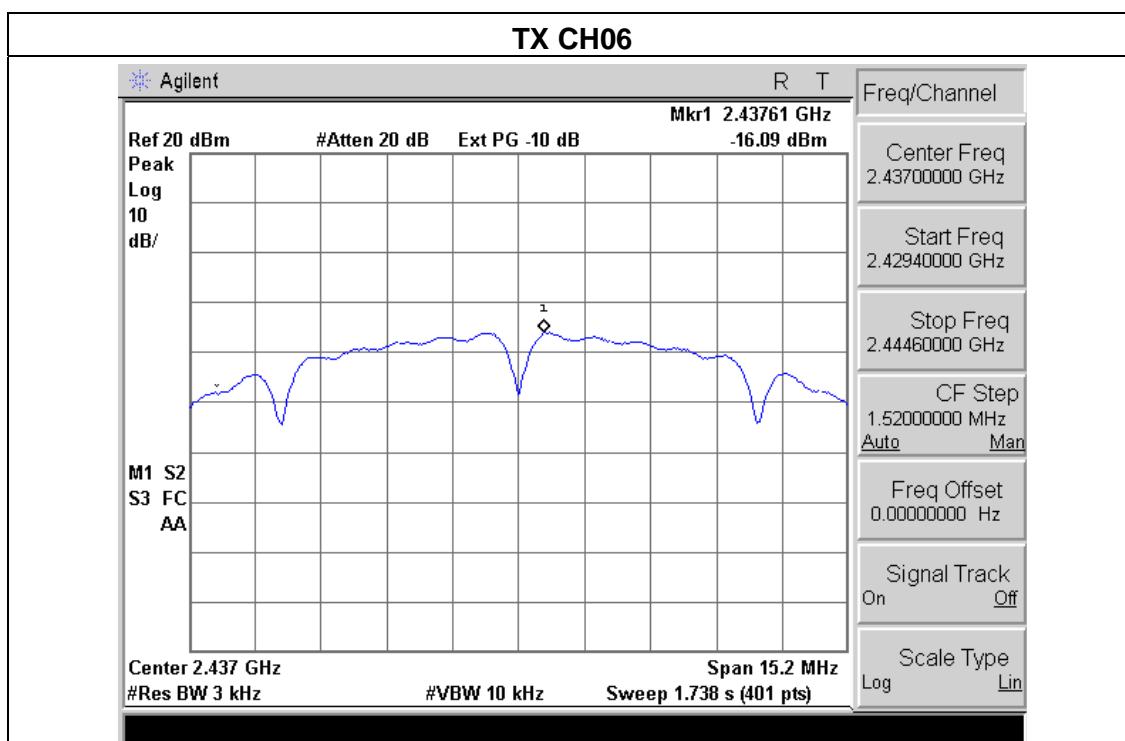

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC 120V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-20.29	8	PASS
2437 MHz	-17.92	8	PASS
2462 MHz	-19.21	8	PASS


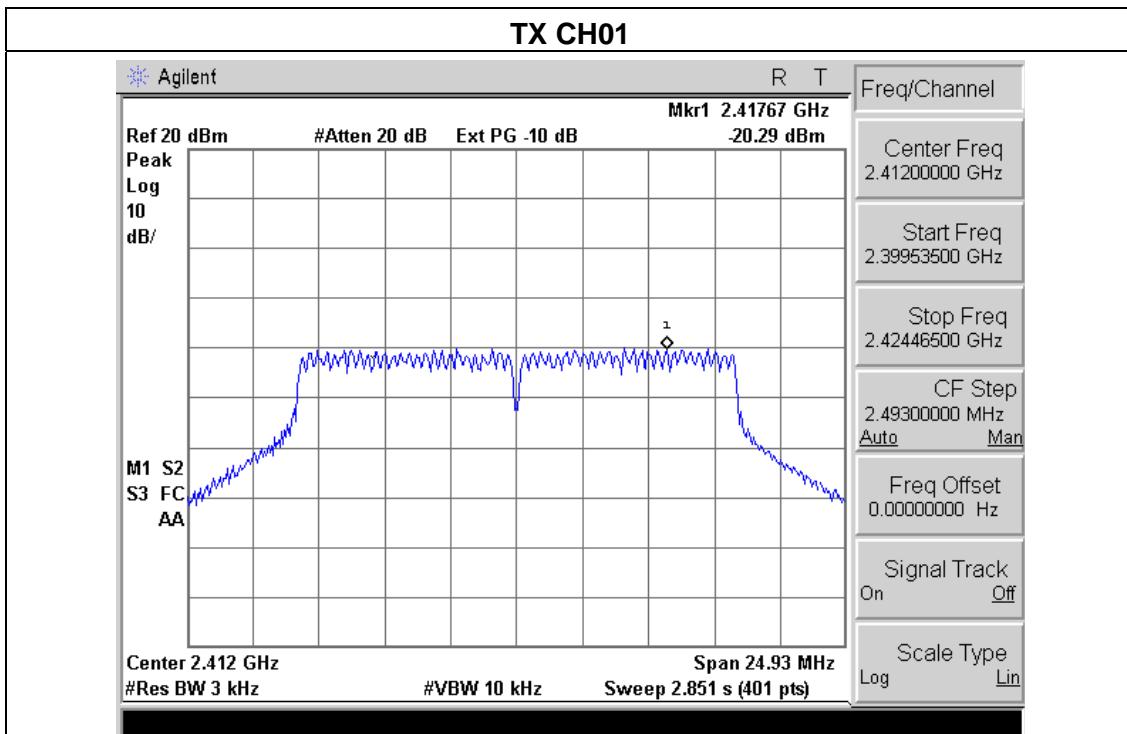


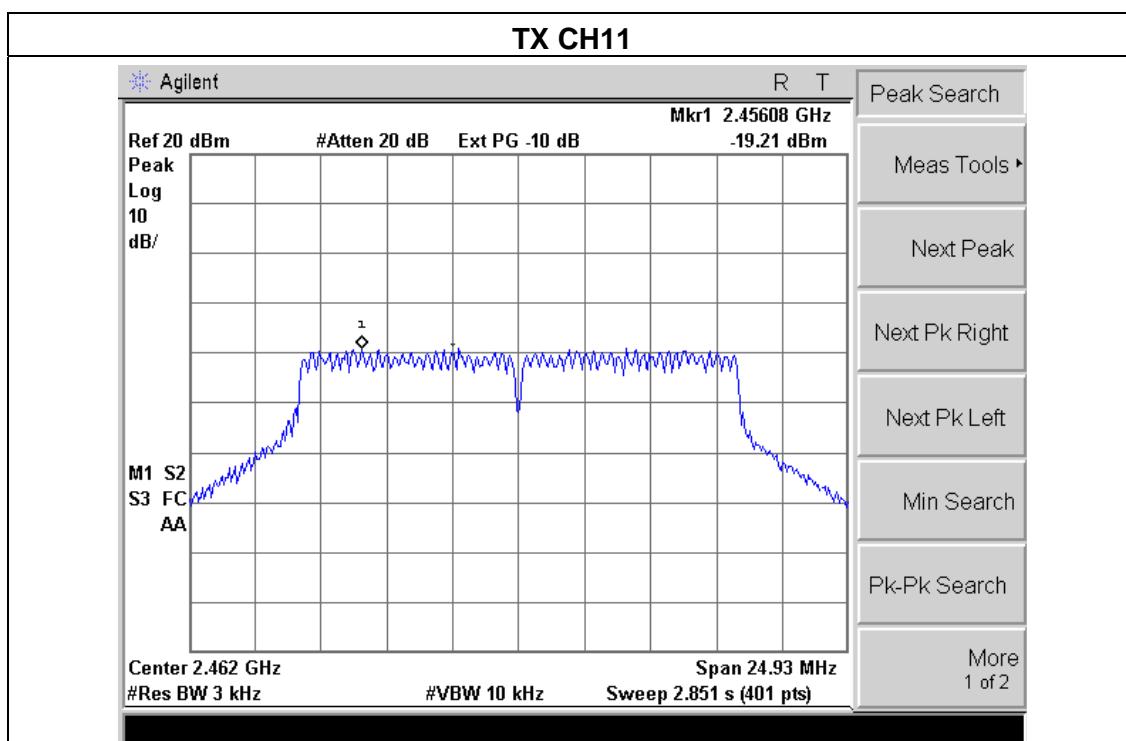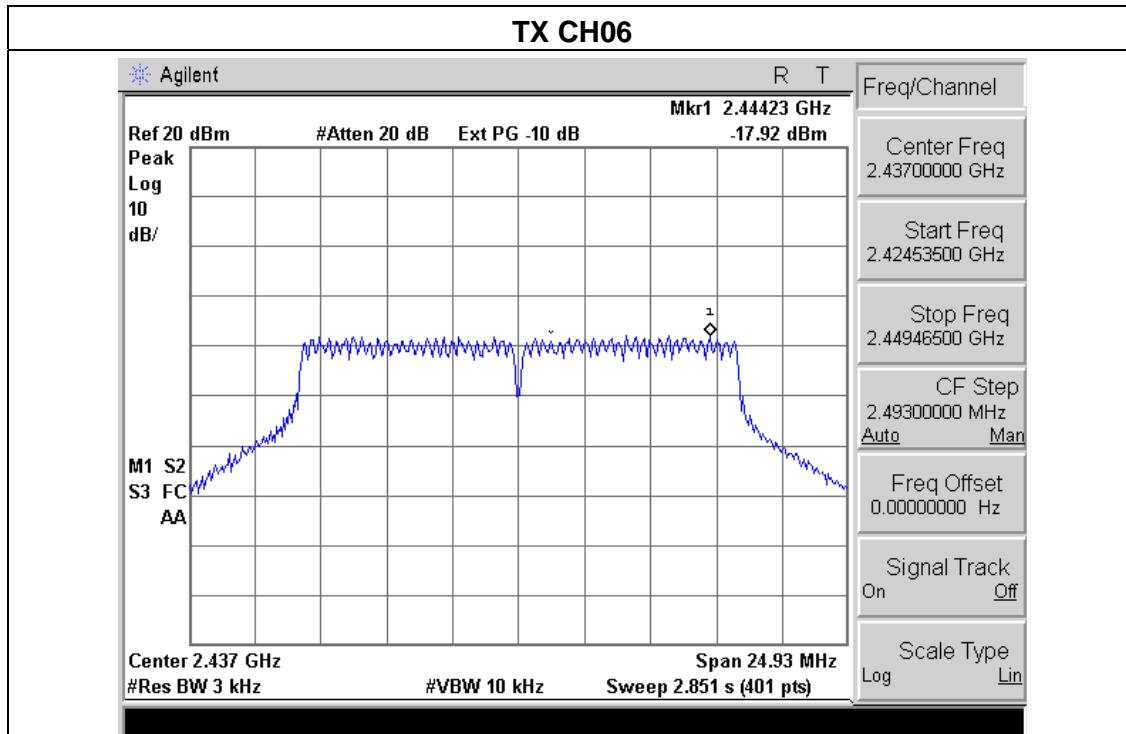

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	AC 120V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-21.12	8	PASS
2437 MHz	-17.57	8	PASS
2462 MHz	-20.12	8	PASS

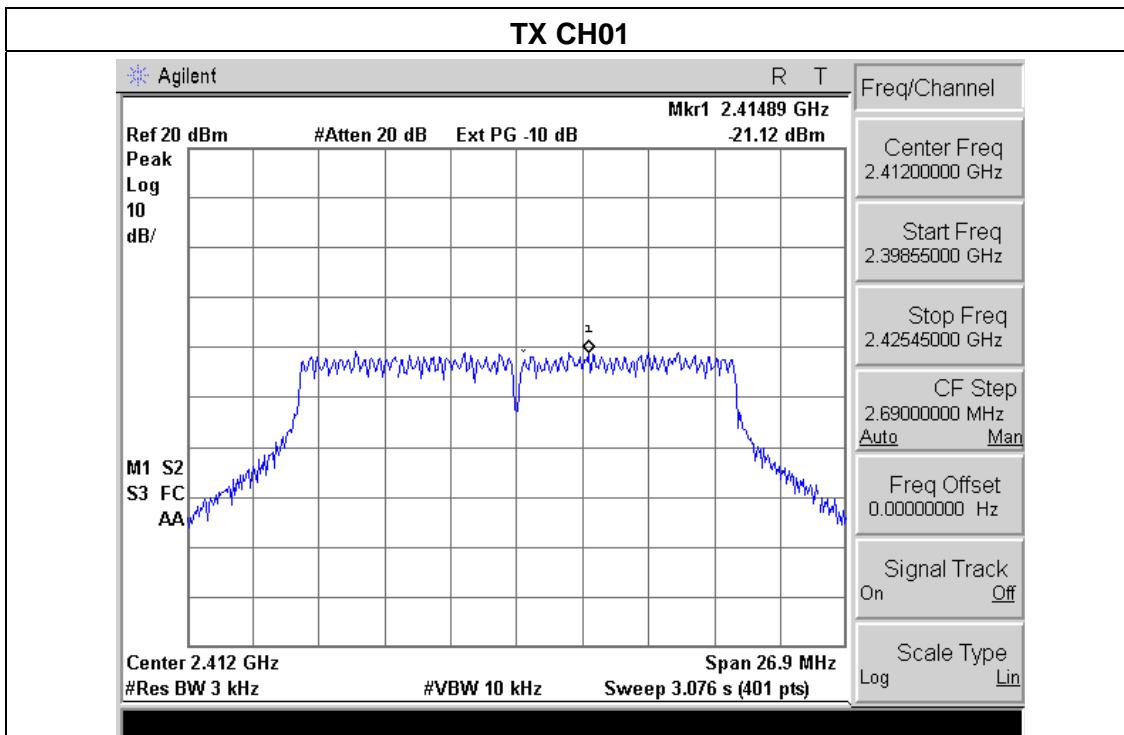

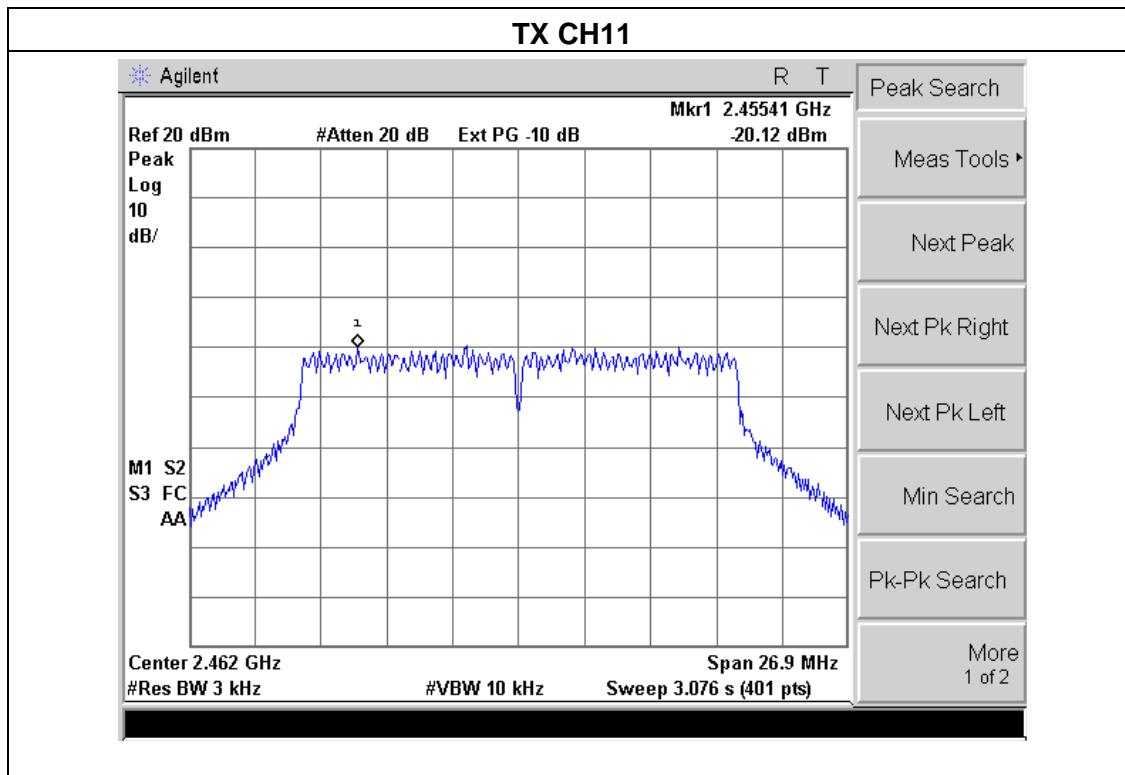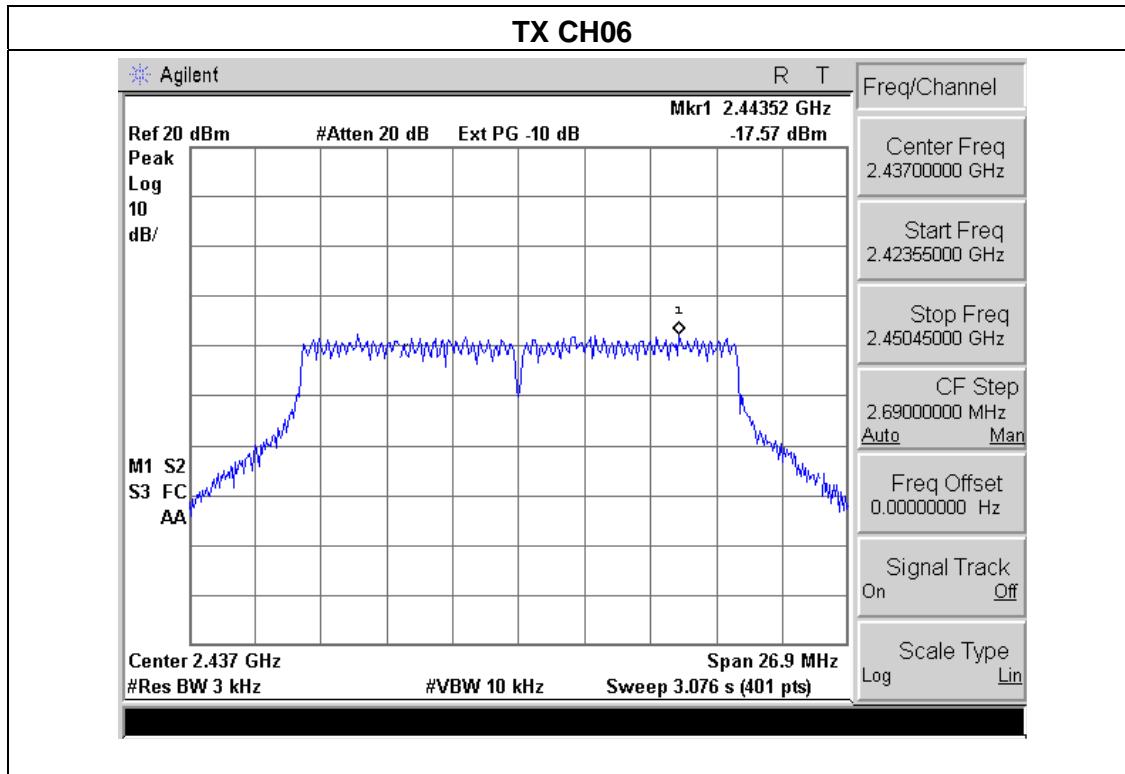

## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP




#### 5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.5 TEST RESULTS

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.09	500	Pass
Middle	2437	9.62	500	Pass
High	2462	9.67	500	Pass

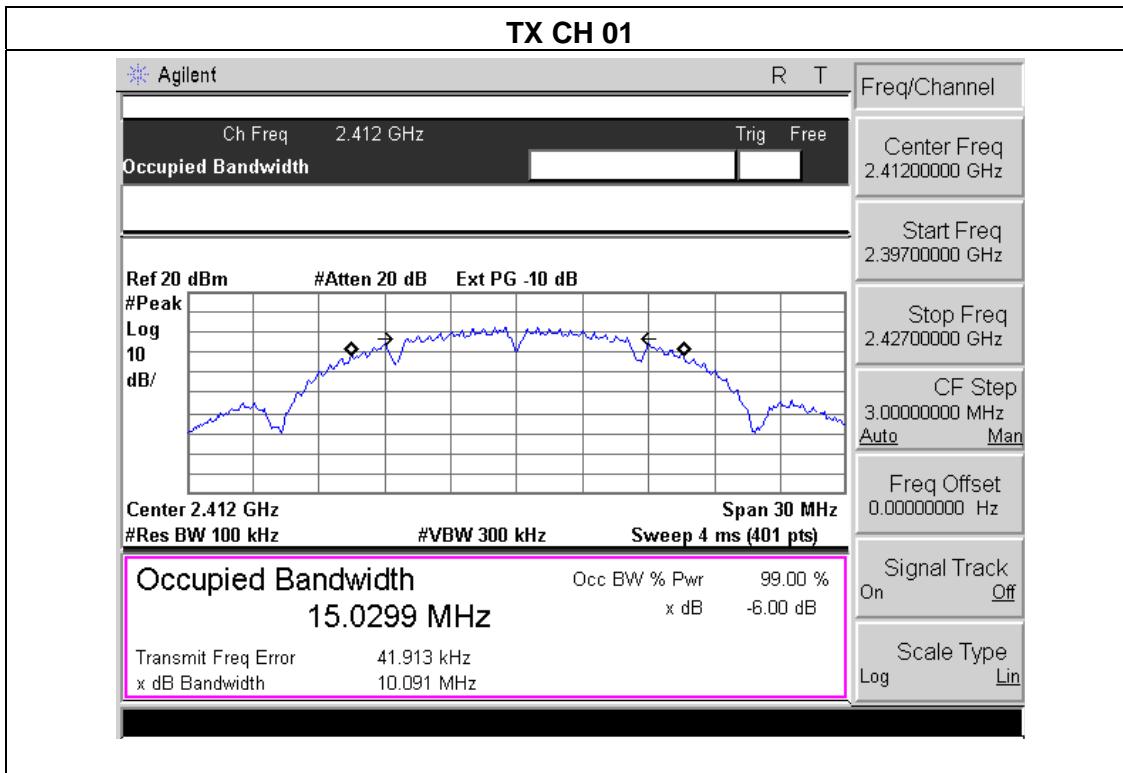


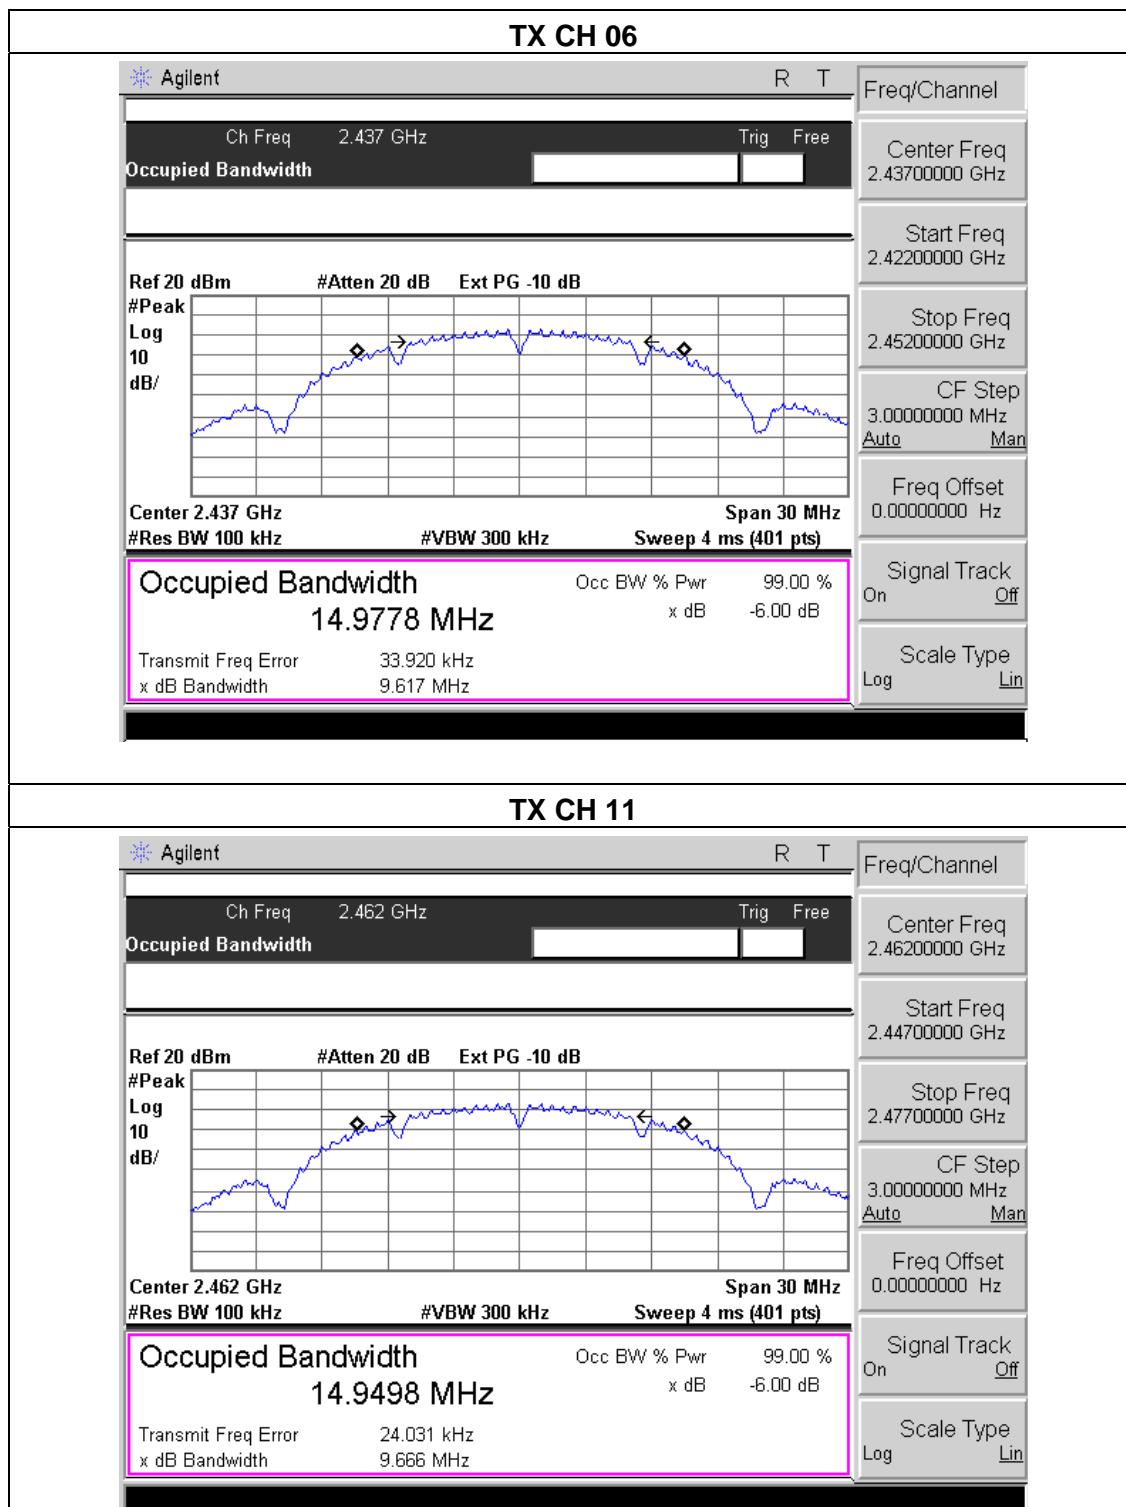

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.56	500	Pass
Middle	2437	16.62	500	Pass
High	2462	16.61	500	Pass

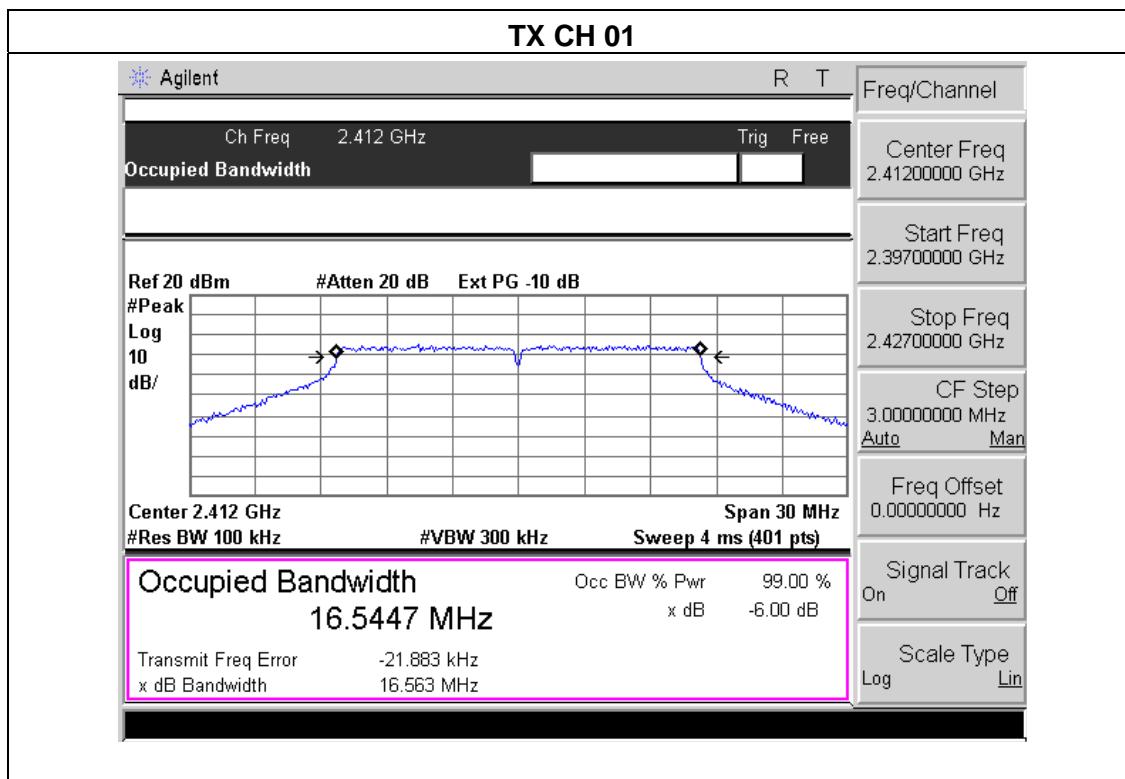


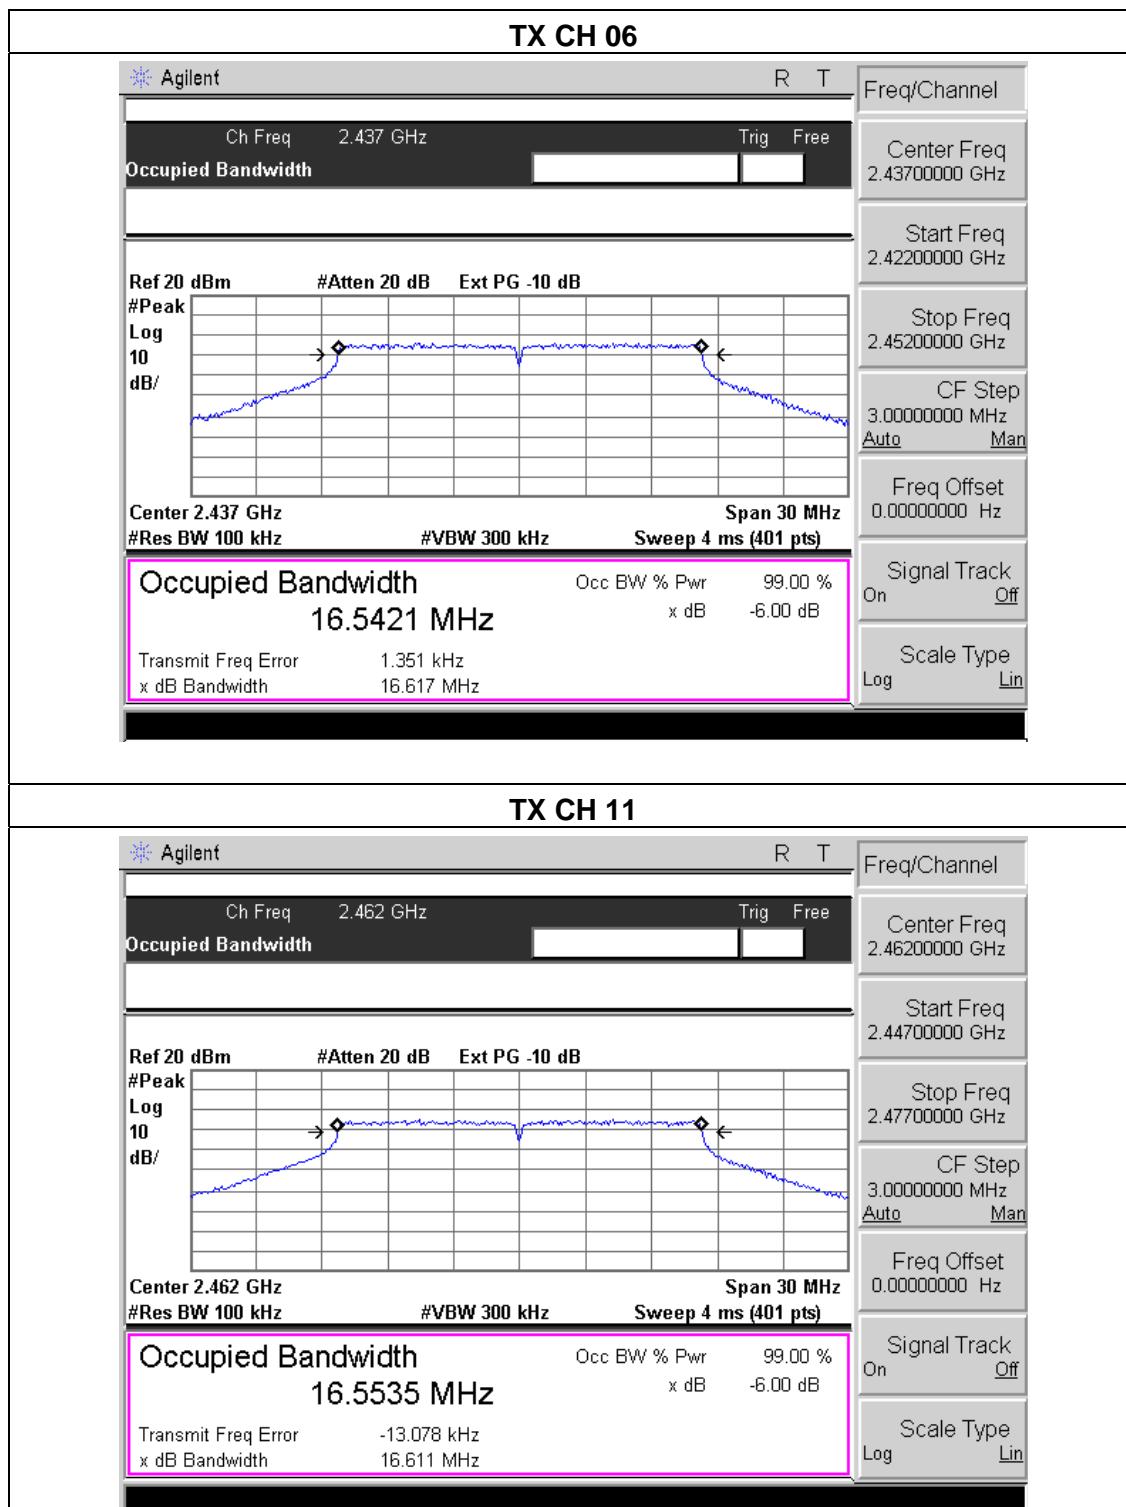

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.89	500	Pass
Middle	2437	17.88	500	Pass
High	2462	17.88	500	Pass

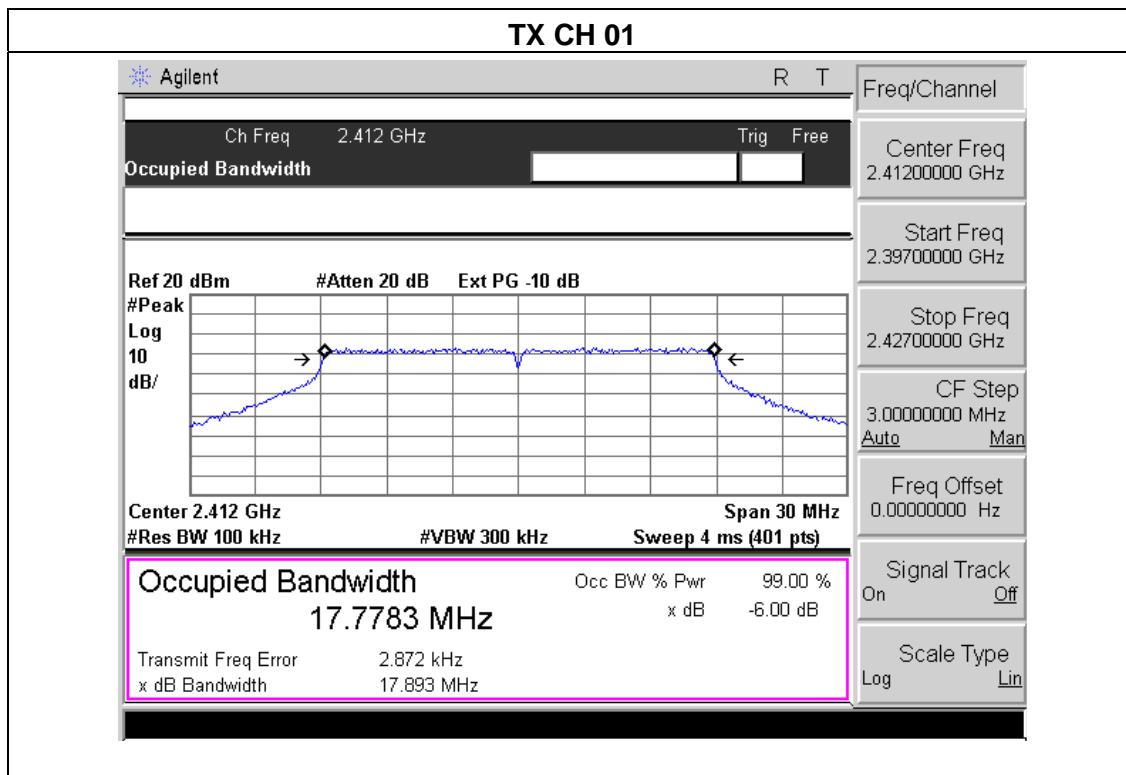

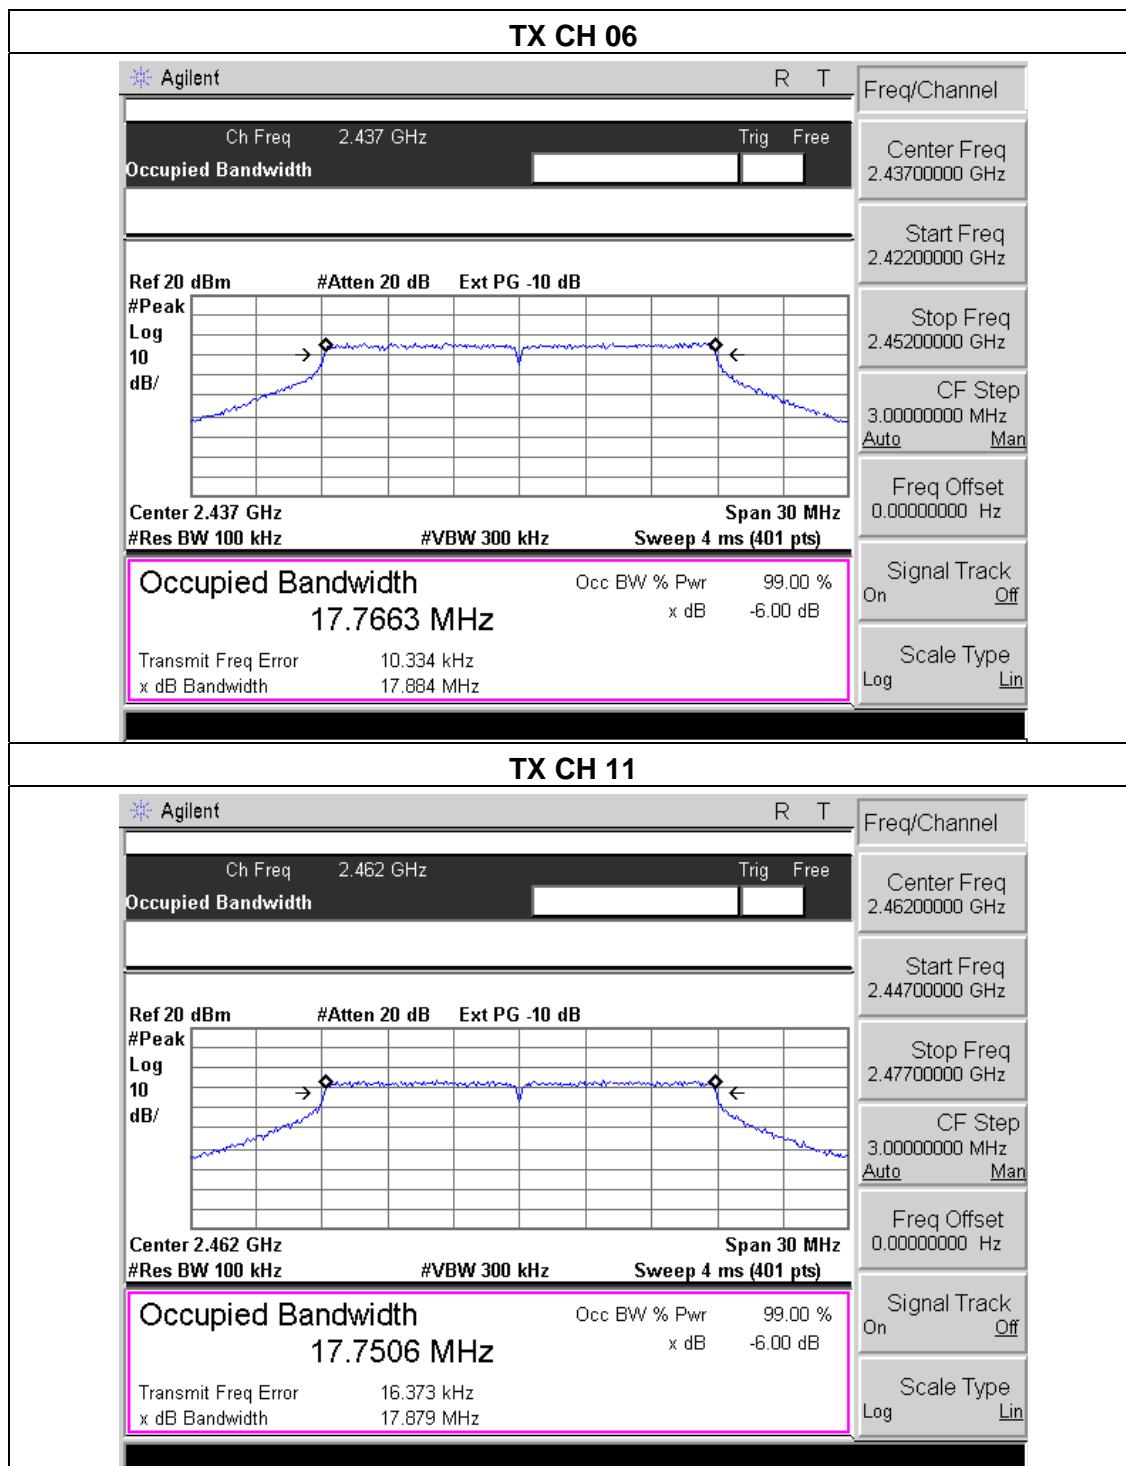

## 6. PEAK OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- The EUT was directly connected to the Power meter

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.1.5 TEST RESULTS

EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V
Test Mode :	TX b/g/n(20M) Mode /CH01, CH06, CH11		

#### TX 802.11b Mode

Test Channel	Frequency (MHz)	Maximum Conducted Output Power(PK)	LIMIT dBm
		(dBm)	
CH01	2412	16.12	30
CH06	2437	16.11	30
CH11	2462	16.01	30

#### TX 802.11g Mode

CH01	2412	14.22	30
CH06	2437	14.11	30
CH11	2462	14.09	30

#### TX 802.11n-HT20 Mode

CH01	2412	13.11	30
CH06	2437	13.21	30
CH11	2462	13.14	30

## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

#### 7.1 DEVIATION FROM STANDARD

No deviation.

#### 7.2 TEST SETUP



#### 7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.4 TEST RESULTS


EUT :	Smart APP Enabled Pet Ball Launcher	Model Name :	UWAP2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	40.30	20	Pass
Right-band	56.51	20	Pass
802.11g mode			
Left-band	23.30	20	Pass
Right-band	39.44	20	Pass
802.11n-HT20 mode			
Left-band	20.34	20	Pass
Right-band	36.53	20	Pass


## 802.11b: Band Edge, Left Side

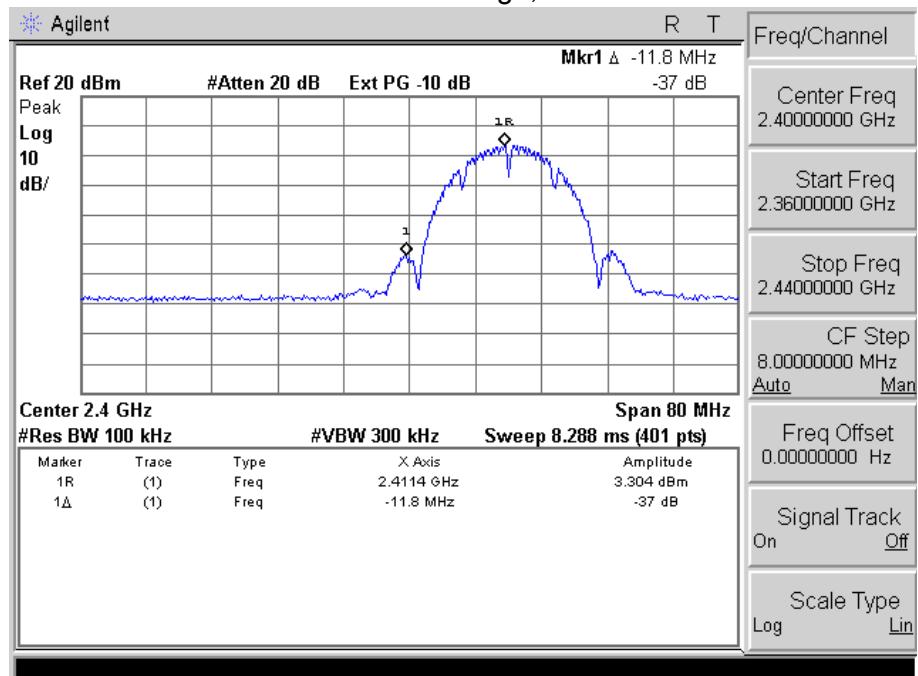


## 802.11b: Band Edge, Right Side

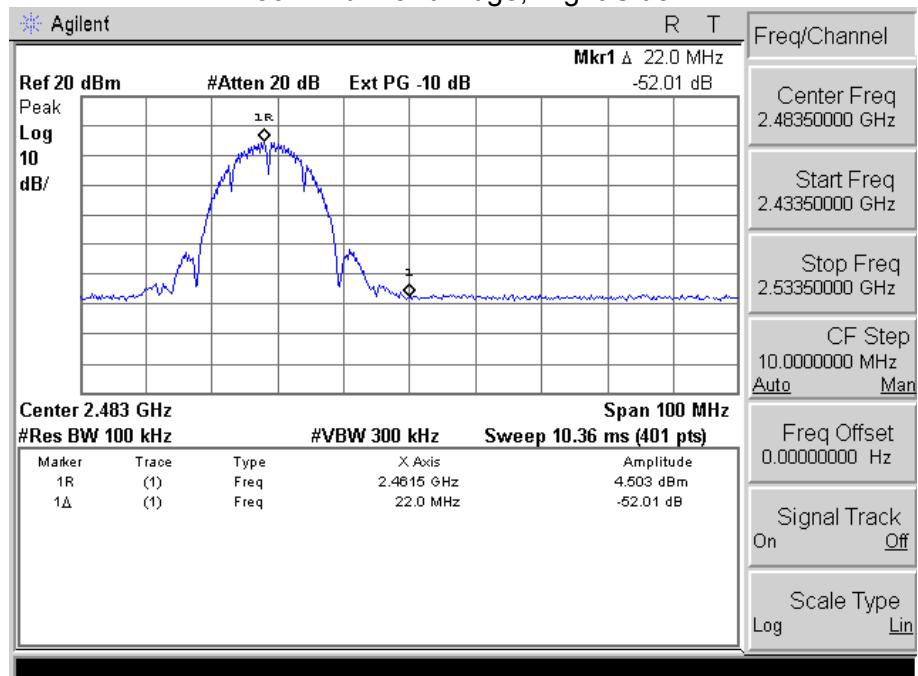


## 802.11g: Band Edge, Left Side

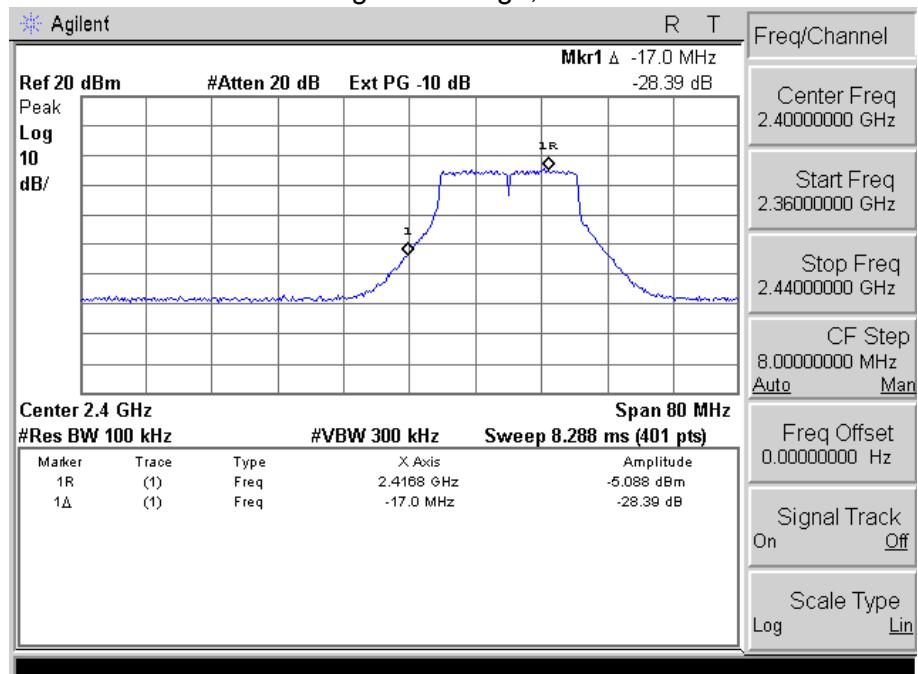


## 802.11g: Band Edge, Right Side

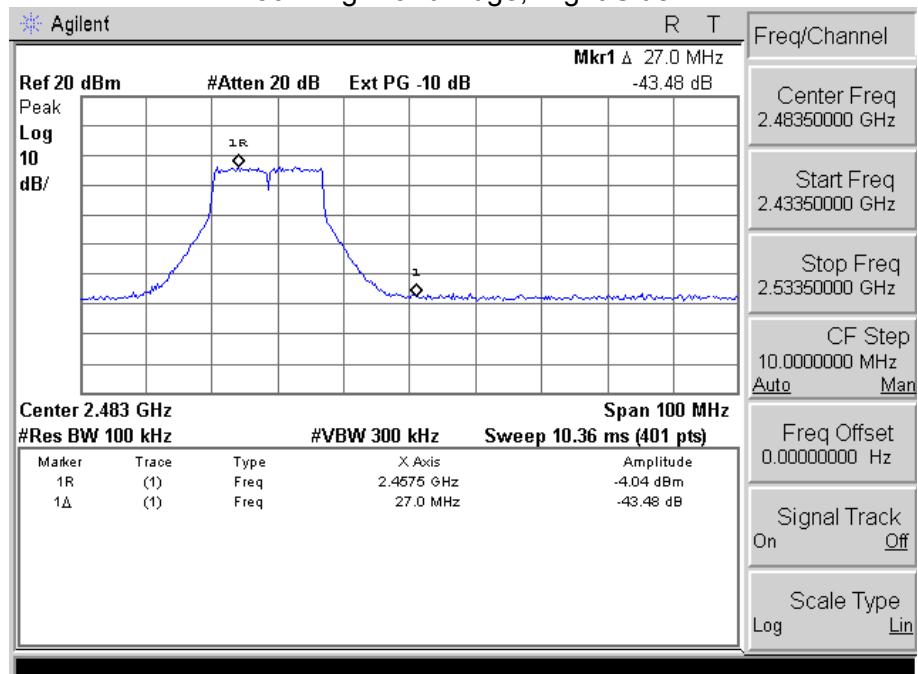

## 802.11n-HT20: Band Edge, Left Side

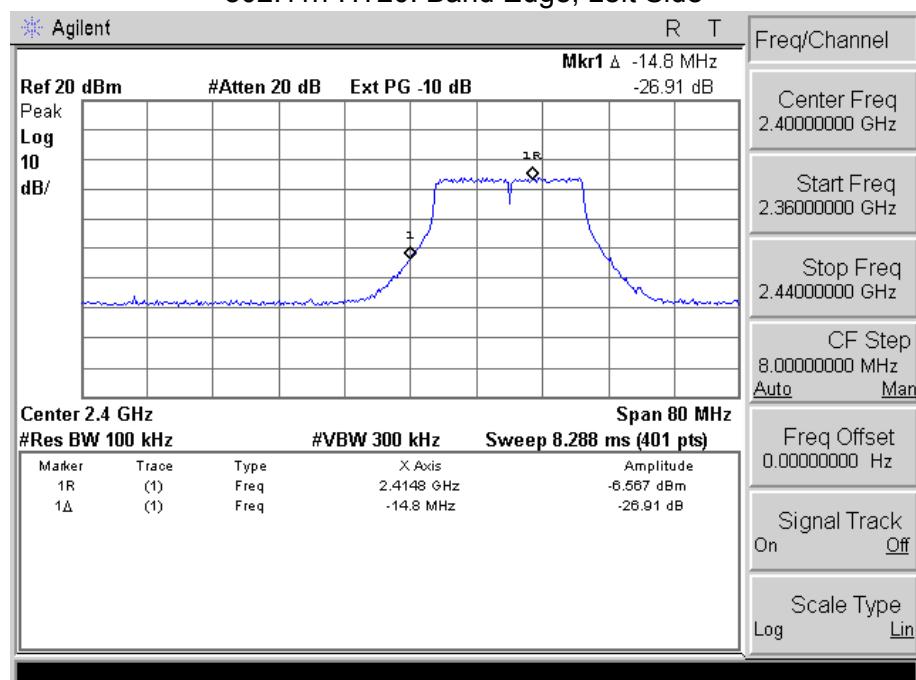

## 802.11n-HT20: Band Edge, Right Side

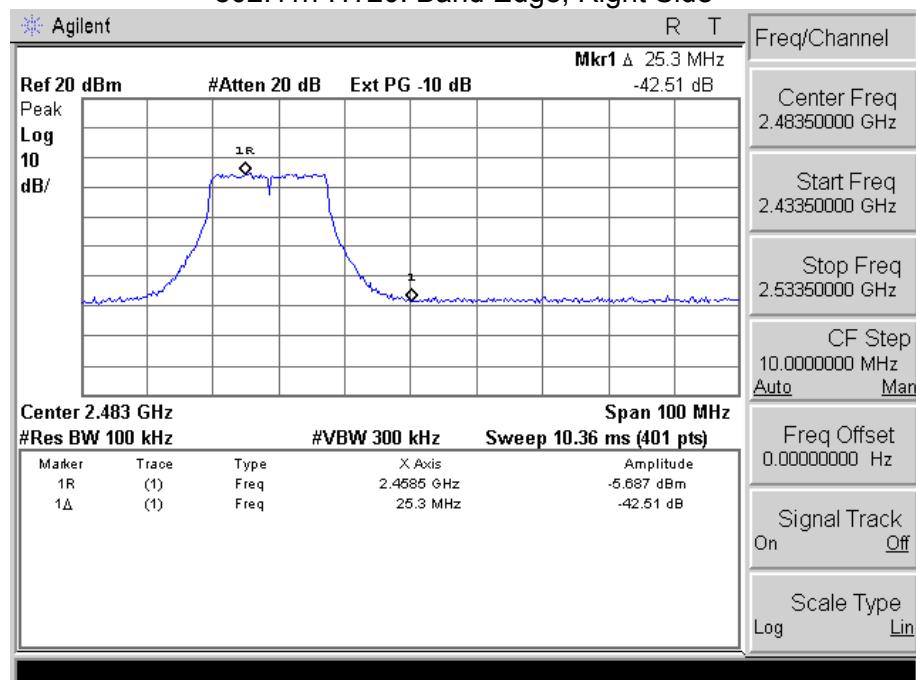

## 8. ANTENNA REQUIREMENT

### 8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2 EUT ANTENNA

The EUT antenna is Integrated antenna. It comply with the standard requirement.