



FCC Part 15C Test Report

FCC ID: 2AKKIFOLLOW

Product Name:	Follow
Trademark:	
Model Name :	Follow-n1 Follow-n2, Follow-s
Prepared For :	Shenzhen Geniusidea Technology Ltd.
Address :	2 C 14001 A, Nanshan Software Industry Base, Shenzhen, China
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	Nov. 09 – Nov. 28, 2016
Date of Report :	Dec. 01, 2016
Report No.:	BCTC-LH161011483-2E

**TEST RESULT CERTIFICATION**

Applicant's name: Shenzhen Geniusidea Technology Ltd.

Address: 2 C 14001 A, Nanshan Software Industry Base, Shenzhen, China

Manufacture's Name: Shenzhen Geniusidea Technology Ltd.

Address: 2 C 14001 A, Nanshan Software Industry Base, Shenzhen, China

Product description

Product name: Follow

Trademark



Model and/or type reference Follow-n1

.....: Follow-n2, Follow-s

Standards: FCC Part15.407

ANSI C63.10-2013

KDB789033 D02 General UNII Test Procedures New Rules
v01r02

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer :

Eric Yang

Reviewer :
(Supervisor)

Jade Yang

Approved &
Authorized :
Signer(Manager)



Carson Zhang



TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION.....	5
2.1. Product Function	5
2.2. Description of Device (EUT)	5
2.3. Test Supporting System	5
2.4. Independent Operation Modes	6
2.5. Test Sites	6
2.6. List of Test and Measurement Instruments.....	7
3. TEST SET-UP AND OPERATION MODES.....	8
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up	8
3.3. DESCRIPTION OF test UNITS	8
3.4. Special Accessories and Auxiliary Equipment	8
3.5. Countermeasures to Achieve EMC Compliance	8
4. EMISSION TEST RESULTS.....	9
4.1. Conducted Emission Measurement.....	9
4.2. Radiated Emission Measurement	13
5. DUTY CYCLE TEST SIGNAL.....	22
6. BAND EDGE COMPLIANCE TEST	23
6.1. Limits	23
6.2. TEST PROCEDURE	23
6.3. Test Data.....	23
7. 26DB AND 99% BANDWIDTH TEST	26
7.1. Measurement Procedure	26
8. OUTPUT POWER TEST.....	30
8.1. Limits	30
8.2. Test setup	30
8.3. Test result.....	31
9. PEAK POWER SPECTRAL DENSITY TEST.....	32
9.1. Limits	32
9.2. Test setup	32
9.3. Test data	33
10. FREQUENCY STABILITY.....	37
10.1. Limits	37
10.2. Test setup	37
10.3. Test data	38
11. TRANSMISSION IN THE ABSENCE OF DATA.....	42
11.1. Limits	42
11.2. Test result.....	42
12. ANTENNA REQUIREMENT.....	42
12.1. STANDARD REQUIREMENT	42
12.2. EUT ANTENNA	42
13. PHOTOGRAPHS OF TEST SET-UP	43
14. PHOTOGRAPHS OF THE EUT	45



1.TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	N/A
Radiated Emissions	15.407(b), 15.209	PASS
26dB bandwidth and 99%dB Bandwidth	15.403(i) 15.407(e)	PASS
Power density	15.407 (a)	PASS
Maximum Peak Output Power	15.407 (a)	PASS
Emissions from out of band	15.407 (b)	PASS
Transmission in case of Absence of Information	15.407(c)	PASS
Frequency Stability	15.407(g)	PASS
Antenna Requirement	15.203	PASS

Note: N/A means not applicable.



2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	Follow
Model No.:	Follow-n1 Follow-n2, Follow-s
Trade Name:	N/A
Operation Frequency:	5745-5825MHz(802.11n(HT20)) 5755-5795MHz(802.11n(HT40))
Channel numbers:	See channel list
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Data speed (IEEE 802.11n):	Up to 300Mbps
Antenna Type:	Internal antenna*2
Antenna gain:	2.0dBi
Power	DC 7.4V DC 5V from USB

The product used MIMO antenna, the total antenna gain is 5dBi. all mode support MIMO.

Channel List for 802.11n(20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

2.3. Test Supporting System

None.

2.4. Independent Operation Modes

The basic operation modes are:

These is Digital Transmission system (DTS) and have modulation OFDM, DSSS, DBPSK, DQPSK, CCK, 16QAM, 64QAM. According exploratory test, EUT will have maximum output power in those data rate (802.11n20: 6Mbps, (802.11n40: MCS0)), so those data rate were used for all test. The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11 protocol to enable wireless communications between the host and Wireless router.

802.11n(20)

Frequency	Band 4
Low	5745MHz
Middle	5785MHz
High	5825MHz

802.11n(40)

Frequency	Band 4
Low	5755MHz
High	5795MHz

Note: for conducted emission test, we pretest all mode, the worst mode was 802.11n20
for radiated emissions test, we pretest all mode, the worst mode was 802.11n20
The worst mode's data was recording and show in the test report.

2.5. Test Sites

2.5.1. Test Facilities

Lab Qualifications : FCC Registration No.:187086



2.6. List of Test and Measurement Instruments

Conduction test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2016.08.27	2017.08.26
2	LISN	R&S	NSLK8126	8126466	2016.08.27	2017.08.26
3	LISN	R&S	NSLK8126	8126487	2016.08.27	2017.08.26
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.08.27	2017.08.26
5	RF cables	R&S	R204	R20X	2016.08.27	2017.08.26

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Kind of equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.08.27	2017.08.26
2	Test Receiver	R&S	ESPI	101318	2016.08.27	2017.08.26
3	Bilog Antenna	R&S	VULB 9168	VULB91 68-438	2016.08.27	2017.08.26
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.08.27	2017.08.26
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.08.27	2017.08.26
6	Horn Antenna	R&S	HF906	10027	2016.08.29	2017.08.28
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.08.29	2017.08.28
8	Amplifier	R&S	BBV9743	9743-019	2016.08.29	2017.08.28
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.08.29	2017.08.28
10	RF cables	R&S	R203	R20X	2016.07.06	2017.07.05
11	Antenna connector	Florida RFLabs	Lab-Fle	RF 01#	2016.08.27	2017.08.26
12	Power Metter	ANRITSU	ML2487A	6K00001568	2016.08.27	2017.08.26
13	Power Sensor (AV)	ANRITSU	ML2491A	030989	2016.08.27	2017.08.26
14	Signal Analyzer	Agilent	N9010A	MY48030494	2016.08.27	2017.08.26
15	966 chamber	ChengYu	966 Room	966	2016.08.27	2017.08.26


3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection


Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

Radiated Spurious Emission Test



Conducted Spurious Emission Test

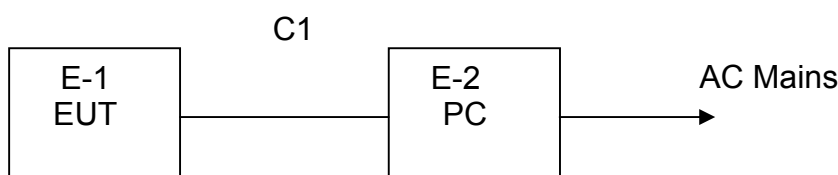

3.3. DESCRIPTION OF test UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Follow	FOLLOW 随行	Follow-n1	N/A	EUT
E-2	PC	ASUS	AWT8000	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	0.8m	Mini USB

3.4. Special Accessories and Auxiliary Equipment

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emission Measurement

POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi -peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.1. TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.2. DEVIATION FROM TEST STANDARD

No deviation

4.1.3. TEST SETUP

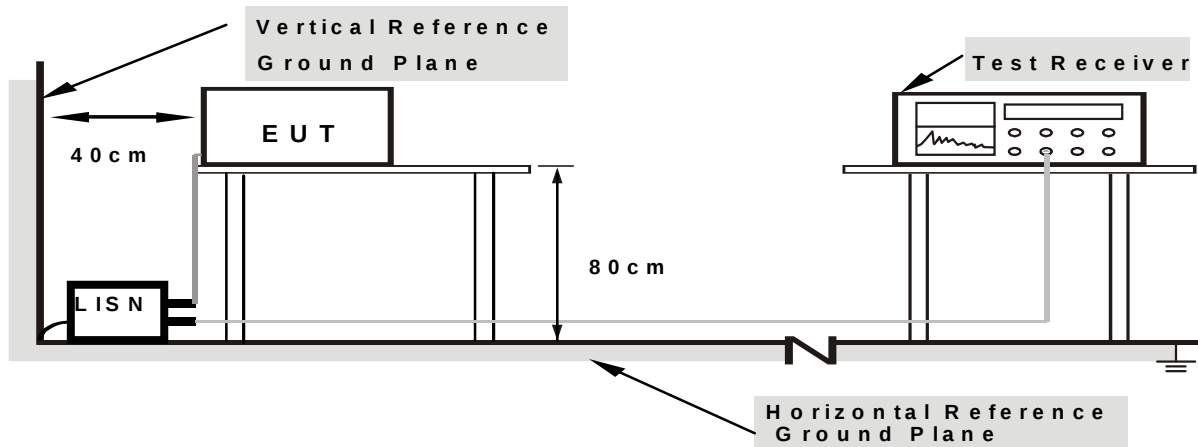

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.4. EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest all adapter's emission, only the adapter 1's data was worst and the data was recording in the report.

The data only show the worst mode.


If peak level comply with Quasi-Peak limit, then the Quasi-Peak level is deemed to comply with Quasi-Peak limit.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

4.1.5. TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

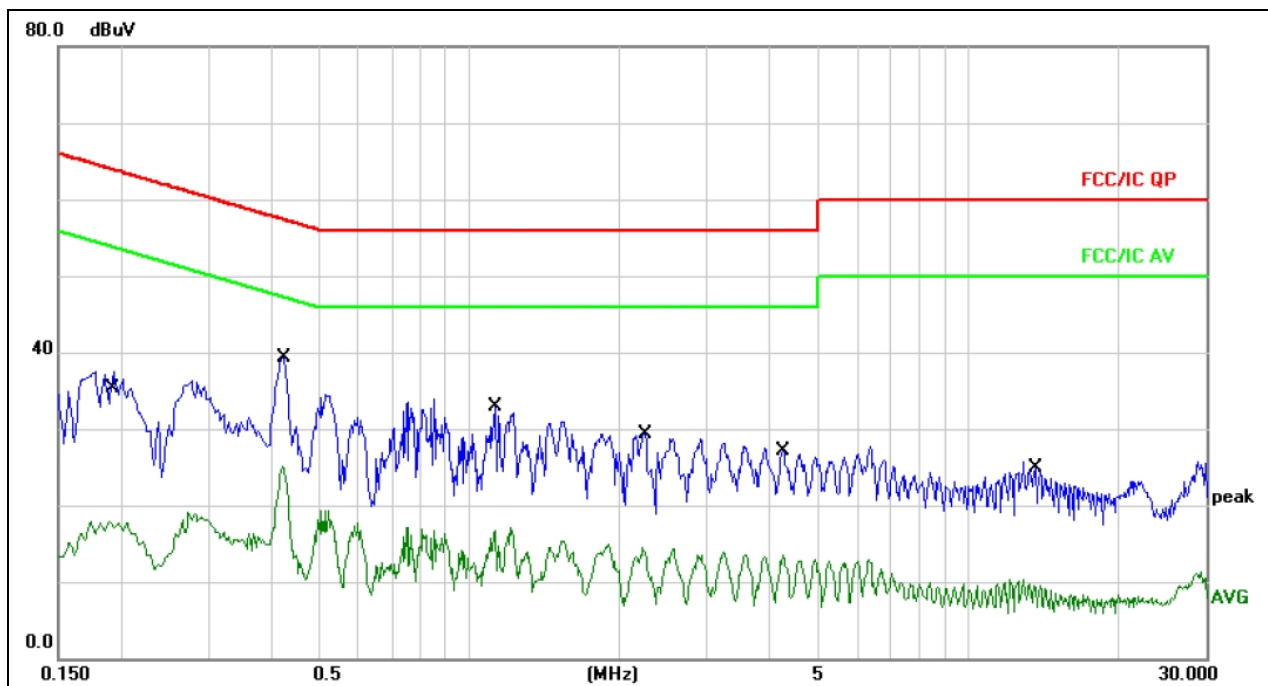


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1900	27.43	10.06	37.49	64.03	-26.54	QP	
2		0.1900	7.85	10.06	17.91	54.03	-36.12	AVG	
3	*	0.4220	29.29	10.11	39.40	57.41	-18.01	QP	
4		0.4220	14.96	10.11	25.07	47.41	-22.34	AVG	
5		1.1260	22.71	10.17	32.88	56.00	-23.12	QP	
6		1.1260	6.49	10.17	16.66	46.00	-29.34	AVG	
7		2.2260	19.17	10.18	29.35	56.00	-26.65	QP	
8		2.2260	4.29	10.18	14.47	46.00	-31.53	AVG	
9		4.2660	16.57	10.16	26.73	56.00	-29.27	QP	
10		4.2660	3.27	10.16	13.43	46.00	-32.57	AVG	
11		13.5700	14.74	10.14	24.88	60.00	-35.12	QP	
12		13.5700	-0.61	10.14	9.53	50.00	-40.47	AVG	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3

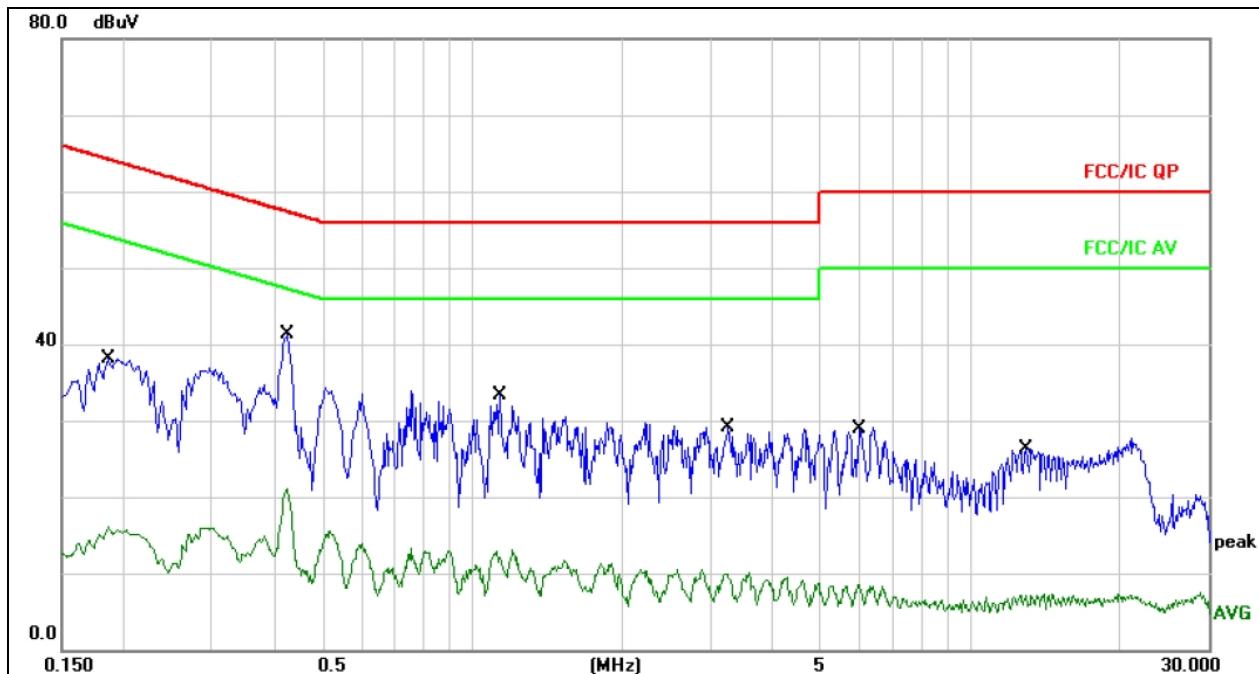

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1860	28.11	10.06	38.17	64.21	-26.04	QP	
2		0.1860	5.96	10.06	16.02	54.21	-38.19	AVG	
3	*	0.4260	31.12	10.11	41.23	57.33	-16.10	QP	
4		0.4260	11.05	10.11	21.16	47.33	-26.17	AVG	
5		1.1380	23.05	10.17	33.22	56.00	-22.78	QP	
6		1.1380	2.91	10.17	13.08	46.00	-32.92	AVG	
7		3.2340	18.89	10.18	29.07	56.00	-26.93	QP	
8		3.2340	-0.25	10.18	9.93	46.00	-36.07	AVG	
9		5.9740	18.92	10.09	29.01	60.00	-30.99	QP	
10		5.9740	-1.66	10.09	8.43	50.00	-41.57	AVG	
11		12.9460	16.21	10.14	26.35	60.00	-33.65	QP	
12		12.9460	-2.88	10.14	7.26	50.00	-42.74	AVG	



4.2. Radiated Emission Measurement

4.2.1. Radiated Emission Limits (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2.2. TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter.
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3. DEVIATION FROM TEST STANDARD


No deviation

4.2.4. TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

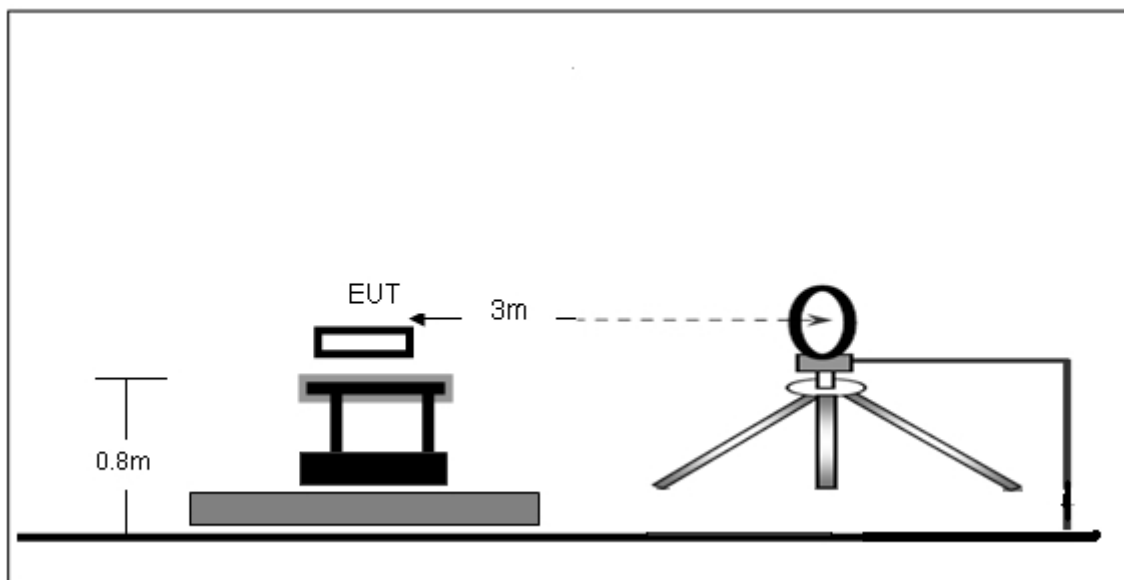

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

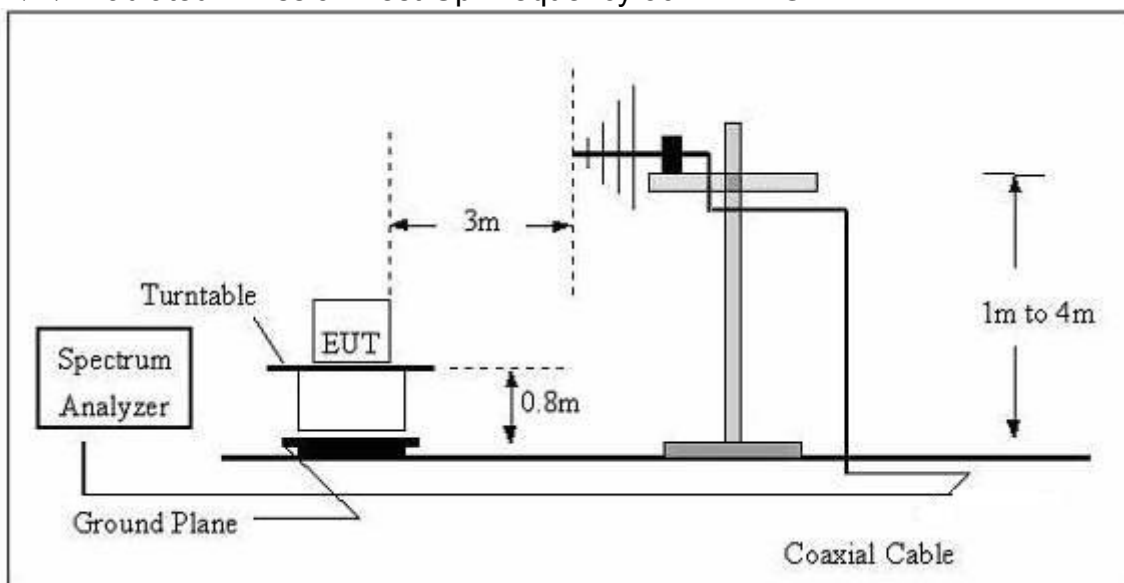

(C) Radiated Emission Test-Up Frequency Above 1GHz

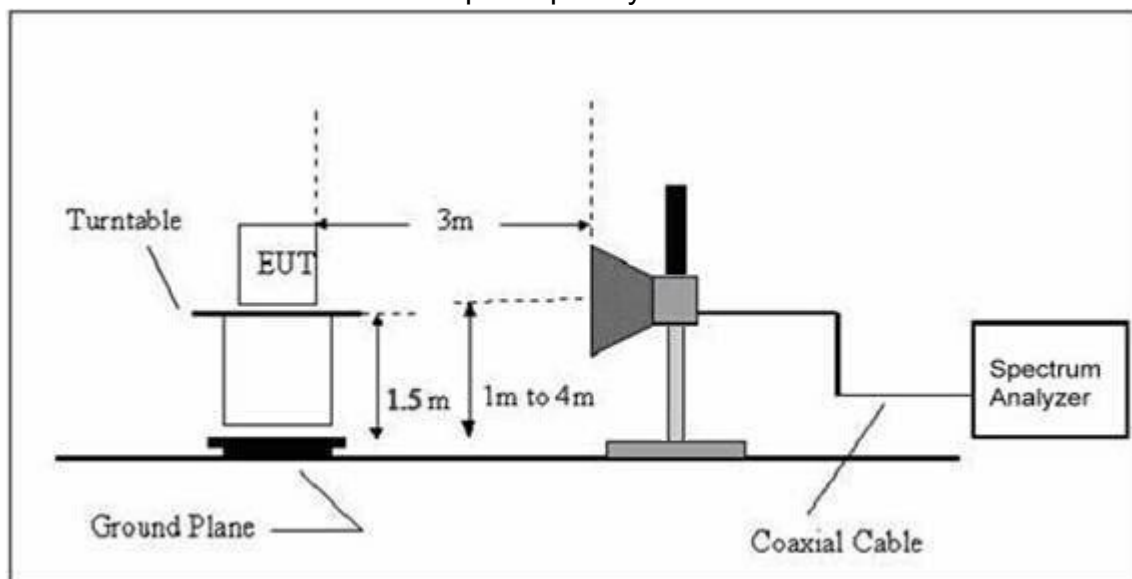

4.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

We pretest all adapter's emission, only the adapter 1's data was worst and the data was recording in the report.

The data only show the worst mode.



Radiated Spurious Emission (Below 30MHz)

Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Polarization :	---
Test Voltage :	DC 5V from host		
Test Mode :	TX		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Radiated Spurious Emission (Between 30MHz – 1GHz)

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from host		
Test Mode :(Worst)	Link Mode		

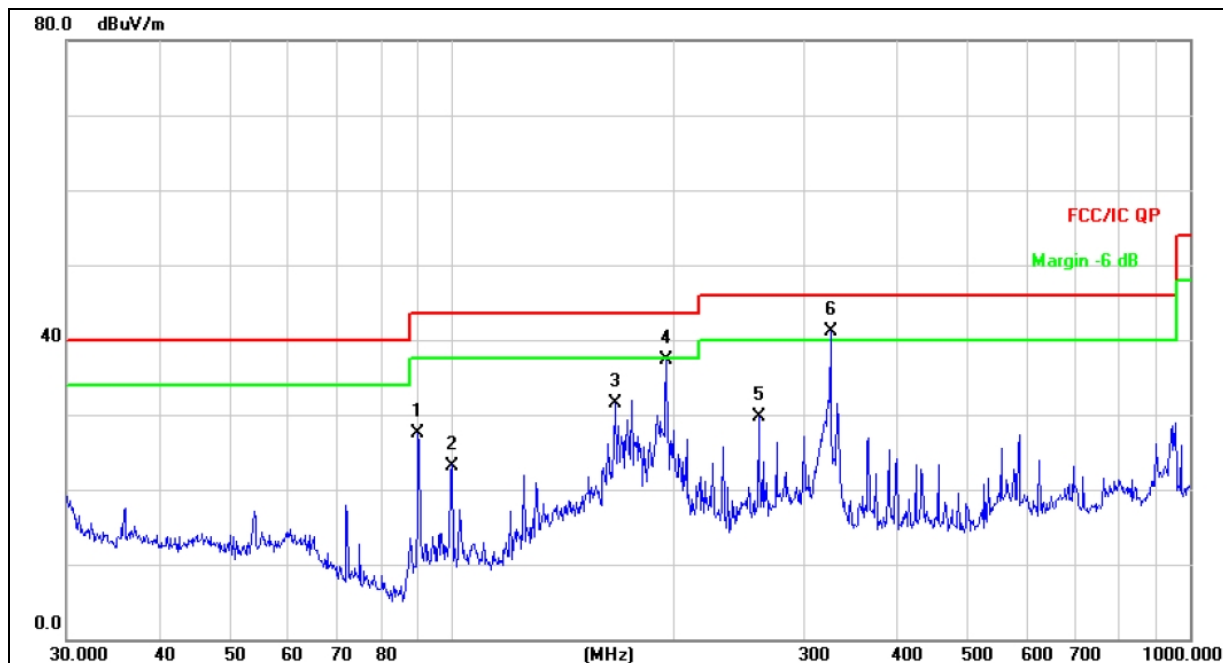


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		89.9047	44.94	-17.51	27.43	43.50	-16.07	QP
2		99.8777	39.69	-16.49	23.20	43.50	-20.30	QP
3		166.6513	44.71	-13.26	31.45	43.50	-12.05	QP
4		195.1365	53.24	-15.90	37.34	43.50	-6.16	QP
5		260.1444	43.60	-13.91	29.69	46.00	-16.31	QP
6	*	325.5957	52.99	-11.92	41.07	46.00	-4.93	QP



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from host		
Test Mode :(Worst)	Link Mode		

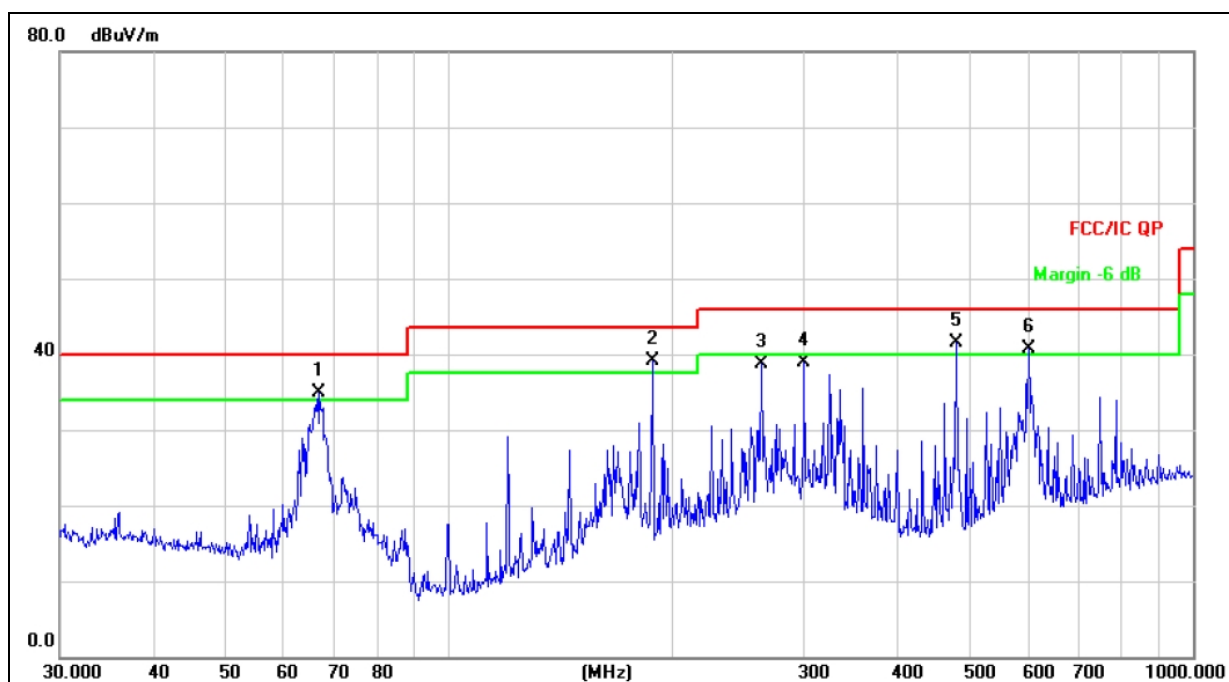

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	!	66.9668	48.20	-13.32	34.88	40.00	-5.12	QP
2	*	187.7529	54.37	-15.29	39.08	43.50	-4.42	QP
3		262.8955	52.60	-13.80	38.80	46.00	-7.20	QP
4		300.3672	51.53	-12.57	38.96	46.00	-7.04	QP
5	!	480.5276	49.87	-8.42	41.45	46.00	-4.55	QP
6	!	601.4265	46.34	-5.66	40.68	46.00	-5.32	QP



Radiated Spurious Emission (Above 1GHz)

802.11n20 band 4									
Polar (H/V)	Freq. (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detec tor Type
operation frequency:5745									
V	11490.00	62.97	36.18	6.52	27.69	61.00	74	-13.00	PK
V	11490.00	50.92	36.18	6.52	27.69	48.95	54	-5.05	AV
V	17235.00	58.65	35.82	6.93	28.36	58.12	74	-15.88	PK
V	17235.00	47.86	35.82	6.93	28.36	47.33	54	-6.67	AV
H	11490.00	62.63	36.18	6.52	27.69	60.66	74	-13.34	PK
H	11490.00	50.75	36.18	6.52	27.69	48.78	54	-5.22	AV
H	17235.00	58.89	35.82	6.93	28.36	58.36	74	-15.64	PK
H	17235.00	48.05	35.82	6.93	28.36	47.52	54	-6.48	AV
operation frequency:5785									
V	11570.00	62.65	36.21	6.59	27.73	60.76	74	-13.24	PK
V	11570.00	50.15	36.21	6.59	27.73	48.26	54	-5.74	AV
V	17355.00	58.25	35.89	6.72	28.42	57.50	74	-16.50	PK
V	17355.00	48.63	35.89	6.72	28.42	47.88	54	-6.12	AV
H	11570.00	62.58	36.21	6.59	27.73	60.69	74	-13.31	PK
H	11570.00	50.94	36.21	6.59	27.73	49.05	54	-4.95	AV
H	17355.00	59.14	35.89	6.72	28.42	58.39	74	-15.61	PK
H	17355.00	47.68	35.89	6.72	28.42	46.93	54	-7.07	AV
operation frequency:5825									
V	11650.00	62.23	36.28	6.65	27.81	60.41	74	-13.59	PK
V	11650.00	50.14	36.28	6.65	27.81	48.32	54	-5.68	AV
V	17475.00	59.90	35.92	6.78	28.50	59.26	74	-14.74	PK
V	17475.00	48.10	35.92	6.78	28.50	47.46	54	-6.54	AV
H	11650.00	62.54	36.28	6.65	27.81	60.72	74	-13.28	PK
H	11650.00	50.02	36.28	6.65	27.81	48.20	54	-5.80	AV
H	17475.00	59.34	35.92	6.78	28.50	58.70	74	-15.30	PK
H	17475.00	48.35	35.92	6.78	28.50	47.71	54	-6.29	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n40 band 4									
Polar (H/V)	Freq. (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detec tor Type
operation frequency:5755									
V	11490.00	60.89	36.18	6.52	27.69	58.92	74	-15.08	PK
V	11490.00	47.86	36.18	6.52	27.69	45.89	54	-8.11	AV
V	17235.00	58.58	35.82	6.93	28.36	58.05	74	-15.95	PK
V	17235.00	47.80	35.82	6.93	28.36	47.27	54	-6.73	AV
H	11490.00	60.55	36.18	6.52	27.69	58.58	74	-15.42	PK
H	11490.00	48.69	36.18	6.52	27.69	46.72	54	-7.28	AV
H	17235.00	58.82	35.82	6.93	28.36	58.29	74	-15.71	PK
H	17235.00	47.99	35.82	6.93	28.36	47.46	54	-6.54	AV
operation frequency:5795									
V	11570.00	60.57	36.21	6.59	27.73	58.68	74	-15.32	PK
V	11570.00	48.09	36.21	6.59	27.73	46.20	54	-7.80	AV
V	17355.00	58.18	35.89	6.72	28.42	57.43	74	-16.57	PK
V	17355.00	48.57	35.89	6.72	28.42	47.82	54	-6.18	AV
H	11570.00	60.50	36.21	6.59	27.73	58.61	74	-15.39	PK
H	11570.00	47.88	36.21	6.59	27.73	45.99	54	-8.01	AV
H	17355.00	59.07	35.89	6.72	28.42	58.32	74	-15.68	PK
H	17355.00	47.62	35.89	6.72	28.42	46.87	54	-7.13	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



5. DUTY CYCLE TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}})$$

Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:

Operation Mode	Duty Cycle	Duty Fator (dB) $10 * \log (1/ \text{Duty cycle})$
802.11n(HT20)	90.78%	0.42
802.11n(HT40)	83.76%	0.77



6. BAND EDGE COMPLIANCE TEST

6.1. Limits

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

6.2. TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



6.3. Test Data

Please see data as below:

we test all antennas, the antenna 1 was worst mode and the data recording in the report.





Ant1 Band 4
802.11n20

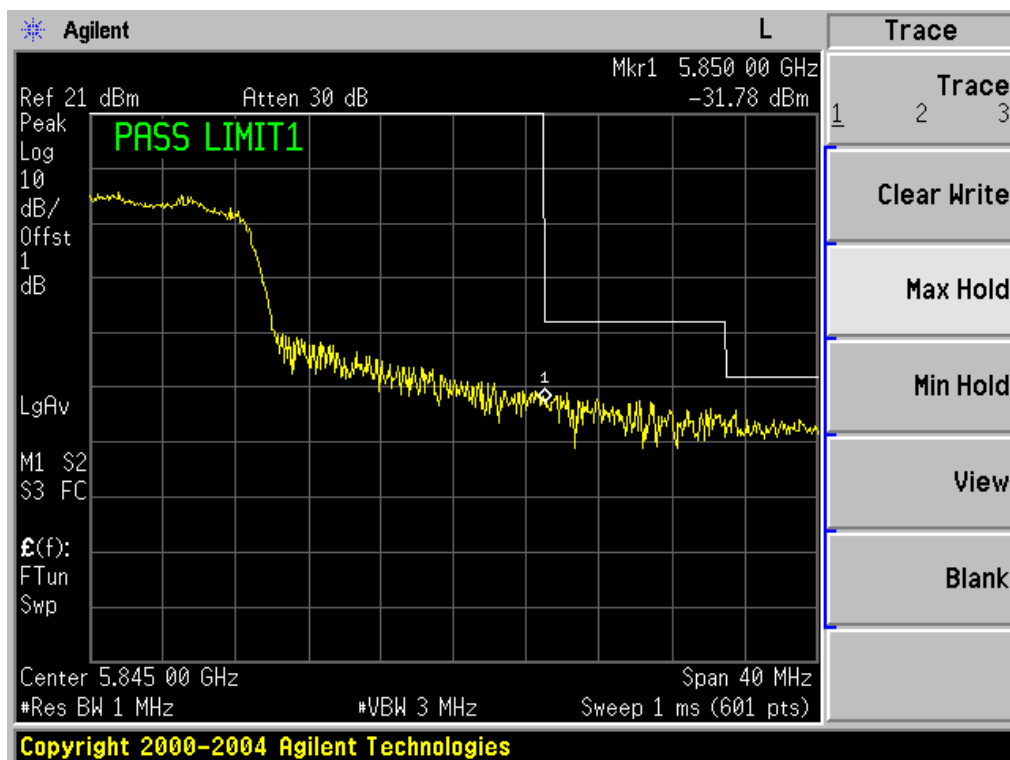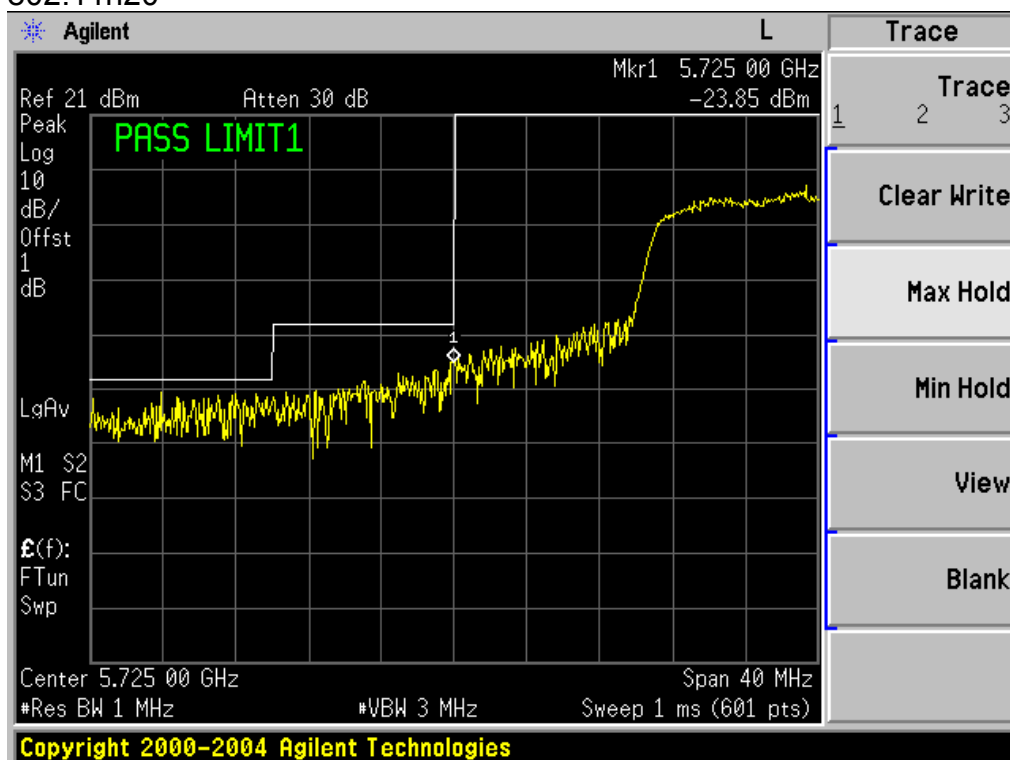



802.11n40

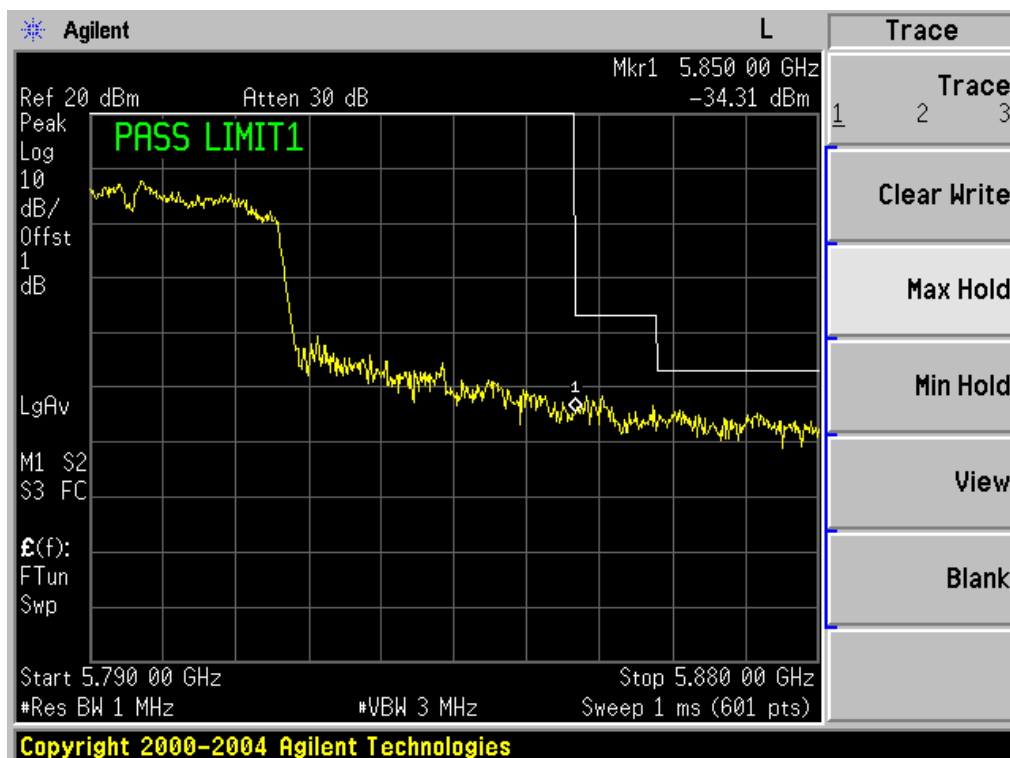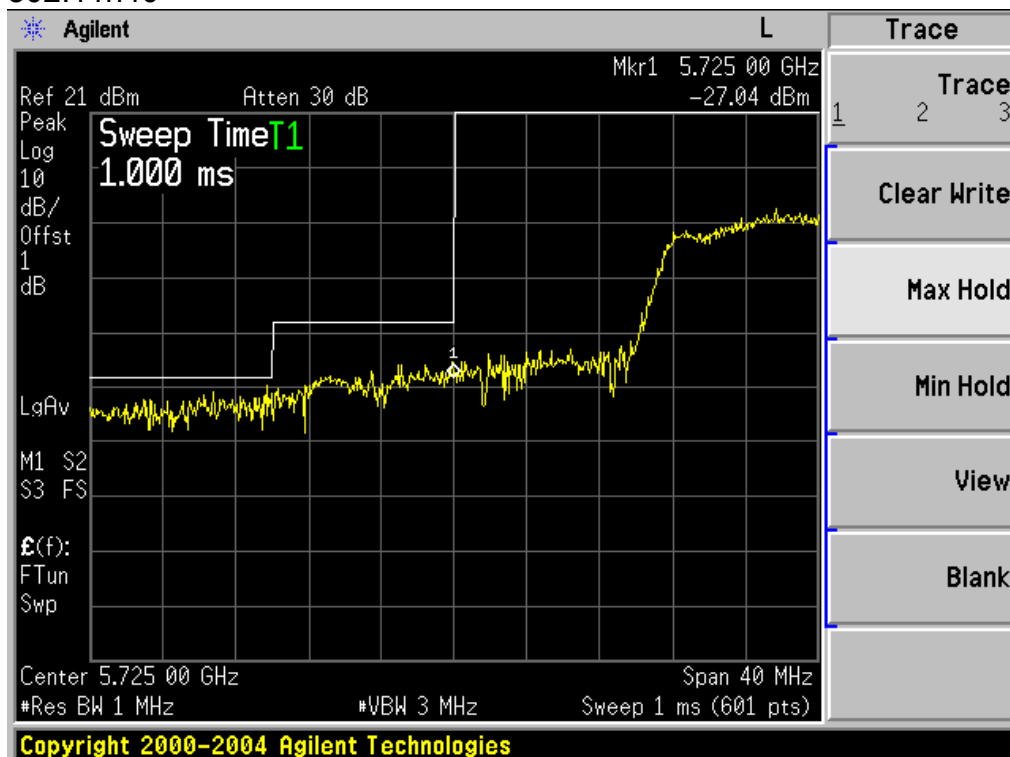

7. 26DB AND 99% BANDWIDTH TEST

7.1. Measurement Procedure

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.


There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3


we test all antennas, the antenna 1 was worst mode and the data recording in the report.

	Frequency (MHz)	-6dB Bandwidth (MHz)		99% Bandwidth (MHz)		Limit (MHz)
		Ant 1	Ant 2	Ant 1	Ant 2	
802.11n (HT20)	5745	17.593	17.559	17.547	17.531	>0.5
	5785	17.503	17.508	17.504	17.511	>0.5
	5825	16.752	16.727	17.574	17.559	>0.5
802.11n (HT40)	5755	35.762	35.739	35.932	35.927	>0.5
	5795	35.825	35.847	35.881	35.849	>0.5


802.11n(HT20) 5745MHz

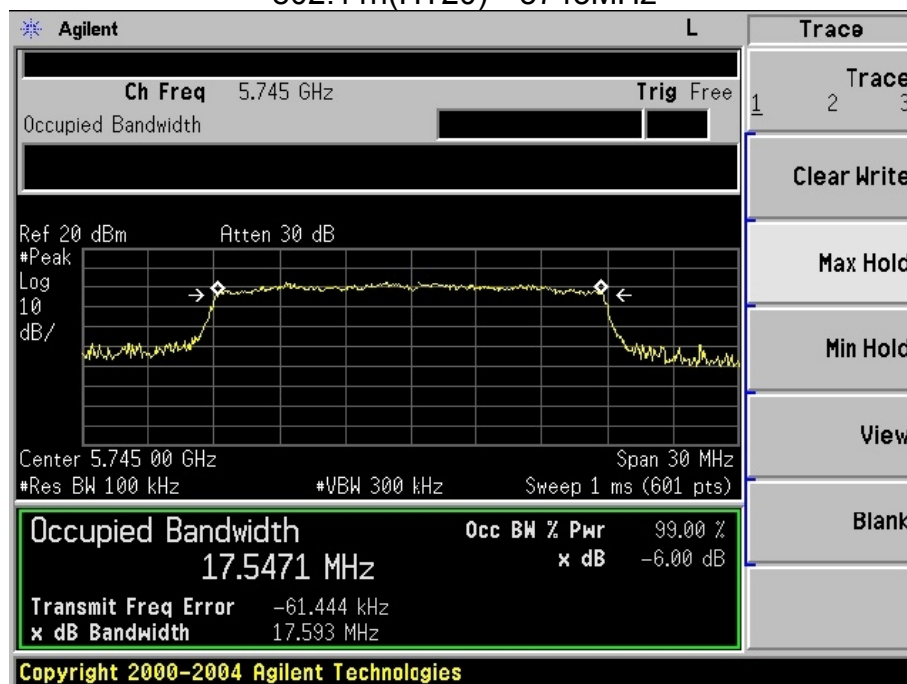

802.11n(HT20) 5785MHz

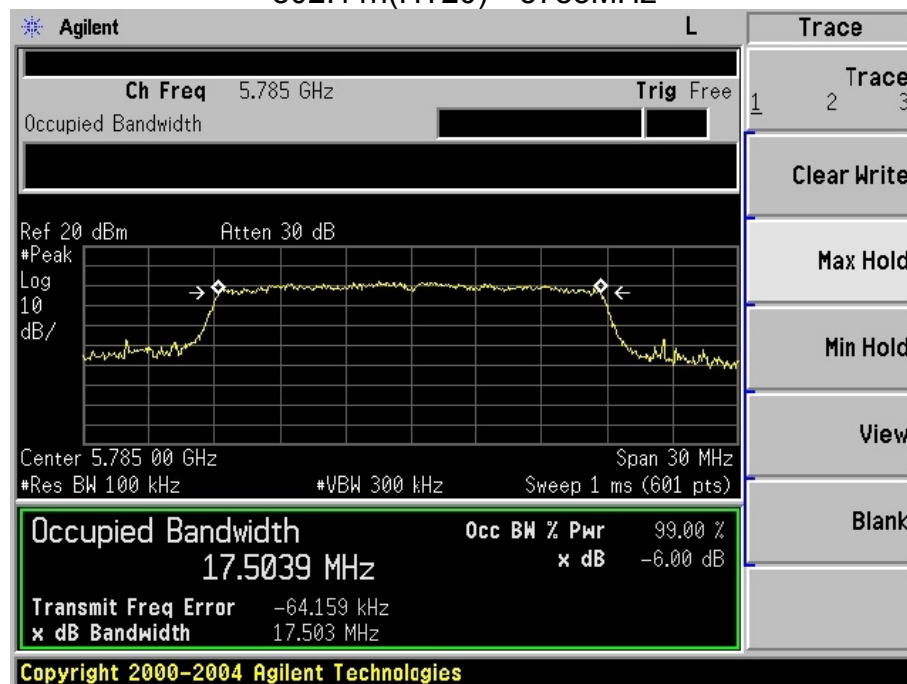


802.11n(HT20) 5825MHz

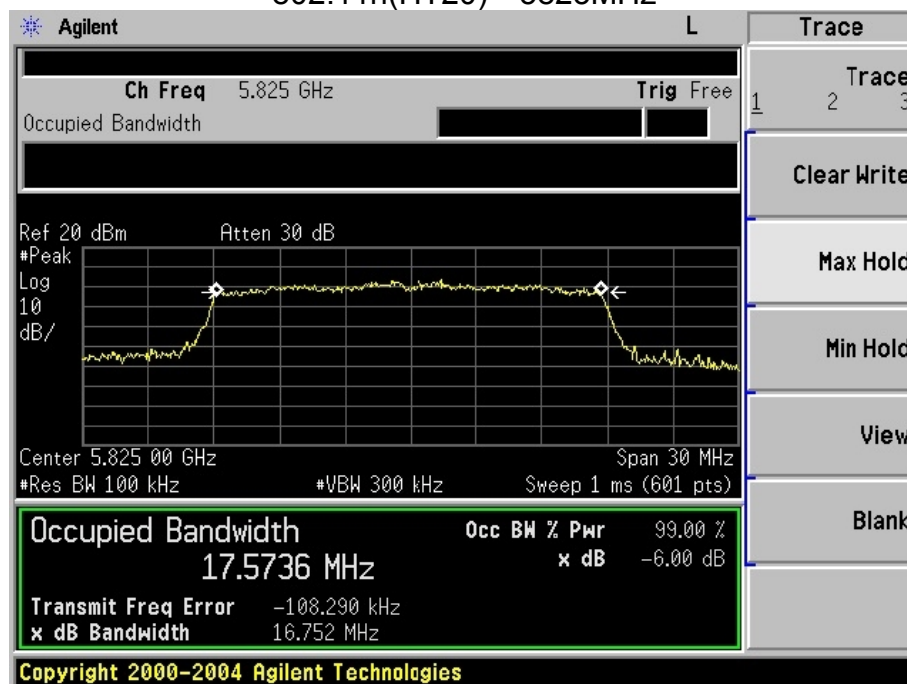




802.11n(HT40) 5755MHz

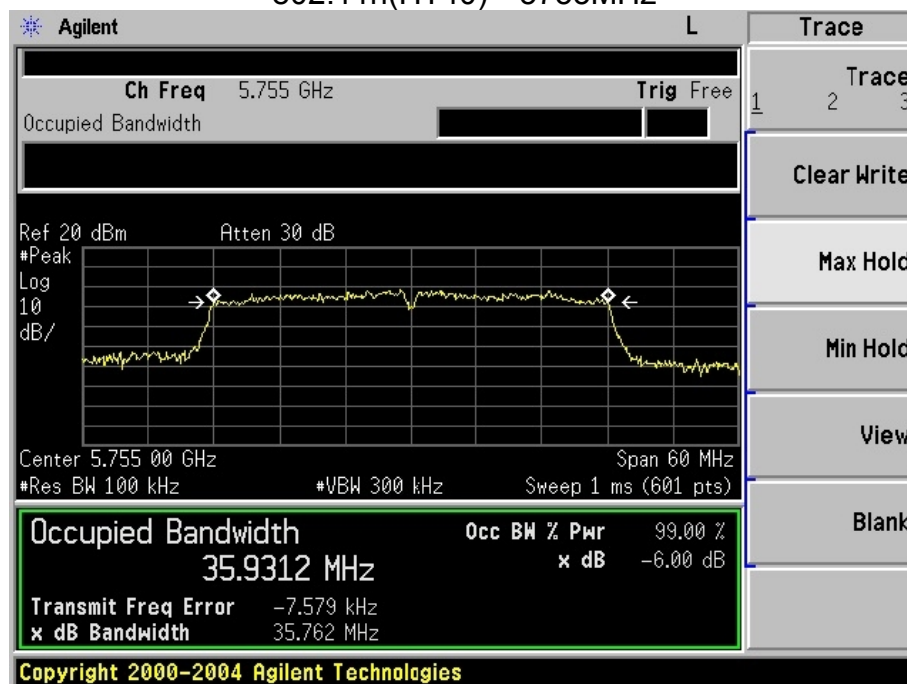

802.11n(HT40) 5795MHz

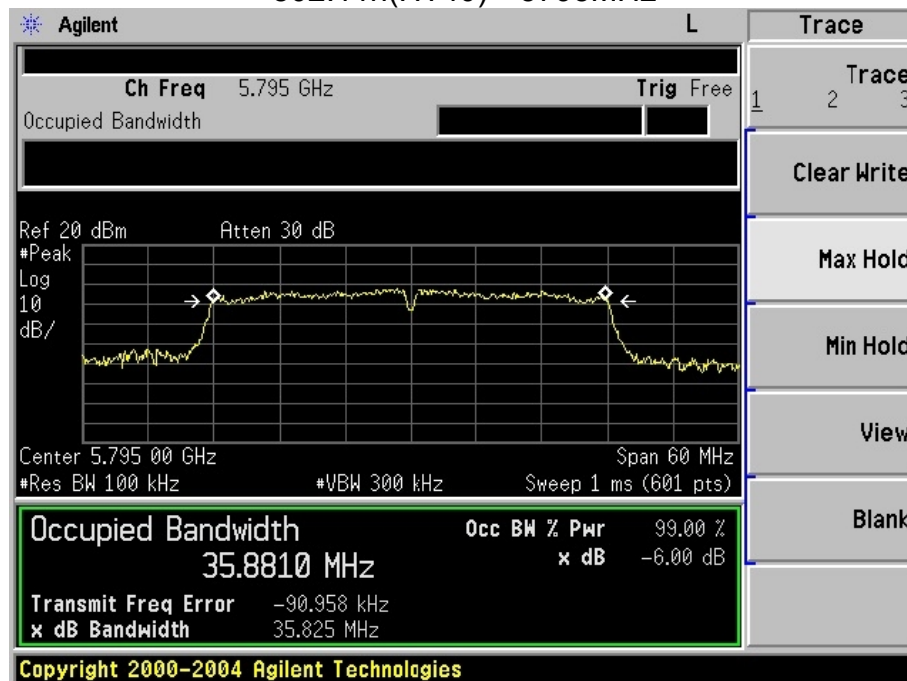

8. OUTPUT POWER TEST

8.1. Limits

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

8.2. Test setup

1. The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):
2. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
 - a. The Transmitter output (antenna port) was connected to the power meter.
 - b. Turn on the EUT and power meter and then record the power value.
 - c. Repeat above procedures on all channels needed to be tested.



8.3. Test result

Band	Frequency (MHz)	Average Output Power(dBm)		Total Power (mW)	Total Power (dBm)	FCC Limit (dBm)	Result
		Ant.1	Ant.2				
802.11n (HT20)	5745	10.26	10.36	21.48	13.32	30.00	Pass
	5785	10.24	10.27	21.21	13.27	30.00	Pass
	5825	10.31	10.27	21.38	13.30	30.00	Pass
802.11n (HT40)	5755	10.18	10.11	20.68	13.16	30.00	Pass
	5795	10.27	10.20	21.11	13.25	30.00	Pass



9. PEAK POWER SPECTRAL DENSITY TEST

9.1. Limits

In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

9.2. Test setup

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to

Spectrum.

4. For U-NII1, U-NII-2A, U-NII-2C Band:

Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)

For U-NII-3 Band:

Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)

5. User the cursor on spectrum to peak search the highest level of trace

6. Record the max. reading and add $10 \log(1/\text{duty cycle})$.


we test all antennas, the antenna 1 was worst mode and the data recording in the report.

9.3. Test data


Test data as below

	Frequency (MHz)	Reading Level (dBm)		Duty factor (dB)	Duty factor 10 log (1MHz/ RBW)	PPSD (dBm)	FCC Limit (dBm)	Result
		ANT1	ANT2					
802.11n (HT20)	5745	8.54	8.43	0.44	0.0	11.94	30.00	Pass
	5785	8.37	8.29	0.44	0.0	11.78	30.00	Pass
	5825	8.12	8.08	0.44	0.0	11.55	30.00	Pass
802.11n (HT40)	5755	4.22	4.17	0.77	0.0	7.98	30.00	Pass
	5795	3.60	3.58	0.77	0.0	7.37	30.00	Pass

802.11n(HT20) 5745MHz

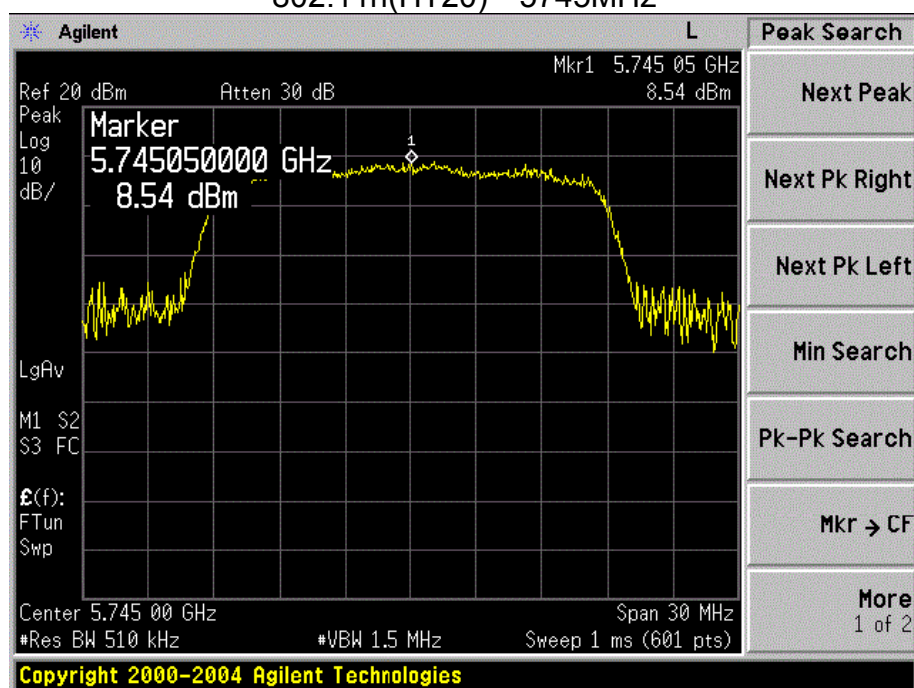


802.11n(HT20) 5785MHz

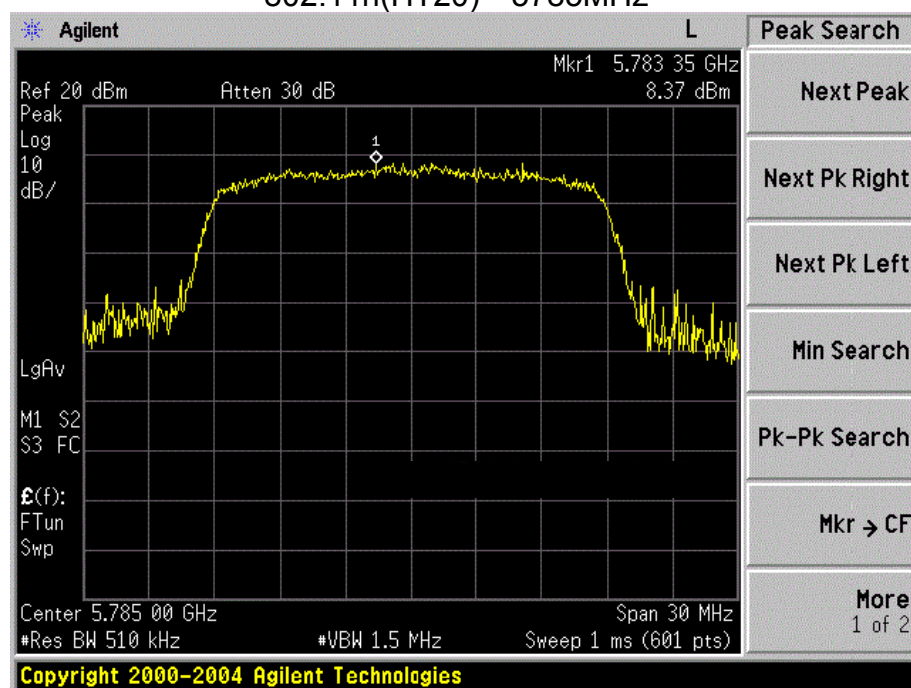





802.11n(HT20) 5825MHz

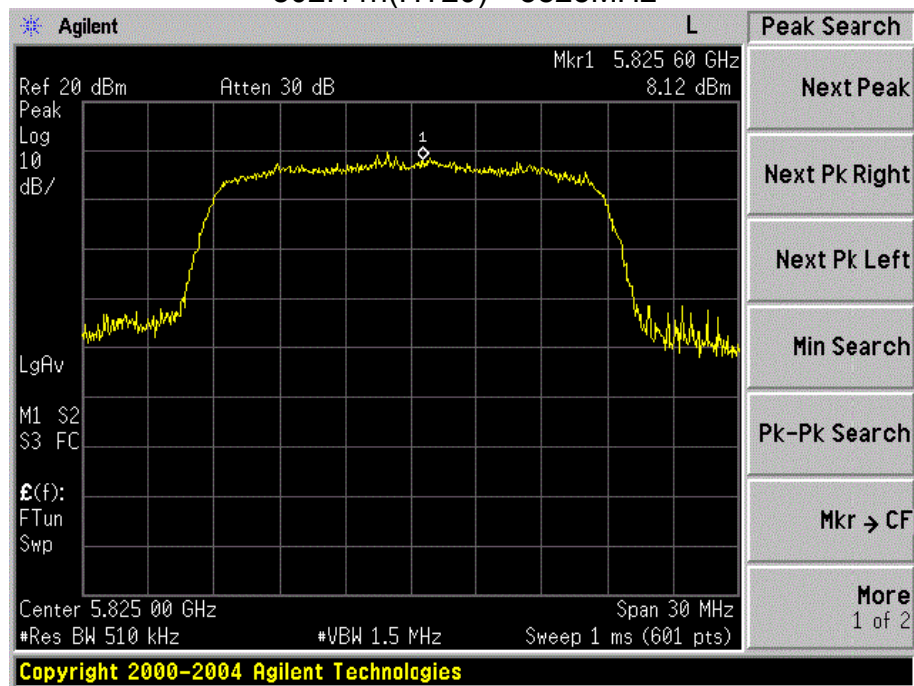

802.11n(HT40) 5755MHz

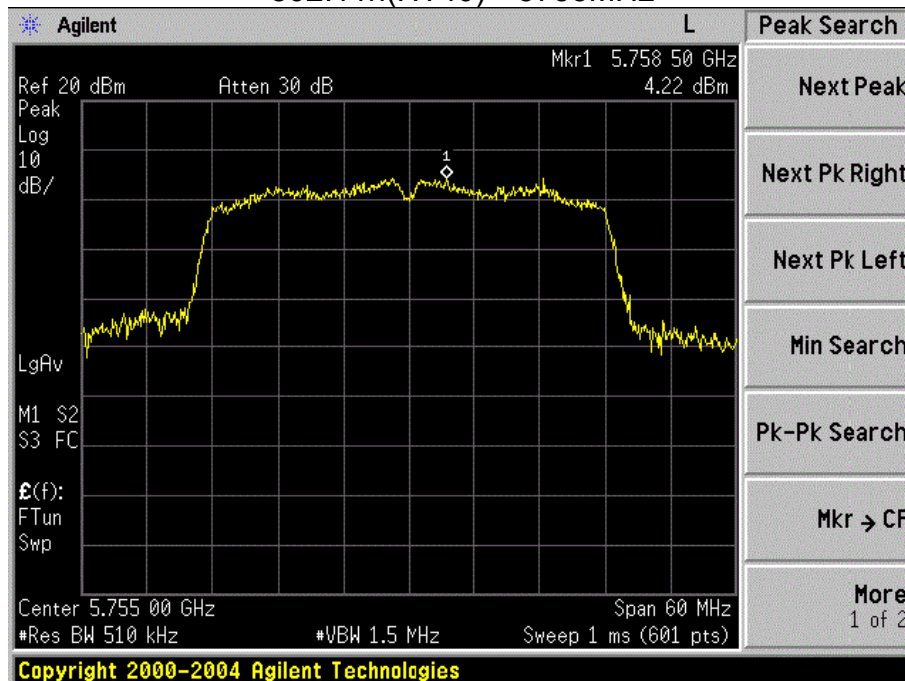

802.11n(HT40) 5795MHz

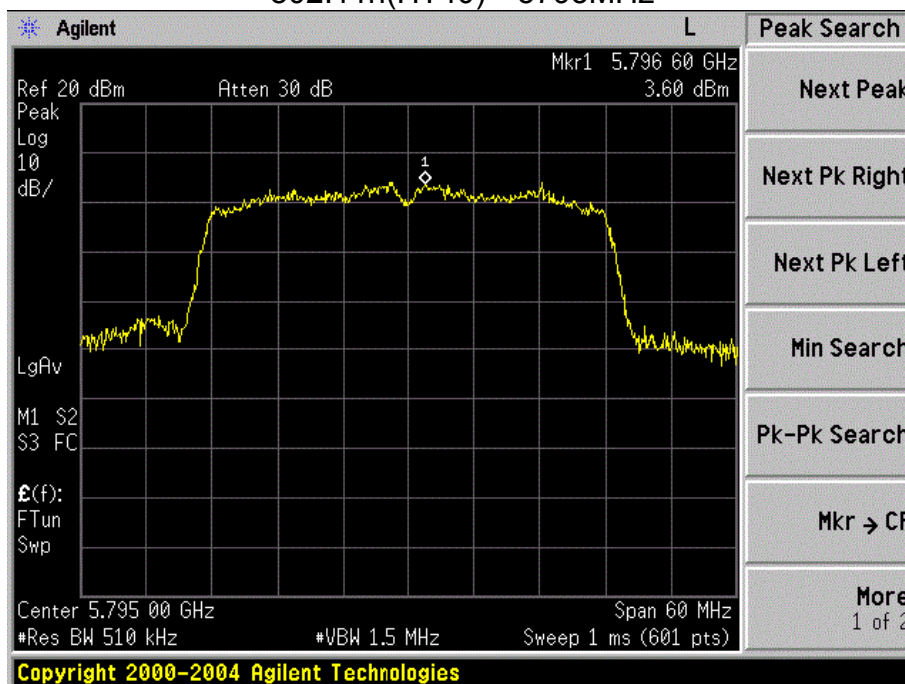



10. FREQUENCY STABILITY

10.1. Limits

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

10.2. Test setup

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

we test all antennas, the antenna 1 was worst mode and the data recording in the report.



10.3. Test data

Test data as below

Ant 1

	Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
802.11n20	6.29V	-20℃	5745.000	5745.0674	-0.0674
			5785.000	5785.0249	-0.0249
			5825.000	5825.0337	-0.0337
	8.51V	-20℃	5745.000	5745.0427	-0.0427
			5785.000	5785.0428	-0.0428
			5825.000	5825.0218	-0.0218
	7.40V	25℃	5745.000	5745.0617	-0.0617
			5785.000	5785.0347	-0.0347
			5825.000	5825.0519	-0.0519
	6.29V	-20℃	5745.000	5745.0324	-0.0324
			5785.000	5785.0614	-0.0614
			5825.000	5825.0287	-0.0287
	8.51V	-20℃	5745.000	5745.0387	-0.0387
			5785.000	5785.0269	-0.0269
			5825.000	5825.0334	-0.0334



Ant 2

	Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
802.11n20	6.29V	-20℃	5745.000	5745.0652	-0.0652
			5785.000	5785.0236	-0.0236
			5825.000	5825.0344	-0.0344
	8.51V	-20℃	5745.000	5745.0434	-0.0434
			5785.000	5785.0426	-0.0426
			5825.000	5825.0228	-0.0228
	7.40V	25℃	5745.000	5745.0667	-0.0667
			5785.000	5785.0324	-0.0324
			5825.000	5825.0526	-0.0526
	6.29V	-20℃	5745.000	5745.0352	-0.0352
			5785.000	5785.0674	-0.0674
			5825.000	5825.0226	-0.0226
	8.51V	-20℃	5745.000	5745.0358	-0.0358
			5785.000	5785.0252	-0.0252
			5825.000	5825.0361	-0.0361



Ant 1

	Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
802.11n40	6.29V	-20℃	5755.000	5755.0517	-0.0517
			5795.000	5795.0641	-0.0641
	8.51V	-20℃	5755.000	5755.0275	-0.0275
			5795.000	5795.0466	-0.0466
	7.40V	25℃	5755.000	5755.0268	-0.0268
			5795.000	5795.0517	-0.0517
	6.29V	55℃	5755.000	5755.0417	-0.0417
			5795.000	5795.0349	-0.0349
	8.51V	55℃	5755.000	5755.0337	-0.0337
			5795.000	5795.0419	-0.0419



Ant 2

	Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
802.11n40	6.29V	-20℃	5755.000	5755.0557	-0.0557
			5795.000	5795.0626	-0.0626
	8.51V	-20℃	5755.000	5755.0216	-0.0216
			5795.000	5795.0424	-0.0424
	7.40V	25℃	5755.000	5755.0256	-0.0256
			5795.000	5795.0227	-0.0227
	6.29V	55℃	5755.000	5755.0447	-0.0447
			5795.000	5795.0356	-0.0356
	8.51V	55℃	5755.000	5755.0374	-0.0374
			5795.000	5795.0467	-0.0467



11. TRANSMISSION IN THE ABSENCE OF DATA

11.1. Limits

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

11.2. Test result

No non-compliance noted:

Refer to the theory of operation.

12. ANTENNA REQUIREMENT

12.1. STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2. EUT ANTENNA

The EUT antenna is internal antenna, It comply with the standard requirement.

13. PHOTOGRAPHS OF TEST SET-UP



Radiated Measurement Photos

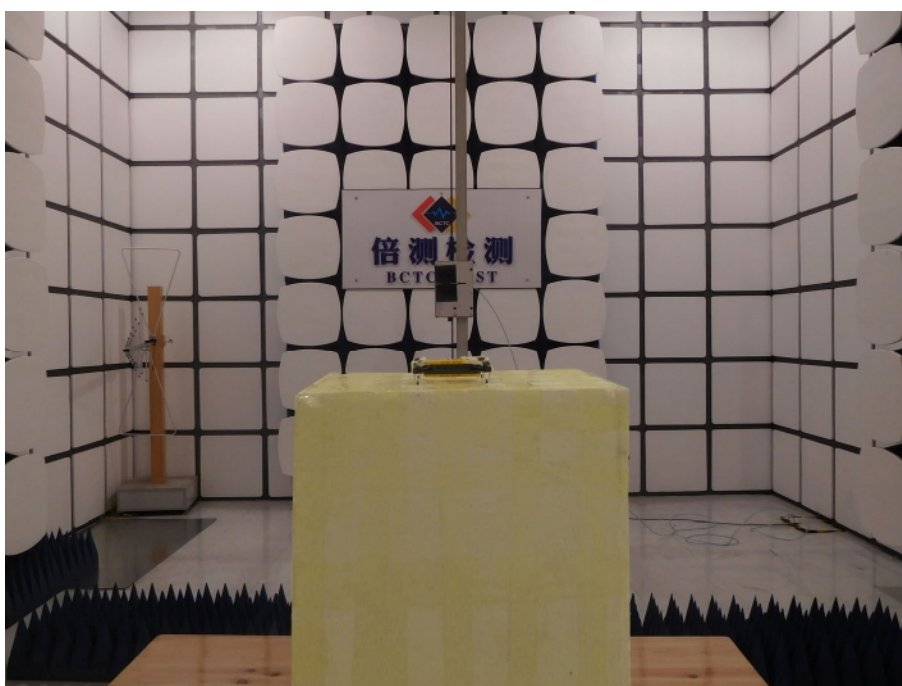
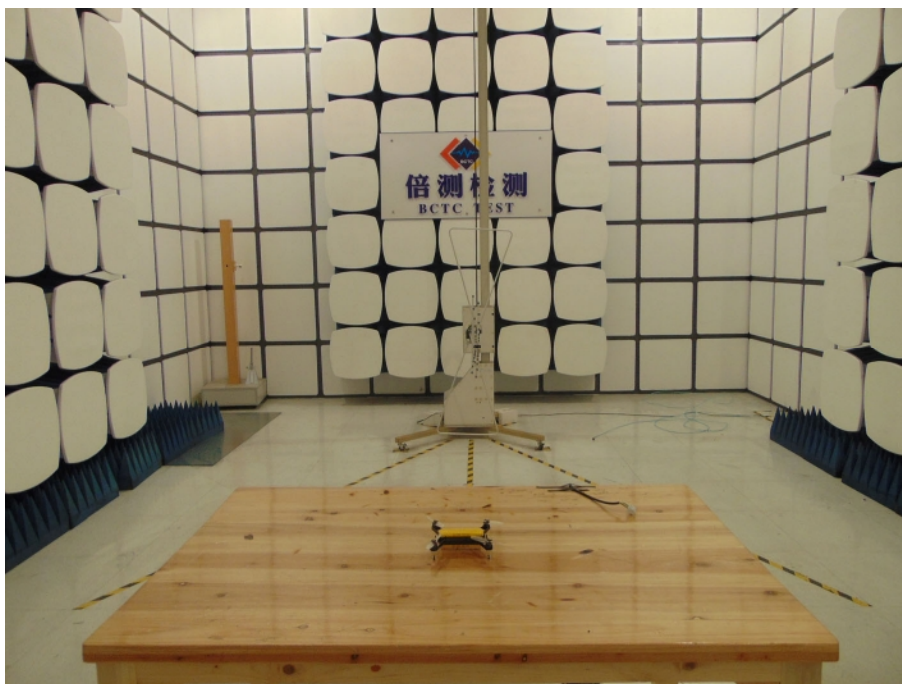




Conducted Measurement Photos



14. PHOTOGRAPHS OF THE EUT

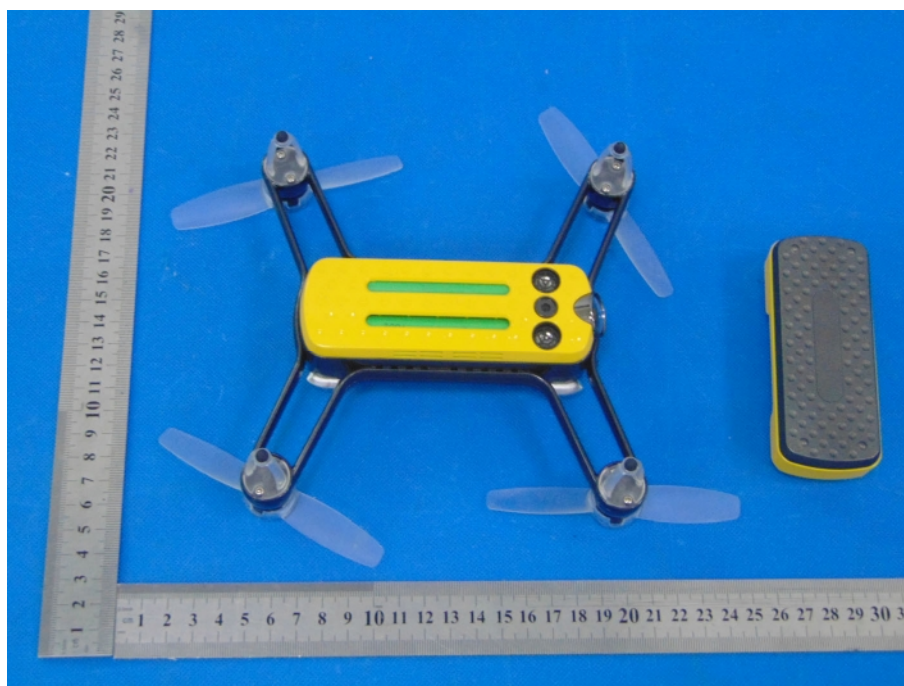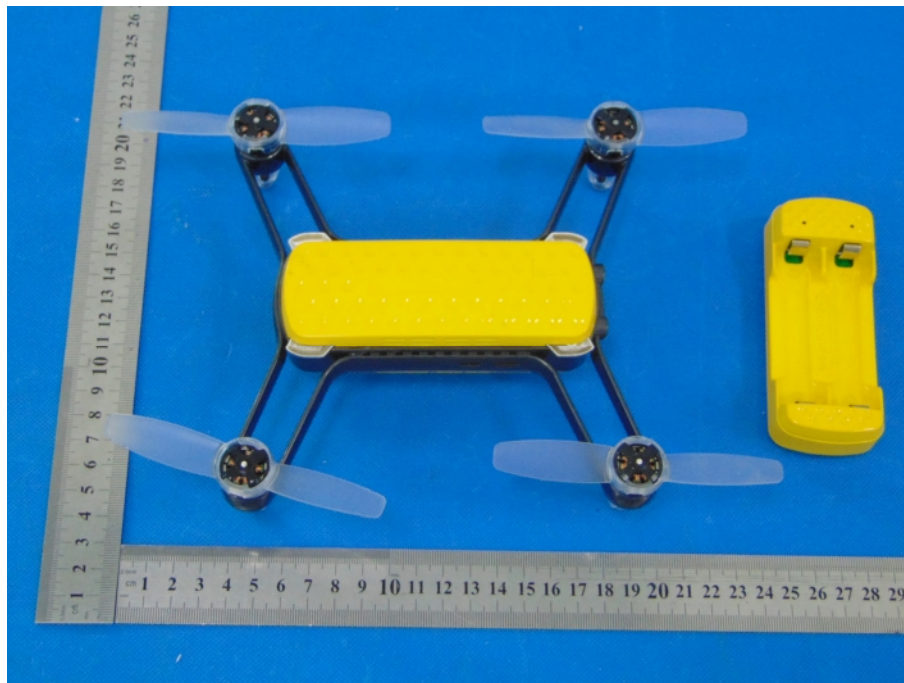

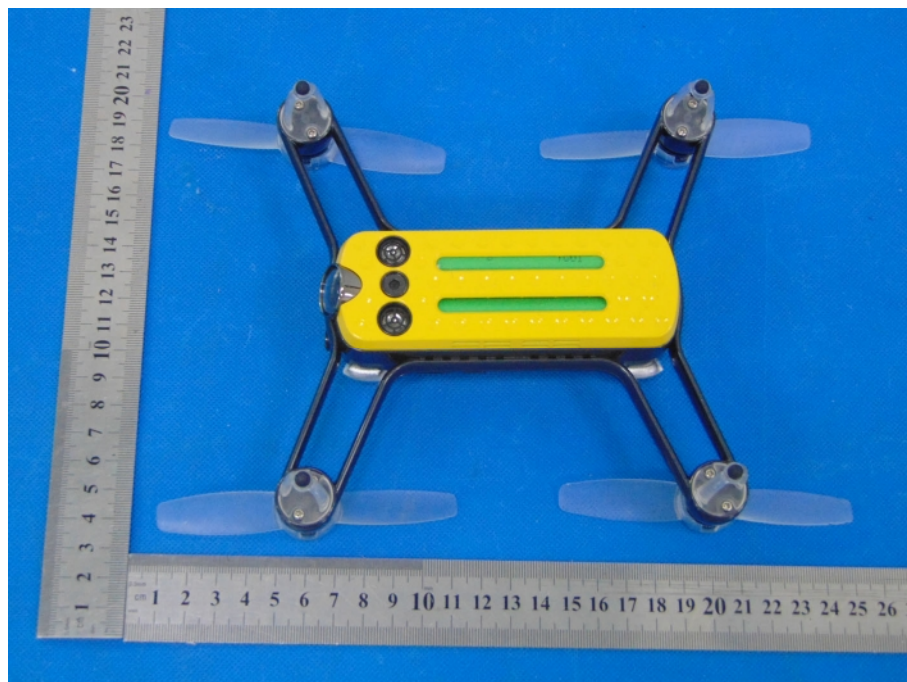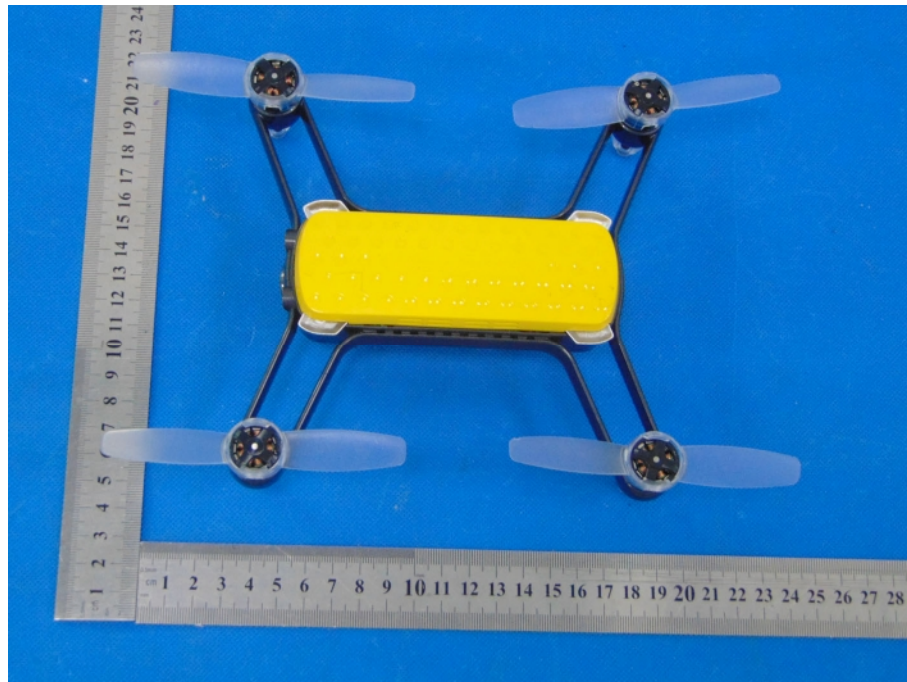

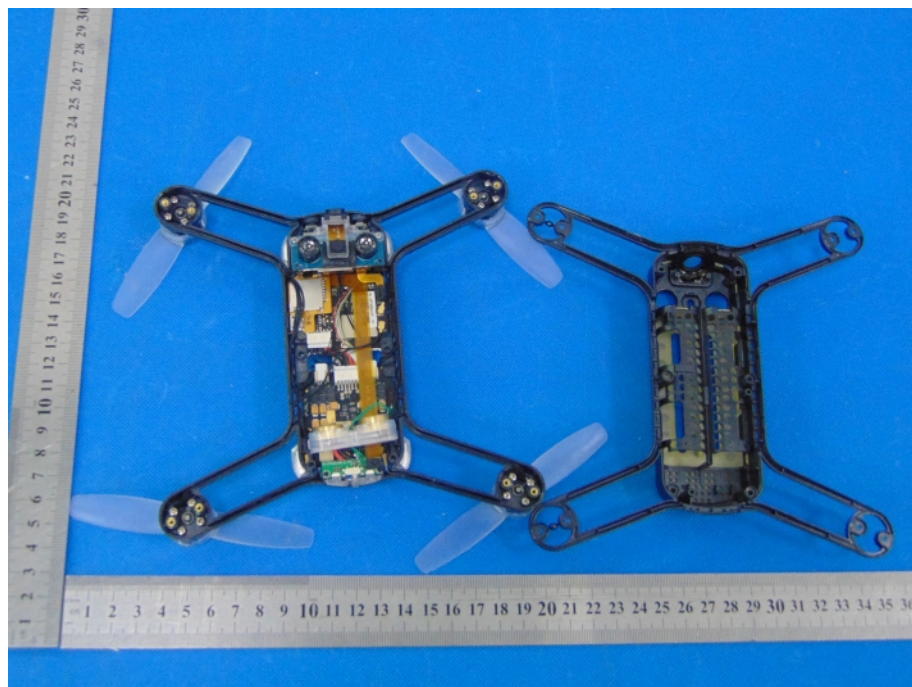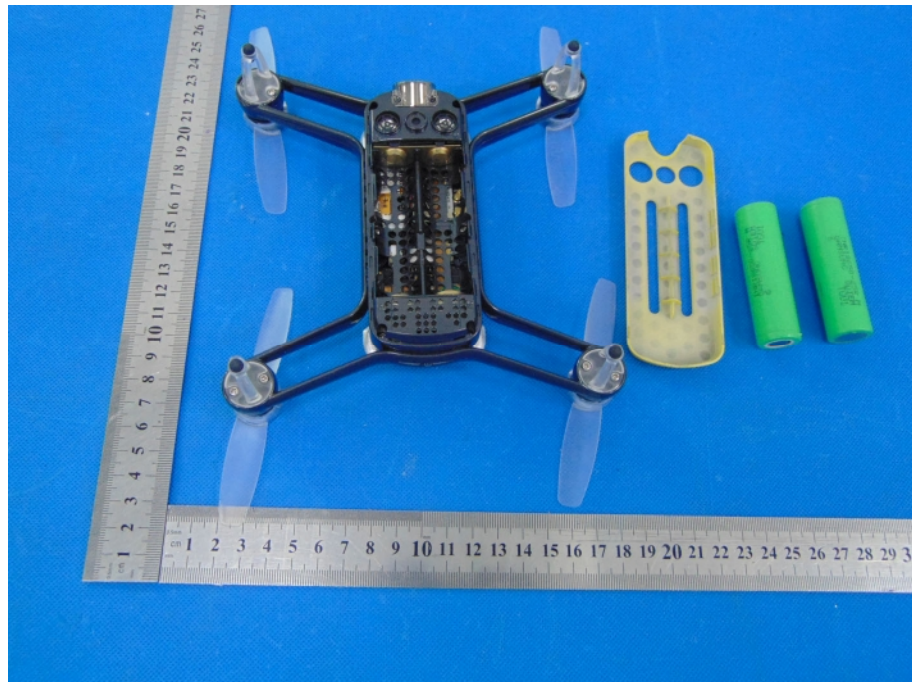

***** END OF REPORT *****