



中国认可
国际互认
检测
TESTING
CNAS L2264

RF TEST REPORT

Applicant Shanghai Dingli Information
Technology LTD.

FCC ID 2AKNC-MERCURY

Product NFC reader/writer

Brand VeChain

Model MERCURY

Report No. RXA1612-0284RF02R2

Issue Date January 13, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2016)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Reviewed by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. 20dB Bandwidth	9
5.2. Frequency Stability.....	11
5.3. Radiates Emission	13
5.4. Conducted Emission	19
6. Main Test Instruments	22
ANNEX A: EUT Appearance and Test Setup	23
A.1 EUT Appearance	23
A.2 Test Setup	24
A.3 Auxiliary Equipment.....	26



Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	20 dB bandwidth	2.1049	PASS
2	Frequency Stability Tolerance	15.225(e)	PASS
3	Radiated Emissions	15.225 (a) (b) (c) (d) and 15.209	PASS
Date of Testing: December 13, 2016 ~ December 22, 2016			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2. General Description of Equipment under Test

Client Information

Applicant	Shanghai Dingli Information Technology LTD.
Applicant address	building 12 Anding Fang,284 Jiangsu Road,Shanghai, P.R.China
Manufacturer	Shanghai Dingli Information Technology LTD.
Manufacturer address	building 12 Anding Fang,284 Jiangsu Road,Shanghai, P.R.China

General information

EUT Description	
Model:	MERCURY
SN:	/
Hardware Version:	V03-1
Software Version:	V1.0
Power Supply:	Connect the USB to PC
Antenna Type:	Internal Antenna
Test Mode:	NFC
Modulation Type:	ASK
Operating Frequency Range(s)	13.56MHz
Auxiliary Equipment	
Mifare Card	Model: mifare s50 card Manufactor: Shanghai Estar Technology Co.,Ltd
Note: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 2 (2016)**
- **FCC CFR47 Part 15C (2016)**
- **ANSI C63.10 (2013)**



4. Test Configuration

Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

5. Test Case Results

5.1. 20dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 10 kHz; VBW is set to 3 times the RBW on spectrum analyzer.

Test Setup



Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:**

Carrier frequency (MHz)	99% Bandwidth (kHz)	20dB Bandwidth (kHz)	Conclusion
13.56MHz	445.58	127.5	PASS

5.2. Frequency Stability

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -20°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a "call mode". These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -20°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 4.7 V and 5.3 V, with a nominal voltage of 5.0V.

Test setup

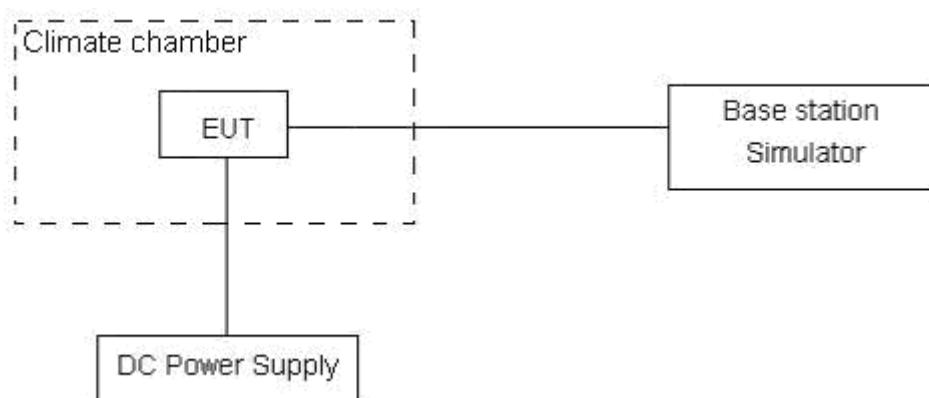

**Limits**

Rule Part 15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

Test status	Frequency				Tolerance (MHz)			
	13.56MHz							
	1min	2min	5min	10min	1min	2min	5min	10min
-20°C/5 V	13.559348	13.559334	13.559338	13.55935	0.000652	0.000666	0.000662	0.000650
-10°C/5 V	13.559345	13.559334	13.559332	13.559344	0.000655	0.000666	0.000668	0.000656
0°C/5 V	13.559337	13.559324	13.559327	13.559335	0.000663	0.000676	0.000673	0.000665
10°C/5 V	13.559337	13.55932	13.559323	13.559331	0.000663	0.000680	0.000677	0.000669
20°C/5 V	13.559336	13.559313	13.559322	13.559328	0.000664	0.000687	0.000678	0.000672
30°C/5 V	13.559334	13.55931	13.559312	13.559318	0.000666	0.000690	0.000688	0.000682
40°C/5 V	13.559324	13.559301	13.559311	13.559316	0.000676	0.000699	0.000689	0.000684
50°C/5 V	13.559323	13.559292	13.559308	13.559310	0.000677	0.000708	0.000692	0.000690
20°C/4.3 V	13.559315	13.559286	13.559303	13.559310	0.000685	0.000714	0.000697	0.000690
20°C/5.8 V	13.559314	13.559281	13.559303	13.559305	0.000686	0.000719	0.000697	0.000695

Test status	Tolerance (%)				Limit (%)	Conclusion
	1min	2min	5min	10min		
-20°C/5 V	0.004845	0.005214	0.005133	0.005295	0.01	PASS
-10°C/5 V	0.005066	0.005265	0.005155	0.005302	0.01	PASS
0°C/5 V	0.005184	0.005288	0.005229	0.005317	0.01	PASS
10°C/5 V	0.005214	0.005295	0.00528	0.005354	0.01	PASS
20°C/5 V	0.005317	0.005347	0.005317	0.005361	0.01	PASS
30°C/5 V	0.005391	0.005339	0.005339	0.005376	0.01	PASS
40°C/5 V	0.00545	0.005369	0.005398	0.00542	0.01	PASS
50°C/5 V	0.005479	0.005391	0.005428	0.005442	0.01	PASS
20°C/4.3 V	0.005050	0.005263	0.005139	0.005090	0.01	PASS
20°C/5.8 V	0.005056	0.005306	0.005144	0.005124	0.01	PASS



5.3. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO



Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

The test is in transmitting mode.

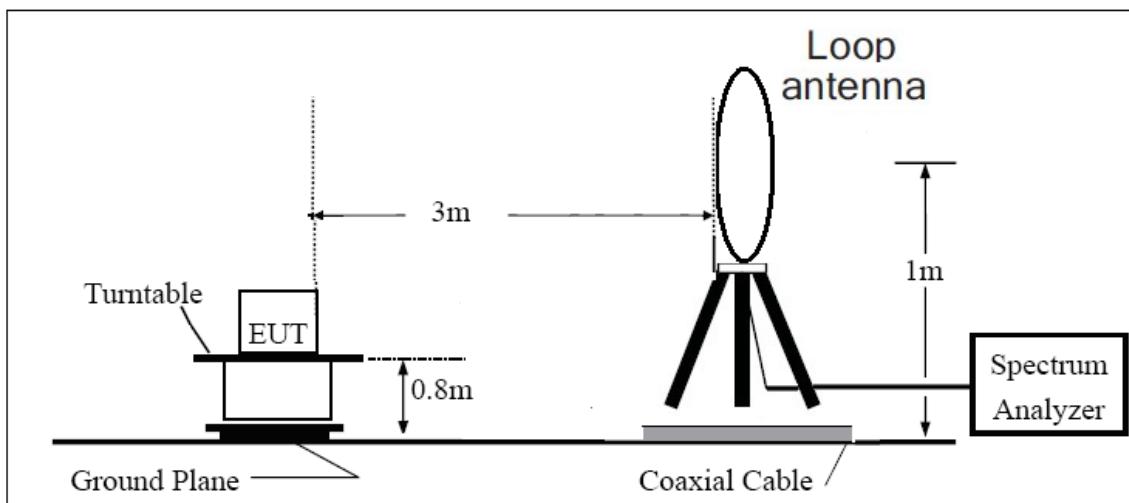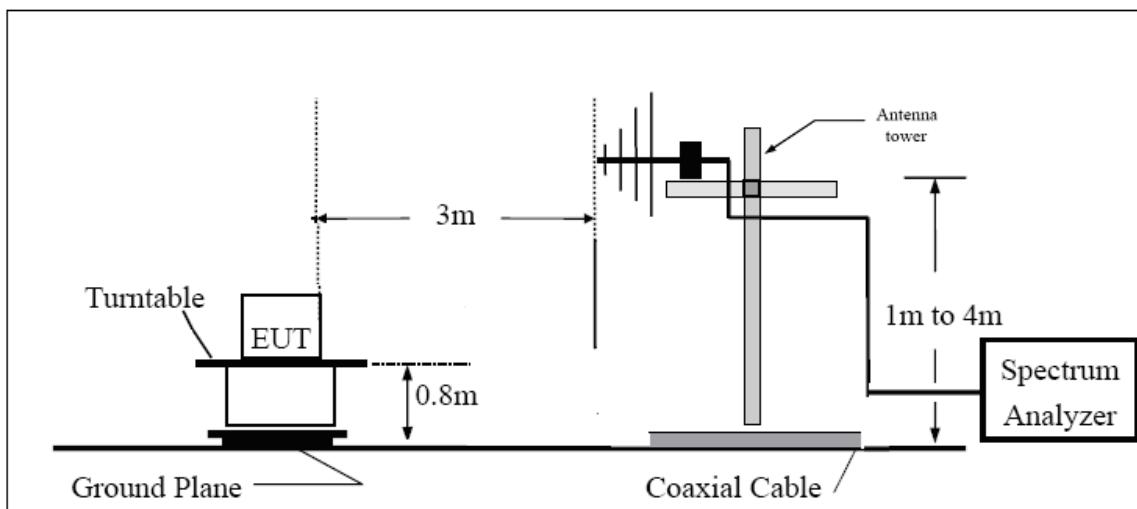Test setup**9kHz~~~ 30MHz****30MHz~~~ 1GHz****Limits**

Clause 15.225(a) the field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Clause 15.225(b) within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Clause 15.225(c) within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Clause 15.225(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/



1.705-30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

§15.209 (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

**Test result****In-band**

RE FCC Part15 13.56M

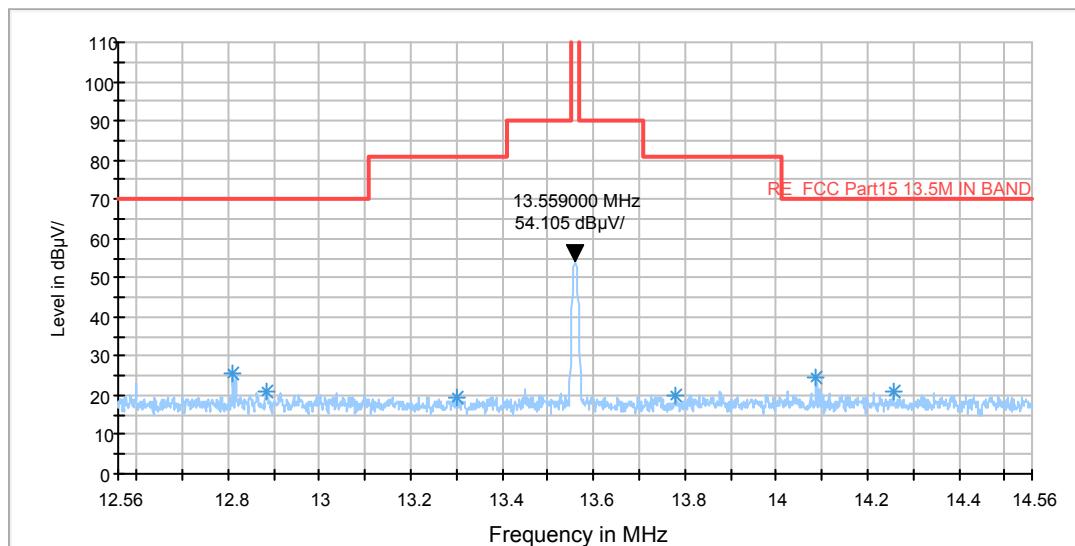


Radiates Emission from 12.56MHz to 14.56MHz

Note: This graph displays the maximum values of horizontal and vertical by software

Out-of-band

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

RE FCC Part15 13.56M

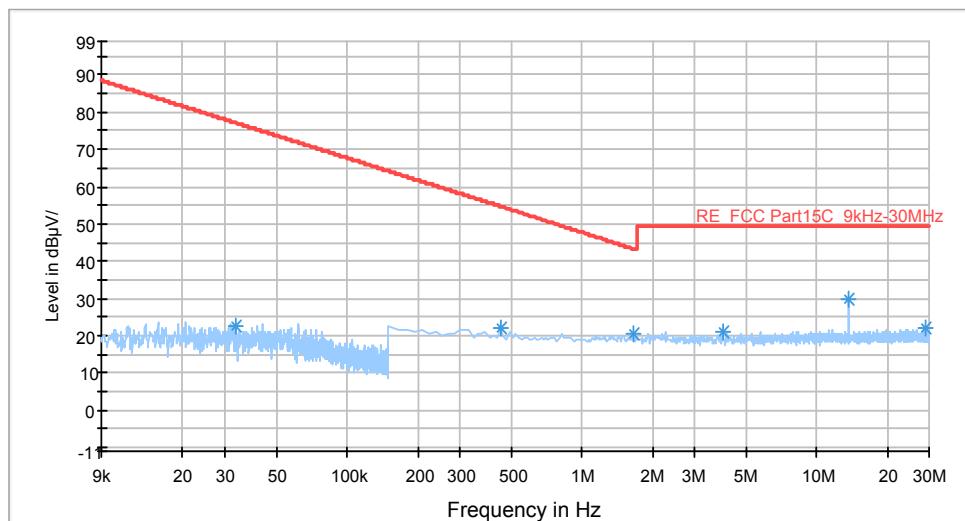

Radiates Emission from 9kHz to 30MHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
0.033675	22.6	100.0	V	358.0	50.7	28.1	54.6	77.18
0.448500	21.8	100.0	V	0.0	41.8	20.0	33.0	54.76
1.642500	20.3	100.0	V	0.0	39.7	19.4	23.0	43.33
3.985725	21.0	100.0	V	0.0	40.3	19.3	28.5	49.50
29.059725	22.0	100.0	V	0.0	41.9	19.9	27.5	49.50
13.560000	29.7	100.0	V	0.0	49.3	19.6	19.8	49.50


Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss (cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak



RE 0.03-1GHz QP Class B

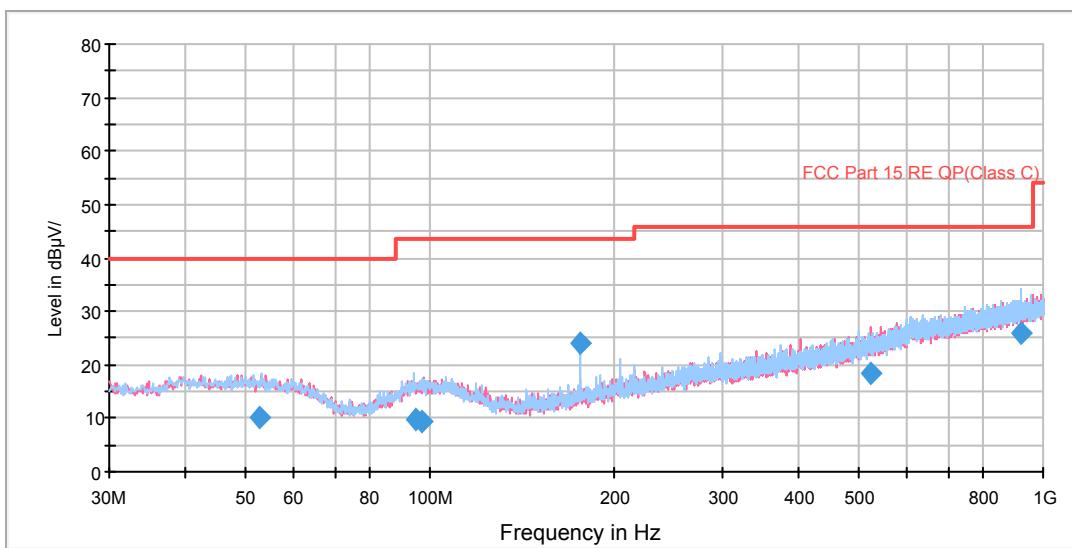

Radiates Emission from 30MHz to 1GHz

Note: This graph displays the maximum values of horizontal and vertical by software

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dB μ V/m)	Correct Factor (dB)	Margin (dB)	Limit (dB μ V/m)
52.760000	10.0	100.0	H	195.0	22.9	12.9	30.0	40.0
94.661250	9.7	100.0	H	11.0	22.2	12.5	33.8	43.5
96.815000	9.5	100.0	V	182.0	22.3	12.8	34.0	43.5
176.267500	24.0	125.0	H	291.0	34.6	10.6	19.5	43.5
523.896250	18.2	100.0	V	234.0	38.7	20.5	27.8	46.0
922.075000	26.0	100.0	H	22.0	51.8	25.8	20.0	46.0

5.4. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

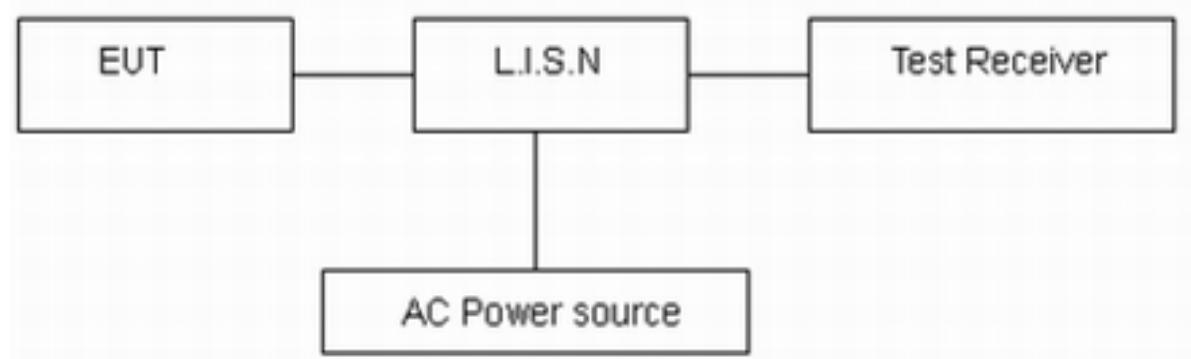

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 [*]	56 to 46 [*]
0.5 - 5	56	46



5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

**Test Results:**

Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

L Line										
Final Result										
Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	
0.190500	38.04	—	64.02	25.97	1000.0	9.000	L1	ON	19.2	
0.192750	—	23.02	53.92	30.90	1000.0	9.000	L1	ON	19.2	
0.602250	—	17.20	46.00	28.80	1000.0	9.000	L1	ON	19.3	
0.615750	26.09	—	56.00	29.91	1000.0	9.000	L1	ON	19.3	
2.004000	—	23.64	46.00	22.36	1000.0	9.000	L1	ON	19.1	
2.006250	31.28	—	56.00	24.72	1000.0	9.000	L1	ON	19.1	
4.314750	—	26.06	46.00	19.94	1000.0	9.000	L1	ON	19.1	
4.623000	31.32	—	56.00	24.68	1000.0	9.000	L1	ON	19.1	
6.803250	—	24.21	50.00	21.79	1000.0	9.000	L1	ON	19.1	
6.963000	28.74	—	60.00	31.26	1000.0	9.000	L1	ON	19.2	
22.526500	—	24.46	50.00	25.54	1000.0	9.000	L1	ON	19.5	
22.528500	26.42	—	60.00	33.58	1000.0	9.000	L1	ON	19.5	

N Line										
Final Result										
Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	
0.195000	—	20.71	53.82	33.11	1000.0	9.000	N	ON	19.2	
0.199500	32.29	—	63.63	31.35	1000.0	9.000	N	ON	19.2	
0.867750	23.55	—	56.00	32.45	1000.0	9.000	N	ON	19.2	
0.885750	—	17.53	46.00	28.47	1000.0	9.000	N	ON	19.2	
1.943250	31.61	—	56.00	24.39	1000.0	9.000	N	ON	19.1	
2.004000	—	24.54	46.00	21.46	1000.0	9.000	N	ON	19.1	
4.233750	—	25.45	46.00	20.55	1000.0	9.000	N	ON	19.1	
4.299000	31.47	—	56.00	24.53	1000.0	9.000	N	ON	19.1	
6.193500	27.90	—	60.00	32.10	1000.0	9.000	N	ON	19.1	
6.459000	—	22.56	50.00	27.44	1000.0	9.000	N	ON	19.1	
15.778500	21.83	—	60.00	38.17	1000.0	9.000	N	ON	19.4	
22.528500	—	23.31	50.00	26.69	1000.0	9.000	N	ON	19.5	



6. Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	FSV30	R&S	100815	2015-12-17	2016-12-16
Spectrum Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
EMI Test Receiver	ESCI	R&S	100948	2016-06-01	2017-05-31
TRILOG Broadband Antenna	VULB 9163	Schwarzbeck	9163-201	2014-12-06	2017-12-05
Loop Antenna	FMZB1519	SCHWARZBECK	1519-047	2014-02-19	2017-02-18
EMI Test Receiver	ESCS30	R&S	100138	2016-12-10	2017-12-09
LISN	ENV216	R&S	101171	2016-12-10	2019-12-10
Spectrum Analyzer	N9010A	Agilent	MY47191109	2016-05-21	2017-05-20
MOB COMMS DC SUPPLY	66319D	Agilent	MY43004105	2016-05-21	2017-05-20
Peak Power Meter	U2021XA	Keysight	MY55240003	2016-06-26	2017-06-25
RF Cable	SMA 15cm	Agilent	0001	2016-11-06	2017-01-05

*****END OF REPORT*****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side





Back Side

a: EUT

Picture 1 EUT and Accessory

A.2 Test Setup

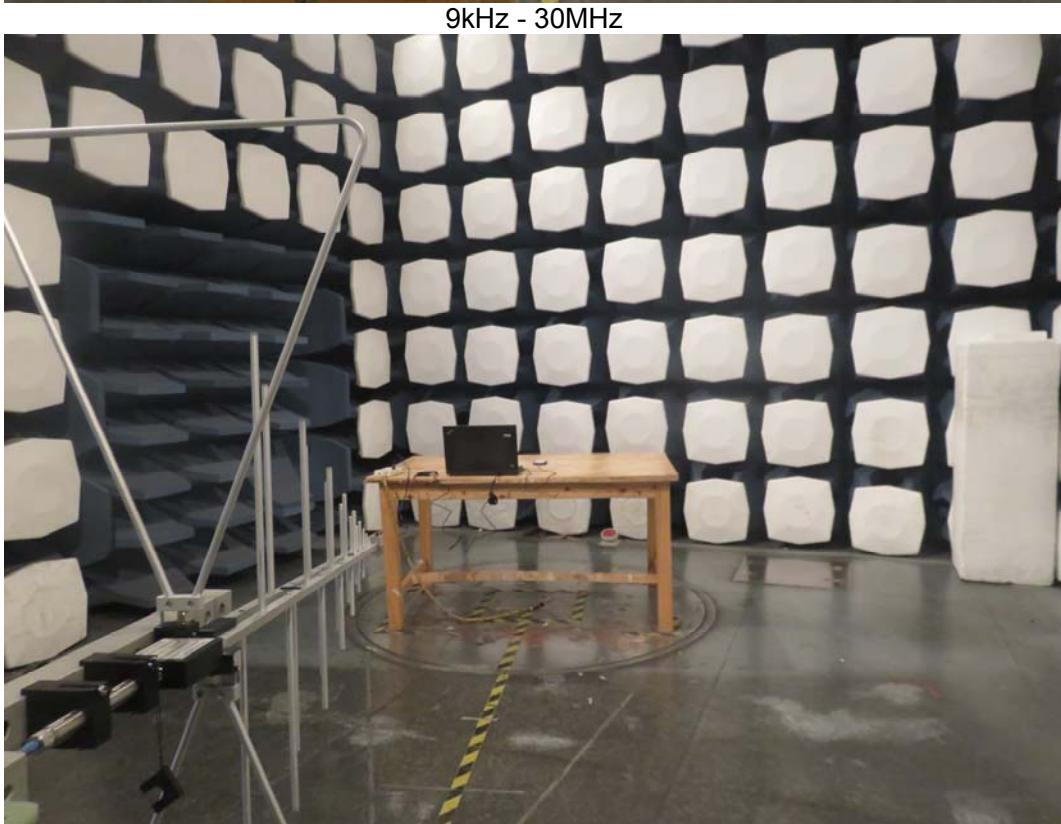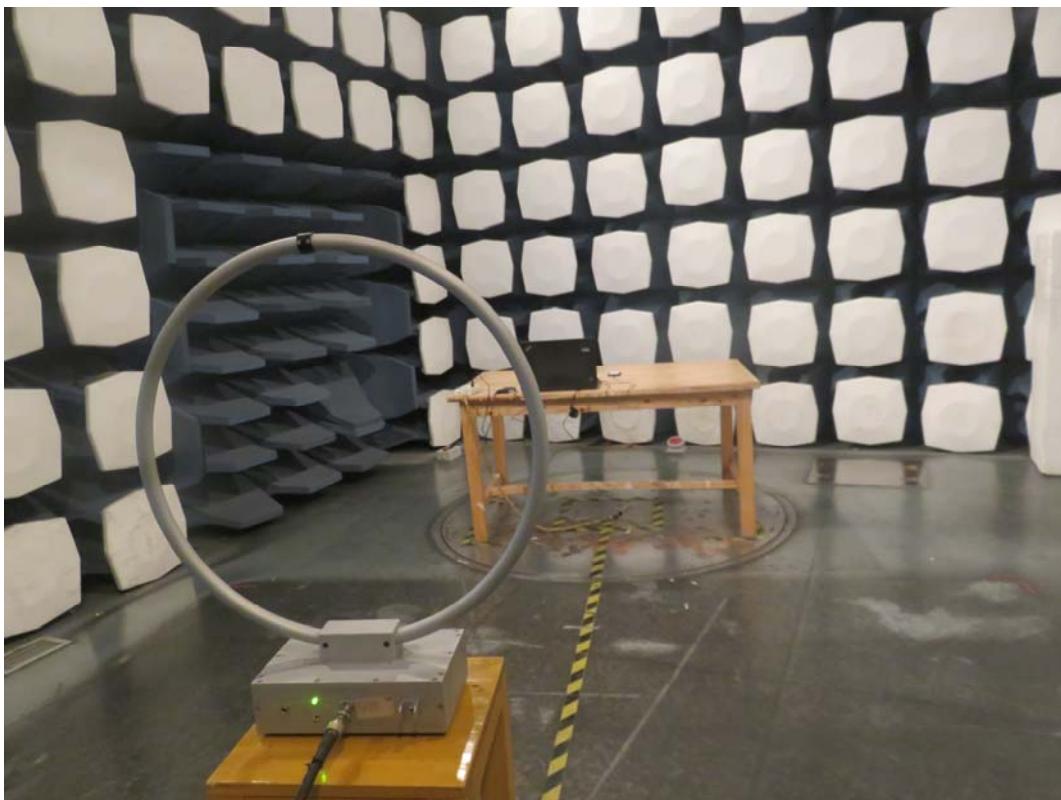

Picture 2 Radiated Emission Test Setup



Picture 2 Conducted Emission Test Setup

A.3 Auxiliary Equipment



Mifare Card