



# FCC RADIO TEST REPORT

## FCC ID:2AKP7SAT01

**Product :** Tablet PC

**Trade Mark :** MINNO

**Model Name :** M09GSAT01

**Serial Model :** TVE8901C

**Report No. :** NTEK-2016NT12120527F5

### **Prepared for**

Minno LLC

421 North Milpas Street, Santa Barbara, CA 93103, U.S.A.

### **Prepared by**

NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588

Fax.: +86-755-6115 6599

Website:<http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Minno LLC

Address ..... : 421 North Milpas Street, Santa Barbara, CA 93103, U.S.A.

**Manufacturer's Name** ..... : Minno LLC

Address ..... : A64, 3/F, Fully Best Bldg, No. 1 Kefa Road, Nanshan, Shenzhen

### Product description

Product name ..... : Tablet PC

Model and/or type reference : M09GSAT01

Serial Model ..... : TVE8901C

**Standards** ..... : FCC Part15.407: 01 Oct. 2015

Test procedure ..... ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v01r01

FCC KDB 662911 D01 Multiple Transmitter Output v01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


**Date of Test** .....

Date (s) of performance of tests ..... 12 Dec. 2016 ~07 Jan. 2017

Date of Issue ..... 07 Jan. 2017


Test Result ..... **Pass**

Testing Engineer : \_\_\_\_\_




(Susan Su)

Technical Manager : \_\_\_\_\_



(Jason Chen)

Authorized Signatory :



(Sam Chen)

## Table of Contents

	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1.1 TEST FACILITY</b>	6
<b>1.2 MEASUREMENT UNCERTAINTY</b>	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	7
<b>2.2 DESCRIPTION OF TEST MODES</b>	10
<b>2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	11
<b>2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	12
<b>2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	13
<b>3 . EMC EMISSION TEST</b>	<b>15</b>
<b>3.1 CONDUCTED EMISSION MEASUREMENT</b>	15
<b>3.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	15
<b>3.1.2 TEST PROCEDURE</b>	16
<b>3.1.3 DEVIATION FROM TEST STANDARD</b>	16
<b>3.1.4 TEST SETUP</b>	16
<b>3.1.5 EUT OPERATING CONDITIONS</b>	16
<b>3.1.6 TEST RESULTS</b>	17
<b>3.2 RADIATED EMISSION MEASUREMENT</b>	21
<b>3.2.1 APPLICABLE STANDARD</b>	21
<b>3.2.2 CONFORMANCE LIMIT</b>	21
<b>3.2.3 MEASURING INSTRUMENTS</b>	21
<b>3.2.4 TEST CONFIGURATION</b>	21
<b>3.2.5 TEST PROCEDURE</b>	23
<b>3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)</b>	24
<b>3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)</b>	25
<b>3.2.8 TEST RESULTS (1GHZ-18GHZ)</b>	29
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>37</b>
<b>4.1 APPLIED PROCEDURES / LIMIT</b>	37
<b>4.2 TEST PROCEDURE</b>	38
<b>4.3 DEVIATION FROM STANDARD</b>	38
<b>4.4 TEST SETUP</b>	38
<b>4.5 EUT OPERATION CONDITIONS</b>	38
<b>4.6 TEST RESULTS</b>	39
<b>5 . 26 DB &amp; 99% EMISSION BANDWIDTH</b>	<b>47</b>
<b>5.1 APPLIED PROCEDURES / LIMIT</b>	47
<b>5.2 TEST PROCEDURE</b>	47

## Table of Contents

	Page
5.3 EUT OPERATION CONDITIONS	48
5.4 TEST RESULTS	49
<b>6 . MINIMUM 6 DB BANDWIDTH</b>	<b>57</b>
6.1 APPLIED PROCEDURES / LIMIT	57
6.2 TEST PROCEDURE	57
6.3 DEVIATION FROM STANDARD	57
6.4 TEST SETUP	57
6.5 EUT OPERATION CONDITIONS	57
6.6 TEST RESULTS	58
<b>7 . MAXIMUM CONDUCTED OUTPUT POWER</b>	<b>66</b>
7.1 APPLIED PROCEDURES / LIMIT	66
7.2 TEST PROCEDURE	66
7.3 DEVIATION FROM STANDARD	68
7.4 TEST SETUP	68
7.5 EUT OPERATION CONDITIONS	68
7.6 TEST RESULTS	69
<b>8 . OUT OF BAND EMISSIONS</b>	<b>71</b>
8.1 APPLICABLE STANDARD	71
8.2 TEST PROCEDURE	71
8.3 DEVIATION FROM STANDARD	71
8.4 TEST SETUP	71
8.5 EUT OPERATION CONDITIONS	71
8.6 TEST RESULTS	72
<b>9. SPURIOUS RF CONDUCTED EMISSIONS</b>	<b>78</b>
9.1 CONFORMANCE LIMIT	78
9.2 MEASURING INSTRUMENTS	78
9.3 TEST SETUP	78
9.4 TEST PROCEDURE	78
9.5 TEST RESULTS	78
<b>10. ANTENNA REQUIREMENT</b>	<b>93</b>
10.1 STANDARD REQUIREMENT	93
10.2 EUT ANTENNA	93
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edges	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet PC	
Trade Mark	MINNO	
Model Name	M09GSAT01	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n/AC(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n/AC(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11AC(80MHz channel bandwidth)
	Data Rate	802.11 a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS15; 802.11n(HT40):MCS0-MCS15; 802.11AC: NSS1,MCS0-MCS9,NSS2,MCS0-MCS9;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/n(HT20)/AC20; 5190-5230MHz for 802.11n(HT40)/AC40; 5210MHz for 802.11 AC80; <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n(HT20)/AC20; 5755-5795 MHz for 802.11a/n(HT40)/AC40; 5775MHz for 802.11 AC80;
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/N20/AC20 in the 5180-5240MHz band ; 2 channels for 802.11 N40/AC40 in the 5190-5230MHz band ; 1 channels for 802.11 AC80 in the 5210MHz band ; <input checked="" type="checkbox"/> 5 channels for 802.11a/N20/AC20 in the 5745-5825MHz band ; 2 channels for 802.11 N40/AC40 in the 5755-5795MHz band ; 1 channels for 802.11 AC80 in the 5775MHz band ;
	Antenna Type	FPCB Antenna
	Smart system	<input checked="" type="checkbox"/> SISO for 802.11a <input checked="" type="checkbox"/> SISO for 802.11n/ac
	Antenna Gain	See Table for Filed Antenna
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Ratings	DC 3.8V/3400mAh from Battery or DC 5V from Adapter.	
Adapter	Model:TPA-46050200UU Input:100-240V 50/60Hz 0.3A Output:5V,2000mA	
Battery	DC 3.8V/3400mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11 a/n/ac (20MHz) (5180-5240MHz):

802.11a/n/ac( 20MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11 n /ac (40MHz) (5190-5230MHz):

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)						
42	5210						

Frequency and Channel list for 802.11 a/n/ac (20 MHz) (5745-5825MHz):

802.11a/n/ac( 20 MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac (40MHz) (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel					
Channel	Frequency (MHz)				
155	5775				

The EUT has two types of antenna.

Tx Antenna

Antenna	Antenna Type	Antenna Gain(dBi)	
		2.4G	5.0G
A(main)	FPCB	2	2
B(aux)	FPCB	2	2

Note: The EUT has two types of antenna.

A antenna is transmitted, and B antenna is only aux receive.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 4	802.11 ac80 CH42/CH 155


For Radiated Emission	
Final Test Mode	Description
Mode 1	Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 4	802.11 ac80 CH42/CH 155

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

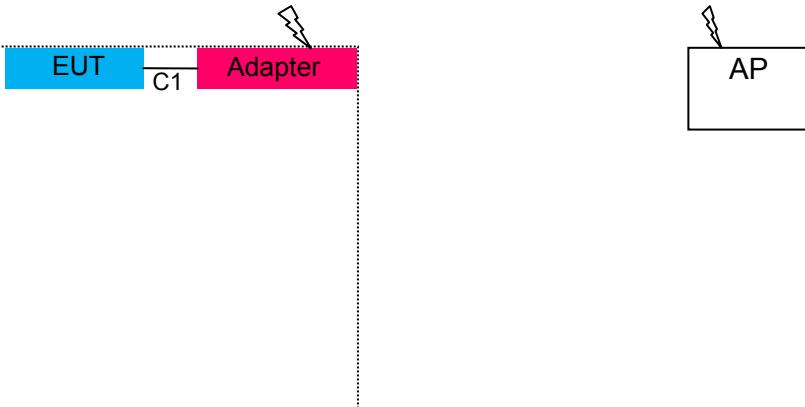

Radiated Spurious Emission Test



For Conducted Test Cases



## 2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.07.06	2017.07.05	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2016.07.06	2017.07.05	1 year
4	Test Receiver	R&S	ESPI	101318	2016.07.06	2017.07.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.07.06	2017.07.05	1 year
7	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.07.06	2017.07.05	1 year
8	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
9	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
10	Amplifier	EM	EM-30180	060538	2016.12.22	2017.12.21	1 year
11	Amplifier	MITEQ	TTA1840-35-HG	177156	2016.07.06	2017.07.05	1 year
12	Loop Antenna	ARA	PLA-1030/B	1029	2016.07.06	2017.07.05	1 year
13	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05	1 year
14	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05	1 year
15	Test Cable	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
16	Test Cable	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year
17	High Test Cable(1G-40 GHz)	N/A	R-03	N/A	2016.07.06	2017.07.05	1 year
18	High Test Cable(1G-40 GHz)	N/A	R-04	N/A	2016.07.06	2017.07.05	1 year

## Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.07.06	2017.07.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.07.06	2017.07.05	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.07.06	2017.07.05	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2016.07.06	2017.07.05	1 year
7	Test Cable	N/A	C01	N/A	2016.06.08	2017.06.07	1 year
8	Test Cable	N/A	C02	N/A	2016.06.08	2017.06.07	1 year
9	Test Cable	N/A	C03	N/A	2016.06.08	2017.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2016.07.06	2017.07.05	1 year
---	-------------	-----	----------	--------	------------	------------	--------

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC/ RSS-247
0.50 -5.0	73.00	60.00	56.00	46.00	FCC/ RSS-247
5.0 -30.0	73.00	60.00	60.00	50.00	FCC/ RSS-247

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

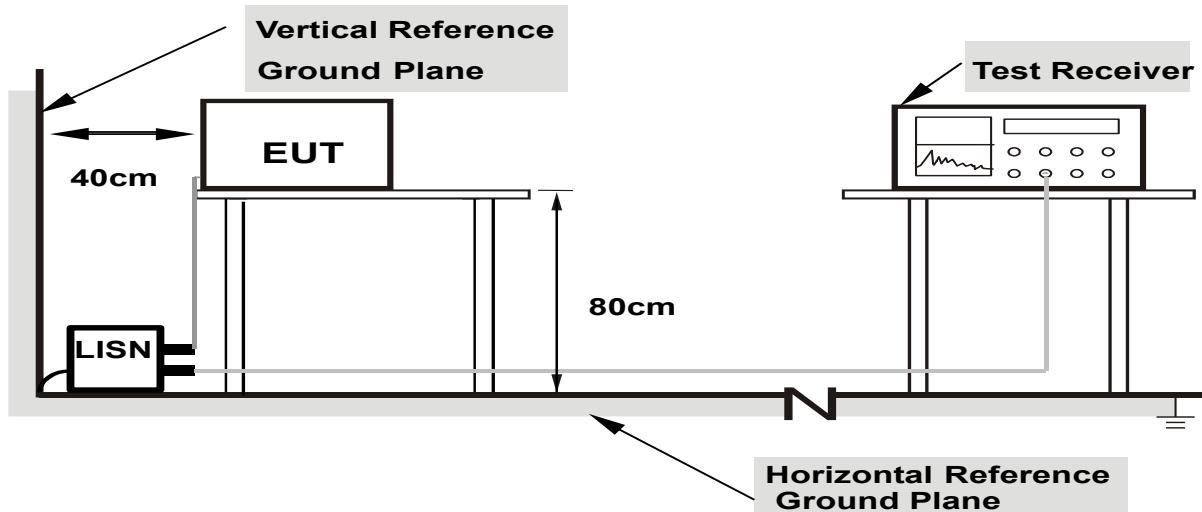

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

EUT :	Tablet PC	Model Name. :	M09GSAT01
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Margin (dB)	Detector Type
0.1859	43.64	10.16	53.8	64.21	-10.41	QP
0.1859	25.71	10.16	35.87	54.21	-18.34	AVG
0.3738	35.99	9.98	45.97	58.41	-12.44	QP
0.3738	12.31	9.98	22.29	48.41	-26.12	AVG
0.9415	36.17	9.76	45.93	56.00	-10.07	QP
0.9415	25.38	9.76	35.14	46.00	-10.86	AVG
1.1334	37.47	9.76	47.23	56	-8.77	QP
1.1334	26.71	9.76	36.47	46	-9.53	AVG
1.322	37.36	9.75	47.11	56	-8.89	QP
1.322	27.5	9.75	37.25	46	-8.75	AVG
2.6979	37.07	9.76	46.83	56	-9.17	QP
2.6979	22.68	9.76	32.44	46.00	-13.56	AVG

#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

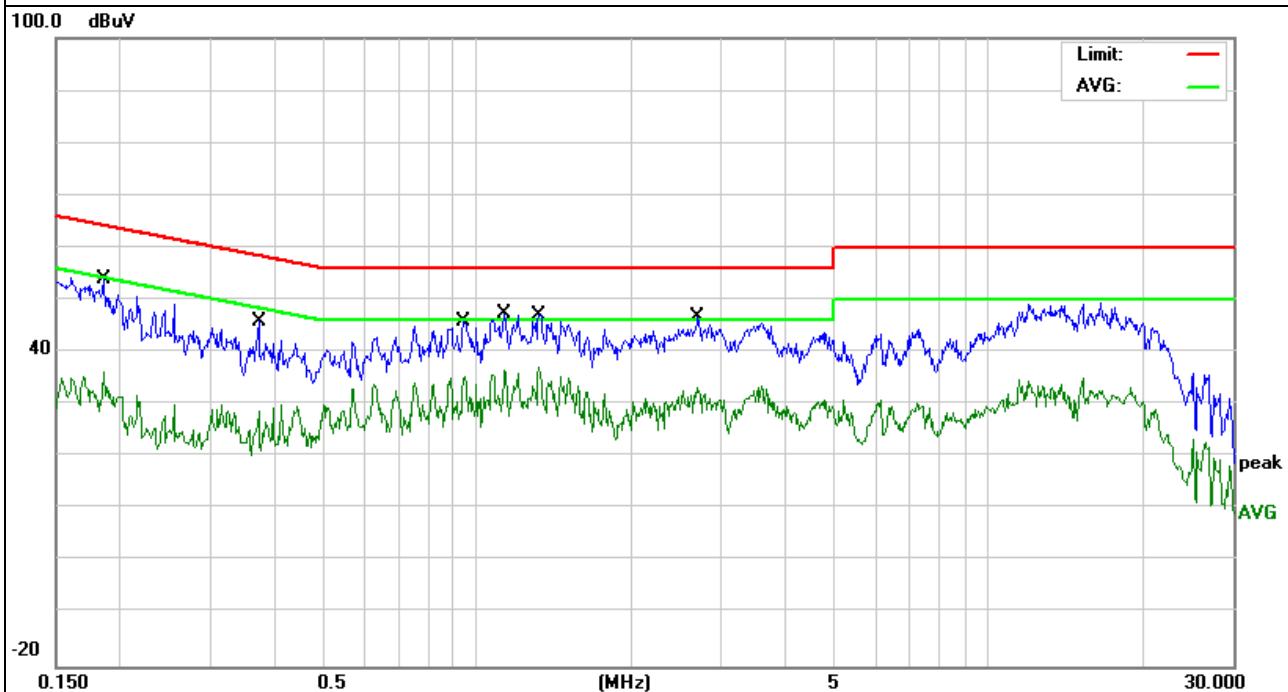


EUT :	Tablet PC	Model Name. :	M09GSAT01
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Margin (dB)	Detector Type
0.1819	45.6	10.1	55.7	64.39	-8.69	
0.1819	24.92	10.1	35.02	54.39	-19.37	AVG
0.26	37.68	10.12	47.8	61.43	-13.63	QP
0.26	15	10.12	25.12	51.43	-26.31	AVG
0.5655	33.75	9.82	43.57	56.00	-12.43	QP
0.5655	23.08	9.82	32.9	46.00	-13.10	AVG
0.9415	35.76	9.76	45.52	56.00	-10.48	QP
0.9415	23.8	9.76	33.56	46.00	-12.44	AVG
1.326	36.99	9.75	46.74	56	-9.26	QP
1.326	27.1	9.75	36.85	46	-9.15	AVG
2.1859	35.62	9.75	45.37	56.00	-10.63	QP
2.1859	20.04	9.75	29.79	46.00	-16.21	AVG

## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

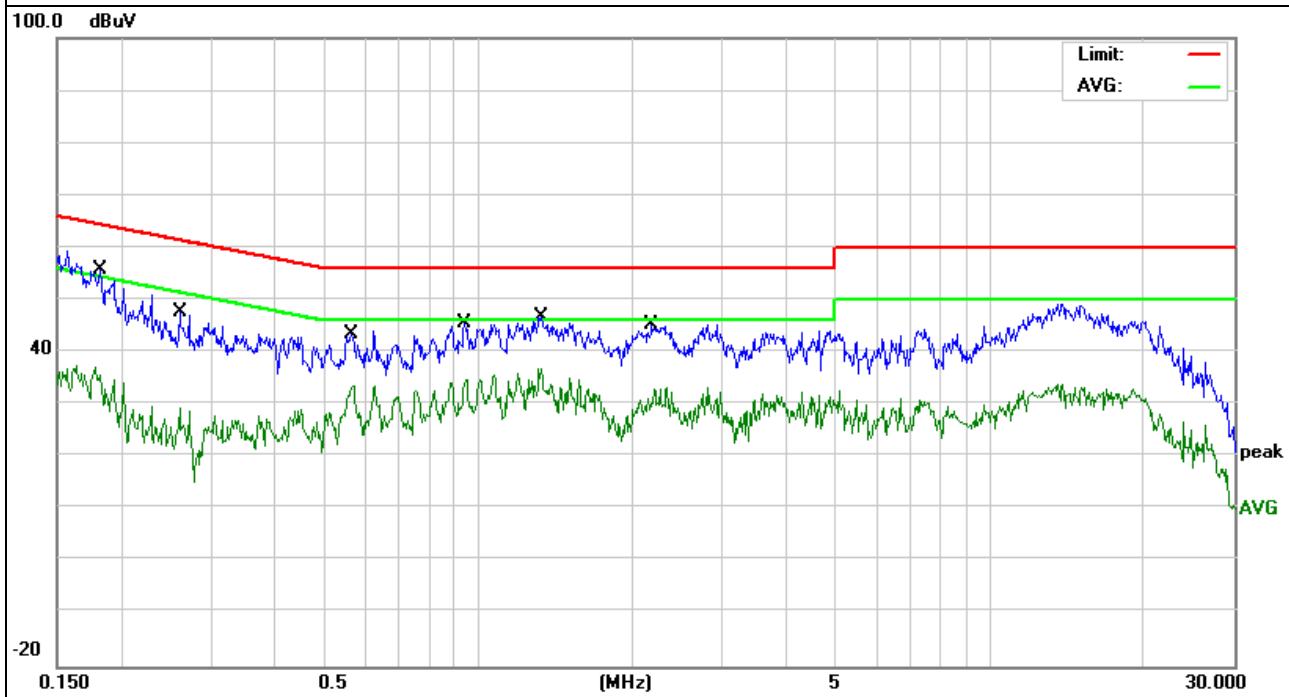


EUT :	Tablet PC	Model Name. :	M09GSAT01
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC240V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Margin (dB)	Detector Type
0.274	39.67	10.13	49.8	60.99	-11.19	
0.274	19.03	10.13	29.16	50.99	-21.83	AVG
0.89	34.79	9.77	44.56	56.00	-11.44	QP
0.89	17.55	9.77	27.32	46.00	-18.68	AVG
1.4536	36.15	9.75	45.9	56.00	-10.10	QP
1.4536	20.82	9.75	30.57	46.00	-15.43	AVG
2.6499	36.04	9.76	45.8	56.00	-10.20	QP
2.6499	21.25	9.76	31.01	46.00	-14.99	AVG
4.7857	34	9.8	43.8	56.00	-12.20	QP
4.7857	21.19	9.8	30.99	46.00	-15.01	AVG
11.6219	37.61	9.89	47.5	60.00	-12.50	QP
11.6219	23.76	9.89	33.65	50.00	-16.35	AVG

### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

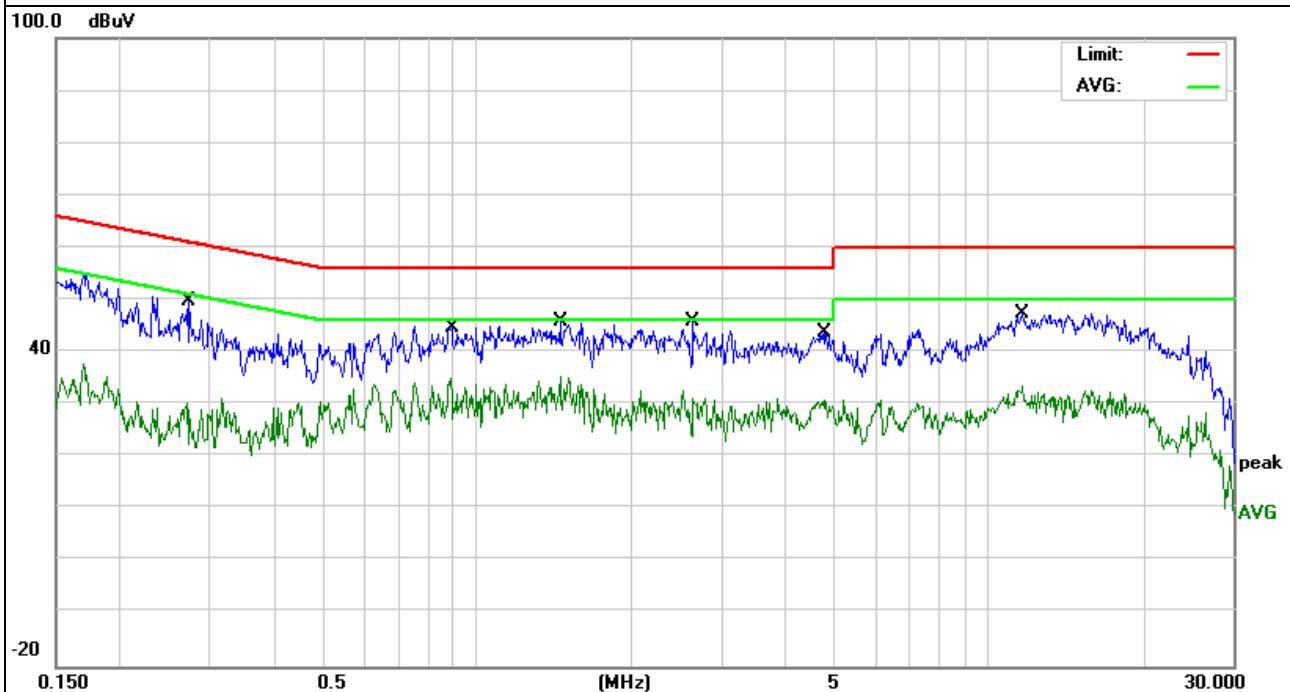


EUT :	Tablet PC	Model Name. :	M09GSAT01
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC240V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Margin (dB)	Detector Type
0.2083	42.07	10.13	52.2	63.27	-11.07	
0.2083	21.41	10.13	31.54	53.27	-21.73	AVG
0.886	35.18	9.77	44.95	56.00	-11.05	QP
0.886	24.3	9.77	34.07	46.00	-11.93	AVG
1.2137	35.94	9.76	45.7	56.00	-10.30	QP
1.2137	24.21	9.76	33.97	46.00	-12.03	AVG
2.1179	35.65	9.75	45.4	56.00	-10.60	QP
2.1179	22.07	9.75	31.82	46.00	-14.18	AVG
2.786	36.83	9.77	46.6	56	-9.4	QP
2.786	23.8	9.77	33.57	46.00	-12.43	AVG
5.0019	36.64	9.81	46.45	60.00	-13.55	QP
5.0019	24.31	9.81	34.12	50.00	-15.88	AVG

## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

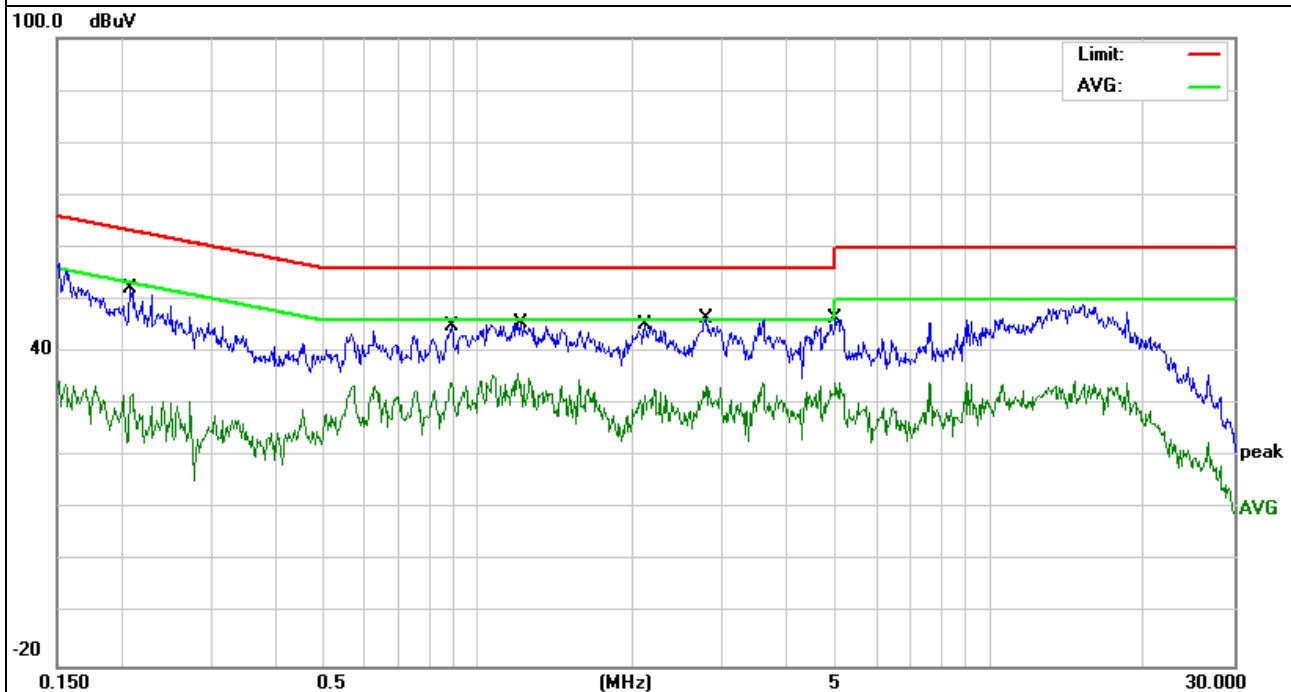

## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log ( $\mu$ V/m)	300
0.490~1.705	2400/F(KHz)	20 log ( $\mu$ V/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dB $\mu$ V/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dB $\mu$ V/m=20 log ( $\mu$ V/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.


3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);  
Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

### 3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

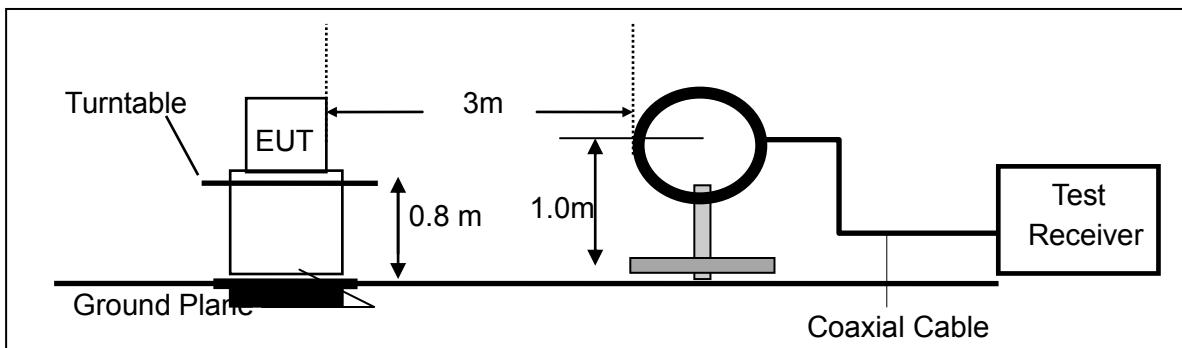

(b) For radiated emissions from 30MHz to 1000MHz

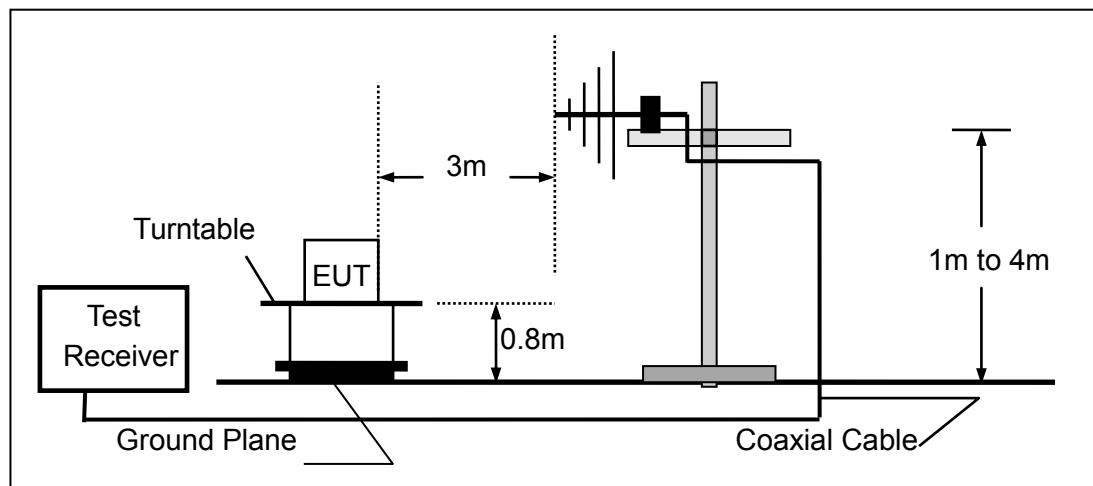

(c) For radiated emissions above 1000MHz

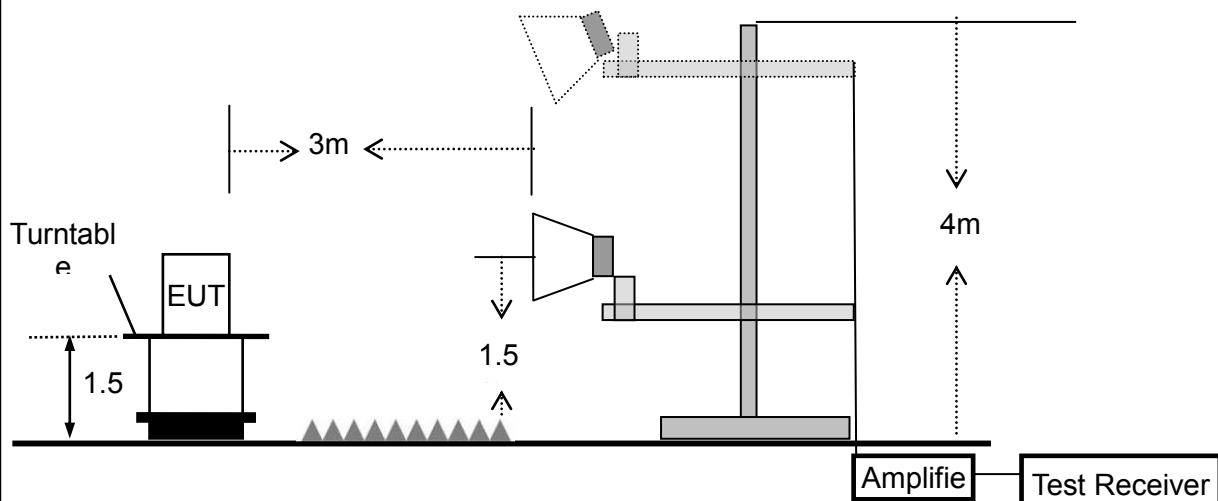

### 3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =  $10 \cdot \lg(100 \text{ [kHz]}/\text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	Tablet PC	Model Name. :	M09GSAT01
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$  (dB);  
Limit line = specific limits(dBuV) + distance extrapolation factor.


### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.2G)- 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	125.0066	17.51	13.62	31.13	43.5	-12.37	QP
V	148.441	17.95	13.04	30.99	43.5	-12.51	QP
V	468.8762	17.25	21.07	38.32	46	-7.68	QP
V	595.1329	14.94	24.58	39.52	46	-6.48	QP
V	742.2587	11.82	27.34	39.16	46	-6.84	QP
V	938.8326	11.01	30.97	41.98	46	-4.02	QP

#### Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

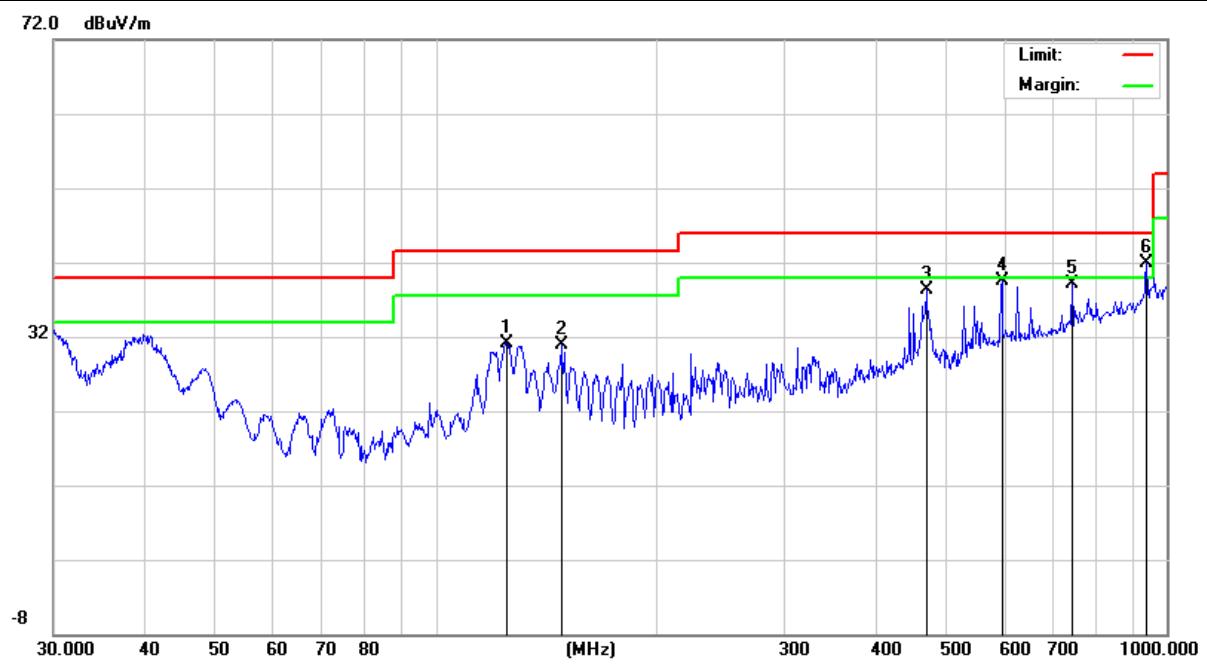

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	150.0108	18.77	13.07	31.84	43.5	-11.66	QP
H	250.3012	16.24	15.34	31.58	46	-14.42	QP
H	300.3672	18.44	16.29	34.73	46	-11.27	QP
H	444.8514	18.13	20.83	38.96	46	-7.04	QP
H	595.1329	17.46	24.58	42.04	46	-3.96	QP
H	742.2587	15.2	27.34	42.54	46	-3.46	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

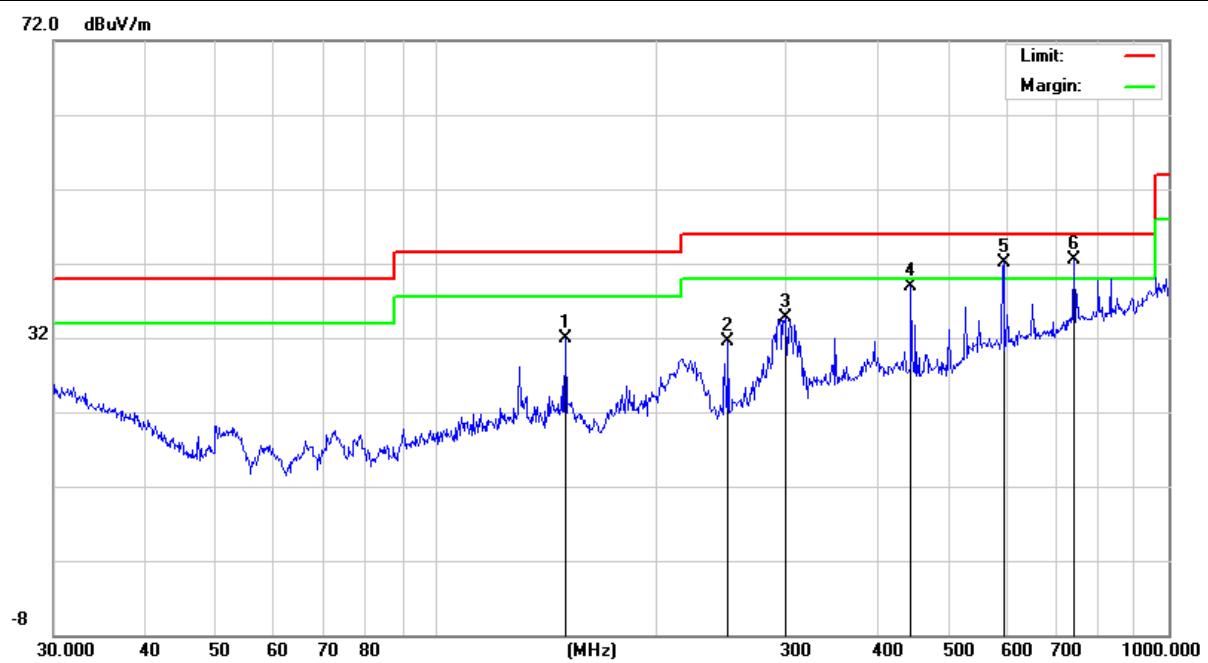


EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.8G) - 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.4448	15.75	18.05	33.8	40	-6.2	QP
V	119.436	16.14	13.8	29.94	43.5	-13.56	QP
V	162.6106	16.49	12.01	28.5	43.5	-15	QP
V	222.1698	15.06	12.34	27.4	46	-18.6	QP
V	462.3455	15.02	21.01	36.03	46	-9.97	QP
V	625.0778	13.76	25.02	38.78	46	-7.22	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

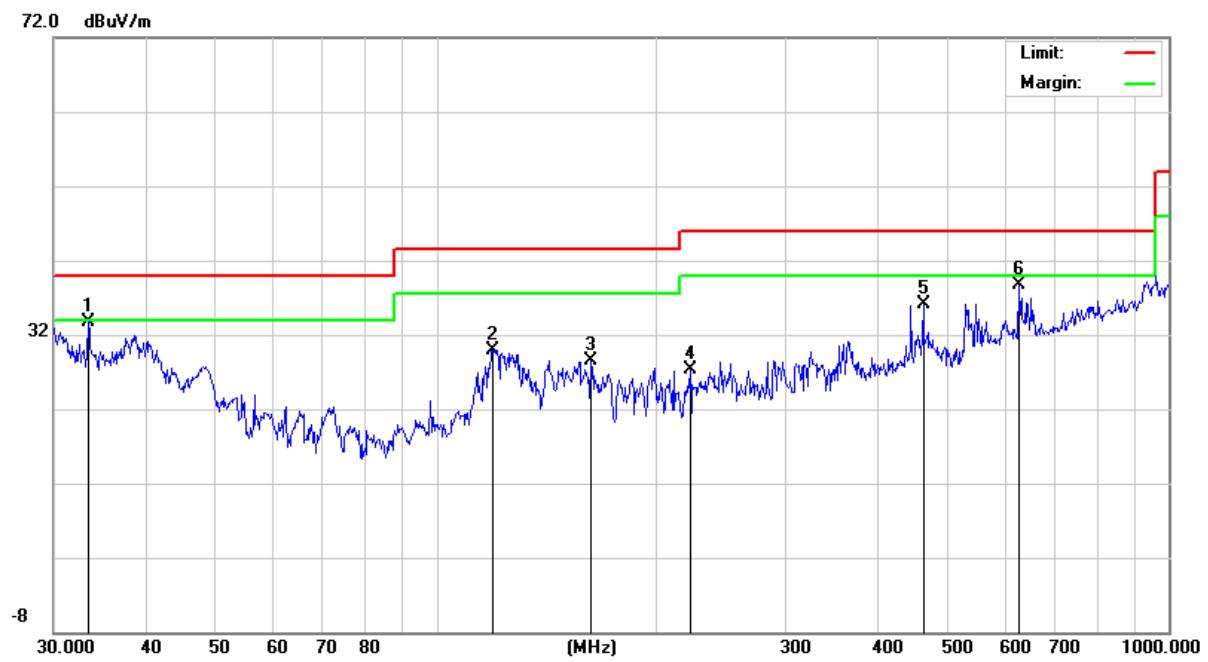

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	150.0107	18.77	13.07	31.84	43.5	-11.66	QP
H	251.1802	14.31	15.39	29.7	46	-16.3	QP
H	312.1792	19.65	16.65	36.3	46	-9.7	QP
H	443.2943	13.89	20.81	34.7	46	-11.3	QP
H	528.2458	12.78	23.36	36.14	46	-9.86	QP
H	833.317	11.19	28.65	39.84	46	-6.16	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

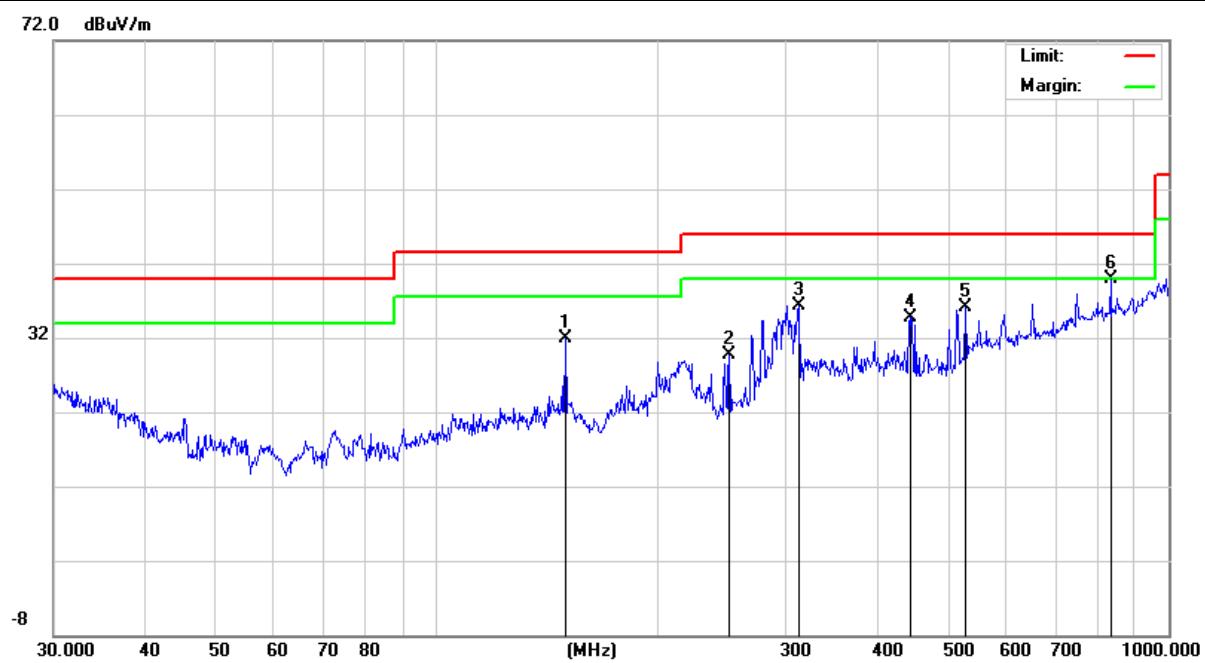

### 3.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G)-802.11N(20) 5180MHz~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.127	54.16	5.94	35.40	44.00	51.5	74.00	-22.5	Pk
Vertical	4434.127	43.27	5.94	35.40	44.00	40.61	54.00	-13.39	AV
Vertical	10370.24	61.04	8.46	39.75	44.50	64.75	74.00	-9.25	Pk
Vertical	10370.24	45.62	8.46	39.75	44.50	49.33	54.00	-4.67	AV
Vertical	15540.12	55.08	10.12	38.80	44.10	59.9	74.00	-14.1	Pk
Vertical	15540.12	41.67	10.12	38.80	42.70	47.89	54.00	-6.11	AV
Horizontal	4434.238	57.61	5.94	35.18	44.00	54.73	74.00	-19.27	Pk
Horizontal	4434.238	42.19	5.94	35.18	44.00	39.31	54.00	-14.69	AV
Horizontal	10370.12	60.34	8.46	38.71	44.50	63.01	74.00	-10.99	Pk
Horizontal	10730.12	46.26	8.46	38.71	44.50	48.93	54.00	-5.07	AV
Horizontal	15540.28	56.15	10.12	38.38	44.10	60.55	74.00	-13.45	Pk
Horizontal	15540.28	41.97	10.12	38.38	44.10	46.37	54.00	-7.63	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.232	56.33	6.48	36.35	44.05	55.11	74.00	-18.89	Pk
Vertical	4592.232	41.64	6.48	36.35	44.05	40.42	54.00	-13.58	AV
Vertical	10401.22	60.35	8.47	37.88	44.51	62.19	74.00	-11.81	Pk
Vertical	10401.22	45.15	8.47	37.88	44.51	46.99	54.00	-7.01	AV
Vertical	15600.17	56.21	10.12	38.8	44.10	61.03	74.00	-12.97	Pk
Vertical	15600.17	41.82	10.12	38.8	42.70	48.04	54.00	-5.96	AV
Horizontal	4592.416	58.61	6.48	36.37	44.05	57.41	74.00	-16.59	Pk
Horizontal	4592.416	41.21	6.48	36.37	44.05	40.01	54.00	-13.99	AV
Horizontal	10400.16	60.38	8.47	38.64	44.50	62.99	74.00	-11.01	Pk
Horizontal	10400.16	46.19	8.47	38.64	44.50	48.8	54.00	-5.2	AV
Horizontal	15600.18	57.32	10.12	38.38	44.10	61.72	74.00	-12.28	Pk
Horizontal	15600.18	41.82	10.12	38.38	44.10	46.22	54.00	-7.78	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.218	58.13	7.10	37.24	43.50	58.97	74.00	-15.03	Pk
Vertical	4739.218	45.17	7.10	37.24	43.50	46.01	54.00	-7.99	AV
Vertical	10480.27	60.31	8.46	37.68	44.50	61.95	74.00	-12.05	Pk
Vertical	10480.27	45.18	8.46	37.68	44.50	46.82	54.00	-7.18	AV
Vertical	15720.13	57.04	10.12	38.8	44.10	61.86	74.00	-12.14	Pk
Vertical	15720.13	42.1	10.12	38.8	42.70	48.32	54.00	-5.68	AV
Horizontal	4739.154	58.61	7.10	37.24	43.50	59.45	74.00	-14.55	Pk
Horizontal	4739.154	43.11	7.10	37.24	43.50	43.95	54.00	-10.05	AV
Horizontal	10481.62	57.81	8.46	38.57	44.50	60.34	74.00	-13.66	Pk
Horizontal	10481.62	42.16	8.46	38.57	44.50	44.69	54.00	-9.31	AV
Horizontal	15720.25	56.24	10.12	38.38	44.10	60.64	74.00	-13.36	Pk
Horizontal	15720.25	41.08	10.12	38.38	44.10	45.48	54.00	-8.52	AV

Note: "802.11N(20)(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.8G) -802.11N(20) 5745MHz~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.138	52.13	5.94	35.40	44.00	49.47	74.00	-24.53	Pk
Vertical	4679.138	45.59	5.94	35.40	44.00	42.93	54.00	-11.07	AV
Vertical	11490.227	60.67	8.46	39.75	44.50	64.38	74.00	-9.62	Pk
Vertical	11490.227	44.15	8.46	39.75	44.50	47.86	54.00	-6.14	AV
Vertical	17235.439	56.84	10.12	38.80	44.10	61.66	74.00	-12.34	Pk
Vertical	17235.439	40.26	10.12	38.80	42.70	46.48	54.00	-7.52	AV
Horizontal	4679.129	57.51	5.94	35.18	44.00	54.63	74.00	-19.37	Pk
Horizontal	4679.129	44.18	5.94	35.18	44.00	41.3	54.00	-12.7	AV
Horizontal	11490.124	59.86	8.46	38.71	44.50	62.53	74.00	-11.47	Pk
Horizontal	11490.124	44.31	8.46	38.71	44.50	46.98	54.00	-7.02	AV
Horizontal	17235.439	58.16	10.12	38.38	44.10	62.56	74.00	-11.44	Pk
Horizontal	17235.439	42.86	10.12	38.38	44.10	47.26	54.00	-6.74	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.201	58.64	6.48	36.35	44.05	57.42	74.00	-16.58	Pk
Vertical	4592.201	43.18	6.48	36.35	44.05	41.96	54.00	-12.04	AV
Vertical	11570.199	59.85	8.47	37.88	44.51	61.69	74.00	-12.31	Pk
Vertical	11570.199	43.85	8.47	37.88	44.51	45.69	54.00	-8.31	AV
Vertical	17355.128	57.18	10.12	38.8	44.10	62	74.00	-12	Pk
Vertical	17355.128	40.16	10.12	38.8	42.70	46.38	54.00	-7.62	AV
Horizontal	4592.587	59.88	6.48	36.37	44.05	58.68	74.00	-15.32	Pk
Horizontal	4592.587	43.27	6.48	36.37	44.05	42.07	54.00	-11.93	AV
Horizontal	11570.154	60.56	8.47	38.64	44.50	63.17	74.00	-10.83	Pk
Horizontal	11570.154	46.26	8.47	38.64	44.50	48.87	54.00	-5.13	AV
Horizontal	17355.263	59.86	10.12	38.38	44.10	64.26	74.00	-9.74	Pk
Horizontal	17355.263	44.31	10.12	38.38	44.10	48.71	54.00	-5.29	AV
High Channel (5825 MHz)-Above 1G									
Vertical	5039.235	58.96	7.10	37.24	43.50	59.8	74.00	-14.2	Pk
Vertical	5039.235	46.62	7.10	37.24	43.50	47.46	54.00	-6.54	AV
Vertical	11650.838	55.53	8.46	37.68	44.50	57.17	74.00	-16.83	Pk
Vertical	11650.838	42.27	8.46	37.68	44.50	43.91	54.00	-10.09	AV
Vertical	17475.128	59.86	10.12	38.8	44.10	64.68	74.00	-9.32	Pk
Vertical	17475.128	39.97	10.12	38.8	42.70	46.19	54.00	-7.81	AV
Horizontal	5039.101	66.69	7.10	37.24	43.50	67.53	74.00	-6.47	Pk
Horizontal	5039.101	42.2	7.10	37.24	43.50	43.04	54.00	-10.96	AV
Horizontal	11650.283	56.63	8.46	38.57	44.50	59.16	74.00	-14.84	Pk
Horizontal	11650.283	43.77	8.46	38.57	44.50	46.3	54.00	-7.7	AV
Horizontal	17475.103	59.86	10.12	38.38	44.10	64.26	74.00	-9.74	Pk
Horizontal	17475.103	44.31	10.12	38.38	44.10	48.71	54.00	-5.29	AV

Note: "802.11N(20)(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## TEST RESULTS (18GHz-40GHz)


EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G)-802.11N(20) 5180MHz~5240MHz , TX (5.8G) -802.11N(20) 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:

Channel (5180 MHz) 18-26.5G


Horizontal

FCC Electric Field Strength 18-26.5GHz

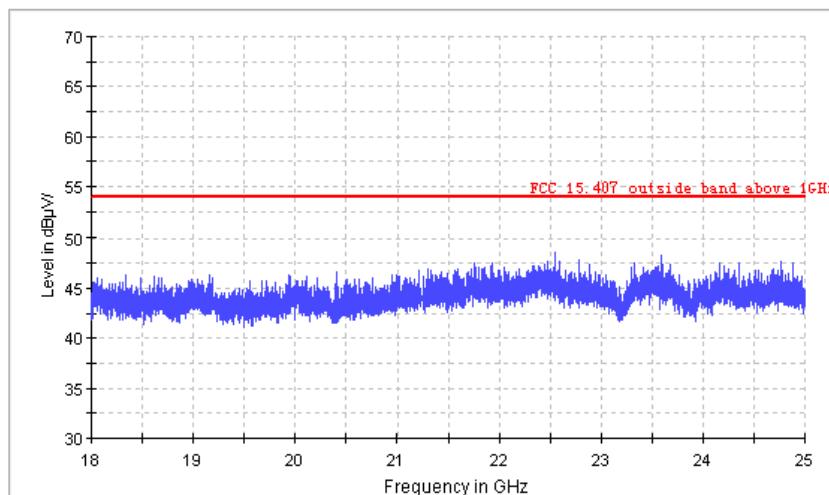

Vertical


FCC Electric Field Strength 18-26.5GHz

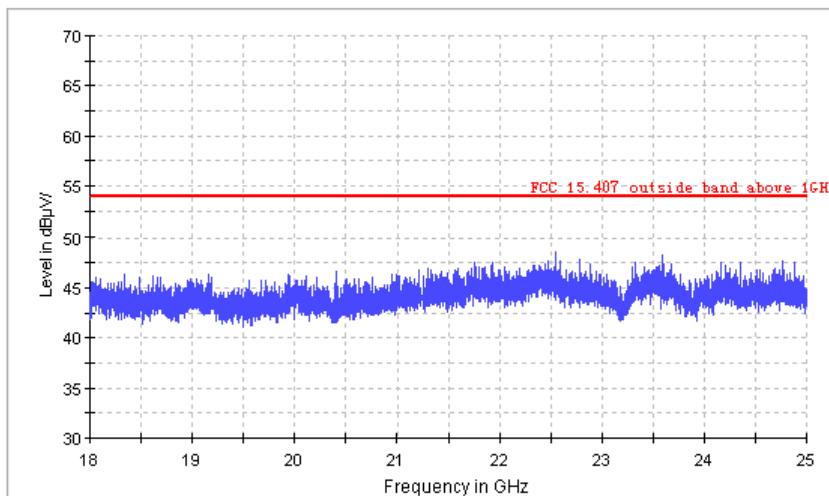

## Channel (5180 MHz) 26.5-40G


Horizontal

FCC Electric Field Strength 26.5-40GHz

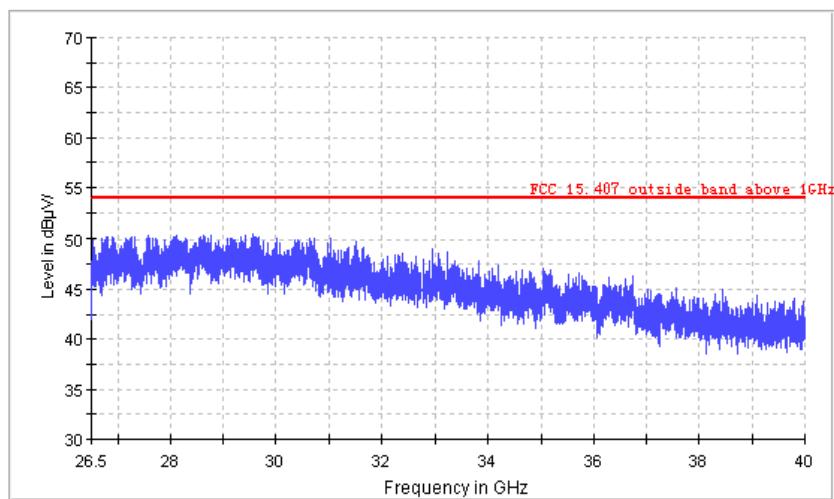

Vertical


FCC Electric Field Strength 26.5-40GHz

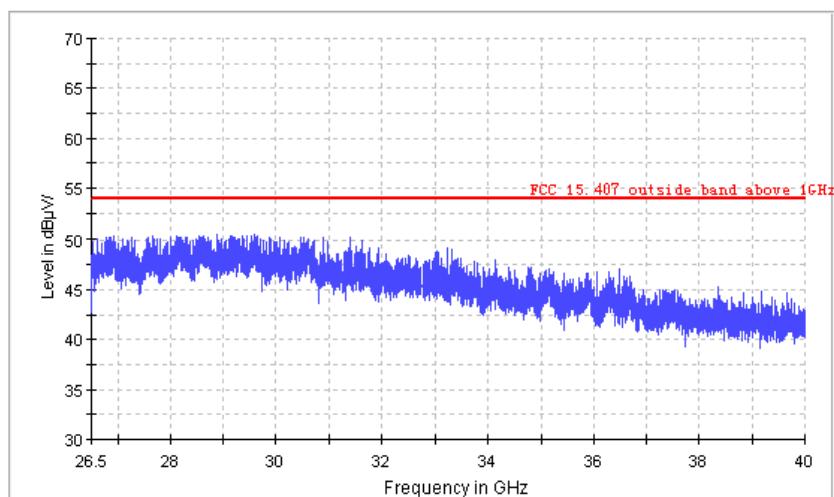

## Channel (5745 MHz) 18-26.5G


Horizontal

FCC Electric Field Strength 18-26.5GHz

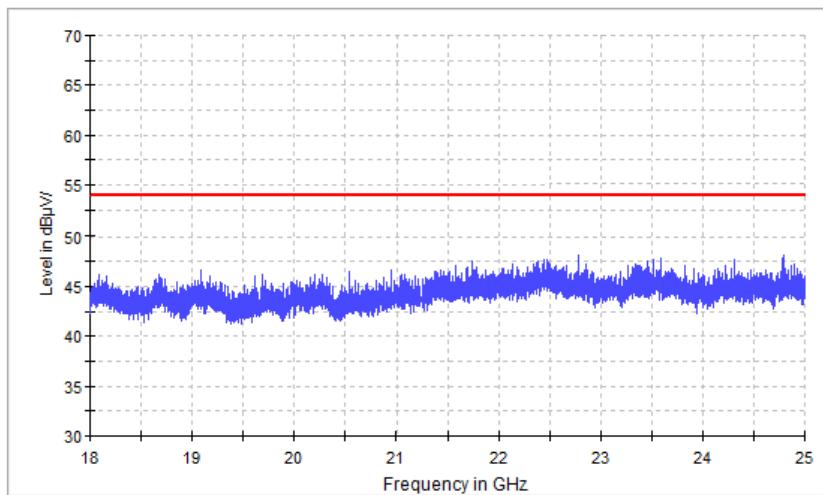

Vertical


FCC Electric Field Strength 18-26.5GHz

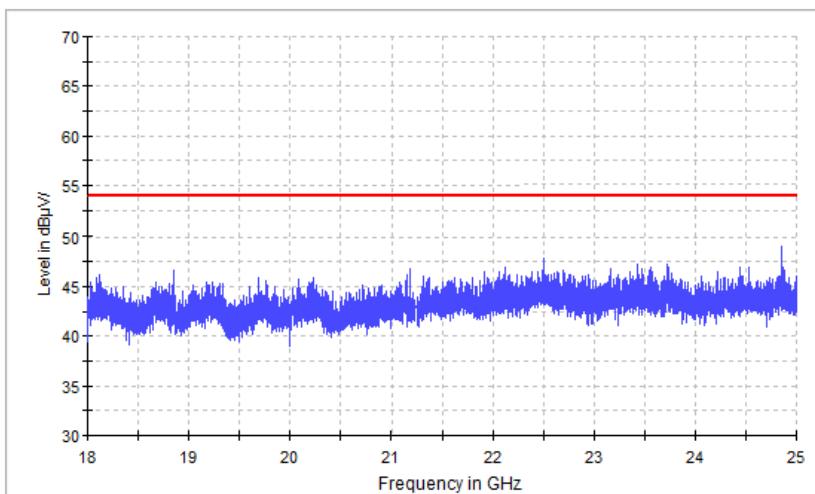

## Channel (5745 MHz) 26.5-40G


Horizontal

FCC Electric Field Strength 26.5-40GHz

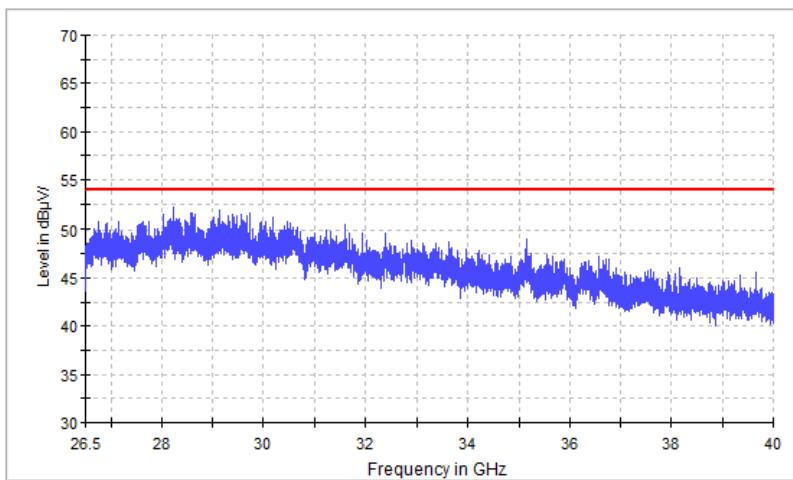

Vertical

FCC Electric Field Strength 26.5-40GHz

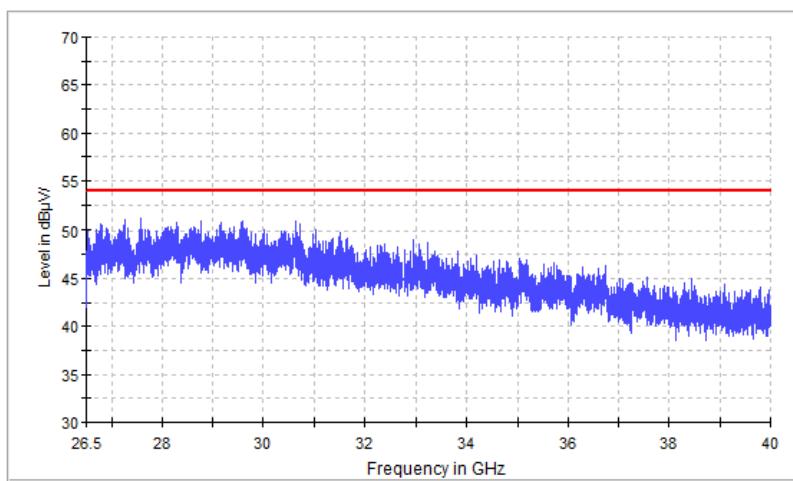

## 4. POWER SPECTRAL DENSITY TEST

### 4.1 APPLIED PROCEDURES / LIMIT

#### According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

## 4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW  $\geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set VBW  $\geq 3$  RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/\text{RBW})$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

## 4.3 DEVIATION FROM STANDARD

No deviation.

## 4.4 TEST SETUP



## 4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.6 TEST RESULTS**


EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency (5150-5250MHz)		

Mode	Frequency	Measured Power Density (dBm)	Limit (dBm)	Result
802.11 a	5185 MHz	7.855	11	PASS
	5200 MHz	8.046	11	PASS
	5240 MHz	7.538	11	PASS
802.11 n20	5185 MHz	4.556	11	PASS
	5200 MHz	4.663	11	PASS
	5240 MHz	5.864	11	PASS
802.11 n40	5190 MHz	1.982	11	PASS
	5230 MHz	1.915	11	PASS
802.11 AC20	5185 MHz	4.802	11	PASS
	5200 MHz	4.390	11	PASS
	5240 MHz	3.877	11	PASS
802.11 AC40	5190 MHz	2.133	11	PASS
	5230 MHz	1.694	11	PASS
802.11 AC80	5210 MHz	-0.097	11	PASS

Note: 1. Calculate power density= Measured Power Density+10log(1MHz/RBW)

RBW=1MHz


(802.11a) PSD plot on channel 36

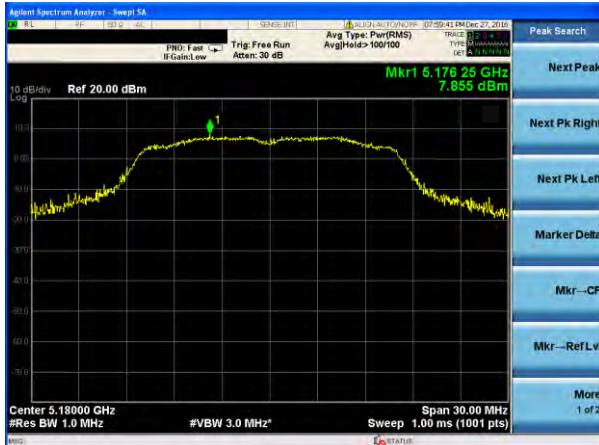

(802.11n20) PSD plot on channel 36




(802.11a) PSD plot on channel 40

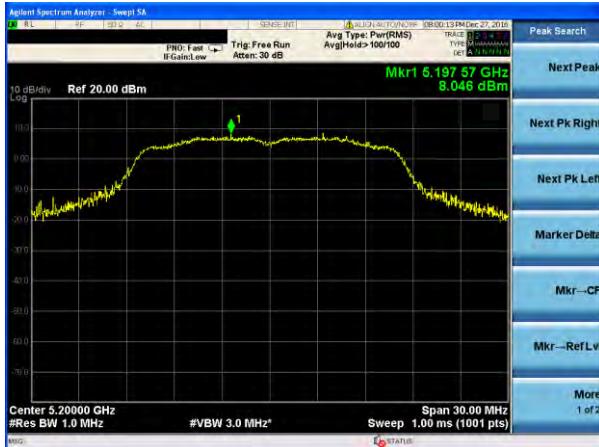

(802.11n20) PSD plot on channel 40



(802.11a) PSD plot on channel 48

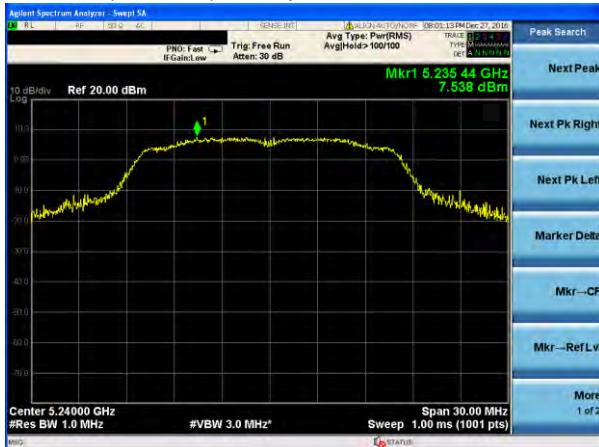

(802.11n20) PSD plot on channel 48



(802.11n40) PSD plot on channel 38



(802.11ac20) PSD plot on channel 36



(802.11n40) PSD plot on channel 46



(802.11ac20) PSD plot on channel 40



(802.11ac20) PSD plot on channel 48



(802.11ac40) PSD plot on channel 38



(802.11ac80) PSD plot on channel 42



(802.11ac40) PSD plot on channel 46



EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency (5725-5825MHz)		

Mode	Frequency	Measured Power Density(dBm)	Limit (dBm)	Result
		ANT A		
802.11 a	5745 MHz	5.616	30	PASS
	5785 MHz	6.228	30	PASS
	5825 MHz	6.797	30	PASS
802.11 n20	5745 MHz	1.758	30	PASS
	5785 MHz	1.916	30	PASS
	5825 MHz	3.135	30	PASS
802.11 n40	5755 MHz	-1.583	30	PASS
	5795 MHz	-0.866	30	PASS
802.11 AC20	5745 MHz	1.658	30	PASS
	5785 MHz	1.568	30	PASS
	5825 MHz	3.655	30	PASS
802.11 AC40	5755 MHz	-1.384	30	PASS
	5795 MHz	-1.083	30	PASS
802.11 AC80	5775 MHz	-4.606	30	PASS

Note:


(1) Calculate power density= Measured Power Density+10log(1MHz/RBW)

RBW=0.51MHz

(802.11a) PSD plot on channel 149




(802.11n20) PSD plot on channel 149

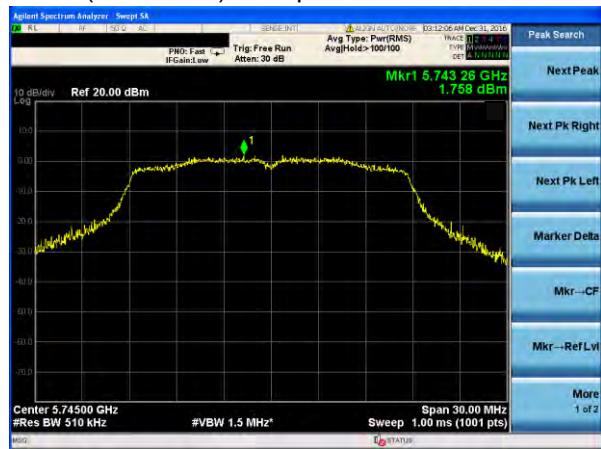

(802.11a) PSD plot on channel 157



(802.11n20) PSD plot on channel 157

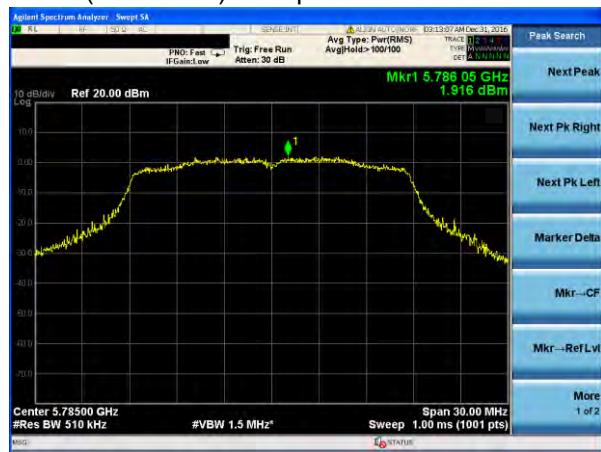

(802.11a) PSD plot on channel 165



(802.11n20) PSD plot on channel 165



### (802.11n40) PSD plot on channel 151



### (802.11ac20) PSD plot on channel 149




## (802.11n40) PSD plot on channel 159



## (802.11ac20) PSD plot on channel 157



## (802.11ac20) PSD plot on channel 165

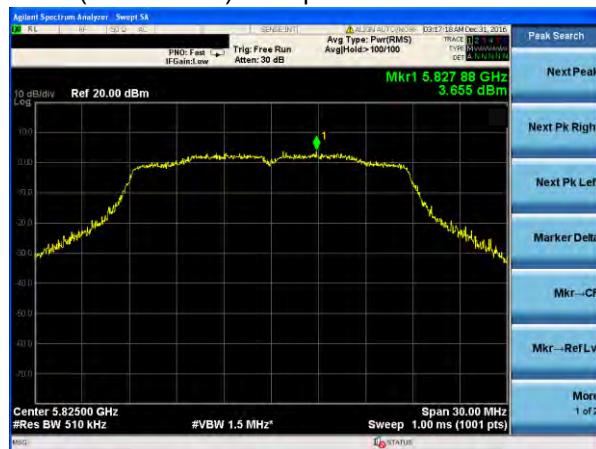

(802.11ac40) PSD plot on channel 151



(802.11ac80) PSD plot on channel 155



(802.11ac40) PSD plot on channel 159



## 5. 26 DB & 99% EMISSION BANDWIDTH

### 5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 5.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

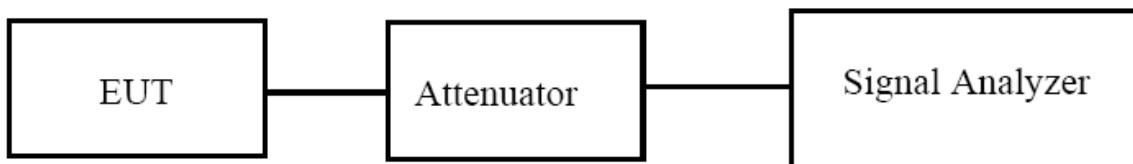

### **5.3 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.4 TEST RESULTS

EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency (5150-5250MHz)		

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth( MHz)	Result
802.11a	CH36	5180	21.289	30.00	Pass
	CH40	5200	18.193	29.96	Pass
	CH48	5240	18.196	29.58	Pass
802.11 n20	CH36	5180	17.802	24.24	Pass
	CH40	5200	17.814	24.15	Pass
	CH48	5240	17.810	23.06	Pass
802.11 n40	CH 38	5190	36.025	41.55	Pass
	CH 46	5230	36.031	41.06	Pass
802.11 AC20	CH36	5180	17.808	23.45	Pass
	CH40	5200	17.776	23.62	Pass
	CH48	5240	17.798	22.56	Pass
802.11 AC40	CH 38	5190	35.962	43.00	Pass
	CH 46	5230	35.991	41.91	Pass
802.11 AC80	CH 42	5210	75.522	100.0	Pass

(802.11a) -26dB&amp;99% Bandwidth plot on channel 36

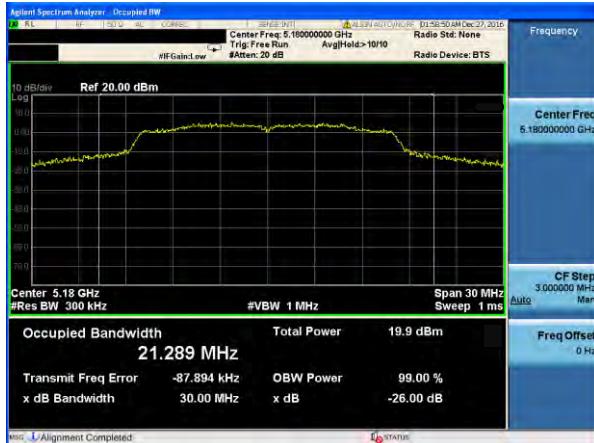

(802.11n20) -26dB&amp;99% Bandwidth plot on channel 36



(802.11a) -26dB&amp;99% Bandwidth plot on channel 40



(802.11n20) -26dB&amp;99% Bandwidth plot on channel 40



(802.11a) -26dB&amp;99% Bandwidth plot on channel 48




(802.11n20) -26dB&amp;99% Bandwidth plot on channel 48



(802.11n40) -26dB&amp;99% Bandwidth plot on channel 38




(802.11ac20) -26dB&amp;99% Bandwidth plot on channel 36

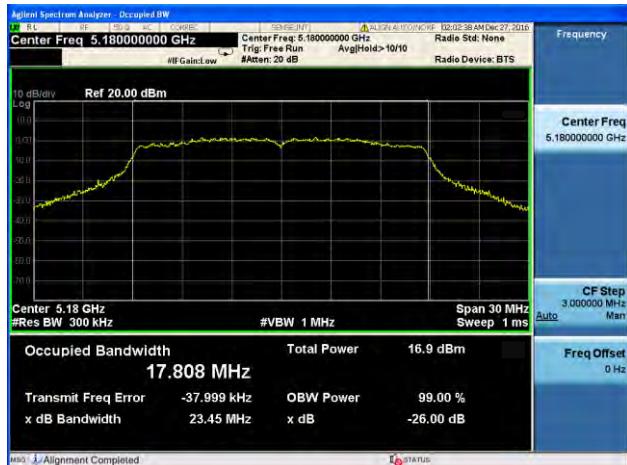

(802.11n40) -26dB&amp;99% Bandwidth plot on channel 46



(802.11ac20) -26dB&amp;99% Bandwidth plot on channel 40

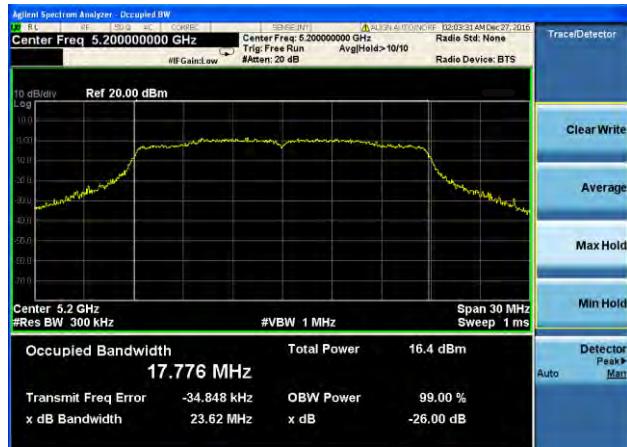

(802.11ac20) -26dB&amp;99% Bandwidth plot on channel 48



(802.11ac40) -26dB&amp;99% Bandwidth plot on channel 38



(802.11ac80) -26dB&amp;99% Bandwidth plot on channel 42



(802.11ac40) -26dB&amp;99% Bandwidth plot on channel 46



EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency (5745-5850MHz)		

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Result
802.11a	CH149	5745	16.588	23.08	Pass
	CH157	5785	16.568	22.02	Pass
	CH165	5825	16.615	23.09	Pass
802.11 n20	CH149	5745	17.748	24.22	Pass
	CH157	5785	17.734	23.90	Pass
	CH165	5825	17.725	24.40	Pass
802.11 n40	CH151	5755	36.025	42.60	Pass
	CH159	5795	36.009	40.93	Pass
802.11 AC20	CH149	5745	17.820	25.60	Pass
	CH157	5785	17.724	23.30	Pass
	CH165	5825	17.751	23.00	Pass
802.11 AC40	CH151	5755	35.994	42.80	Pass
	CH159	5795	35.973	42.30	Pass
802.11 AC80	CH155	5775	75.669	99.25	Pass

(802.11a) -26dB&amp;99% Bandwidth plot on channel 149




(802.11n20) -26dB&amp;99% Bandwidth plot on channel 149



(802.11a) -26dB&amp;99% Bandwidth plot on channel 157



(802.11n20) -26dB&amp;99% Bandwidth plot on channel 157

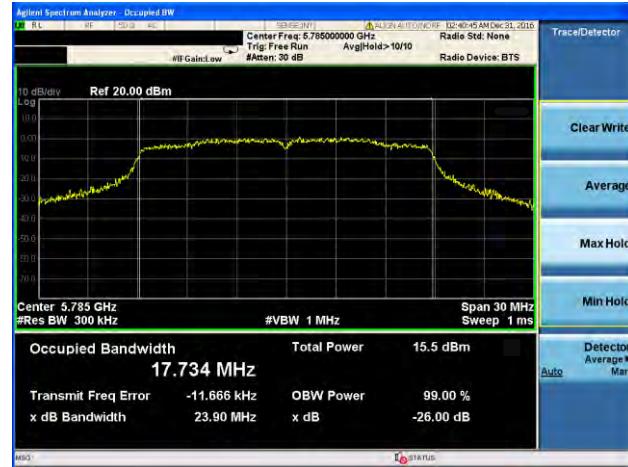


(802.11a) -26dB&amp;99% Bandwidth plot on channel 165



(802.11n20) -26dB&amp;99% Bandwidth plot on channel 165




(802.11n40) -26dB&amp;99% Bandwidth plot on channel 151

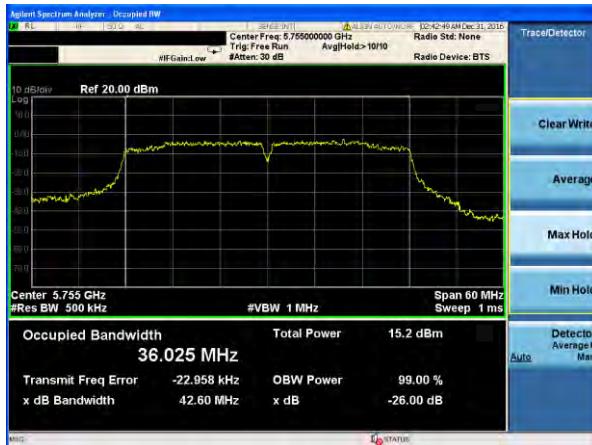

(802.11ac20) -26dB&amp;99% Bandwidth plot on channel 149



(802.11n40) -26dB&amp;99% Bandwidth plot on channel 159

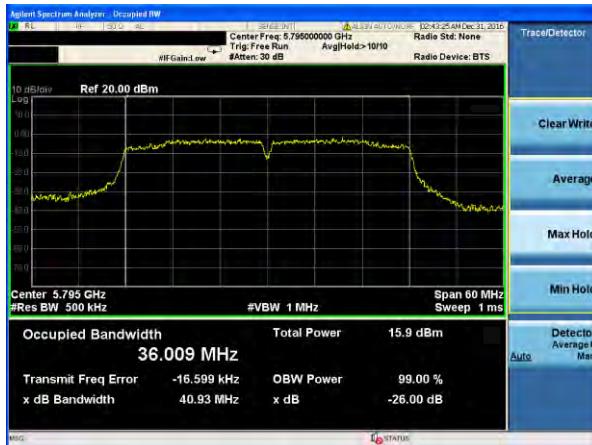


(802.11ac20) -26dB&amp;99% Bandwidth plot on channel 157




(802.11ac20) -26dB&amp;99% Bandwidth plot on channel 165




## (802.11ac40) -26dB&99% Bandwidth plot on channel 151

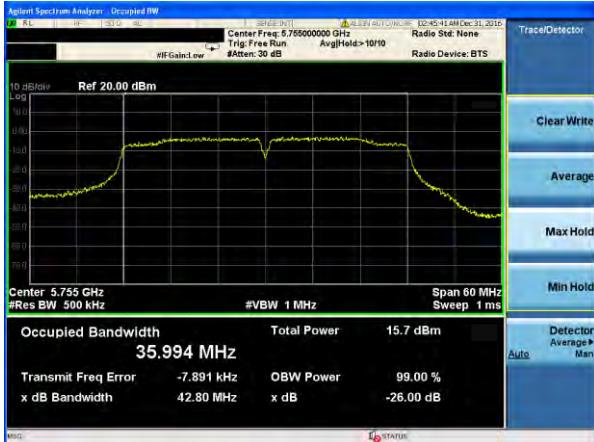

## (802.11ac80) -26dB&99% Bandwidth plot on channel 155

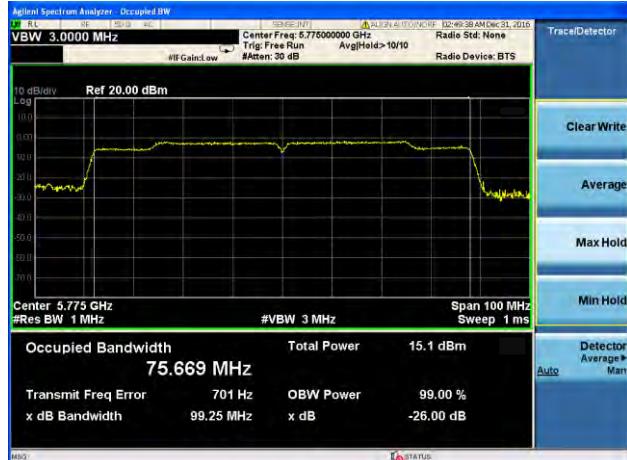

### (802.11ac40) -26dB&99% Bandwidth plot on channel 159

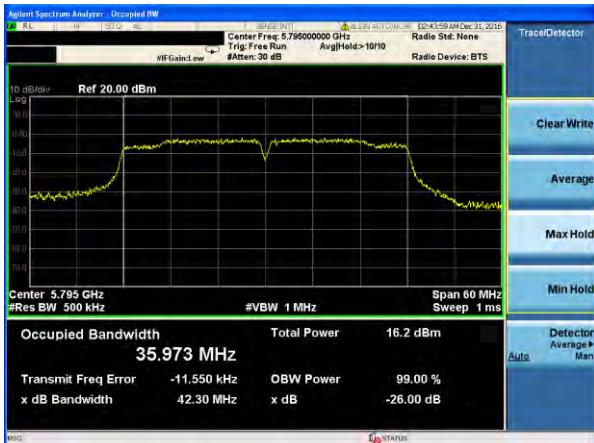

## 6. MINIMUM 6 DB BANDWIDTH

### 6.1 APPLIED PROCEDURES / LIMIT

#### According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 6.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

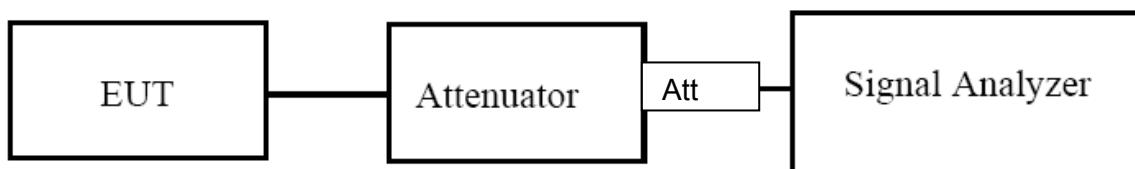

### 6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 6.6 TEST RESULTS


EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency (5150-5250MHz)		

Mode	Channel	Frequency (MHz)	-6dB bandwidth(MHz)	Result
802.11a	CH36	5180	15.12	Pass
	CH40	5200	15.13	Pass
	CH48	5240	15.13	Pass
802.11 n20	CH36	5180	15.12	Pass
	CH40	5200	15.69	Pass
	CH48	5240	15.10	Pass
802.11 n40	CH 38	5190	35.12	Pass
	CH 46	5230	35.12	Pass
802.11 AC20	CH36	5180	16.62	Pass
	CH40	5200	15.13	Pass
	CH48	5240	15.10	Pass
802.11 AC40	CH 38	5190	35.12	Pass
	CH 46	5230	35.13	Pass
802.11 AC80	CH 42	5210	76.17	Pass

(802.11a) -6dB Bandwidth plot on channel 36

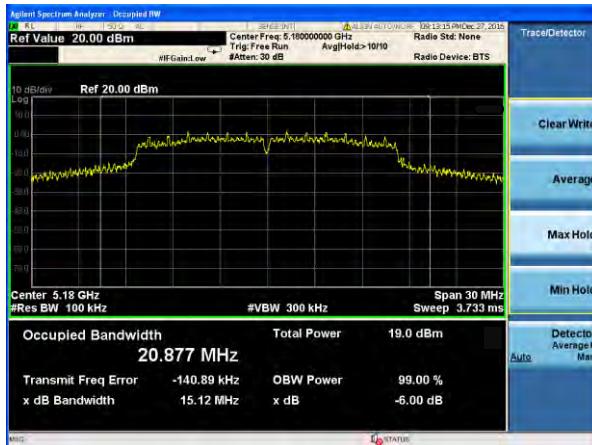


(802.11n20) -6dB Bandwidth plot on channel 36

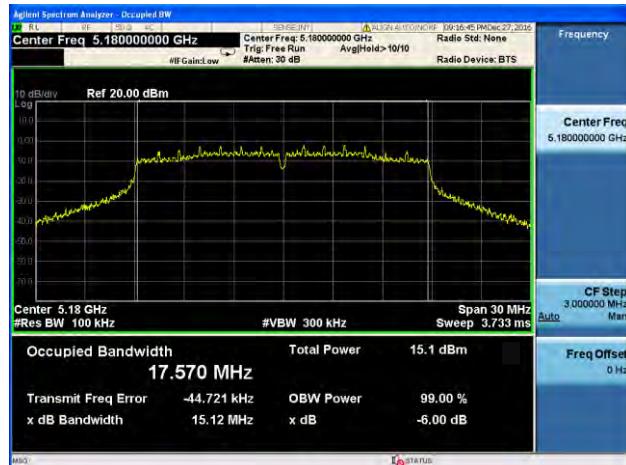

(802.11a) -6dB Bandwidth plot on channel 40



(802.11n20) -6dB Bandwidth plot on channel 40

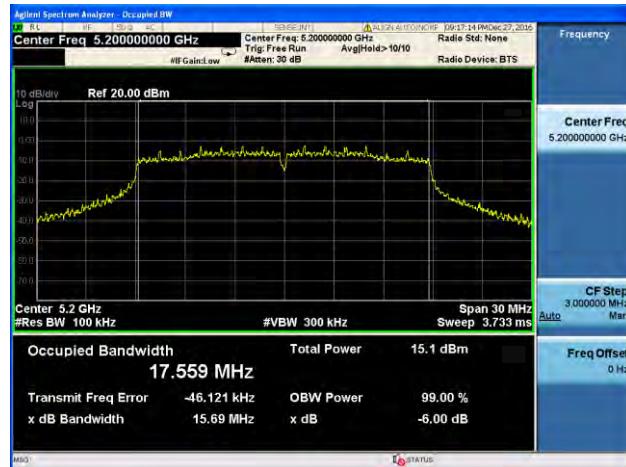


(802.11a) -6dB Bandwidth plot on channel 48




(802.11n20) -6dB Bandwidth plot on channel 48




(802.11n40) -6dB Bandwidth plot on channel 38

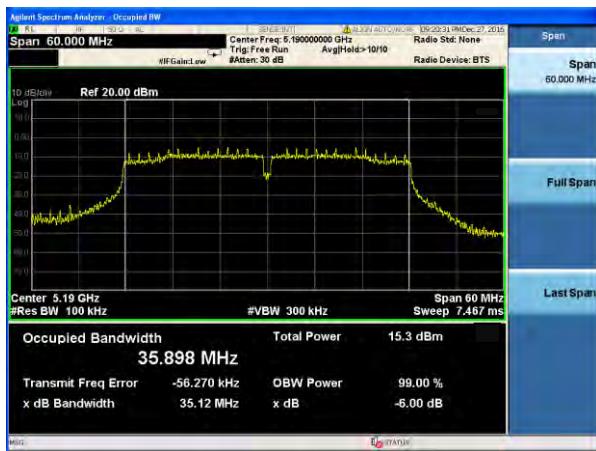

(802.11ac20) -6dB Bandwidth plot on channel 36

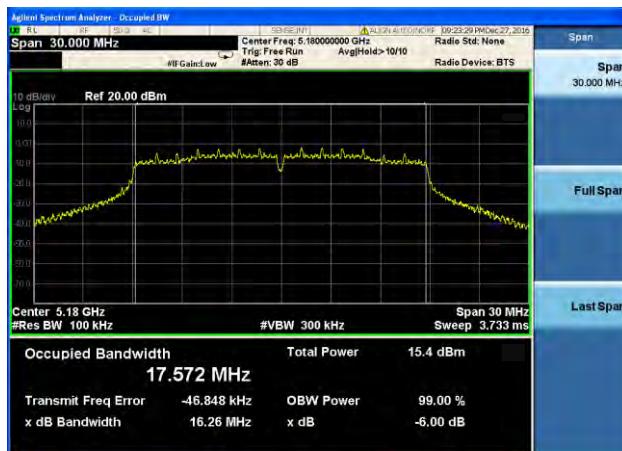


(802.11n40) -6dB Bandwidth plot on channel 46

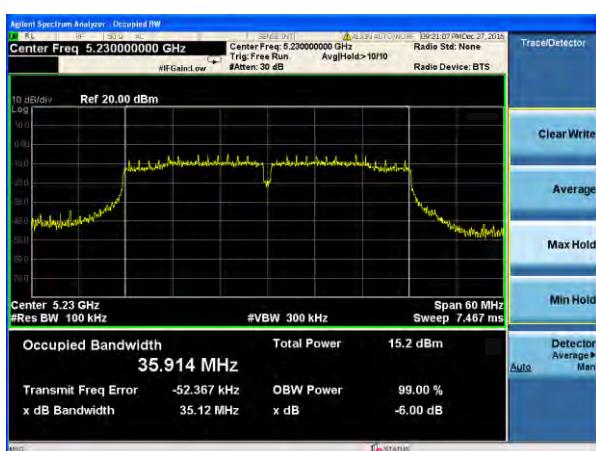


(802.11ac20) -6dB Bandwidth plot on channel 40



(802.11ac20) -6dB Bandwidth plot on channel 48

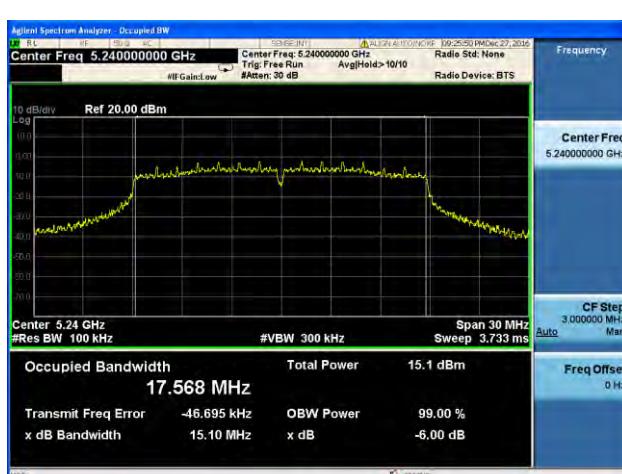


(802.11ac40) -6dB Bandwidth plot on channel 38

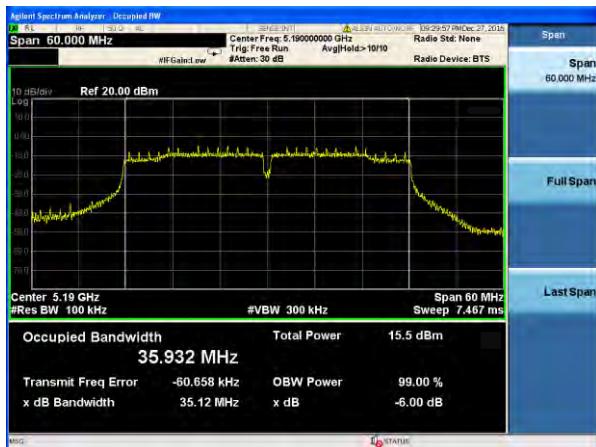

(802.11ac80) -6dB Bandwidth plot on channel 42




(802.11ac40) -6dB Bandwidth plot on channel 46

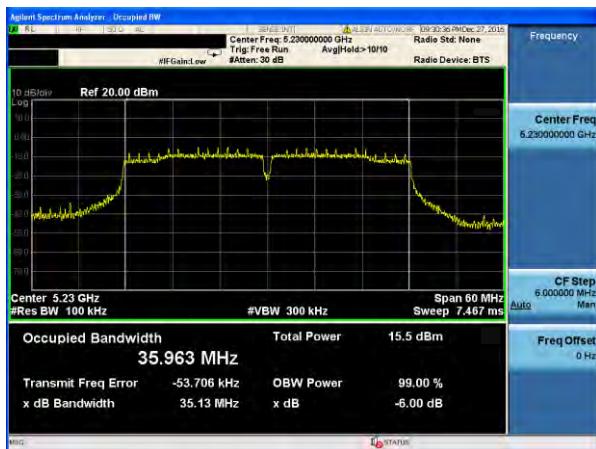


EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency (5725-5825MHz)		

Mode	Channel	Frequency (MHz)	-6dB bandwidth(MHz)	Limit (KHz)	Result
802.11a	149	5745	15.12	500	Pass
	157	5785	15.12	500	Pass
	165	5825	15.13	500	Pass
802.11 n20	149	5745	15.10	500	Pass
	157	5785	15.12	500	Pass
	165	5825	15.12	500	Pass
802.11 n40	151	5755	35.11	500	Pass
	159	5795	35.12	500	Pass
802.11 AC20	149	5745	15.12	500	Pass
	157	5785	15.13	500	Pass
	165	5825	15.12	500	Pass
802.11 AC40	149	5745	35.12	500	Pass
	157	5785	35.11	500	Pass
802.11 AC80	155	5775	76.21	500	Pass


(802.11a) -6dB Bandwidth plot on channel 149

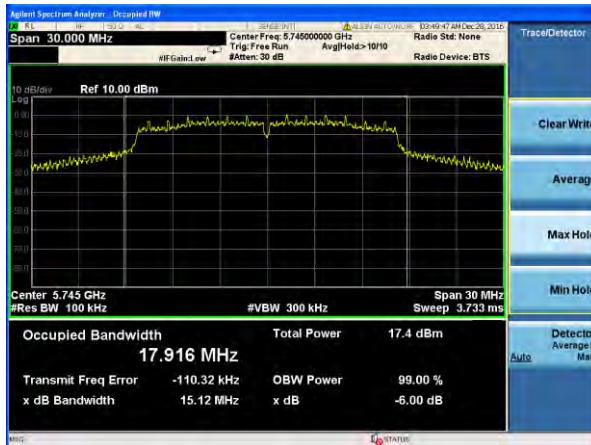


(802.11n20) -6dB Bandwidth plot on channel 149

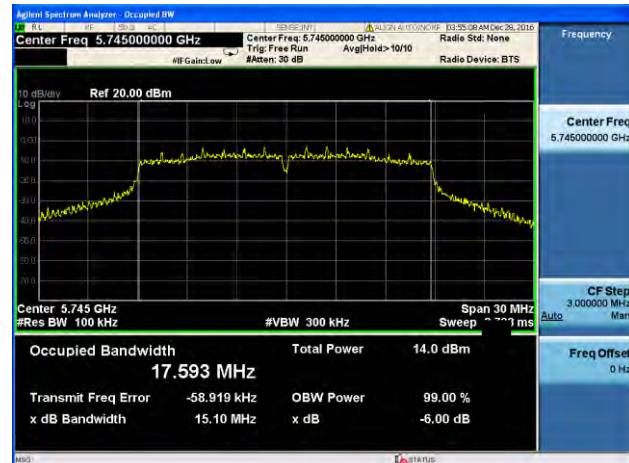


(802.11a) -6dB Bandwidth plot on channel 157

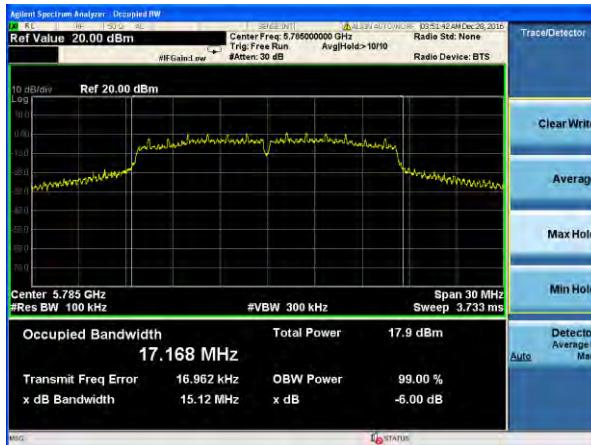

(802.11n20) -6dB Bandwidth plot on channel 157

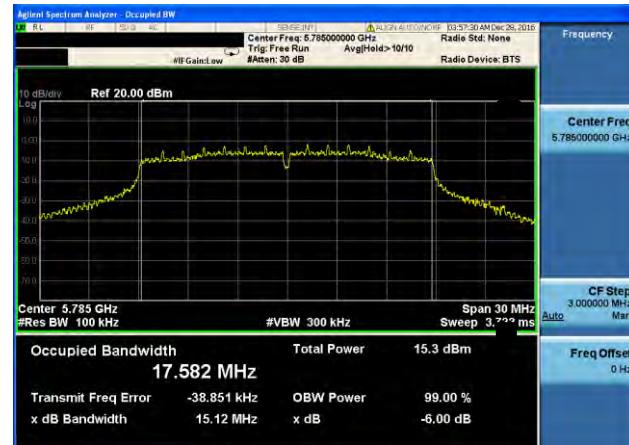


(802.11a) -6dB Bandwidth plot on channel 165

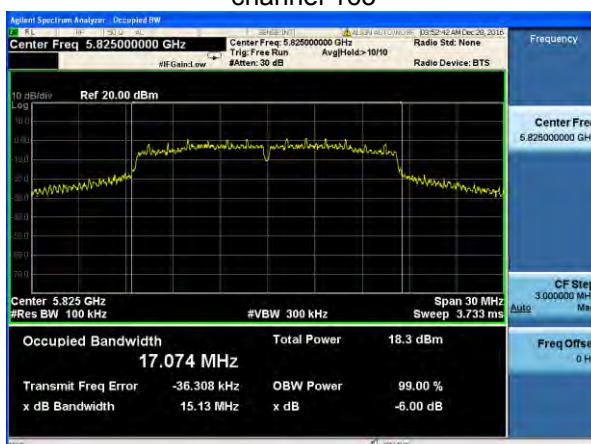

(802.11n20) -6dB Bandwidth plot on channel 165




(802.11n40) -6dB Bandwidth plot on channel 151

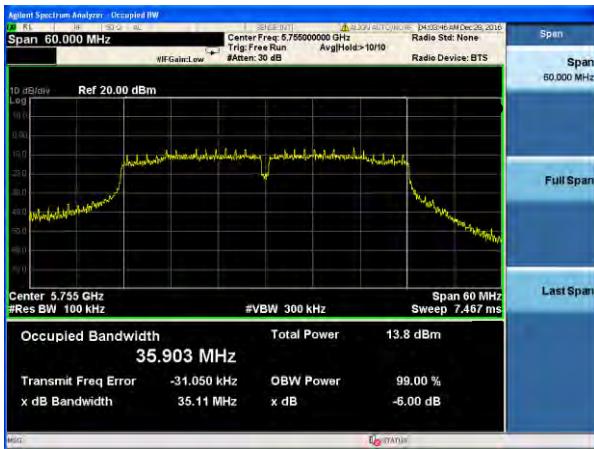


(802.11ac20) -6dB Bandwidth plot on channel 149



(802.11n40) -6dB Bandwidth plot on channel 159

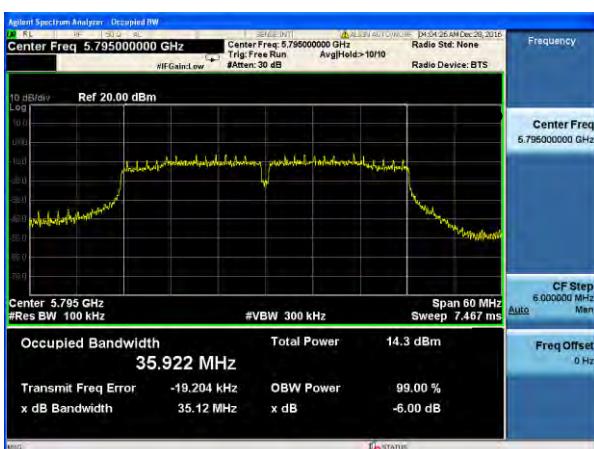


(802.11ac20) -6dB Bandwidth plot on channel 157

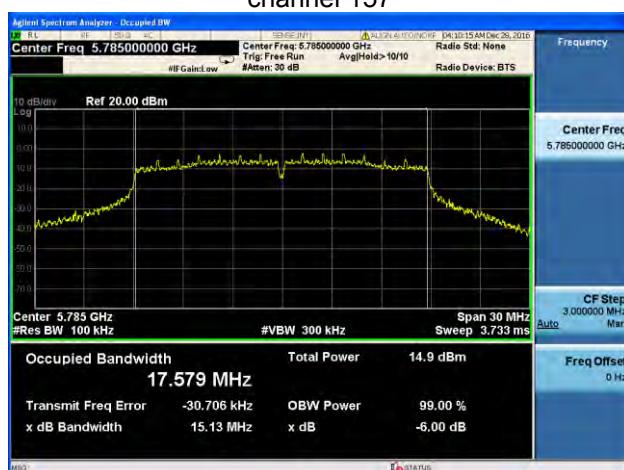


(802.11ac20) -6dB Bandwidth plot on channel 165




## (802.11ac40) -6dB Bandwidth plot on channel 151

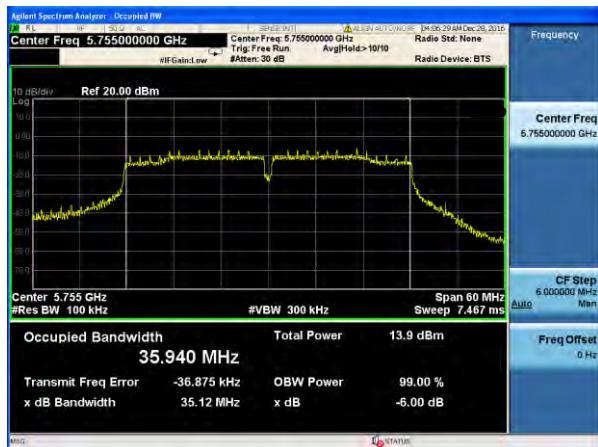

## (802.11ac80) -6dB Bandwidth plot on channel 155

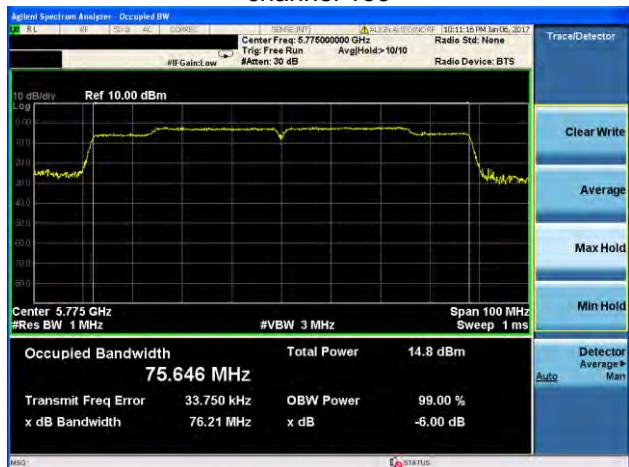

## (802.11ac40) -6dB Bandwidth plot on channel 159

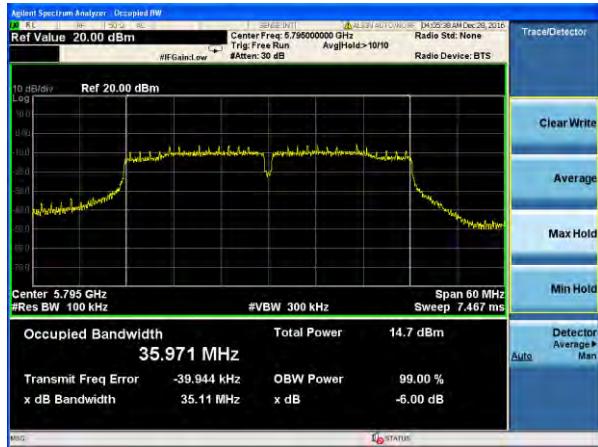

## 7. MAXIMUM CONDUCTED OUTPUT POWER

### 7.1 PPLIED PROCEDURES / LIMIT

**According to FCC §15.407**

**According to FCC §15.407**

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

The maximum e.i.r.p should not exceed:

Frequency Band(MHz)	Limit
5150~5250	200mW or 10dBm +10logB whichever is less
5725~5850	N/A

Note: Where "B" is the 99% emission bandwidth in MHz

### 7.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq$  98 percent).

- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration  $T$  of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq$  3 MHz.

(iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $<$  98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

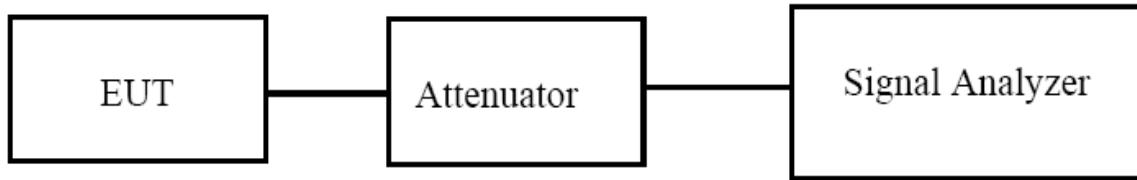

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.6 TEST RESULTS

EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency (5150-5250MHz)		

Test Channel	Frequency	Maximum output power. Antenna port	LIMIT	Result
		(AV)		
		(MHz)	(dBm)	dBm
TX 802.11a Mode				
CH36	5180	18.4	23.98	Pass
CH40	5200	18.3	23.98	Pass
CH48	5240	18.4	23.98	Pass
TX 802.11 n20M Mode				
CH36	5180	15.4	21.42	Pass
CH40	5200	15.3	21.42	Pass
CH48	5240	15.6	21.42	Pass
TX 802.11 n40M Mode				
CH38	5190	16.1	21.42	Pass
CH46	5230	16.0	21.42	Pass
TX 802.11 AC20M Mode				
CH36	5180	15.2	21.42	Pass
CH40	5200	15.3	21.42	Pass
CH48	5240	15.3	21.42	Pass
TX 802.11 AC40M Mode				
CH38	5190	15.9	21.42	Pass
CH46	5230	16.0	21.42	Pass
TX 802.11 AC80M Mode				
CH42	5210	16.6	21.42	Pass

EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5G) Mode Frequency (5725-5825MHz)		

Test Channel	Frequency	Maximum	LIMIT	Result
		output power.		
		Antenna port (AV)		
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH 149	5745	18.1	30	Pass
CH 157	5785	18.4	30	Pass
CH 165	5825	18.6	30	Pass
TX 802.11 n20M Mode				
CH 149	5745	15.2	27.44	Pass
CH 157	5785	15.5	27.44	Pass
CH 165	5825	15.7	27.44	Pass
TX 802.11 n40M Mode				
CH 151	5755	15.1	27.44	Pass
CH 159	5795	15.4	27.44	Pass
TX 802.11 AC20M Mode				
CH 149	5745	15.3	27.44	Pass
CH 157	5785	15.5	27.44	Pass
CH 165	5825	15.8	27.44	Pass
TX 802.11 AC40M Mode				
CH 151	5755	15.1	27.44	Pass
CH 159	5795	15.4	27.44	Pass
TX 802.11 AC80M Mode				
CH 155	5775	15.3	27.44	Pass

## 8. OUT OF BAND EMISSIONS

### 8.1 APPLICABLE STANDARD

#### According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27 \text{ dBm/MHz}$ .

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of  $-27 \text{ dBm/MHz}$  at 75 MHz or more above or below the band edge increasing linearly to  $10 \text{ dBm/MHz}$  at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of  $15.6 \text{ dBm/MHz}$  at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27 \text{ dBm/MHz}$  at the band edge.


### 8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 8.6 TEST RESULTS

EUT :	Tablet PC	Model Name :	M09GSAT01
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V

5.2G

### 5.15~5.25 GHz

(802.11a) Band Edge, Left Side



(802.11n20) Band Edge, Left Side



(802.11a) Band Edge, Right Side



(802.11n20) Band Edge, Right Side



## 5.15~5.25 GHz

(802.11n40) Band Edge, Left Side



(802.11ac20) Band Edge, Left Side



(802.11n40) Band Edge, Right Side



(802.11ac20) Band Edge, Right Side



5.15~5.25 GHz

### (802.11ac40) Band Edge, Left Side



### (802.11ac80) Band Edge, Left Side



## (802.11ac40) Band Edge, Right Side




### (802.11ac80) Band Edge, Right Side




5.8G

## 5.725-5.85 GHz

(802.11a) Band Edge, Left Side

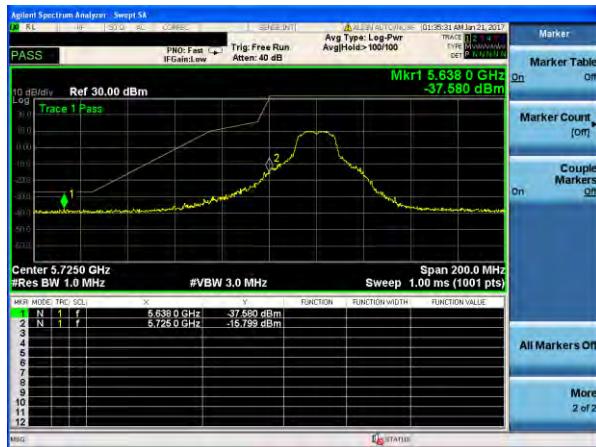


(802.11n20) Band Edge, Left Side

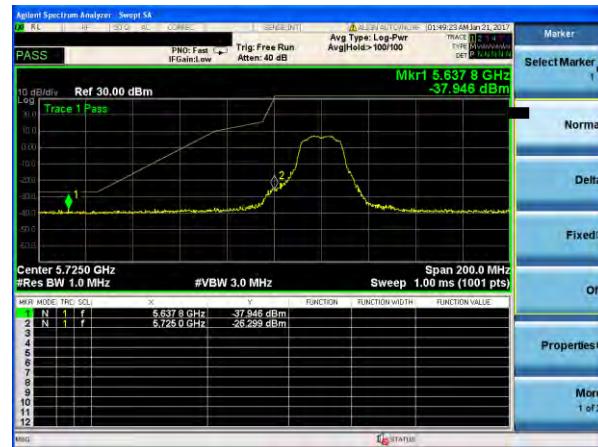

(802.11a) Band Edge, Right Side




(802.11n20) Band Edge, Right Side

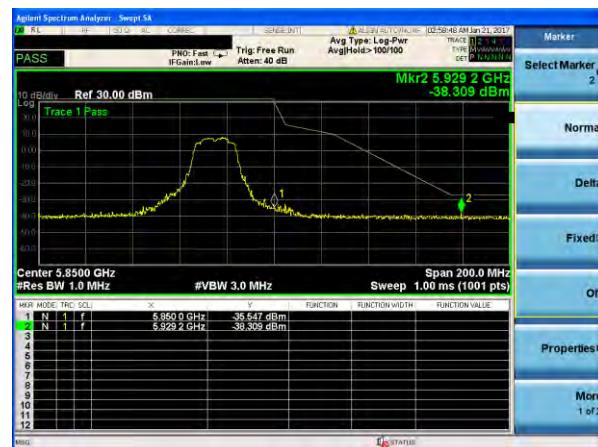


## 5.725-5.85 GHz


(802.11n40) Band Edge, Left Side

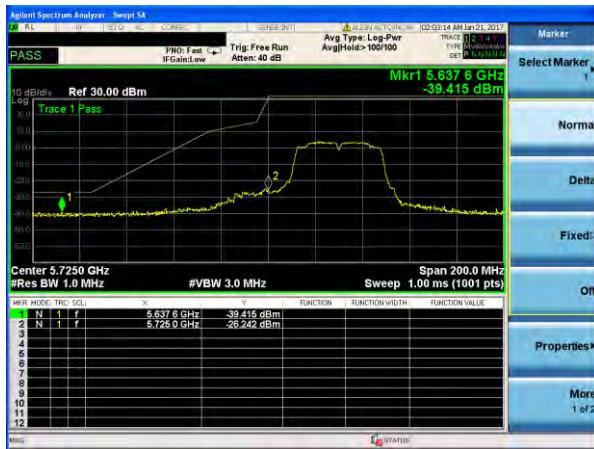


(802.11ac20) Band Edge, Left Side

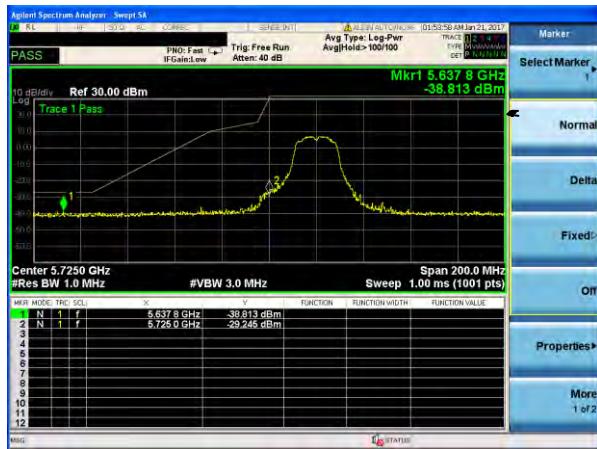

(802.11n40) Band Edge, Right Side

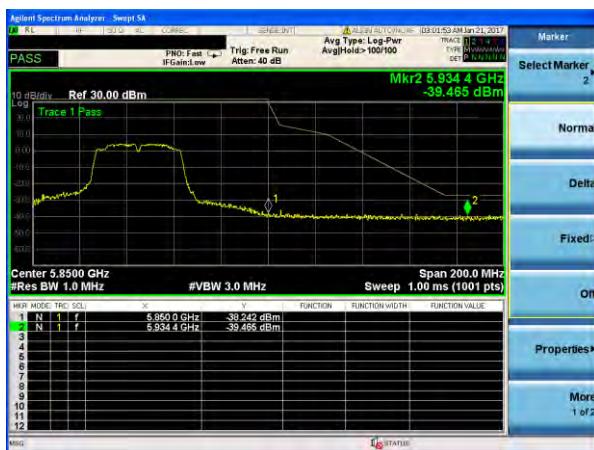

(802.11ac20) Band Edge, Right Side

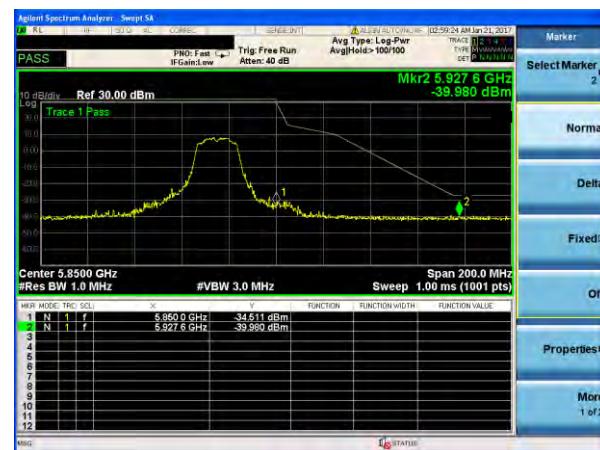

## 5.725-5.85 GHz


(802.11ac40) Band Edge, Left Side



(802.11ac80) Band Edge, Left Side



(802.11ac40) Band Edge, Right Side

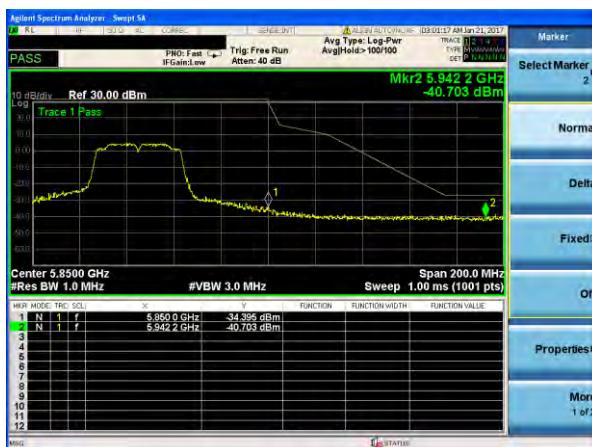

(802.11ac80) Band Edge, Right Side



## 9.SPURIOUS RF CONDUCTED EMISSIONS

### 9.1 CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### 9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

### 9.3 TEST SETUP

Please refer to Section 6.1 of this test report.

### 9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and mwasure frequeny range from 9KHz to 26.5GHz.

### 9.5 TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

## 5.2G

## Test Plot


802.11a on channel 36



802.11a on channel 40



802.11a on channel 36

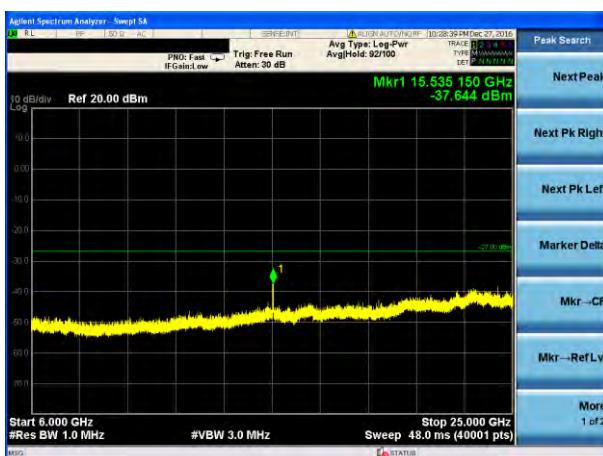

802.11a on channel 40




## Test Plot


802.11a on channel 48



802.11n20 on channel 36

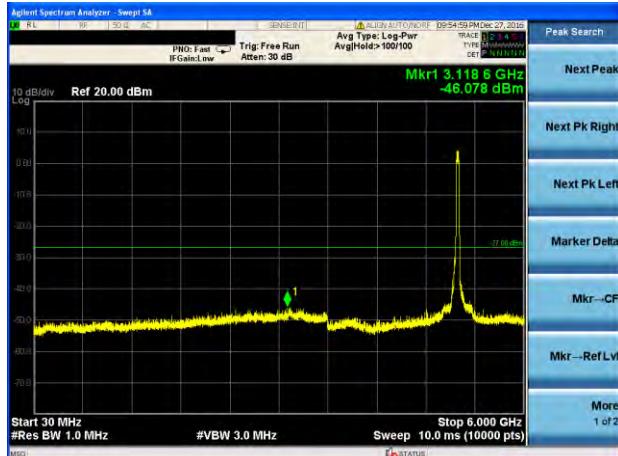

802.11a on channel 48

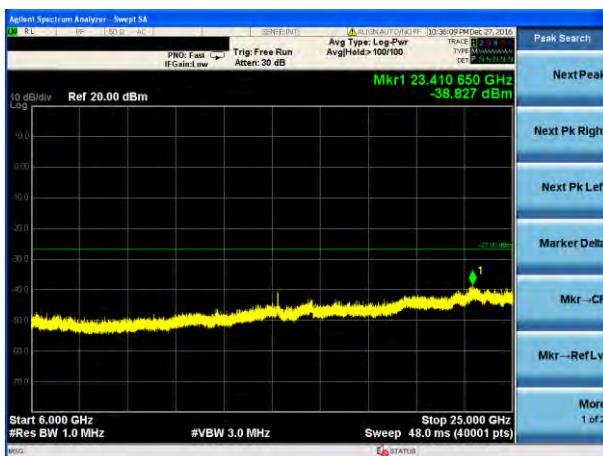


802.11n20 on channel 36



## Test Plot

802.11n20 on channel 40

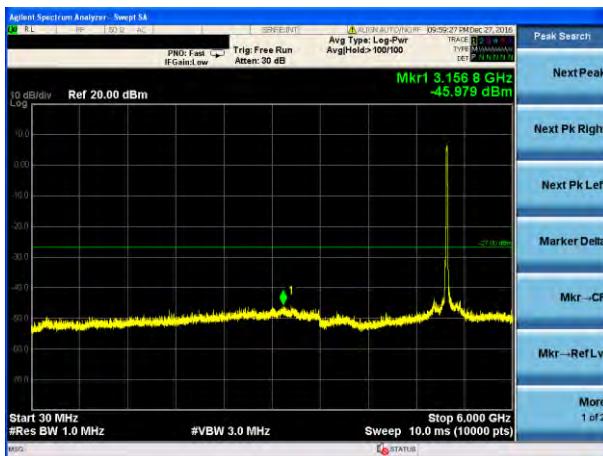

802.11n20 on channel 48



802.11n20 on channel 40




802.11n20 on channel 48




## Test Plot


802.11n40 on channel 38

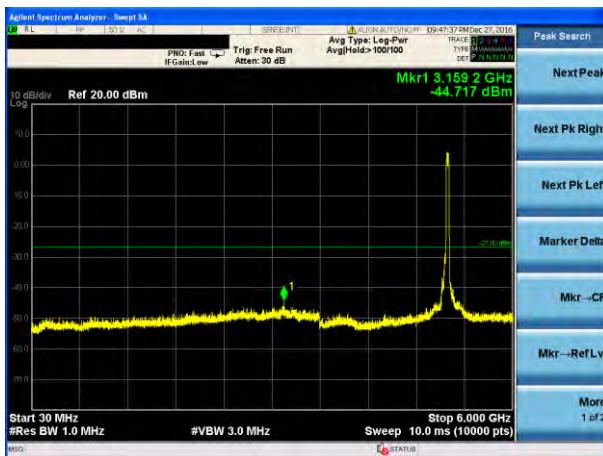

802.11n40 on channel 46

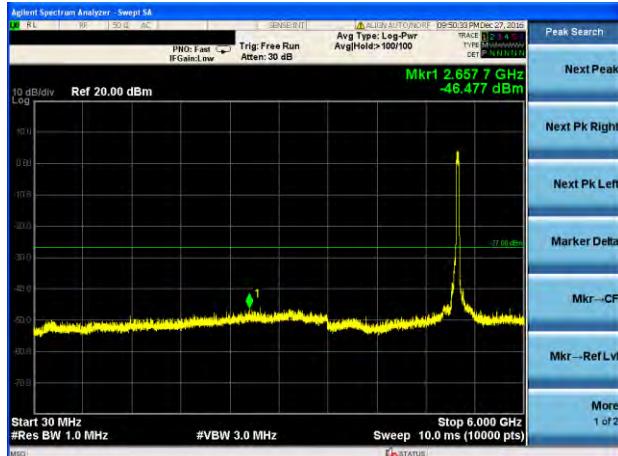

802.11n40 on channel 38

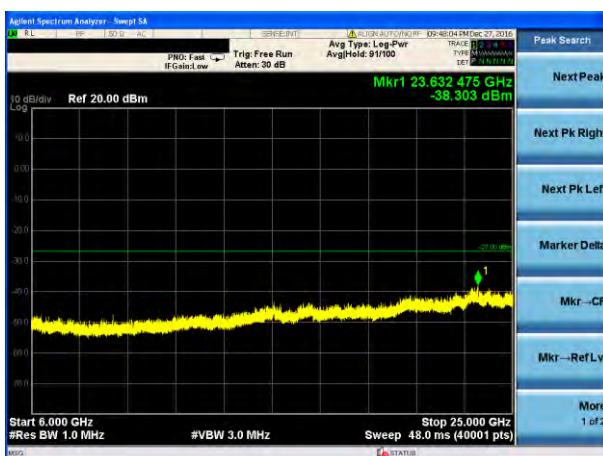


802.11n40 on channel 46




## Test Plot


802.11ac20 on channel 36

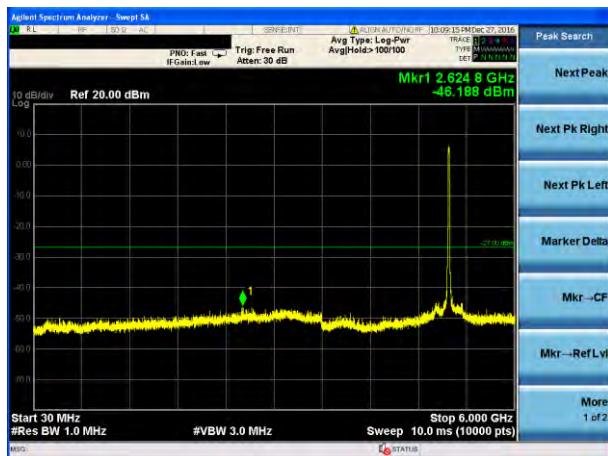

802.11ac20 on channel 40

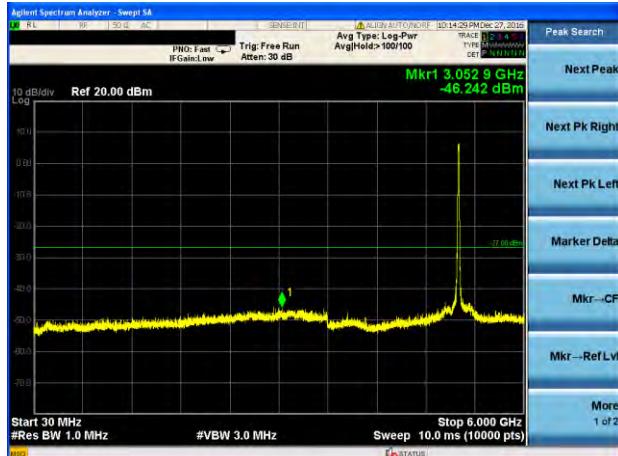

802.11ac20 on channel 36

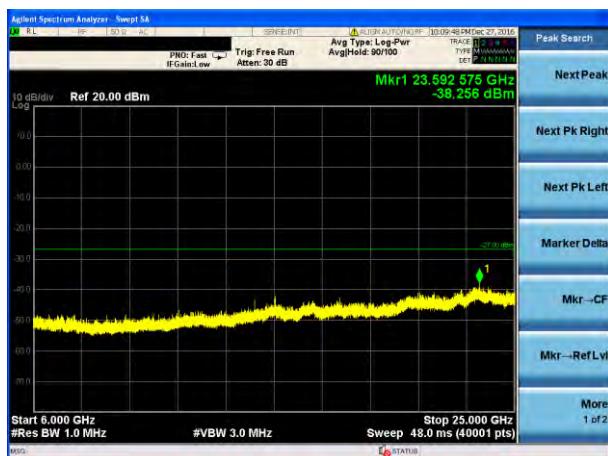


802.11ac20 on channel 40




## Test Plot

802.11ac20 on channel 48

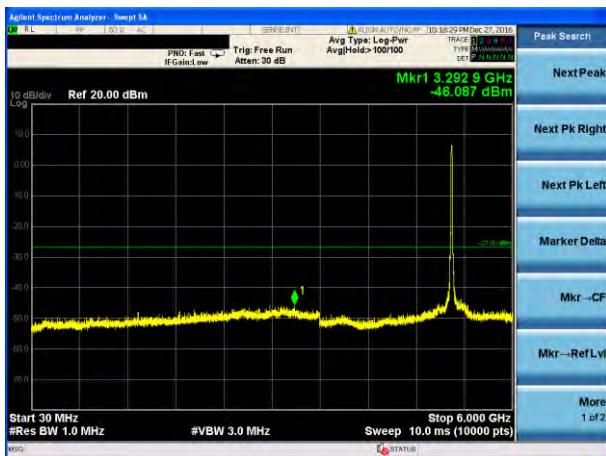

802.11ac40 on channel 38

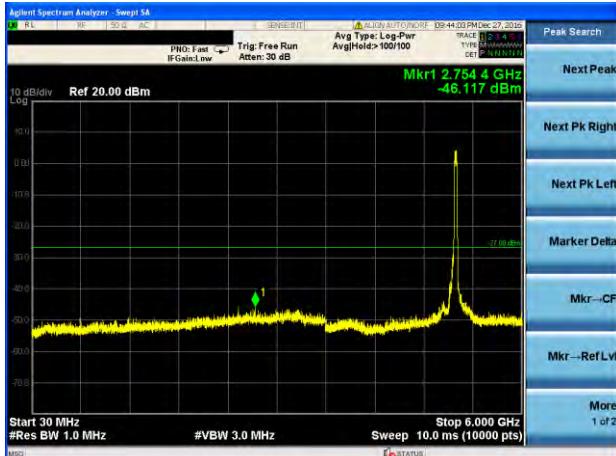

802.11ac20 on channel 48




802.11ac40 on channel 38




## Test Plot

802.11ac40 on channel 46

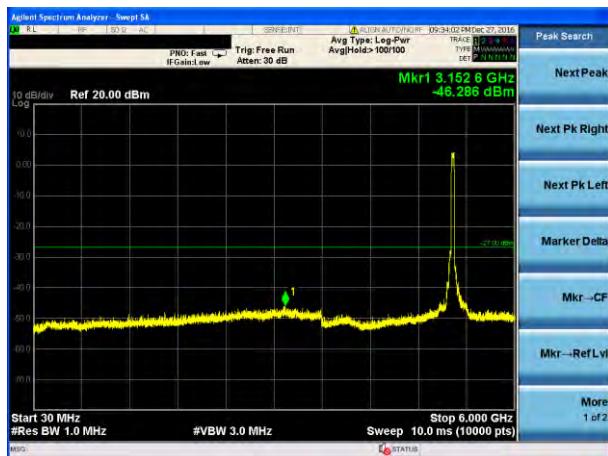

802.11ac80 on channel 42

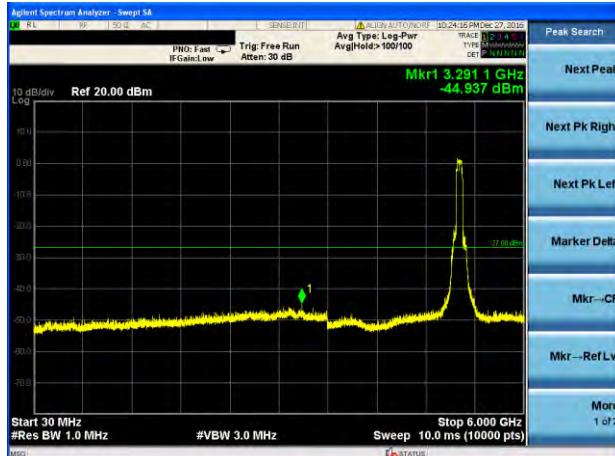

802.11 ac40 on channel 46



802.11 ac80 on channel 42



5.8G

## Test Plot

802.11a on channel 149



802.11a on channel 157



802.11a on channel 149




802.11a on channel 157



## Test Plot

802.11a on channel 165

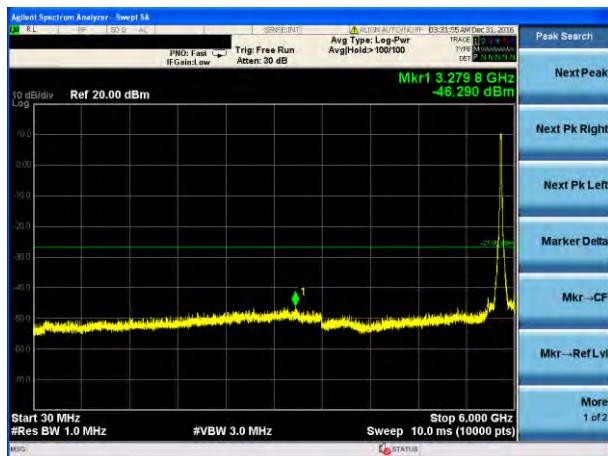

802.11n20 on channel 149



802.11a on channel 165




802.11n20 on channel 149



## Test Plot

802.11n20 on channel 157

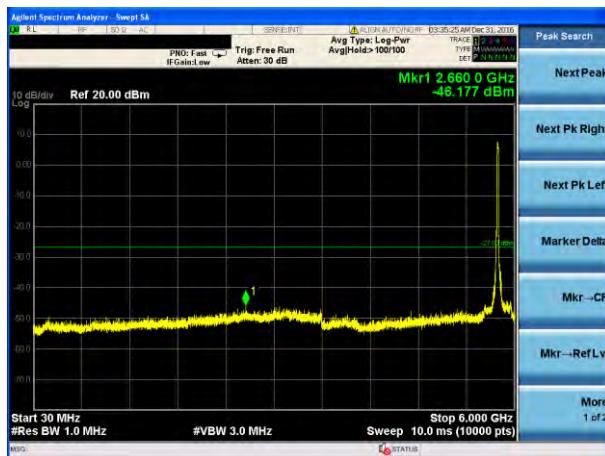

802.11n20 on channel 165



802.11n20 on channel 157



802.11n20 on channel 165



## Test Plot

802.11n40 on channel 151



802.11n40 on channel 159



802.11n40 on channel 151



802.11n40 on channel 159



## Test Plot

802.11ac20 on channel 149



802.11ac20 on channel 157



802.11ac20 on channel 149



802.11ac20 on channel 157




## Test Plot

802.11ac20 on channel 165




802.11ac40 on channel 151

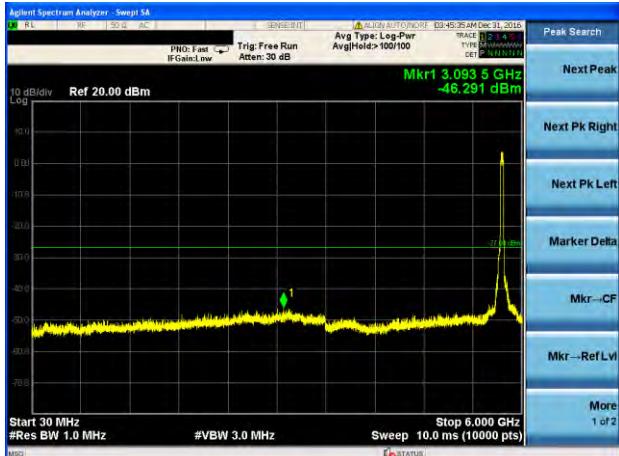

802.11ac20 on channel 165



802.11ac40 on channel 151

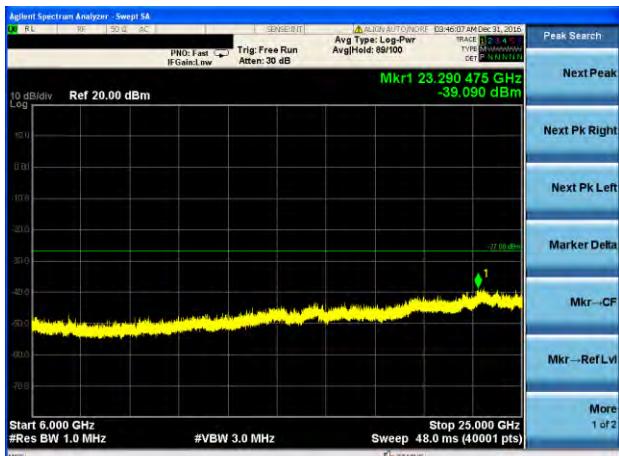


## Test Plot

802.11ac40 on channel 159



802.11ac80 on channel 155

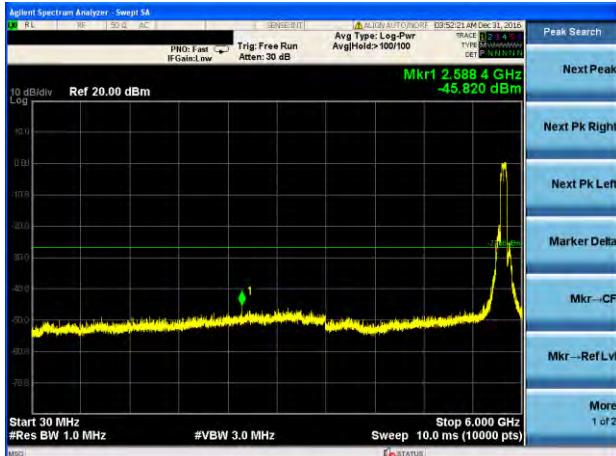

802.11 ac40 on channel 159



802.11 ac80 on channel 155



## **10. ANTENNA REQUIREMENT**

### **10.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **10.2 EUT ANTENNA**

The EUT antenna is permanent attached FPCB antenna. It comply with the standard requirement.