



# FCC Part 15C Test Report

**FCC ID:2AKQE-RZS852**

Product Name:	CLIPTEC 1600DPI 2.4GHZ WIRELESS OPTICAL MOUSE - ISUTTU
Trademark:	CLIPTEC
Model Name :	RZS852
Prepared For :	<b>Cliptec International Sdn Bhd</b>
Address :	NO.3, 5 & 7, Lorong Perda Timur 2, Bandar Perda, 14000 Bukit Mertajam, Penang, Malaysia.
Prepared By :	<b>Shenzhen BCTC Technology Co., Ltd.</b>
Address :	No.101, Yousong Road, Longhua New District, Shenzhen,China
Test Date:	Dec. 08 - Dec. 20, 2016
Date of Report :	Dec. 23, 2016
Report No.:	<b>BCTC-FY161206257E</b>



## VERIFICATION OF COMPLIANCE

**Applicant's name**.....: **Cliptec International Sdn Bhd**

Address.....: NO.3, 5 & 7, Lorong Perda Timur 2, Bandar Perda, 14000  
Bukit Mertajam, Penang, Malaysia.

**Manufacture's Name**.....: **Cliptec International Sdn Bhd**

Address.....: NO.3, 5 & 7, Lorong Perda Timur 2, Bandar Perda, 14000  
Bukit Mertajam, Penang, Malaysia.

**Product description**

Product name.....: CLIPTEC 1600DPI 2.4GHZ WIRELESS OPTICAL MOUSE -  
ISUTTU

Trademark: CLIPTEC

Model Name: RZS852

Standards: FCC Part15.249-2016  
ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result.....: **Pass**

Testing Engineer : 

Eric Yang

Reviewer  
(Supervisor) : 

Simon Wang

Approved &  
Authorized  
Signer(Manager) : 

Carson Zhang

**Table of Contents**

	<b>Page</b>
<b>. SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
TEST FACILITY.....	5
MEASUREMENT UNCERTAINTY.....	5
<b>. GENERAL INFORMATION.....</b>	<b>6</b>
GENERAL DESCRIPTION OF EUT.....	6
DESCRIPTION OF TEST MODES.....	7
TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING.....	7
BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	8
DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	9
EQUIPMENTS LIST FOR ALL TEST ITEMS.....	10
<b>. EMC EMISSION TEST.....</b>	<b>11</b>
CONDUCTED EMISSION MEASUREMENT.....	11
POWER LINE CONDUCTED EMISSION LIMITS.....	11
TEST PROCEDURE.....	12
DEVIATION FROM TEST STANDARD.....	12
TEST SETUP.....	12
EUT OPERATING CONDITIONS.....	12
TEST RESULTS.....	13
RADIATED EMISSION MEASUREMENT.....	15
RADIATED EMISSION LIMITS.....	15
TEST PROCEDURE.....	16
DEVIATION FROM TEST STANDARD.....	16
TEST SETUP.....	17
EUT OPERATING CONDITIONS.....	18
TEST RESULTS .....	19
<b>. BANDWIDTH TEST.....</b>	<b>23</b>
APPLIED PROCEDURES / LIMIT.....	23
TEST PROCEDURE.....	23
DEVIATION FROM STANDARD.....	23
TEST SETUP.....	23
EUT OPERATION CONDITIONS.....	23
TEST RESULTS.....	24
<b>. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>26</b>
DEVIATION FROM STANDARD.....	27
TEST SETUP.....	27

**Table of Contents**

	<b>Page</b>
<b>EUT OPERATION CONDITIONS.....</b>	<b>27</b>
<b>TEST RESULTS.....</b>	<b>27</b>
<b>. ANTENNA REQUIREMENT.....</b>	<b>30</b>
<b>STANDARD REQUIREMENT.....</b>	<b>30</b>
<b>EUT ANTENNA.....</b>	<b>30</b>
<b>. EUT TEST PHOTO.....</b>	<b>31</b>
<b>. EUT PHOTO.....</b>	<b>33</b>



## . SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207(a)	Conducted Emission	PASS	
15.209(a)&&15.249(a)&15.249(c)&15.205(a)	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.215(c)	Bandwidth	PASS	
15.249(d)	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

## TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registration No.:187086

## MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



## . GENERAL INFORMATION

### GENERAL DESCRIPTION OF EUT

Equipment	CLIPTEC 1600DPI 2.4GHZ WIRELESS OPTICAL MOUSE - ISUTTU								
Trade Name	CLIPTEC								
Model Name	RZS852								
Serial Model	N/A								
Model Difference	N/A								
Product Description	<p>The EUT is a CLIPTEC 1600DPI 2.4GHZ WIRELESS OPTICAL MOUSE - ISUTTU.</p> <table border="1"><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Number Of Channel</td><td>16 CH</td></tr><tr><td>Antenna Designation:</td><td>Please see Note 3.</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Number Of Channel	16 CH	Antenna Designation:	Please see Note 3.
Operation Frequency:	2402~2480 MHz								
Modulation Type:	GFSK								
Number Of Channel	16 CH								
Antenna Designation:	Please see Note 3.								
Channel List	Please refer to the Note 2.								
Battery	TX: DC 3V Battery RX: DC 5V								
Connecting I/O Port(s)	Please refer to the User's Manual								
hardware version	TX:YHK-60M RX:YHK-60D								
Software version	V1.0								

#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	07	2436	13	2463
02	2407	08	2440	14	2466
03	2414	09	2441	15	2473
04	2419	10	2445	16	2480
05	2422	11	2453	----	----
06	2426	12	2459	----	----

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	3.85dBi	

## DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK
Mode 2	CH08	
Mode 3	CH16	
Mode 4	Link mode	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

## TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Frequency	2402 MHz	2440MHz	2480 MHz
Channel	Low	Middle	High



### BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission

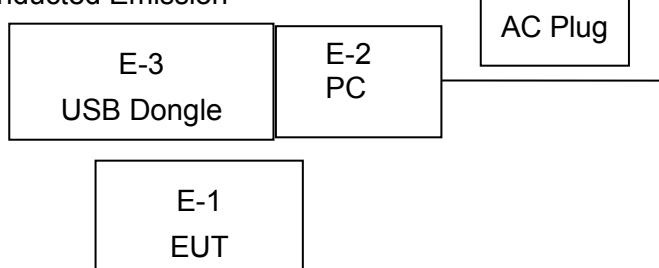

Radiated Spurious Emission Test



**DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	CLIPTEC 1600DPI 2.4GHZ WIRELESS OPTICAL MOUSE - ISUTTU	CLIPTEC	RZS852	N/A	EUT
E-2	PC	N/A	N/A	N/A	Peripheral
E-3	USB Dongle	CLIPTEC	RZS852	N/A	Peripheral

Item	Shielded Type	Ferrite Core	Length	Note

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



## EQUIPMENTS LIST FOR ALL TEST ITEMS

For Conducted Emission at the mains terminals Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	843 Shielded Room	ChengYu	843 Room	843	2016.07.06	2017.07.05	1 year
2	EMI Receiver	R&S	ESCI	101421	2016.06.07	2017.06.06	1 year
3	LISN	Schwarzbeck	NSLK8127	8127739	2016.07.06	2017.07.05	1 year
4	Attenuator	R&S	ESH3-Z2	BCTC021 E	2016.06.07	2017.06.06	1 year

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	R&S	VULB 9168	VULB91 68-438	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year
6	Horn Antenna	R&S	HF906	10027	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	R&S	BBV9743	9743-019	2016.08.25	2017.08.24	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
10	RF cables	R&S	R203	R20X	2016.07.06	2017.07.05	1 year
11	Antenna connector	Florida RFLabs	Lab-Fle	RF 01#	2016.07.06	2017.07.05	1 year



## EMC EMISSION TEST

### CONDUCTED EMISSION MEASUREMENT

**POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)**

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


## TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

## DEVIATION FROM TEST STANDARD

No deviation

## TEST SETUP

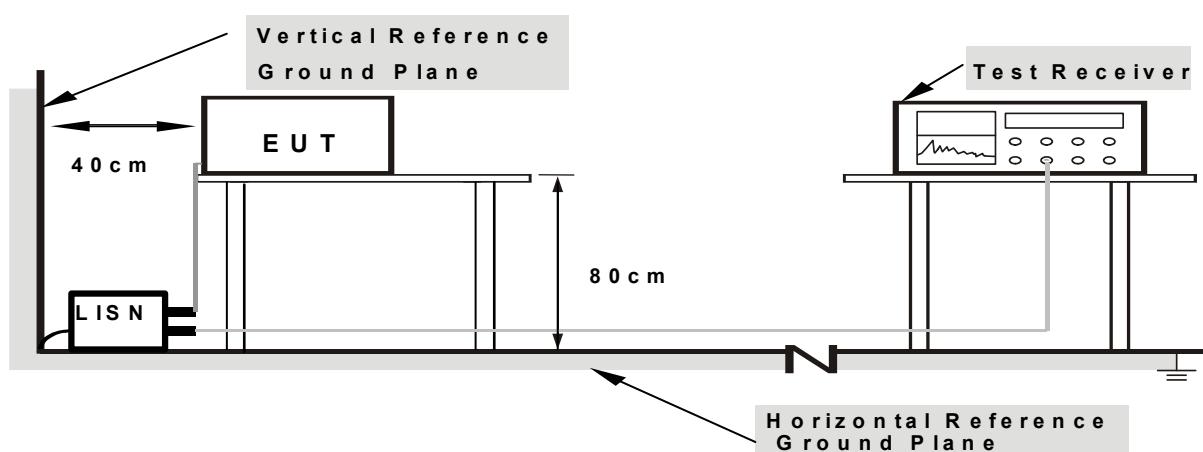

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


## EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## TEST RESULTS


Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Input: AC120V/60Hz Output: DC 5V	Test Mode :	Mode4

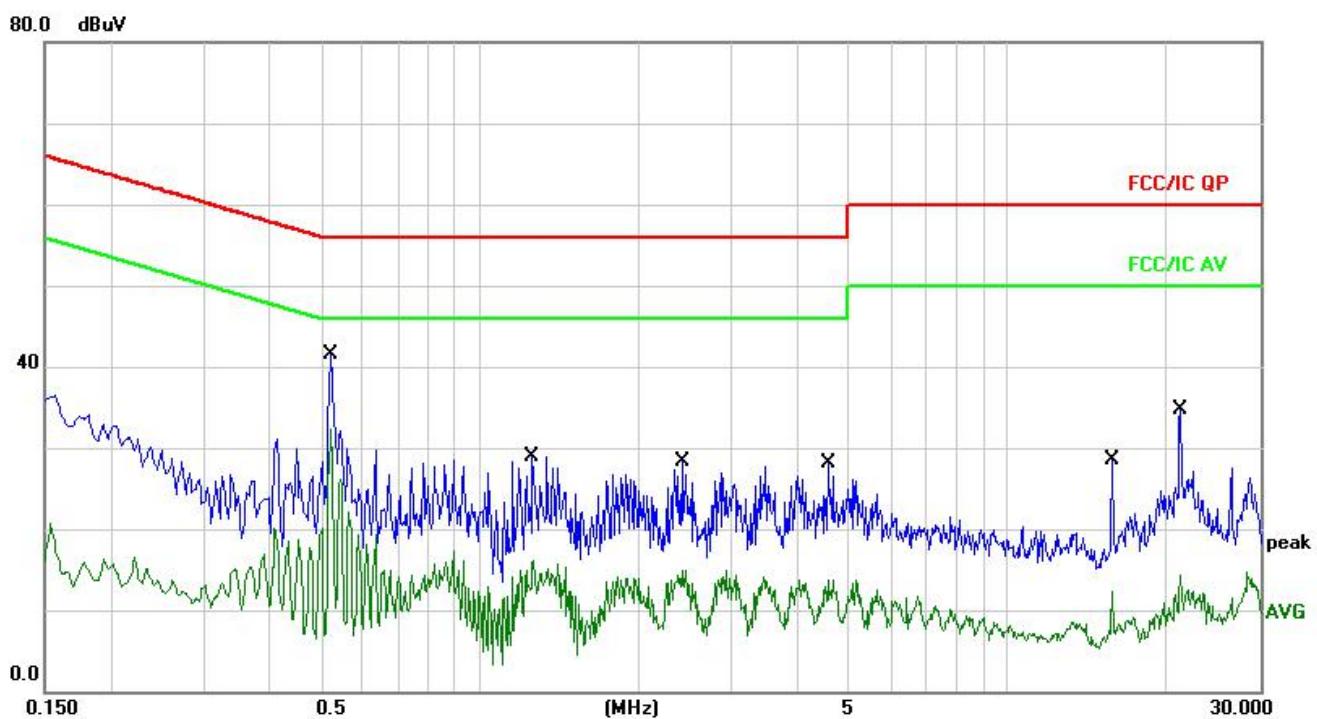

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.5220	31.74	9.68	41.42	56.00	-14.58	QP
2	*	0.5220	22.65	9.68	32.33	46.00	-13.67	AVG
3		1.2620	19.26	9.70	28.96	56.00	-27.04	QP
4		1.2620	6.40	9.70	16.10	46.00	-29.90	AVG
5		2.4100	18.52	9.72	28.24	56.00	-27.76	QP
6		2.4100	5.24	9.72	14.96	46.00	-31.04	AVG
7		4.5580	18.43	9.73	28.16	56.00	-27.84	QP
8		4.5580	4.05	9.73	13.78	46.00	-32.22	AVG
9		15.7420	18.65	9.87	28.52	60.00	-31.48	QP
10		15.7420	2.35	9.87	12.22	50.00	-37.78	AVG
11		21.1820	24.83	9.84	34.67	60.00	-25.33	QP
12		21.1820	4.38	9.84	14.22	50.00	-35.78	AVG



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Input: AC120V/60Hz Output: DC 5V	Test Mode :	Mode4

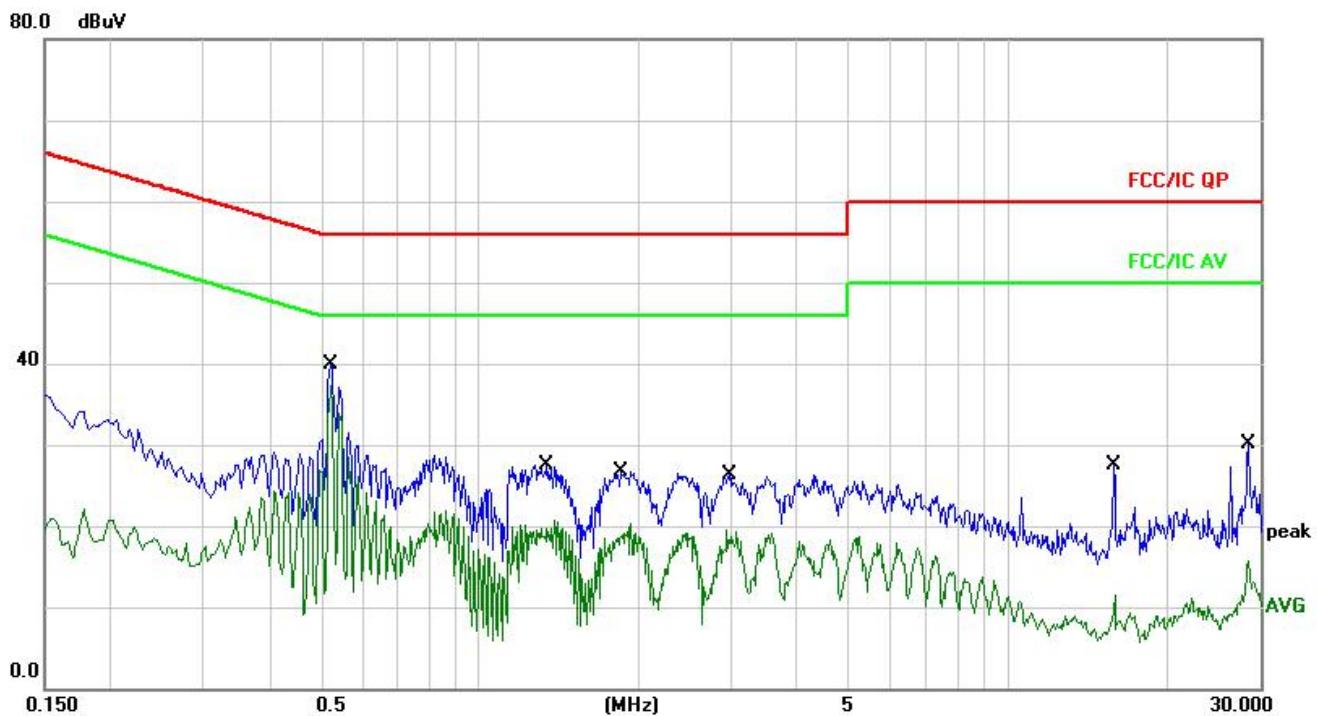

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level					
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.5220	30.14	9.68	39.82	56.00	-16.18	QP
2	*	0.5220	27.52	9.68	37.20	46.00	-8.80	AVG
3		1.3420	17.78	9.70	27.48	56.00	-28.52	QP
4		1.3420	11.01	9.70	20.71	46.00	-25.29	AVG
5		1.8500	16.95	9.71	26.66	56.00	-29.34	QP
6		1.8500	10.66	9.71	20.37	46.00	-25.63	AVG
7		2.9340	16.64	9.72	26.36	56.00	-29.64	QP
8		2.9340	9.71	9.72	19.43	46.00	-26.57	AVG
9		15.8660	17.70	9.87	27.57	60.00	-32.43	QP
10		15.8660	1.61	9.87	11.48	50.00	-38.52	AVG
11		28.5340	20.29	9.86	30.15	60.00	-29.85	QP
12		28.5340	5.94	9.86	15.80	50.00	-34.20	AVG



## RADIATED EMISSION MEASUREMENT

### RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

## DEVIATION FROM TEST STANDARD


No deviation

## TEST SETUP


### (A) Radiated Emission Test-Up Frequency Below 30MHz

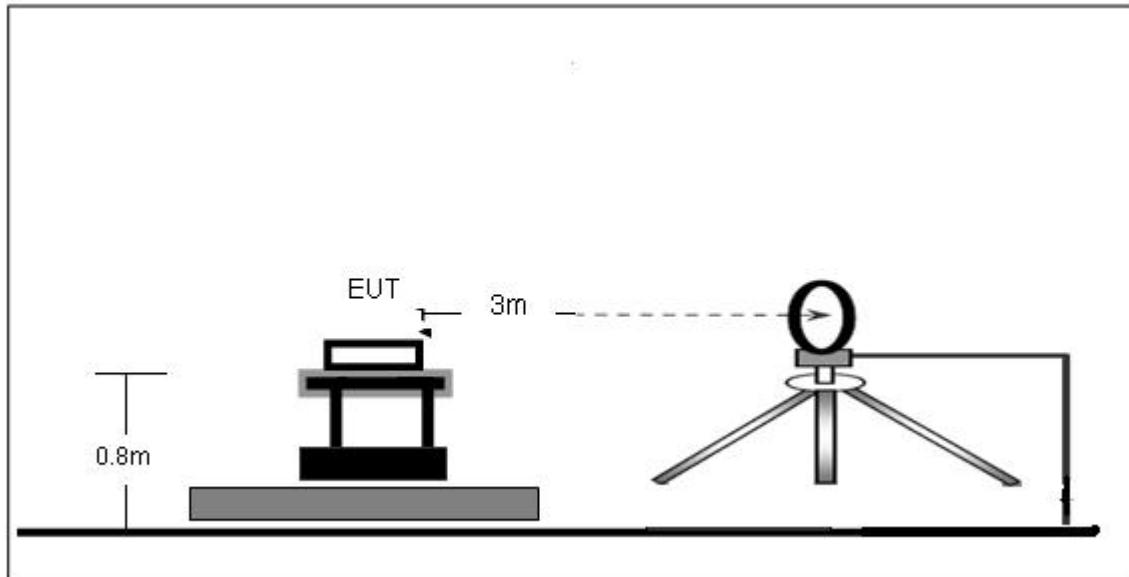

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

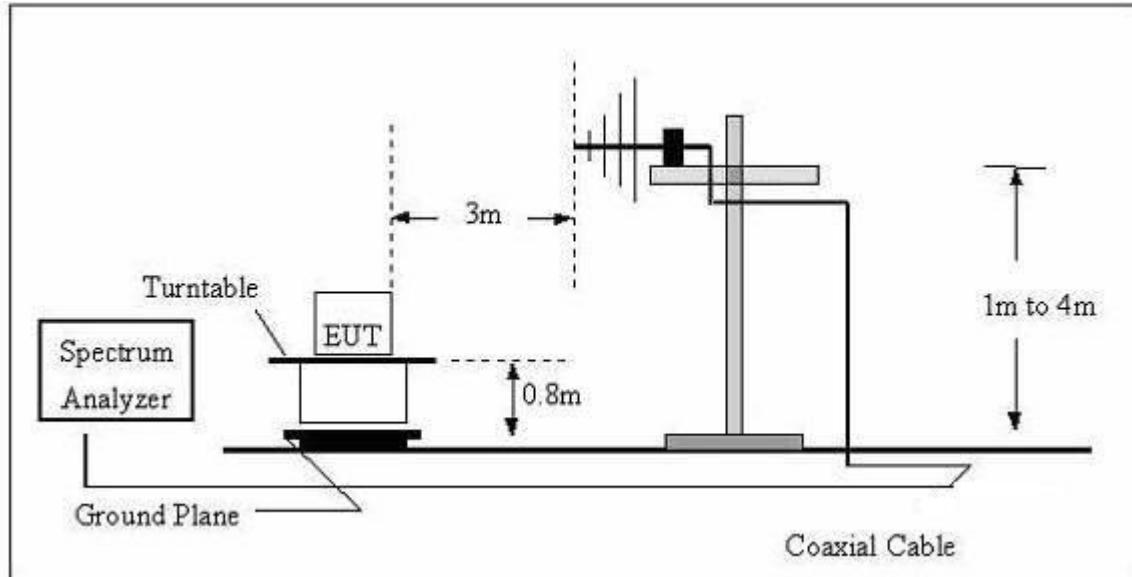

## (C) Radiated Emission Test-Up Frequency Above 1GHz

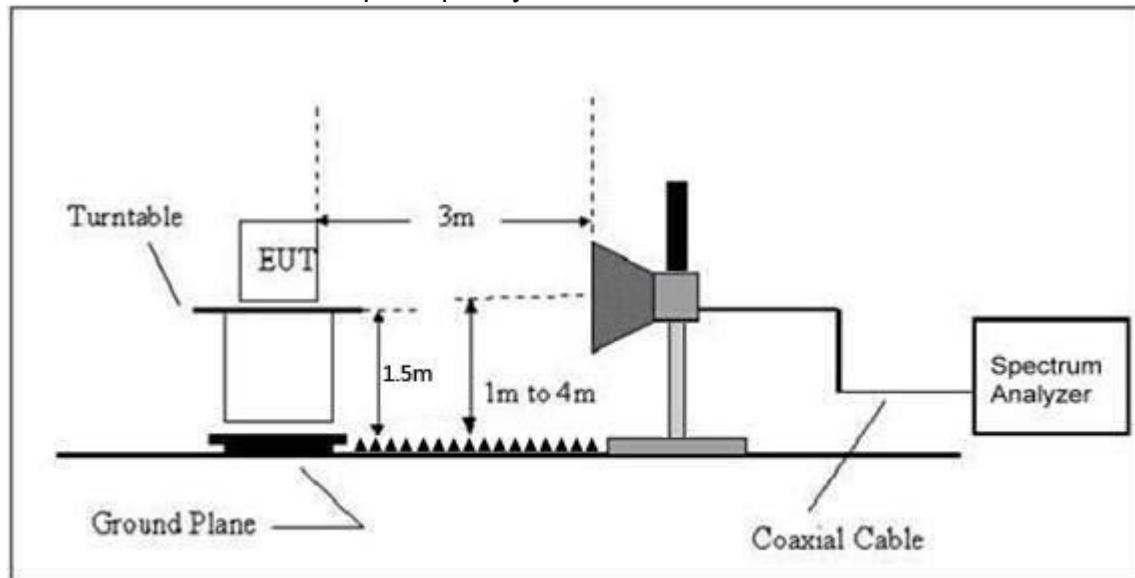**EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## TEST RESULTS

### Radiated Spurious Emission (Below 30MHz )

Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3V battery		
Test Mode :	Mode 4		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



## Radiated Spurious Emission (Between 30MHz – 1GHz)


Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3V battery		
Test Mode : (Worst)	Mode 4		

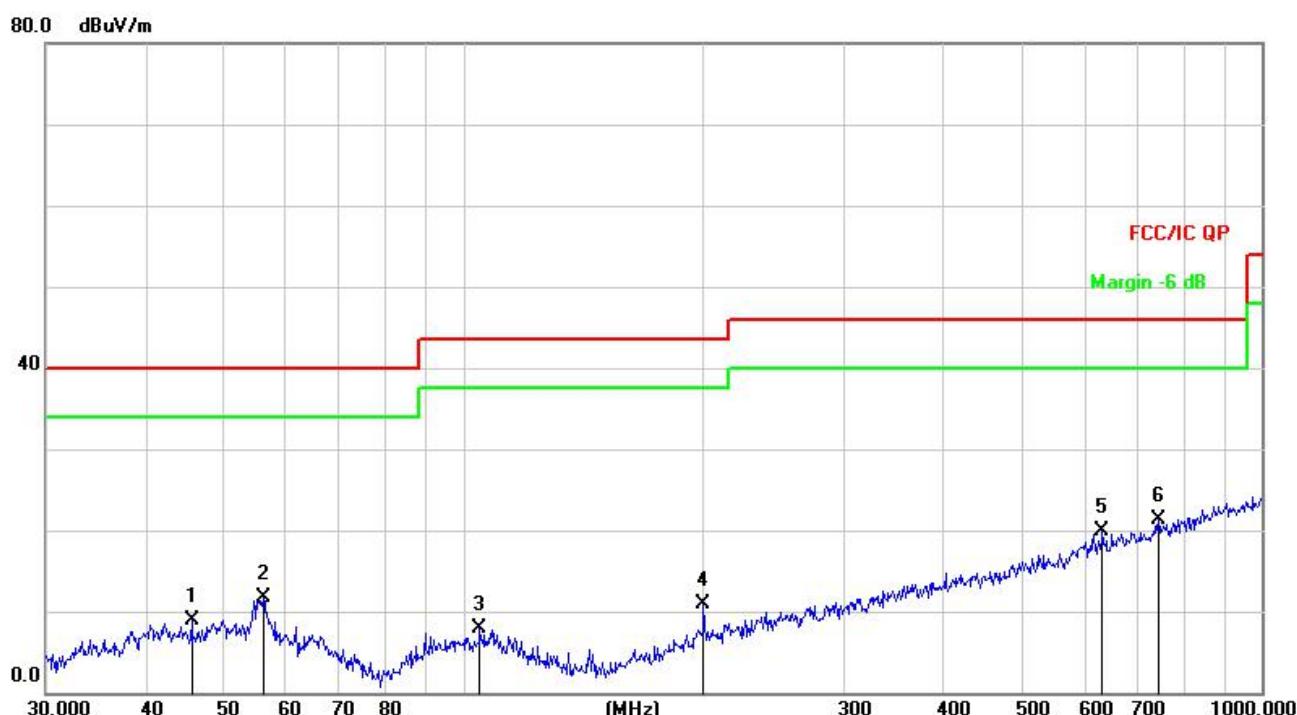

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level							
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		45.6948	23.64	-14.77	8.87	40.00	-31.13	QP		
2		56.1974	27.12	-15.43	11.69	40.00	-28.31	QP		
3		104.9033	24.11	-16.17	7.94	43.50	-35.56	QP		
4		199.9856	26.50	-15.63	10.87	43.50	-32.63	QP		
5		631.6884	23.98	-4.12	19.86	46.00	-26.14	QP		
6	*	742.2587	23.27	-1.96	21.31	46.00	-24.69	QP		



Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3V Battery		
Test Mode : (Worst)	Mode 4		

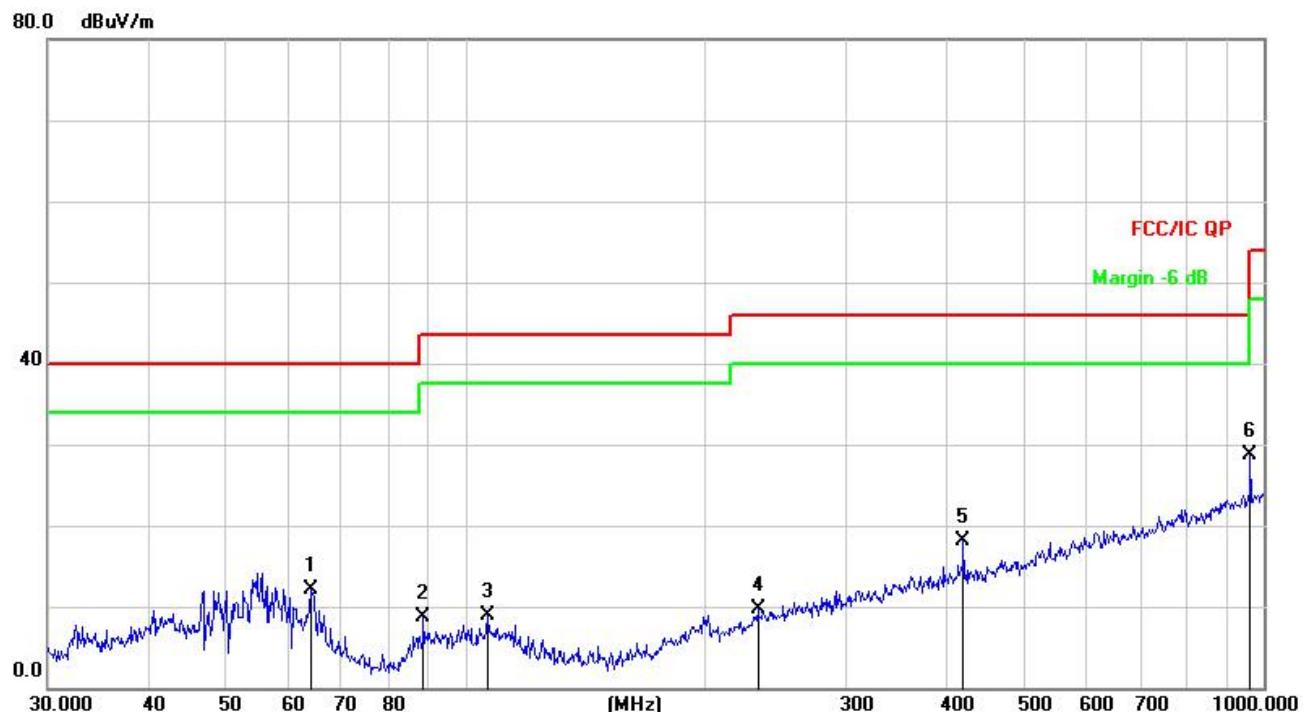

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		64.2074	28.85	-16.66	12.19	40.00	-27.81	QP			
2		88.6524	27.35	-18.57	8.78	43.50	-34.72	QP			
3		106.7587	25.08	-16.27	8.81	43.50	-34.69	QP			
4		232.5318	24.22	-14.45	9.77	46.00	-36.23	QP			
5		420.5803	26.87	-8.83	18.04	46.00	-27.96	QP			
6	*	962.1623	27.28	1.43	28.71	54.00	-25.29	QP			

Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)

	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin (dB)	Result
	(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)		
Lower Channel 2402MHz	2402	86.25	PK	H	13.85	100.10	114	-13.90	Pass
	2402	67.96	Ave	H	13.85	81.81	94	-12.19	Pass
	4804	47.32	PK	H	19.33	66.65	74	-7.35	Pass
	4804	24.27	Ave	H	19.33	43.60	54	-10.40	Pass
	2402	85.37	PK	V	13.85	99.22	114	-14.78	Pass
	2402	67.42	Ave	V	13.85	81.27	94	-12.73	Pass
	4804	46.66	PK	V	19.33	65.99	74	-8.01	Pass
	4804	25.51	Ave	V	19.33	44.84	54	-9.16	Pass
	2440	85.28	PK	H	13.94	99.22	114	-14.78	Pass
	2440	67.13	Ave	H	13.94	81.07	94	-12.93	Pass
Middle Channel 2440MHz	4880	45.74	PK	H	19.43	65.17	74	-8.83	Pass
	4880	27.55	Ave	H	19.43	46.98	54	-7.02	Pass
	2440	86.02	PK	V	13.94	99.96	114	-14.04	Pass
	2440	68.35	Ave	V	13.94	82.29	94	-11.71	Pass
	4880	46.06	PK	V	19.43	65.49	74	-8.51	Pass
	4880	26.34	Ave	V	19.43	45.77	54	-8.23	Pass
	2480	85.73	PK	H	14.02	99.75	114	-14.25	Pass
	2480	67.37	Ave	H	14.02	81.39	94	-12.61	Pass
Upper Channel 2480MHz	4960	43.23	PK	H	19.51	62.74	74	-11.26	Pass
	4960	25.76	Ave	H	19.51	45.27	54	-8.73	Pass
	2480	84.89	PK	V	14.02	98.91	114	-15.09	Pass
	2480	68.33	Ave	V	14.02	82.35	94	-11.65	Pass
	4960	42.52	PK	V	19.51	62.03	74	-11.97	Pass
	4960	25.26	Ave	V	19.51	44.77	54	-9.23	Pass

## Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



## . BANDWIDTH TEST

### APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30KHz
VB	$\geq$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW $\geq$  RBW, Sweep time = Auto.

### DEVIATION FROM STANDARD

No deviation.

### TEST SETUP




### EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS**

EUT :	CLIPTEC 1600DPI 2.4GHZ WIRELESS OPTICAL MOUSE - ISUTTU	Model Name :	RZS852
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1012 hPa	Test Voltage :	DC 3V Battery
Test Mode :	CH01 / CH08 /CH16		

	Frequency	20dB Bandwidth (kHz)	Result
GFSK	2402 MHz	2114	<b>PASS</b>
	2440 MHz	2119	<b>PASS</b>
	2480 MHz	2250	<b>PASS</b>

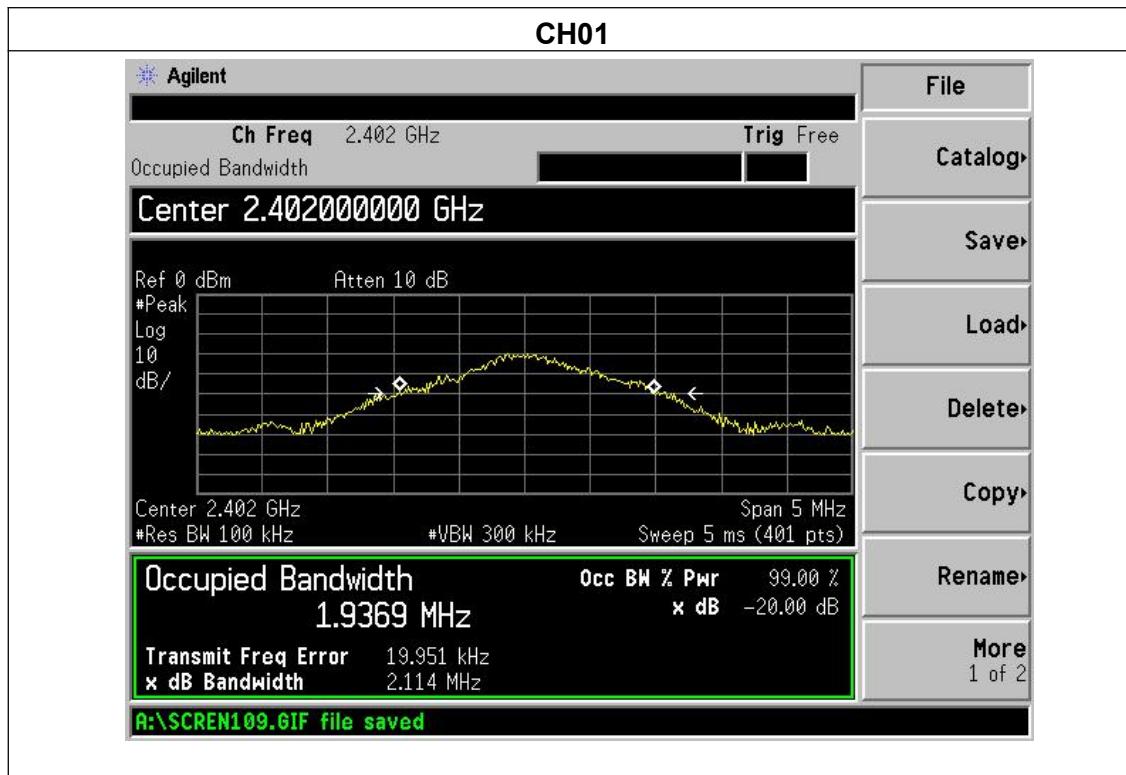

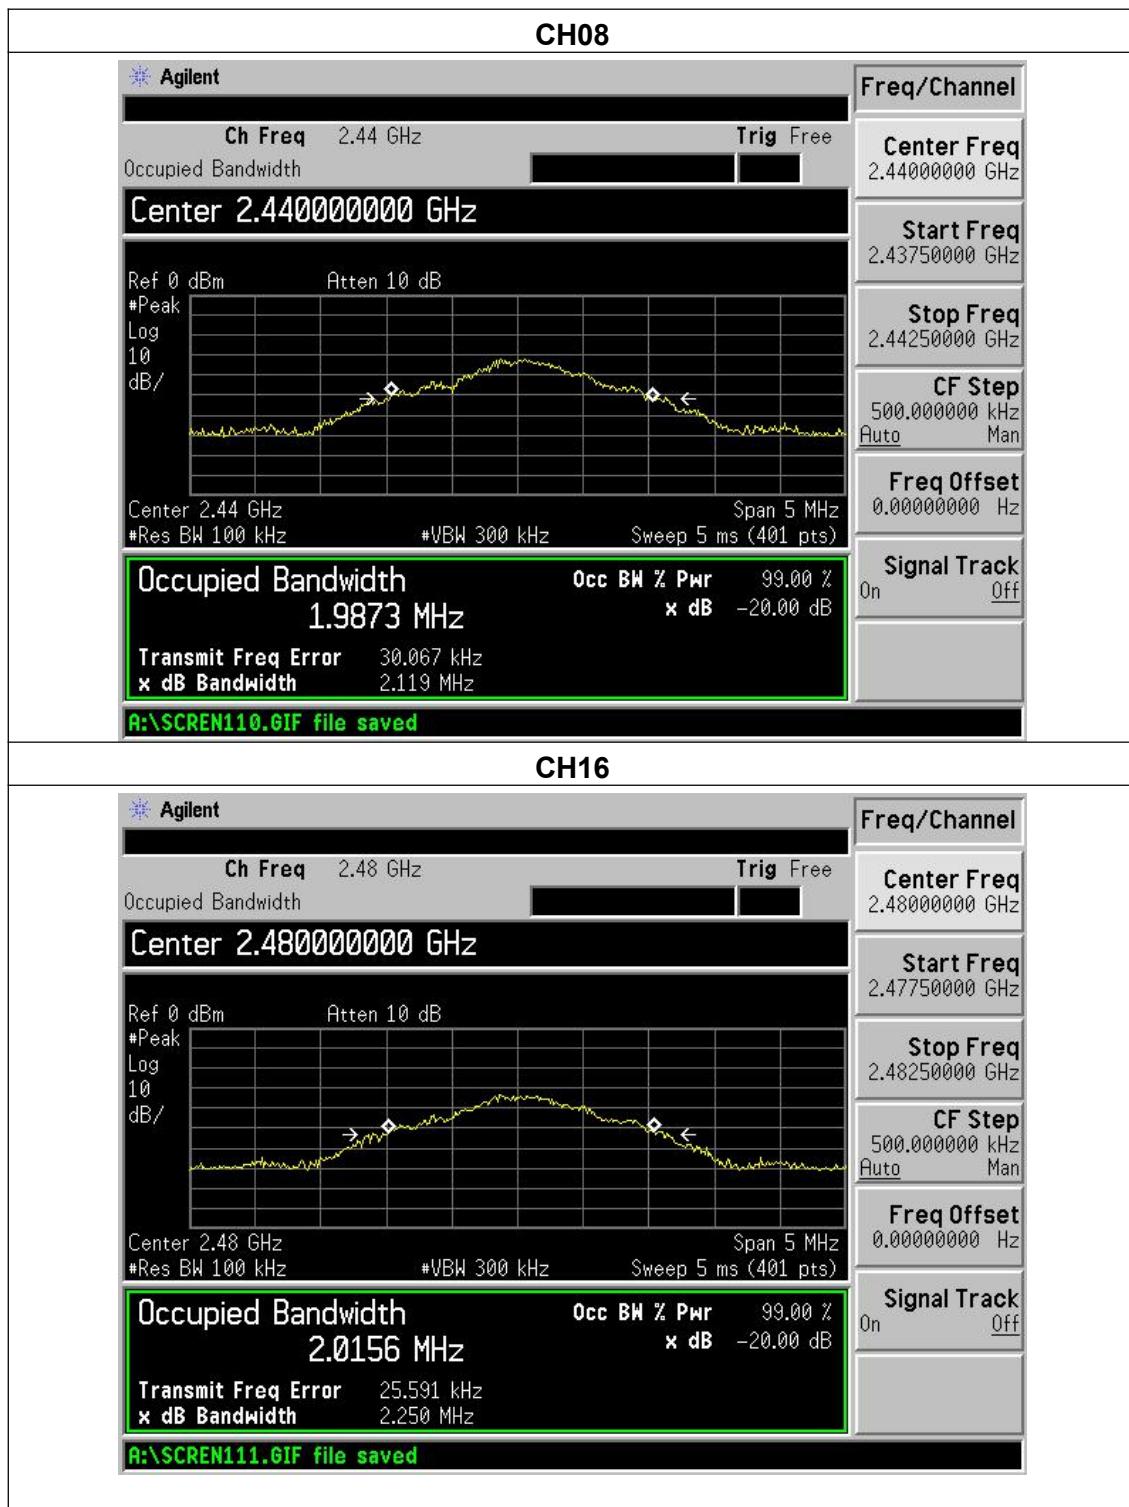



## **. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **TEST PROCEDURE**

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.


**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

## DEVIATION FROM STANDARD

No deviation.

## TEST SETUP

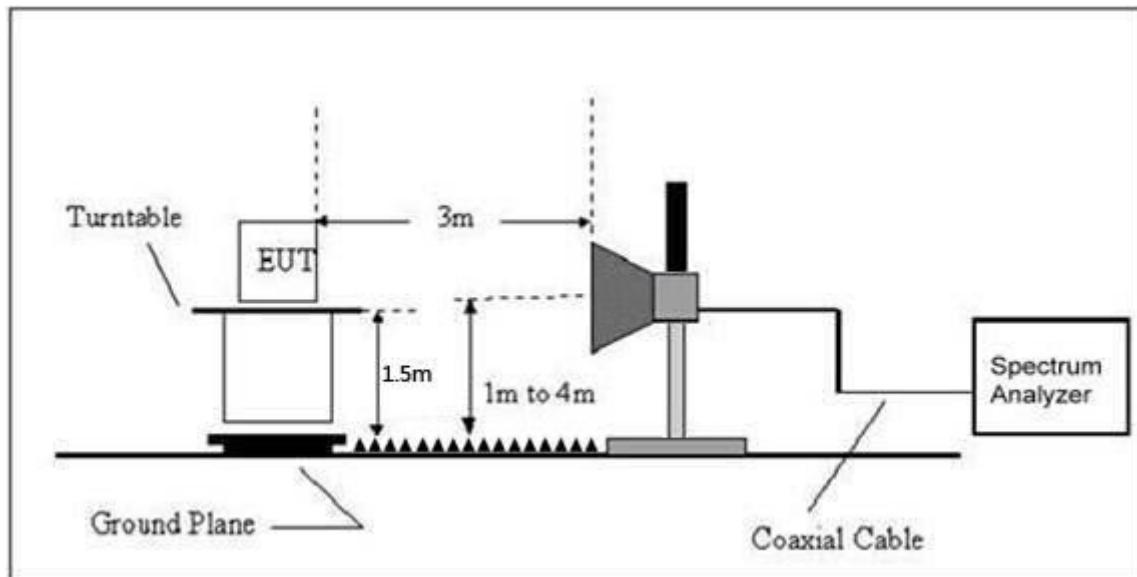

## EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## TEST RESULTS


Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3V Battery
Test Mode :	CH01/ CH16		

	Frequency (MHz)	Antenna polarization (H/V)	Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission	Emission	Band edge Limit		Result
						PK	AV	PK	AV	
GFSK	<2400	H	2390.00	58.51	-4.71	53.80	38.78	74.00	54.00	Pass
	<2400	V	2390.00	51.22	-4.71	46.51	31.53	74.00	54.00	Pass
	<2400	H	2400.00	76.80	-4.77	72.03	57.02	74.00	54.00	Pass
	<2400	V	2400.00	68.89	-4.77	64.12	49.15	74.00	54.00	Pass
	>2483.5	H	2483.50	64.30	-5.08	59.22	44.19	74.00	54.00	Pass
	>2483.5	V	2483.50	61.02	-5.08	55.94	40.98	74.00	54.00	Pass
	>2483.5	H	2485.50	60.03	-5.08	54.95	39.97	74.00	54.00	Pass
	>2483.5	V	2485.50	57.01	-5.08	51.93	36.91	74.00	54.00	Pass


1




## 2402MHz Horizontal

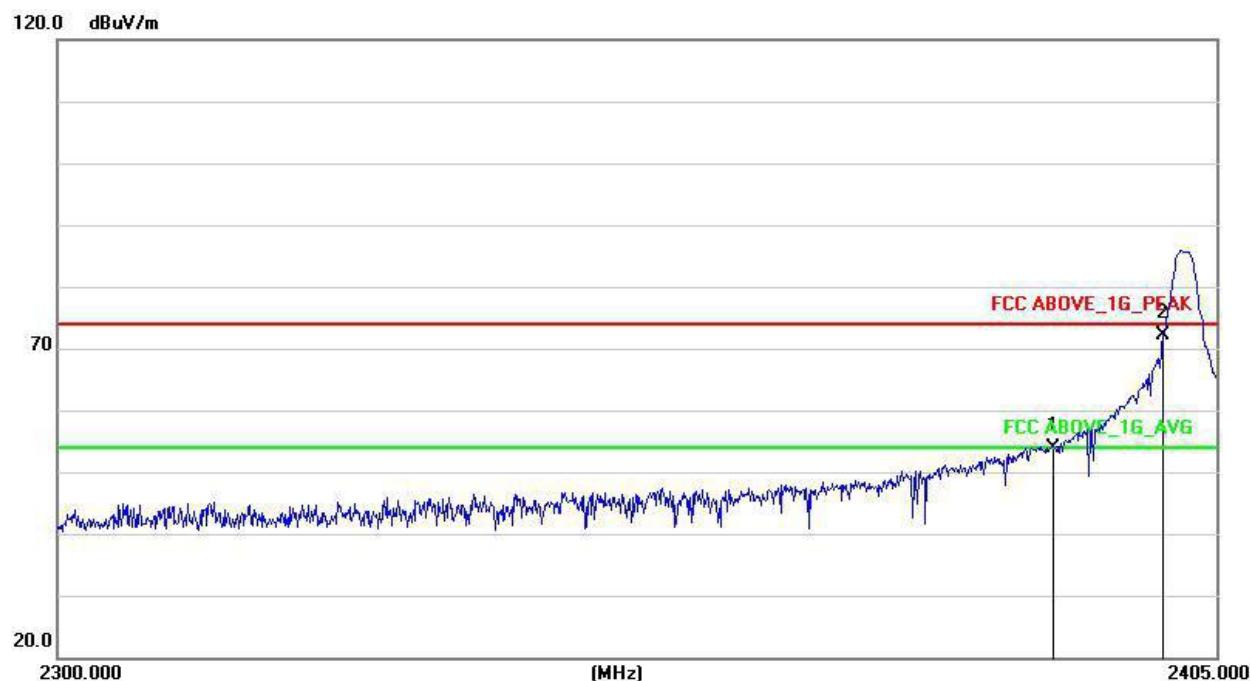


## 2402MHz Vertical

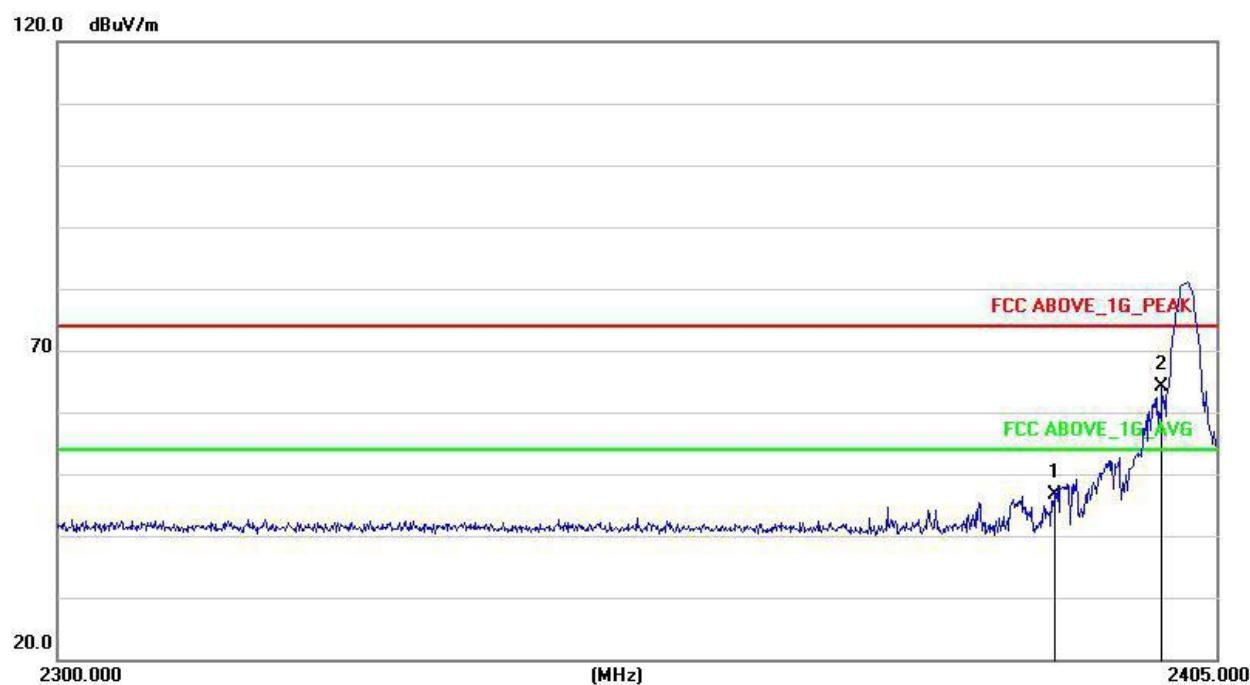

## 2480MHz Horizontal

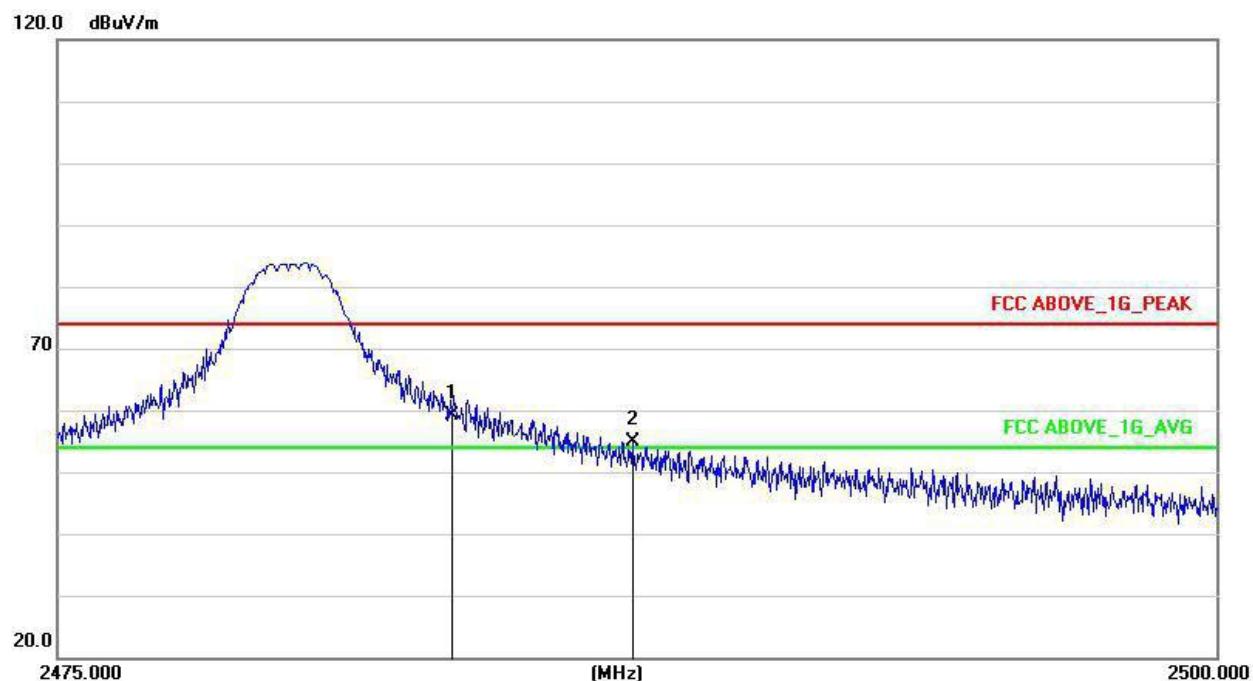

## 2480MHz Vertical

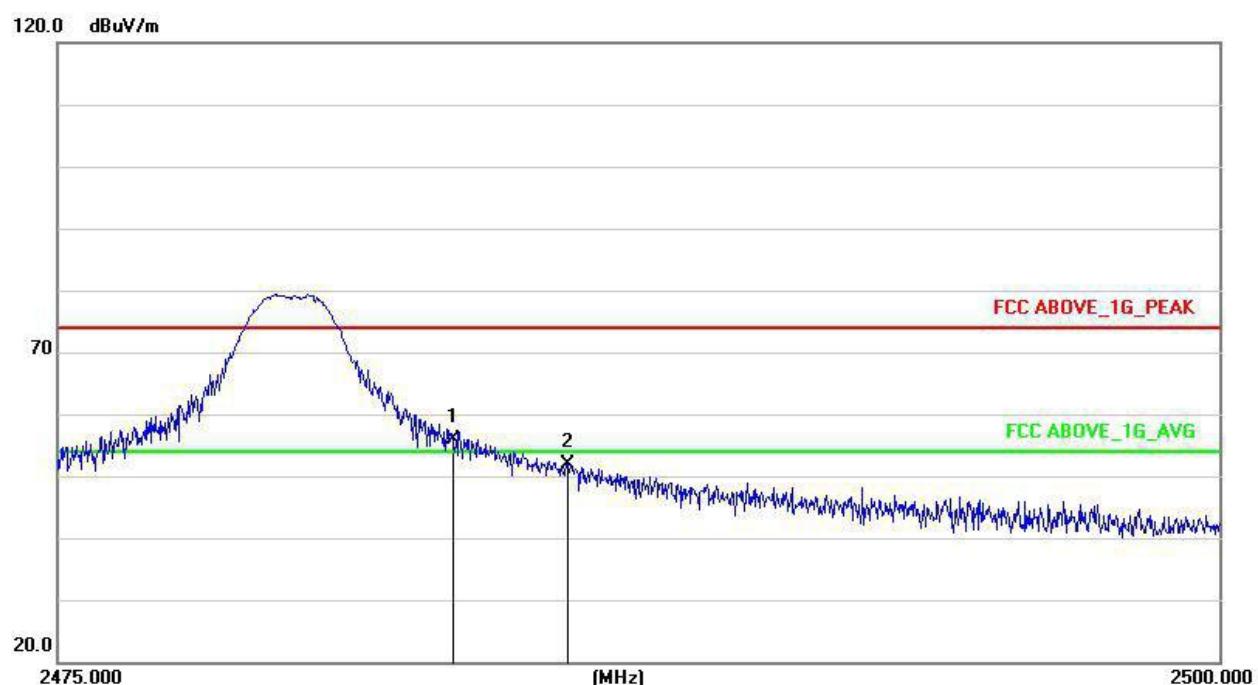




## **. ANTENNA REQUIREMENT**


### **STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **EUT ANTENNA**

The EUT antenna is PCB antenna. It complies with the standard requirement.

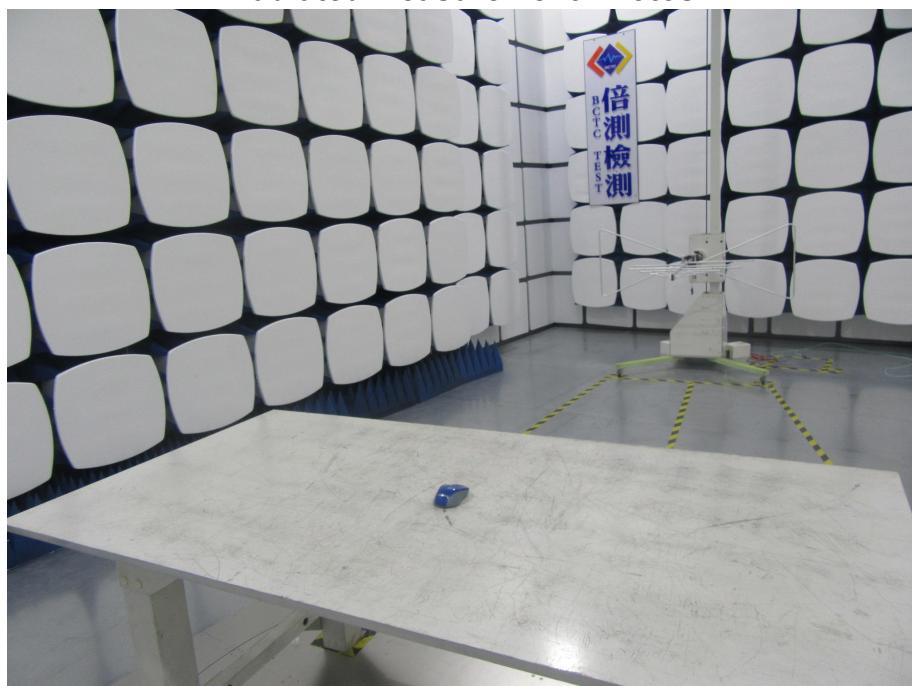**. EUT TEST PHOTO****Conducted Measurement Photos****Radiated Measurement Photos**

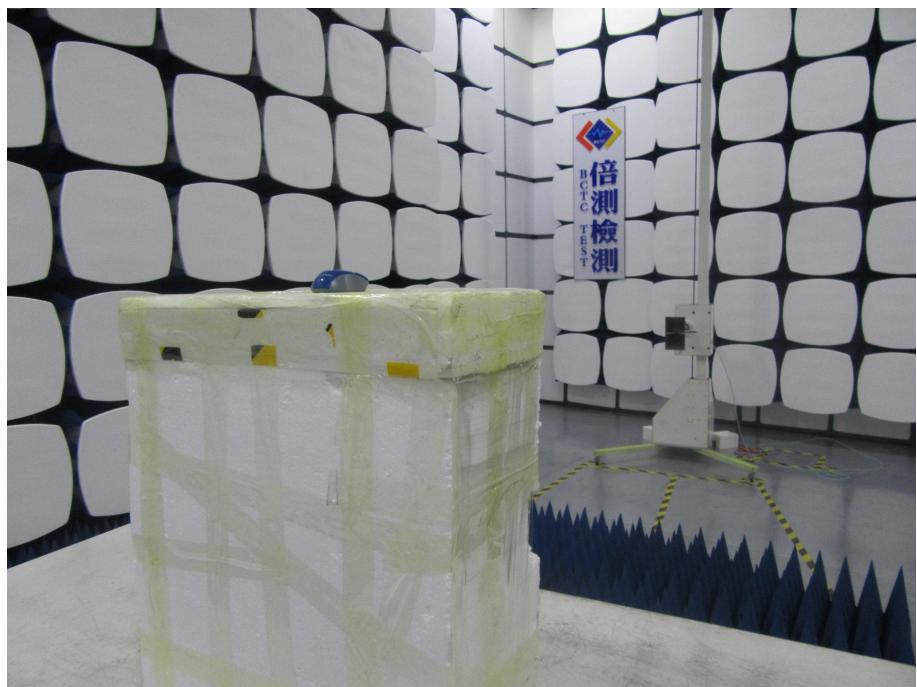



. EUT PHOTO



\*\*\*\*\* END OF REPORT \*\*\*\*\*



\*\*\*\*\* END OF REPORT \*\*\*\*\*