

RF TEST REPORT



Report No.: 16071505-FCC-R2 V2

Supersede Report No.: N/A

Applicant	Cedar Kingdom Corporation Limited	
Product Name	Feature phone	
Model No.	V105	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	Dec 31, 2016 to Jan 04, 2017	
Issue Date	Jan 16, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		
Loren Luo	David Huang	
Loren Luo Test Engineer	David Huang Checked By	
<p>This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16071505-FCC-R2 V2
Page	3 of 59

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME)	24
6.7 BAND EDGE & RESTRICTED BAND	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND	42
ANNEX A. TEST INSTRUMENT.....	48
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	49
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	54
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	58
ANNEX E. DECLARATION OF SIMILARITY	59

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16071505-FCC-R2	NONE	Original	Jan 05, 2017
16071505-FCC-R2 V1	V1	Updated the test date	Jan 13, 2017
16071505-FCC-R2 V2	V2	Updated the product name	Jan 16, 2017

2. Customer information

Applicant Name	Cedar Kingdom Corporation Limited
Applicant Add	11/F,AXA Centre 151 Gloucester Road,Wanchai
Manufacturer	Cedar Kingdom Corporation Limited
Manufacturer Add	11/F,AXA Centre 151 Gloucester Road,Wanchai

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Feature phone
Main Model:	V105
Serial Model:	N/A
Date EUT received:	Dec 30, 2016
Test Date(s):	Dec 31, 2016 to Jan 04, 2017
Equipment Category :	DSS
Antenna Gain:	GSM850: -0.21dBi PCS1900: -0.39dBi Bluetooth:-5.7dBi
Antenna Type:	GSM:PIFA antenna BT: Monopole antenna
Type of Modulation:	GSM / GPRS: GMSK Bluetooth: GFSK, π /4DQPSK, 8DPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz Bluetooth: 2402-2480 MHz
Max. Output Power:	3.015dBm
Number of Channels:	GSM 850: 124CH PCS1900: 299CH Bluetooth: 79CH
Port:	USB Port, Earphone Port

Adapter:

Model: V105

Input: AC100-240V~50/60Hz,0.15A

Output: DC 5.0V,500mA

Input Power:

Battery:

Model: V105

Spec: 3.7V,800mAh(2.96Wh)

Voltage: 4.2V

Trade Name : VIRZO

GPRS Multi-slot class 8/10/12

FCC ID: 2AKQUVZCK105

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached Monopole antenna for Bluetooth, the gain is -5.7dBi for Bluetooth.

A permanently attached PIFA antenna for GSM/PCS, the gain is -0.21dBi for GSM850, -0.39dBi for PCS1900.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	21°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	Jan 03, 2017
Tested By :	Loren Luo

Requirement(s):

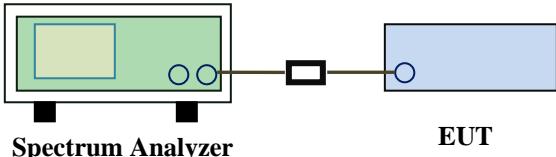Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.967	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.005	0.952	Pass
	High Channel	2480			
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.896	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.005	0.895	Pass
	High Channel	2480			
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.853	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.005	0.853	Pass
	High Channel	2480			
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

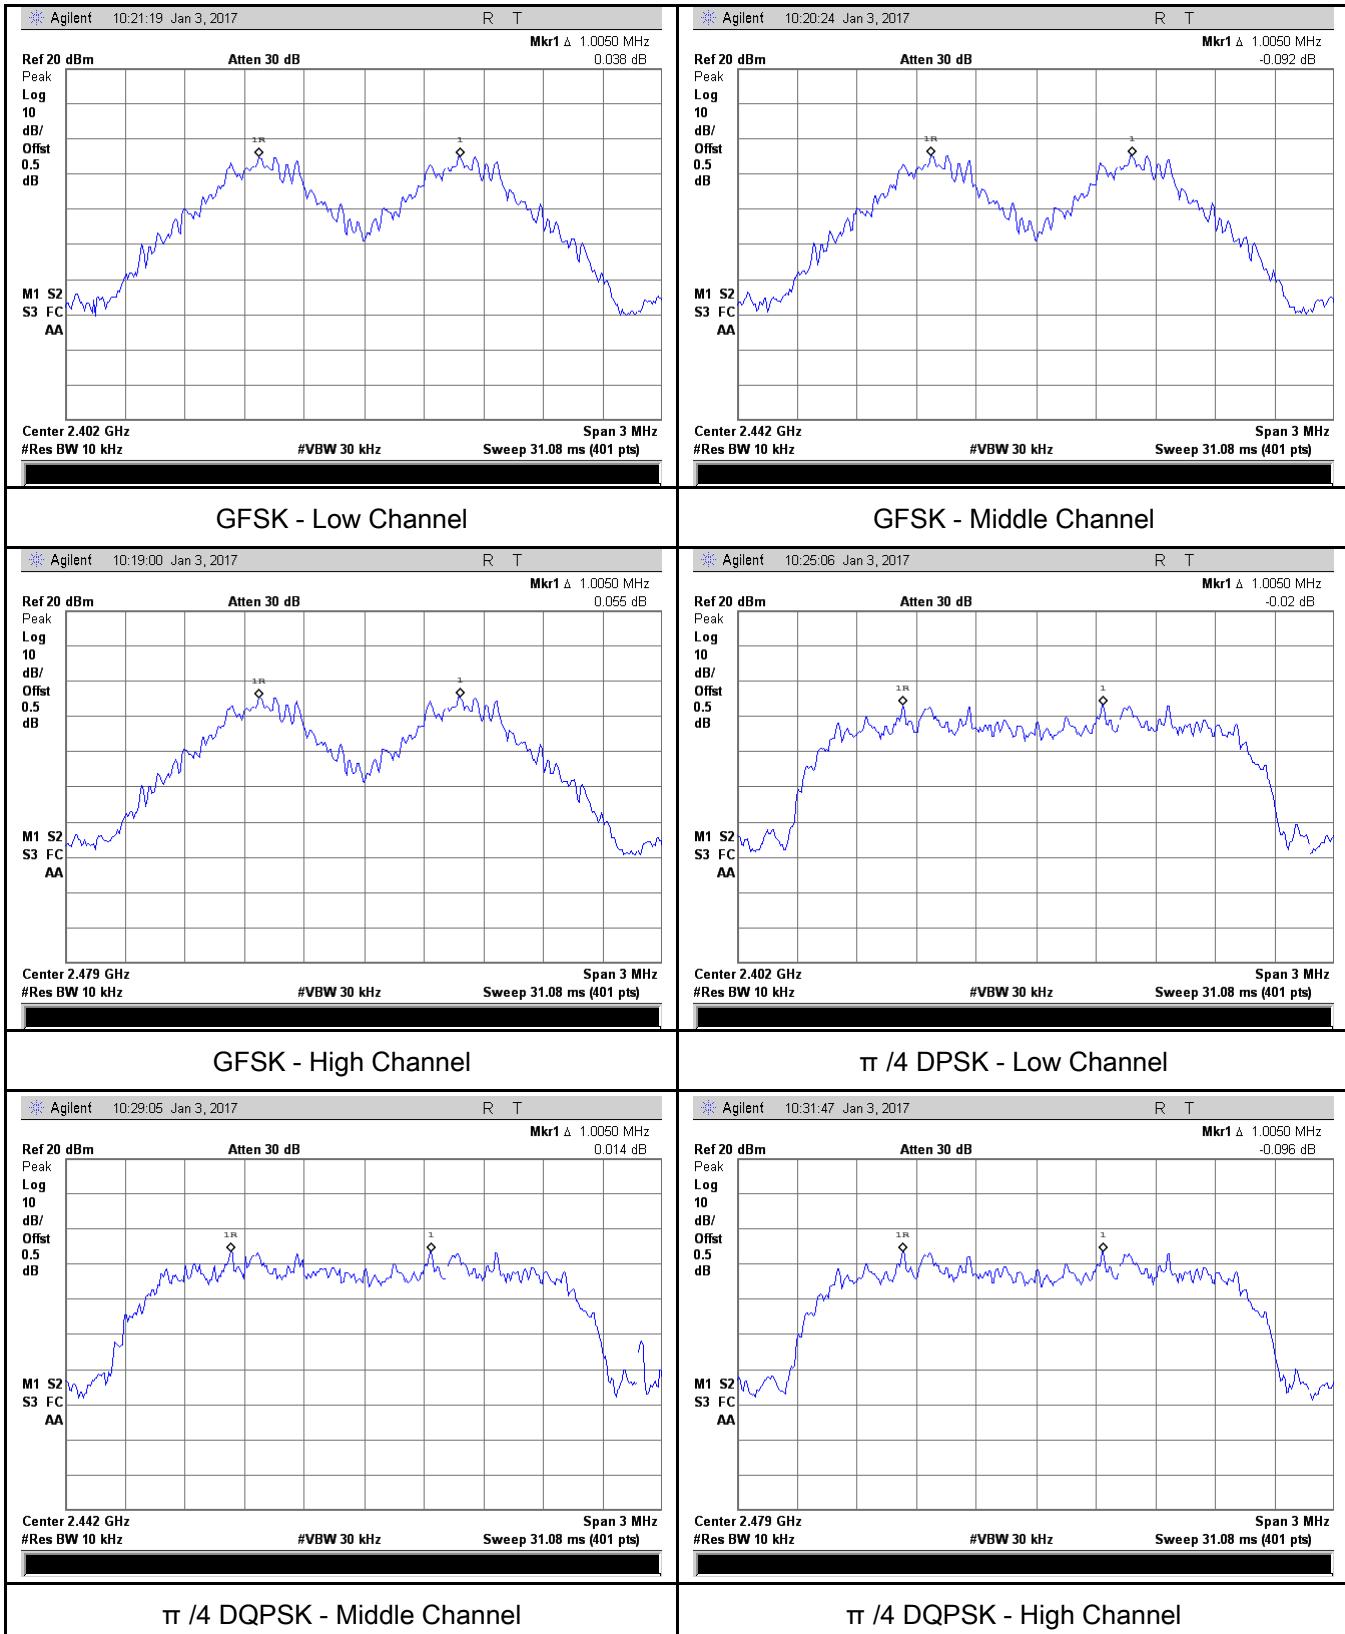


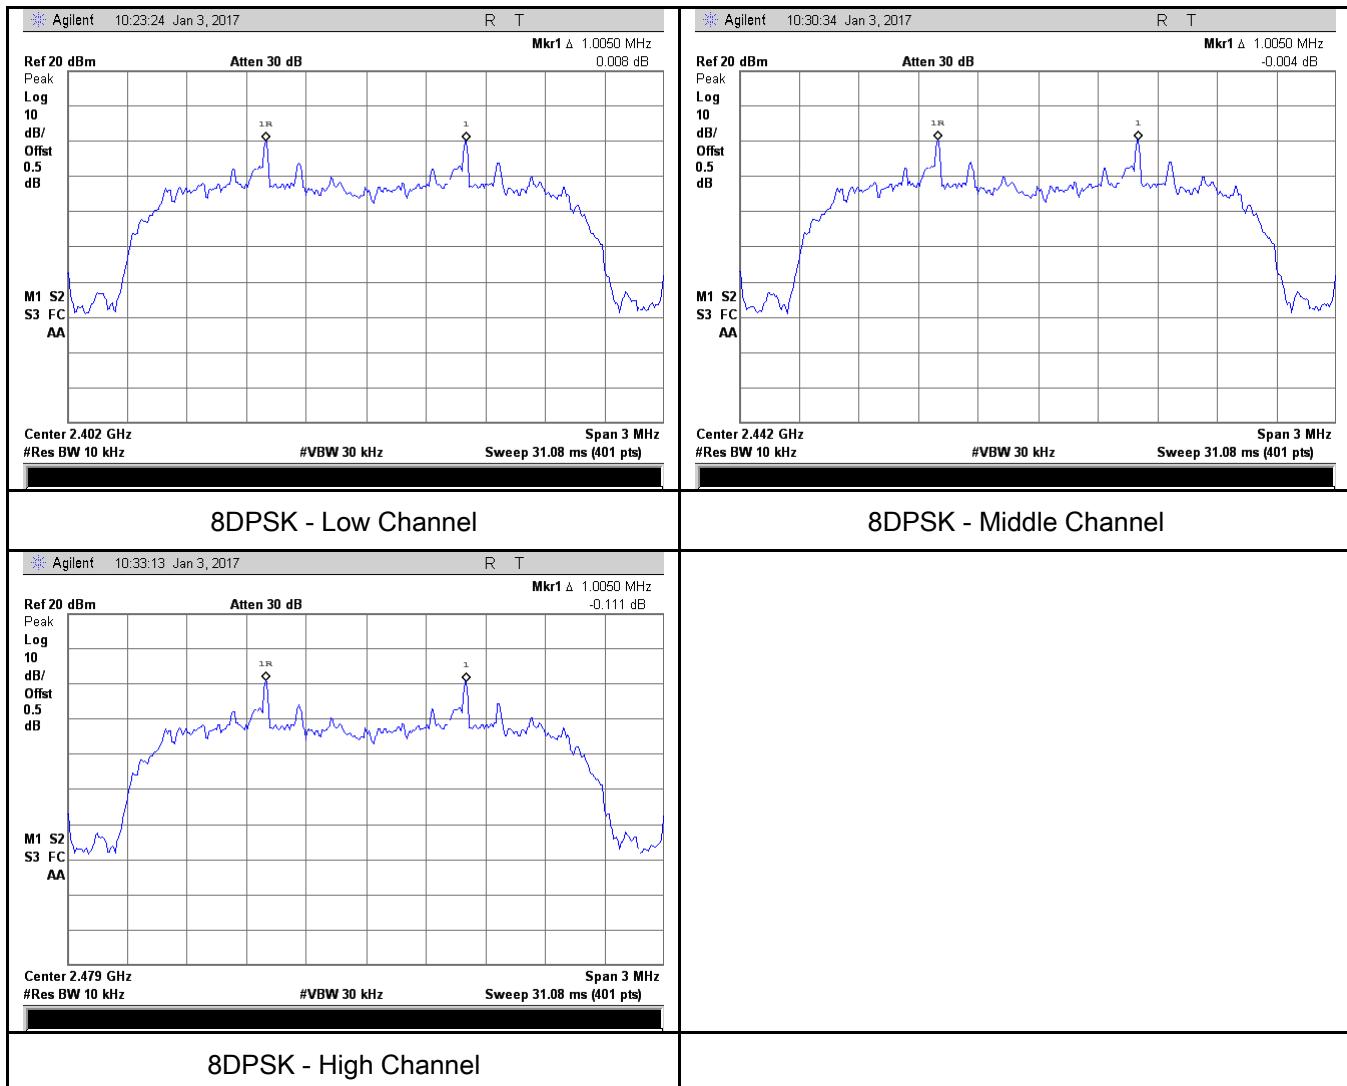

6.3 20dB Bandwidth

Temperature	21°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	Jan 03, 2017
Tested By :	Loren Luo

Requirement(s):

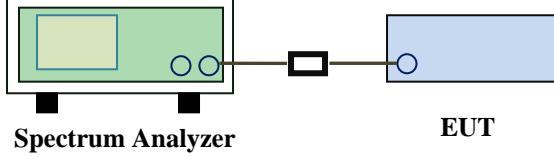Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference 		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.967	0.8625
	Mid	2441	0.952	0.8651
	High	2480	0.955	0.8640
$\pi/4$ DQPSK	Low	2402	1.344	1.1969
	Mid	2441	1.343	1.1935
	High	2480	1.344	1.1893
8-DPSK	Low	2402	1.280	1.1860
	Mid	2441	1.280	1.1848
	High	2480	1.279	1.1899

Test Plots

20dB Bandwidth measurement result

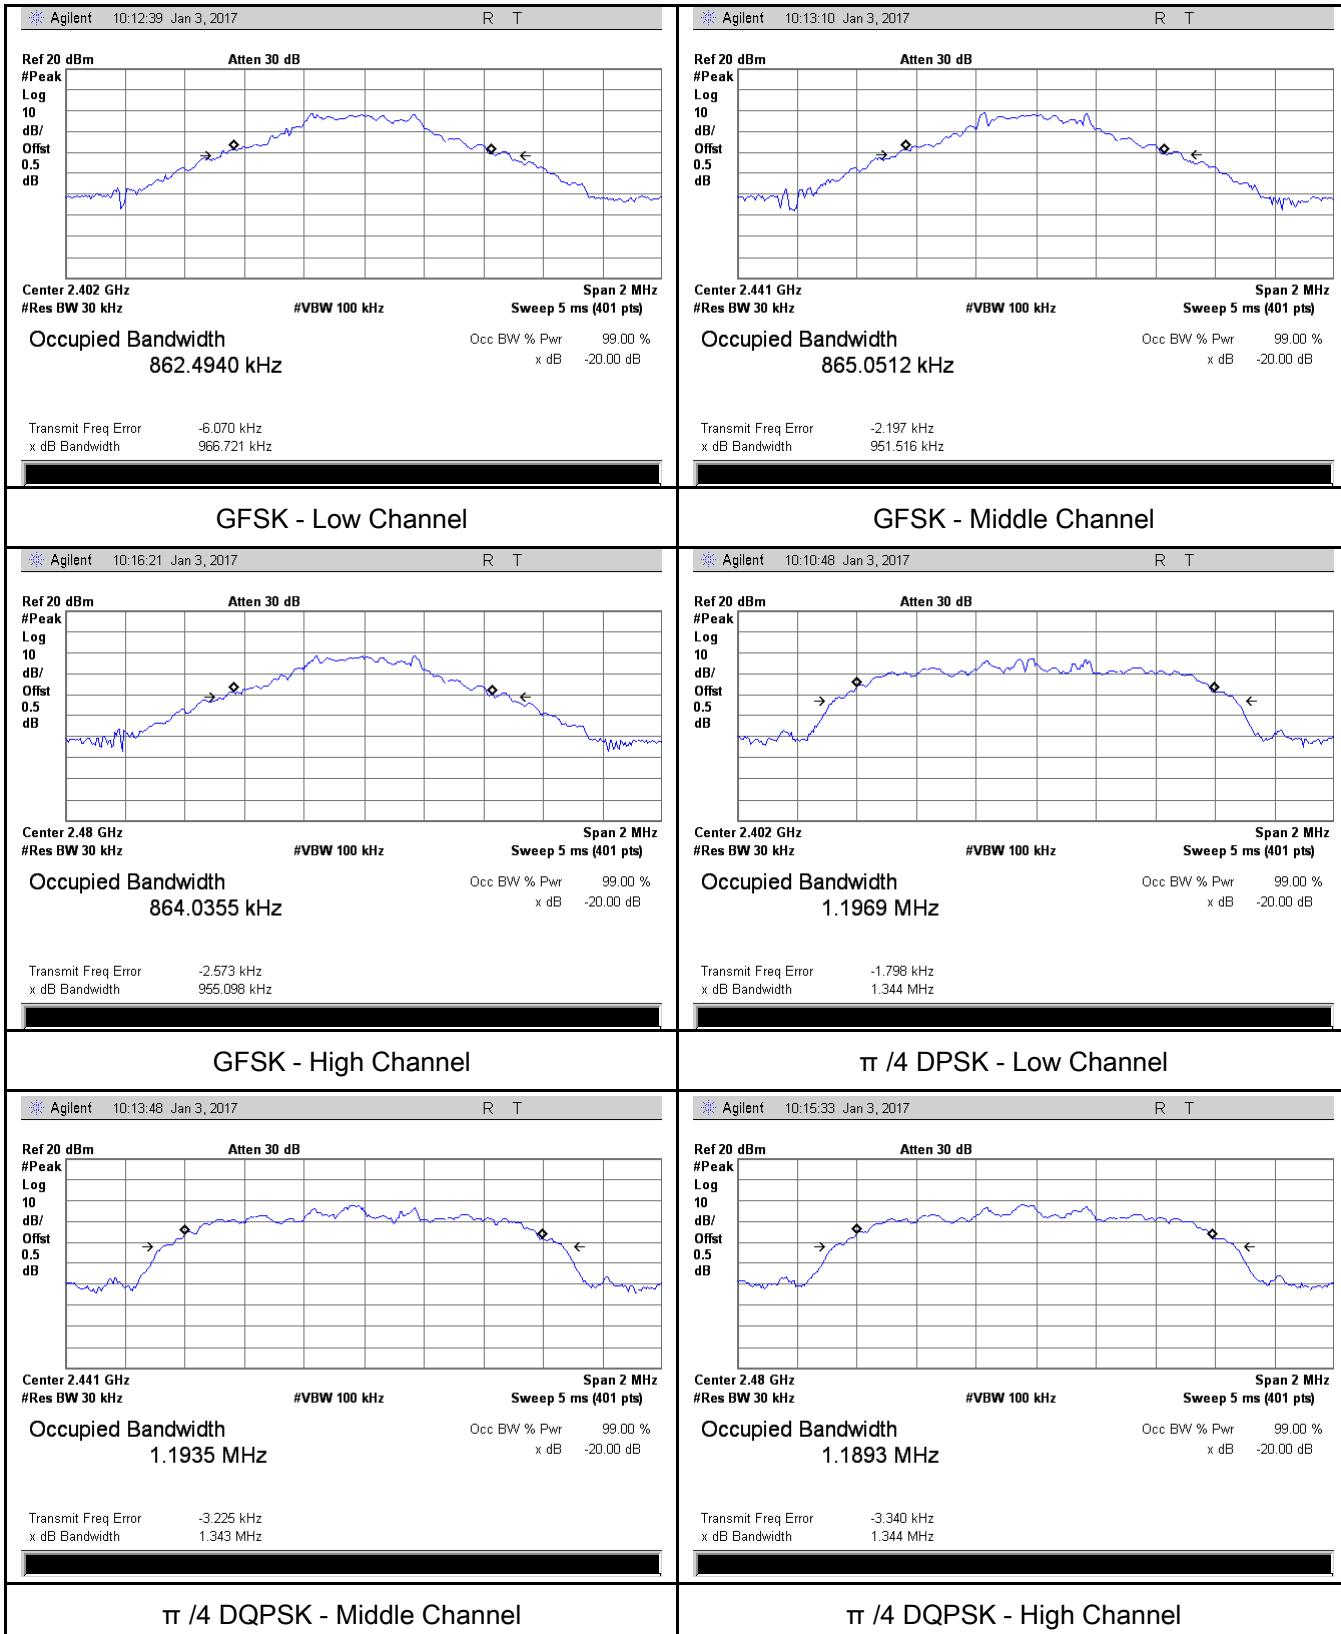


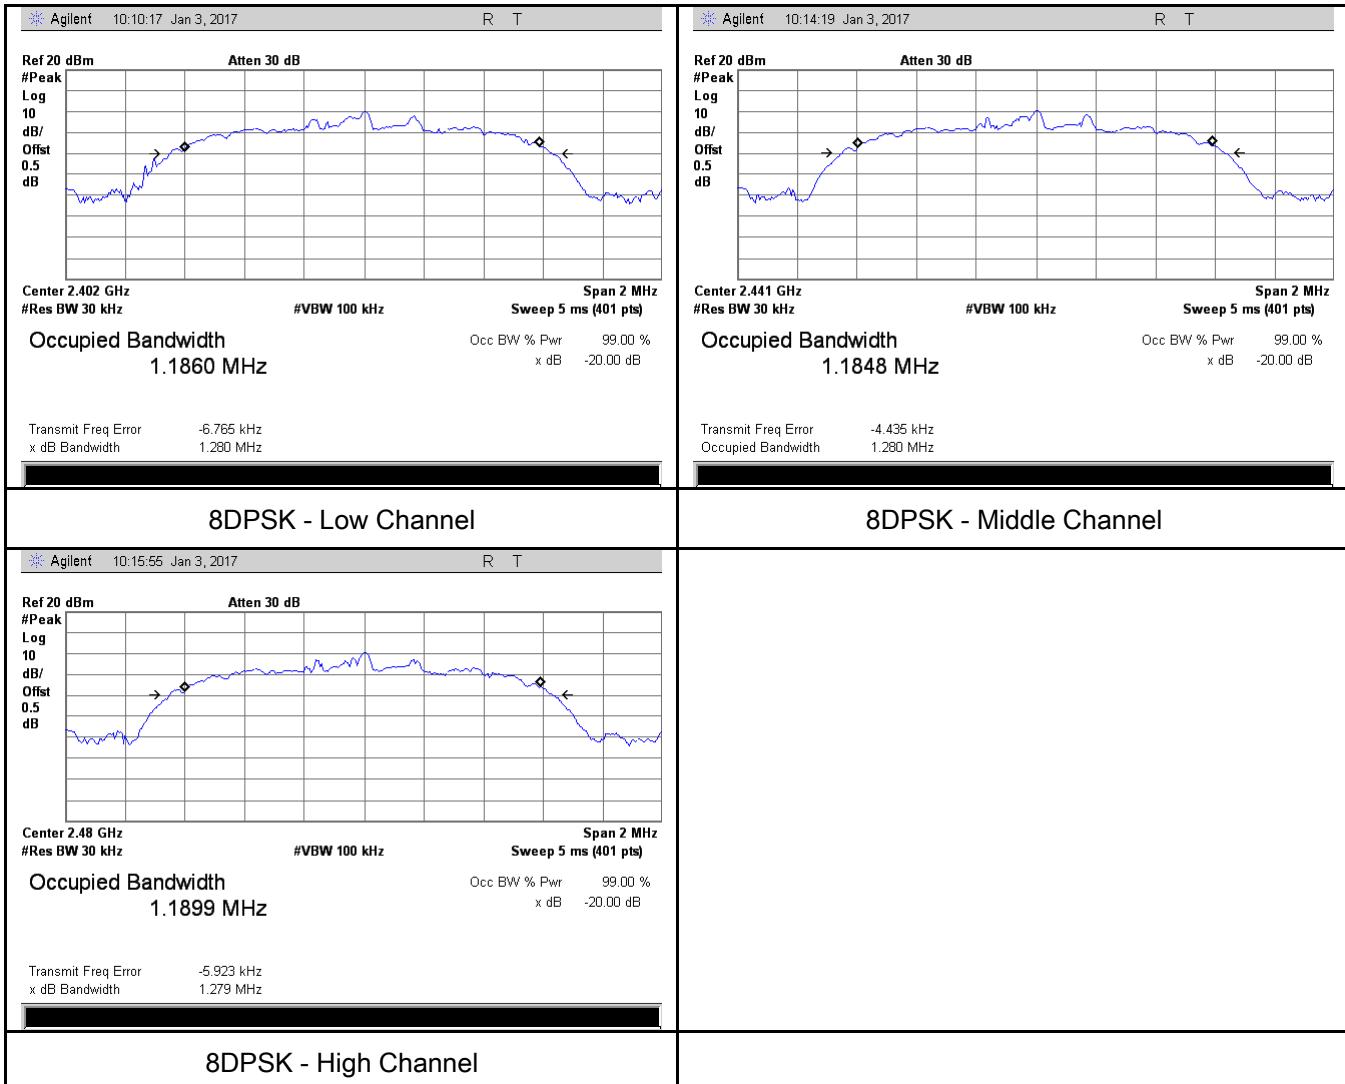

6.4 Peak Output Power

Temperature	21°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	Jan 03, 2017
Tested By :	Loren Luo

Requirement(s):

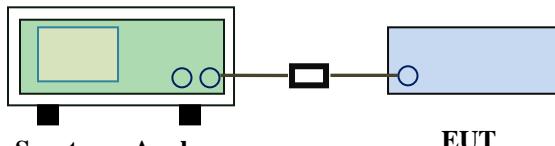Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. 	

	<ul style="list-style-type: none"> - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Peak Output Power measurement result

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	0.612	1000	Pass
		Mid	2441	0.954	1000	Pass
		High	2480	1.267	1000	Pass
	$\pi/4$ DQPSK	Low	2402	2.317	125	Pass
		Mid	2441	2.608	125	Pass
		High	2480	2.866	125	Pass
	8-DPSK	Low	2402	2.387	125	Pass
		Mid	2441	2.771	125	Pass
		High	2480	3.015	125	Pass

Test Plots

Output Power measurement result

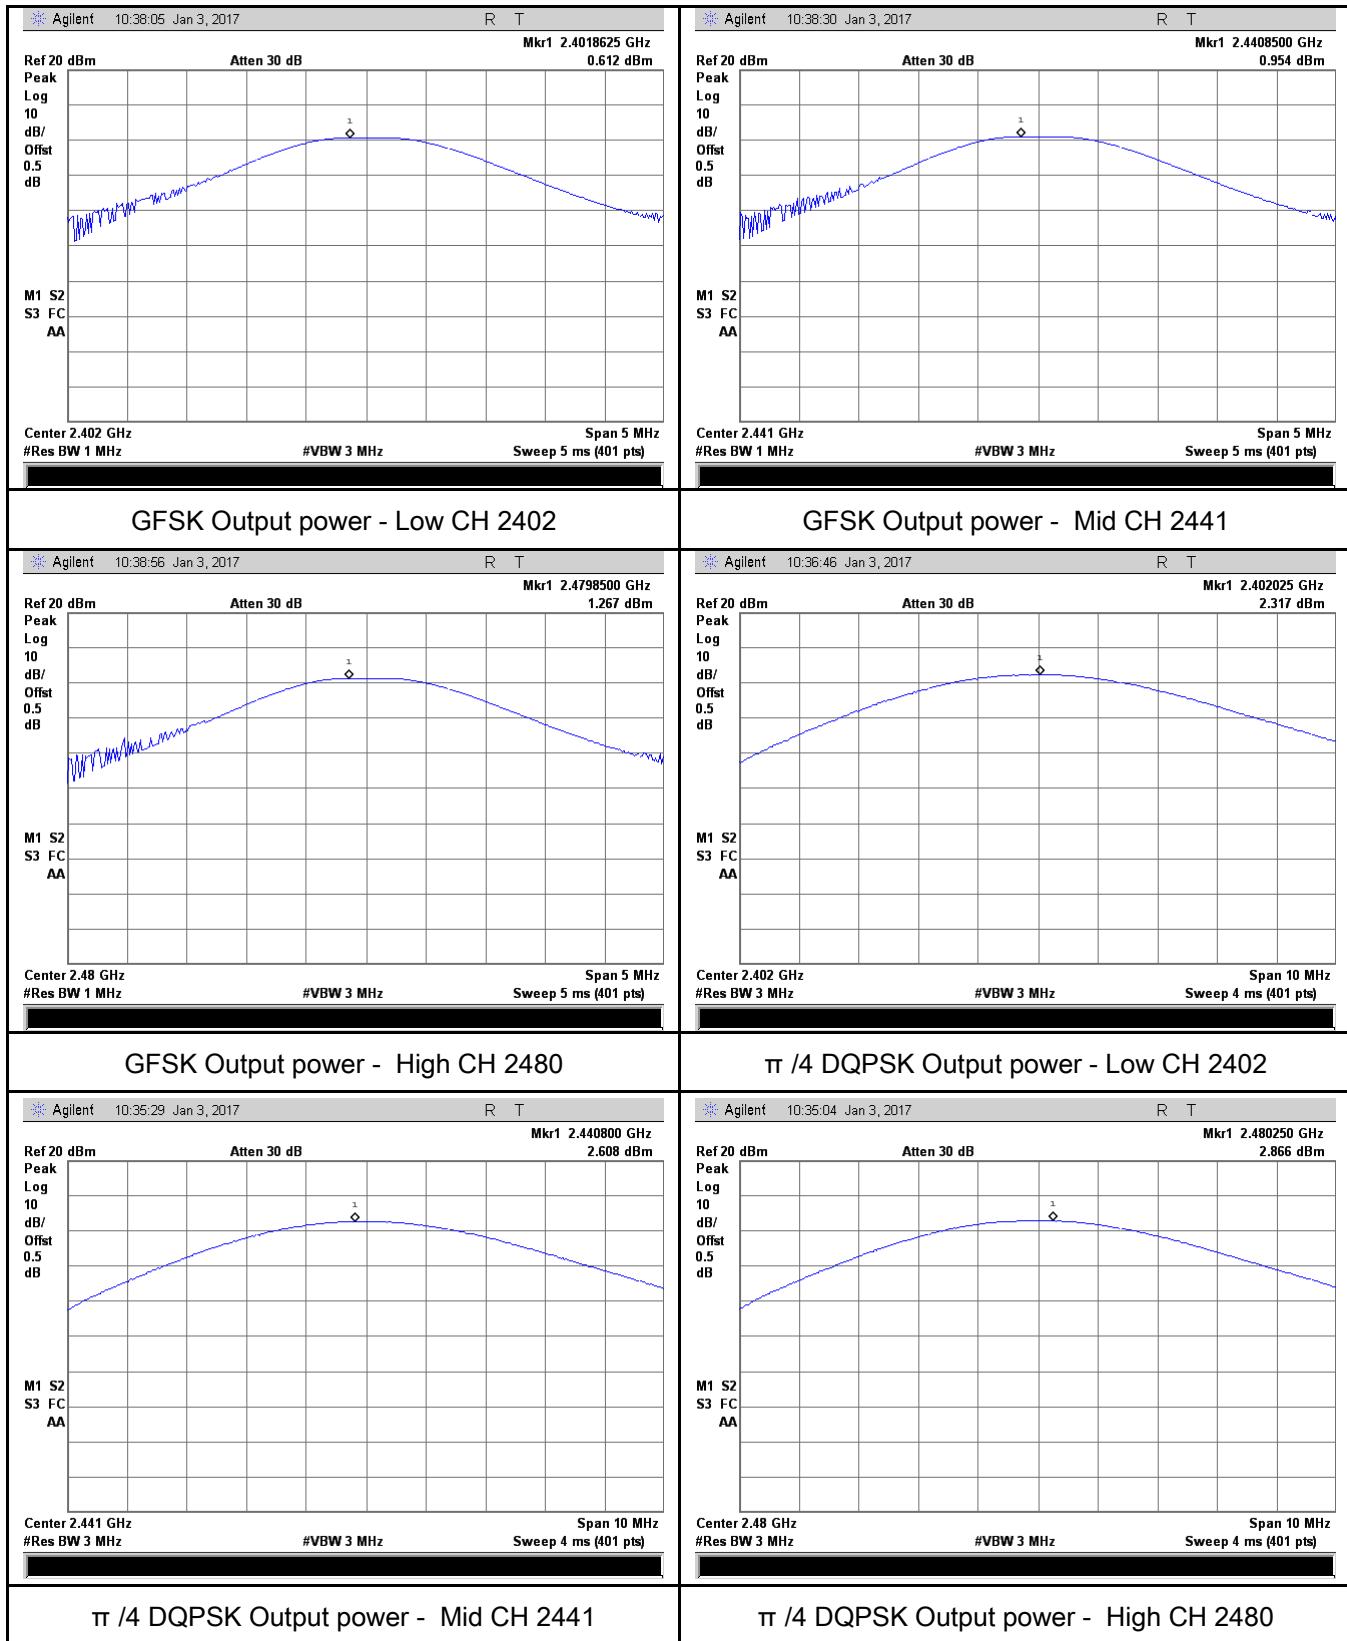


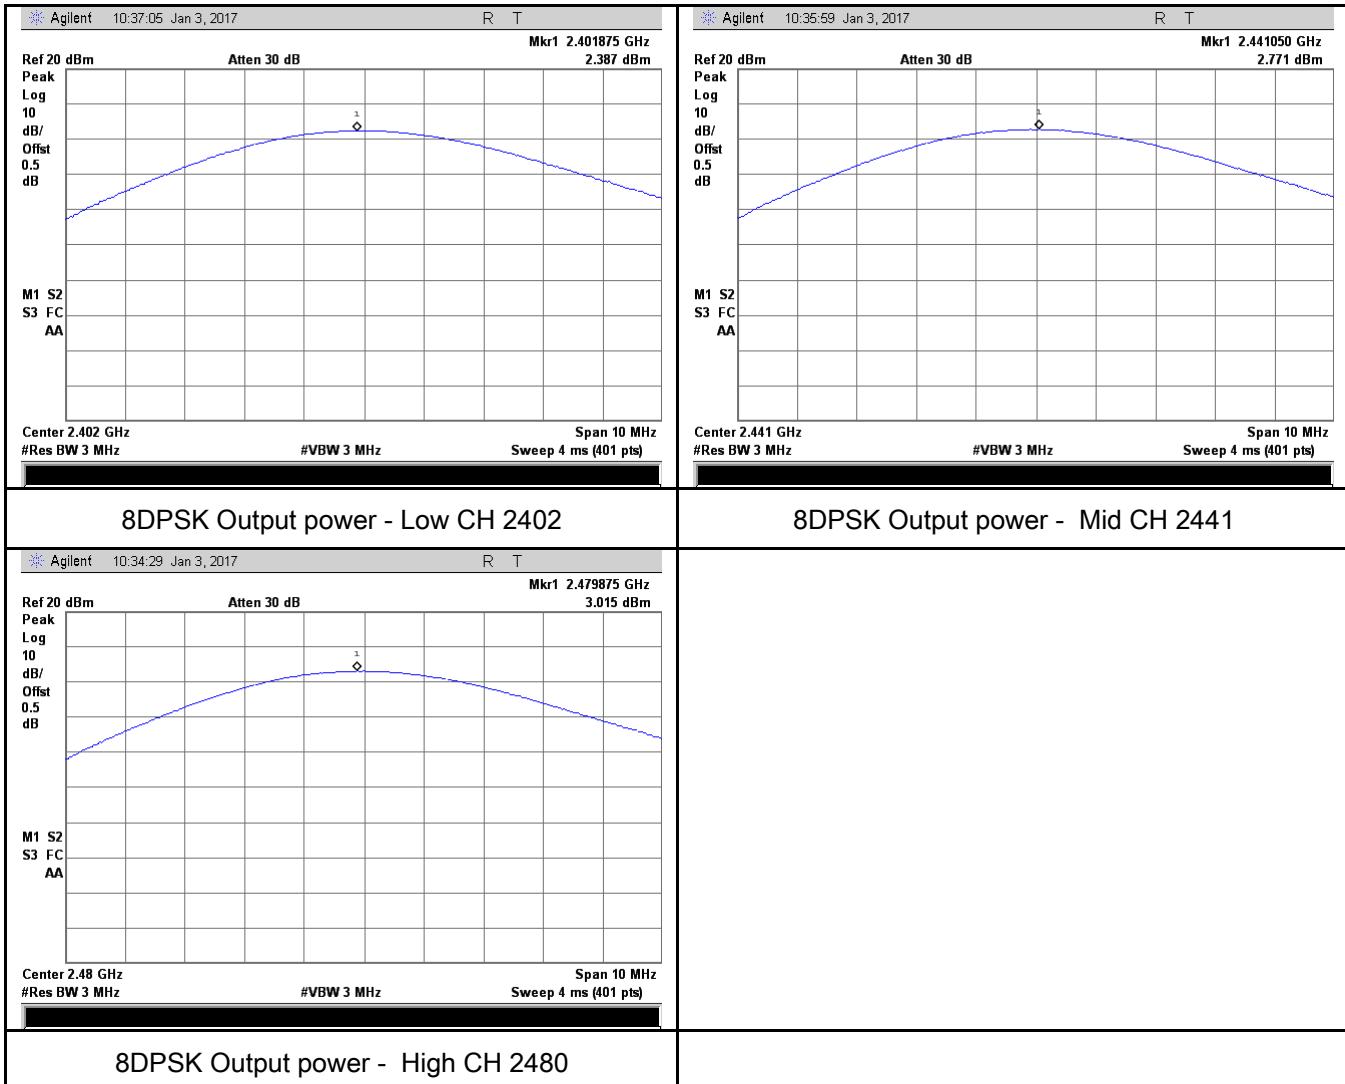

6.5 Number of Hopping Channel

Temperature	21°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	Jan 03, 2017
Tested By :	Loren Luo

Requirement(s):

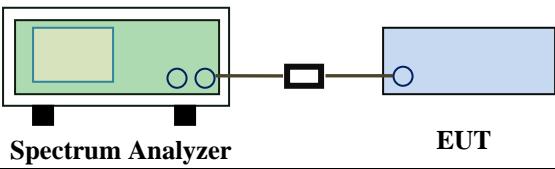
Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz \geq 15 channels	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW \geq 1% of the span - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail
Test Data	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	N/A
Test Plot	<input checked="" type="checkbox"/>	Yes (See below)	<input type="checkbox"/>	N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

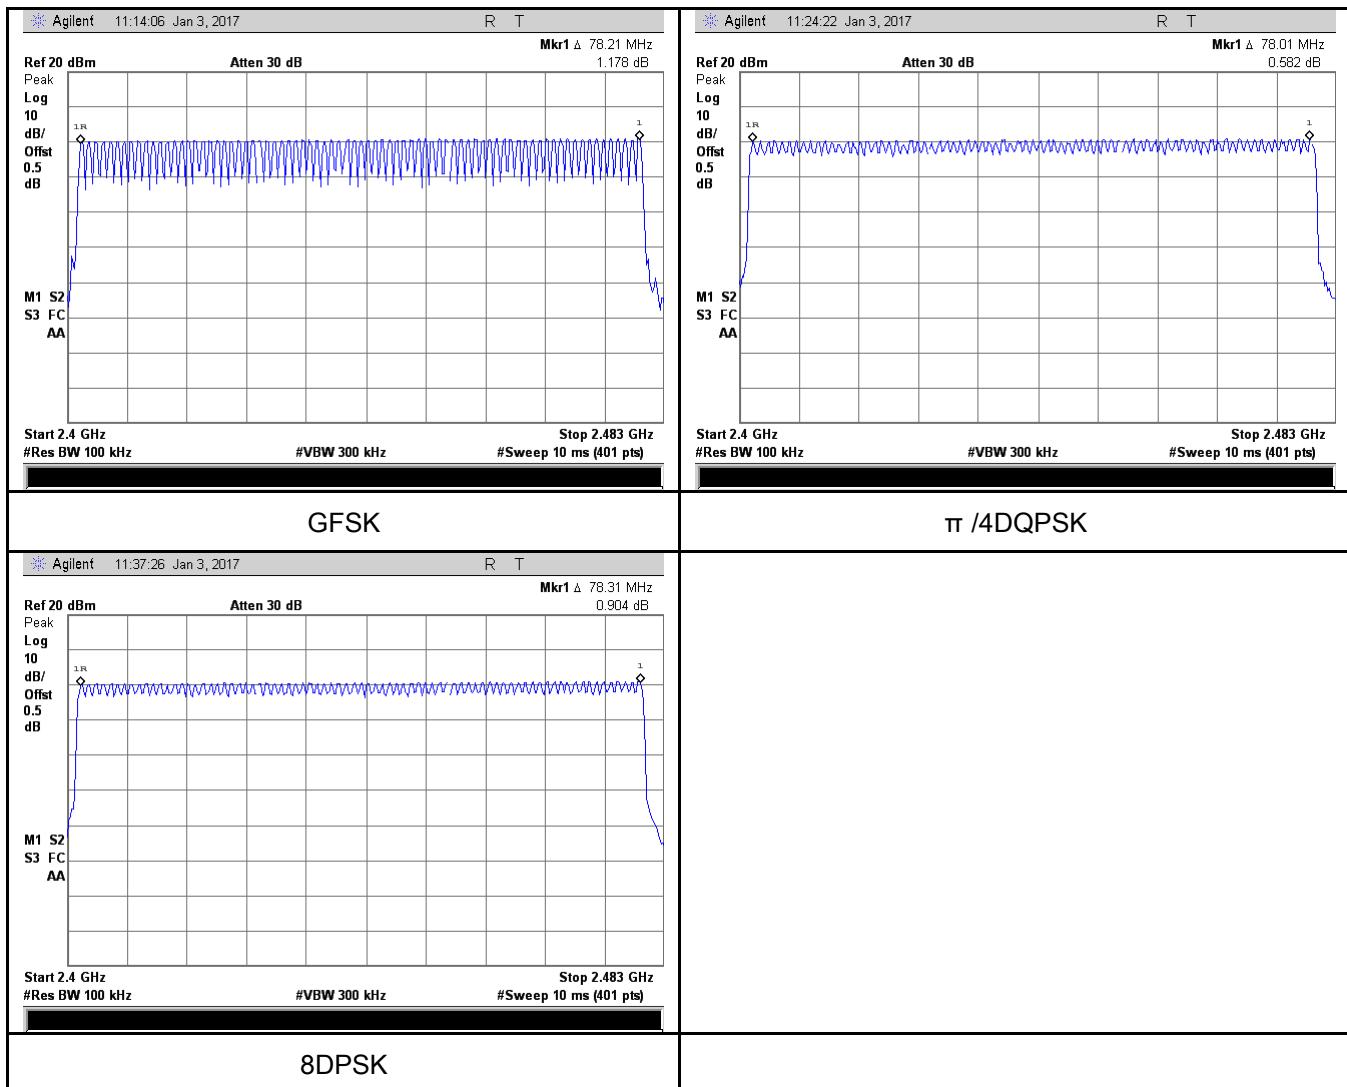

6.6 Time of Occupancy (Dwell Time)

Temperature	21°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	Jan 03, 2017
Tested By :	Loren Luo

Requirement(s):

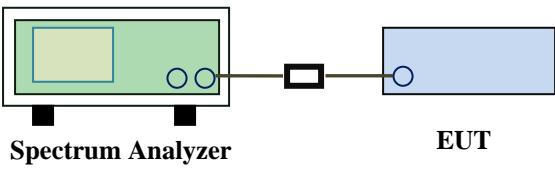Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>	
Test Setup	 Spectrum Analyzer EUT			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geq RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.900	309.333	400	Pass
		Mid	2.875	306.667	400	Pass
		High	2.875	306.667	400	Pass
	$\pi/4$ DQPSK	Low	2.850	304.000	400	Pass
		Mid	2.875	306.667	400	Pass
		High	2.875	306.667	400	Pass
	8-DPSK	Low	2.875	306.667	400	Pass
		Mid	2.850	304.000	400	Pass
		High	2.875	306.667	400	Pass

Note: Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$

Test Plots

Dwell Time measurement result

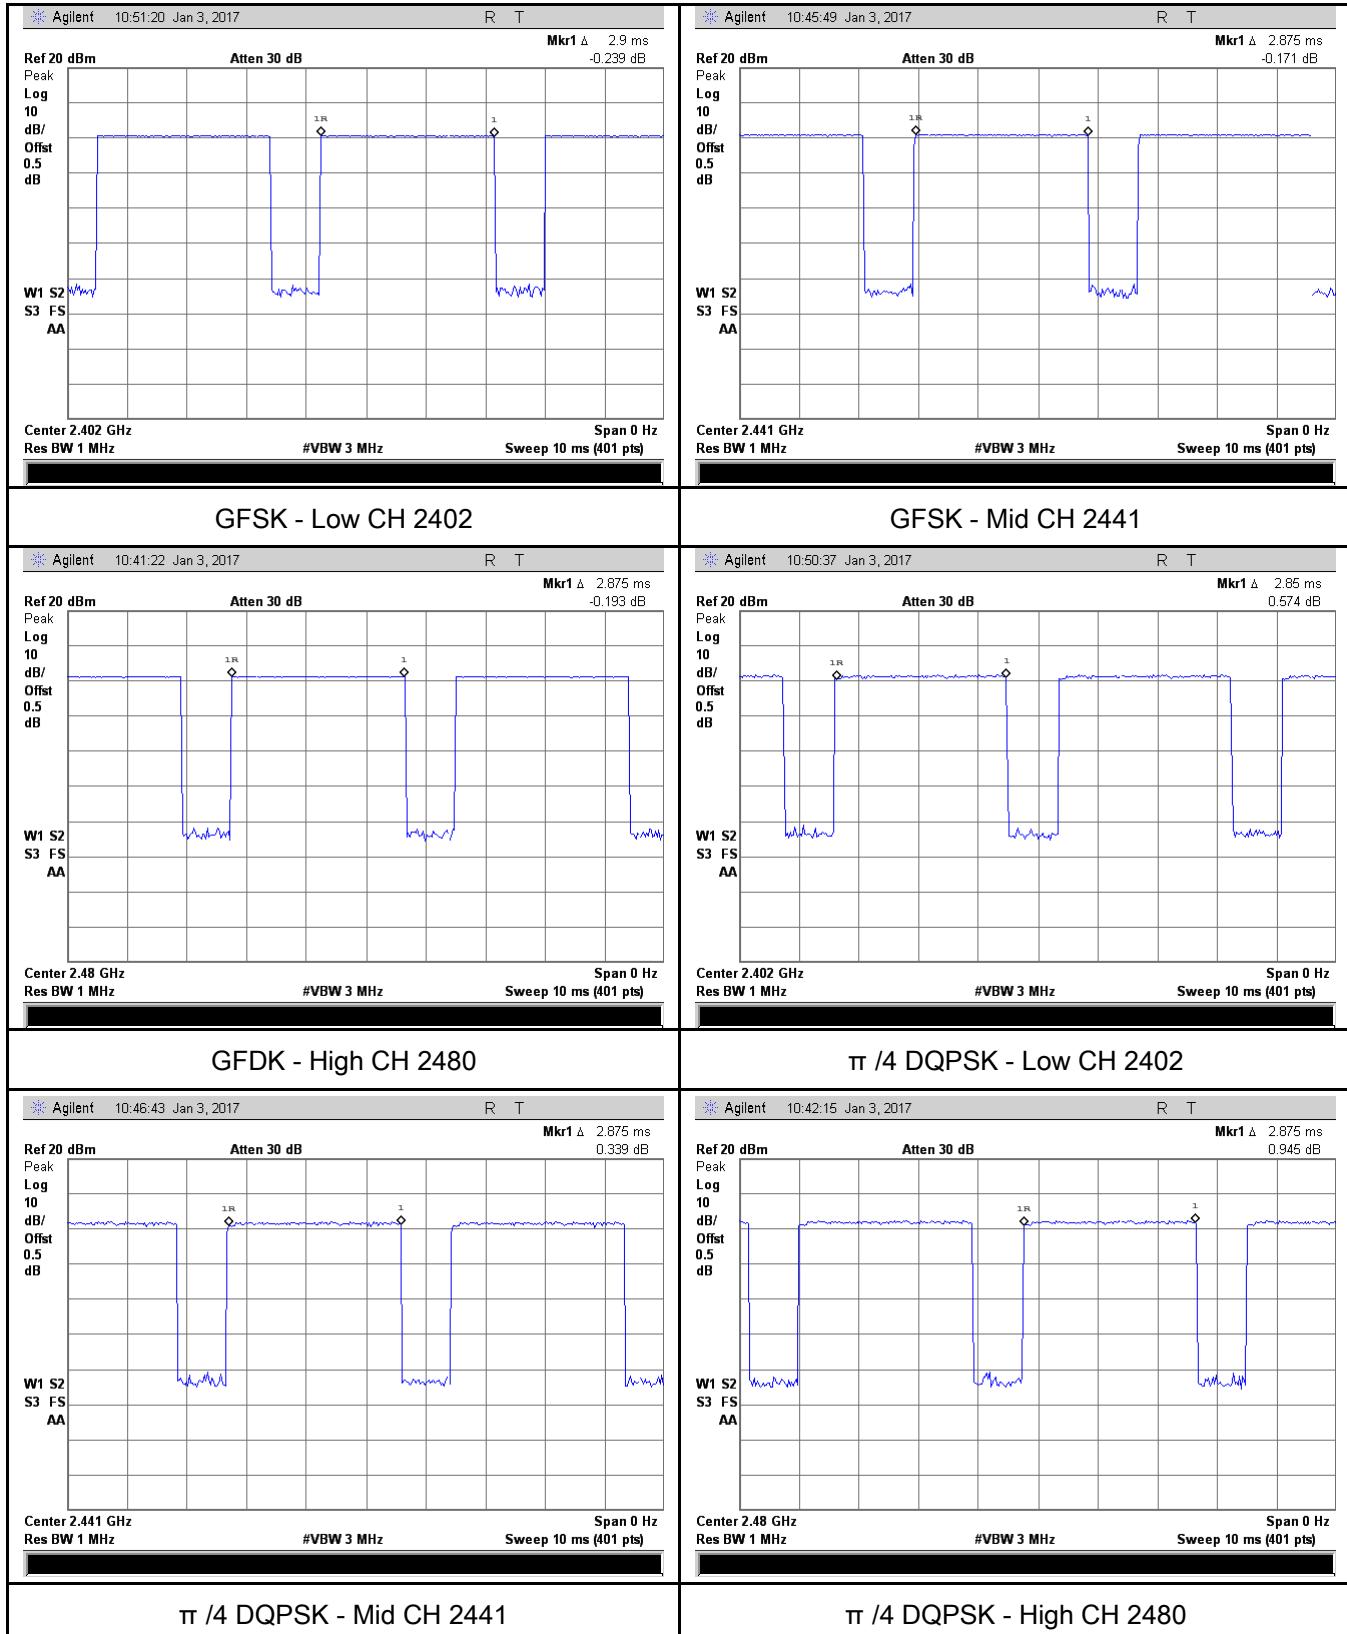


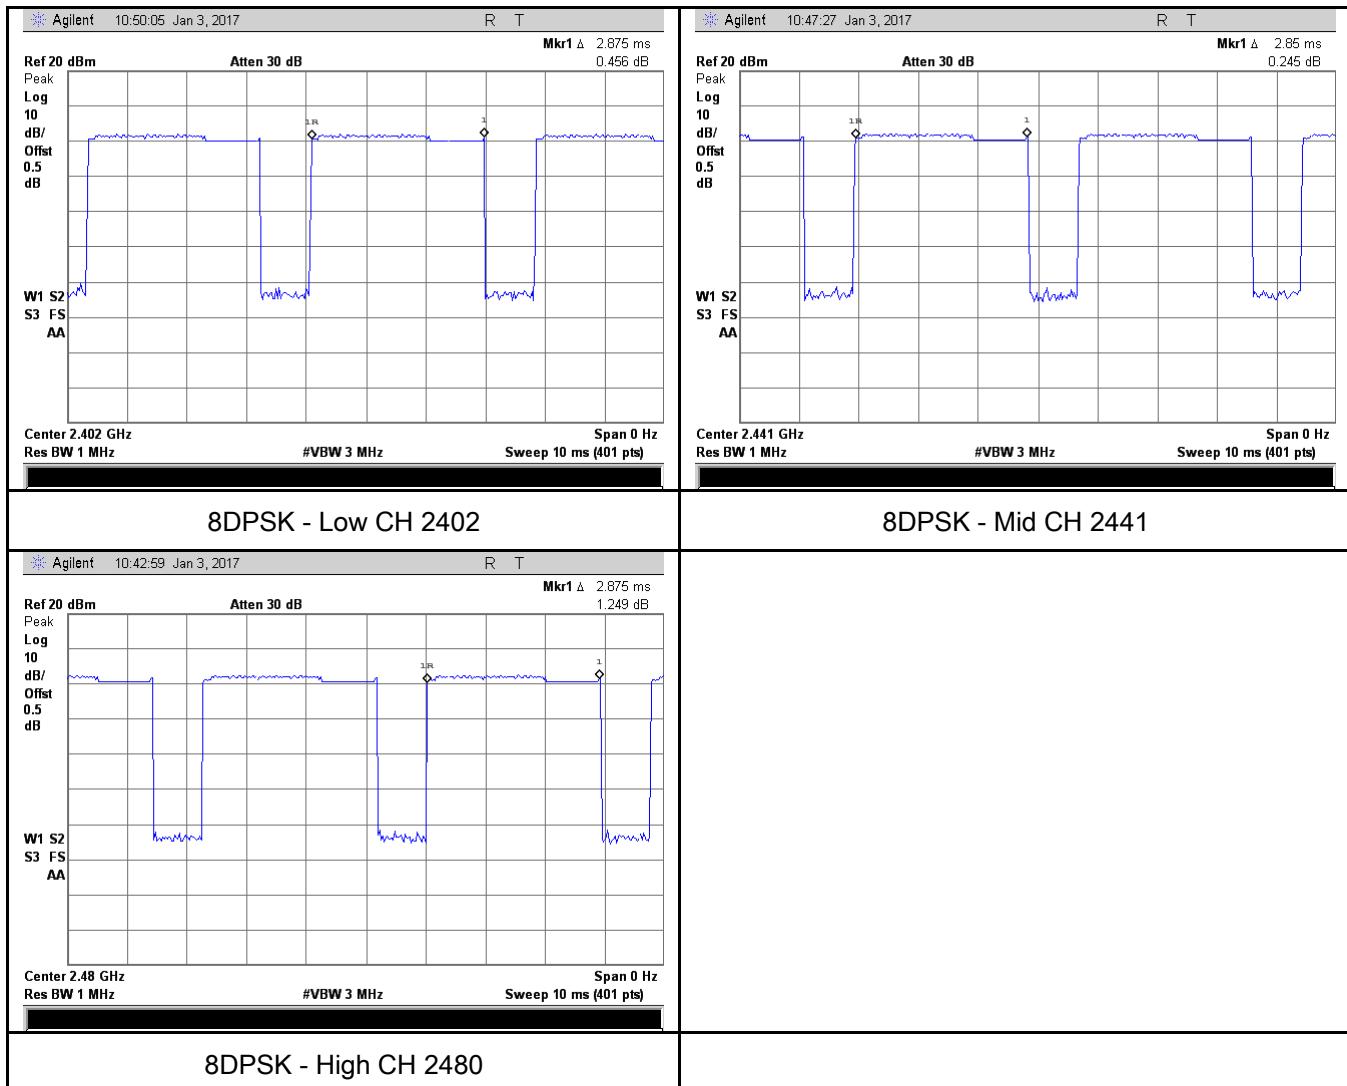

6.7 Band Edge & Restricted Band

Temperature	22°C
Relative Humidity	54%
Atmospheric Pressure	1002mbar
Test date :	Jan 04, 2017
Tested By :	Loren Luo

Requirement(s):

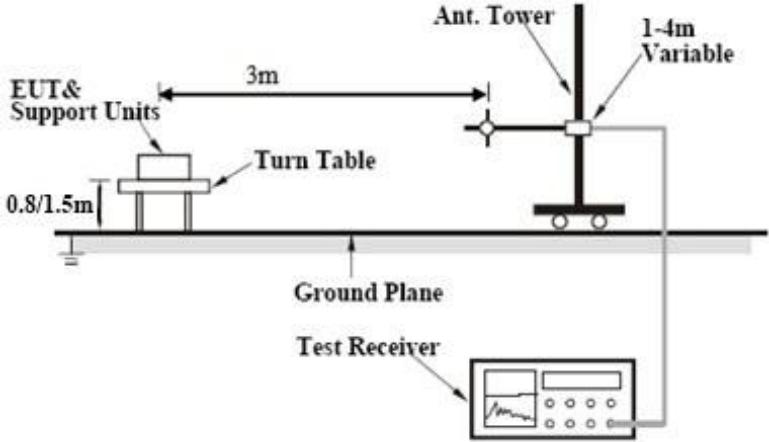Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.□	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units are positioned on a Turn Table, which is placed on a Ground Plane. The Turn Table is at a height of 0.8/1.5m. A vertical Ant. Tower is connected to the EUT and the Turn Table. The distance between the EUT and the Ant. Tower is 3m. The Ant. Tower is connected to a Test Receiver, which is shown as a device with a screen and buttons. The Ant. Tower is also labeled with '1-4m Variable'.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, 		


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A


Test Plot Yes (See below) N/A

Test Plots

GFSK Mode:

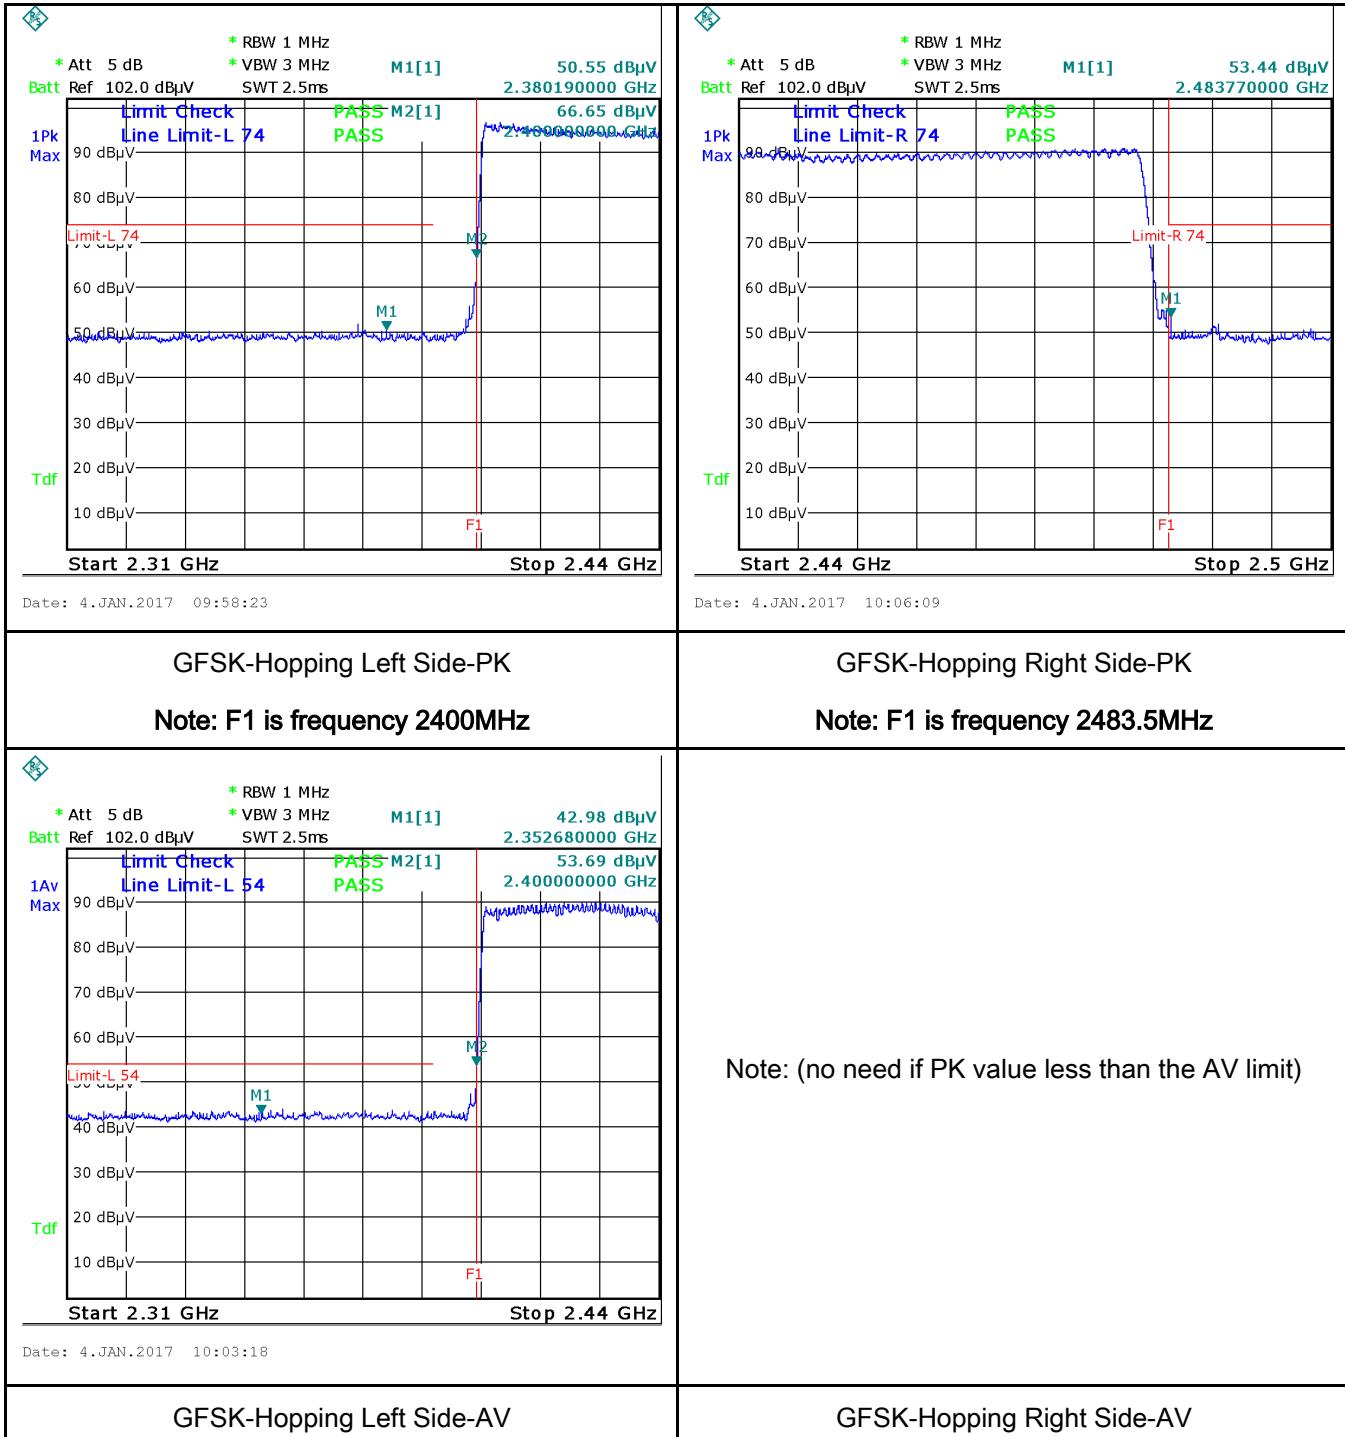


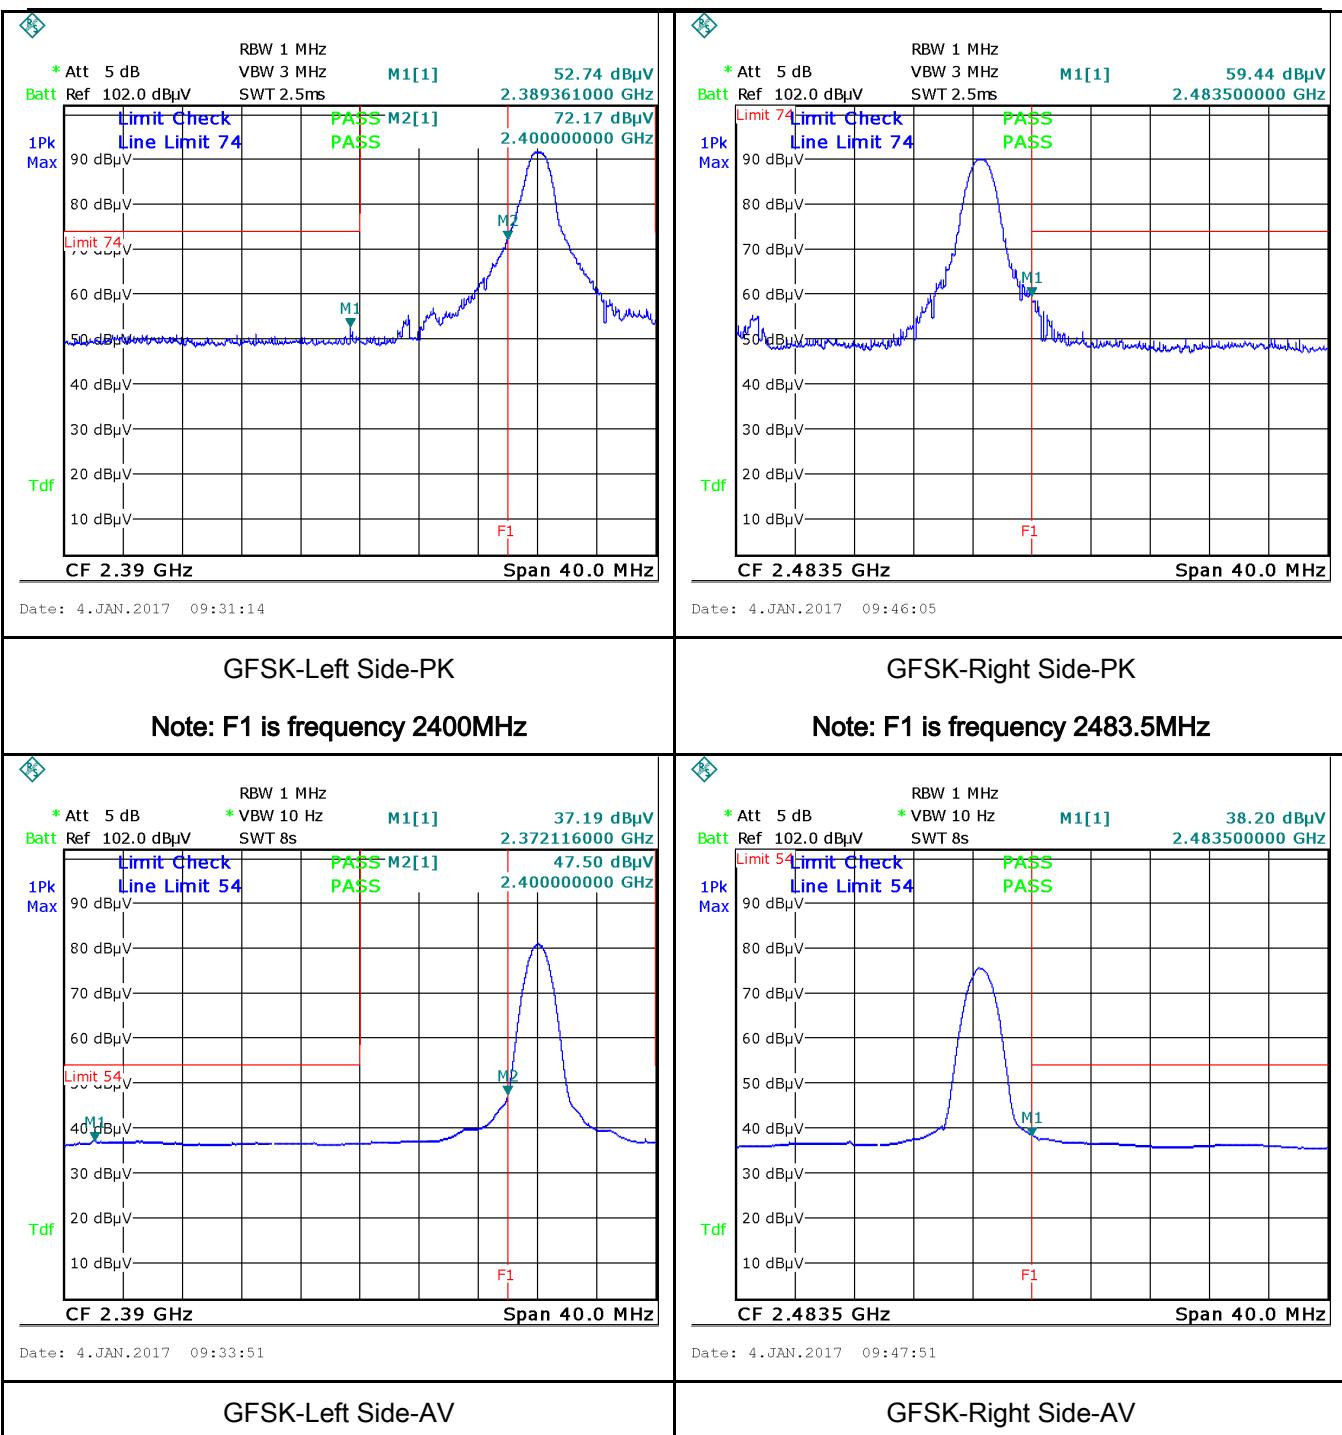

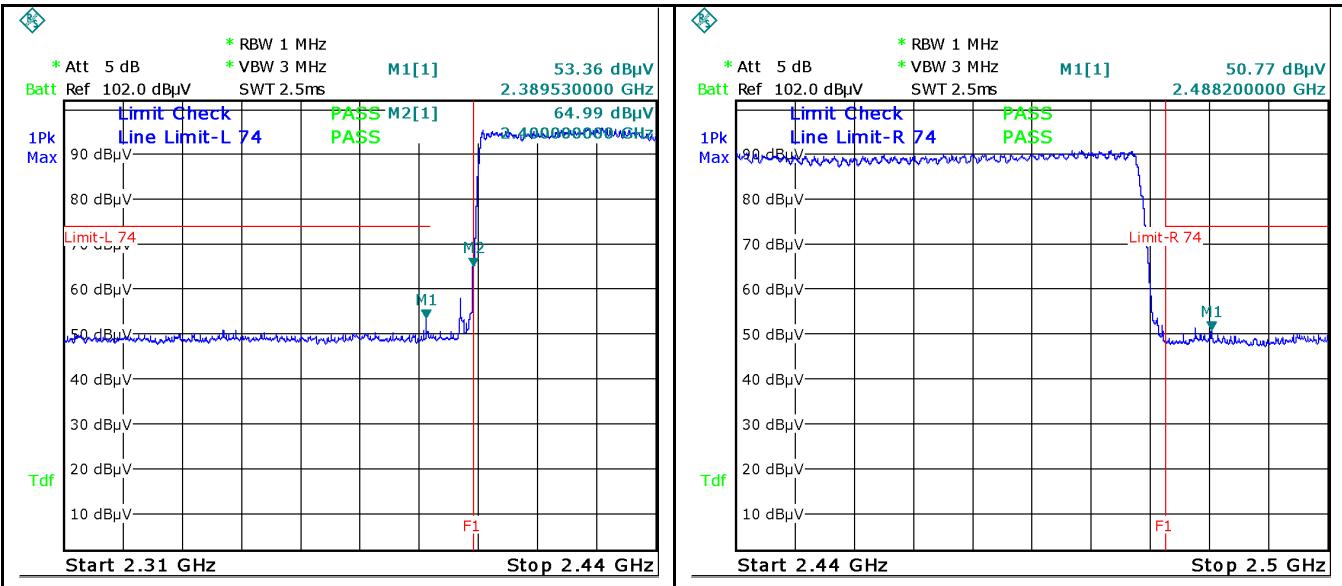π/4 DQPSK Mode:


Date: 4.JAN.2017 09:59:17


Date: 4.JAN.2017 10:06:25

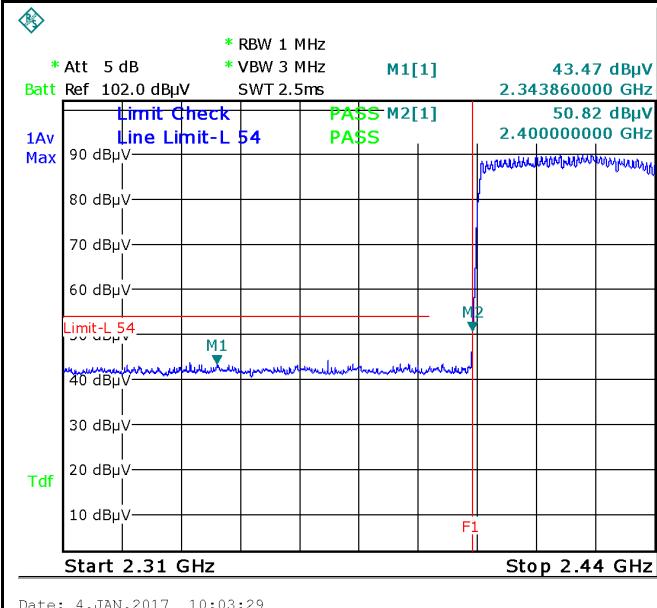π/4 DQPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz
π/4 DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz


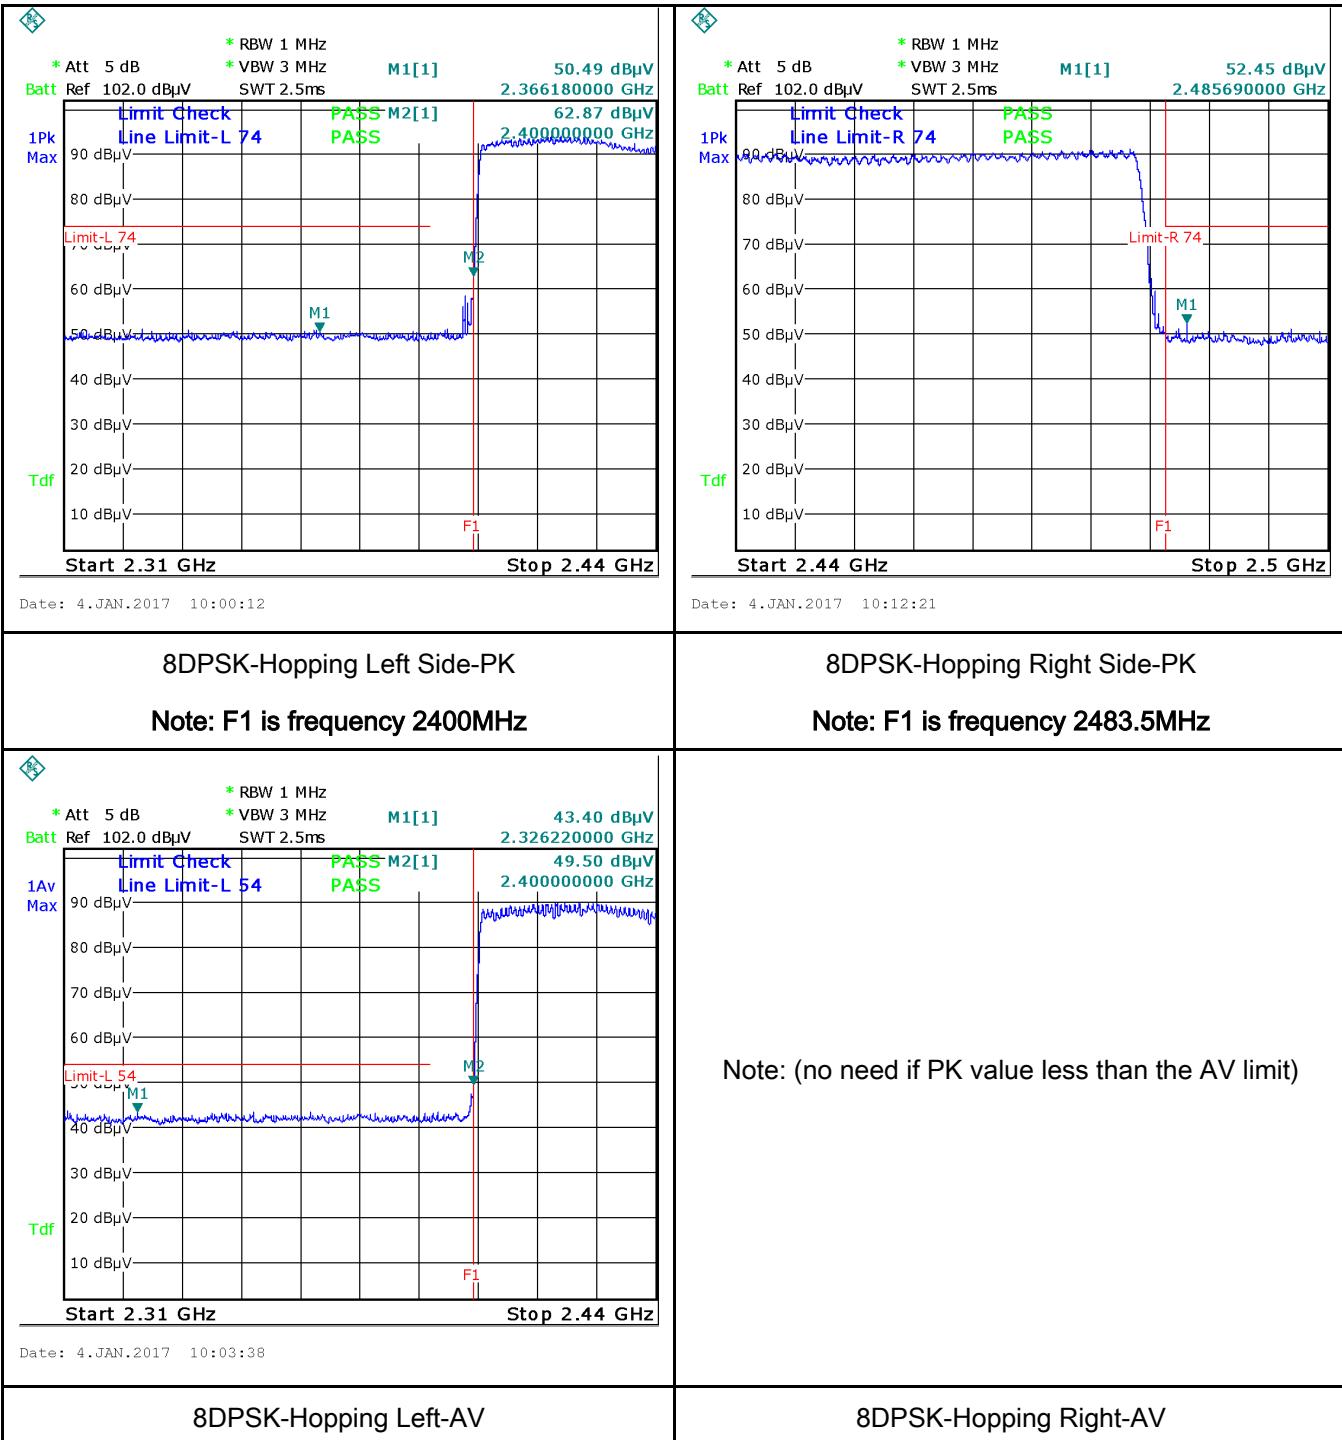
Date: 4.JAN.2017 10:03:29


Note: (no need if PK value less than the AV limit)

π/4 DQPSK-Hopping Left-AV
π/4 DQPSK-Hopping Right-AV

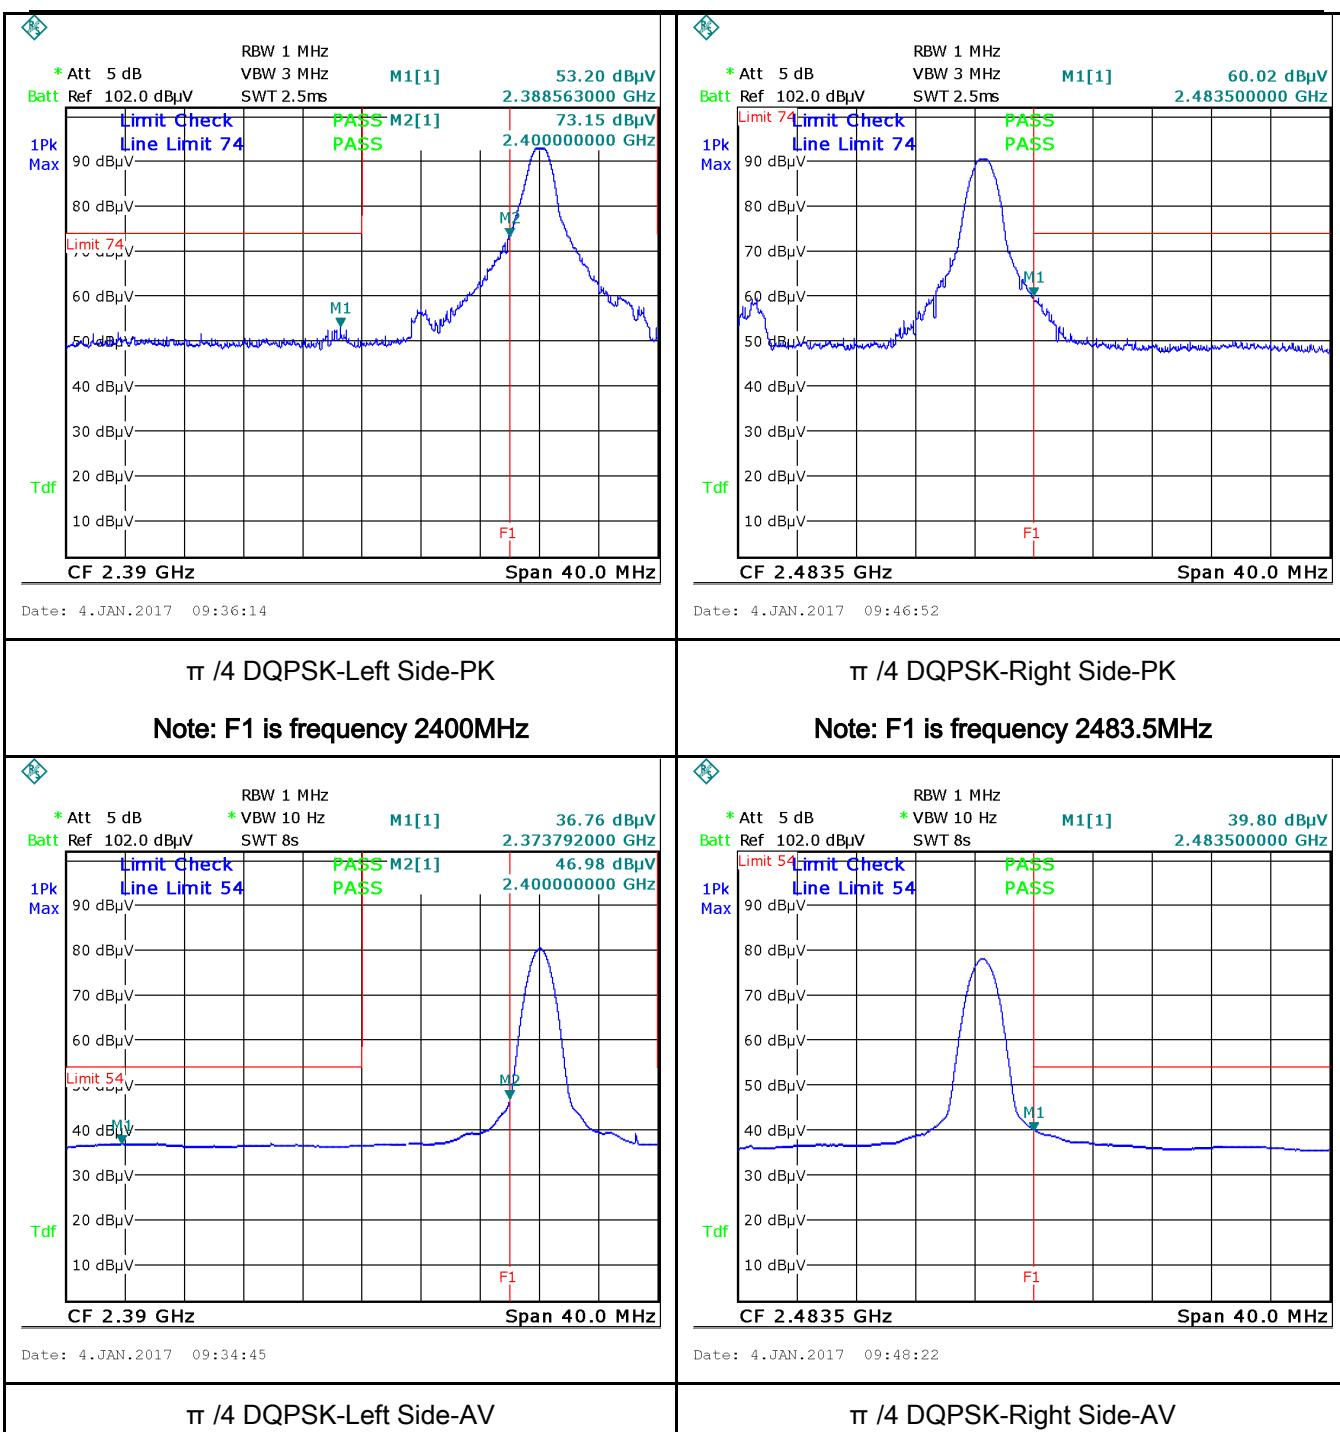

8-DPSK Mode:




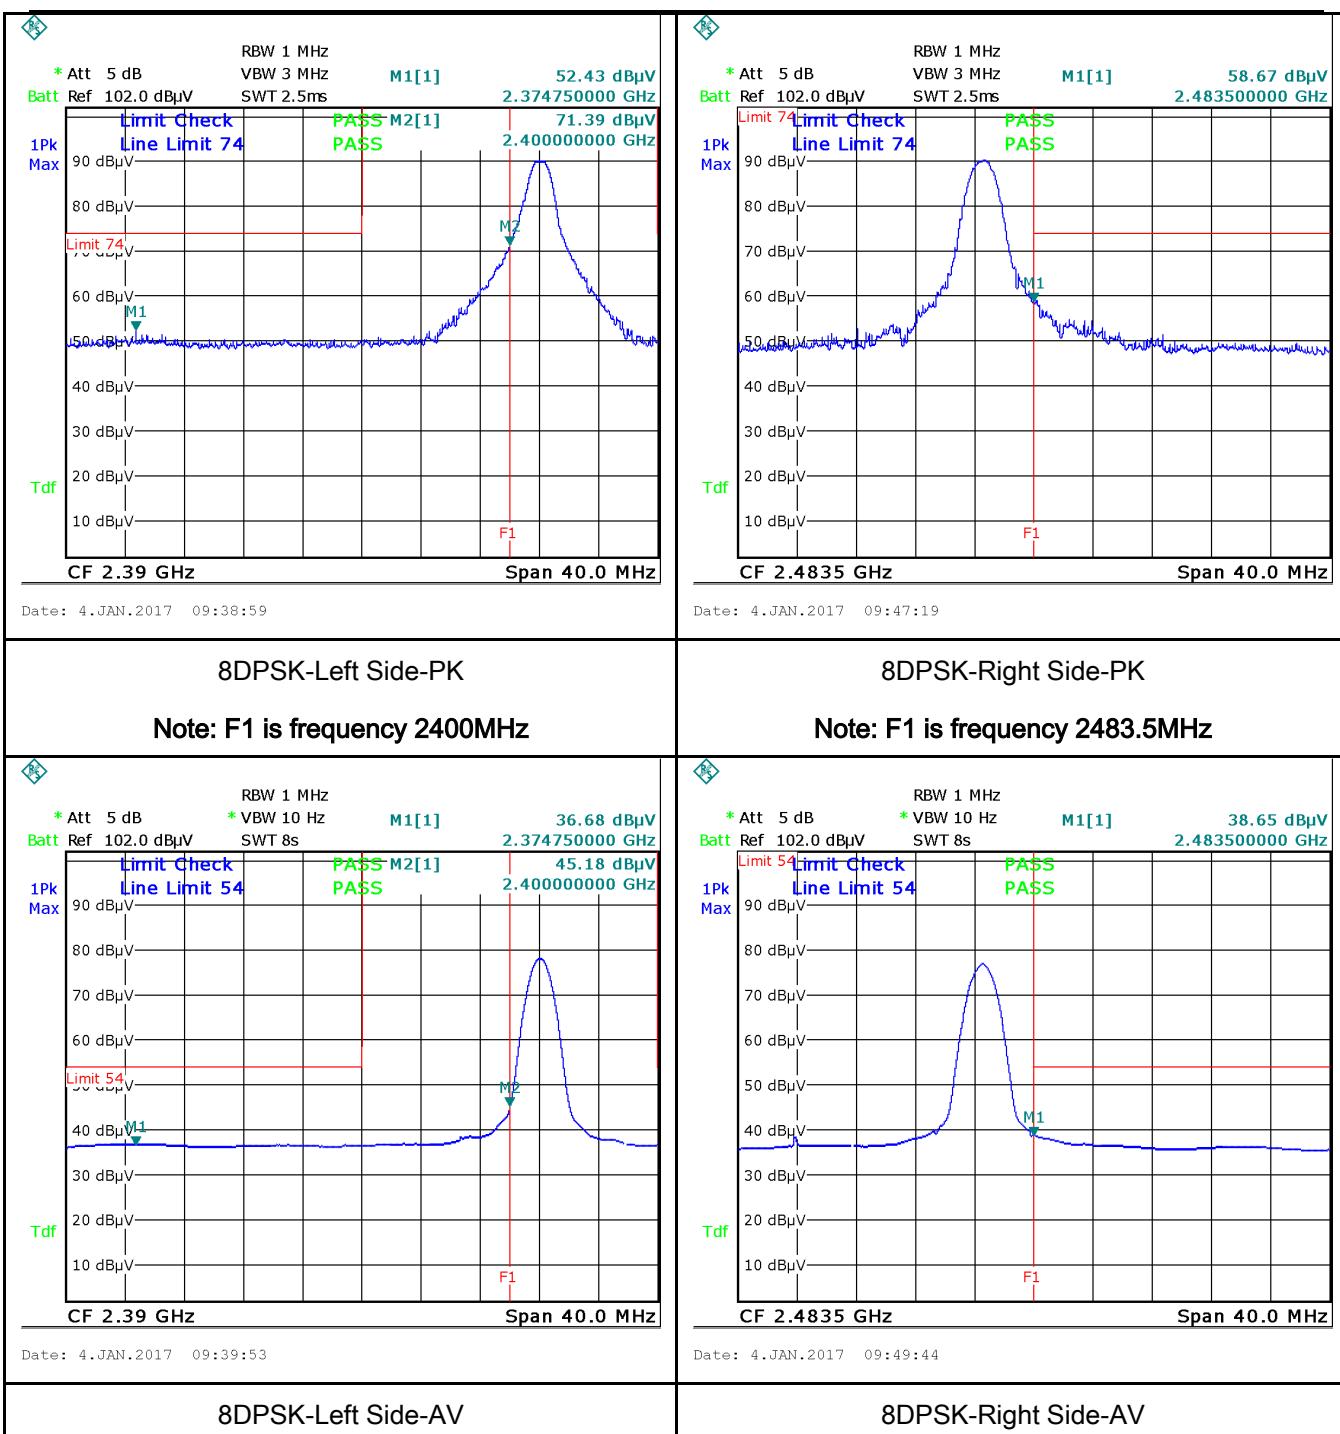

6.8 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	54%
Atmospheric Pressure	1002mbar
Test date :	Jan 04, 2017
Tested By :	Loren Luo

Requirement(s):

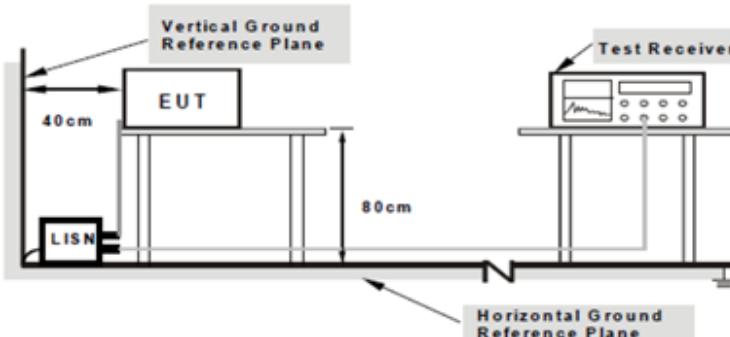
Spec	Item	Requirement	Applicable														
47CFR§15. 207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test Mode: Bluetooth Mode

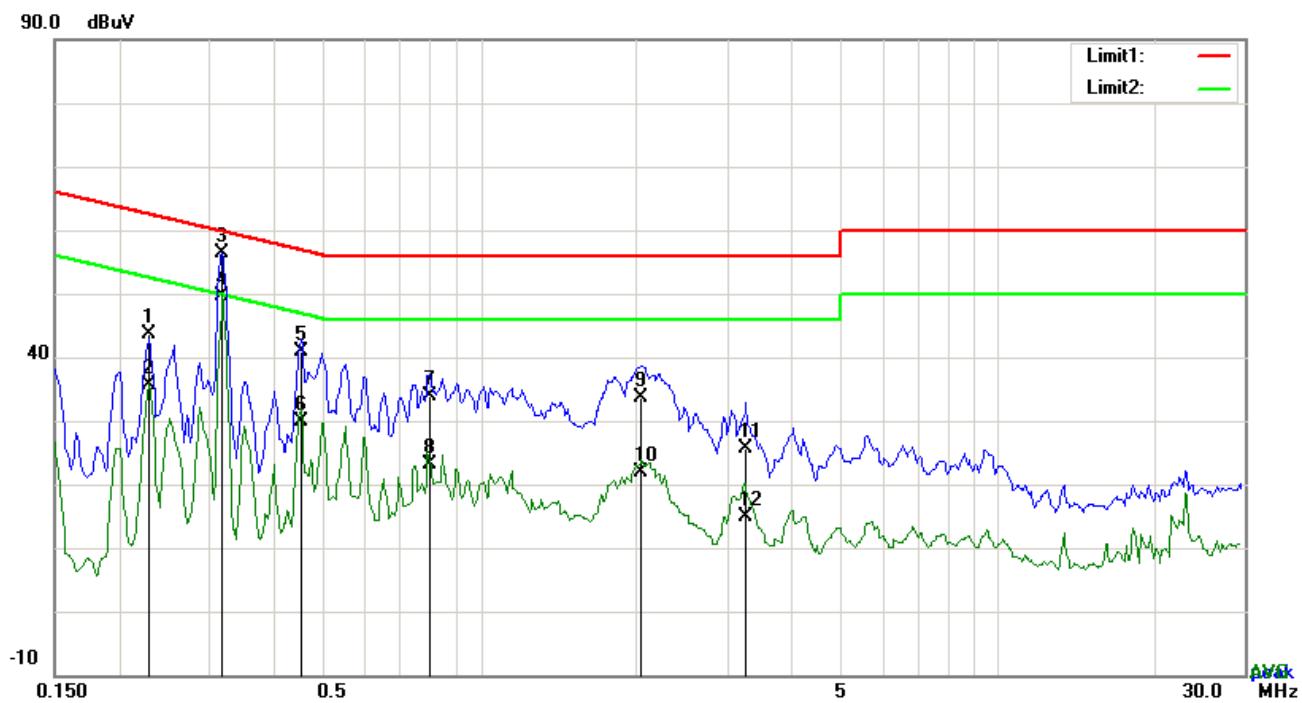

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.2280	33.66	QP	10.03	43.69	62.52	-18.83
2	L1	0.2280	25.59	AVG	10.03	35.62	52.52	-16.90
3	L1	0.3177	46.34	QP	10.03	56.37	59.77	-3.40
4	L1	0.3177	39.51	AVG	10.03	49.54	49.77	-0.23
5	L1	0.4503	30.96	QP	10.03	40.99	56.87	-15.88
6	L1	0.4503	19.87	AVG	10.03	29.90	46.87	-16.97
7	L1	0.7974	23.96	QP	10.03	33.99	56.00	-22.01
8	L1	0.7974	12.99	AVG	10.03	23.02	46.00	-22.98
9	L1	2.0493	23.63	QP	10.04	33.67	56.00	-22.33
10	L1	2.0493	11.96	AVG	10.04	22.00	46.00	-24.00
11	L1	3.2730	15.58	QP	10.06	25.64	56.00	-30.36
12	L1	3.2730	4.93	AVG	10.06	14.99	46.00	-31.01

Test Mode: Bluetooth Mode

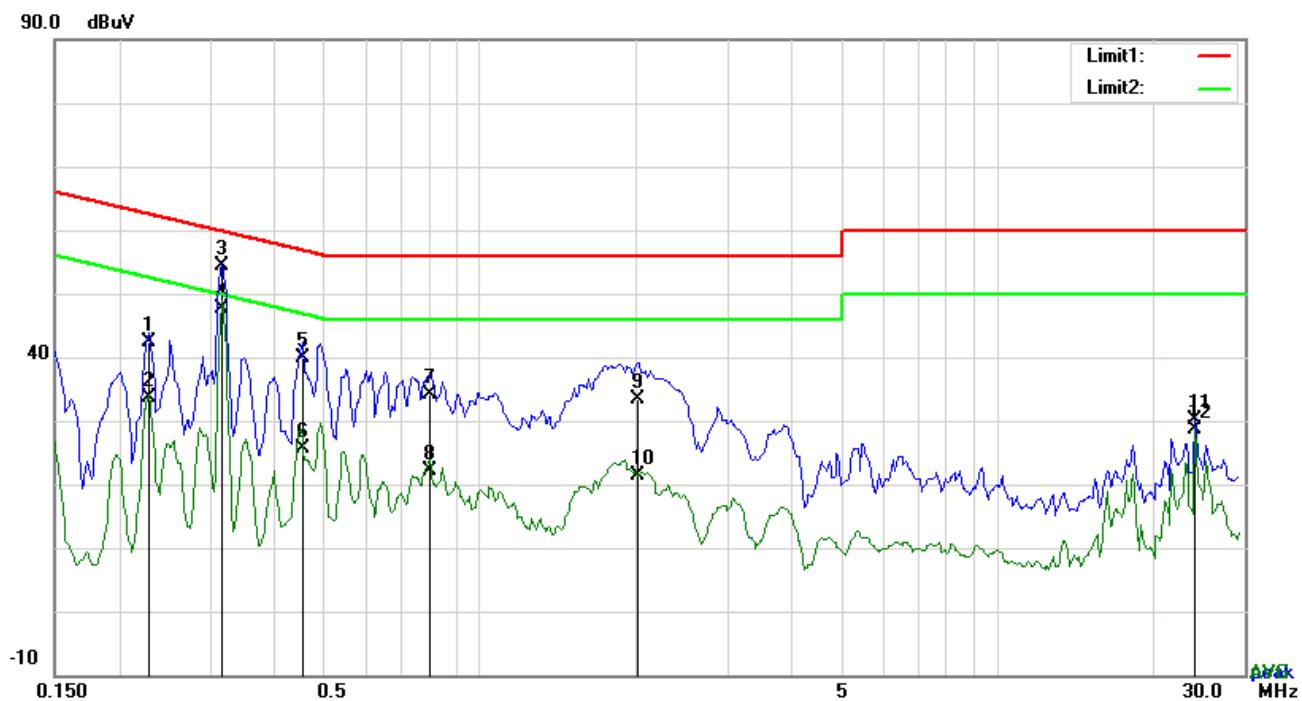


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.2280	32.46	QP	10.02	42.48	62.52	-20.04
2	N	0.2280	23.70	AVG	10.02	33.72	52.52	-18.80
3	N	0.3177	44.48	QP	10.02	54.50	59.77	-5.27
4	N	0.3177	37.72	AVG	10.02	47.74	49.77	-2.03
5	N	0.4542	29.90	QP	10.02	39.92	56.80	-16.88
6	N	0.4542	15.68	AVG	10.02	25.70	46.80	-21.10
7	N	0.7974	24.00	QP	10.03	34.03	56.00	-21.97
8	N	0.7974	12.22	AVG	10.03	22.25	46.00	-23.75
9	N	2.0220	23.24	QP	10.04	33.28	56.00	-22.72
10	N	2.0220	11.27	AVG	10.04	21.31	46.00	-24.69
11	N	24.0249	19.79	QP	10.32	30.11	60.00	-29.89
12	N	24.0249	18.24	AVG	10.32	28.56	50.00	-21.44

Test Mode: Bluetooth Mode

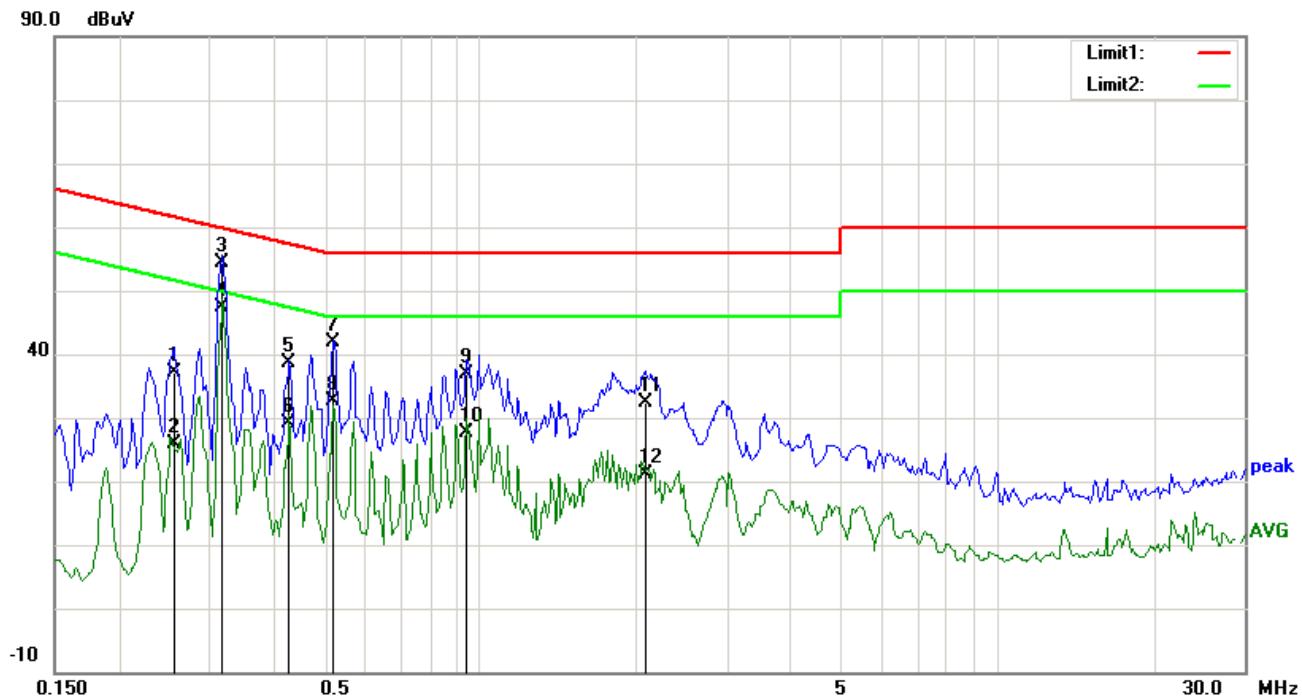


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.2553	27.01	QP	10.03	37.04	61.58	-24.54
2	L1	0.2553	15.79	AVG	10.03	25.82	51.58	-25.76
3	L1	0.3177	44.43	QP	10.03	54.46	59.77	-5.31
4	L1	0.3177	37.30	AVG	10.03	47.33	49.77	-2.44
5	L1	0.4269	28.48	QP	10.03	38.51	57.31	-18.80
6	L1	0.4269	19.09	AVG	10.03	29.12	47.31	-18.19
7	L1	0.5205	31.82	QP	10.03	41.85	56.00	-14.15
8	L1	0.5205	22.56	AVG	10.03	32.59	46.00	-13.41
9	L1	0.9417	26.85	QP	10.03	36.88	56.00	-19.12
10	L1	0.9417	17.62	AVG	10.03	27.65	46.00	-18.35
11	L1	2.0805	22.22	QP	10.04	32.26	56.00	-23.74
12	L1	2.0805	11.11	AVG	10.04	21.15	46.00	-24.85

Test Mode: Bluetooth Mode

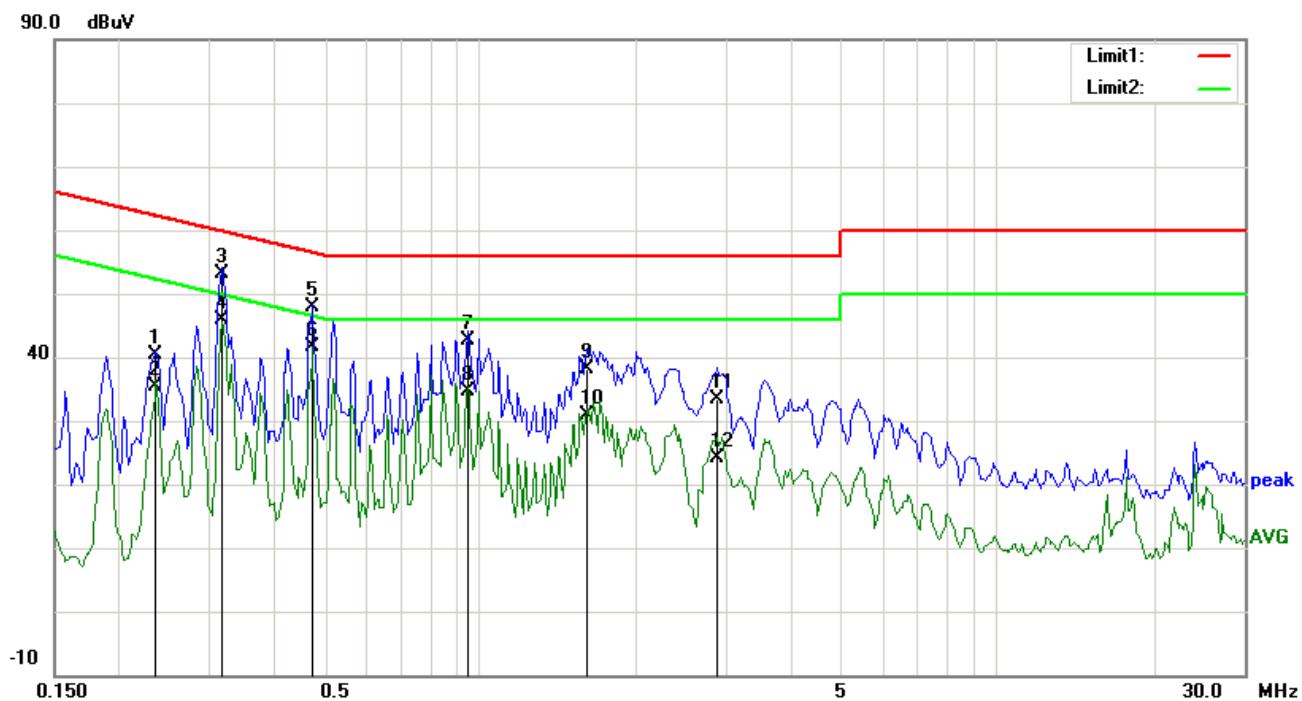

Test Data


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.2358	30.34	QP	10.02	40.36	62.24	-21.88
2	N	0.2358	25.40	AVG	10.02	35.42	52.24	-16.82
3	N	0.3177	43.00	QP	10.02	53.02	59.77	-6.75
4	N	0.3177	35.87	AVG	10.02	45.89	49.77	-3.88
5	N	0.4737	37.80	QP	10.02	47.82	56.45	-8.63
6	N	0.4737	31.69	AVG	10.02	41.71	46.45	-4.74
7	N	0.9456	32.66	QP	10.03	42.69	56.00	-13.31
8	N	0.9456	24.67	AVG	10.03	34.70	46.00	-11.30
9	N	1.6086	27.99	QP	10.04	38.03	56.00	-17.97
10	N	1.6086	20.78	AVG	10.04	30.82	46.00	-15.18
11	N	2.8761	23.43	QP	10.05	33.48	56.00	-22.52
12	N	2.8761	14.20	AVG	10.05	24.25	46.00	-21.75

6.9 Radiated Spurious Emissions & Restricted Band

Temperature	22°C
Relative Humidity	54%
Atmospheric Pressure	1002mbar
Test date :	Jan 04, 2017
Tested By :	Loren Luo

Requirement(s):

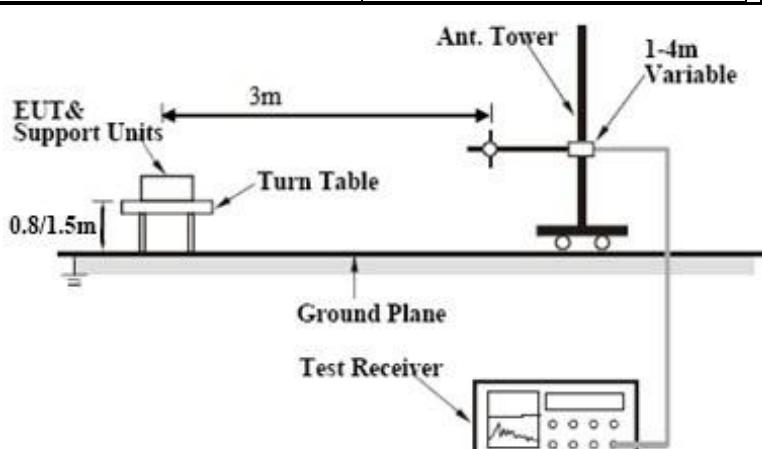Spec	Item	Requirement	Applicable										
47CFR§15. 205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup. A 'Turn Table' is positioned on a 'Ground Plane'. A 'EUT & Support Units' is mounted on the turn table. A 'Ant. Tower' is connected to the EUT and is height-adjustable, with a '1-4m Variable' height indicator. A 'Test Receiver' is connected to the tower and is shown with a display screen and control buttons.</p>											
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: 											


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

Below 1GHz

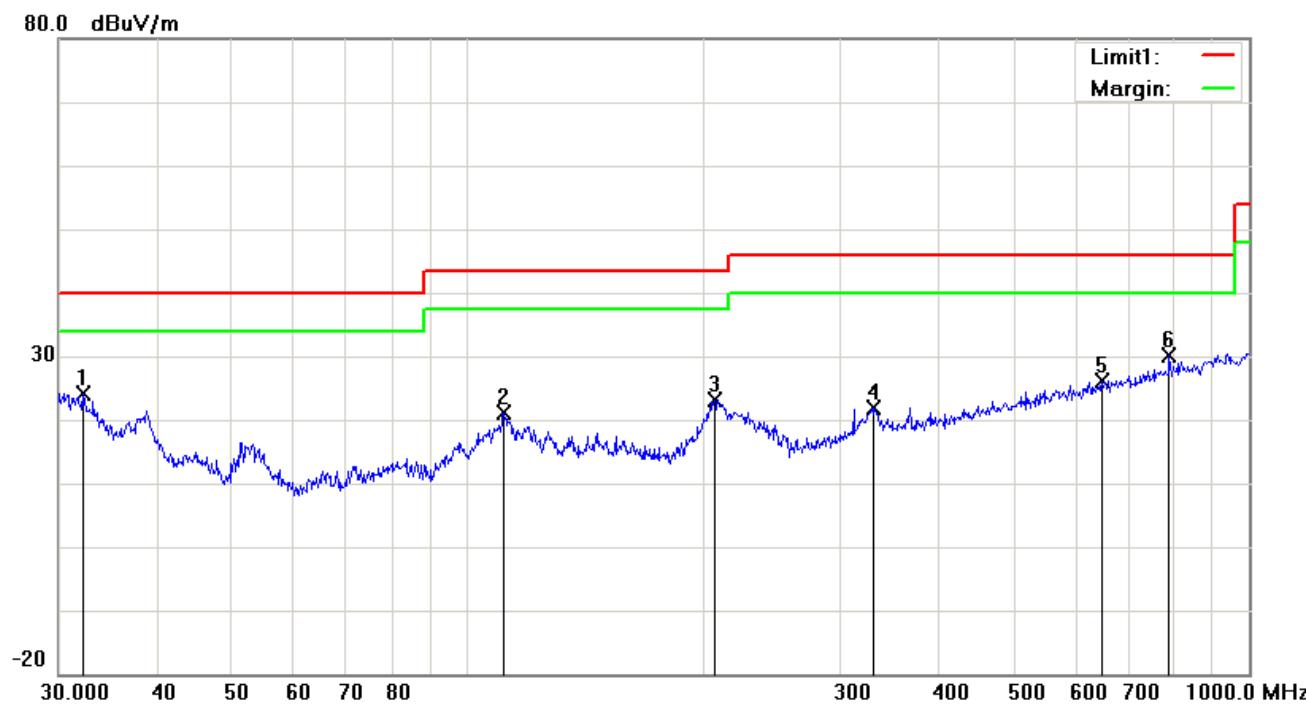


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Readin g (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	32.1795	25.98	peak	-1.87	24.11	40.00	-15.89	100	36
2	H	111.3468	30.00	peak	-8.78	21.22	43.50	-22.28	100	157
3	H	207.1226	32.00	peak	-8.81	23.19	43.50	-20.31	120	263
4	H	331.3547	27.89	peak	-5.99	21.90	46.00	-24.10	150	194
5	H	647.3856	25.35	peak	0.76	26.11	46.00	-19.89	110	301
6	H	790.6188	27.17	peak	3.06	30.23	46.00	-15.77	120	146

Below 1GHz

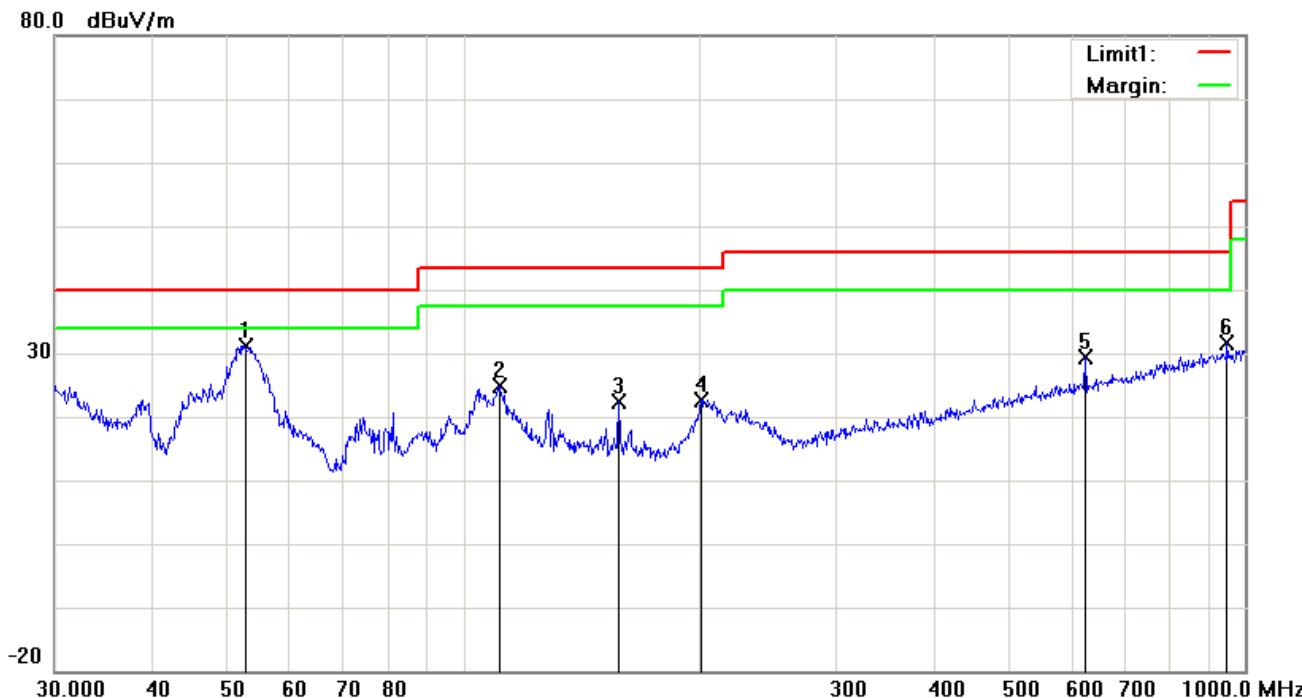

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Readin g (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	52.5753	44.70	peak	-13.48	31.22	40.00	-8.78	100	147
2	V	111.3468	33.63	peak	-8.78	24.85	43.50	-18.65	110	316
3	V	158.1123	30.66	peak	-8.30	22.36	43.50	-21.14	100	284
4	V	201.3930	31.48	peak	-8.76	22.72	43.50	-20.78	150	155
5	V	625.0780	29.05	peak	0.42	29.47	46.00	-16.53	200	69
6	V	948.7610	26.50	peak	5.12	31.62	46.00	-14.38	130	142

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel: 8-DPSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	40.12	AV	V	33.67	6.86	32.66	47.99	54	-6.01
4804	39.94	AV	H	33.67	6.86	32.66	47.81	54	-6.19
4804	47.85	PK	V	33.67	6.86	32.66	55.72	74	-18.28
4804	45.63	PK	H	33.67	6.86	32.66	53.5	74	-20.5
17822	25.11	AV	V	45.03	11.21	32.38	48.97	54	-5.03
17822	24.86	AV	H	45.03	11.21	32.38	48.72	54	-5.28
17822	39.99	PK	V	45.03	11.21	32.38	63.85	74	-10.15
17822	41.64	PK	H	45.03	11.21	32.38	65.5	74	-8.5

Middle Channel: 8-DPSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	39.75	AV	V	33.71	6.95	32.74	47.67	54	-6.33
4882	38.41	AV	H	33.71	6.95	32.74	46.33	54	-7.67
4882	48.03	PK	V	33.71	6.95	32.74	55.95	74	-18.05
4882	47.69	PK	H	33.71	6.95	32.74	55.61	74	-18.39
17830	24.88	AV	V	45.15	11.18	32.41	48.8	54	-5.2
17830	24.35	AV	H	45.15	11.18	32.41	48.27	54	-5.73
17830	40.42	PK	V	45.15	11.18	32.41	64.34	74	-9.66
17830	41.29	PK	H	45.15	11.18	32.41	65.21	74	-8.79

High Channel: 8-DPSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	39.18	AV	V	33.9	6.76	32.74	47.1	54	-6.9
4960	37.55	AV	H	33.9	6.76	32.74	45.47	54	-8.53
4960	47.93	PK	V	33.9	6.76	32.74	55.85	74	-18.15
4960	47.56	PK	H	33.9	6.76	32.74	55.48	74	-18.52
17825	24.67	AV	V	45.22	11.35	32.38	48.86	54	-5.14
17825	24.58	AV	H	45.22	11.35	32.38	48.77	54	-5.23
17825	40.99	PK	V	45.22	11.35	32.38	65.18	74	-8.82
17825	40.87	PK	H	45.22	11.35	32.38	65.06	74	-8.94

Note:

 1, The testing has been conformed to $10 \times 2480\text{MHz} = 24,800\text{MHz}$

2, All other emissions more than 30 dB below the limit


3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>


Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

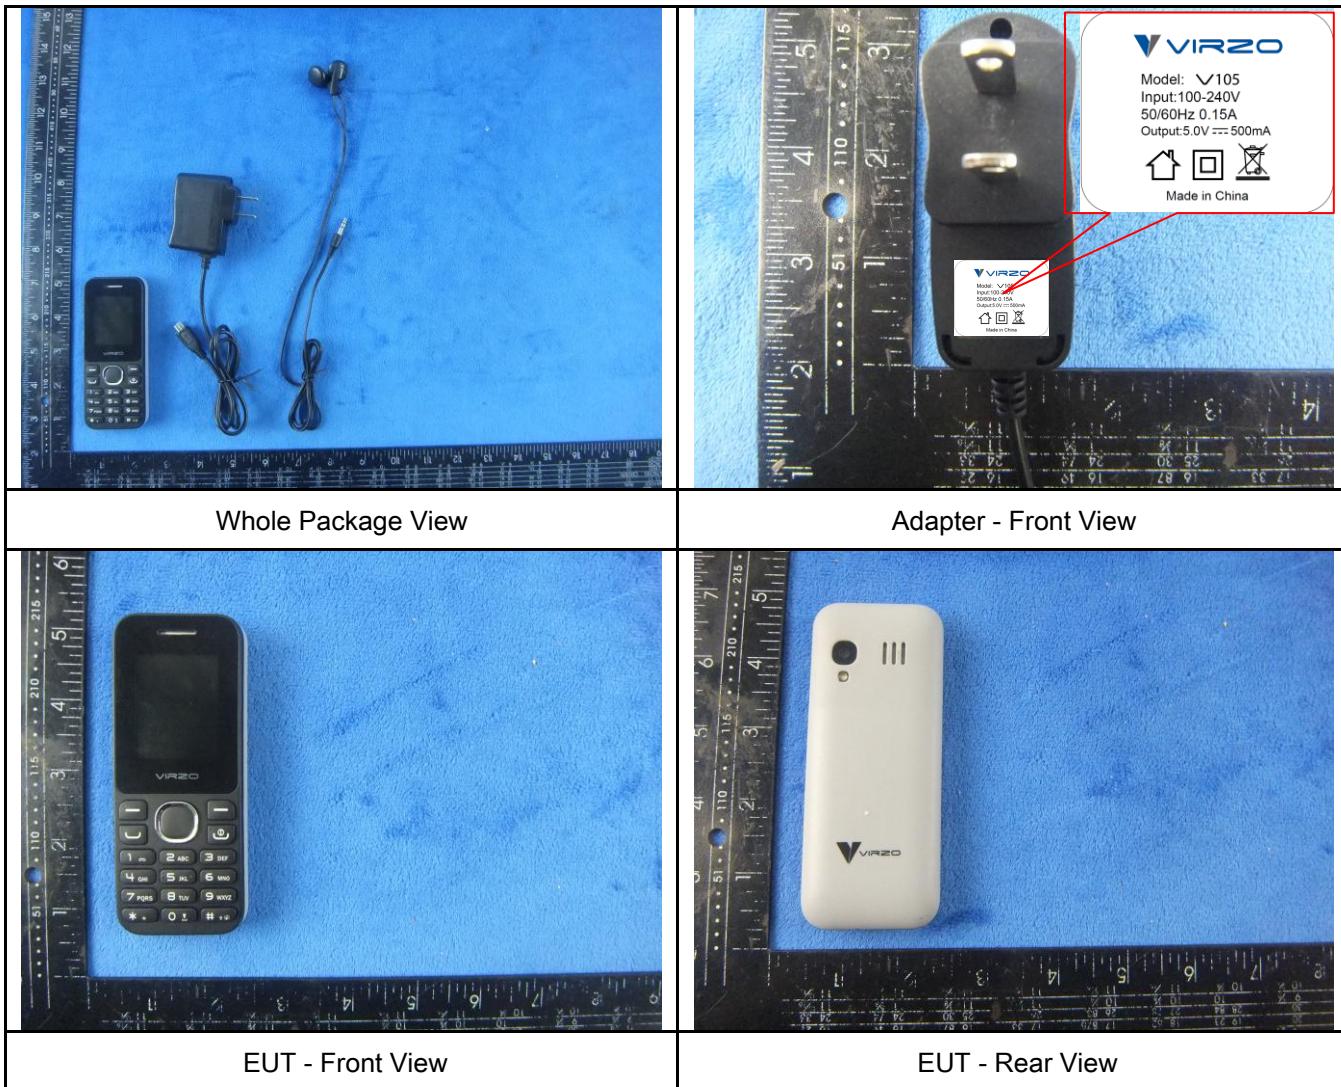


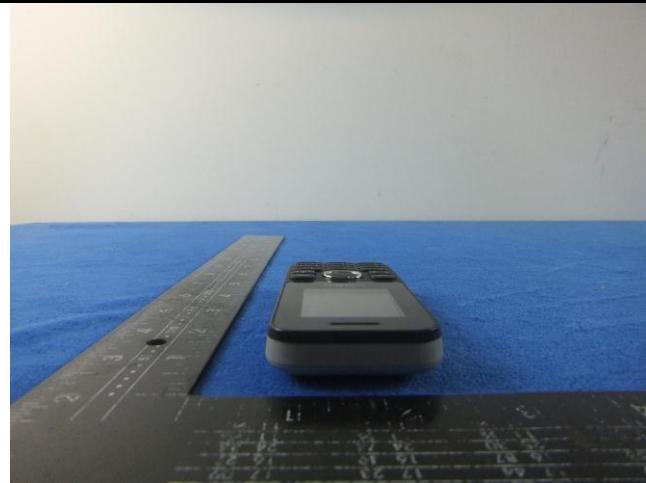


EUT - Top View

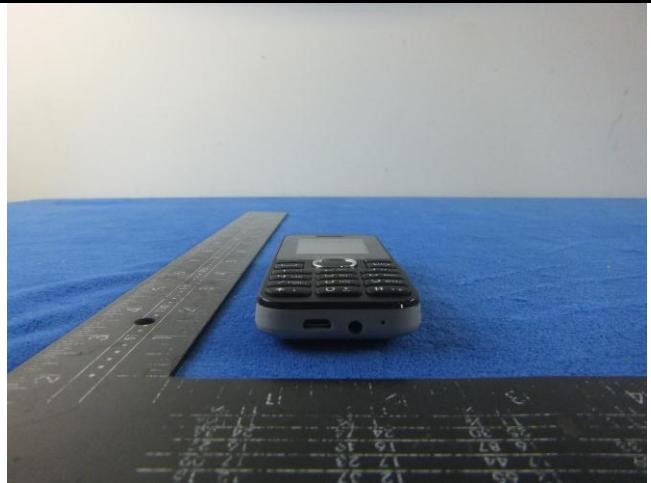

EUT - Bottom View

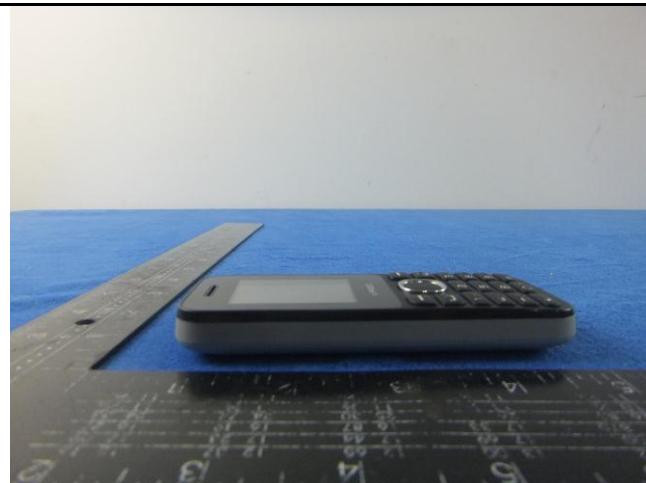



EUT - Left View

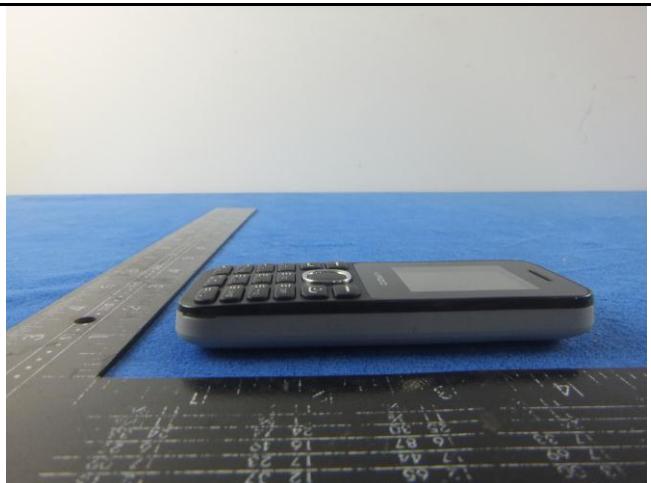




EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo

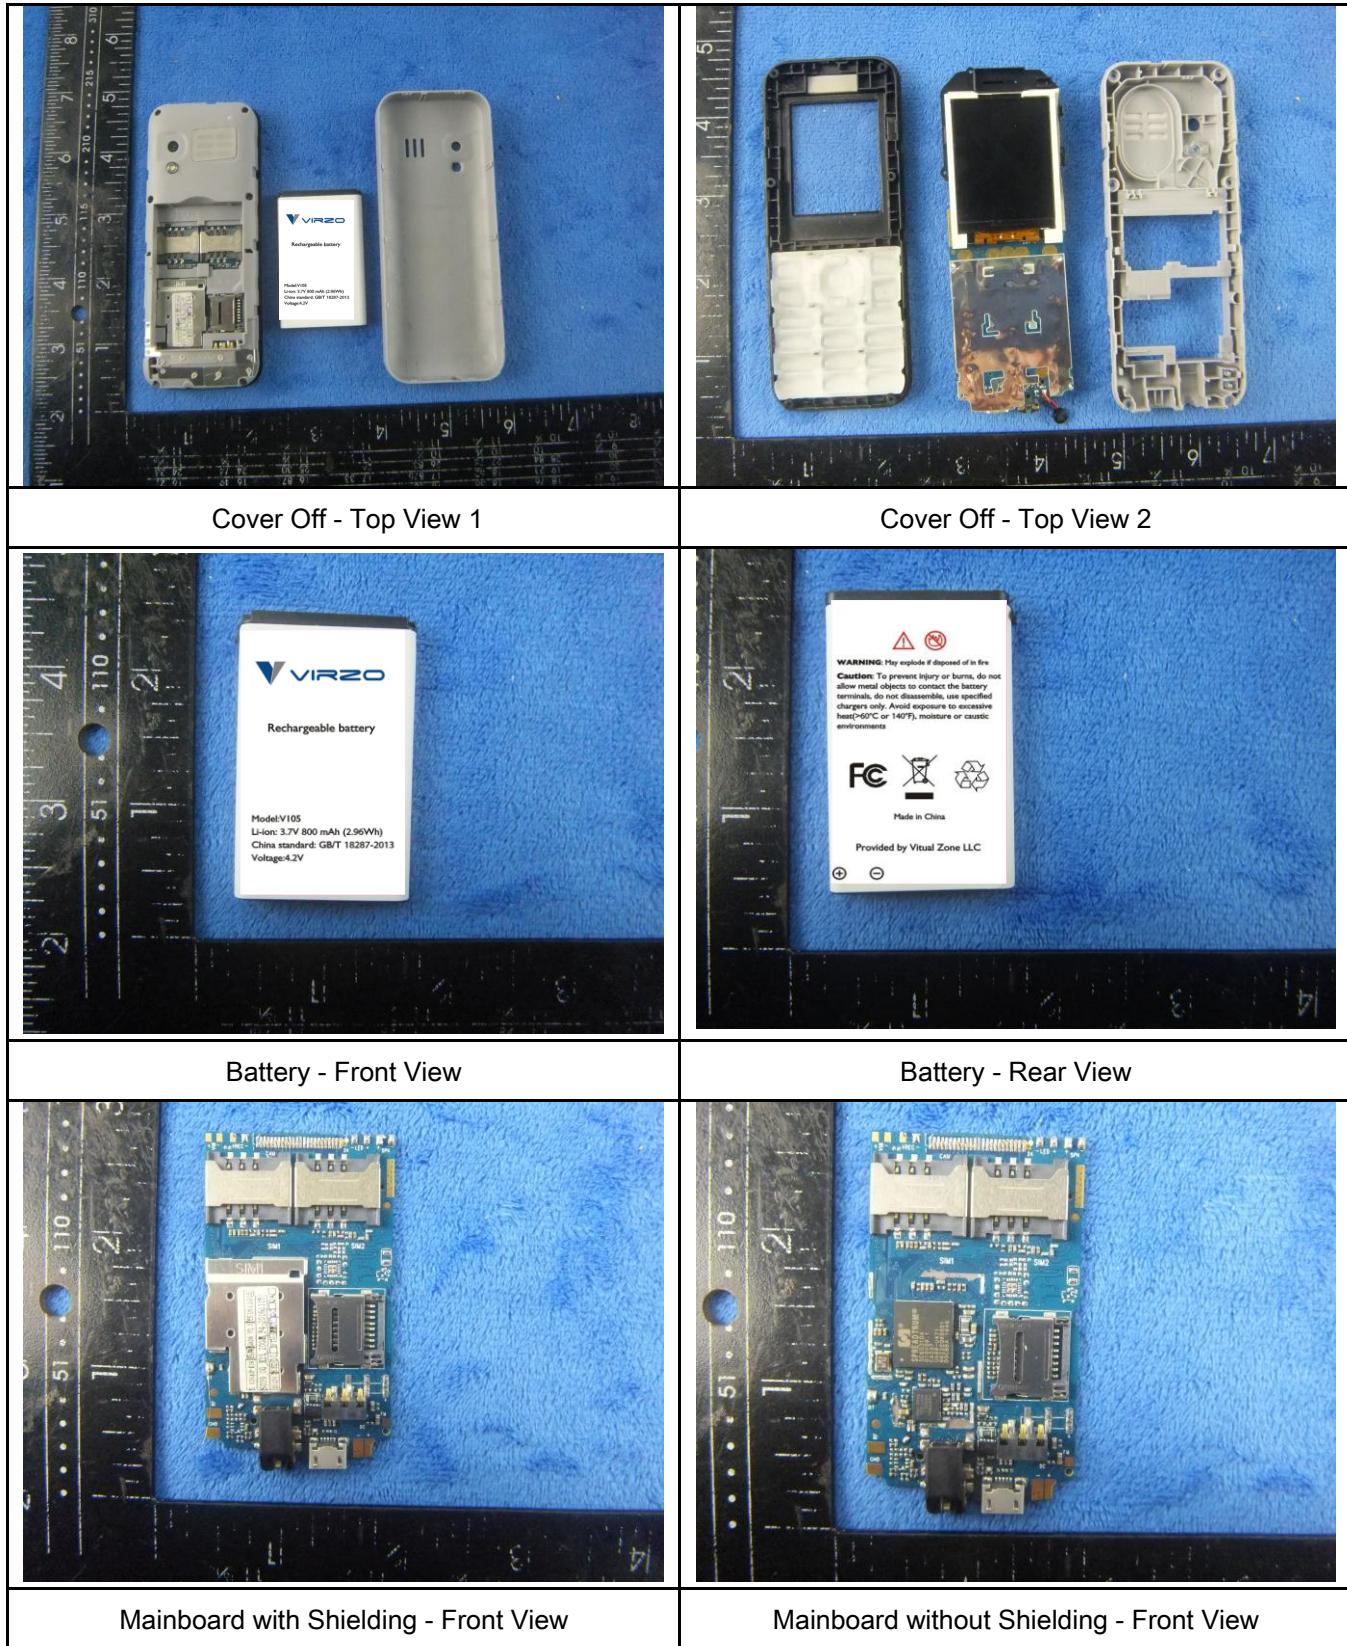

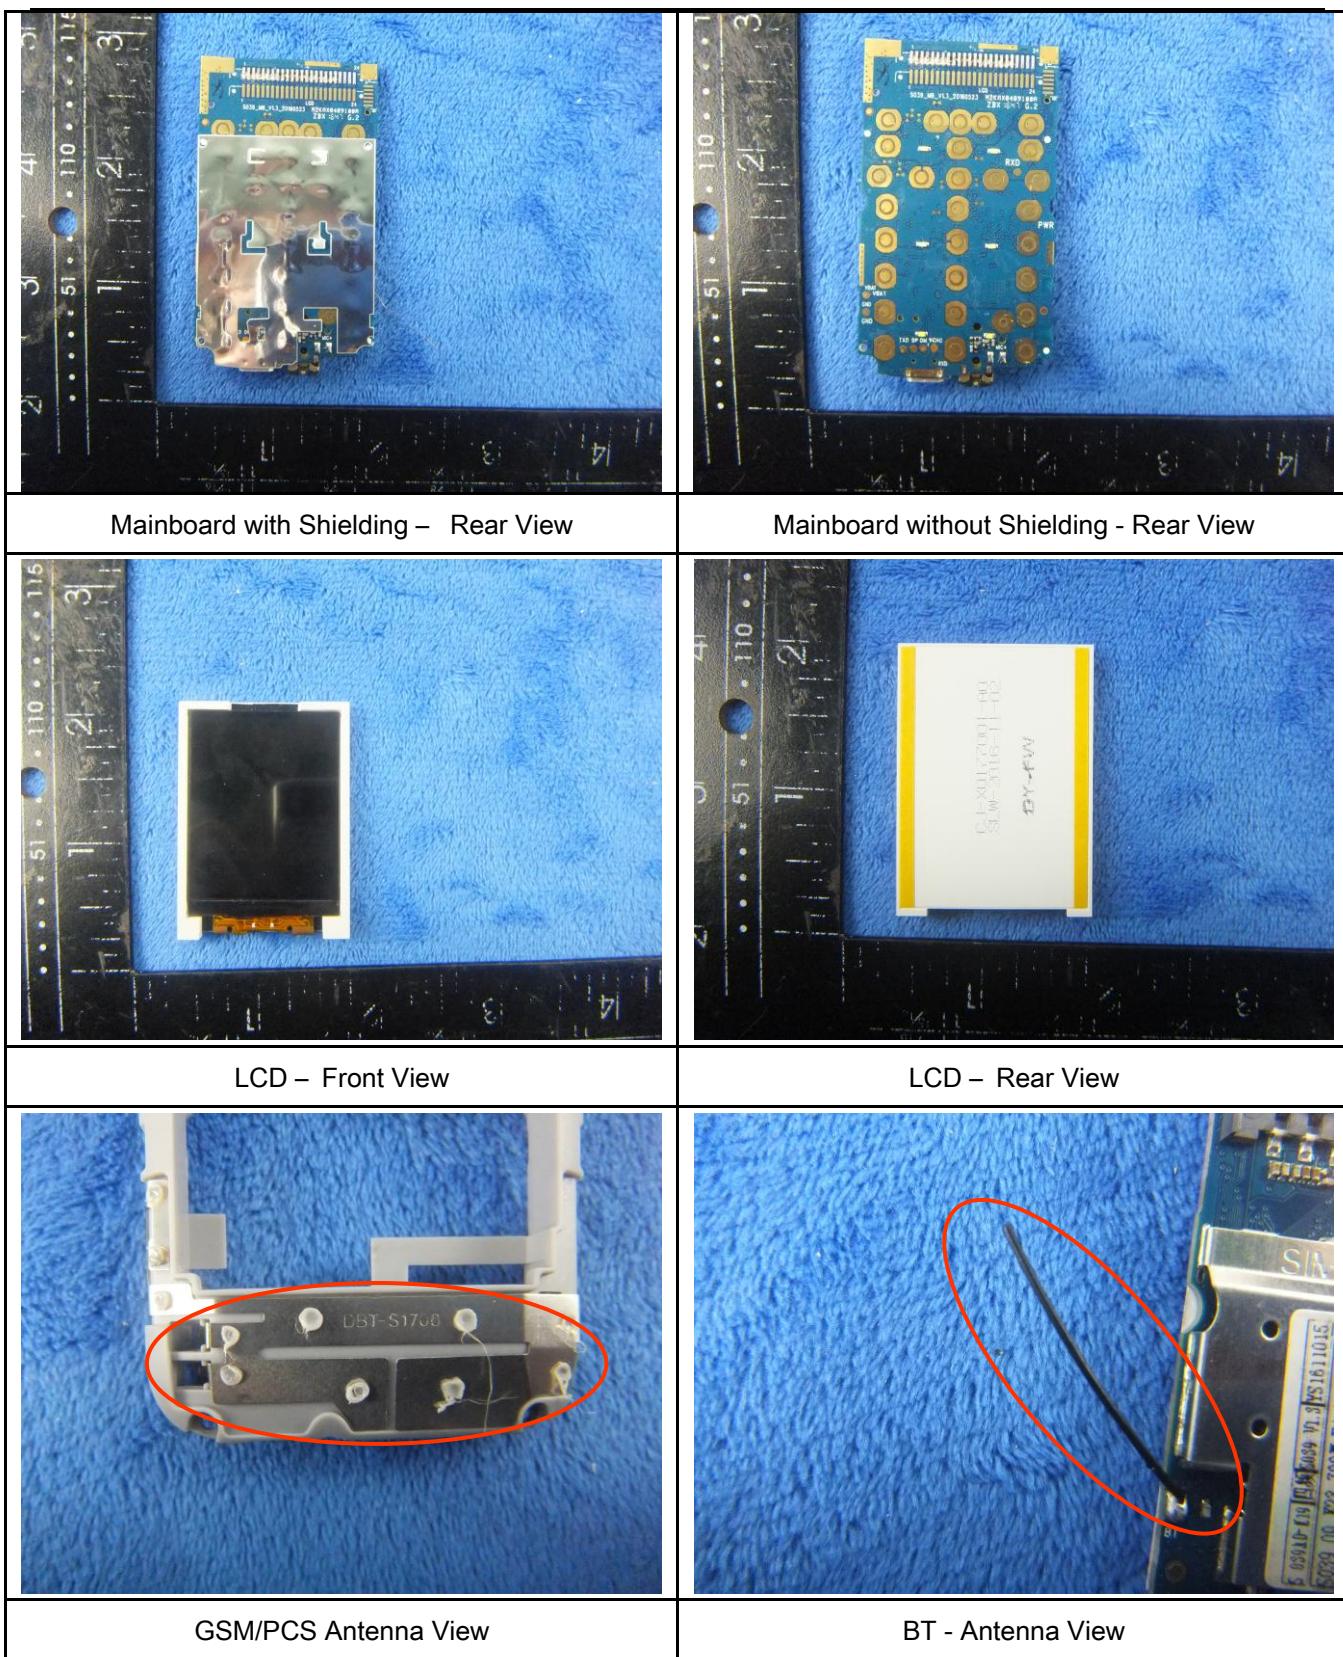


Annex B.iii. Photograph: Test Setup Photo

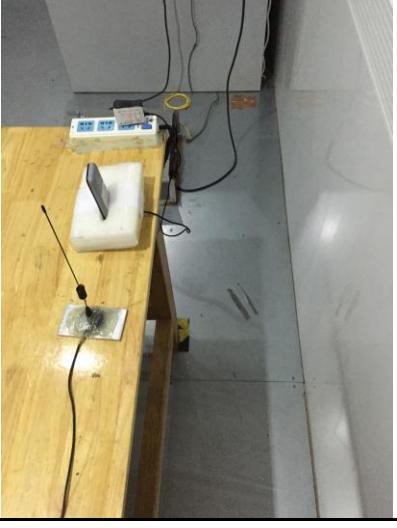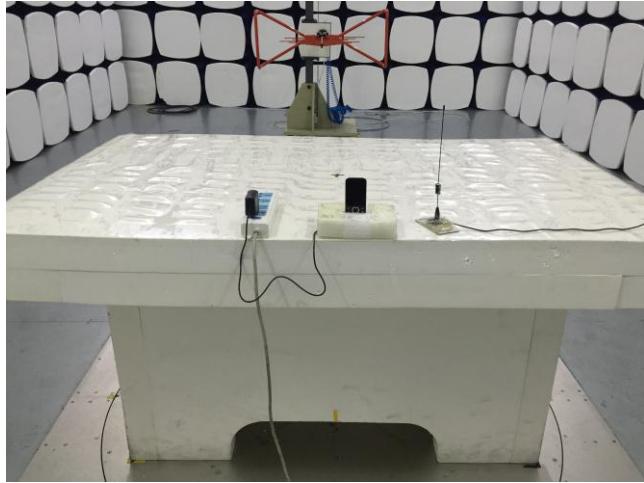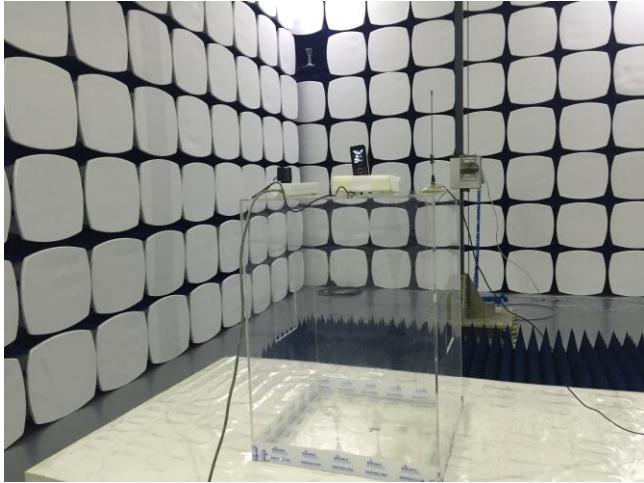 A photograph showing a wooden table in a laboratory setting. On the table, there is a white rectangular device with a black probe connected to it, and a small black object. A power strip with multiple outlets is on the floor to the left. Wires are visible on the floor and the table.	 A photograph showing a side view of the conducted emissions test setup. It features a wooden table with a white rectangular device and a black probe. A power strip is visible on the floor to the left.
Conducted Emissions Test Setup Front View	Conducted Emissions Test Setup Side View
 A photograph showing a white table in a test chamber. On the table, there is a white rectangular device with a black probe connected to it, and a small black object. The background shows a white and black patterned wall of the test chamber.	 A photograph showing a white table in a test chamber. On the table, there is a white rectangular device with a black probe connected to it, and a small black object. The background shows a white and black patterned wall of the test chamber. A clear plastic enclosure is visible in the foreground.
Radiated Spurious Emissions Test Setup Below 1GHz	Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

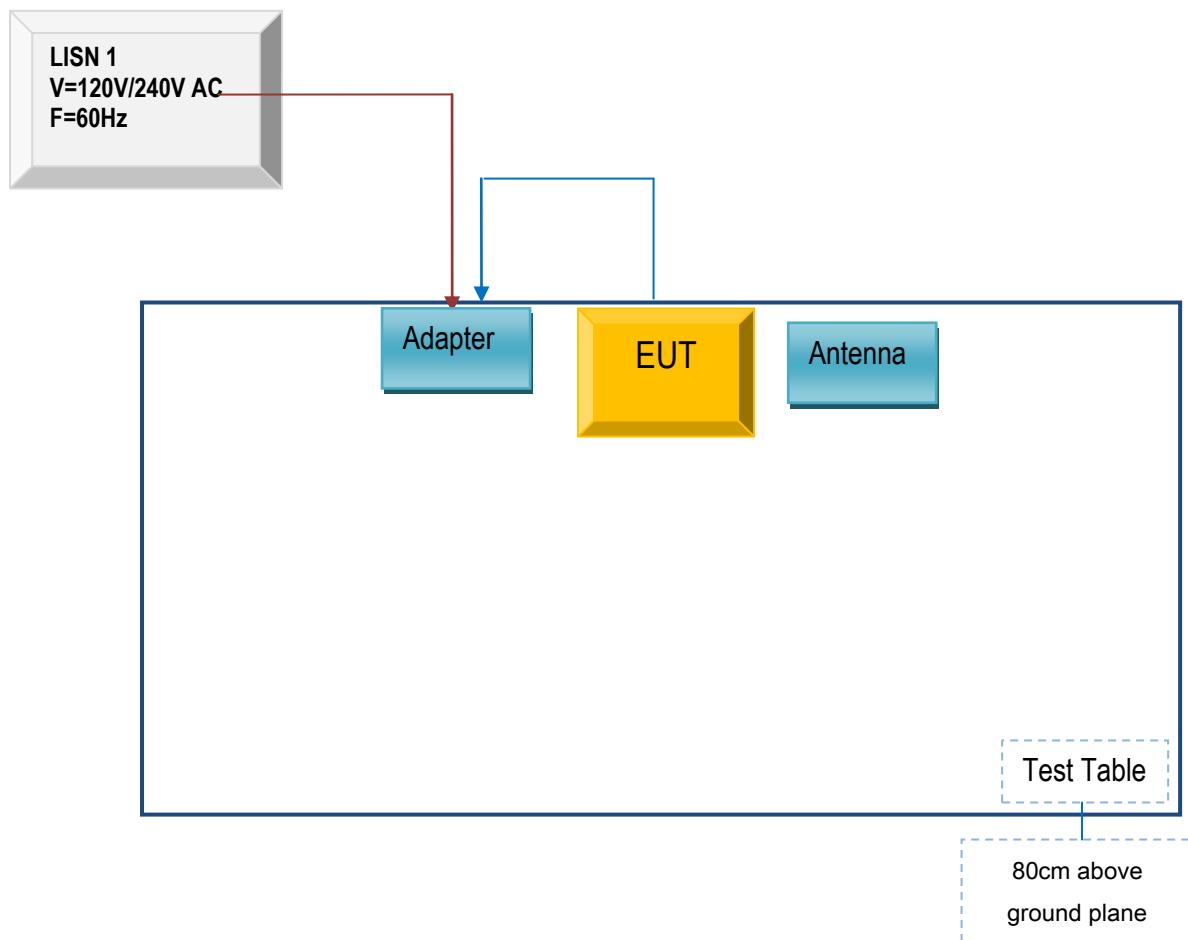

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

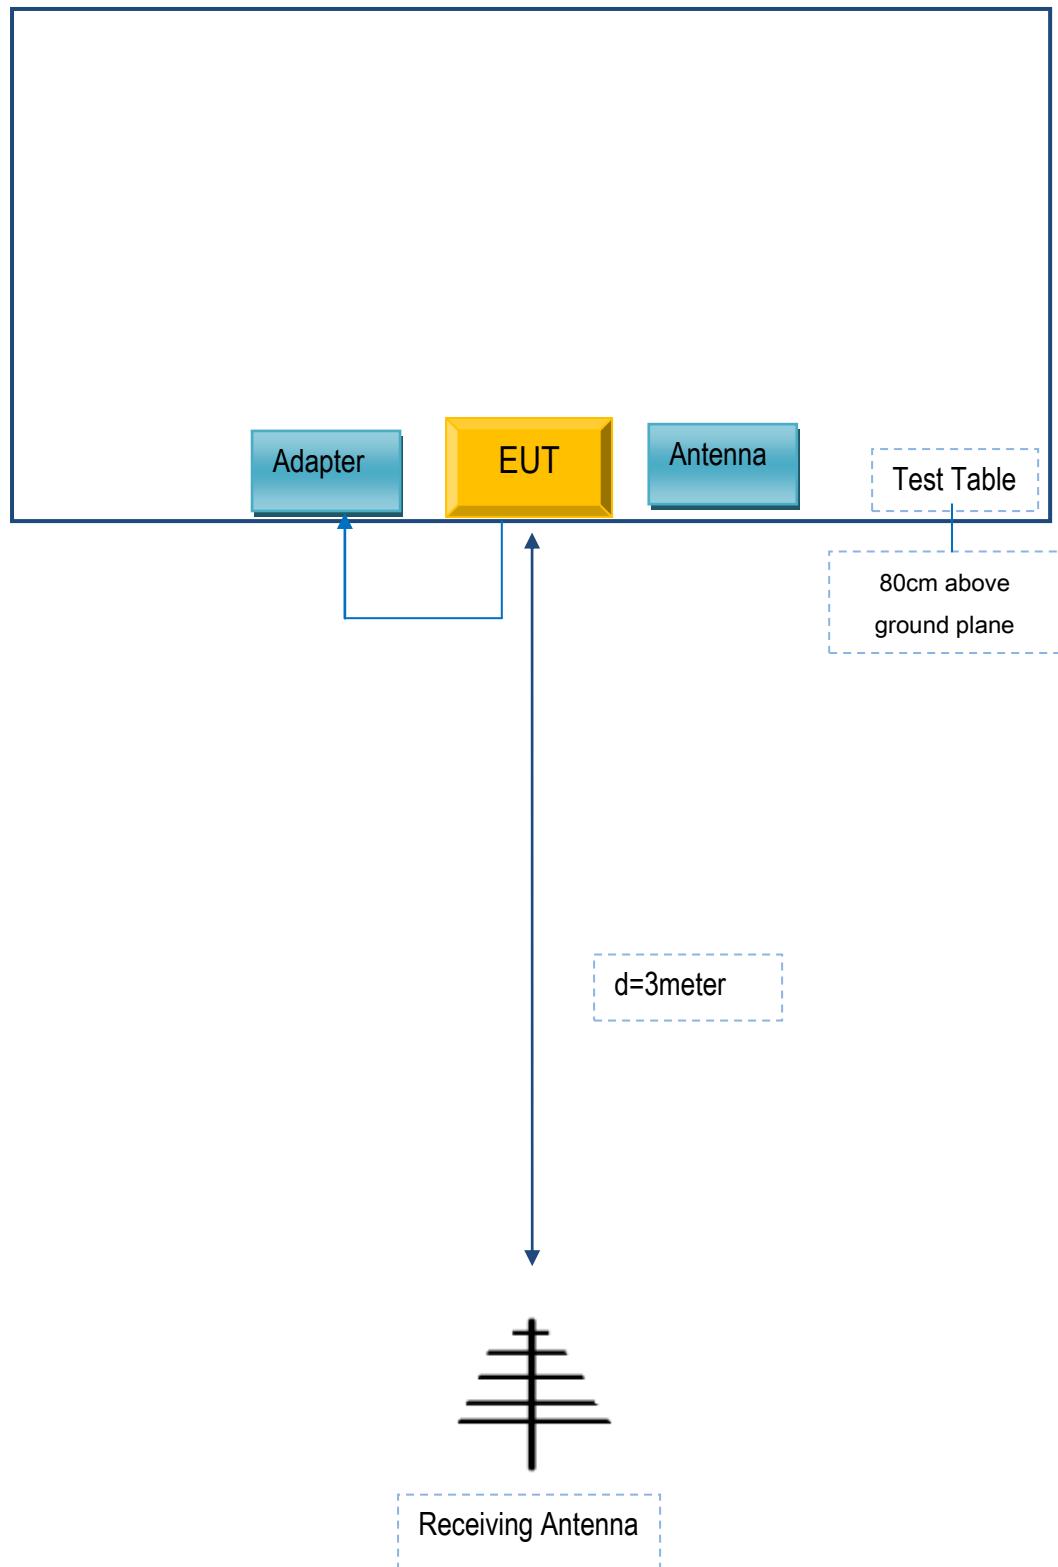

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

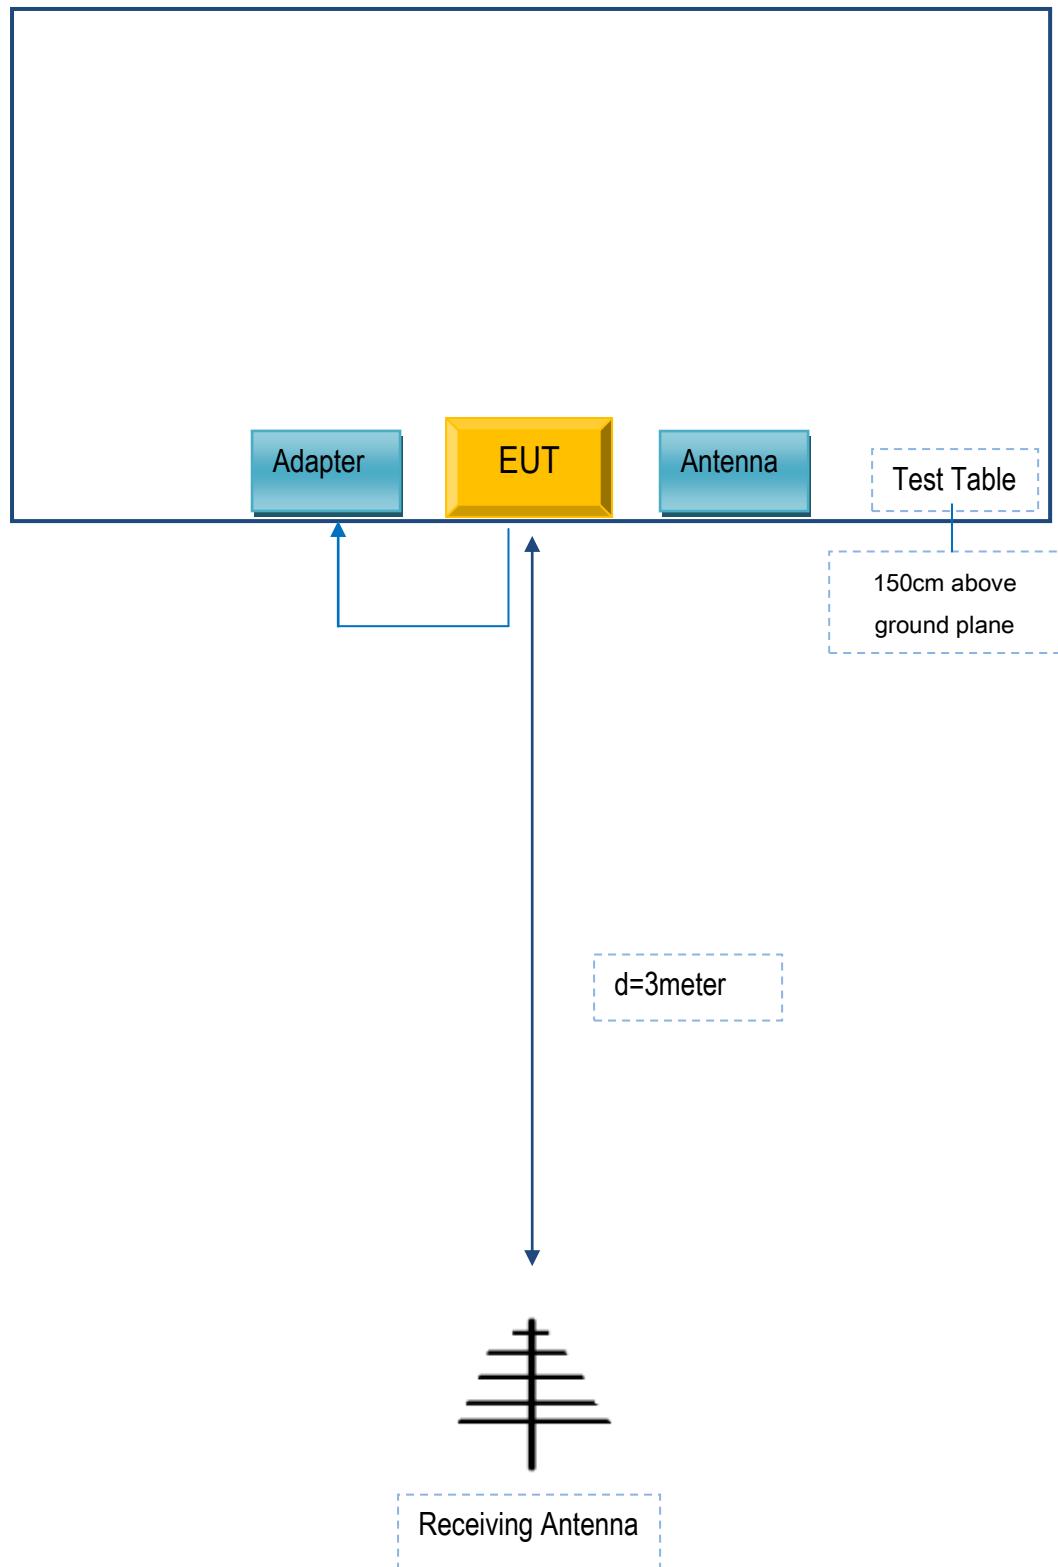

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Cedar Kingdom Corporation Limited	Adapter	V105	T0533

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	T0533

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A