



FCC Part 15C Test Report

FCC ID: 2AKQV-TX95

Product Name:	Android TV BOX
Trademark:	N/A
Model Name :	TX95(Serial Model detailed see page 7)
Prepared For :	SHENZHEN ORANTH TECHNOLOGY CO.,LTD.
Address :	Room 101, Area 1, Building B, Mingyou Industrial Park, Baoan District, Shenzhen, China
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101,Yousong Road,Longhua New District, Shenzhen,China
Test Date:	Nov. 01 - Nov. 30, 2016
Date of Report :	Nov. 30, 2016
Report No.:	BCTC-FY161104890E



CERTIFICATION

Applicant's name.....: SHENZHEN ORANTH TECHNOLOGY CO.,LTD.
Address.....: Room 101, Area 1, Building B, Mingyou Industrial Park, Baoan District, Shenzhen, China
Manufacture's Name.....: SHENZHEN ORANTH TECHNOLOGY CO.,LTD.
Address.....: Room 101, Area 1, Building B, Mingyou Industrial Park, Baoan District, Shenzhen, China

Product description

Product name.....: Android TV BOX
Trademark.....: N/A
Model and/or type reference : TX95 (Serial Model detailed see page 7)

Standards.....: FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer : 
Eric Yang

Reviewer (Supervisor) : 
Simon Wang

Approved & Authorized Signer(Manager) : 

Carson Zhang

**Table of Contents****Page**

. SUMMARY OF TEST RESULTS.....	5
TEST FACILITY.....	6
MEASUREMENT UNCERTAINTY.....	6
. GENERAL INFORMATION.....	7
GENERAL DESCRIPTION OF EUT.....	7
DESCRIPTION OF TEST MODES.....	8
BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	8
DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	9
EQUIPMENTS LIST FOR ALL TEST ITEMS.....	10
. EMC EMISSION TEST.....	11
CONDUCTED EMISSION MEASUREMENT.....	11
POWER LINE CONDUCTED EMISSION LIMITS.....	11
TEST PROCEDURE.....	11
DEVIATION FROM TEST STANDARD.....	11
TEST SETUP.....	12
EUT OPERATING CONDITIONS.....	12
TEST RESULTS.....	12
RADIATED EMISSION MEASUREMENT.....	15
RADIATED EMISSION LIMITS.....	15
TEST PROCEDURE.....	16
DEVIATION FROM TEST STANDARD.....	16
TEST SETUP.....	16
EUT OPERATING CONDITIONS.....	17
TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	18
TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	19
TEST RESULTS (1GHZ~25GHZ).....	21
3.3 RADIATED BAND EMISSION MEASUREMENT.....	25
3.3.1 TEST REQUIREMENT:.....	25
3.3.2 TEST PROCEDURE.....	25
3.3.3 DEVIATION FROM TEST STANDARD.....	26
3.3.4 TEST SETUP.....	26
3.3.5 EUT OPERATING CONDITIONS.....	26
. POWER SPECTRAL DENSITY TEST.....	31

**Table of Contents**

	Page
APPLIED PROCEDURES / LIMIT.....	31
TEST PROCEDURE.....	31
DEVIATION FROM STANDARD.....	31
TEST SETUP.....	31
EUT OPERATION CONDITIONS.....	31
TEST RESULTS.....	32
. BANDWIDTH TEST.....	40
APPLIED PROCEDURES / LIMIT.....	40
TEST PROCEDURE.....	40
DEVIATION FROM STANDARD.....	40
TEST SETUP.....	40
EUT OPERATION CONDITIONS.....	40
TEST RESULTS.....	41
. PEAK OUTPUT POWER TEST.....	49
APPLIED PROCEDURES / LIMIT.....	49
TEST PROCEDURE.....	49
DEVIATION FROM STANDARD.....	49
TEST SETUP.....	49
EUT OPERATION CONDITIONS.....	49
TEST RESULTS.....	50
. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	51
7.1 APPLICABLE STANDARD.....	51
7.2 TEST PROCEDURE.....	51
7.3 DEVIATION FROM STANDARD.....	51
7.4 TEST SETUP.....	51
7.5 EUT OPERATION CONDITIONS.....	51
TEST RESULTS.....	51
. ANTENNA REQUIREMENT.....	56
STANDARD REQUIREMENT.....	56
EUT ANTENNA.....	56
. EUT TEST PHOTO.....	57
. EUT PHOTO.....	59
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-GEN 8.8 RSS-247 3.1	Conducted Emission	PASS	
15.247 (a)(2) RSS-247 5.2 (1)	6dB Bandwidth	PASS	
15.247 (b) RSS-247 5.4 (3)	Peak Output Power	PASS	
15.247 (c) RSS-247 5.5	Radiated Spurious Emission	PASS	
15.247 (d) RSS-247 5.2 (2)	Power Spectral Density	PASS	
15.205 RSS-247 5.5	Band Edge Emission	PASS	
15.203 RSS-247 5.4	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

**TEST FACILITY**

Shenzhen BCTC Technology Co., Ltd.

Add. : No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registered No.: 187086

IC Registered No.: 12655A

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Equipment	Android TV BOX										
Trade Name	N/A										
Model Name	TX95										
Serial Model	TX1, TX2, TX3, TX3 PRO, TX3 PLUS, TX5, TX5 PRO, TX5 PLUS, TX6, TX7, TX8, TX8 mini, TX8 max, TX8 PLUS, TX8 PRO, TX9, TX95 mini, TX95 max, TX95 PLUS, TX95 PRO, TX92, TX92 PRO, TX96, TX96PRO, TX95D, TX95D max, TX66, TX68, TX88, TX86, TX10, TX11, TX12, TX13, Tanix, MXQ, MXQ PRO, M8, M8S, TX15, TX98, Dragon-Box, Air TV T300, Air TV T310, Air TV T320, Air TV T400, Air TV T410, Air TV T420, Air TV T500, Air TV T510, Air TV T520, M9C, M9C PRO, M9C MAX, X8S, X8S PRO, Q12, S95X, S95X PRO, Hi BOX, Z11, Z11 pro, TX16, TX17, TX18, TX19, TX20, TX21, TX22, TX23, TX25, TX26, TX27, TX28, TX29, TX30, TX99, MX95, MX95 Mini, MX95 Pro, MX95 Plus, MX95 egde										
Model Difference	All the same, Only model name is different and outlook color.										
Product Description	The EUT is a Android TV BOX <table> <tr> <td>Operation Frequency:</td><td>802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz</td></tr> <tr> <td>Modulation Type:</td><td>WIFI: OFDM/DSSS</td></tr> <tr> <td>Bit Rate of Transmitter</td><td>802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps</td></tr> <tr> <td>Number Of Channel</td><td>802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH</td></tr> <tr> <td>Antenna Designation:</td><td>Please see Note 3.</td></tr> </table> Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz	Modulation Type:	WIFI: OFDM/DSSS	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH	Antenna Designation:	Please see Note 3.
Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz										
Modulation Type:	WIFI: OFDM/DSSS										
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps										
Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH										
Antenna Designation:	Please see Note 3.										
Channel List	Please refer to the Note 2.										
Power Source	Input: AC 120V/60Hz Output: DC 5V/2A										
Adapter	Model: LXQ12US-050200 I/P:AC 100-240V 50/60Hz 0.3A O/P: DC 5V 2A										
hardware version	CS_905X_TX95_V1.1										
Software version	V1.0										
Serial number	--										
Connecting I/O Port(s)	Please refer to the User's Manual										

Note:



1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	Internal antenna	1dBi	

DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

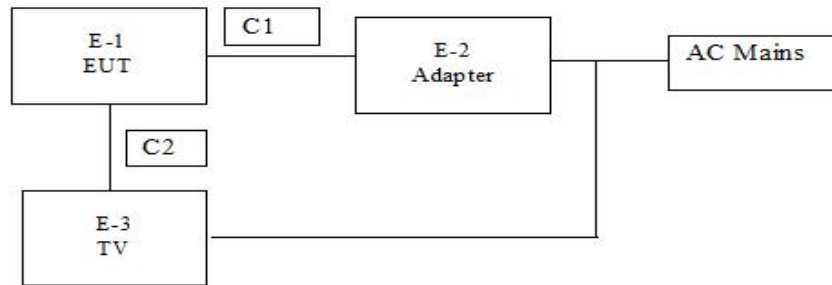

Radiated Spurious Emission Test



DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Android TV BOX	N/A	TX95	N/A	EUT
E-2	Adapter	N/A	LXQ12US-050200	N/A	
E-3	LCD TV	Guanjie	T3250MD	N/A	Peripheral

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1.0m	DC cable
C2	NO	NO	1.0M	HDMI cable shielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	2016.08.27	2017.08.26
2	Test Receiver	R&S	ESPI	101396	2016.08.27	2017.08.26
3	Bilog Antenna	SCHWARZBECK	VULB9160	VULB9160-3369	2016.08.27	2017.08.26
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.08.27	2017.08.26
5	Spectrum Analyzer	Agilent	N9020A	MY5051041	2016.08.27	2017.08.26
6	Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2016.08.27	2017.08.26
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.08.25	2017.08.24
8	Amplifier	SCHWARZBECK	BBV9718	9718-270	2016.08.25	2017.08.24
9	Amplifier	SCHWARZBECK	BBV9743	9743-119	2016.08.25	2017.08.24
10	Loop Antenna	ARA	PLEM95X30/B	1029	2016.08.25	2017.08.24
11	Power Meter	R&S	NRVS	100696	2016.08.27	2017.08.26
12	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.08.27	2017.08.26
13	RF cables	R&S	N/A	N/A	2016.08.27	2017.08.26

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2016.08.27	2017.08.26
2	LISN	R&S	NSLK8126	8126466	2016.08.27	2017.08.26
3	LISN	R&S	NSLK8126	8126487	2016.08.27	2017.08.26
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.08.27	2017.08.26
5	RF cables	R&S	R204	R20X	2016.08.27	2017.08.26



EMC EMISSION TEST

CONDUCTED EMISSION MEASUREMENT

POWER LINE CONDUCTED EMISSION Limits

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

DEVIATION FROM TEST STANDARD

No deviation

TEST SETUP

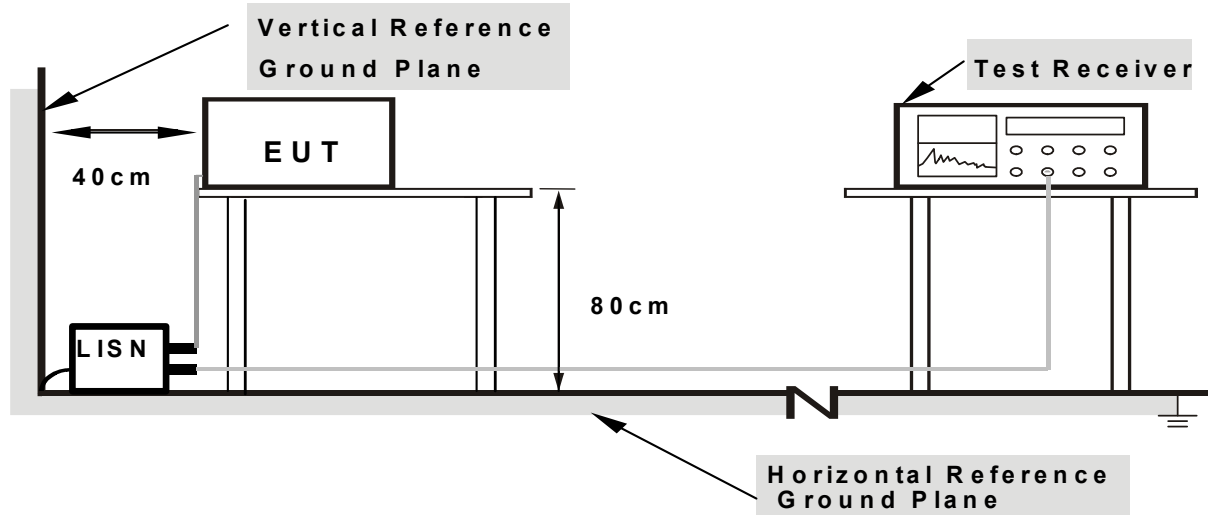

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

TEST RESULTS



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A	Test Mode :	Mode 5

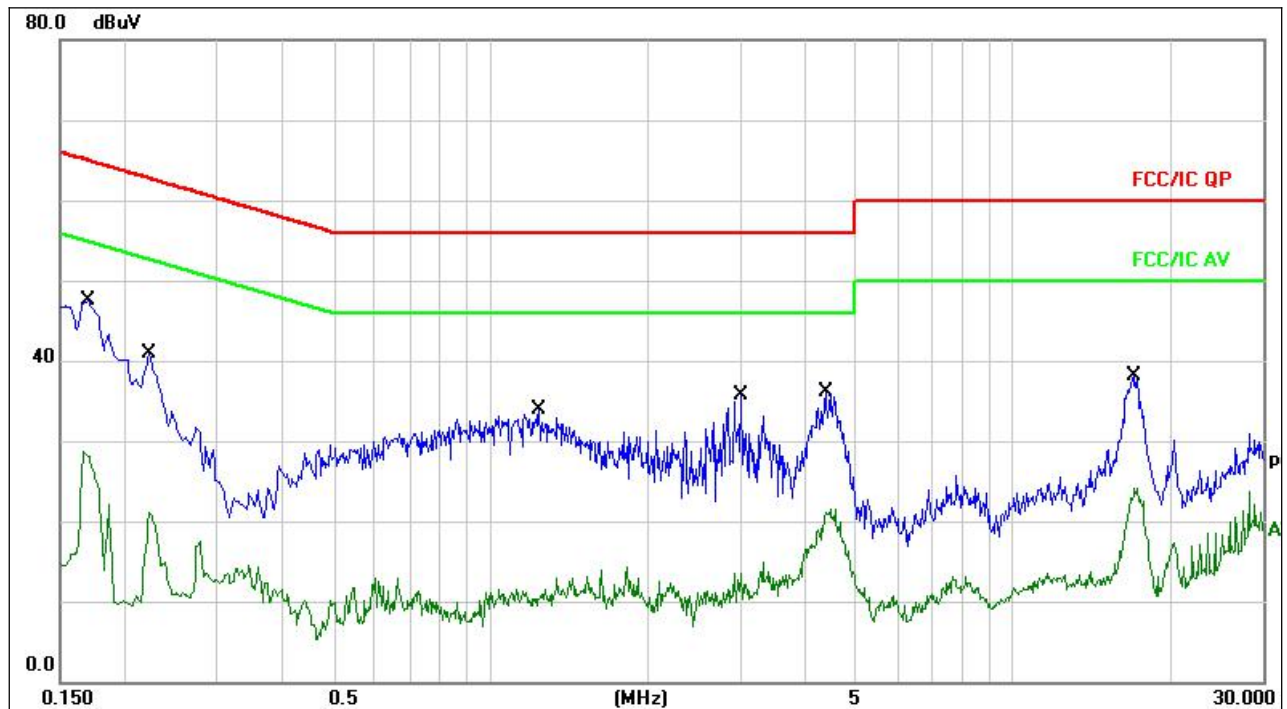


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1539	49.61	9.67	59.28	65.78	-6.50	QP	
2		0.1539	28.49	9.67	38.16	55.78	-17.62	AVG	
3		0.4420	39.29	9.67	48.96	57.02	-8.06	QP	
4		0.4420	16.84	9.67	26.51	47.02	-20.51	AVG	
5		0.6460	38.39	9.68	48.07	56.00	-7.93	QP	
6		0.6460	17.64	9.68	27.32	46.00	-18.68	AVG	
7		1.5700	39.25	9.70	48.95	56.00	-7.05	QP	
8		1.5700	19.54	9.70	29.24	46.00	-16.76	AVG	
9		5.0739	40.60	9.74	50.34	60.00	-9.66	QP	
10		5.0739	19.99	9.74	29.73	50.00	-20.27	AVG	
11		10.4339	39.05	9.83	48.88	60.00	-11.12	QP	
12		10.4339	22.32	9.83	32.15	50.00	-17.85	AVG	



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Input: AC 120V/60Hz Output:DC 5V/2A	Test Mode :	Mode 5

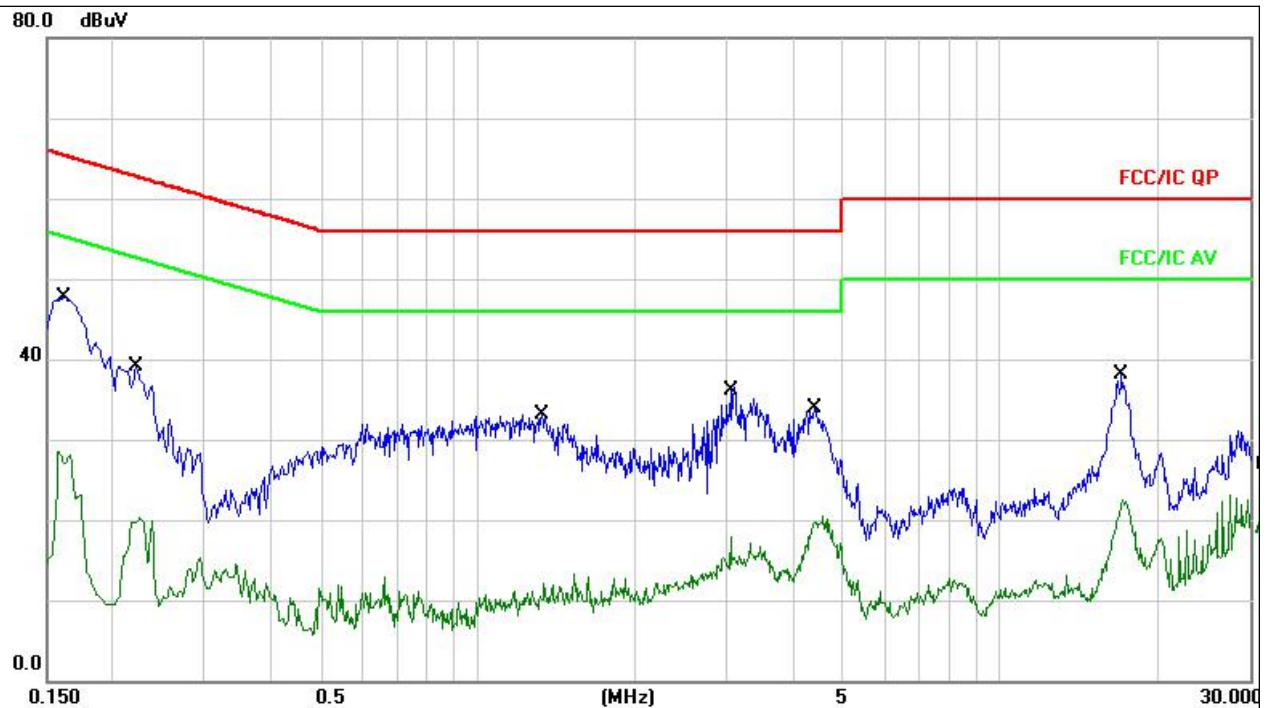

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	50.61	9.73	60.34	65.78	-5.44	QP	
2		0.1539	29.49	9.73	39.22	55.78	-16.56	AVG	
3	*	0.6043	41.92	9.67	51.59	56.00	-4.41	QP	
4		0.6043	21.14	9.67	30.81	46.00	-15.19	AVG	
5		0.8438	41.35	9.69	51.04	56.00	-4.96	QP	
6		0.8438	17.71	9.69	27.40	46.00	-18.60	AVG	
7		1.5684	38.75	9.71	48.46	56.00	-7.54	QP	
8		1.5684	19.31	9.71	29.02	46.00	-16.98	AVG	
9		5.0580	40.60	9.74	50.34	60.00	-9.66	QP	
10		5.0580	19.99	9.74	29.73	50.00	-20.27	AVG	
11		10.3972	38.55	9.84	48.39	60.00	-11.61	QP	
12		10.3972	21.83	9.84	31.67	50.00	-18.33	AVG	

**RADIATED EMISSION MEASUREMENT****RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

DEVIATION FROM TEST STANDARD


No deviation

TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

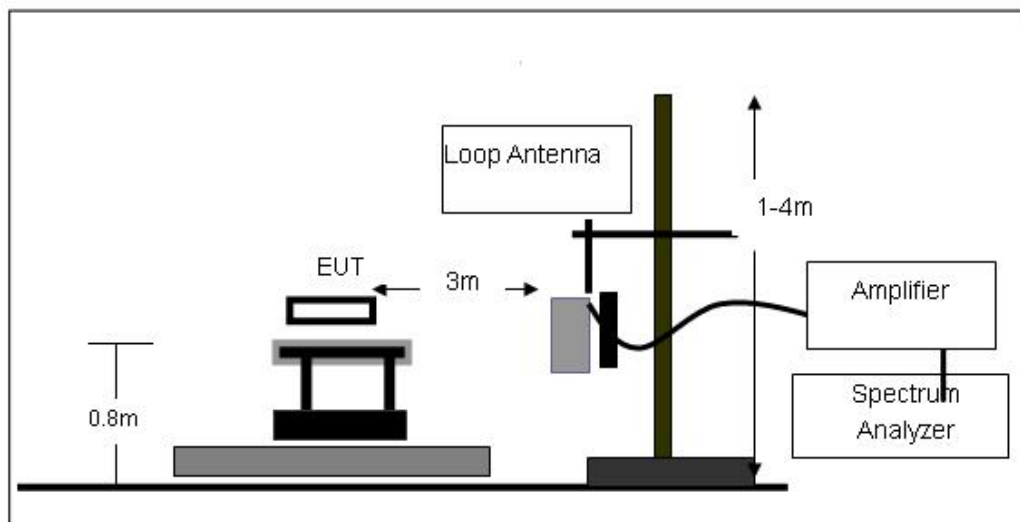

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

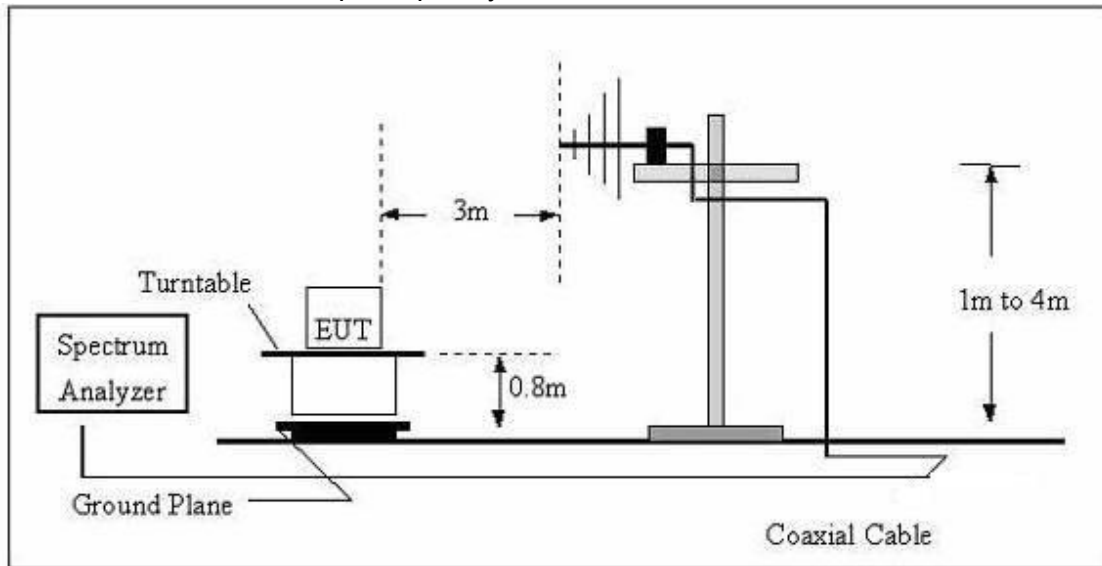

(C) Radiated Emission Test-Up Frequency Above 1GHz

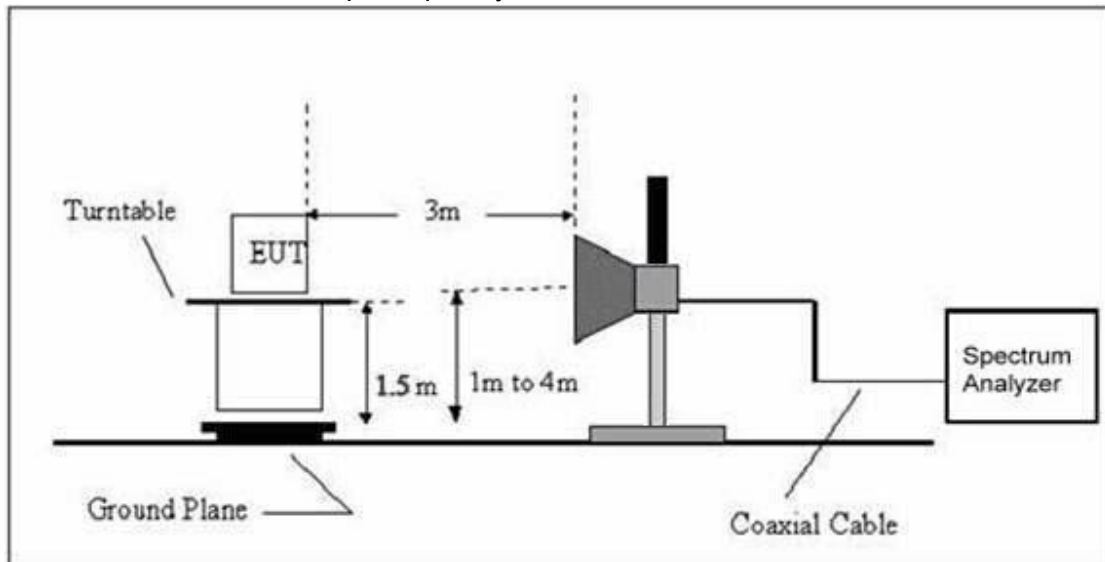

EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	Input: AC 120V/60Hz Output:DC 5V/2A
Test Mode :	Mode 1/2/3/4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	Input: AC 120V/60Hz Output:DC 5V/2A		
Test Mode :	Mode 1/2/3/4		

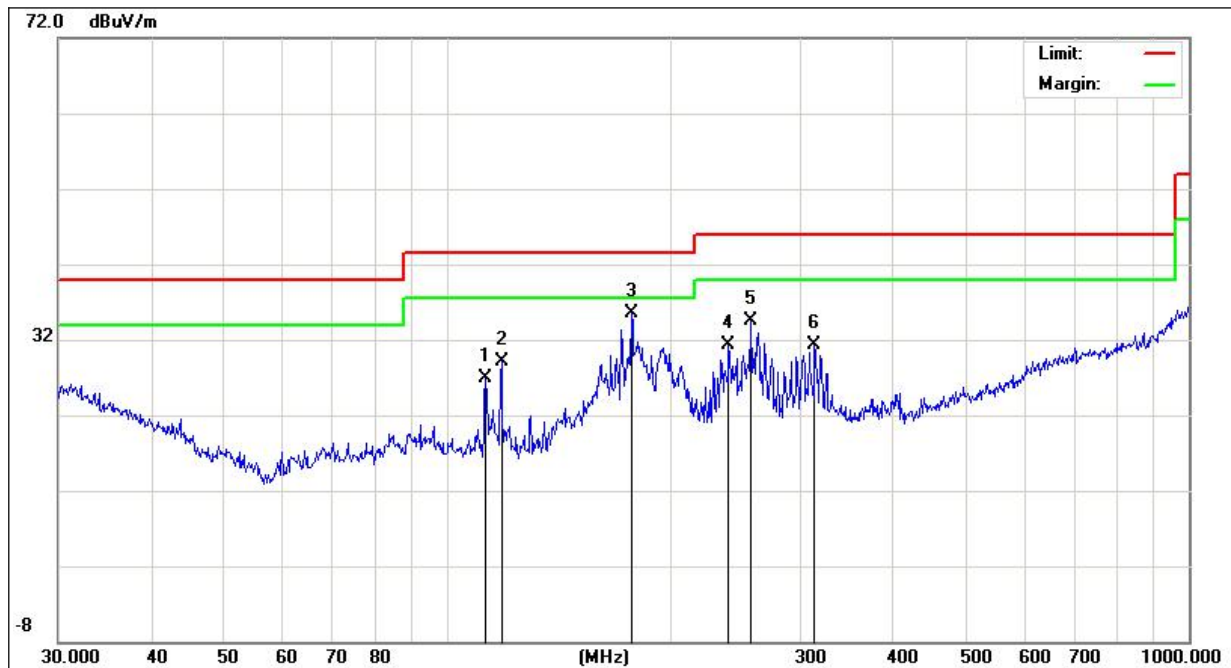


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		112.9196	15.68	11.30	26.98	43.50	-16.52	100	147
2		118.6014	17.51	11.52	29.03	43.50	-14.47	150	135
3	*	177.5092	22.13	13.33	35.46	43.50	-8.04	150	128
4		239.9874	19.26	11.96	31.22	46.00	-14.78	100	112
5		257.4222	22.18	12.31	34.49	46.00	-11.51	100	103
6		313.2760	16.88	14.34	31.22	46.00	-14.78	100	298



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	Input: AC 120V/60Hz Output:DC 5V/2A		
Test Mode :	Mode 1/2/3/4		

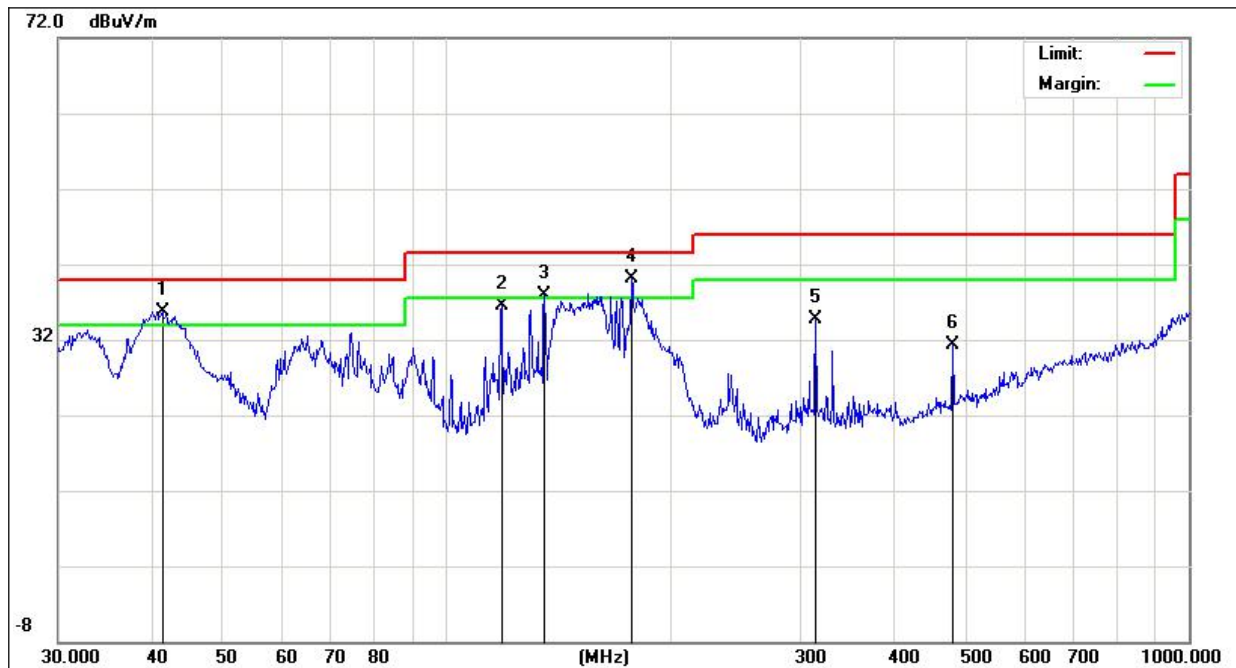

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree
1	!	41.4215	21.33	14.44	35.77	40.00	-4.23	QP	100	158
2		118.6013	24.95	11.52	36.47	43.50	-7.03	QP	100	142
3	!	135.5062	25.76	12.06	37.82	43.50	-5.68	QP	150	102
4	*	177.5092	26.70	13.33	40.03	43.50	-3.47	QP	150	164
5		314.3765	20.27	14.35	34.62	46.00	-11.38	QP	100	132
6		480.5276	13.48	17.92	31.40	46.00	-14.60	QP	100	122



TEST RESULTS (1GHZ~25GHZ)

802.11b

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.00	41.42	19.36	60.78	74.00	-13.22	PK
V	4824.00	28.86	19.36	48.22	54.00	-5.78	AV
V	7236.00	37.54	17.17	54.71	74.00	-19.29	PK
V	7236.00	27.04	17.17	44.21	54.00	-9.79	AV
V	15450.00	31.25	20.59	51.84	74.00	-22.16	PK
H	4824.00	41.22	19.36	60.58	74.00	-13.42	PK
H	4824.00	28.72	19.36	48.08	54.00	-5.92	AV
H	7236.00	38.24	17.17	55.41	74.00	-18.59	PK
H	7236.00	29.23	17.17	46.4	54.00	-7.60	AV
H	15450.00	29.51	20.59	50.1	74.00	-23.9	PK
operation frequency:2437							
V	4874.00	41.33	19.42	60.75	74.00	-13.25	PK
V	4874.00	28.35	19.42	47.77	54.00	-6.23	AV
V	7311.00	39.41	17.19	56.6	74.00	-17.40	PK
V	7311.00	26.36	17.19	43.55	54.00	-10.45	AV
V	15450.00	31.23	20.59	51.82	74.00	-22.18	PK
H	4874.00	41.25	19.42	60.67	74.00	-13.33	PK
H	4874.00	26.24	19.42	45.66	54.00	-8.34	AV
H	7311.00	38.52	17.19	55.71	74.00	-18.29	PK
H	7311.00	25.65	17.19	42.84	54.00	-11.16	AV
H	15450.00	29.45	20.59	50.04	74.00	-23.96	PK
operation frequency:2462							
V	4924.00	40.72	19.47	60.19	74.00	-13.81	PK
V	4924.00	27.95	19.47	47.42	54.00	-6.58	AV
V	7386.00	37.26	17.22	54.48	74.00	-19.52	PK
V	7386.00	26.95	17.22	44.17	54.00	-9.83	AV
V	15450.00	31.02	20.59	51.61	74.00	-22.39	PK
H	4924.00	41.32	19.47	60.79	74.00	-13.21	PK
H	4924.00	27.75	19.47	47.22	54.00	-6.78	AV
H	7386.00	37.45	17.22	54.67	74.00	-19.33	PK
H	7386.00	28.35	17.22	45.57	54.00	-8.43	AV
H	15450.00	29.28	20.59	49.87	74.00	-24.13	PK

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.00	39.20	19.36	58.56	74.00	-15.44	PK
V	4824.00	28.84	19.36	48.20	54.00	-5.80	AV
V	7236.00	39.40	17.17	56.57	74.00	-17.43	PK
V	7236.00	28.91	17.17	46.08	54.00	-7.92	AV
V	15450.00	31.18	20.59	51.77	74.00	-22.23	PK
H	4824.00	39.24	19.36	58.60	74.00	-15.40	PK
H	4824.00	28.67	19.36	48.03	54.00	-5.97	AV
H	7236.00	39.18	17.17	56.35	74.00	-17.65	PK
H	7236.00	29.18	17.17	46.35	54.00	-7.65	AV
H	15450.00	29.46	20.59	50.05	74.00	-23.95	PK
operation frequency:2437							
V	4874.00	39.24	19.36	58.6	74.00	-15.4	PK
V	4874.00	28.84	19.36	48.2	54.00	-5.80	AV
V	7311.00	39.41	17.17	56.58	74.00	-17.42	PK
V	7311.00	28.91	17.17	46.08	54.00	-7.92	AV
V	15450.00	31.18	20.59	51.77	74.00	-22.23	PK
H	4874.00	39.26	19.36	58.62	74.00	-15.38	PK
H	4874.00	28.67	19.36	48.03	54.00	-5.97	AV
H	7311.00	39.18	17.17	56.35	74.00	-17.65	PK
H	7311.00	29.17	17.17	46.34	54.00	-7.66	AV
H	15450.00	29.46	20.59	50.05	74.00	-23.95	PK
operation frequency:2462							
V	4924.00	40.71	19.47	60.18	74.00	-13.82	PK
V	4924.00	27.92	19.47	47.39	54.00	-6.61	AV
V	7386.00	37.24	17.22	54.46	74.00	-19.54	PK
V	7386.00	26.93	17.22	44.15	54.00	-9.85	AV
V	15450.00	30.98	20.59	51.57	74.00	-22.43	PK
H	4924.00	41.32	19.47	60.79	74.00	-13.21	PK
H	4924.00	27.67	19.47	47.14	54.00	-6.86	AV
H	7386.00	37.45	17.22	54.67	74.00	-19.33	PK
H	7386.00	28.35	17.22	45.57	54.00	-8.43	AV
H	15450.00	29.24	20.59	49.83	74.00	-24.17	PK
Remark:							
1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit							
2. If peak below the average limit, the average emission was no test.							
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.							



802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412							
V	4824.00	39.35	19.36	58.71	74.00	-15.29	PK
V	4824.00	28.92	19.36	48.28	54.00	-5.72	AV
V	7236.00	39.51	17.17	56.68	74.00	-17.32	PK
V	7236.00	29.04	17.17	46.21	54.00	-7.79	AV
V	15450.00	31.23	20.59	51.82	74.00	-22.18	PK
H	4824.00	39.34	19.36	58.7	74.00	-15.3	PK
H	4824.00	28.72	19.36	48.08	54.00	-5.92	AV
H	7236.00	39.26	17.17	56.43	74.00	-17.57	PK
H	7236.00	29.27	17.17	46.44	54.00	-7.56	AV
H	15450.00	29.56	20.59	50.15	74.00	-23.85	PK
operation frequency:2437							
V	4874.00	41.42	19.42	60.84	74.00	-13.16	PK
V	4874.00	28.43	19.42	47.85	54.00	-6.15	AV
V	7311.00	39.52	17.19	56.71	74.00	-17.29	PK
V	7311.00	26.46	17.19	43.65	54.00	-10.35	AV
V	15450.00	31.25	20.59	51.84	74.00	-22.16	PK
H	4874.00	41.37	19.42	60.79	74.00	-13.21	PK
H	4874.00	26.26	19.42	45.68	54.00	-8.32	AV
H	7311.00	38.58	17.19	55.77	74.00	-18.23	PK
H	7311.00	25.75	17.19	42.94	54.00	-11.06	AV
H	15450.00	29.56	20.59	50.15	74.00	-23.85	PK
operation frequency:2462							
V	4924.00	40.82	19.47	60.29	74.00	-13.71	PK
V	4924.00	28.02	19.47	47.49	54.00	-6.51	AV
V	7386.00	37.34	17.22	54.56	74.00	-19.44	PK
V	7386.00	27.05	17.22	44.27	54.00	-9.73	AV
V	15450.00	31.05	20.59	51.64	74.00	-22.36	PK
H	4924.00	41.42	19.47	60.89	74.00	-13.11	PK
H	4924.00	27.74	19.47	47.21	54.00	-6.79	AV
H	7386.00	37.55	17.22	54.77	74.00	-19.23	PK
H	7386.00	28.42	17.22	45.64	54.00	-8.36	AV
H	15450.00	29.35	20.59	49.94	74.00	-24.06	PK
Remark: 1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.							



802.11n(40MHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422							
V	4844.000	39.15	19.37	58.52	74.00	-15.48	PK
V	4844.000	28.82	19.37	48.19	54.00	-5.81	AV
V	7266.000	39.36	17.18	56.54	74.00	-17.46	PK
V	7266.000	28.87	17.18	46.05	54.00	-7.95	AV
V	15450.00	31.15	20.59	51.74	74.00	-22.26	PK
H	4844.000	39.16	19.37	58.53	74.00	-15.47	PK
H	4844.000	28.64	19.37	48.01	54.00	-5.99	AV
H	7266.000	39.13	17.18	56.31	74.00	-17.69	PK
H	7266.000	29.12	17.18	46.3	54.00	-7.70	AV
H	15450.00	29.43	20.59	50.02	74.00	-23.98	PK
operation frequency:2437							
V	4874.00	41.16	19.42	60.58	74.00	-13.42	PK
V	4874.00	28.26	19.42	47.68	54.00	-6.32	AV
V	7311.00	39.25	17.19	56.44	74.00	-17.56	PK
V	7311.00	26.24	17.19	43.43	54.00	-10.57	AV
V	15450.00	31.08	20.59	51.67	74.00	-22.33	PK
H	4874.00	41.12	19.42	60.54	74.00	-13.46	PK
H	4874.00	26.09	19.42	45.51	54.00	-8.49	AV
H	7311.00	38.36	17.19	55.55	74.00	-18.45	PK
H	7311.00	25.58	17.19	42.77	54.00	-11.23	AV
H	15450.00	29.35	20.59	49.94	74.00	-24.06	PK
operation frequency:2452							
V	4904.00	40.63	19.44	60.07	74.00	-13.93	PK
V	4904.00	27.92	19.44	47.36	54.00	-6.64	AV
V	7356.00	37.18	17.21	54.39	74.00	-19.61	PK
V	7356.00	26.92	17.21	44.13	54.00	-9.87	AV
V	15450.00	30.95	20.59	51.54	74.00	-22.46	PK
H	4904.00	41.26	19.44	60.7	74.00	-13.30	PK
H	4904.00	27.63	19.44	47.07	54.00	-6.93	AV
H	7356.00	37.42	17.21	54.63	74.00	-19.37	PK
H	7356.00	28.25	17.21	45.46	54.00	-8.54	AV
H	15450.00	29.27	20.59	49.86	74.00	-24.14	PK
Remark:							
1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit							
2. If peak below the average limit, the average emission was no test.							
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.							



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

RSS-247 5.5

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

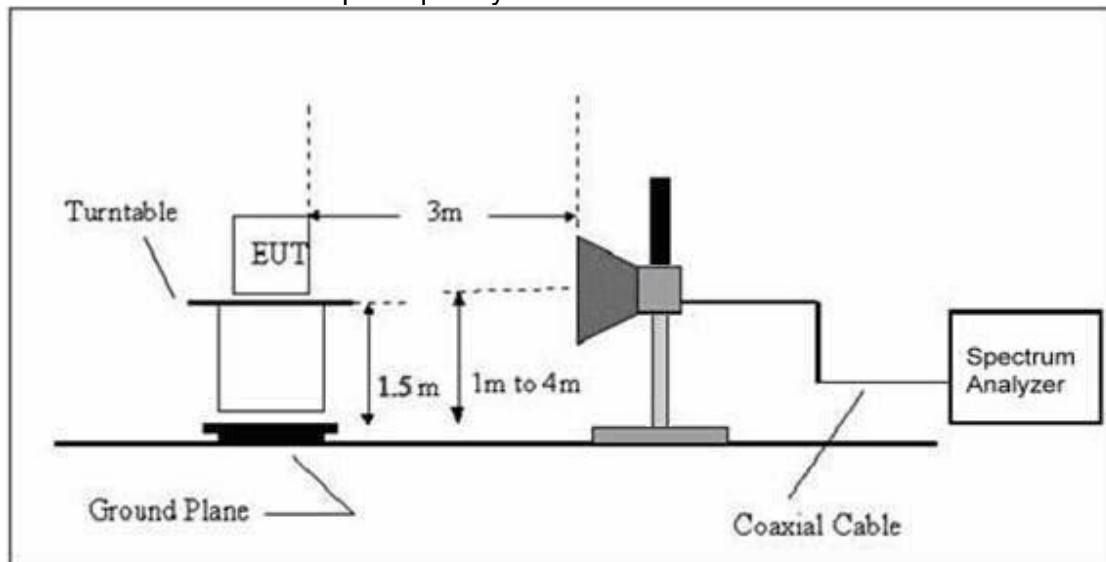

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412							
V	2390.00	37.43	13.83	51.26	74.00	-22.74	PK
V	2390.00	26.02	13.83	39.85	54.00	-14.15	AV
V	2400.00	37.64	13.85	51.49	74.00	-22.51	PK
V	2400.00	25.59	13.85	39.44	54.00	-14.56	AV
H	2390.00	37.74	13.83	51.57	74.00	-22.43	PK
H	2390.00	26.05	13.83	39.88	54.00	-14.12	AV
H	2400.00	37.62	13.85	51.47	74.00	-22.53	PK
H	2400.00	25.95	13.85	39.80	54.00	-14.20	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462							
V	2483.50	37.65	14.02	51.67	74.00	-22.33	PK
V	2483.50	26.26	14.02	40.28	54.00	-13.72	AV
V	2500.00	37.58	14.06	51.64	74.00	-22.36	PK
V	2500.00	25.72	14.06	39.78	54.00	-14.22	AV
H	2483.50	37.75	14.02	51.77	74.00	-22.23	PK
H	2483.50	26.26	14.02	40.28	54.00	-13.72	AV
H	2500.00	37.35	14.06	51.41	74.00	-22.59	PK
H	2500.00	26.54	14.06	40.60	54.00	-13.40	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412							
V	2390.00	37.12	13.83	50.95	74.00	-23.05	PK
V	2390.00	25.79	13.83	39.62	54.00	-14.38	AV
V	2400.00	37.32	13.85	51.17	74.00	-22.83	PK
V	2400.00	25.37	13.85	39.22	54.00	-14.78	AV
H	2390.00	37.41	13.83	51.24	74.00	-22.76	PK
H	2390.00	25.82	13.83	39.65	54.00	-14.35	AV
H	2400.00	37.27	13.85	51.12	74.00	-22.88	PK
H	2400.00	25.76	13.85	39.61	54.00	-14.39	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462							
V	2483.50	37.32	14.02	51.34	74.00	-22.66	PK
V	2483.50	26.03	14.02	40.05	54.00	-13.95	AV
V	2500.00	37.26	14.06	51.32	74.00	-22.68	PK
V	2500.00	25.48	14.06	39.54	54.00	-14.46	AV
H	2483.50	37.45	14.02	51.47	74.00	-22.53	PK
H	2483.50	26.07	14.02	40.09	54.00	-13.91	AV
H	2500.00	37.07	14.06	51.13	74.00	-22.87	PK
H	2500.00	26.32	14.06	40.38	54.00	-13.62	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412							
V	2390.00	37.22	13.83	51.05	74.00	-22.95	PK
V	2390.00	25.87	13.83	39.70	54.00	-14.30	AV
V	2400.00	37.43	13.85	51.28	74.00	-22.72	PK
V	2400.00	25.44	13.85	39.29	54.00	-14.71	AV
H	2390.00	37.52	13.83	51.35	74.00	-22.65	PK
H	2390.00	25.90	13.83	39.73	54.00	-14.27	AV
H	2400.00	37.38	13.85	51.23	74.00	-22.77	PK
H	2400.00	25.84	13.85	39.69	54.00	-14.31	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462							
V	2483.50	37.43	14.02	51.45	74.00	-22.55	PK
V	2483.50	26.10	14.02	40.12	54.00	-13.88	AV
V	2500.00	37.37	14.06	51.43	74.00	-22.57	PK
V	2500.00	25.55	14.06	39.61	54.00	-14.39	AV
H	2483.50	37.56	14.02	51.58	74.00	-22.42	PK
H	2483.50	26.14	14.02	40.16	54.00	-13.84	AV
H	2500.00	37.17	14.06	51.23	74.00	-22.77	PK
H	2500.00	26.39	14.06	40.45	54.00	-13.55	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2422							
V	2390.00	37.54	13.83	51.37	74.00	-22.63	PK
V	2390.00	26.08	13.83	39.91	54.00	-14.09	AV
V	2400.00	37.75	13.85	51.60	74.00	-22.40	PK
V	2400.00	25.66	13.85	39.51	54.00	-14.49	AV
H	2390.00	37.84	13.83	51.67	74.00	-22.33	PK
H	2390.00	26.10	13.83	39.93	54.00	-14.07	AV
H	2400.00	37.70	13.85	51.55	74.00	-22.45	PK
H	2400.00	26.05	13.85	39.90	54.00	-14.10	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2452							
V	2483.50	37.75	14.02	51.77	74.00	-22.23	PK
V	2483.50	26.32	14.02	40.34	54.00	-13.66	AV
V	2500.00	37.69	14.06	51.75	74.00	-22.25	PK
V	2500.00	25.76	14.06	39.82	54.00	-14.18	AV
H	2483.50	37.88	14.02	51.90	74.00	-22.10	PK
H	2483.50	26.36	14.02	40.38	54.00	-13.62	AV
H	2500.00	37.49	14.06	51.55	74.00	-22.45	PK
H	2500.00	26.61	14.06	40.67	54.00	-13.33	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



. POWER SPECTRAL DENSITY TEST

APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

DEVIATION FROM STANDARD

No deviation.

TEST SETUP




EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS**


Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX b Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-16.50	8	PASS
2437 MHz	-16.18	8	PASS
2462 MHz	-15.70	8	PASS

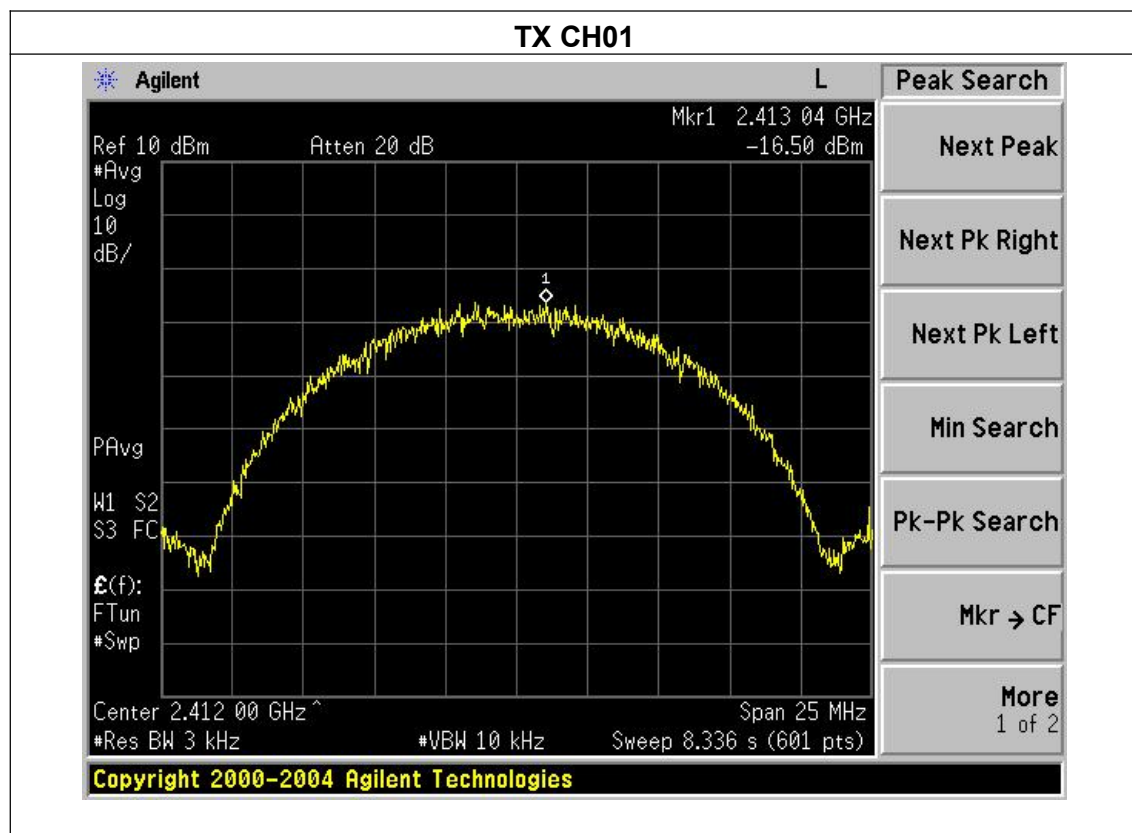




TX CH06

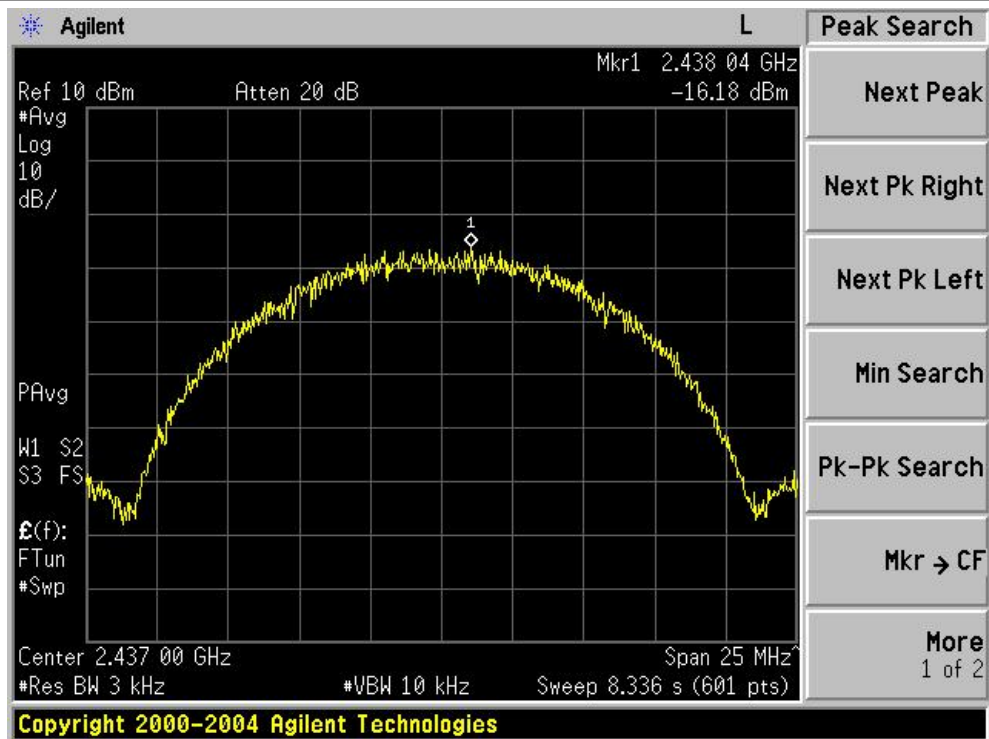


TX CH11


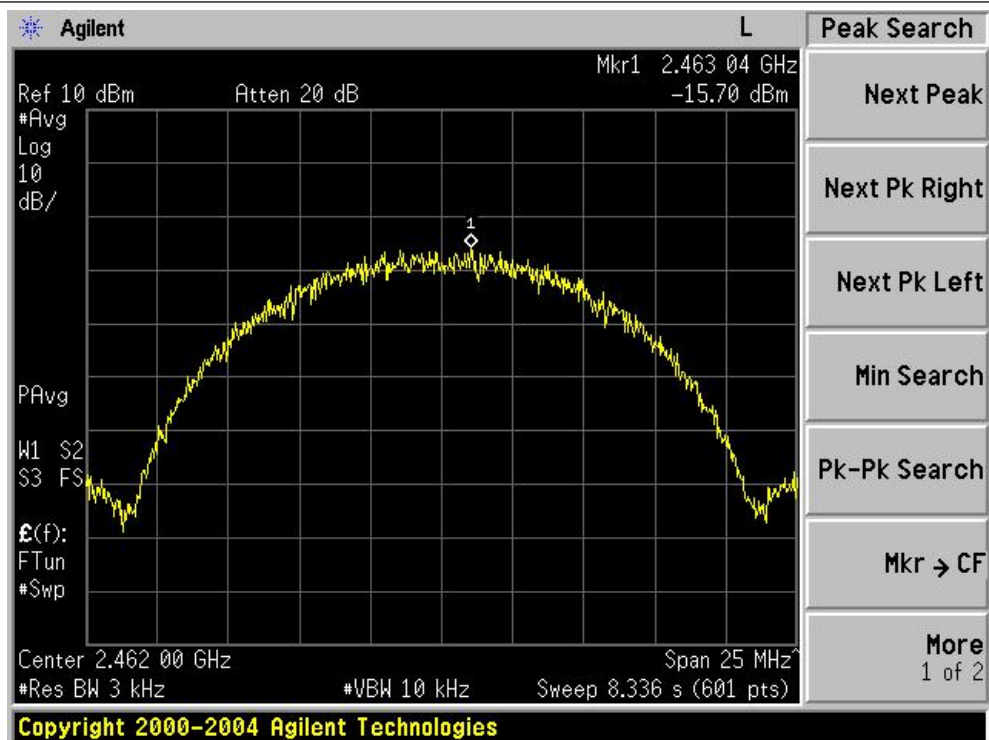




Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX g Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-21.94	8	PASS
2437 MHz	-22.24	8	PASS
2462 MHz	-20.81	8	PASS

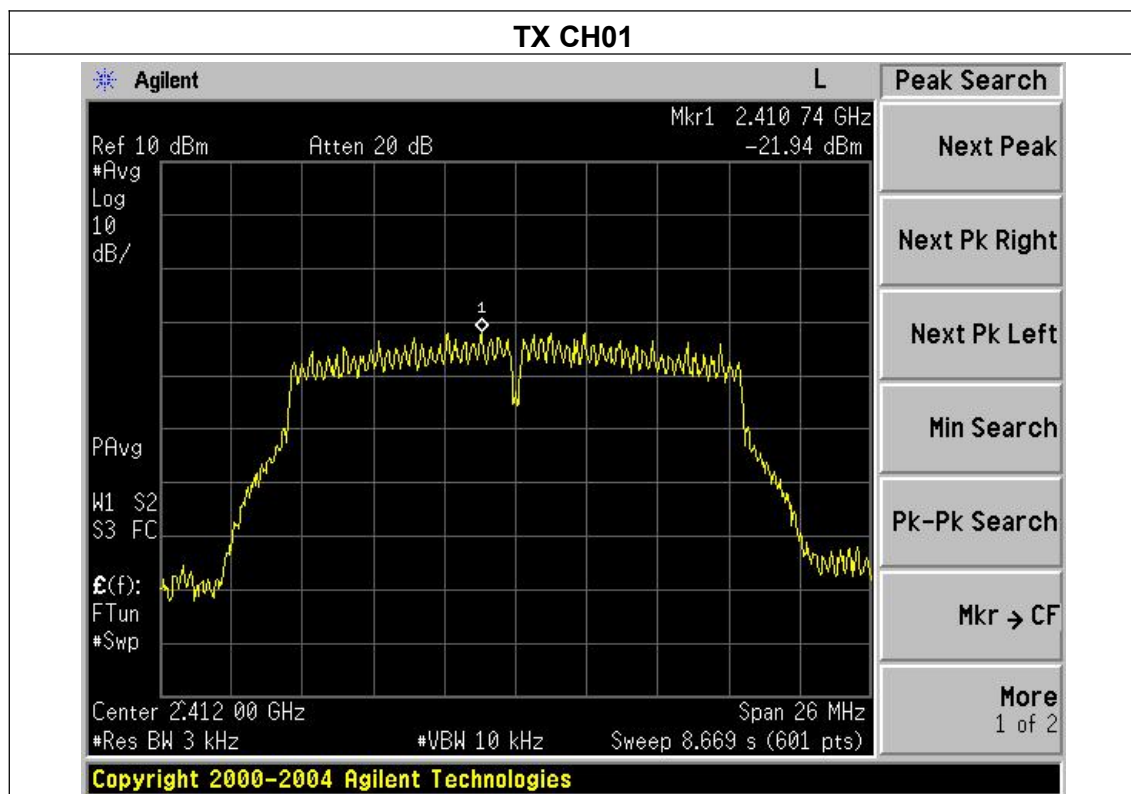


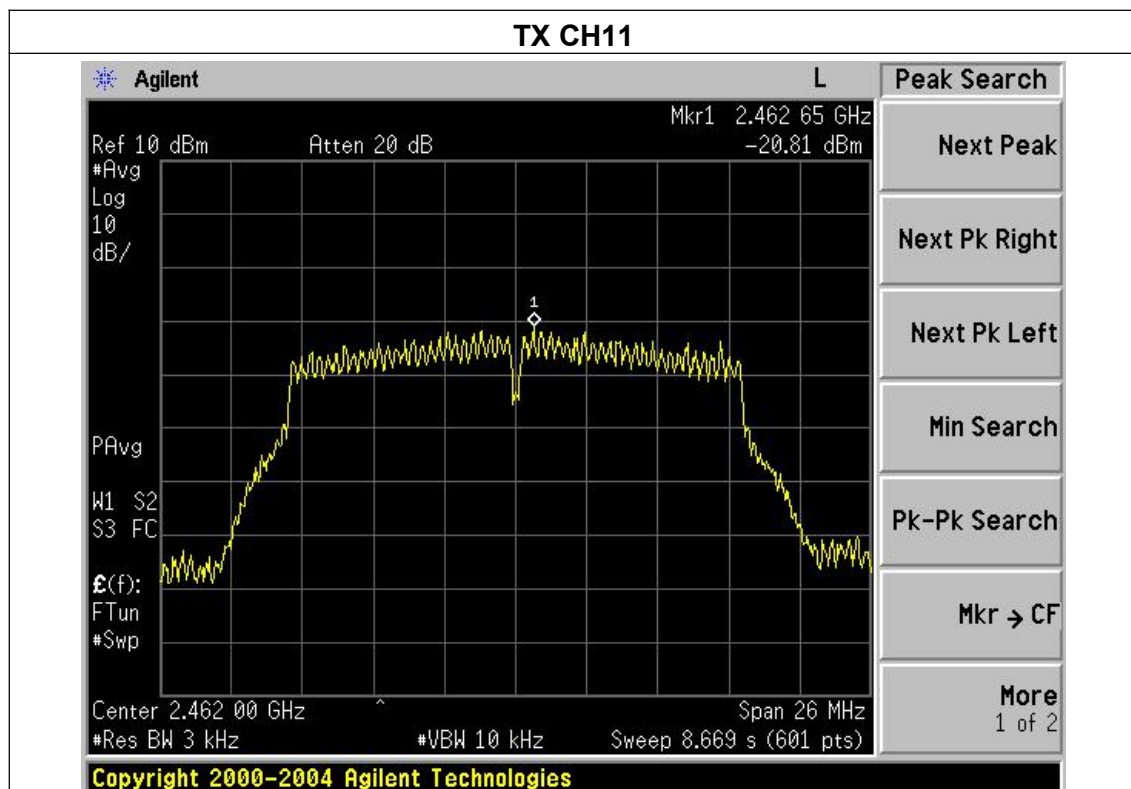
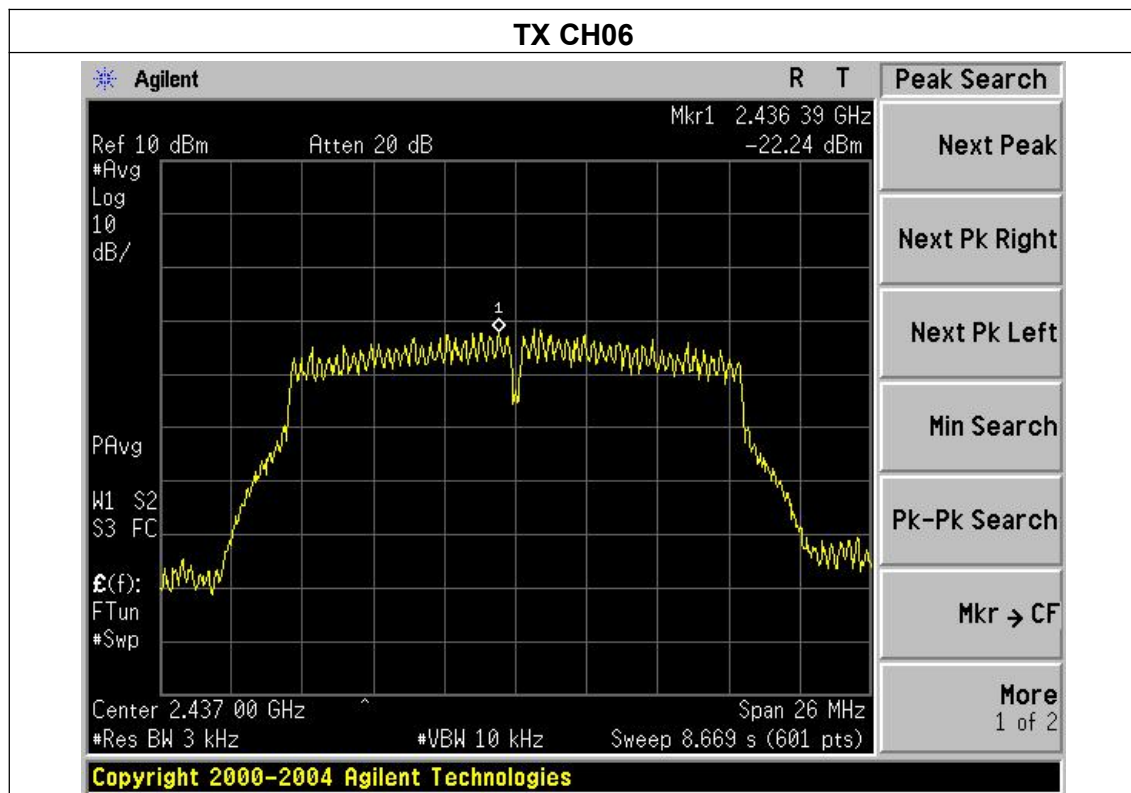




Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-20.01	8	PASS
2437 MHz	-20.77	8	PASS
2462 MHz	-19.24	8	PASS

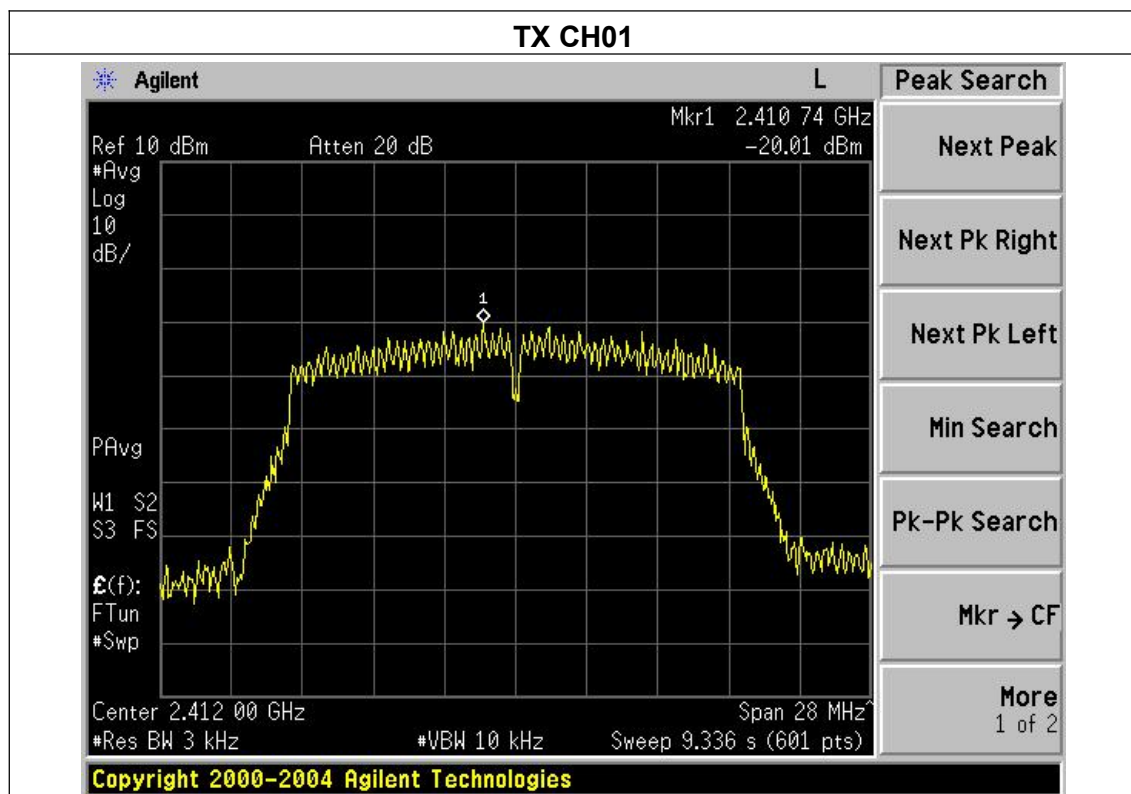


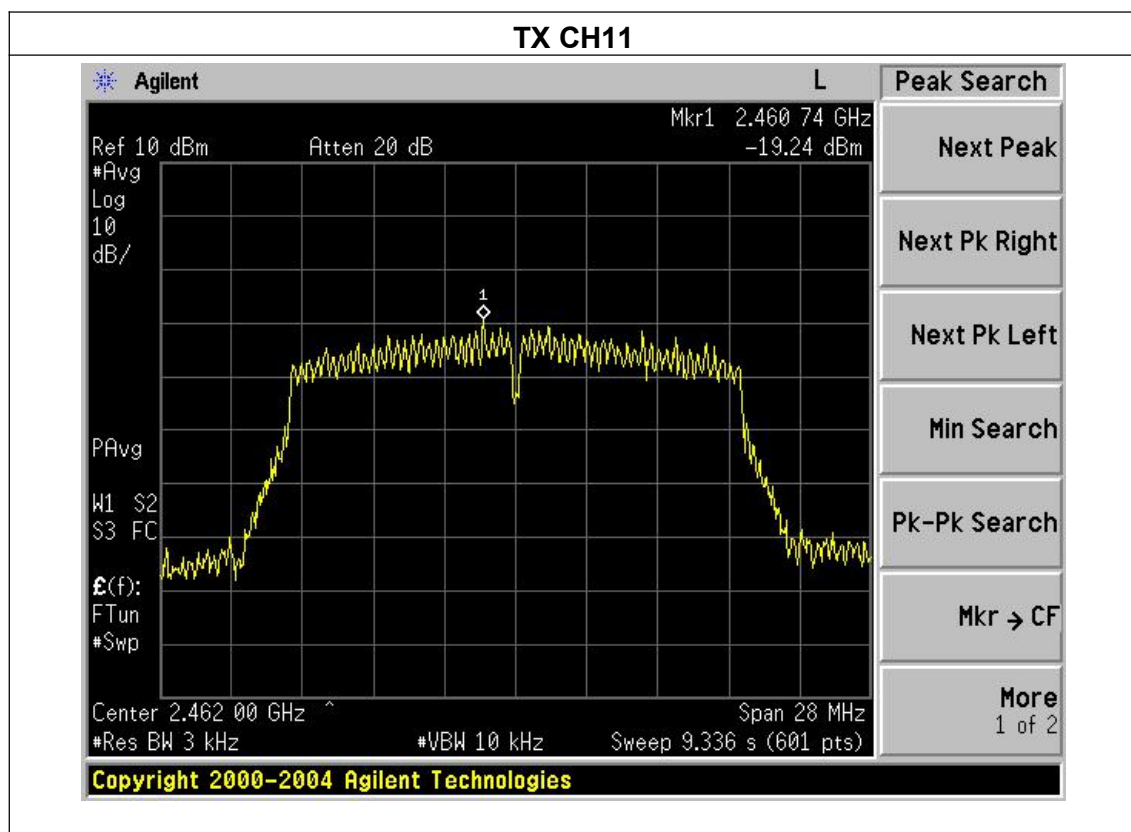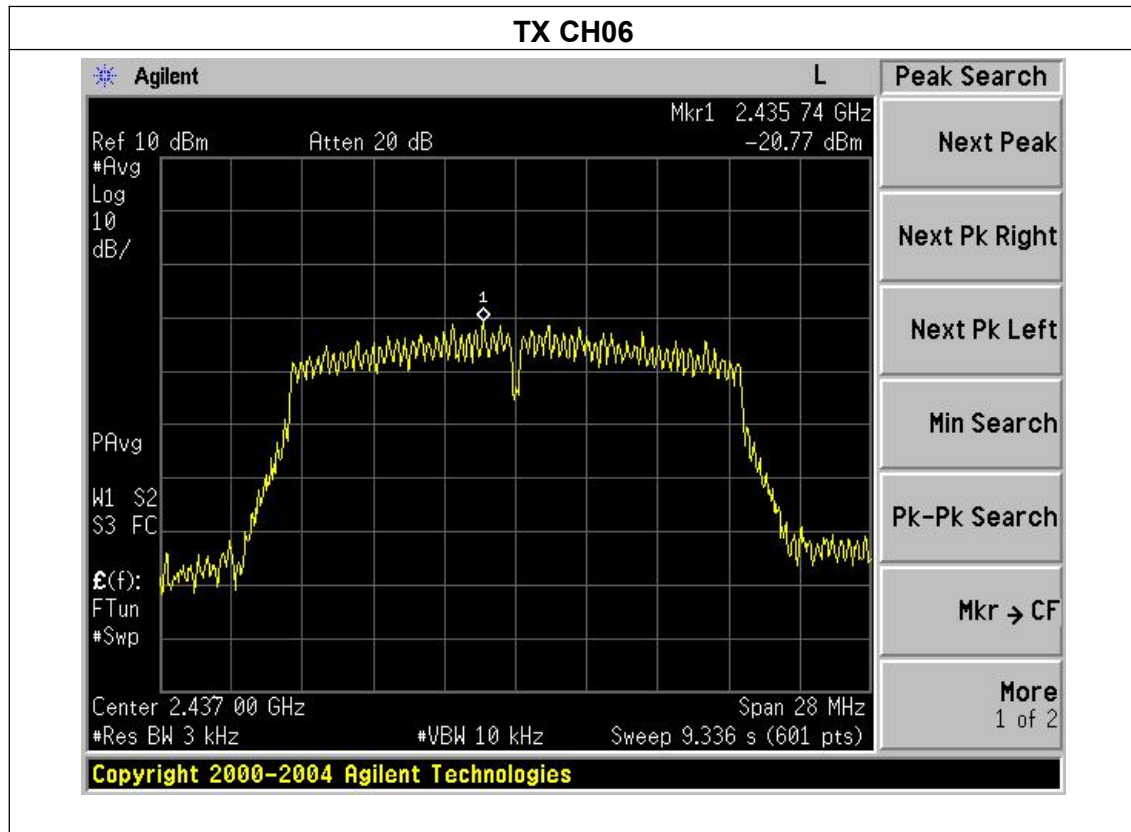




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2422 MHz	-25.41	8	PASS
2437 MHz	-25.07	8	PASS
2452 MHz	-25.20	8	PASS

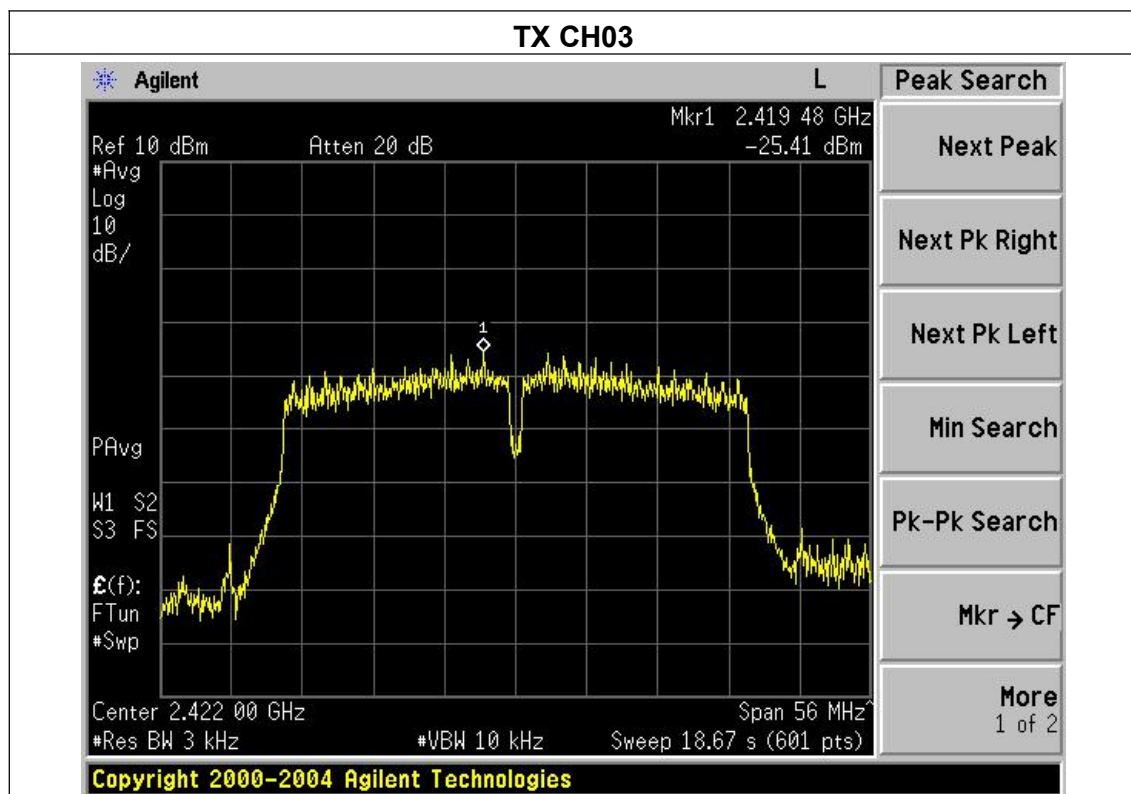




TX CH06

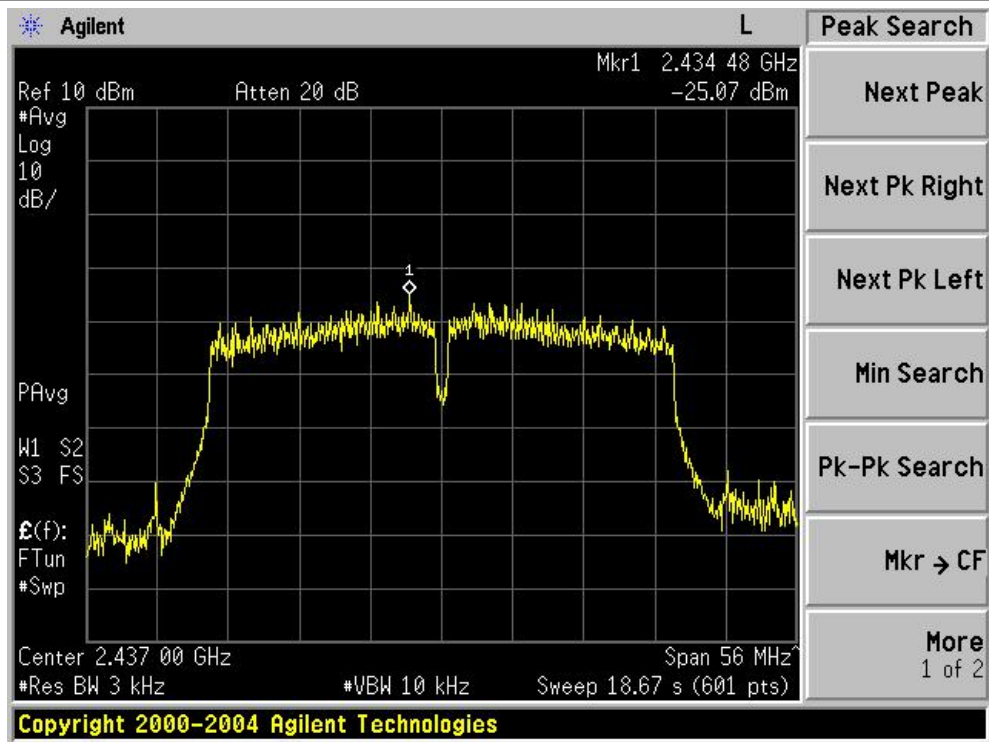

TX CH09

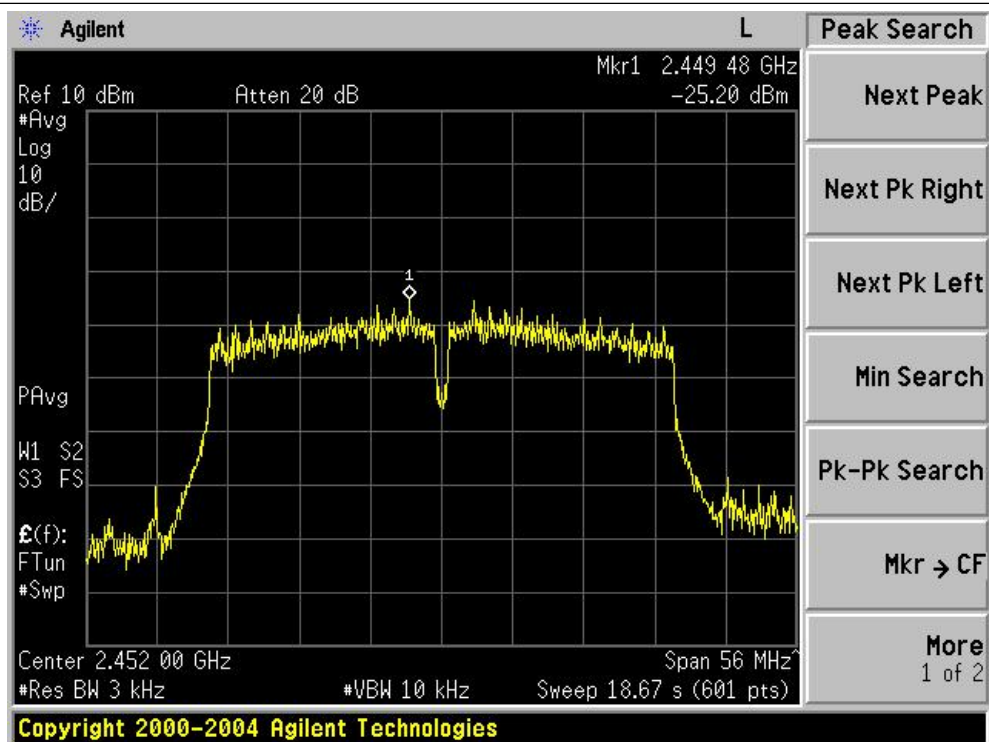



. BANDWIDTH TEST

APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

DEVIATION FROM STANDARD

No deviation.

TEST SETUP




EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS**


Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX b Mode		

Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
2412	8564.000	500	Pass
2437	9070.000	500	Pass
2462	9628.000	500	Pass

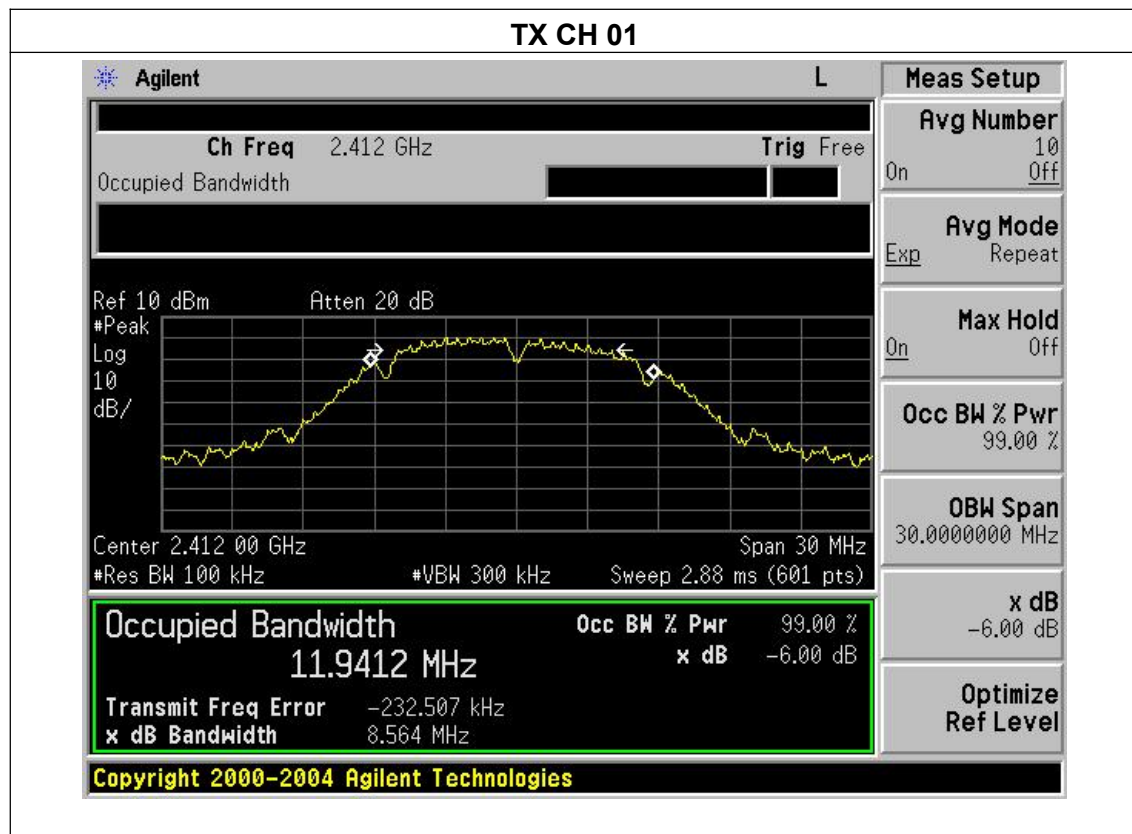




TX CH 06

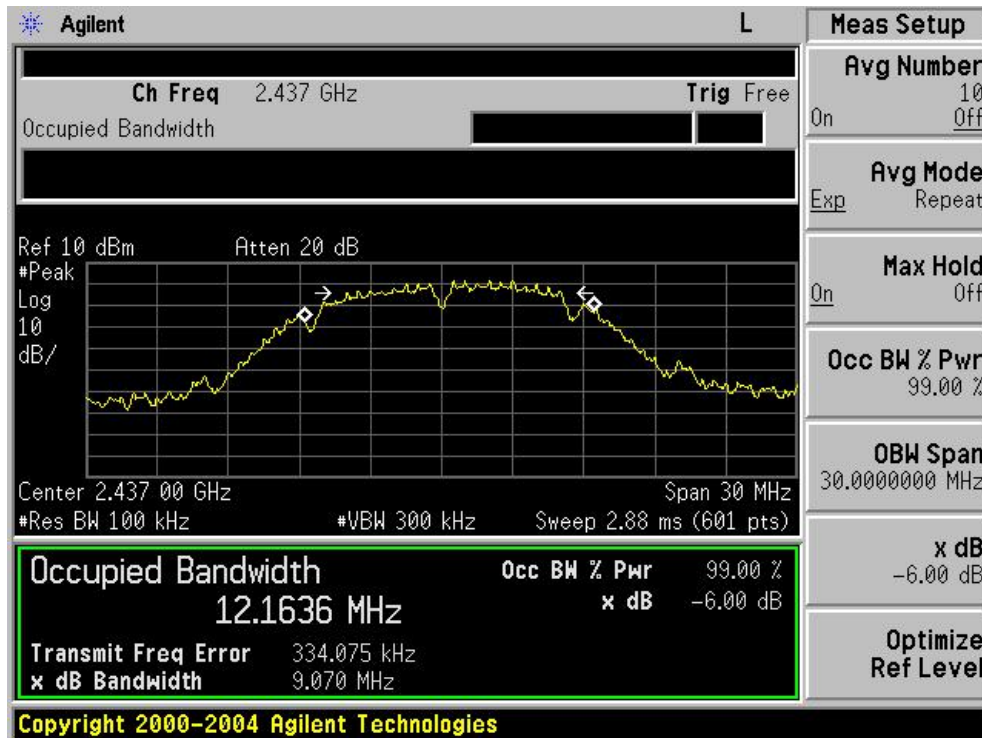


TX CH 11

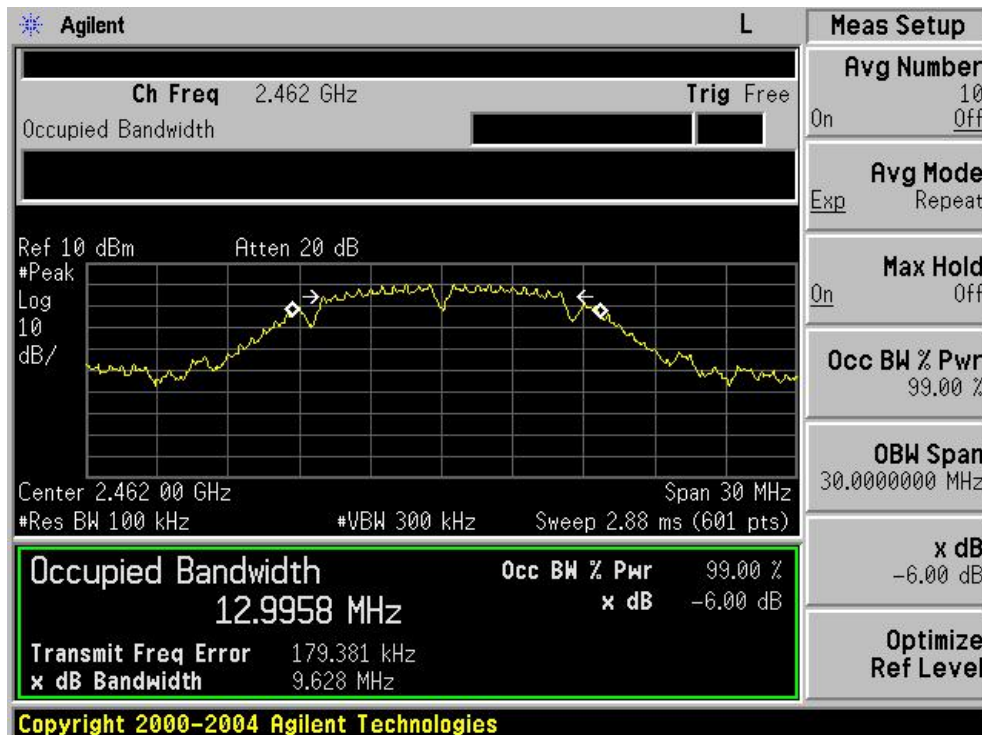




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX g Mode		

Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
2412	15404.000	500	Pass
2437	15172.000	500	Pass
2462	16453.000	500	Pass

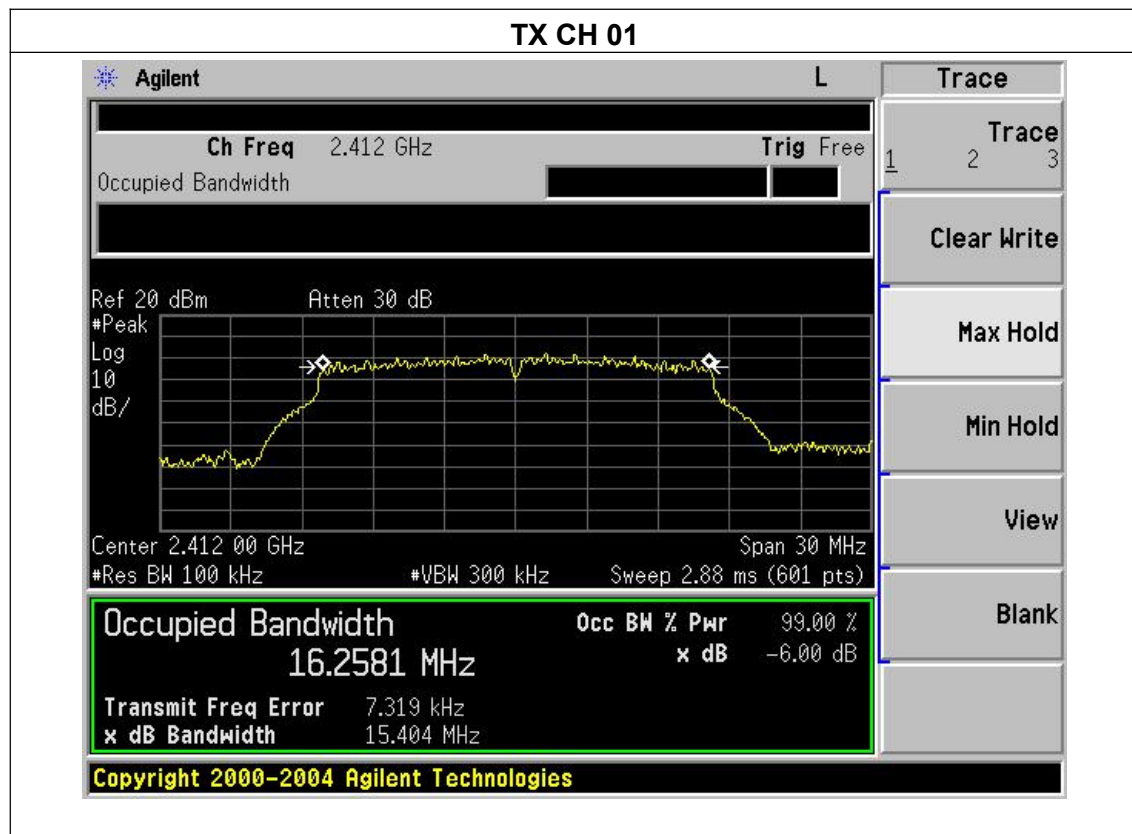




TX CH 06

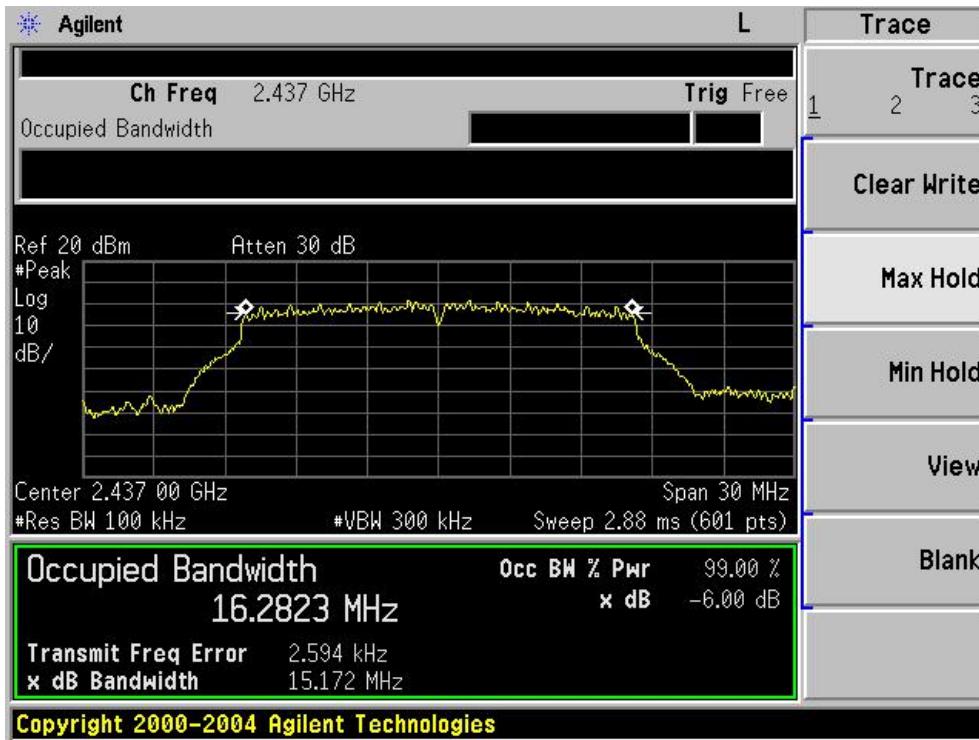


TX CH 11

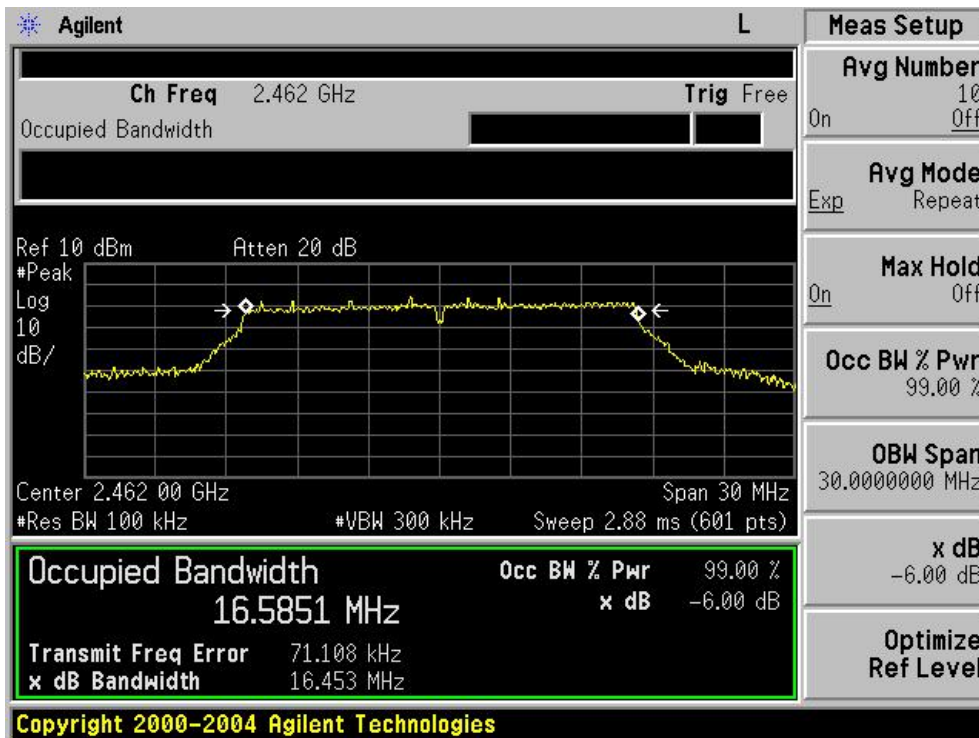




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX n Mode(20M)		

Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
2412	15170.000	500	Pass
2437	15412.000	500	Pass
2462	16826.000	500	Pass

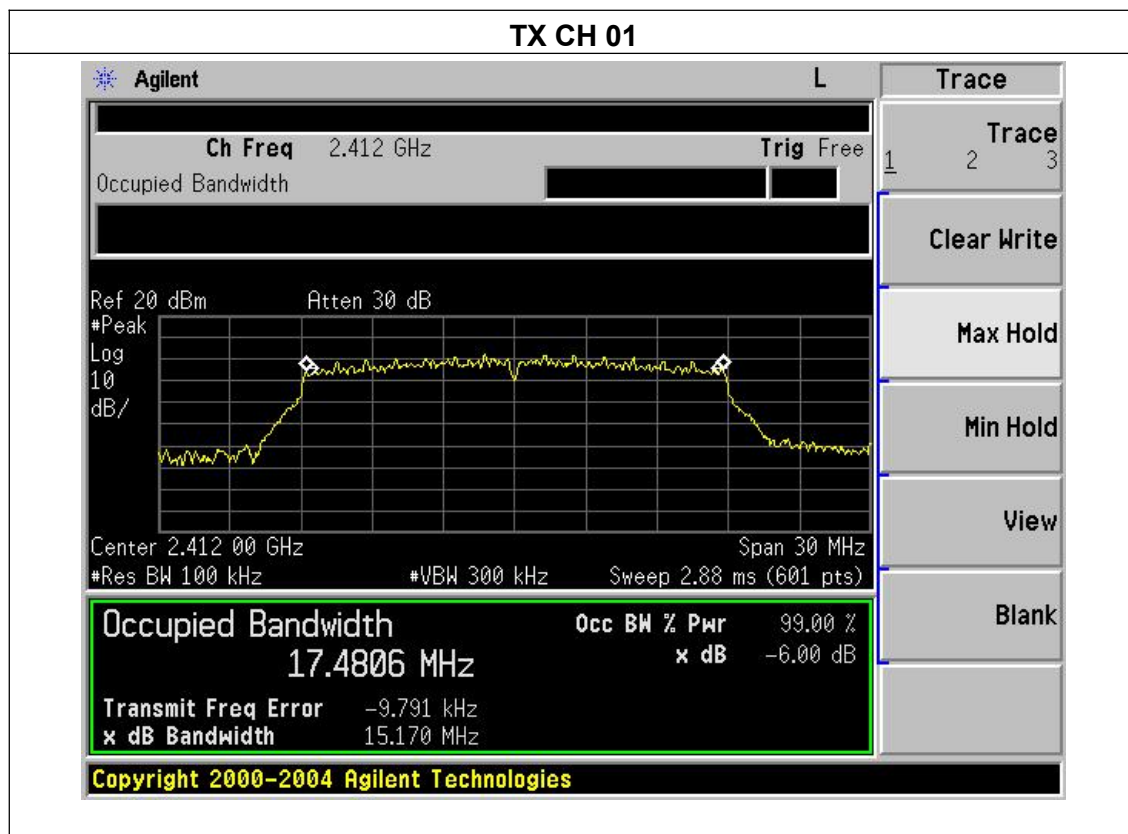


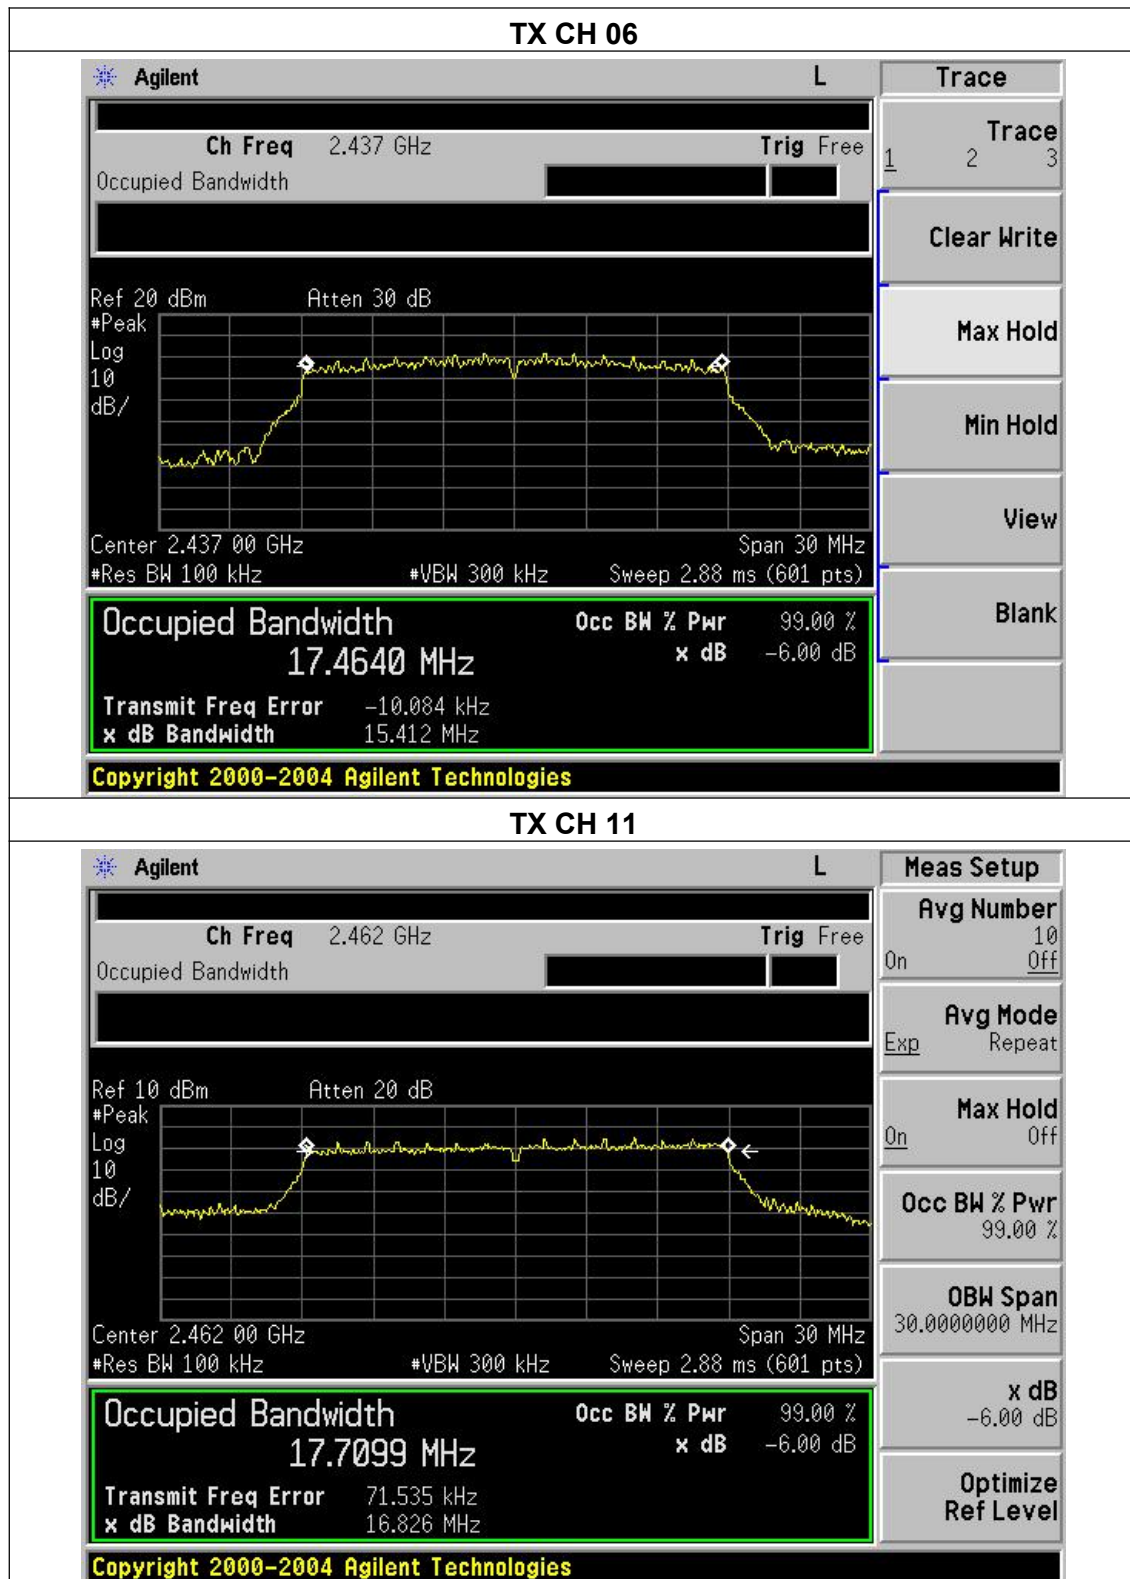




Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	Input: AC 120V/60Hz Output: DC 5V/2A
Test Mode :	TX n Mode(40M)		

Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
2422	35744.000	500	Pass
2437	35139.000	500	Pass
2452	35239.000	500	Pass

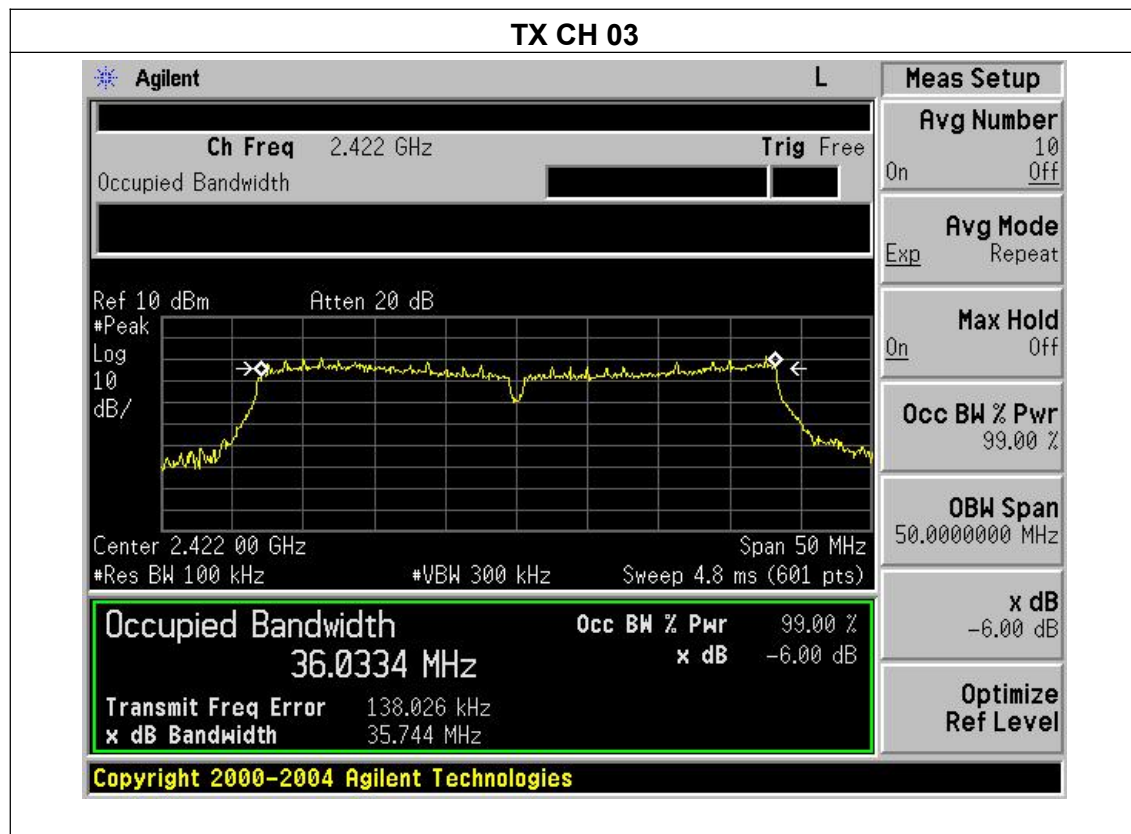

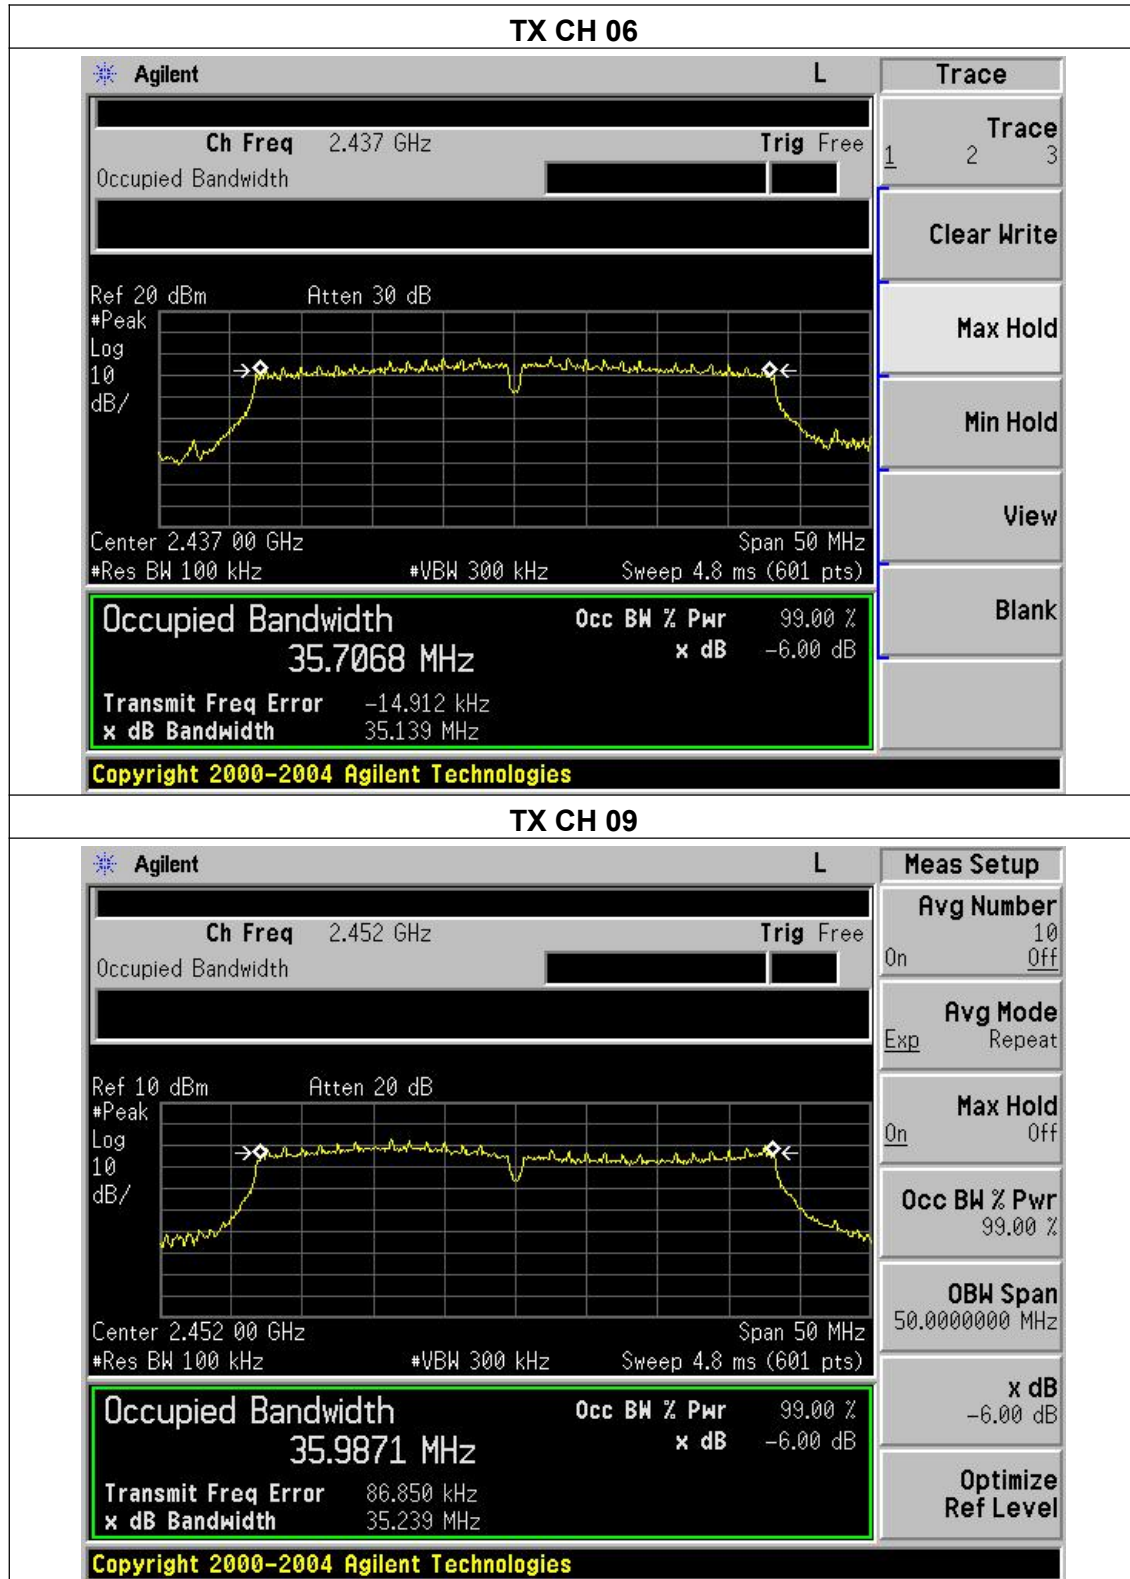

**. PEAK OUTPUT POWER TEST****APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

DEVIATION FROM STANDARD

No deviation.

TEST SETUP**EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS**

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	Input: AC 120V/60Hz Output:DC 5V/2A

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	14.55	30
	2437	15.26	30
	2462	14.42	30
802.11g	2412	14.29	30
	2437	14.35	30
	2462	14.58	30
802.11n20	2412	13.32	30
	2437	13.24	30
	2462	13.38	30
802.11n40	2422	10.15	30
	2437	11.34	30
	2452	11.42	30



. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.2 TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


TEST RESULTS




802.11b: Band Edge, Left Side

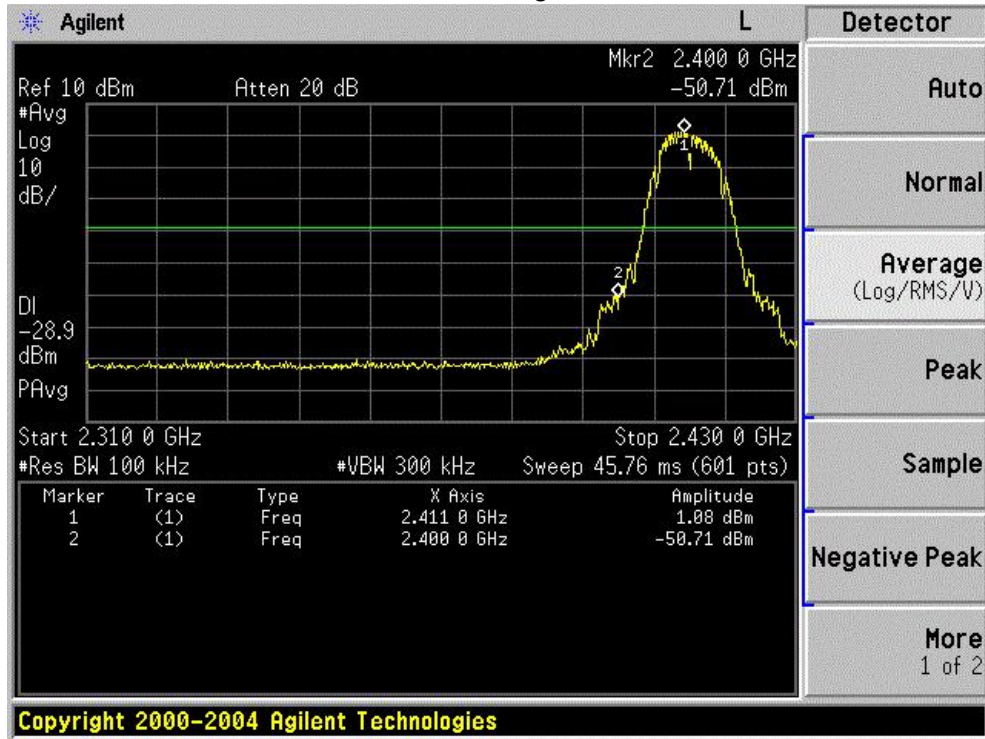

802.11b: Band Edge, Right Side

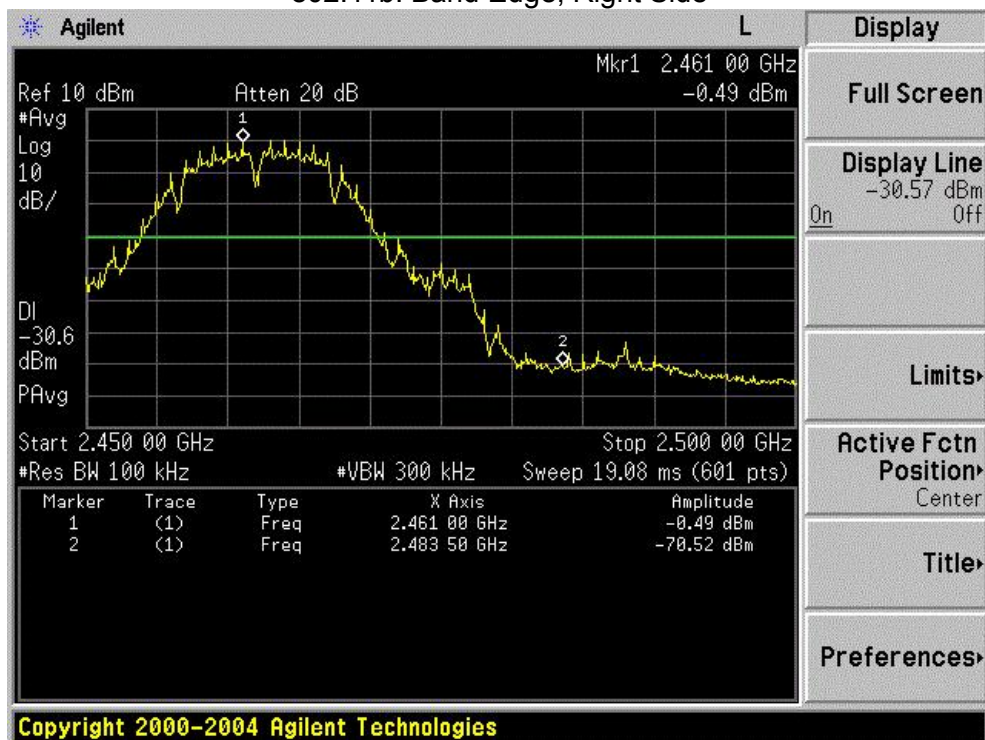

802.11g: Band Edge, Left Side

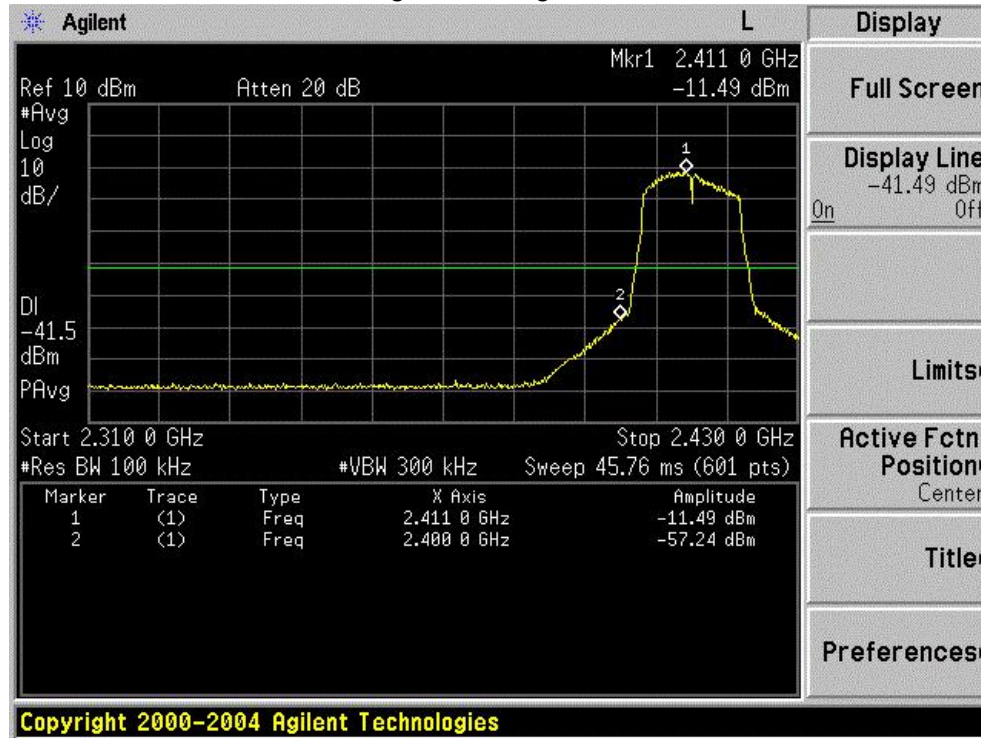


802.11g: Band Edge, Right Side






802.11n-HT20: Band Edge, Left Side

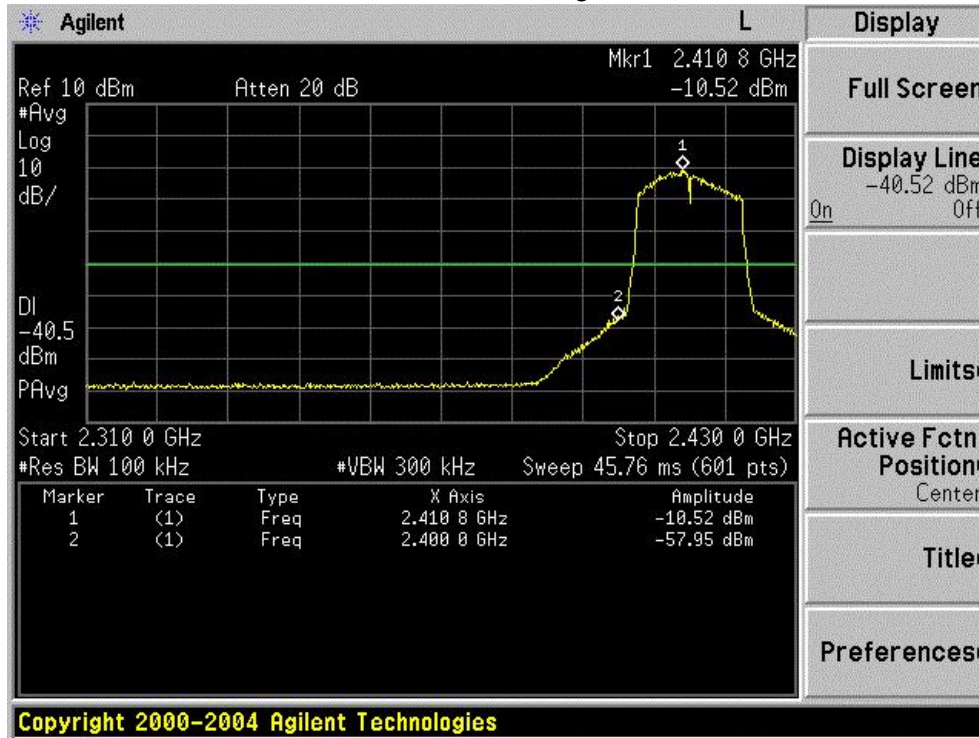


802.11n-HT20: Band Edge, Right Side

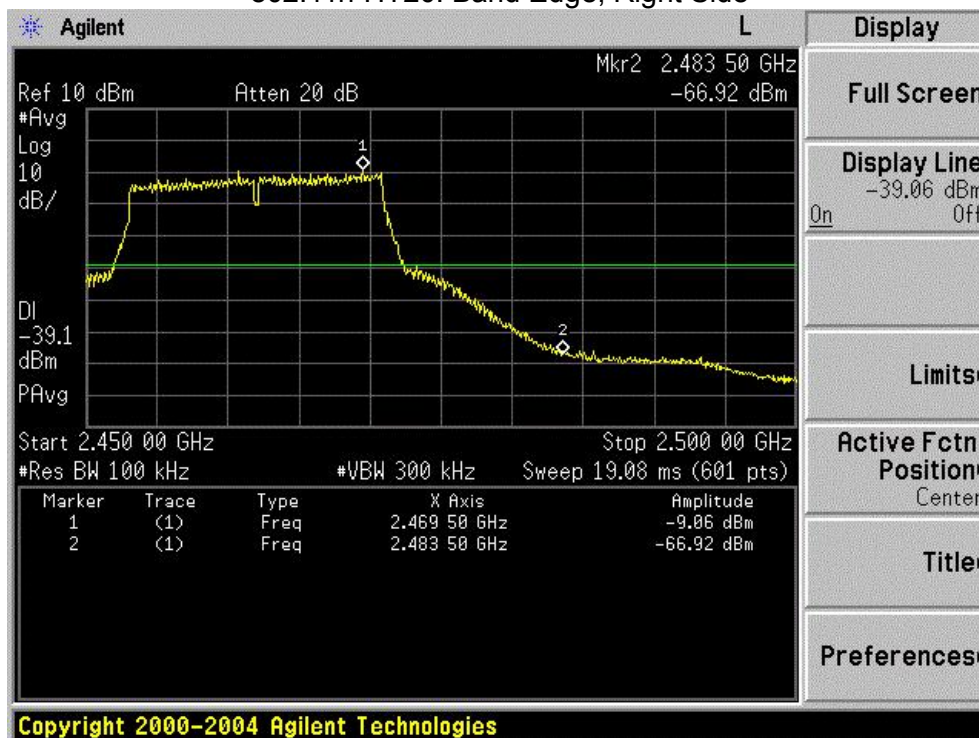



802.11n-HT40: Band Edge, Left Side

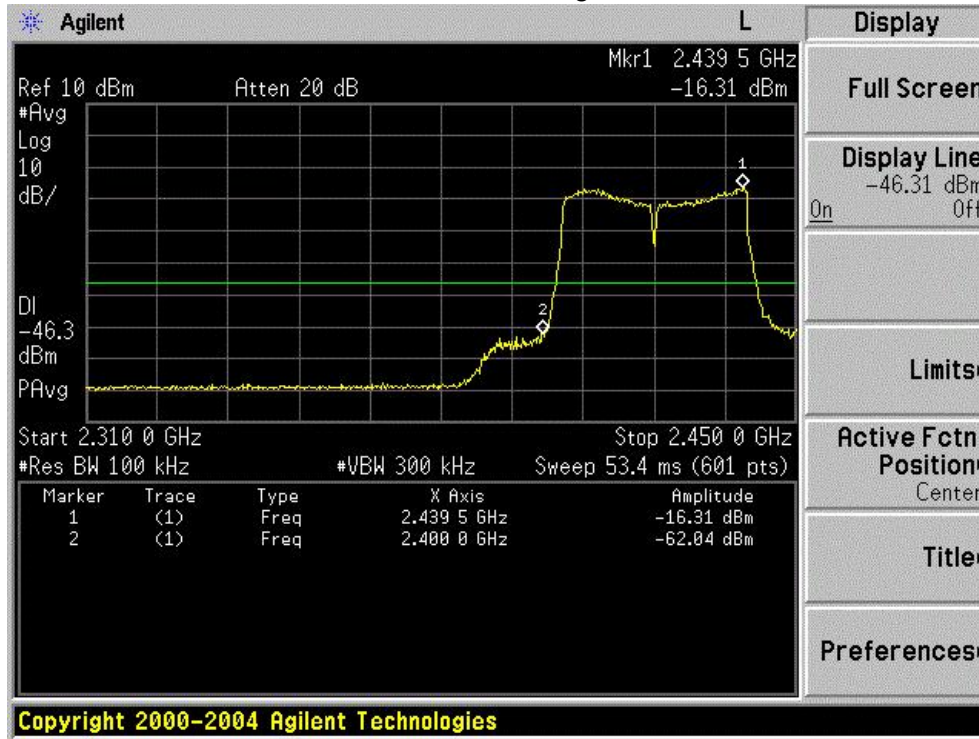

802.11n-HT40: Band Edge, Right Side





. ANTENNA REQUIREMENT

STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT ANTENNA


The EUT antenna is internal antenna, It comply with the standard requirement.

. EUT TEST PHOTO

Radiated Measurement Photos

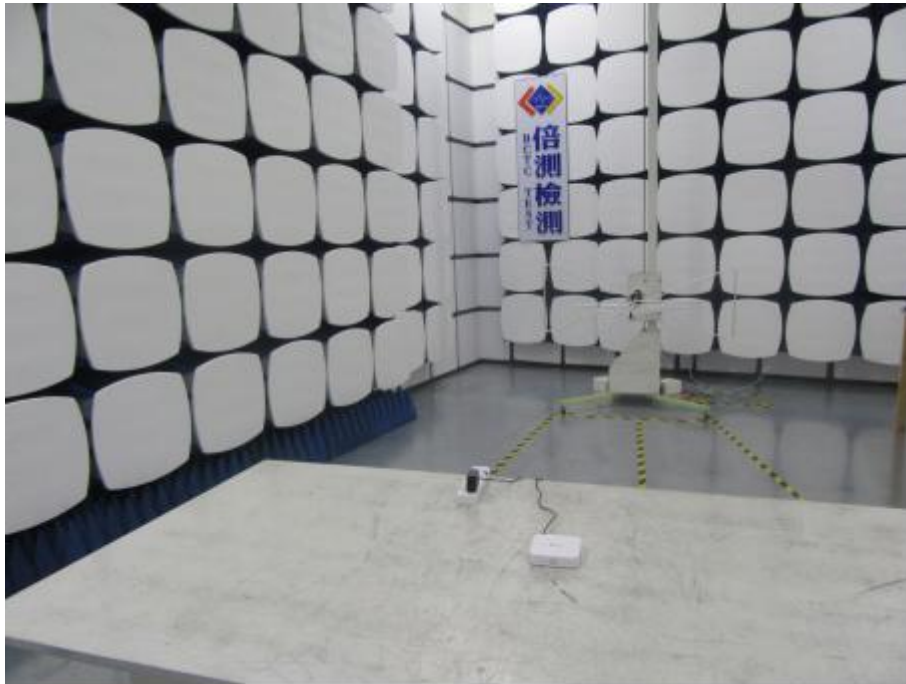

Radiated Measurement Photos

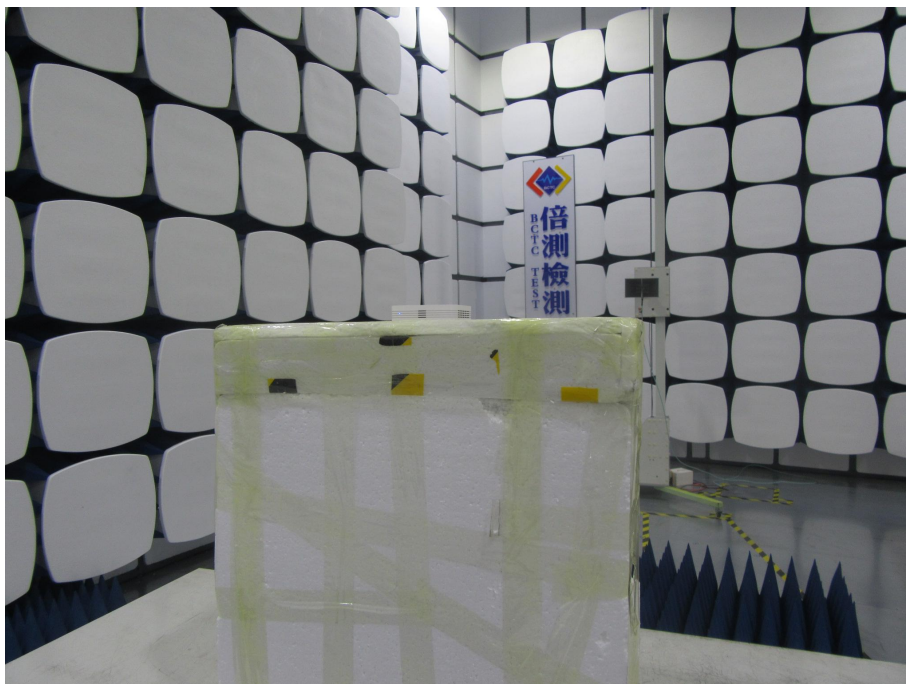



Conducted Emission



. EUT PHOTO



***** END OF REPORT *****