Shenzhen Global Test Service Co.,Ltd.



1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No:	GTSR17042032-01
FCC ID:	2AL2CBH693

Compiled by

(position+printed name+signature)..: File administrators Jimmy Wang

Supervised by

(position+printed name+signature)..: Test Engineer Peter Xiao

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue...... May. 09, 2017

Representative Laboratory Name .: Shenzhen Global Test Service Co., Ltd.

Shenzhen, Guangdong

Applicant's name...... Shenzhen Leigao Technology Co. Ltd.

District, Shenzhen City, Guangdong Province, China

Test specification:

Standard FCC Part 15.247-2015: Operation within the bands 902-928

MHz, 2400-2483.5 MHz and 5725-5850 MHz

TRF Originator...... Shenzhen Global Test Service Co.,Ltd.

Shenzhen Global Test Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Bluetooth earphone

Trade Mark: banpa

Manufacturer Shenzhen Leigao Technology Co. Ltd.

Model/Type reference...... BH693

Listed Models /

Modulation Type GFSK

Operation Frequency...... From 2402MHz to 2480MHz

EUT Type Production Unit
Hardware Version CSR8610V1.2

Result.....: PASS

Report No.: GTSR17042032-01 Page 2 of 38

TEST REPORT

Test Report No. :	GTSR17042032-01	May. 09, 2017
rest Report No	G13K17042032-01	Date of issue

Equipment under Test : Bluetooth earphone

Model /Type : BH693

Listed Models : /

Applicant : Shenzhen Leigao Technology Co. Ltd.

Address : Room 101, unit 1 Mei Ran Building 4, Yan Nan Road, Futian

District, Shenzhen City, Guangdong Province, China

Manufacturer : Shenzhen Leigao Technology Co. Ltd.

Address : Room 101, unit 1 Mei Ran Building 4,Yan Nan Road,Futian

District, Shenzhen City, Guangdong Province, China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Report No.: GTSR17042032-01 Page 3 of 38

Contents

	Remarks	5
	Description	5
	ent Under Test	5
	escription of the Equipment under Test (EUT)	5 5
	eration mode iagram of Test Setup	5 6
	Submittal(s) / Grant (s)	6
	oublinitial(s) / Grant (s)	6
Modifica		6
Modific		v
TEST	ENVIRONMENT	
	cility mental conditions scription	7 7 8
Stateme Equipm	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	8 9
Stateme Equipm	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	10
Stateme Equipm TEST 4.1.	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	10 10
Stateme Equipm TEST 4.1. 4.2.	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS. AC Power Conducted Emission	10 10
Stateme Equipm TEST 4.1. 4.2. 4.3.	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	10 10 13
Stateme Equipm TEST 4.1. 4.2. 4.3. 4.4.	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	10 10 13 18
Stateme Equipm TEST 4.1. 4.2. 4.3. 4.4. 4.5.	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	10 10 13 18 19
Stateme Equipm TEST 4.1. 4.2. 4.3. 4.4. 4.5. 4.6.	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	8 9 10 13 18 19 21
Stateme Equipm	ent of the measurement uncertainty ents Used during the Test CONDITIONS AND RESULTS	8 9 10 13 18 19 21 23

Report No.: GTSR17042032-01 Page 4 of 38

1. TEST STANDARDS

The tests were performed according to following standards:

<u>FCC Rules Part 15.247</u>: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

<u>ANSI C63.10-2013</u>: American National Standard for Testing Unlicensed Wireless Devices

<u>KDB558074 D01 V04</u>: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

Report No.: GTSR17042032-01 Page 5 of 38

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Apr. 18, 2017
Testing commenced on	:	Apr. 18, 2017
Testing concluded on	:	May. 09, 2017

2.2. Product Description

Name of EUT	Bluetooth earphone
Trade Mark	1
Model Number	BH693
List Model	/
FCC ID	2AL2CBH693
Power supply	Battery DC 3.7V
Antenna Type	Internal Antenna
Bluetooth FCC Operation frequency	2402MHz-2480MHz
Bluetooth Modulation	GFSK
Bluetooth	Supported BT4.0
Antenna gain	0.84dBi

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	0	230V / 50 Hz	0	120V / 60Hz	
		0	12 V DC	0	24 V DC	
		•	Other (specified in blank below)			

DC 3.7V

2.4. Short description of the Equipment under Test (EUT)

This is a Bluetooth earphone.

For more details, refer to the user's manual of the EUT.


2.5. EUT operation mode

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 40 channels provided to the EUT. Channel 00/19/39 was selected to test.

Report No.: GTSR17042032-01 Page 6 of 38

Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.6. Block Diagram of Test Setup

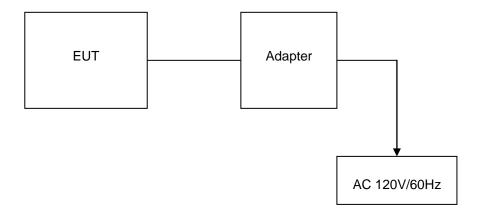

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AL2CBH693** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- $\ensuremath{\bigcirc}$ Supplied by the lab

0	Adapter	M/N:	A70-502000
		Manufacturer:	KUNXING

2.9. Modifications

No modifications were implemented to meet testing criteria.

Report No.: GTSR17042032-01 Page 7 of 38

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

Shenzhen CTL Testing Technology Co., Ltd.

1/F.-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, Guangdong, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 964637

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 964637, Jul 24, 2015.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2018.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

Report No.: GTSR17042032-01 Page 8 of 38

3.4. Test Description

Test Specification clause	Test case	Test Mode	Test Channel	Reco In Re	orded eport	Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	✓ Lowest✓ Middle✓ Highest	GFSK	☑ Lowest☑ Middle☑ Highest	\boxtimes				complies
§15.247(e)	Power spectral density	GFSK	✓ Lowest✓ Middle✓ Highest	GFSK	✓ Lowest✓ Middle✓ Highest	\boxtimes				complies
§15.247(a)(2)	Spectrum bandwidth - 6 dB bandwidth	GFSK	☑ Lowest☑ Middle☑ Highest	GFSK	☑ Lowest☑ Middle☑ Highest	\boxtimes				complies
§15.247(b)(1)	Maximum output power	GFSK	 Lowest Middle Highest	GFSK	 Lowest Middle Highest	\boxtimes				complies
§15.247(d)	Band edge compliance conducted	GFSK		GFSK		\boxtimes				complies
§15.205	Band edge compliance radiated	GFSK		GFSK		\boxtimes				complies
§15.247(d)	TX spurious emissions conducted	GFSK	✓ Lowest✓ Middle✓ Highest	GFSK		\boxtimes				complies
§15.247(d)	TX spurious emissions radiated	GFSK	☑ Lowest☑ Middle☑ Highest	GFSK		\boxtimes				complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-					complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	\boxtimes				complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	\boxtimes				complies

Remark:

- 1. The measurement uncertainty is not included in the test result.
- 2. NA = Not Applicable; NP = Not Performed

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Report No.: GTSR17042032-01 Page 9 of 38

3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2016/05/28	2017/05/27
LISN	R&S	ESH2-Z5	893606/008	2016/05/27	2017/05/26
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	101102	2016/06/26	2017/06/25
Spectrum Analyzer	Agilent	N9020A	MY48010425	2016/06/17	2017/06/16
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/Humidi ty Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10- 2700/X12750- O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10- 1375/U12750- O/O	N/A	2016/05/20	2017/05/19
RF Cable	HUBER+SUHNE R	RG214	N/A	2016/05/20	2017/05/19
Data acquisition card	Agilent	U2531A	TW53323507	2016/05/20	2017/05/19
Power Sensor	Agilent	U2021XA	MY5365004	2016/05/20	2017/05/19


Note: The Cal.Interval was one year.

Report No.: GTSR17042032-01 Page 10 of 38

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

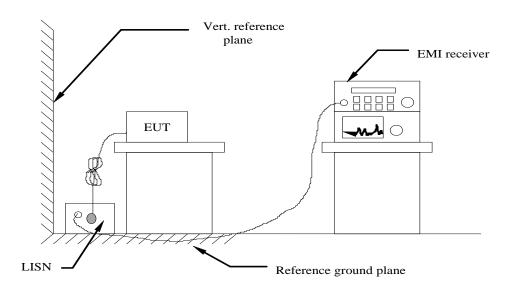

TEST PROCEDURE


- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 5V power from adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)						
Frequency range (IVII12)	Quasi-peak	Average					
0.15-0.5	66 to 56*	56 to 46*					
0.5-5	56	46					
5-30	60	50					
* Decreases with the logarithm of the freque	ncy.						

TEST RESULTS

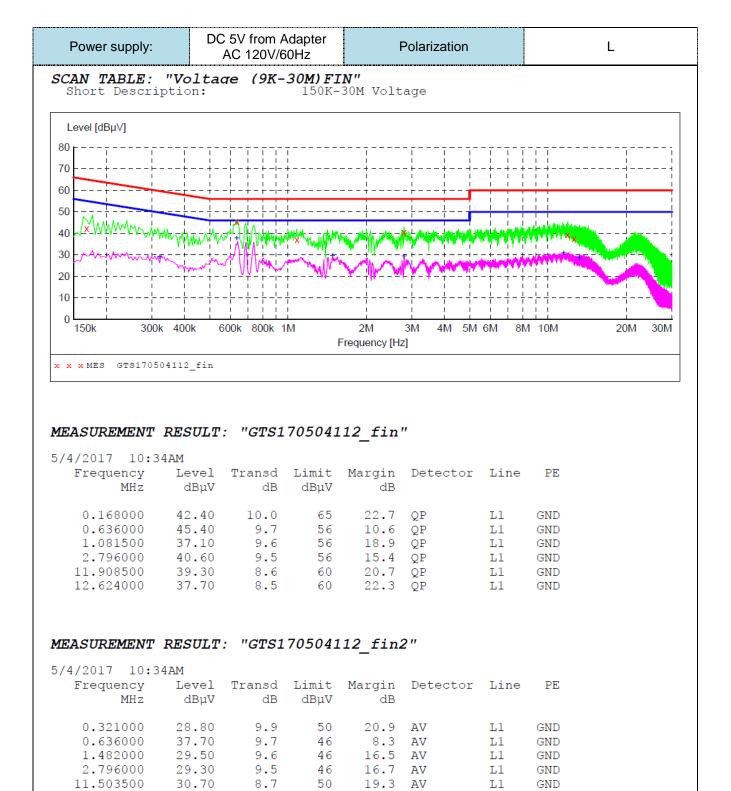

50

21.7 AV


L1

GND

8.4

13.200000

28.30

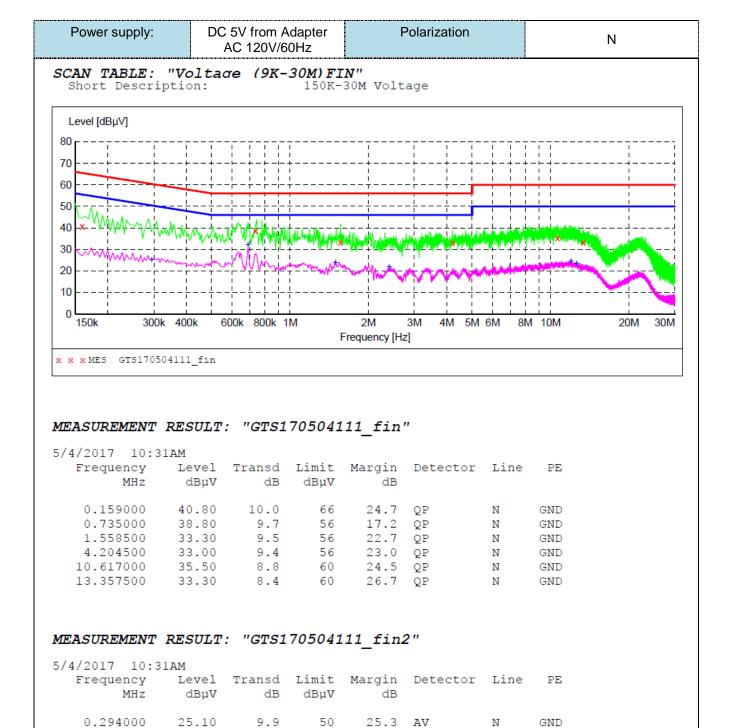

9.7

9.6

9.5

8.6

8.5

46

46

46

50

50

13.9

22.2

24.2

25.6 AV

26.5 AV

ΑV

ΑV

ΑV

Ν

N

N

N

GND

GND

GND

GND

GND

32.10

23.80

21.80

24.40

23.50

0.690000

1.495500

2.400000

11.967000


12.570000

Report No.: GTSR17042032-01 Page 13 of 38


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz - 30MHz

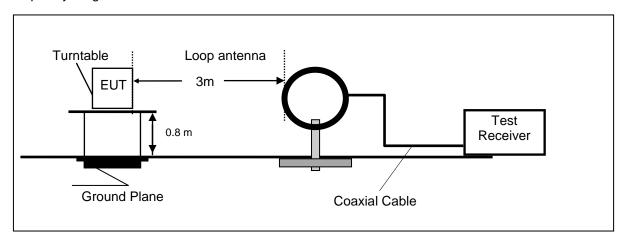

Frequency range 30MHz - 1000MHz

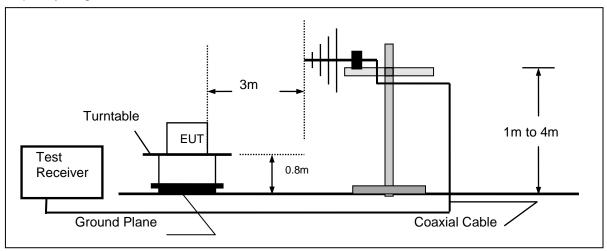

Frequency range above 1GHz-25GHz

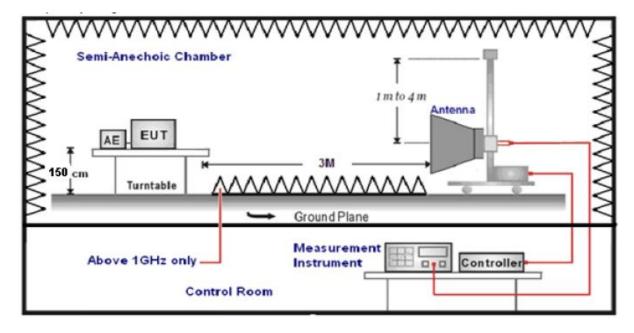

Report No.: GTSR17042032-01 Page 14 of 38

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.

- 2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed.
- 5. The EUT minimum operation frequency was 26MHz and maximum operation frequency was 2480MHz. So radiated emission test frequency band from 9KHz to 25GHz.

6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Anternna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Transd=AF +CL-AG

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance	Radiated (dBµV/m)	Radiated (µV/m)
	(Meters)		
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Report No.: GTSR17042032-01 Page 15 of 38


TEST RESULTS

Test site: Shenzhen CTL Testing Technology Co., Ltd.


For 9KHz to 30MHz

	Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
Ī	0.42	49.88	95.14	45.26	QP	PASS
Ī	2.48	39.70	69.54	29.84	QP	PASS
	19.54	40.89	69.54	28.65	QP	PASS
	27.62	41.48	69.54	28.06	QP	PASS

For 30MHz to 1000MHz

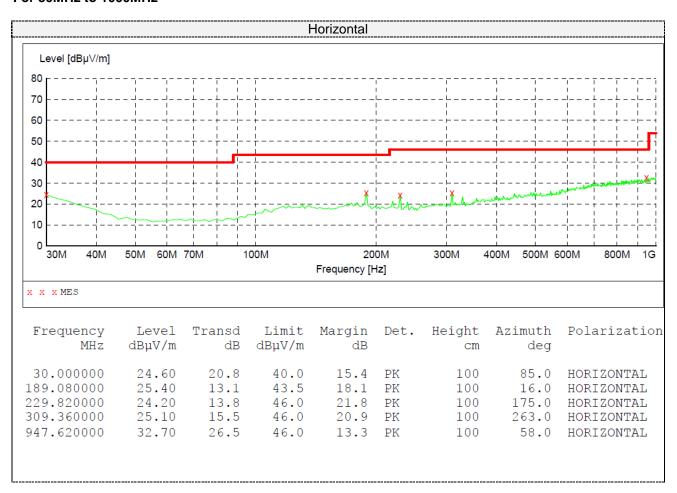

Report No.: GTSR17042032-01 Page 16 of 38

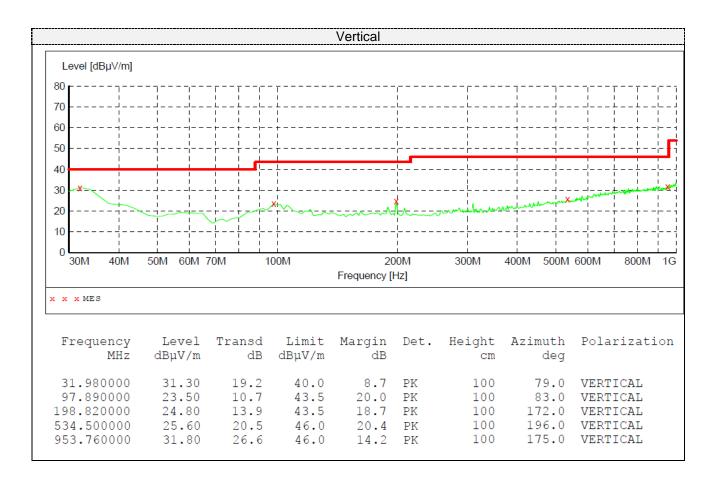

For 1GHz to 25GHz

	Frequency(MHz):		2402			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emiss Lev (dBu\	el	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)		Pre- amplifi er	Correction Factor (dB/m)
1	4804.00	49.09	PK	74.00	24.91	1.00 H	82	47.19	31.42	6.98	36.5	1.90
1	4804.00	40.04	ΑV	54.00	13.96	1.00 H	82	38.14	31.42	6.98	36.5	1.90
2	7206.00	41.62	PΚ	74.00	32.38	1.00 H	175	31.02	37.03	8.87	35.3	10.60
2	7206.00		ΑV									

	Frequency(MHz):		2402			Polarity:				VERTICAL		
	Emission		Limit	N /	Antenna	Table	Raw	Antenna	Cable	Pre-	Correction		
No.	requency (MHz) Level (dBuV/m)	el	(dBuV/m)	Margin (dB)	Height	Angle	Value	Factor	Factor	amplifi	Factor		
		(dBu\	//m)	(ubu v/III)	(ub)	(m)	(Degree)	(dBuV)	(dB/m)	(dB)	er	(dB/m)	
1	4804.00	48.33	PK	74.00	25.67	1.00 V	116	46.43	31.42	6.98	36.5	1.90	
1	4804.00	39.32	AV	54.00	14.68	1.00 V	116	37.42	31.42	6.98	36.5	1.90	
2	7206.00	39.71	PK	74.00	34.29	1.00 V	257	29.11	37.03	8.87	35.3	10.60	
2	7206.00		ΑV										

Report No.: GTSR17042032-01 Page 17 of 38

	Frequency(MHz):		2440			Polarity:			HORIZONTAL		
	Emission		Limit	N. 1	Antenna	Table	Raw	Antenna	Cable	Pre-	Correction	
No.	Frequency	^{cy} Level	el	(dBuV/m)	Margin	Height	Angle	Value	Factor	Factor	amplifi	Factor
	(MHz)	(dBu\	//m)	(abuv/III)	(dB)	(m)	(Degree)	(dBuV)	(dB/m)	(dB)	er	(dB/m)
1	4880.00	47.94	PK	74.00	26.06	1.00 H	96	45.88	30.98	7.58	36.5	2.06
1	4880.00	36.94	AV	54.00	17.06	1.00 H	96	34.88	30.98	7.58	36.5	2.06
2	7320.00	40.53	PK	74.00	33.47	1.00 H	185	29.61	37.66	8.56	35.3	10.92
2	7320.00		ΑV									

	Frequency(MHz):			2440			VERTICAL				
	Frequency Emission		Limit	Margin	Antenna	Table	Raw	Antenna			Correction	
No.		Lev	el	-	dBuV/m) (dB)	Height	Angle	Value	Factor	Factor	amplifi	Factor
	(MHz)	(dBu\	//m)	(aBuv/m)		(m)	(Degree)	(dBuV)	(dB/m)	(dB)	er	(dB/m)
1	4880.00	50.07	PK	74.00	23.93	1.00 V	117	48.01	30.98	7.58	36.5	2.06
1	4880.00	39.85	ΑV	54.00	14.15	1.00 V	117	37.79	30.98	7.58	36.5	2.06
2	7320.00	43.74	PK	74.00	30.26	1.00 V	229	32.82	37.66	8.56	35.3	10.92
2	7320.00		ΑV									

	Frequency(MHz):		2480				HORIZONTAL				
	Emission		Limit	Margin	Antenna	Table	Raw	Antenna	Cable	Pre-	Correction	
No.	Frequency	Level	(dBuV/m)		Height	Angle	Value	Factor	Factor	amplifi	Factor	
	(MHz) (dBu)	//m)	(ubu v/III)		(m)	(Degree)	(dBuV)	(dB/m)	(dB)	er	(dB/m)	
1	4960.00	49.81	PK	74.00	24.19	1.00 H	186	46.74	31.47	7.80	36.2	3.07
1	4960.00	40.34	ΑV	54.00	13.66	1.00 H	186	37.27	31.47	7.80	36.2	3.07
2	7440.00	42.78	PK	74.00	31.22	1.00 H	235	31.04	38.32	8.72	35.3	11.74
2	7440.00		ΑV									

	Frequency(MHz):			2480 Polarity:			VERTICAL				
	Fraguanay	Emission		Limit Margin (dBuV/m) (dB)	Morain	Antenna	Table	Raw	Antenna	Cable	Pre-	Correction
No.	Frequency (MHz)	1 404	Height		Angle	Value	Factor	Factor	amplifi	Factor		
	(IVITIZ)		(m)		(Degree)	(dBuV)	(dB/m)	(dB)	er	(dB/m)		
1	4960.00	49.09	PK	74.00	24.91	1.00 V	116	46.02	31.47	7.80	36.2	3.07
1	4960.00	37.97	AV	54.00	16.03	1.00 V	116	34.90	31.47	7.80	36.2	3.07
2	7440.00	41.08	PK	74.00	32.92	1.00 V	182	29.34	38.32	8.72	35.3	11.74
2	7440.00		AV				-					

REMARKS:


- Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
 Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 Margin value = Limit value- Emission level.
 -- Mean the PK detector measured value is below average limit.

- 5. The other emission levels were very low against the limit.

Report No.: GTSR17042032-01 Page 18 of 38

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2. and Average conducted output power, 9.2.3.1.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple derector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Туре	Channel	Output power PK (dBm)	Output power AV(dBm)	Limit (dBm)	Result
	00	-2.54	-3.42		
GFSK	19	-2.15	-3.04	30	Pass
	39	-2.44	-3.36		

Note: The test results including the cable lose.

Duty cycle used in all test items: 100%



Report No.: GTSR17042032-01 Page 19 of 38

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE


- 1.Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2.Set the RBW =3 kHz.
- 3.Set the VBW =10 KHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5.Detector = peak.
- 6.Sweep time = auto couple.
- 7.Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9.Use the peak marker function to determine the maximum power level.
- 10.If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be 8 dBm.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

Туре	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result	
	00	-18.623		Pass	
GFSK	19	-17.921	8.00		
	39	-17.429			

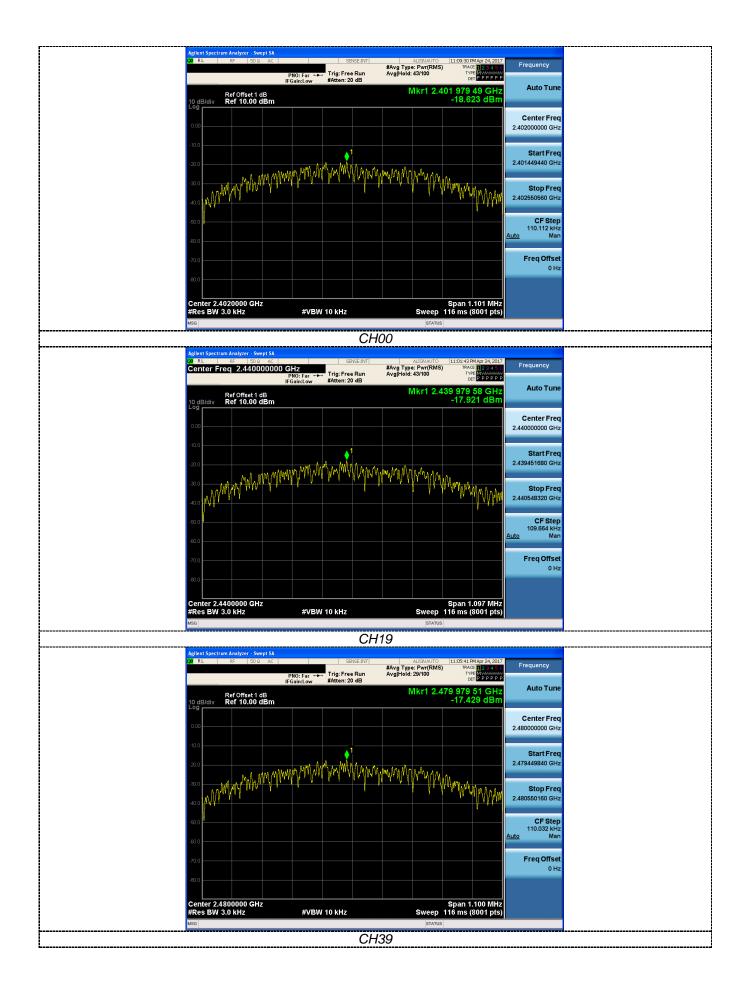

Report No.: GTSR17042032-01 Page 21 of 38

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.


- 1. Set RBW = 100 kHz.
- 2. Set the video bandwidth (VBW) ≥ 3 RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

TEST RESULTS

Туре	Channel	6dB Bandwidth (KHz)	Limit (KHz)	Result	
	00	688.2			
GFSK	19	685.4	≥500	Pass	
	39	687.7			

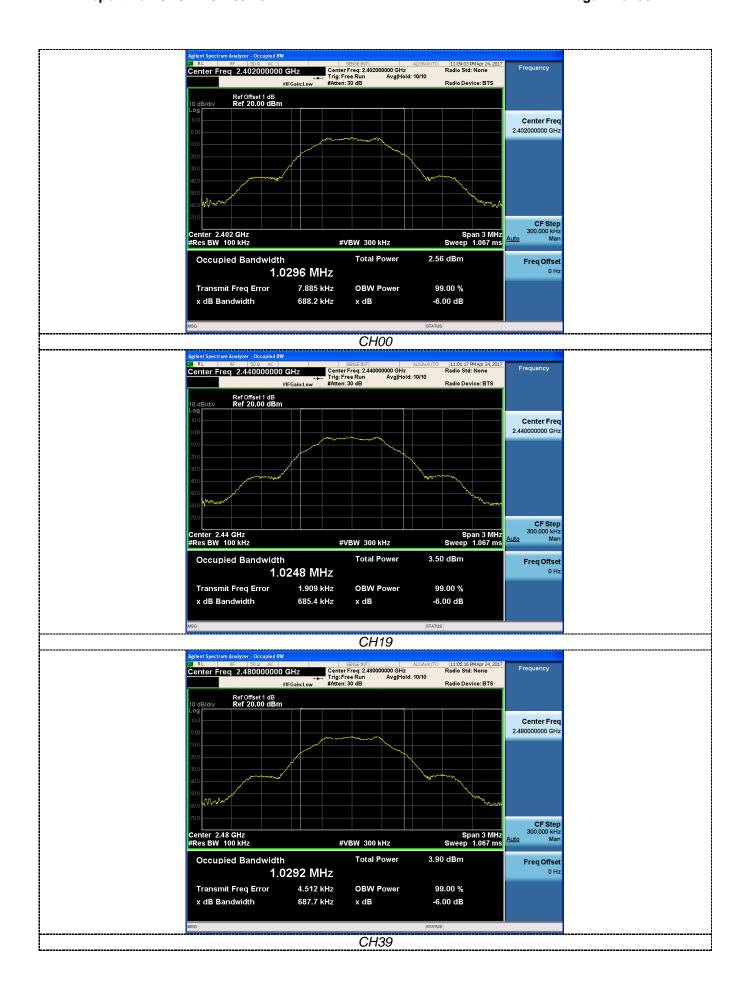


Report No.: GTSR17042032-01 Page 23 of 38

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.205(c)).

TEST CONFIGURATION

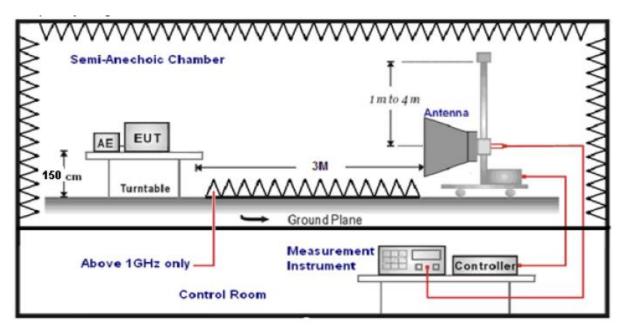

TEST PROCEDURE

- 1. The EUT was placed on a turn table which is 1.5m above ground plane.
- 2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed..
- 5. The distance between test antenna and EUT was 3 meter:
- 6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector	
	Peak Value: RBW=1MHz/VBW=3MHz,		
1GHz-40GHz	Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz,	Peak	
	•		
	Sweep time=Auto		

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

Report No.: GTSR17042032-01 Page 24 of 38


TEST RESULTS

Test site: Shenzhen CTL Testing Technology Co., Ltd.

4.6.1 For Radiated Bandedge Measurement

Frequency(MHz):				2402			Polarity:		H	HORIZO	NTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifi er	Correction Factor (dB/m)		
2390.00	49.29	PK	74.00	24.71	1.00	81	54.60	27.49	3.32	36.12	-5.31		
2390.00	40.01	AV	54.00	13.99	1.00	81	45.32	27.49	3.32	36.12	-5.31		
Frequenc	Frequency(MHz):			2402			Polarity:			VERTI	CAL		
Frequency (MHz)	. , , , ,		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifi er	Correction Factor (dB/m)		
2390.00	49.74	PK	74.00	24.26	1.00	129	55.05	27.49	3.32	36.12	-5.31		
2390.00	40.95	AV	54.00	13.05	1.00	129	46.26	27.49	3.32	36.12	-5.31		
Frequenc	Frequency(MHz):			2480		Polarity:			HORIZONTAL				
Frequency (MHz)	. ,		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifi er	Correction Factor (dB/m)		
2483.50	49.28	PK	74.00	24.72	1.00	206	55.00	27.45	3.38	36.55	-5.72		
2483.50	38.96	AV	54.00	15.04	1.00	206	44.68	27.45	3.38	36.55	-5.72		
Frequency(MHz):				2480	0 P			Polarity:			VERTICAL		
Frequency (MHz)	. ,		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifi er	Correction Factor (dB/m)		
2483.50	51.24	PK	74.00	22.76	1.00	191	56.96	27.45	3.38	36.55	-5.72		
00.00	- · · · - ·												

4.6.2 For Conducted Bandedge Measurement

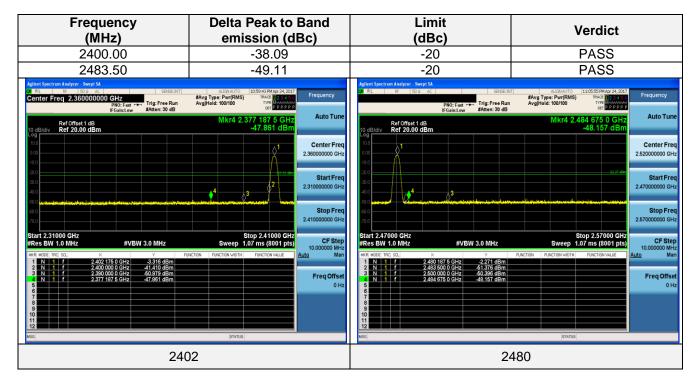

Report No.: GTSR17042032-01 Page 25 of 38

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013, For 9KHz-150kHz, Set RBW=1kHz and VBW= 3KHz;For 150KHz-10MHz, Set RBW=10kHz and VBW= 30KHz:For 10MHz-25GHz, Set RBW=100kHz and VBW= 300KHz in order to measure the peak field strength, and mwasure frequeny range from 9KHz to 25GHz.


LIMIT


- 1. Below -20dB of the highest emission level in operating band.
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
- 3.For below 30MHz,For 9KHz-150kHz,150K-10MHz,We use the RBW 1KHz,10KHz, So the limit need to calculated by "10lg(BW1/BW2)". for example For9KHz-150kHz,RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

TEST RESULTS


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

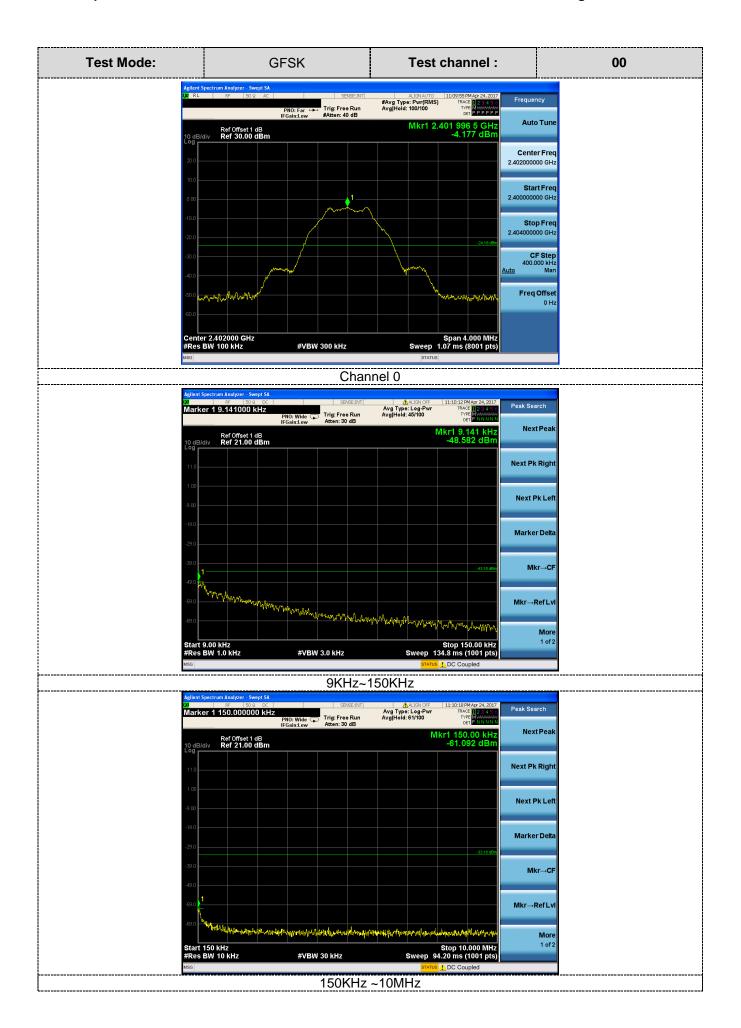

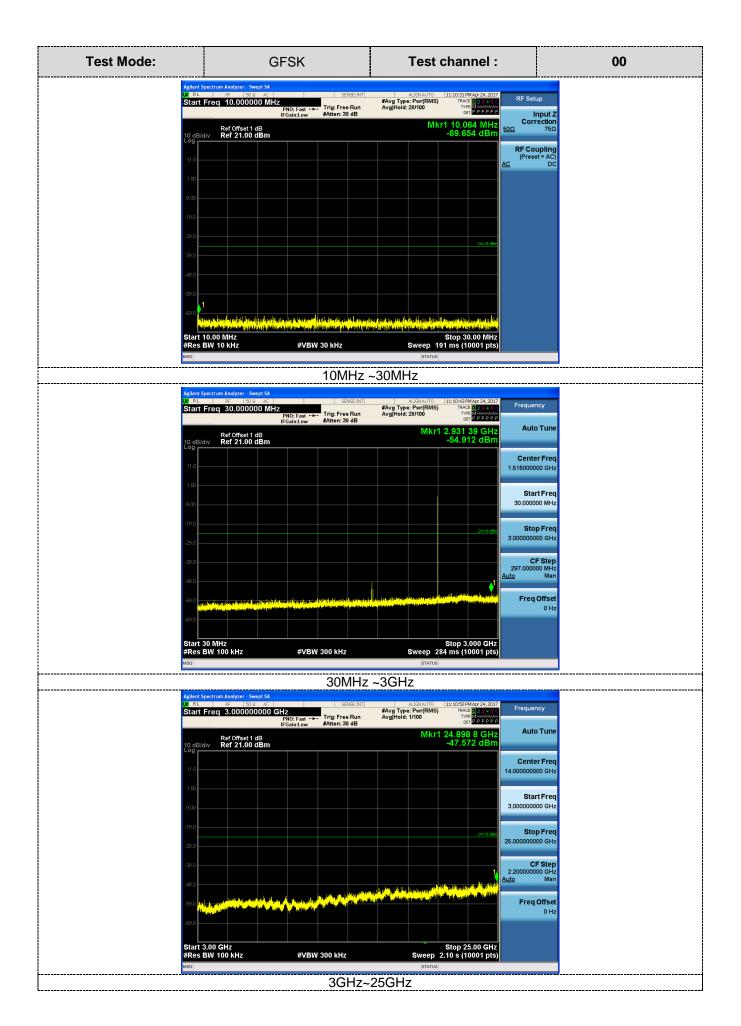

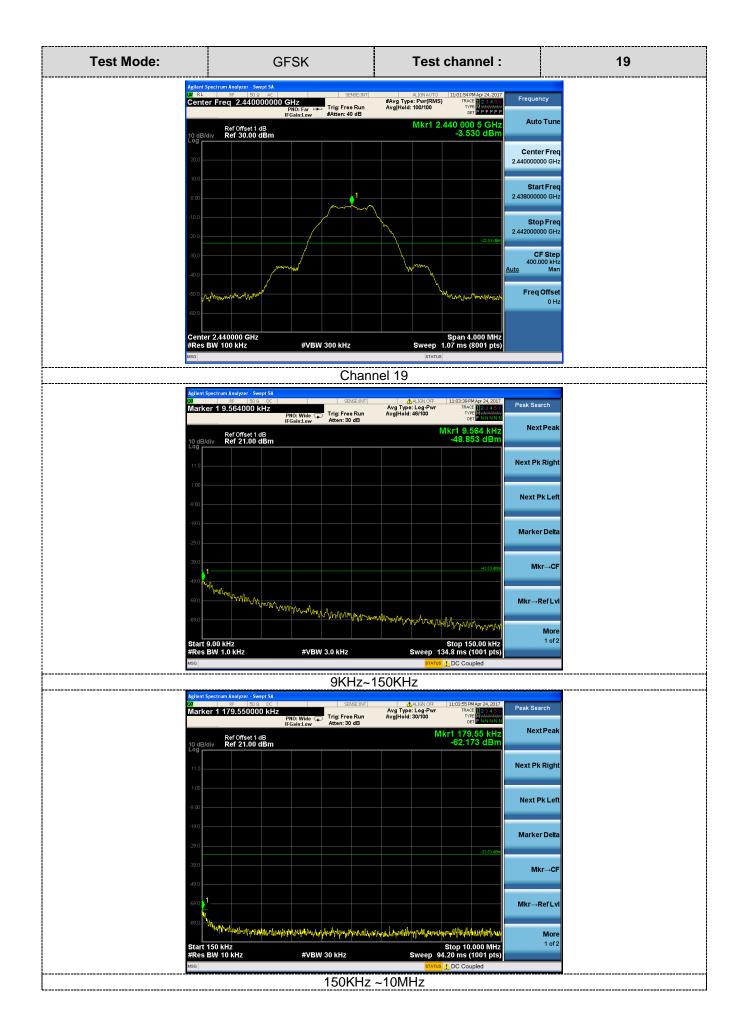



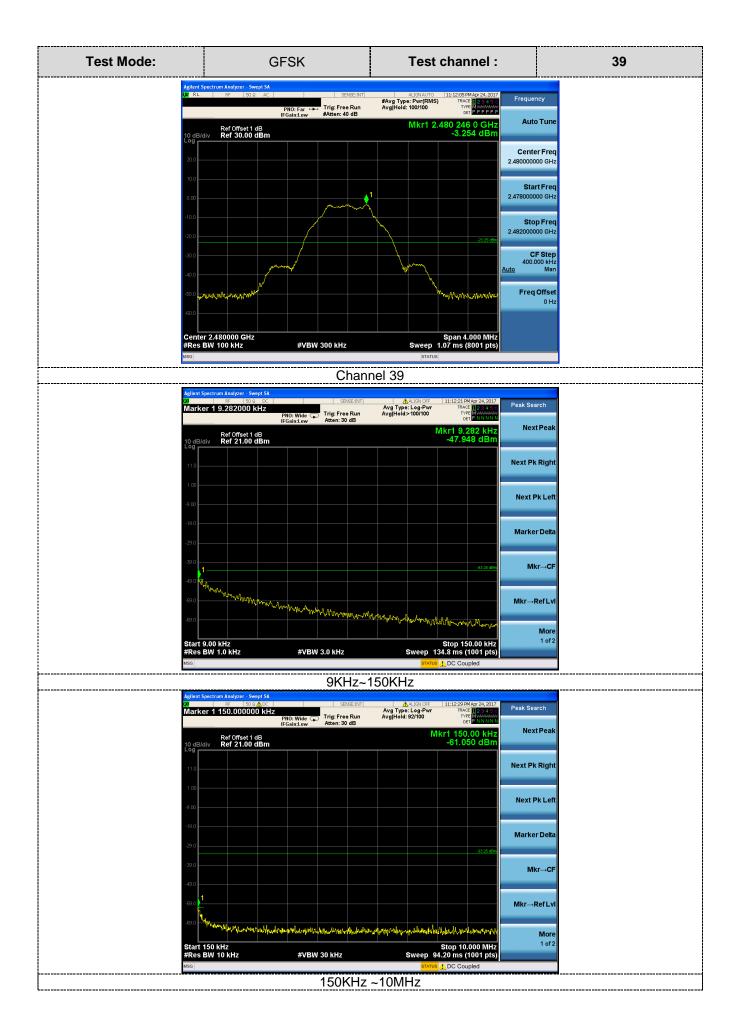



Report No.: GTSR17042032-01 Page 32 of 38

4.8. Antenna Requirement


Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Antenna Information


The antenna used is a Ceramic antenna, The directional gains of antenna used for transmitting is 0.84dBi.

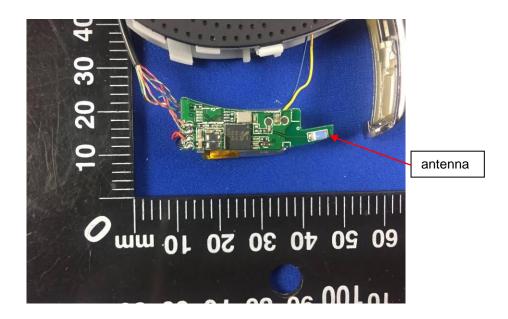

Report No.: GTSR17042032-01 Page 33 of 38


5. Test Setup Photos of the EUT

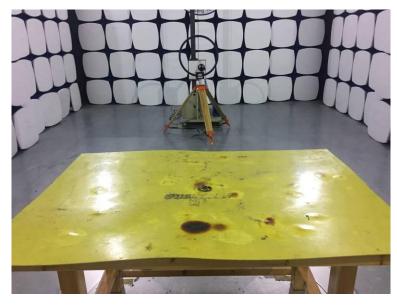

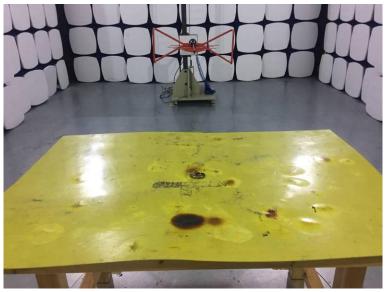



Report No.: GTSR17042032-01 Page 34 of 38

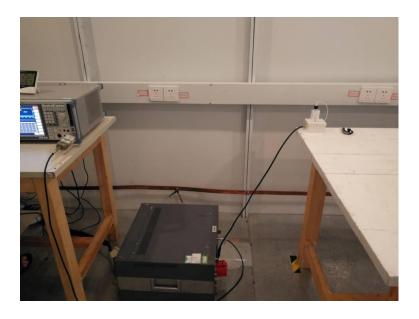

Report No.: GTSR17042032-01 Page 35 of 38

6. External and Internal Photos of the EUT

External Photos







Report No.: GTSR17042032-01 Page 36 of 38








Report No.: GTSR17042032-01 Page 37 of 38





Internal Photos



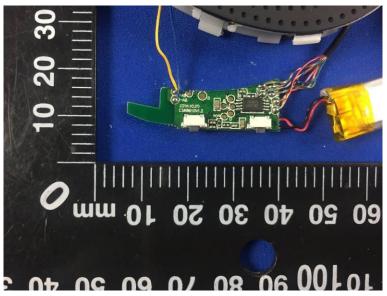

Report No.: GTSR17042032-01 Page 38 of 38

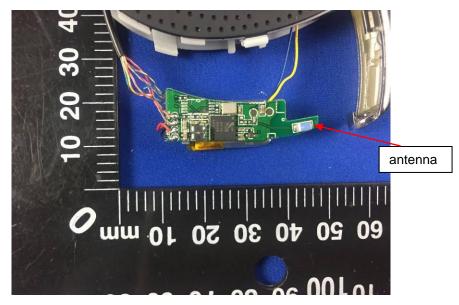

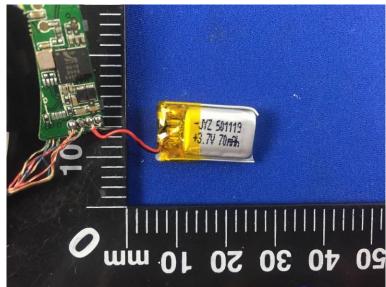

.....End of Report.....