
FCC Test Report

Report No.: AGC03777170401FE03

FCC ID : 2AL7X-SW0039
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Swarovski BT Earplug
BRAND NAME : Swarovski
MODEL NAME : SW0039, SW0040, 5388210, 5388212, 5386186, 5386187
CLIENT : Sweda (Shen Zhen) Electronics Company Limited
DATE OF ISSUE : May 24, 2017
STANDARD(S) : FCC Part 15 Subpart C Section 15.249
TEST PROCEDURE(S)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 24, 2017	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM.....	9
5.2. EQUIPMENT USED IN EUT SYSTEM.....	9
5.3. SUMMARY OF TEST RESULTS.....	9
6. TEST FACILITY	10
7. TEST METHOD	10
8. ALL TEST EQUIPMENT LIST	10
9. RADIATED EMISSION	12
9.1TEST LIMIT.....	12
9.2. MEASUREMENT PROCEDURE.....	13
9.3. TEST SETUP.....	15
9.4. TEST RESULT	17
10. BAND EDGE EMISSION	46
10.1. MEASUREMENT PROCEDURE.....	46
10.2 TEST SETUP	46
10.3 RADIATED TEST RESULT	47
11. 20DB BANDWIDTH.....	55
11.1. MEASUREMENT PROCEDURE	55
11.2. TEST SET-UP	55
11.3. LIMITS AND MEASUREMENT RESULTS.....	55
12. FCC LINE CONDUCTED EMISSION TEST	64
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST.....	64
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	64
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	65
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	65
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	66
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	70
APPENDIX B: PHOTOGRAPHS OF EUT	73

1. VERIFICATION OF CONFORMITY

Applicant	Sweda (Shen Zhen) Electronics Company Limited
Address	Block C, Lian Tang Chun Wei Ind. Bldg., Lian Tang, ShenZhen, China, 518004
Manufacturer	Sweda (Shen Zhen) Electronics Company Limited
Address	Block C, Lian Tang Chun Wei Ind. Bldg., Lian Tang, ShenZhen, China, 518004
Product Designation	Swarovski BT Earplug
Brand Name	Swarovski
Test Model	SW0039
Series Model	SW0040, 5388210, 5388212, 5386186, 5386187
Difference description	All the same except for the appearance (The model SW0039, 5388210 and 5386186 are white, decorated with heart-shaped earphone and pellucid crystal. While SW0040, 5388212 and 5386187 are black, decorated with square earphone and black crystal)
Date of test	May 15, 2017 to May 20, 2017
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Strive Liang

Tested By _____
 Strive Liang(Liang Faqiang) May 20, 2017

Forrest Lei

Reviewed By _____
 Forrest Lei(Lei Yonggang) May 24, 2017

Solger Zhang

Approved By _____
 Solger Zhang(Zhang Hongyi)
 Authorized Officer May 24, 2017

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power(BR/EDR)	-1.32dBm(Max EIRP Power=Max radiation field-95.2)
RF Output Power(BLE)	-1.30dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK for BR/EDR, GFSK for BLE
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	V1.0
Software Version	V2
Antenna Designation	Ceramic Antenna
Antenna Gain	2dBi
Power Supply	DC 3.7V by battery
Note: The USB port only be used for charging and can't be used to transfer data with PC.	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2404MHz
	:	:
	38	2478 MHz
	39	2480 MHz

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.


No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(GFSK)
2	Middle channel TX (GFSK)
3	High channel TX (GFSK)
4	Low channel TX($\pi/4$ -DQPSK)
5	Middle channel TX($\pi/4$ -DQPSK)
6	High channel TX ($\pi/4$ -DQPSK)
7	Low channel TX(8DPSK)
8	Middle channel TX (8DPSK)
9	High channel TX (8DPSK)
10	BT Link with charging
11	BT Link

Note:


1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

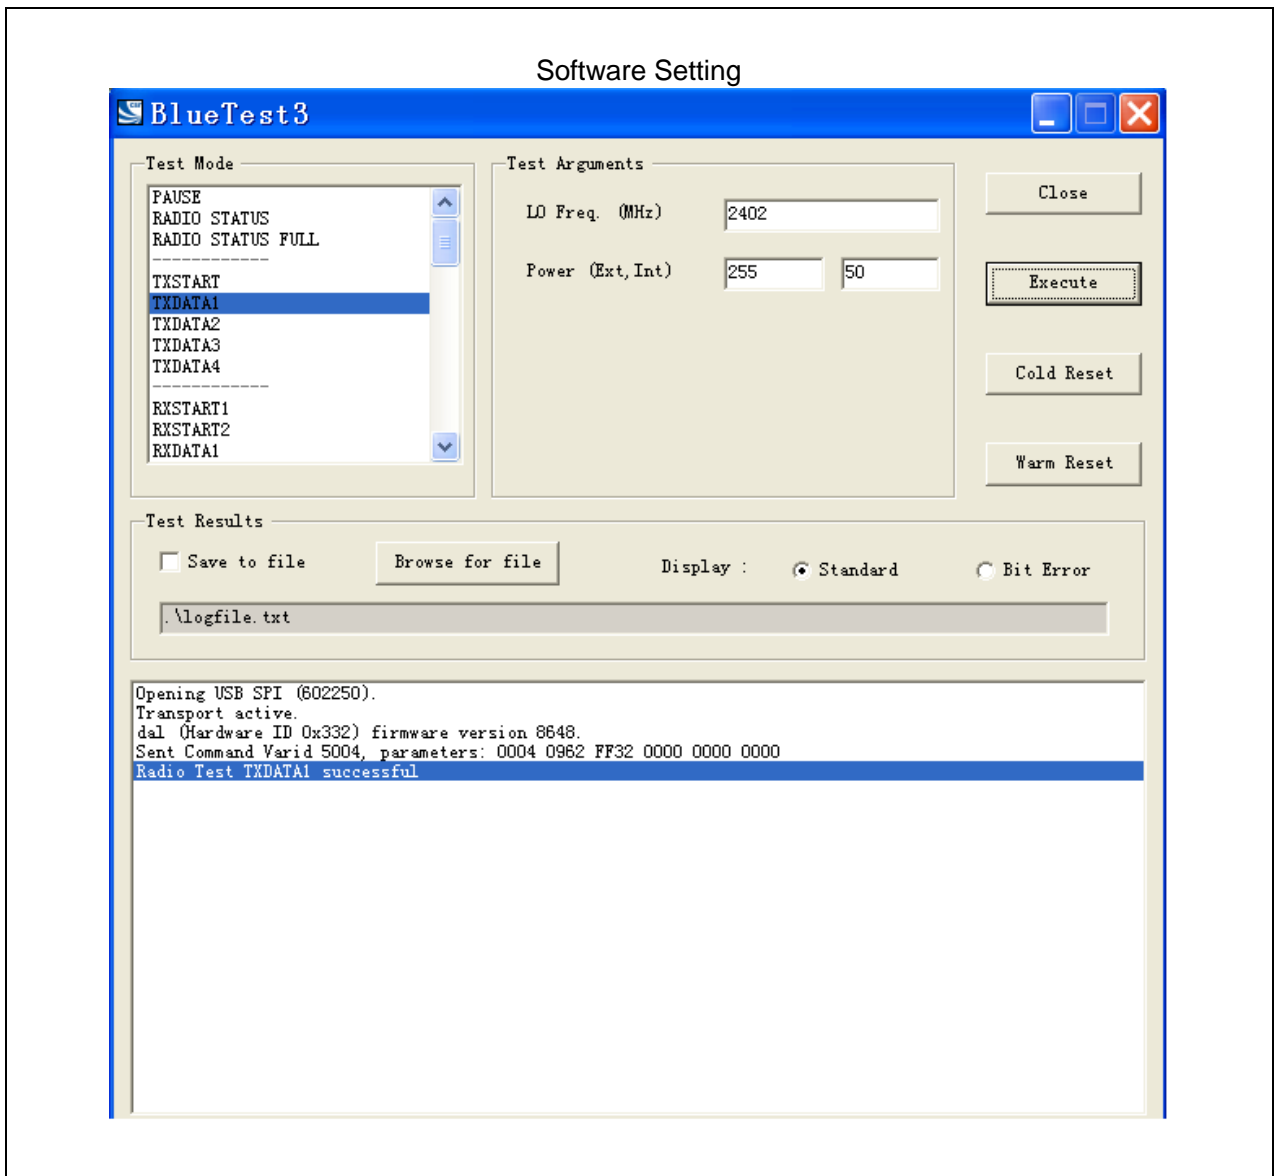

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

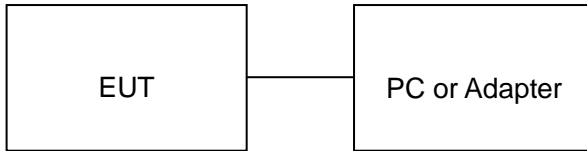

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

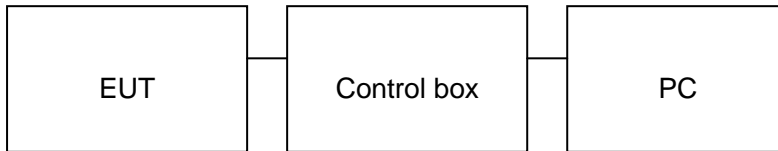

5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK
1	Swarovski BT Earplug	Swarovski	SW0039	EUT
2	Battery	JYZ	360829	Accessory
3	PC	Sony	E1412AYCW	A.E
4	PC Adapter	Sony	VGP-AC19V36	A.E
5	Control box	CSR	USB_SPI_TOOL	A.E
6	Adapter	IPRO	NTR-S01	A.E
7	USB Cable	N/A	1.0m Unshielded	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017
temporary antenna connector	N/A	S100	--	July 4, 2016	July 3, 2017

FOR RADIATED EMISSION TEST (1GHz ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017

9. RADIATED EMISSION

9.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu$ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

9.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/VBW 6MHz for Peak, RBW 1.5MHz/10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

9.3. TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 30MHz

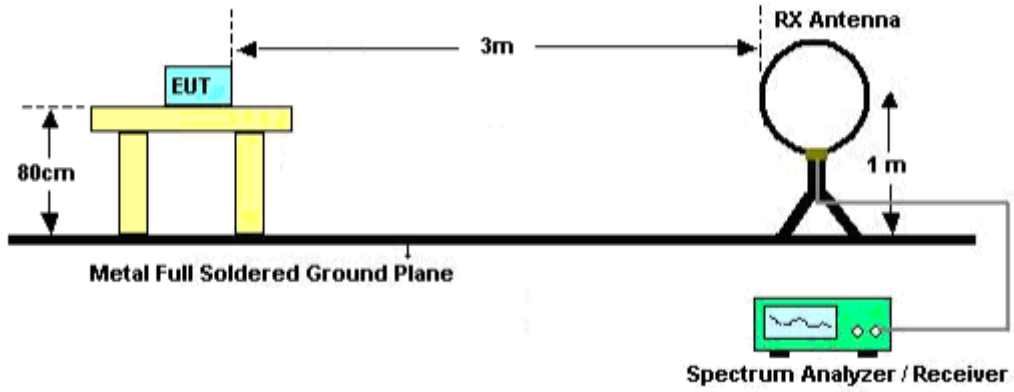

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

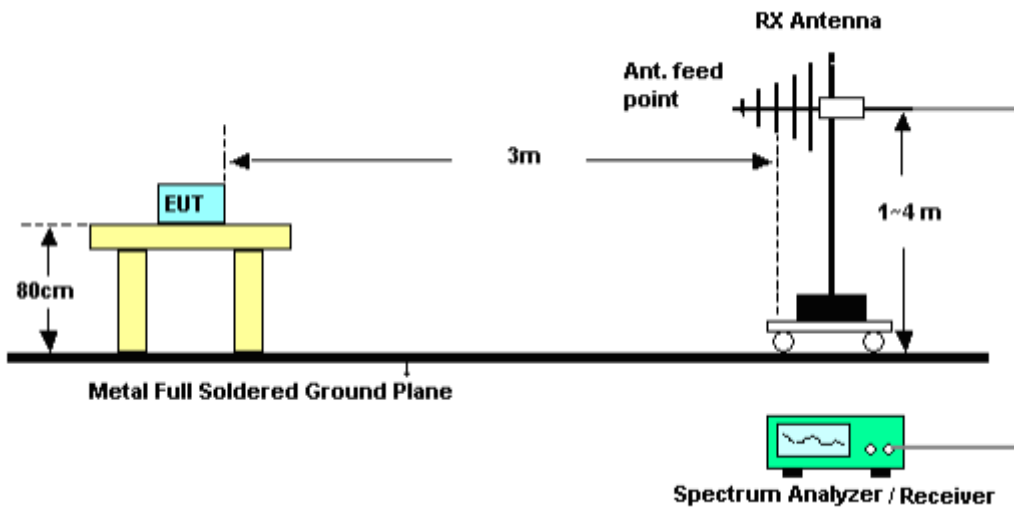

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

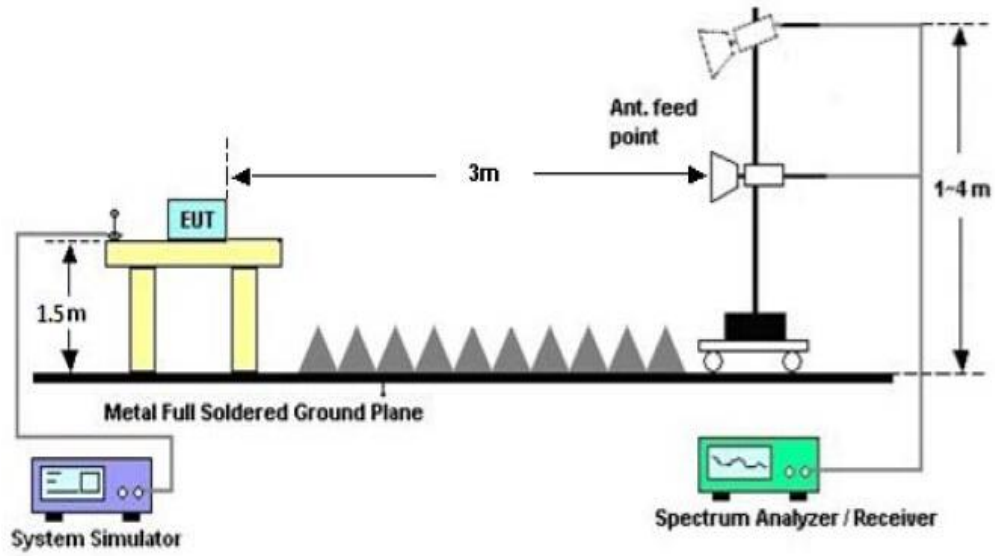

9.4. TEST RESULT

(Worst modulation:GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

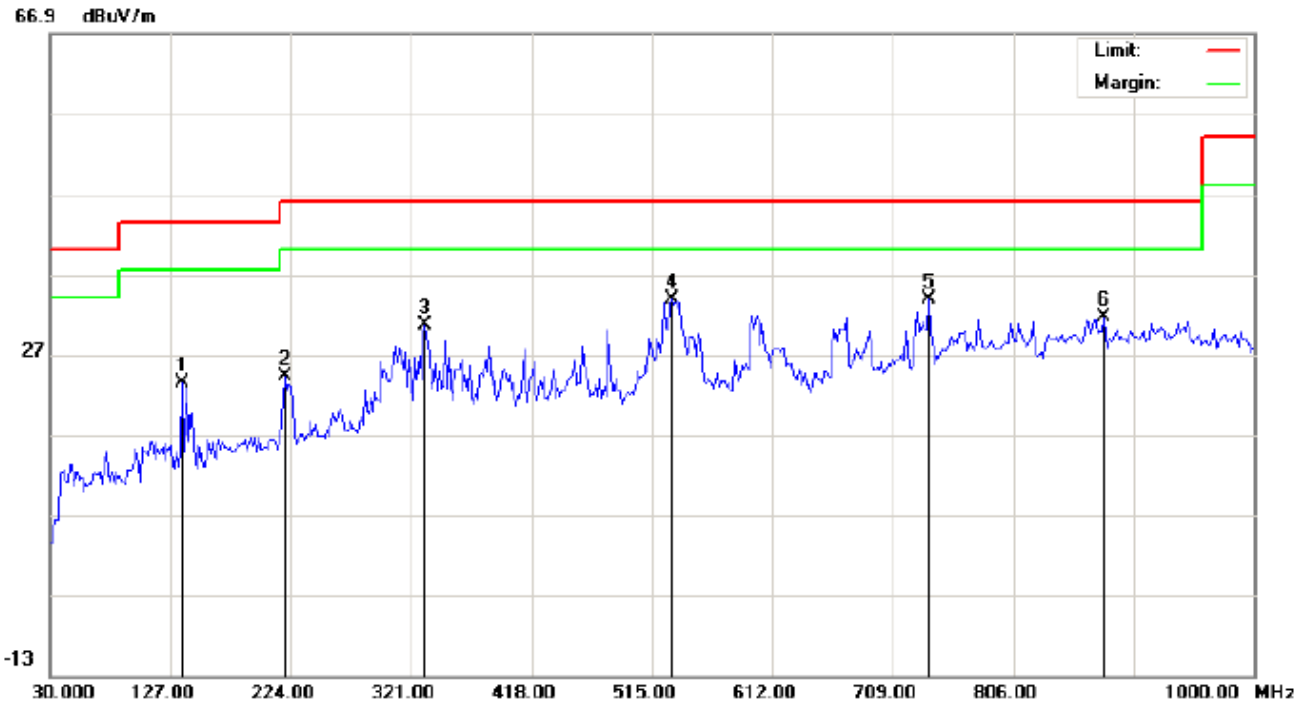

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: Low Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	9.77	13.66	23.43	43.50	-20.07	peak			
2		219.1500	14.25	10.05	24.30	46.00	-21.70	peak			
3		332.3167	13.02	17.56	30.58	46.00	-15.42	peak			
4	*	531.1667	11.86	21.97	33.83	46.00	-12.17	peak			
5		738.1000	7.44	26.29	33.73	46.00	-12.27	peak			
6		878.7500	3.62	28.06	31.68	46.00	-14.32	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

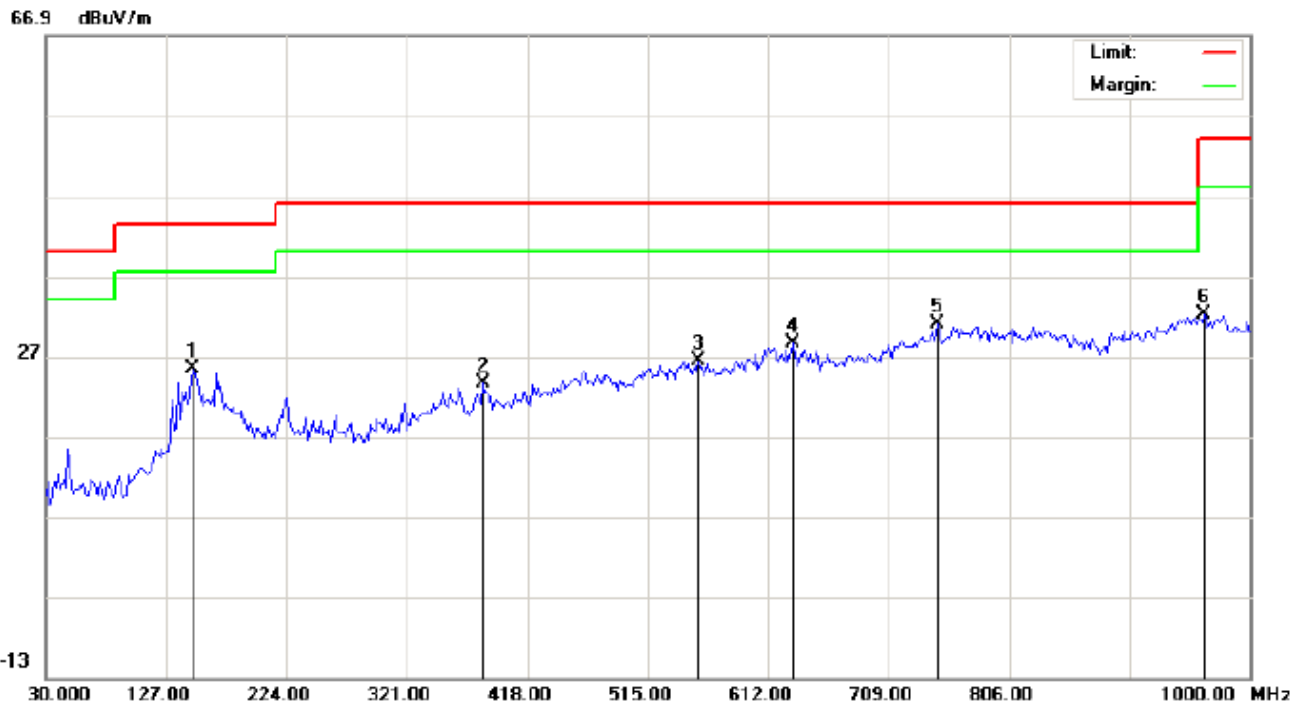

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: Low Channel TX
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0166	10.09	15.25	25.34	43.50	-18.16	peak			
2		382.4332	4.62	18.95	23.57	46.00	-22.43	peak			
3		555.4167	3.82	22.51	26.33	46.00	-19.67	peak			
4		631.4000	5.25	23.43	28.68	46.00	-17.32	peak			
5	*	747.8000	4.40	26.57	30.97	46.00	-15.03	peak			
6		962.8167	2.27	29.88	32.15	54.00	-21.85	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

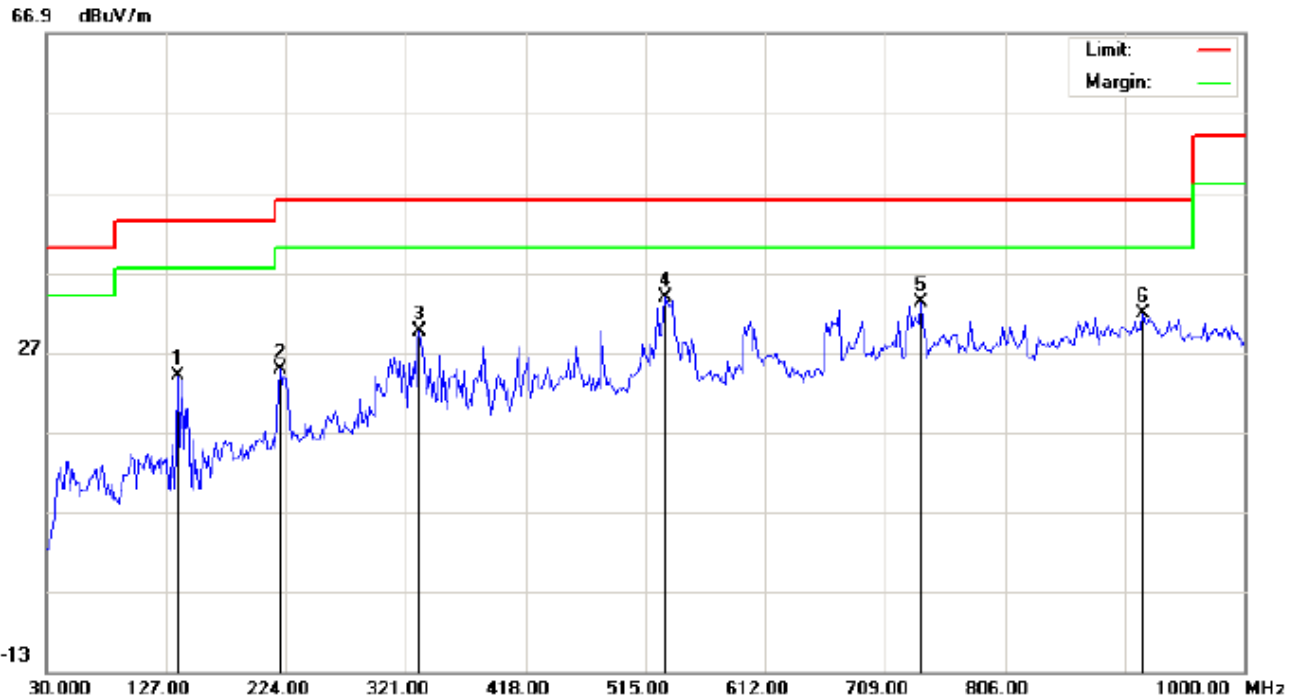

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: Middle Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	10.27	13.66	23.93	43.50	-19.57	peak			
2		219.1500	14.75	10.05	24.80	46.00	-21.20	peak			
3		332.3167	12.02	17.56	29.58	46.00	-16.42	peak			
4	*	531.1667	11.86	21.97	33.83	46.00	-12.17	peak			
5		738.1000	6.94	26.29	33.23	46.00	-12.77	peak			
6		917.5500	2.68	29.10	31.78	46.00	-14.22	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL –VERTICAL

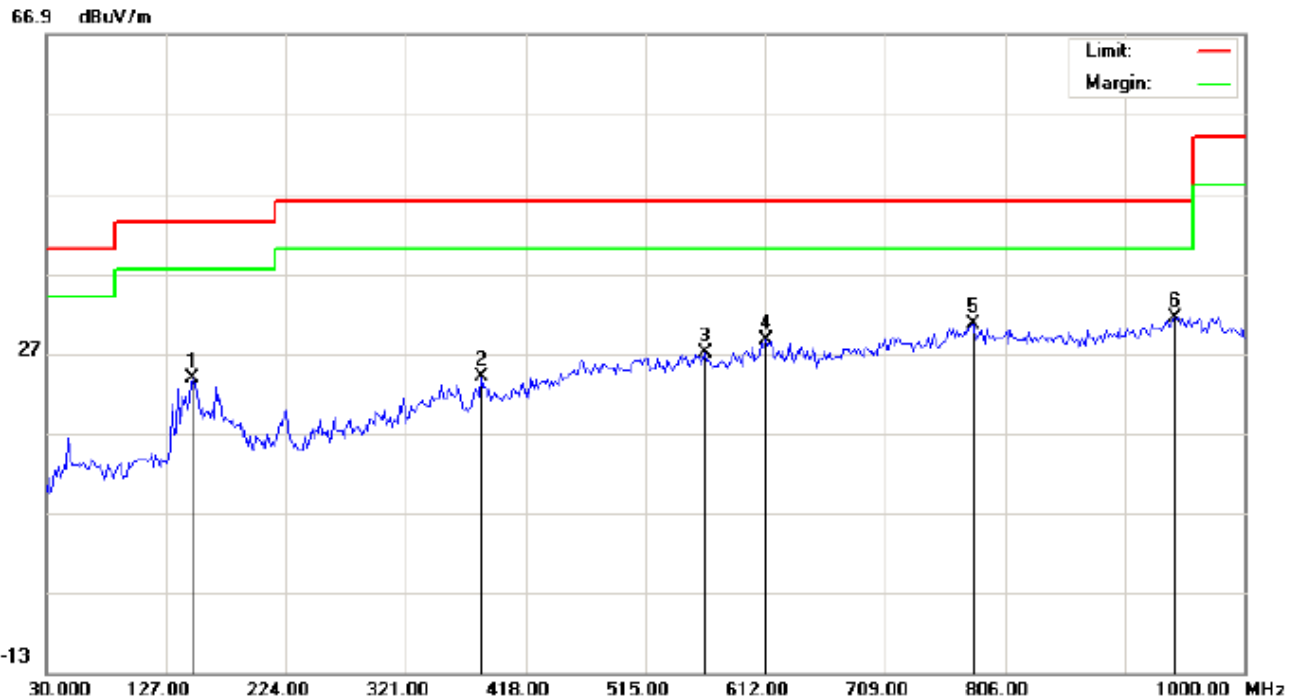

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: Middle Channel TX
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0166	8.59	15.25	23.84	43.50	-19.66	peak			
2		382.4332	5.12	18.95	24.07	46.00	-21.93	peak			
3		563.5000	4.51	22.55	27.06	46.00	-18.94	peak			
4		612.0000	5.60	23.00	28.60	46.00	-17.40	peak			
5		780.1333	3.65	27.05	30.70	46.00	-15.30	peak			
6	*	943.4167	1.56	29.82	31.38	46.00	-14.62	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

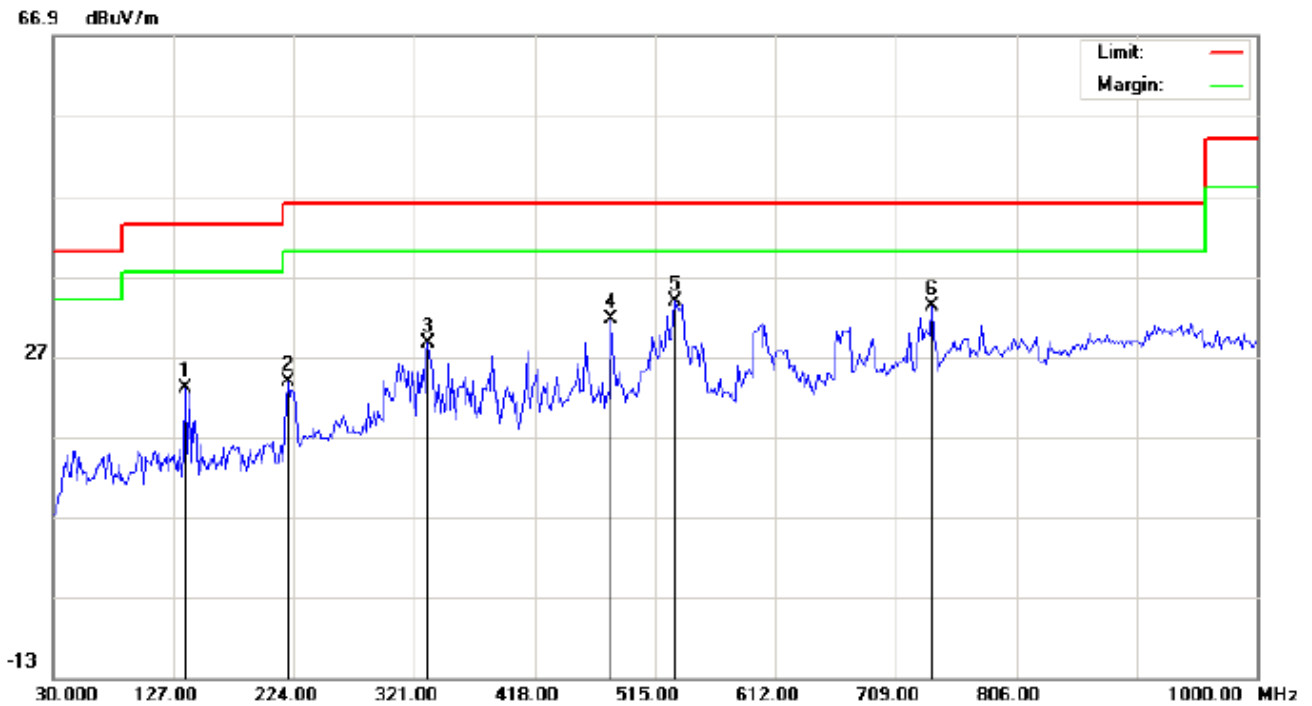

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	9.27	13.66	22.93	43.50	-20.57	peak			
2		219.1500	13.75	10.05	23.80	46.00	-22.20	peak			
3		332.3167	11.02	17.56	28.58	46.00	-17.42	peak			
4		479.4333	10.66	20.91	31.57	46.00	-14.43	peak			
5	*	531.1667	11.86	21.97	33.83	46.00	-12.17	peak			
6		738.1000	6.94	26.29	33.23	46.00	-12.77	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

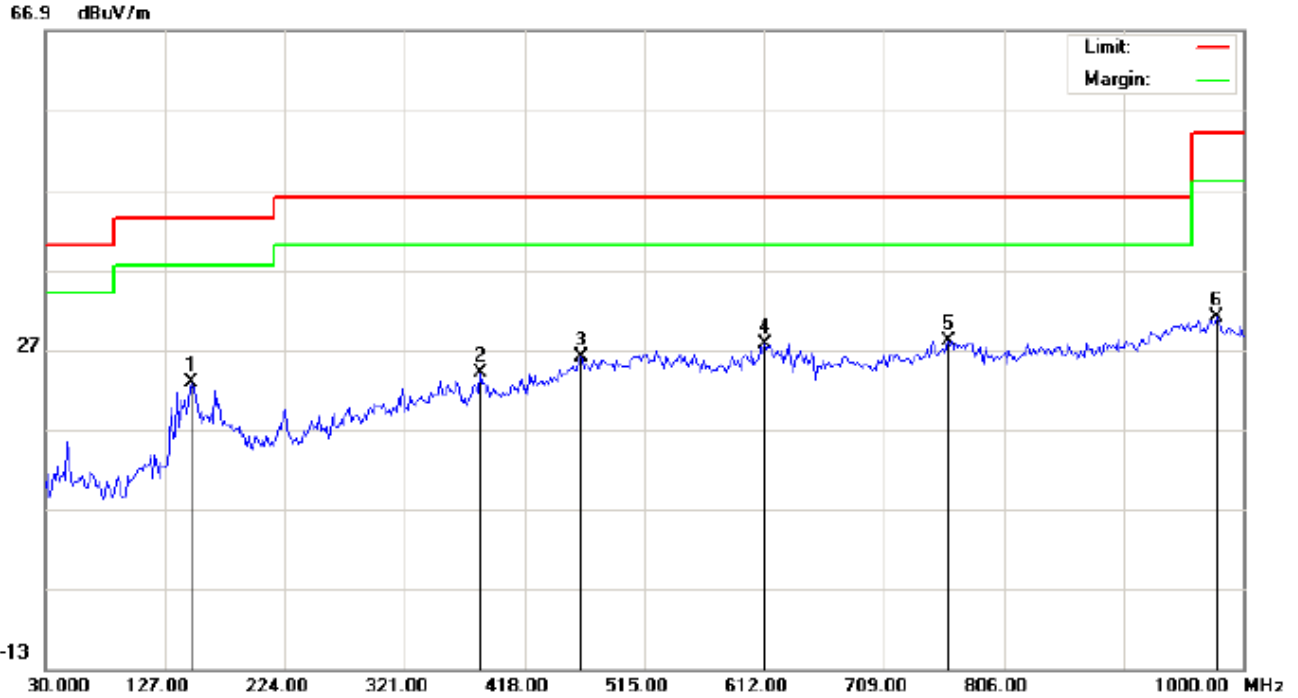

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: High Channel TX
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		148.0166	7.59	15.25	22.84	43.50	-20.66	peak			
2		382.4332	5.12	18.95	24.07	46.00	-21.93	peak			
3		463.2667	5.34	20.73	26.07	46.00	-19.93	peak			
4		612.0000	4.60	23.00	27.60	46.00	-18.40	peak			
5	*	760.7333	1.26	26.78	28.04	46.00	-17.96	peak			
6		978.9833	1.26	29.72	30.98	54.00	-23.02	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

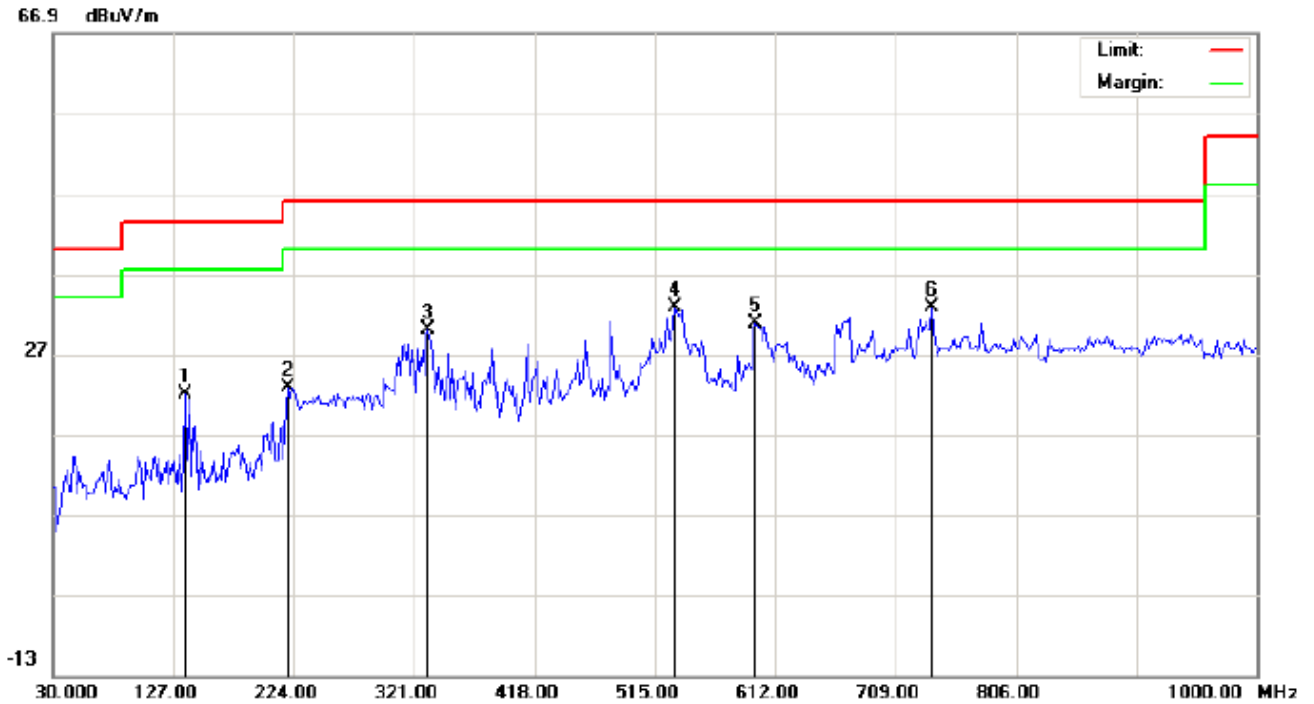


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 23.6
Limit: FCC Class B 3M Radiation	Power:	Humidity: 53.6 %
EUT: Swarovski BT Earplug	Distance:	
M/N: SW0039		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	8.27	13.66	21.93	43.50	-21.57	peak			
2		219.1500	12.75	10.05	22.80	46.00	-23.20	peak			
3		332.3167	12.52	17.56	30.08	46.00	-15.92	peak			
4	*	531.1667	10.86	21.97	32.83	46.00	-13.17	peak			
5		595.8333	7.14	23.63	30.77	46.00	-15.23	peak			
6		738.1000	6.44	26.29	32.73	46.00	-13.27	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

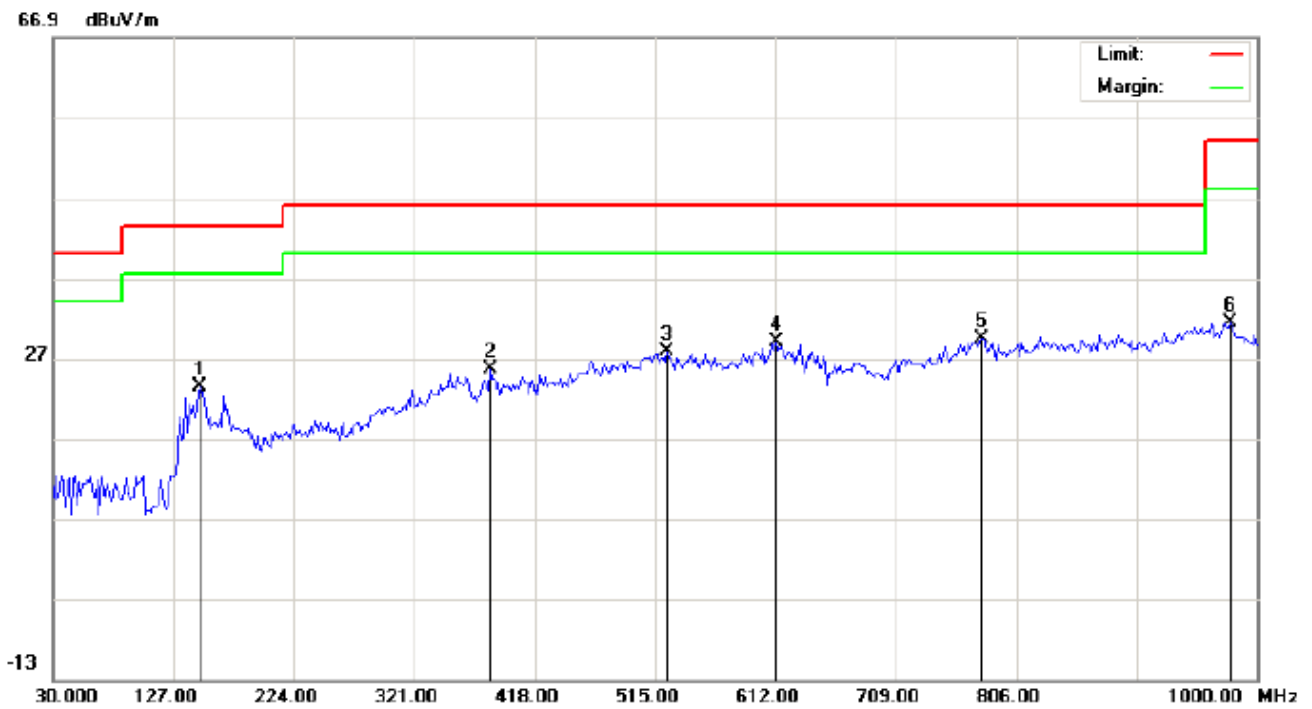

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: Low Channel TX
Note:

Polarization: **Vertical**
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0166	8.09	15.25	23.34	43.50	-20.16	peak			
2		382.4332	6.62	18.95	25.57	46.00	-20.43	peak			
3		524.7000	6.02	21.80	27.82	46.00	-18.18	peak			
4		612.0000	6.10	23.00	29.10	46.00	-16.90	peak			
5	*	778.5167	2.34	27.02	29.36	46.00	-16.64	peak			
6		978.9833	1.76	29.72	31.48	54.00	-22.52	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

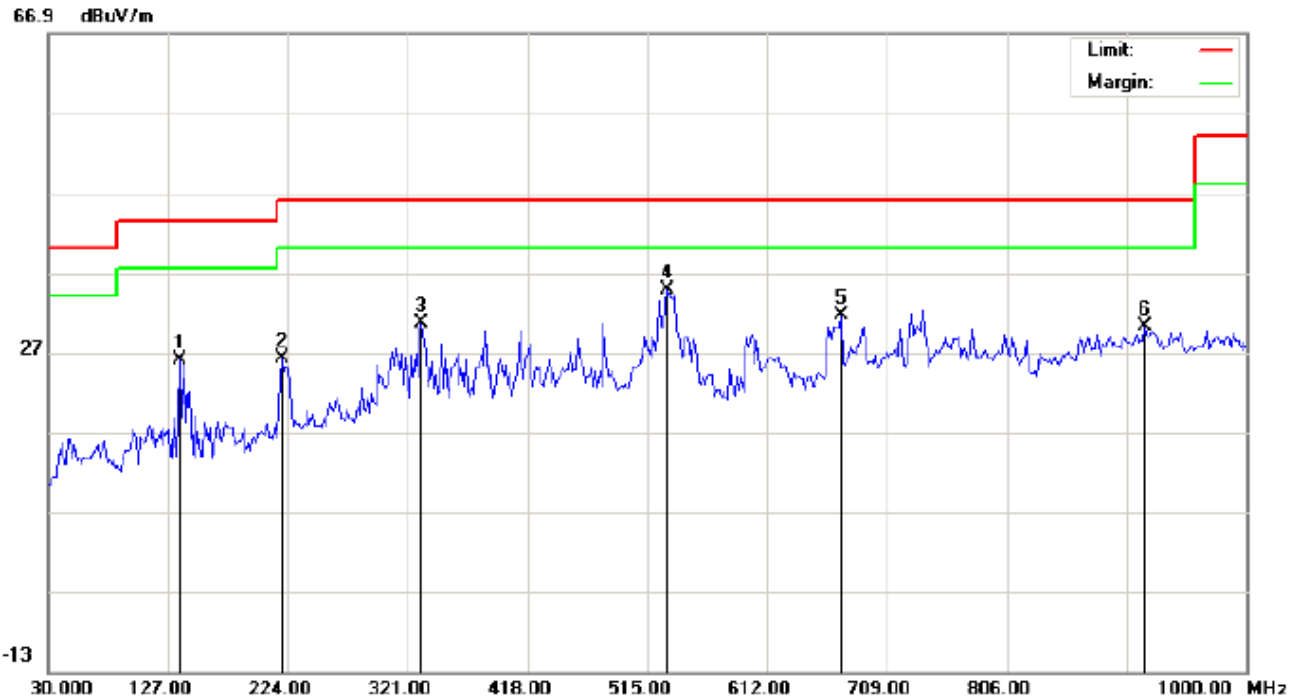

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Swarovski BT Earplug
 M/N: SW0039
 Mode: Middle Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 23.6
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	12.27	13.66	25.93	43.50	-17.57	peak			
2		219.1500	16.25	10.05	26.30	46.00	-19.70	peak			
3		332.3167	13.02	17.56	30.58	46.00	-15.42	peak			
4	*	531.1667	12.86	21.97	34.83	46.00	-11.17	peak			
5		671.8167	7.23	24.43	31.66	46.00	-14.34	peak			
6		917.5500	1.18	29.10	30.28	46.00	-15.72	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

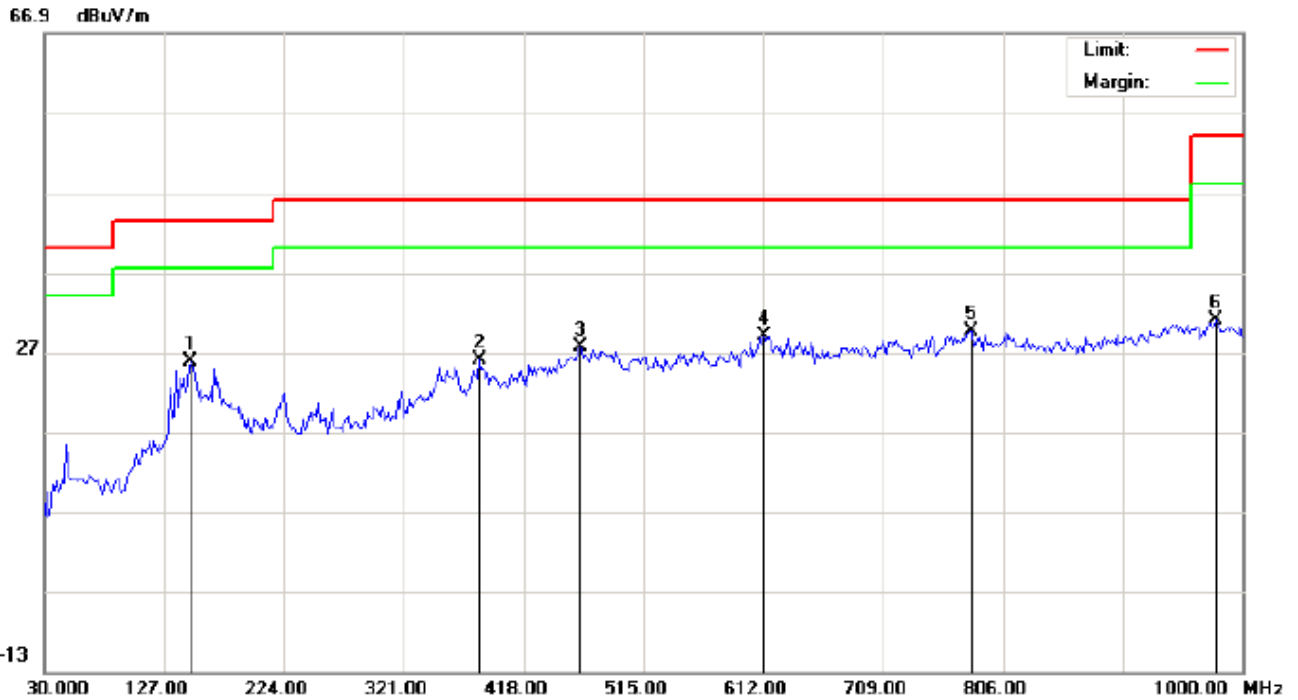

Site: site #1 Polarization: *Vertical* Temperature: 23.6
 Limit: FCC Class B 3M Radiation Power: Humidity: 53.6 %
 EUT: Swarovski BT Earplug Distance:
 M/N: SW0039
 Mode: Middle Channel TX
 Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		148.0166	10.59	15.25	25.84	43.50	-17.66	peak			
2		382.4332	7.12	18.95	26.07	46.00	-19.93	peak			
3		463.2667	6.84	20.73	27.57	46.00	-18.43	peak			
4		612.0000	6.10	23.00	29.10	46.00	-16.90	peak			
5	*	780.1333	2.65	27.05	29.70	46.00	-16.30	peak			
6		978.9833	1.26	29.72	30.98	54.00	-23.02	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

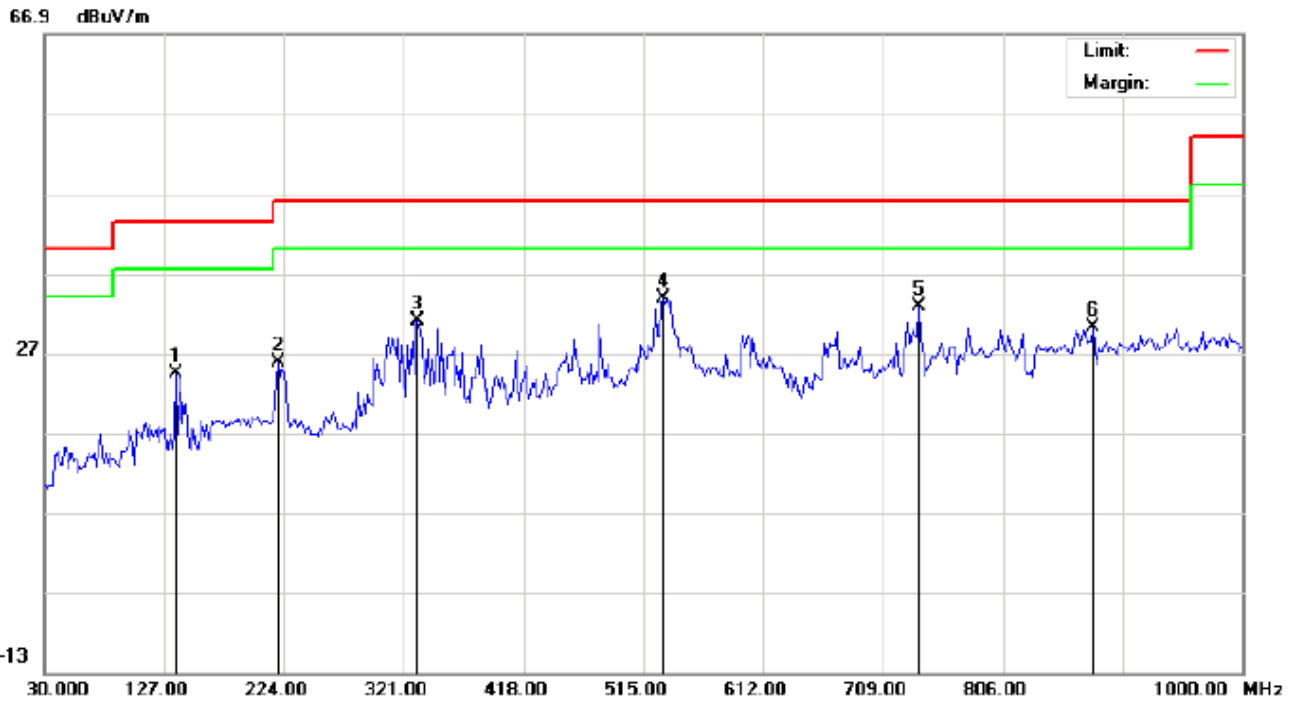

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	10.77	13.66	24.43	43.50	-19.07	peak			
2		219.1500	15.75	10.05	25.80	46.00	-20.20	peak			
3		332.3167	13.52	17.56	31.08	46.00	-14.92	peak			
4	*	531.1667	11.86	21.97	33.83	46.00	-12.17	peak			
5		738.1000	6.44	26.29	32.73	46.00	-13.27	peak			
6		878.7500	2.12	28.06	30.18	46.00	-15.82	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL –VERTICAL

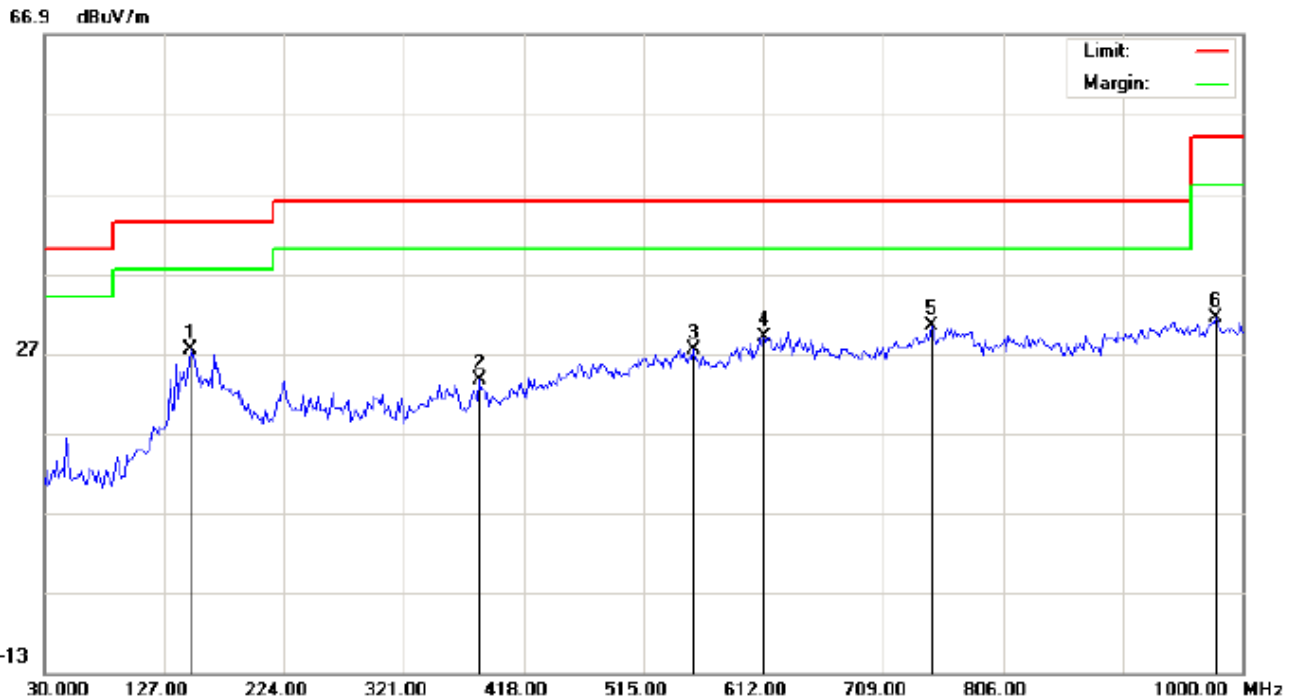

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: High Channel TX
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature: 23.6
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0166	12.09	15.25	27.34	43.50	-16.16	peak			
2		382.4332	4.62	18.95	23.57	46.00	-22.43	peak			
3		555.4167	4.82	22.51	27.33	46.00	-18.67	peak			
4		612.0000	6.10	23.00	29.10	46.00	-16.90	peak			
5	*	747.8000	3.90	26.57	30.47	46.00	-15.53	peak			
6		978.9833	1.76	29.72	31.48	54.00	-22.52	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

**RADIATED EMISSION ABOVE 1GHz
(Worst modulation: GFSK)
FOR BR/EDR**

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

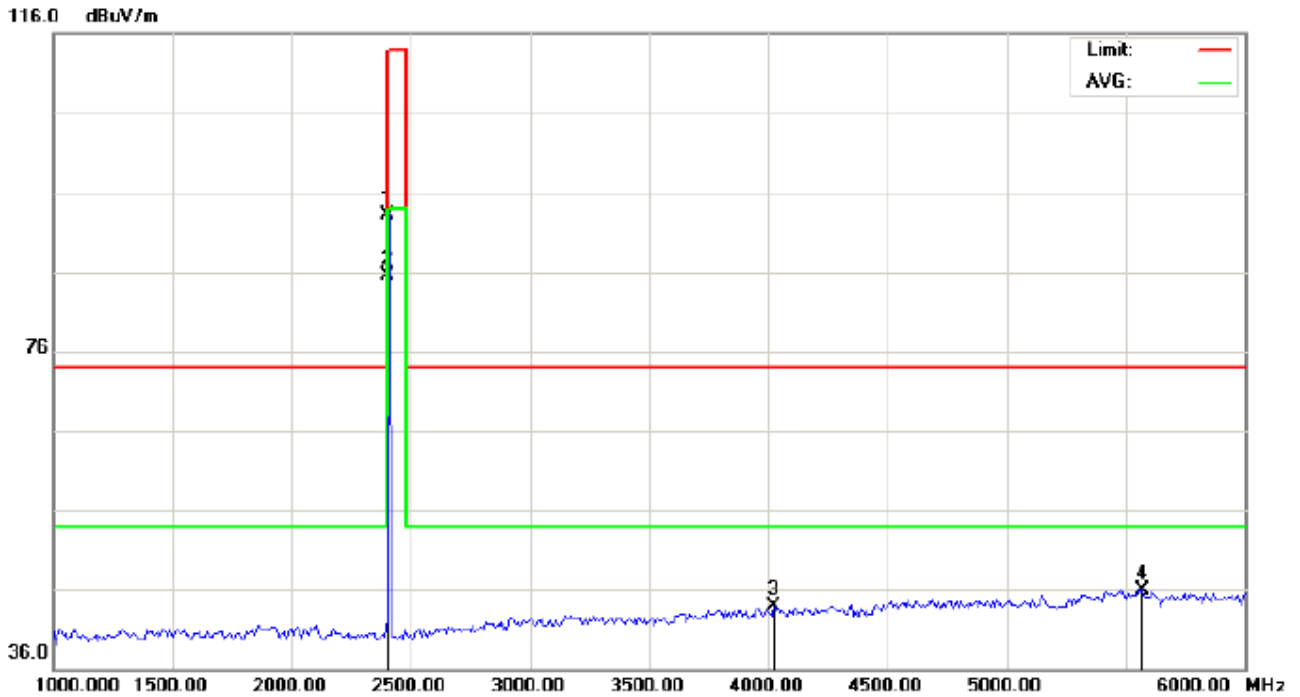


Site: site #1 Polarization: *Horizontal* Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Swarovski BT Earplug Distance:
 M/N: SW0039
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2402.000	82.82	10.32	93.14	114.00	-20.86	peak			
2	*	2402.000	75.11	10.32	85.43	94.00	-8.57	AVG	100	184	
3		4025.000	29.14	14.77	43.91	74.00	-30.09	peak			
4		5566.667	47.66	-1.78	45.88	74.00	-28.12	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

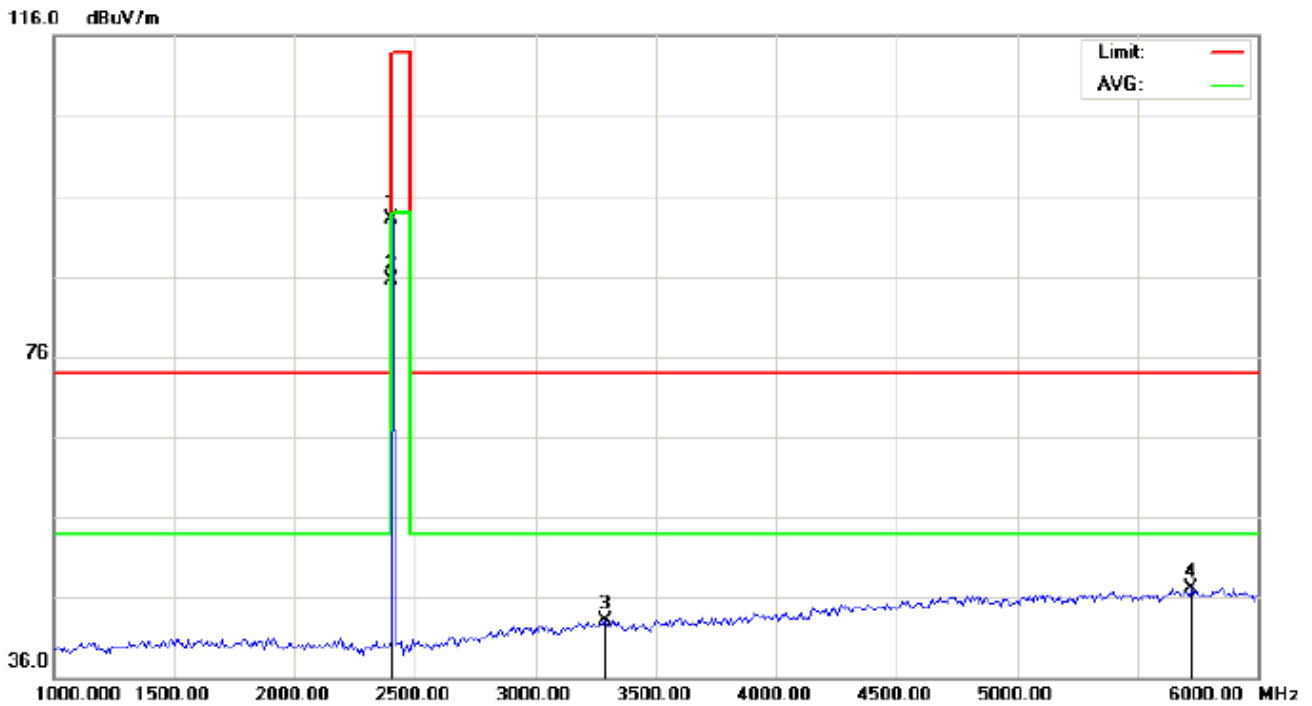


Site: site #1 Polarization: *Vertical* Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Swarovski BT Earplug Distance:
M/N: SW0039
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2402.000	82.85	10.32	93.17	114.00	-20.83	peak			
2	*	2402.000	75.15	10.32	85.47	94.00	-8.53	AVG	100	137	
3		3291.667	31.13	11.91	43.04	74.00	-30.96	peak			
4		5725.000	48.86	-1.71	47.15	74.00	-26.85	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

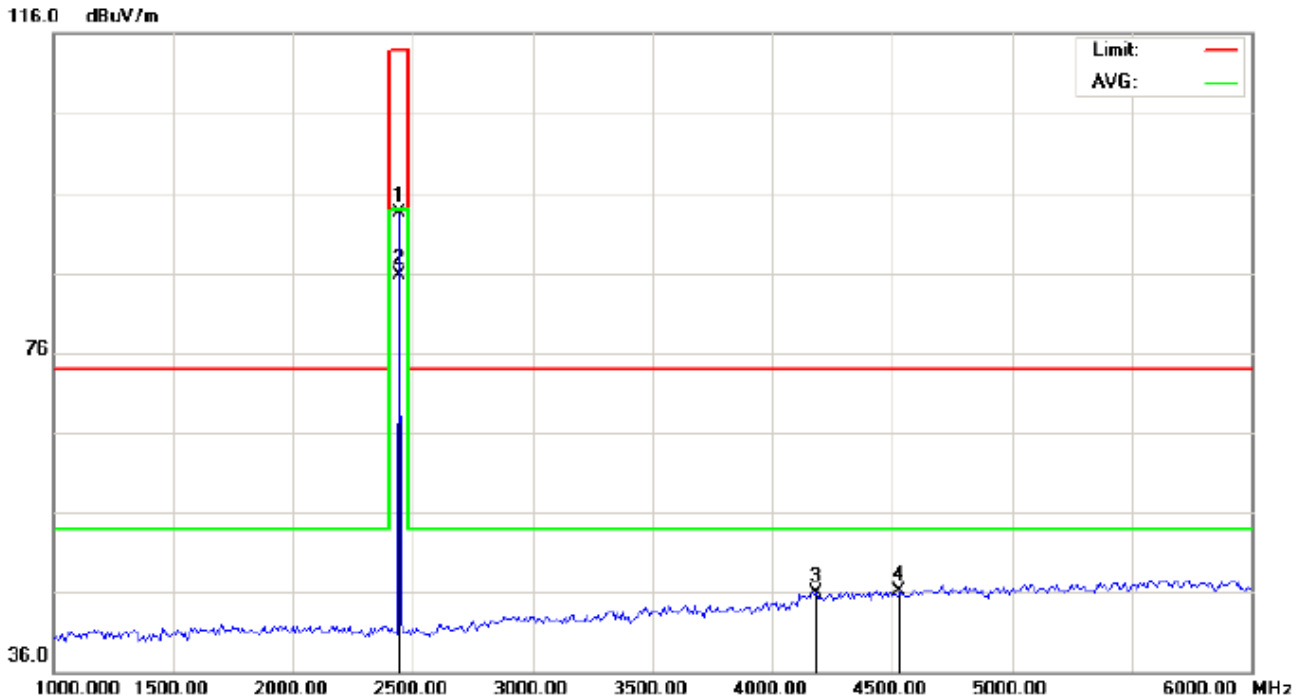

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Swarovski BT Earplug
 M/N: SW0039
 Mode: Middle Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	83.16	10.36	93.52	114.00	-20.48	peak			
2	*	2441.000	75.33	10.36	85.69	94.00	-8.31	AVG	150	177	
3		4183.333	33.79	12.15	45.94	74.00	-28.06	peak			
4		4533.333	39.14	6.98	46.12	74.00	-27.88	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

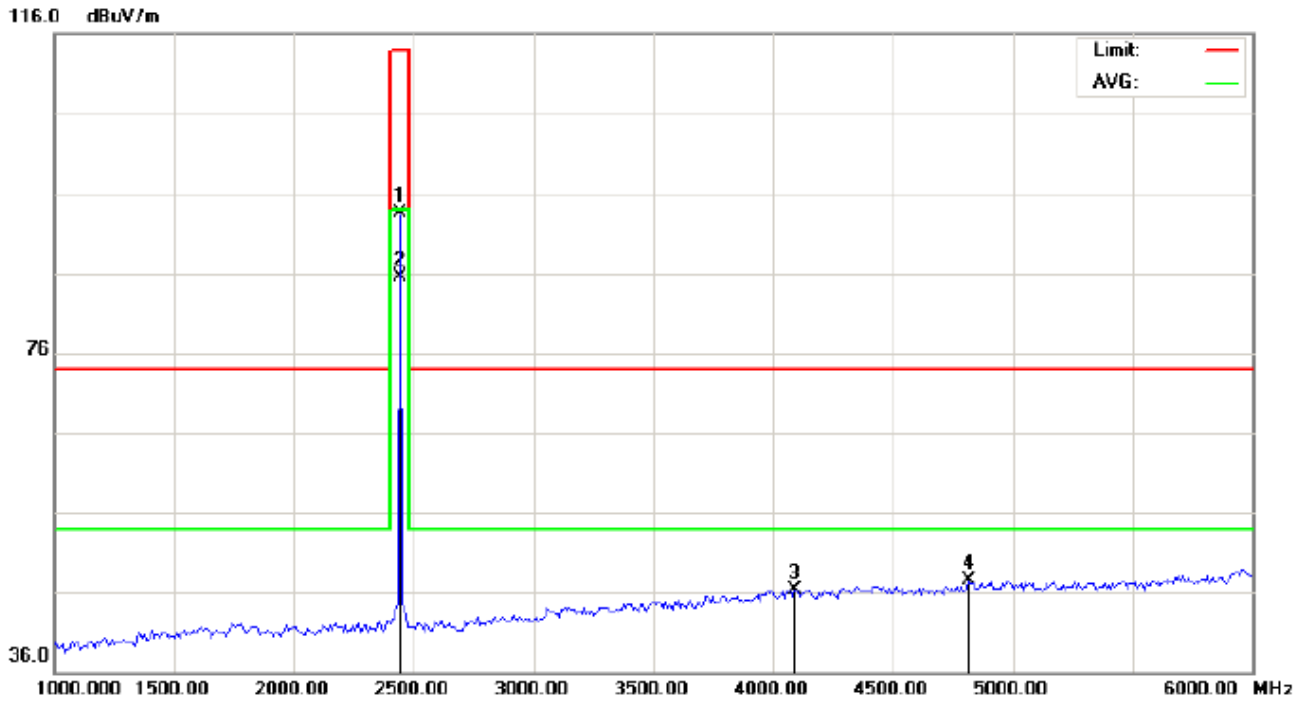

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHz(PK)-
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: Middle Channel TX
Note:


Polarization: **Vertical**
Power:
Distance:

Temperature: 22.7
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	83.09	10.36	93.45	114.00	-20.55	peak			
2	*	2441.000	75.23	10.36	85.59	94.00	-8.41	AVG	150	227	
3		4091.667	32.65	13.67	46.32	74.00	-27.68	peak			
4		4816.667	39.76	7.72	47.48	74.00	-26.52	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

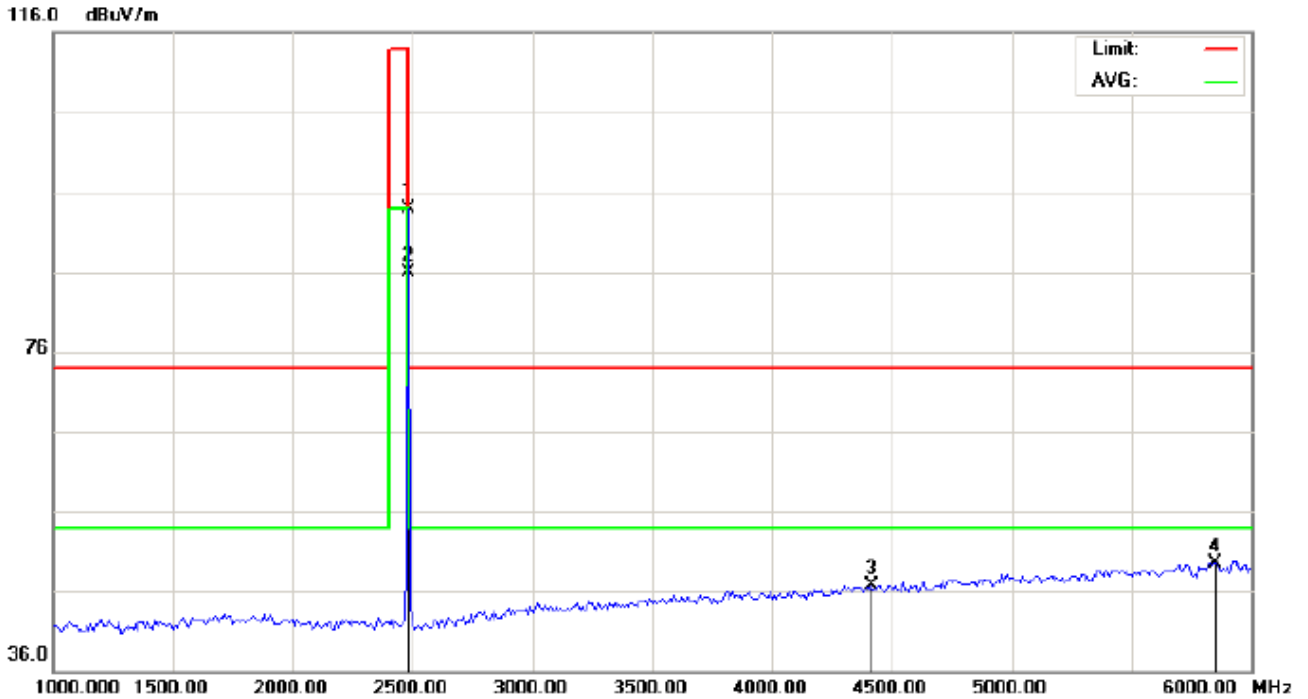

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Swarovski BT Earplug
 M/N: SW0039
 Mode: High Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	83.47	10.41	93.88	114.00	-20.12	peak			
2	*	2480.000	75.58	10.41	85.99	94.00	-8.01	AVG	100	244	
3		4416.667	38.43	8.27	46.70	74.00	-27.30	peak			
4		5850.000	51.23	-1.65	49.58	74.00	-24.42	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

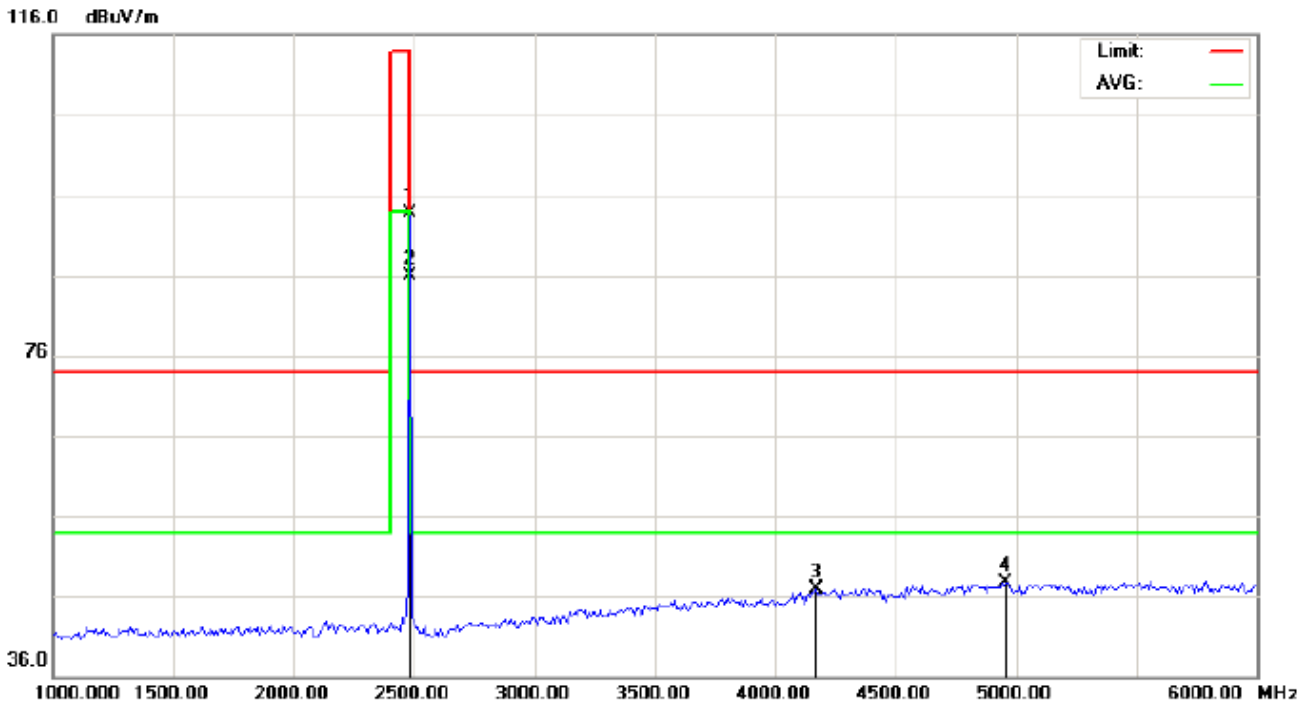

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Swarovski BT Earplug
 M/N: SW0039
 Mode: High Channel TX
 Note:

Polarization: *Vertical*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	83.28	10.41	93.69	114.00	-20.31	peak			
2	*	2480.000	75.45	10.41	85.86	94.00	-8.14	AVG	100	345	
3		4166.667	34.43	12.42	46.85	74.00	-27.15	peak			
4		4958.333	39.70	8.09	47.79	74.00	-26.21	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal**1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	82.82	10.32	93.14	114	-20.86	Horizontal
2402	82.85	10.32	93.17	114	-20.83	Vertical
2441	83.16	10.36	93.52	114	-20.48	Horizontal
2441	83.09	10.36	93.45	114	-20.55	Vertical
2480	83.47	10.41	93.88	114	-20.12	Horizontal
2480	83.28	10.41	93.69	114	-20.31	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	75.11	10.32	85.43	94	-8.57	Horizontal
2402	75.15	10.32	85.47	94	-8.53	Vertical
2441	75.33	10.36	85.69	94	-8.31	Horizontal
2441	75.23	10.36	85.59	94	-8.41	Vertical
2480	75.58	10.41	85.99	94	-8.01	Horizontal
2480	75.45	10.41	85.86	94	-8.14	Vertical

2Mbps Result:**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	82.27	10.32	92.59	114	-21.41	Horizontal
2402	82.29	10.32	92.61	114	-21.39	Vertical
2441	82.68	10.36	93.04	114	-20.96	Horizontal
2441	82.69	10.36	93.05	114	-20.95	Vertical
2480	82.93	10.41	93.34	114	-20.66	Horizontal
2480	82.97	10.41	93.38	114	-20.62	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	74.60	10.32	84.92	94	-9.08	Horizontal
2402	74.62	10.32	84.94	94	-9.06	Vertical
2441	74.76	10.36	85.12	94	-8.88	Horizontal
2441	74.79	10.36	85.15	94	-8.85	Vertical
2480	75.01	10.41	85.42	94	-8.58	Horizontal
2480	75.06	10.41	85.47	94	-8.53	Vertical

3Mbps Result:**Peak value**


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.72	10.32	92.04	114	-21.96	Horizontal
2402	81.76	10.32	92.08	114	-21.92	Vertical
2441	82.13	10.36	92.49	114	-21.51	Horizontal
2441	82.16	10.36	92.52	114	-21.48	Vertical
2480	82.48	10.41	92.89	114	-21.11	Horizontal
2480	82.51	10.41	92.92	114	-21.08	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	74.10	10.32	84.42	94	-9.58	Horizontal
2402	74.17	10.32	84.49	94	-9.51	Vertical
2441	74.27	10.36	84.63	94	-9.37	Horizontal
2441	74.37	10.36	84.73	94	-9.27	Vertical
2480	74.51	10.41	84.92	94	-9.08	Horizontal
2480	74.54	10.41	84.95	94	-9.05	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

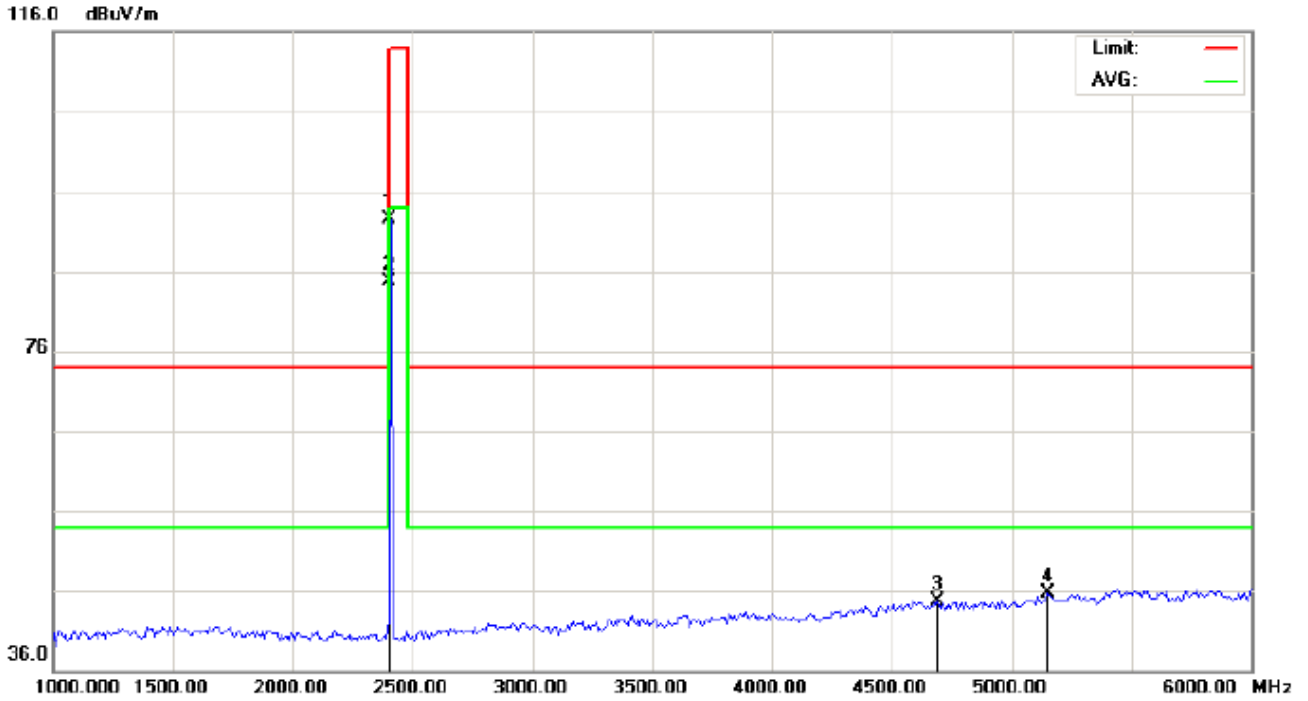

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHz(PK)-
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: Low Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 22.7
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2402.000	82.23	10.32	92.55	114.00	-21.45	peak			
2	*	2402.000	74.47	10.32	84.79	94.00	-9.21	AVG	150	311	
3		4691.667	37.30	7.39	44.69	74.00	-29.31	peak			
4		5150.000	40.55	5.20	45.75	74.00	-28.25	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

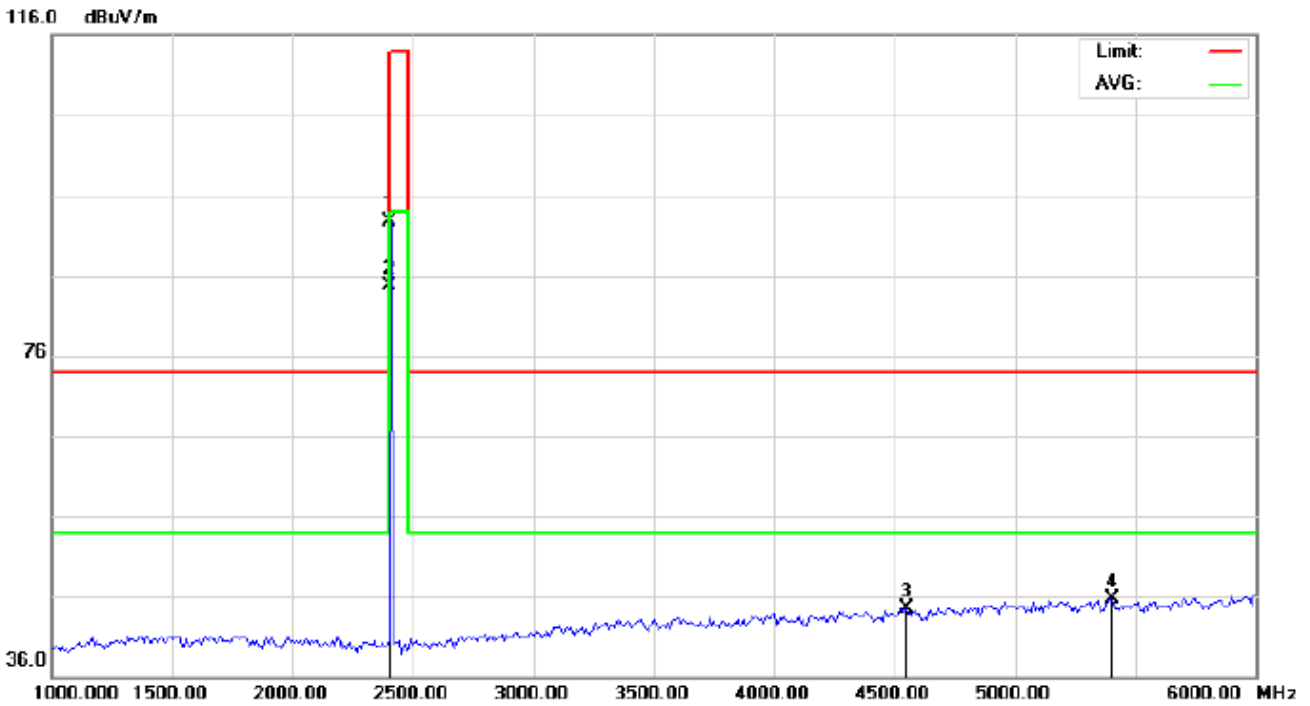


Site: site #1 Polarization: **Vertical** Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Swarovski BT Earplug Distance:
 M/N: SW0039
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2402.000	82.32	10.32	92.64	114.00	-21.36	peak			
2	*	2402.000	74.45	10.32	84.77	94.00	-9.23	AVG	150	179	
3		4550.000	37.54	7.02	44.56	74.00	-29.44	peak			
4		5400.000	45.48	0.19	45.67	74.00	-28.33	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

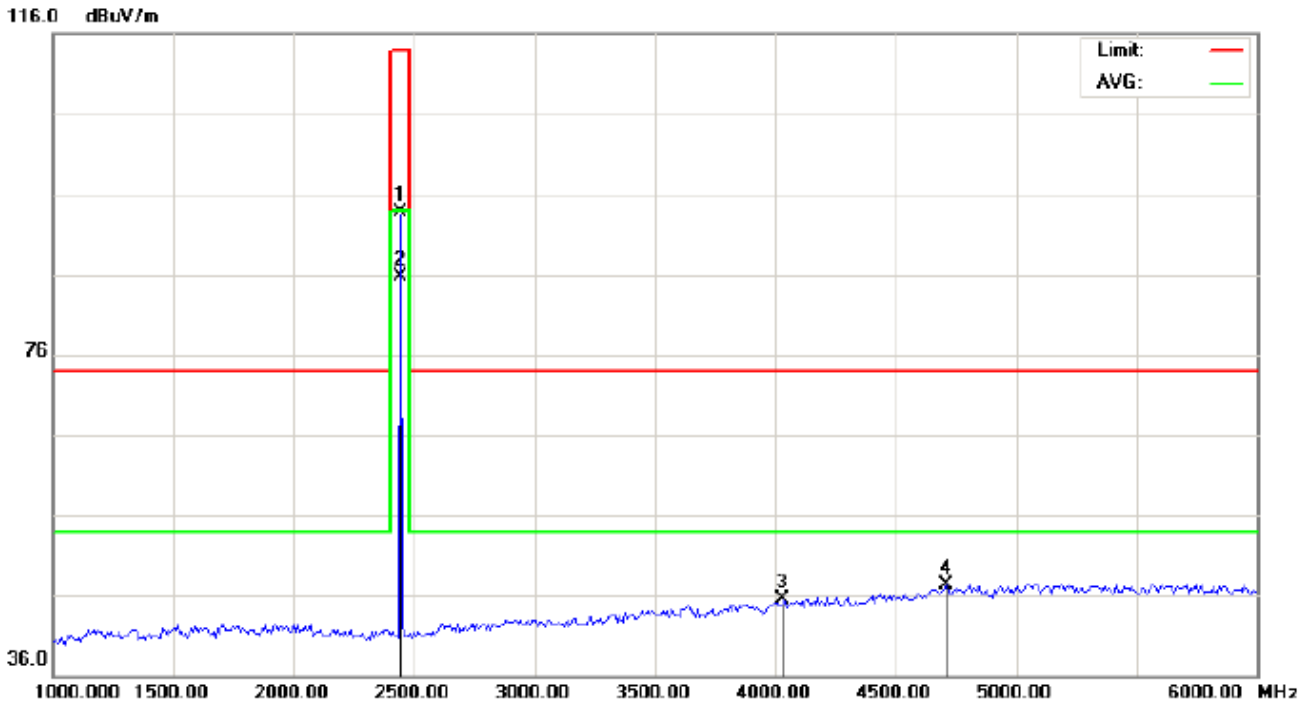

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Swarovski BT Earplug
 M/N: SW0039
 Mode: Middle Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	83.26	10.36	93.62	114.00	-20.38	peak			
2	*	2440.000	75.43	10.36	85.79	94.00	-8.21	AVG	100	122	
3		4033.333	30.80	14.64	45.44	74.00	-28.56	peak			
4		4708.333	39.89	7.44	47.33	74.00	-26.67	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

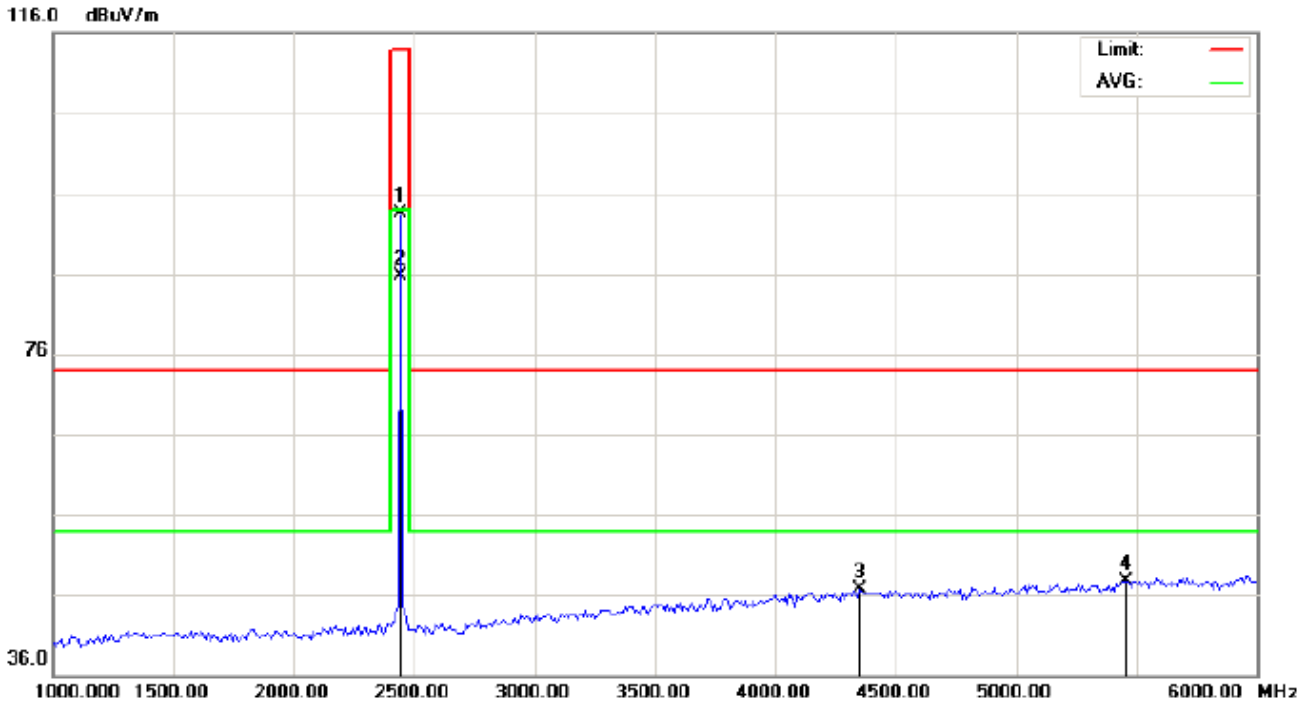

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Swarovski BT Earplug
 M/N: SW0039
 Mode: Middle Channel TX
 Note:


Polarization: *Vertical*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	83.15	10.36	93.51	114.00	-20.49	peak			
2	*	2440.000	75.33	10.36	85.69	94.00	-8.31	AVG	150	134	
3		4350.000	37.40	9.38	46.78	74.00	-27.22	peak			
4		5458.333	48.77	-0.98	47.79	74.00	-26.21	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

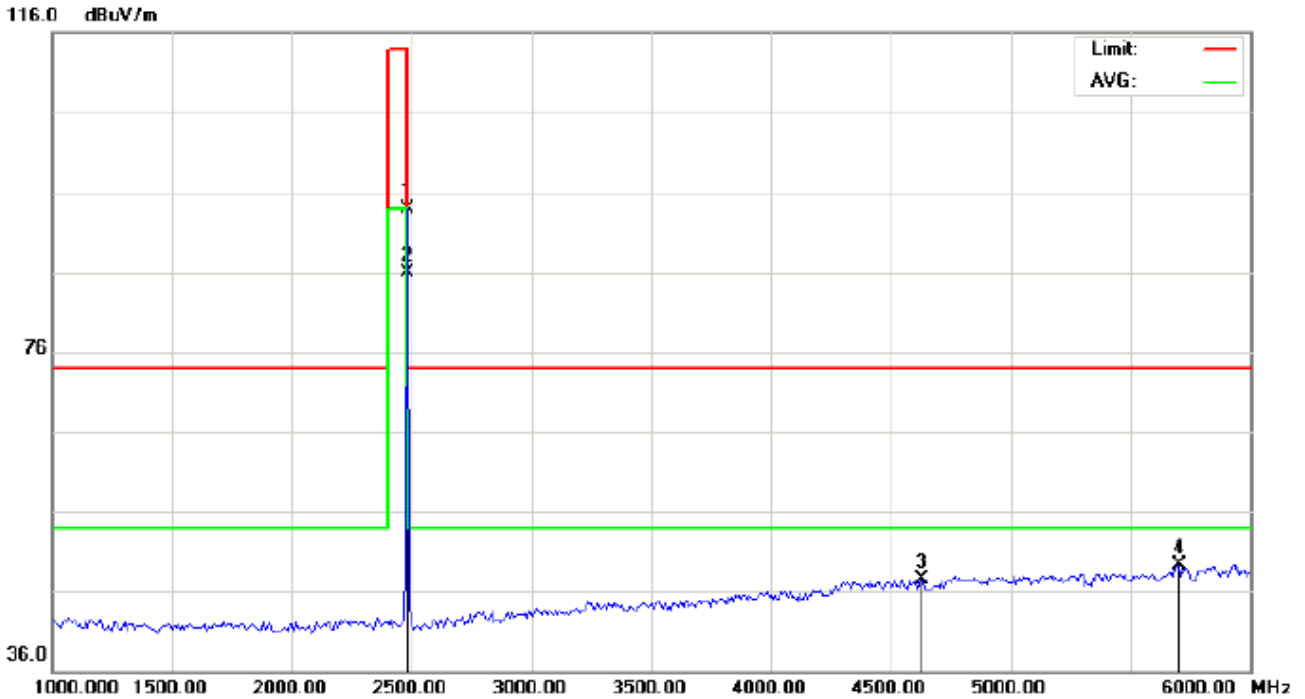


Site: site #1 Polarization: *Horizontal* Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Swarovski BT Earplug Distance:
M/N: SW0039
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	83.49	10.41	93.90	114.00	-20.10	peak			
2	*	2480.000	75.56	10.41	85.97	94.00	-8.03	AVG	150	149	
3		4633.333	40.34	7.24	47.58	74.00	-26.42	peak			
4		5700.000	51.04	-1.72	49.32	74.00	-24.68	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

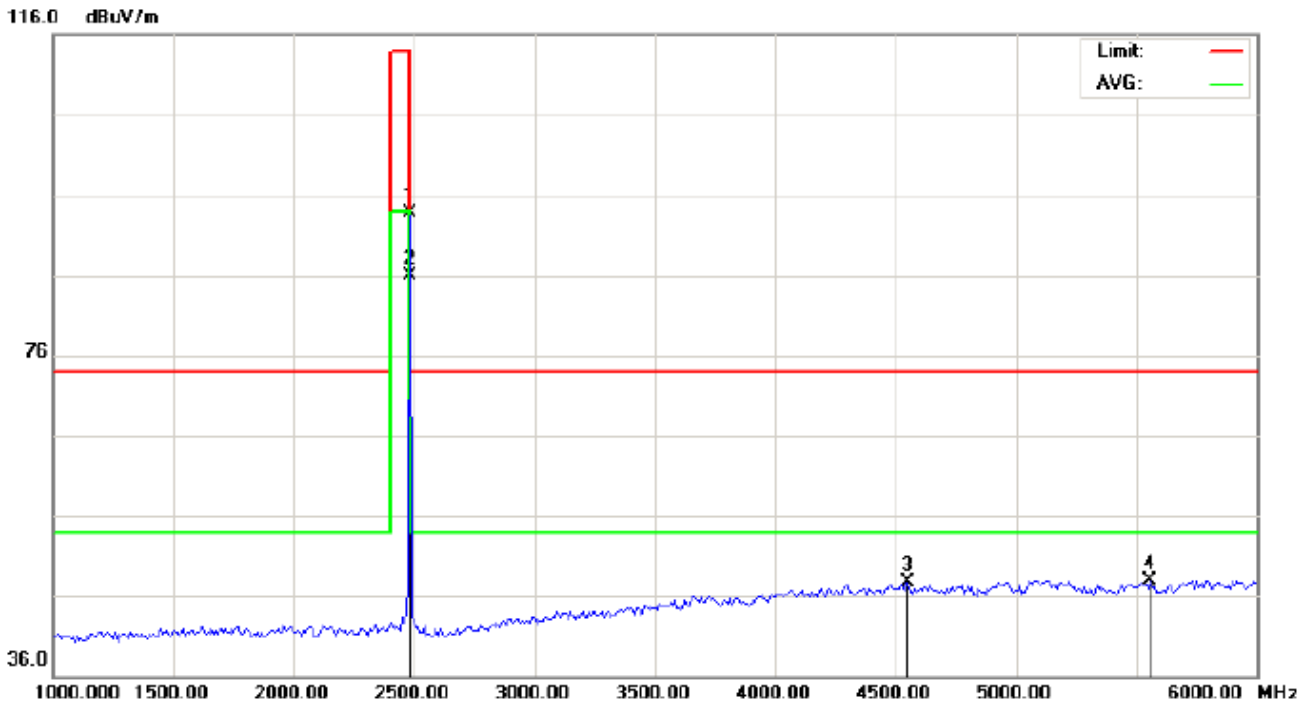

Site: site #1 Polarization: *Vertical* Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Swarovski BT Earplug Distance:
 M/N: SW0039
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	83.29	10.41	93.70	114.00	-20.30	peak			
2	*	2480.000	75.40	10.41	85.81	94.00	-8.19	AVG	150	173	
3		4550.000	40.65	7.02	47.67	74.00	-26.33	peak			
4		5558.333	49.78	-1.78	48.00	74.00	-26.00	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal**1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	82.23	10.32	92.55	114	-21.45	Horizontal
2402	92.32	10.32	92.64	114	-21.36	Vertical
2440	83.26	10.36	93.62	114	-20.38	Horizontal
2440	83.15	10.36	93.51	114	-20.49	Vertical
2480	83.49	10.41	93.90	114	-20.10	Horizontal
2480	83.29	10.41	93.70	114	-20.30	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	74.47	10.32	84.79	94	-9.21	Horizontal
2402	74.45	10.32	84.77	94	-9.23	Vertical
2440	75.43	10.36	85.79	94	-8.21	Horizontal
2440	75.33	10.36	85.69	94	-8.31	Vertical
2480	75.56	10.41	85.97	94	-8.03	Horizontal
2480	75.40	10.41	85.81	94	-8.19	Vertical


10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

10.2 TEST SETUP


RADIATED EMISSION TEST SETUP

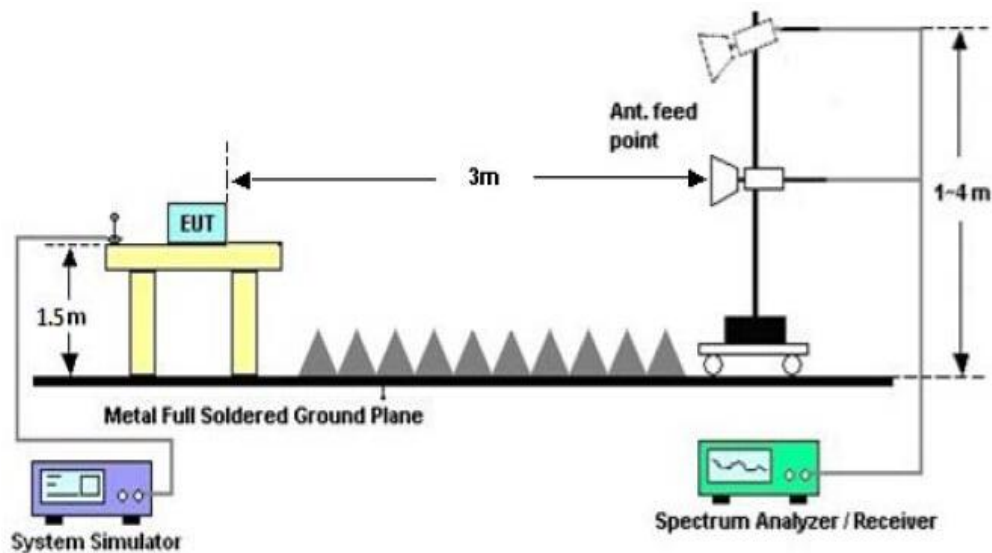

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)
FOR BR/EDR


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

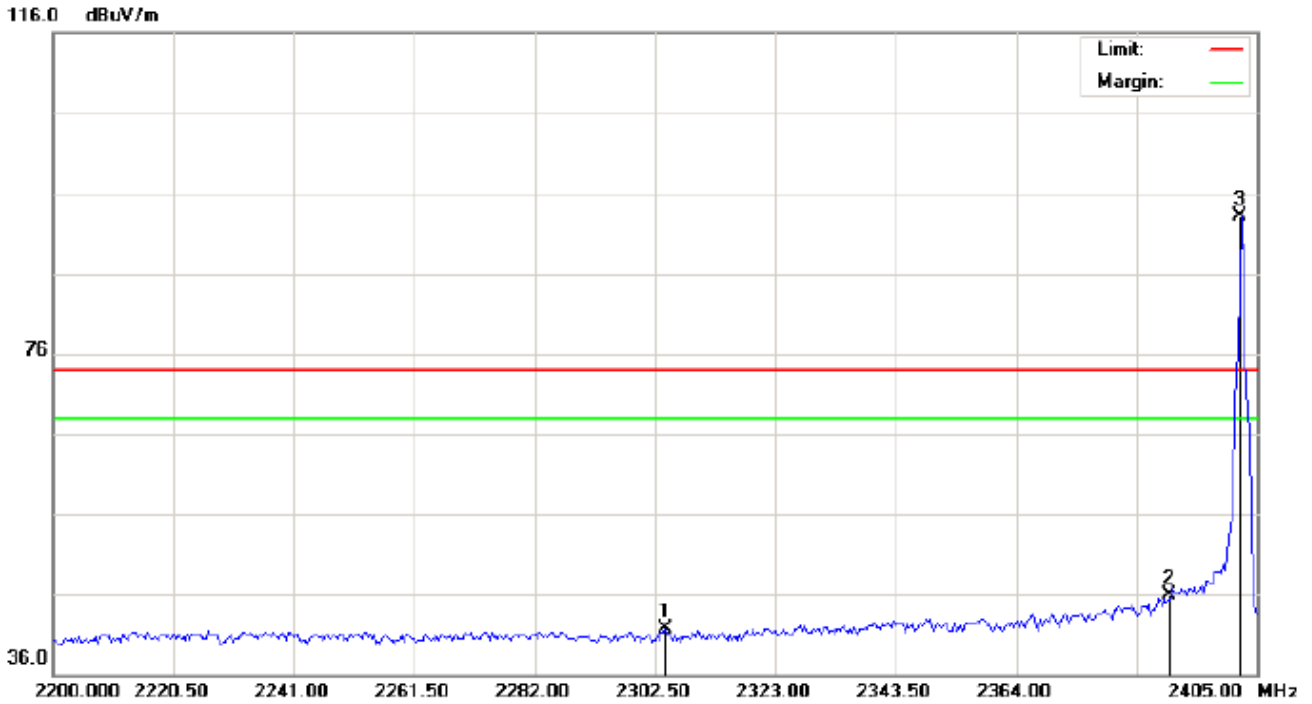

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Swarovski BT Earplug	Distance:	
M/N: SW0039		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2304.208	31.44	10.21	41.65	74.00	-32.35	peak			
2		2390.000	35.50	10.31	45.81	74.00	-28.19	peak			
3	*	2402.000	82.72	10.32	93.04	74.00	19.04	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

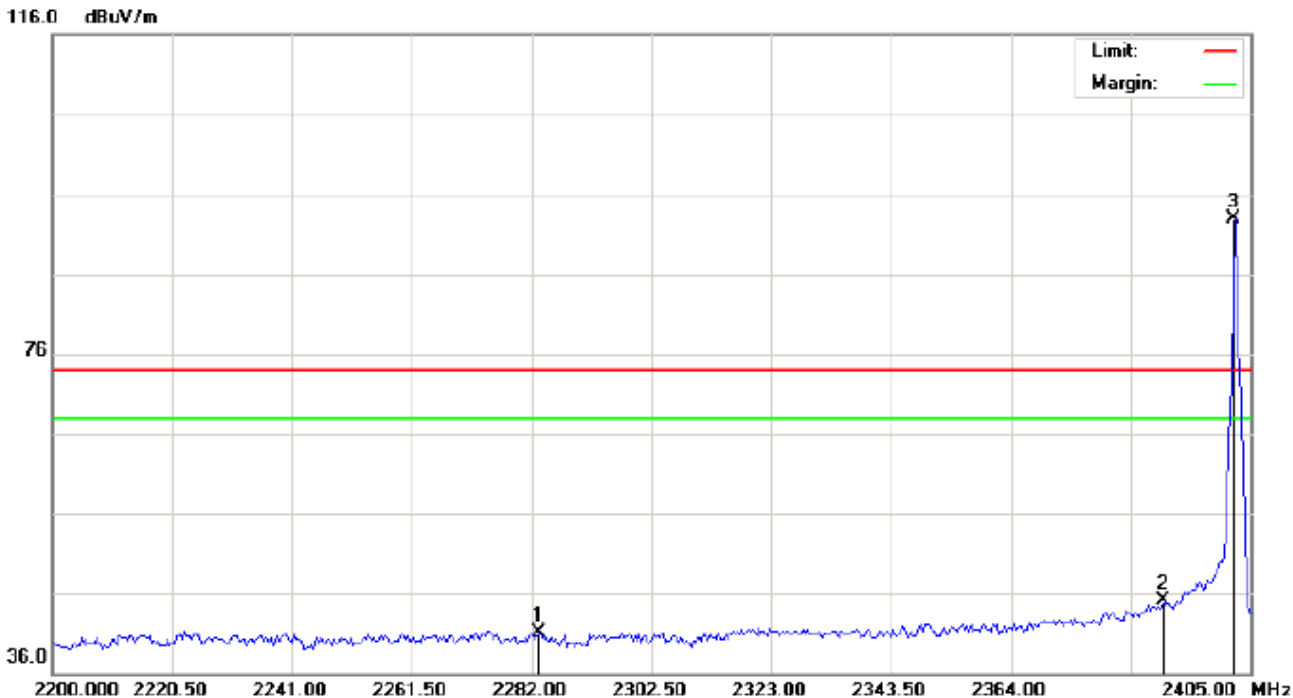

Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %
 EUT: Swarovski BT Earplug Distance:
 M/N: SW0039
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2283.366	30.83	10.19	41.02	74.00	-32.98	peak			
2		2390.000	34.71	10.31	45.02	74.00	-28.98	peak			
3	*	2402.000	82.59	10.32	92.91	74.00	18.91	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

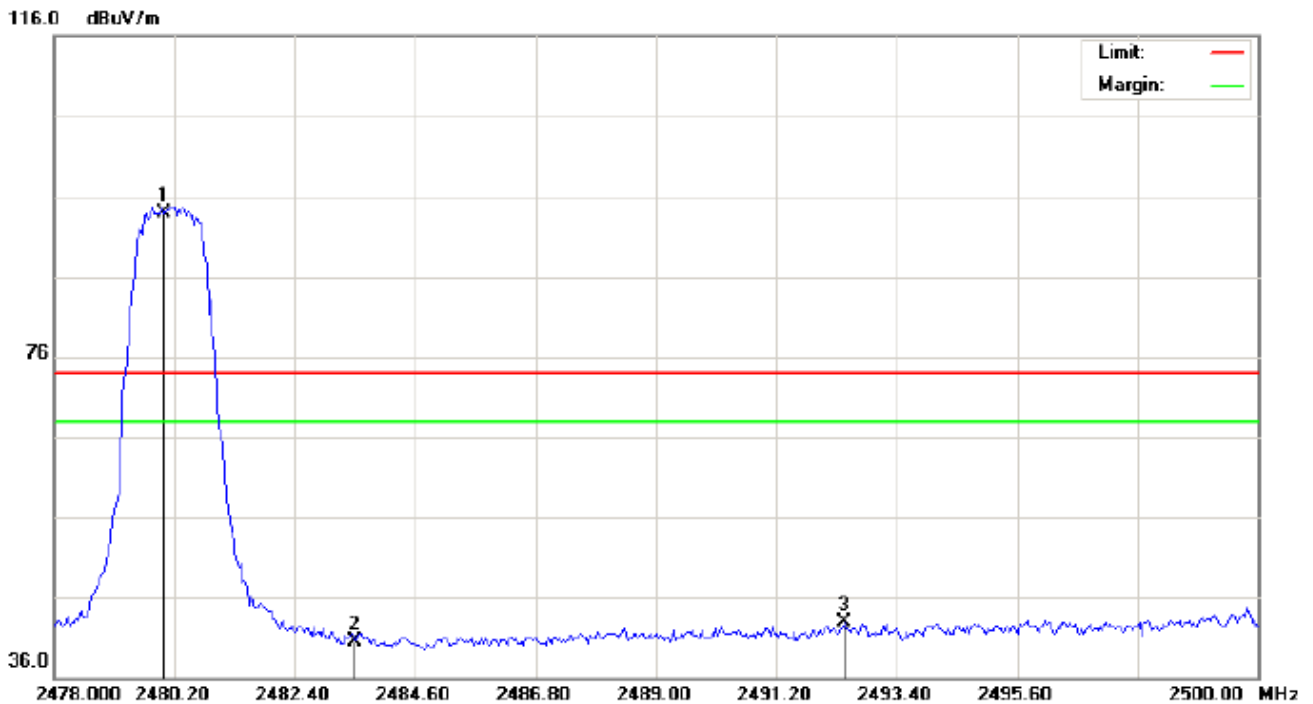


Site: site #1
Limit: FCC Class B 3M Radiation above 1GHz(PK)
EUT: Swarovski BT Earplug
M/N: SW0039
Mode: High Channel TX
Note:

Polarization: *Horizontal*
Power:
Distance:

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.44	10.41	93.85	74.00	19.85	peak			
2		2483.500	30.19	10.41	40.60	74.00	-33.40	peak			
3		2492.447	32.49	10.42	42.91	74.00	-31.09	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

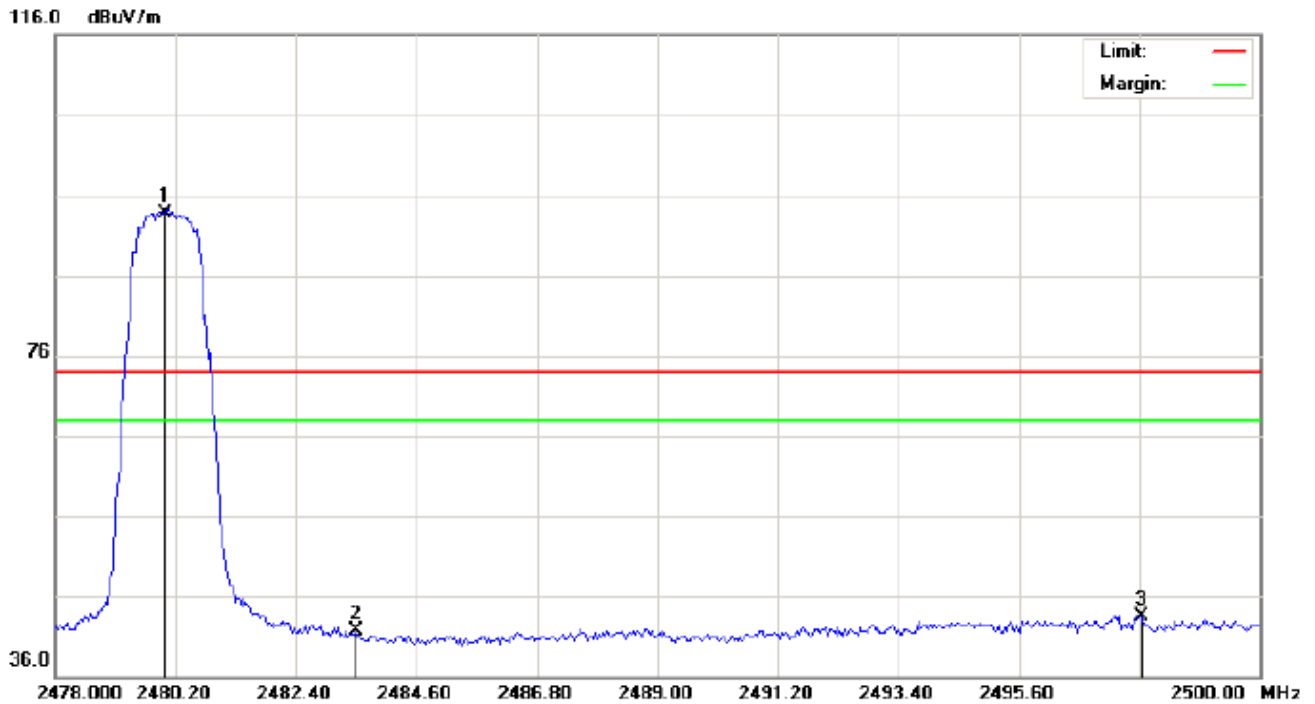

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Swarovski BT Earplug	Distance:	
M/N: SW0039		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.32	10.41	93.73	74.00	19.73	peak			
2		2483.500	31.26	10.41	41.67	74.00	-32.33	peak			
3		2497.837	33.07	10.43	43.50	74.00	-30.50	peak			

RESULT: PASS


Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

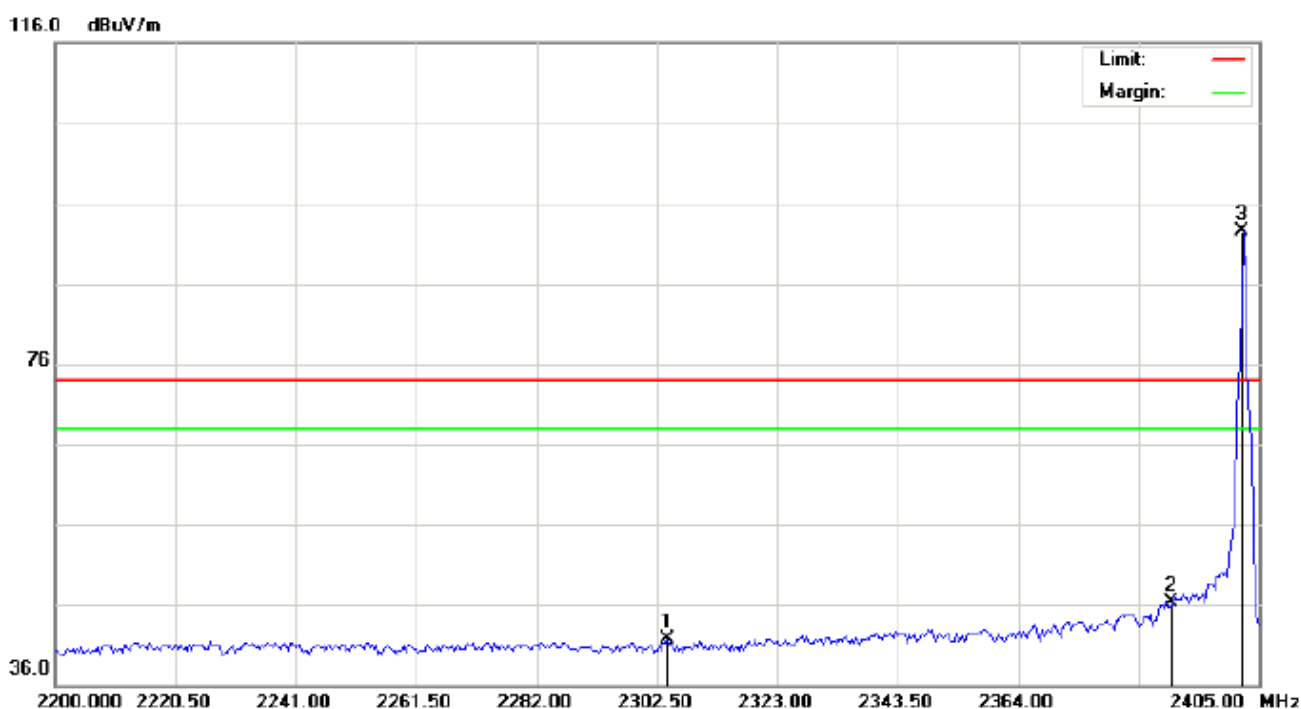

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Swarovski BT Earplug	Distance:	
M/N: SW0039		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2304.208	31.44	10.21	41.65	74.00	-32.35	peak			
2		2390.000	36.00	10.31	46.31	74.00	-27.69	peak			
3	*	2402.000	82.26	10.32	92.58	74.00	18.58	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

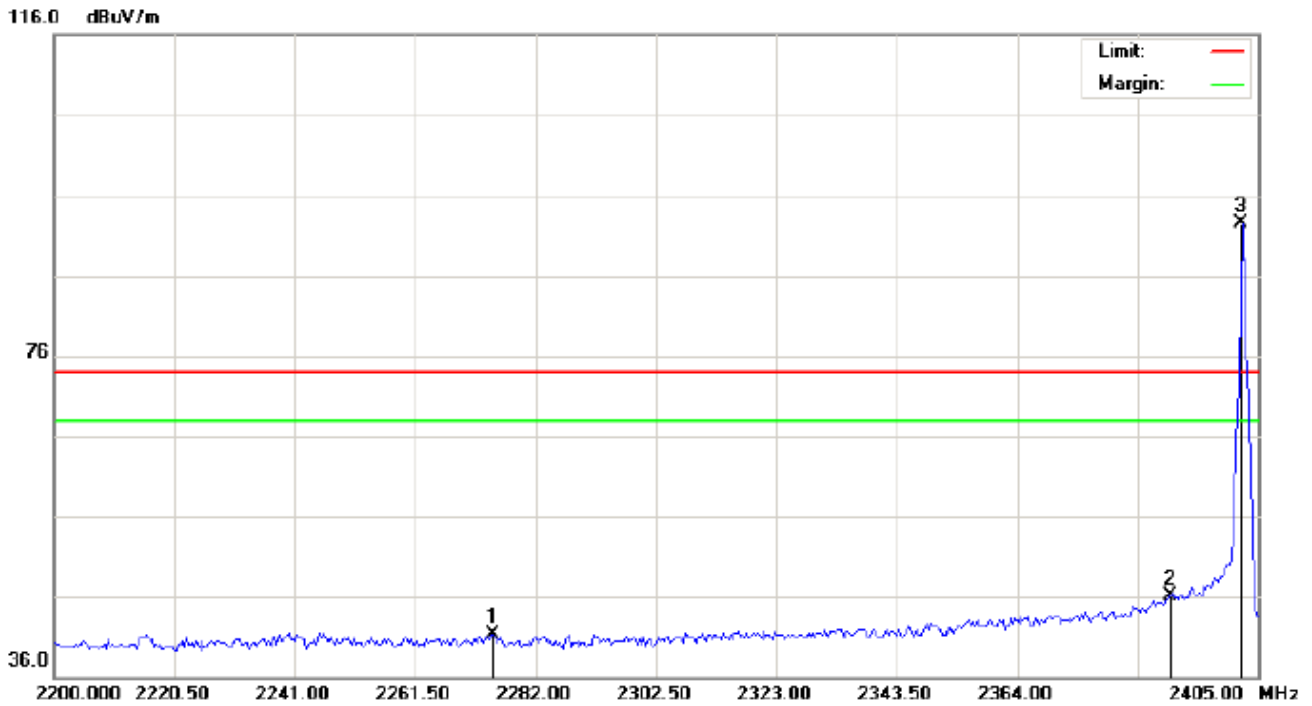

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Swarovski BT Earplug	Distance:	
M/N: SW0039		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2274.825	31.14	10.18	41.32	74.00	-32.68	peak			
2		2390.000	35.71	10.31	46.02	74.00	-27.98	peak			
3	*	2402.000	82.09	10.32	92.41	74.00	18.41	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

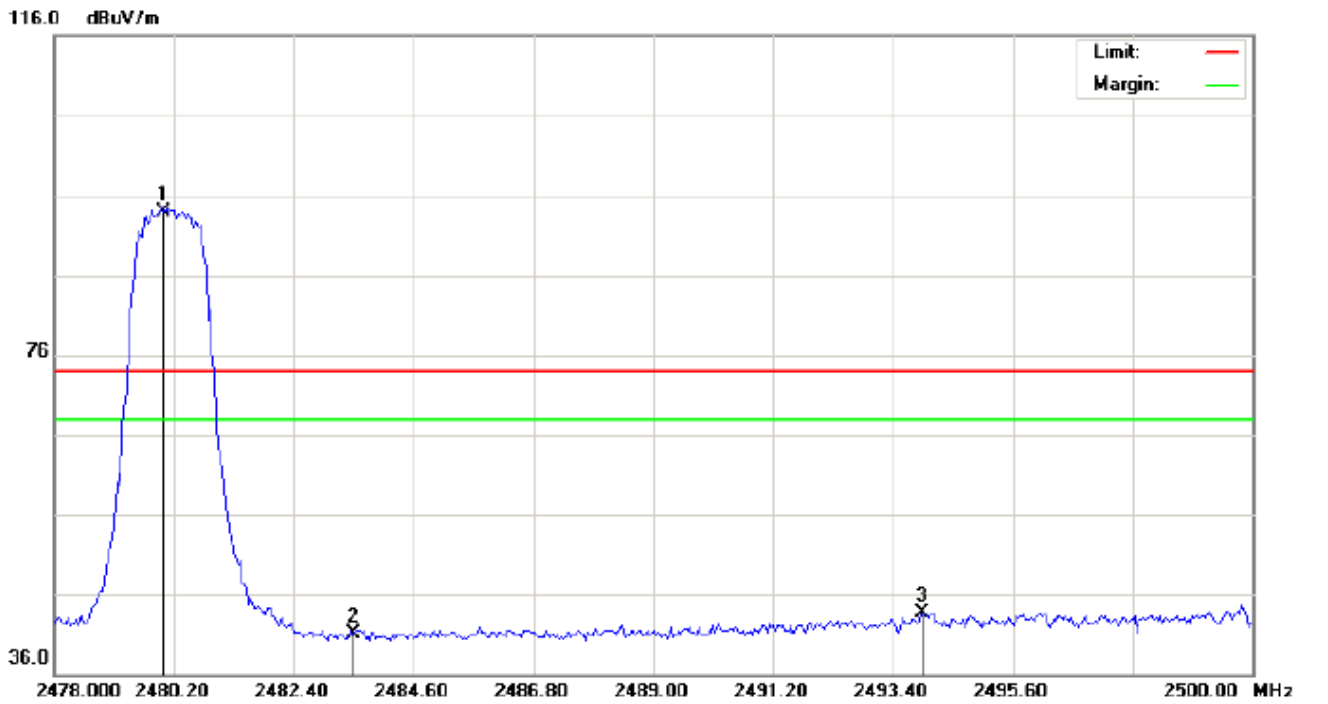


Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)
 EUT: Swarovski BT Earplug
 M/N: SW0039
 Mode: High Channel TX
 Note:

Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree		
									cm	degree		
1	*	2480.000	83.52	10.41	93.93	74.00	19.93	peak				
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak				
3		2493.950	33.34	10.42	43.76	74.00	-30.24	peak				

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

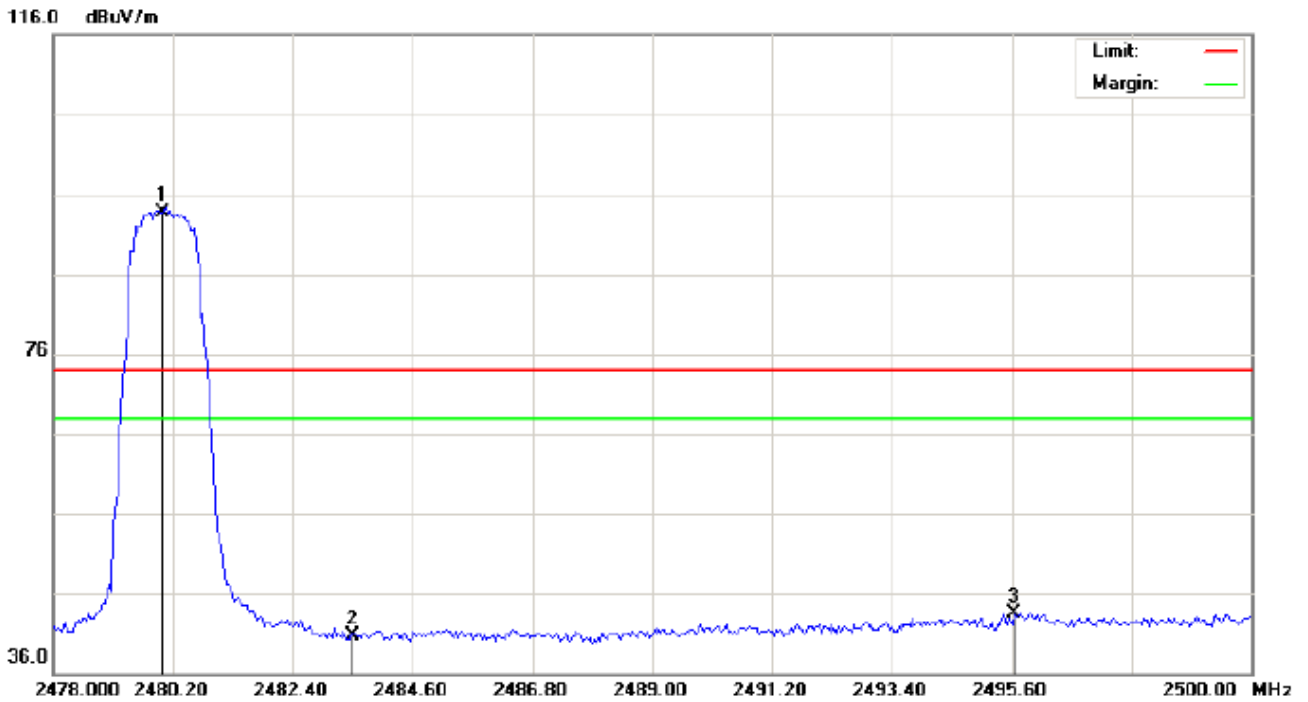

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Swarovski BT Earplug	Distance:	
M/N: SW0039		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2480.000	83.38	10.41	93.79	74.00	19.79	peak			
2		2483.500	30.26	10.41	40.67	74.00	-33.33	peak			
3		2495.637	33.07	10.43	43.50	74.00	-30.50	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

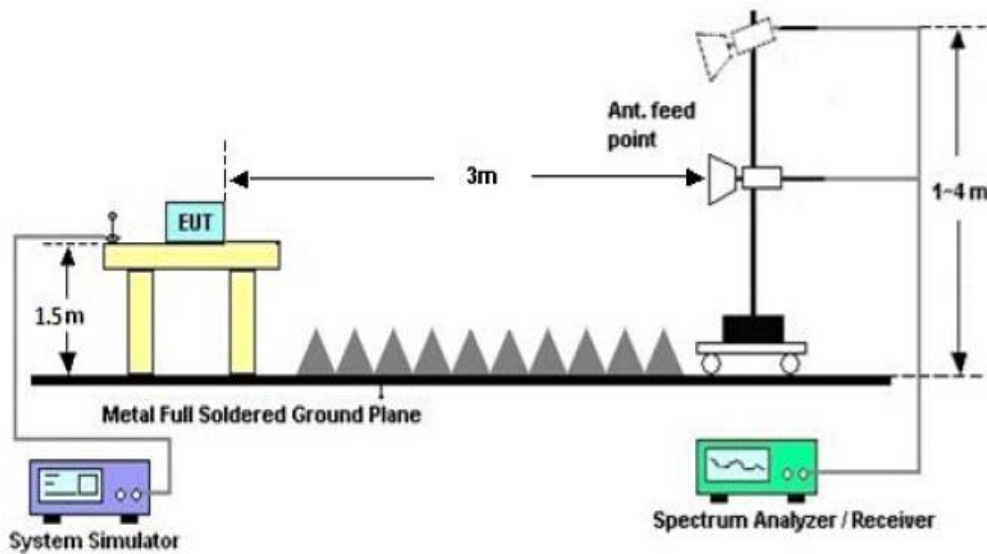


11.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1Mbps LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.918	1.084	PASS
	Middle Channel	0.935	1.105	PASS
	High Channel	0.938	1.102	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

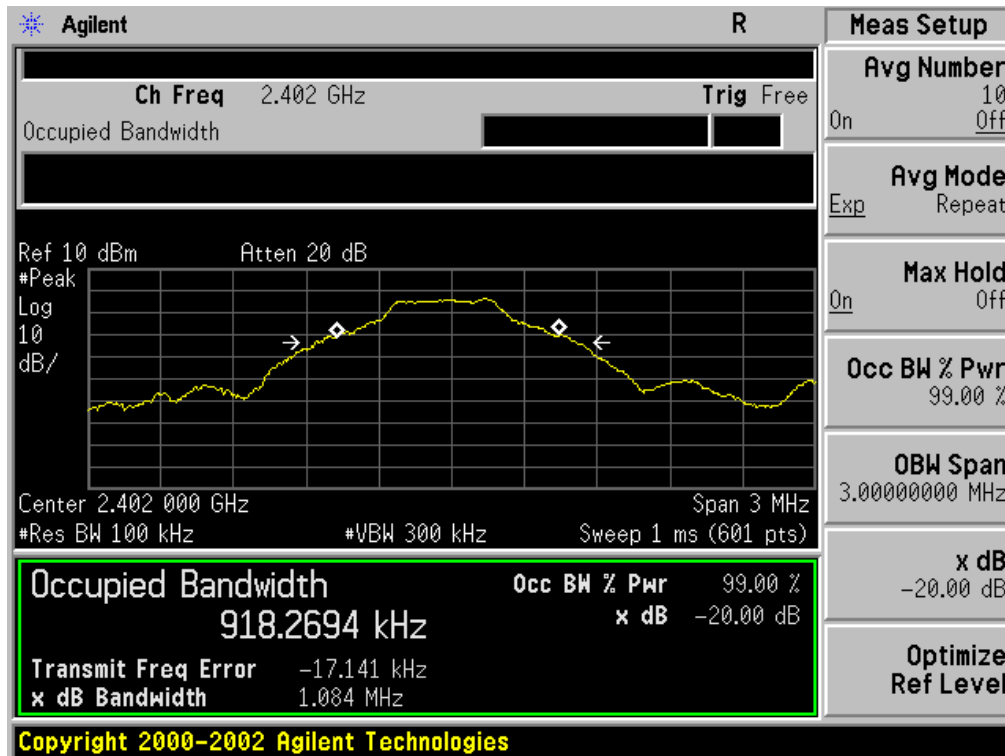

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

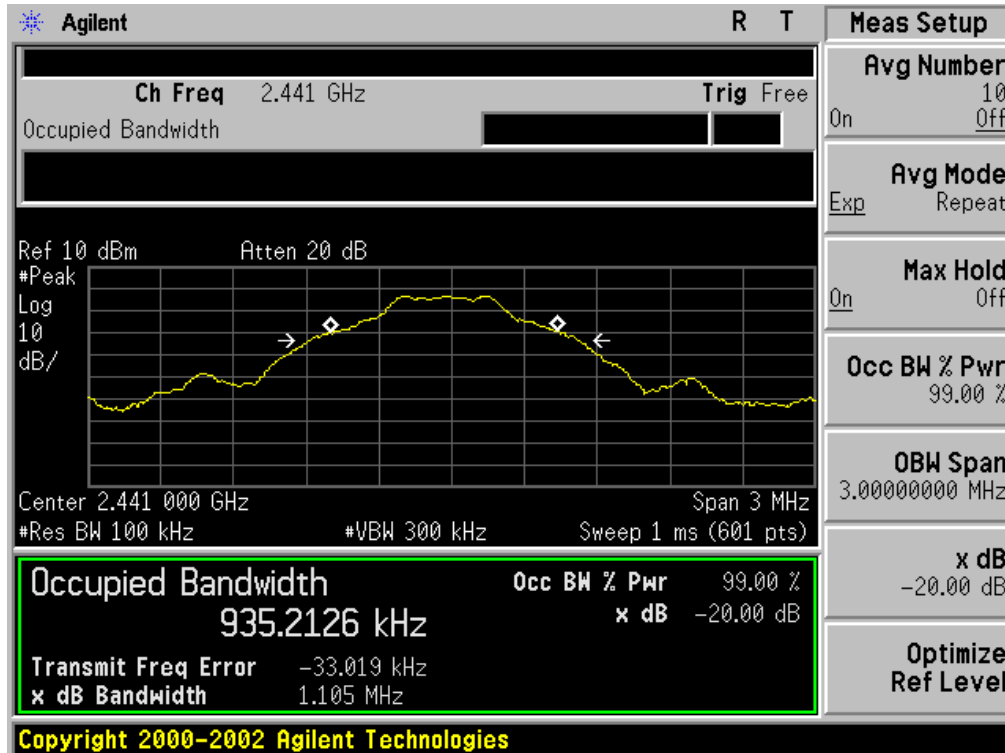


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

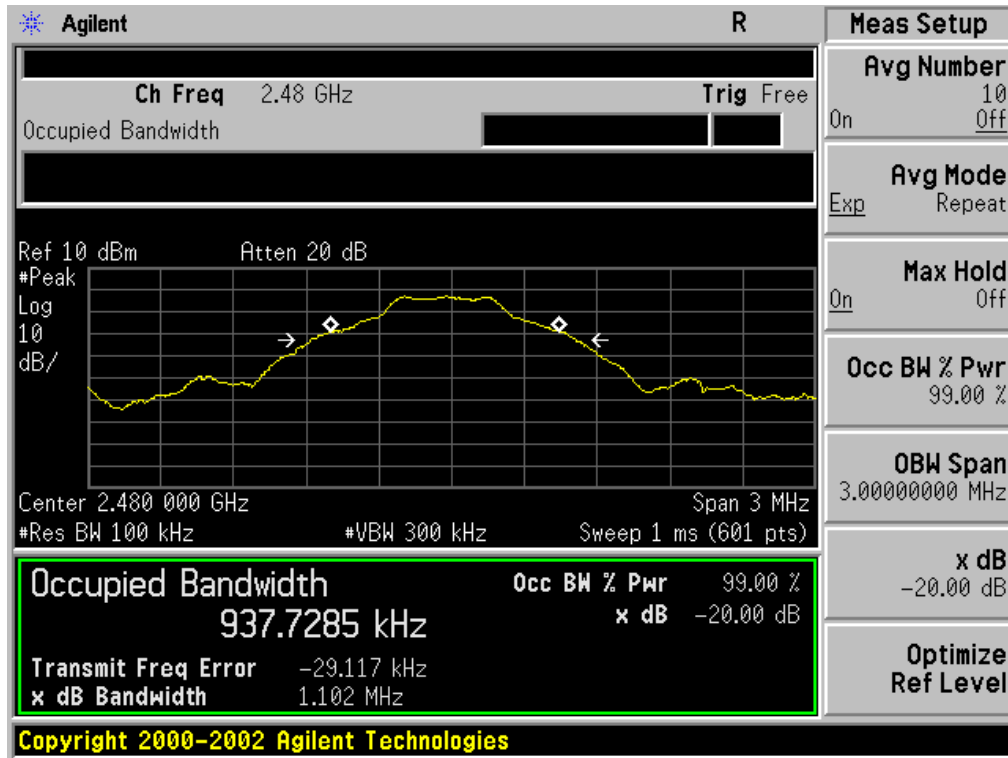


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.210	1.354	PASS
	Middle Channel	1.229	1.382	PASS
	High Channel	1.269	1.368	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

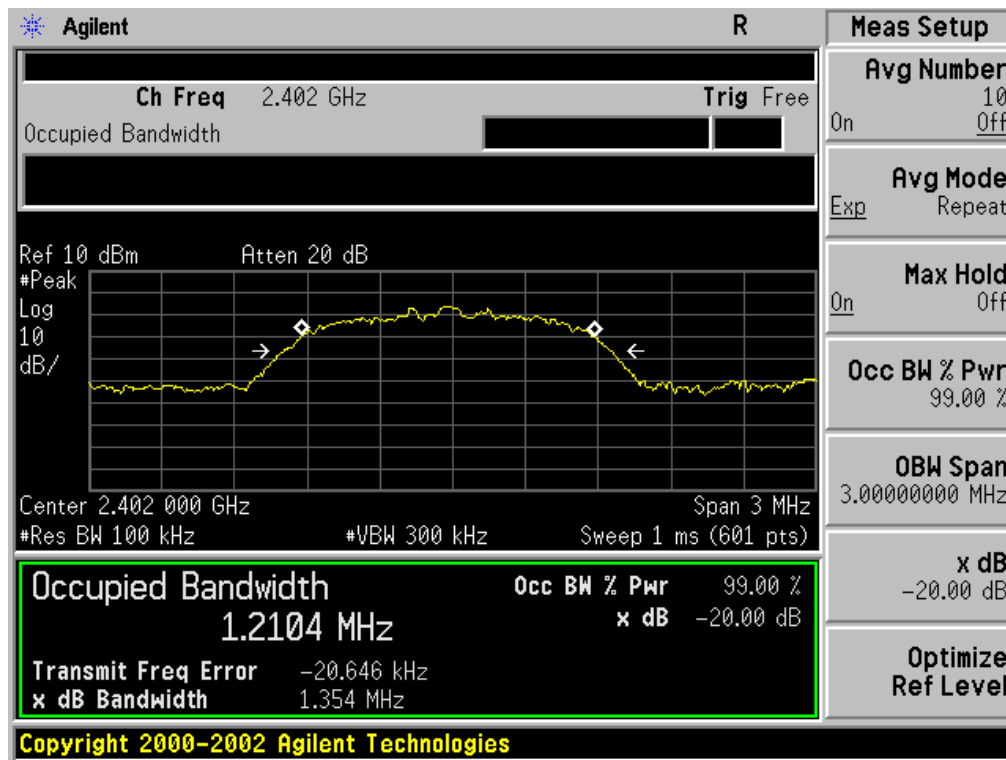

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

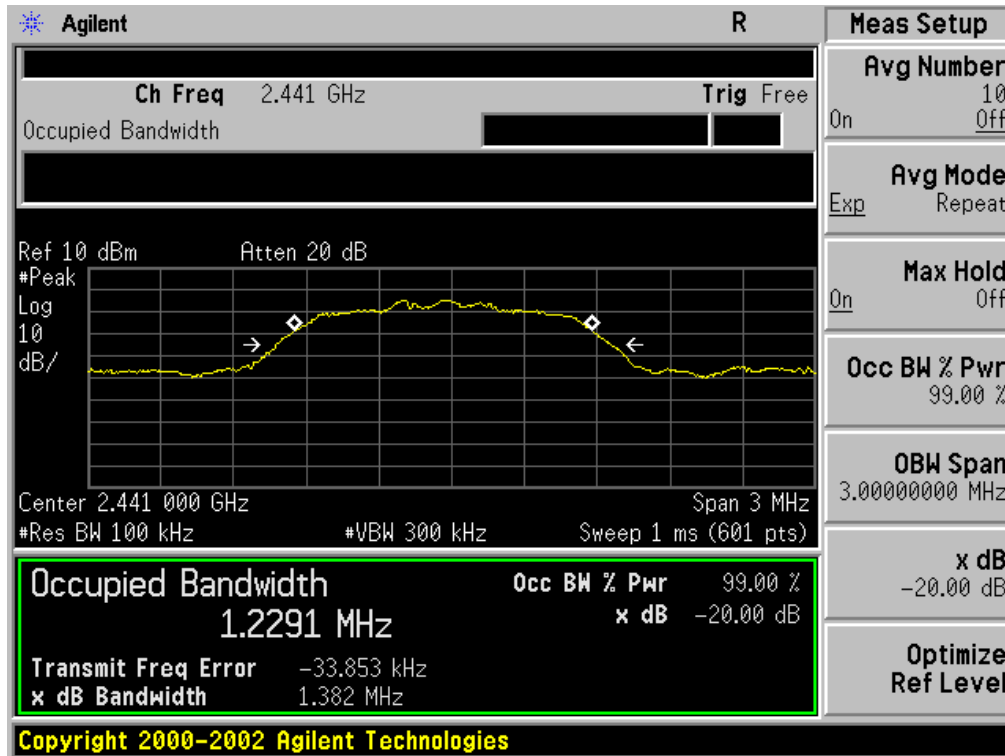


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

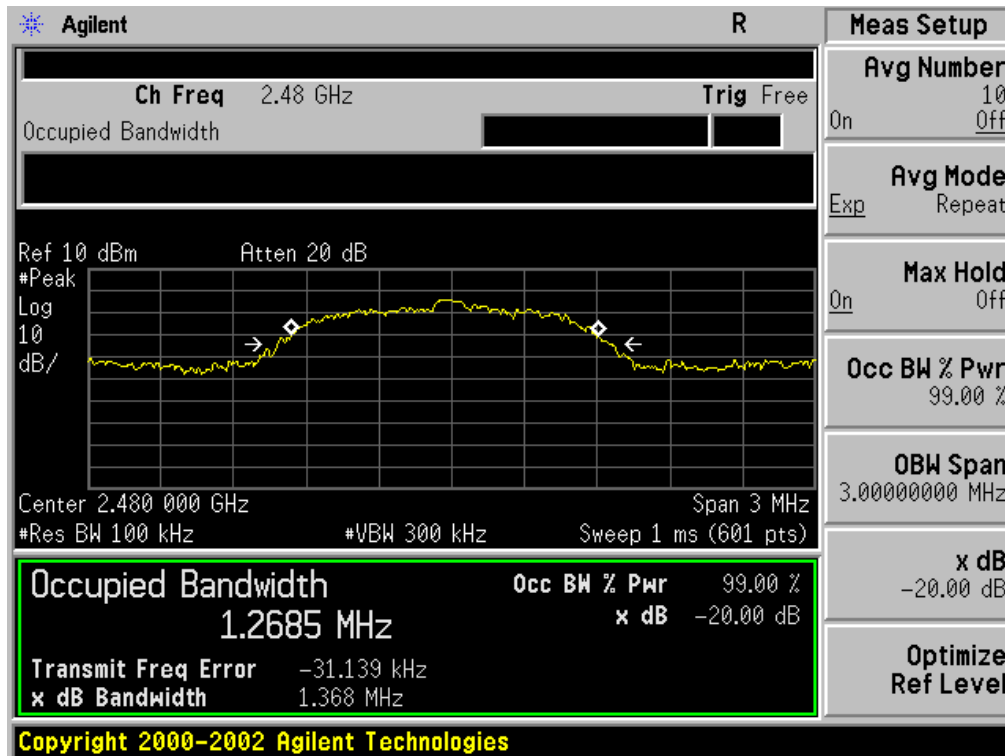


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.217	1.369	PASS
	Middle Channel	1.233	1.377	PASS
	High Channel	1.266	1.391	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

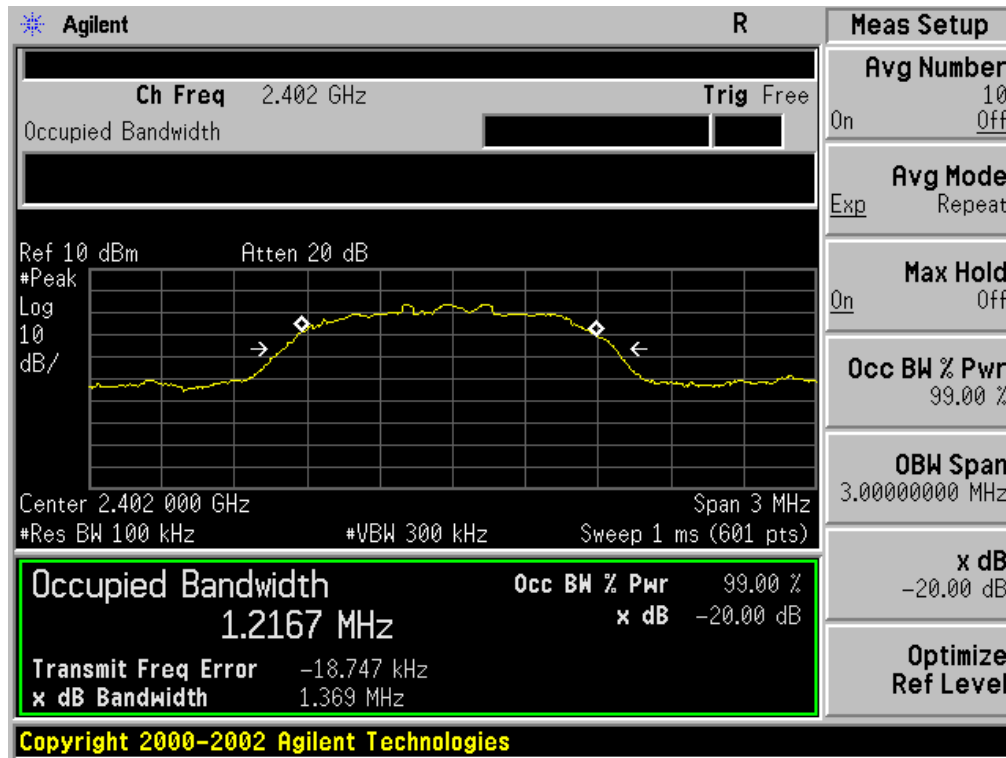

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

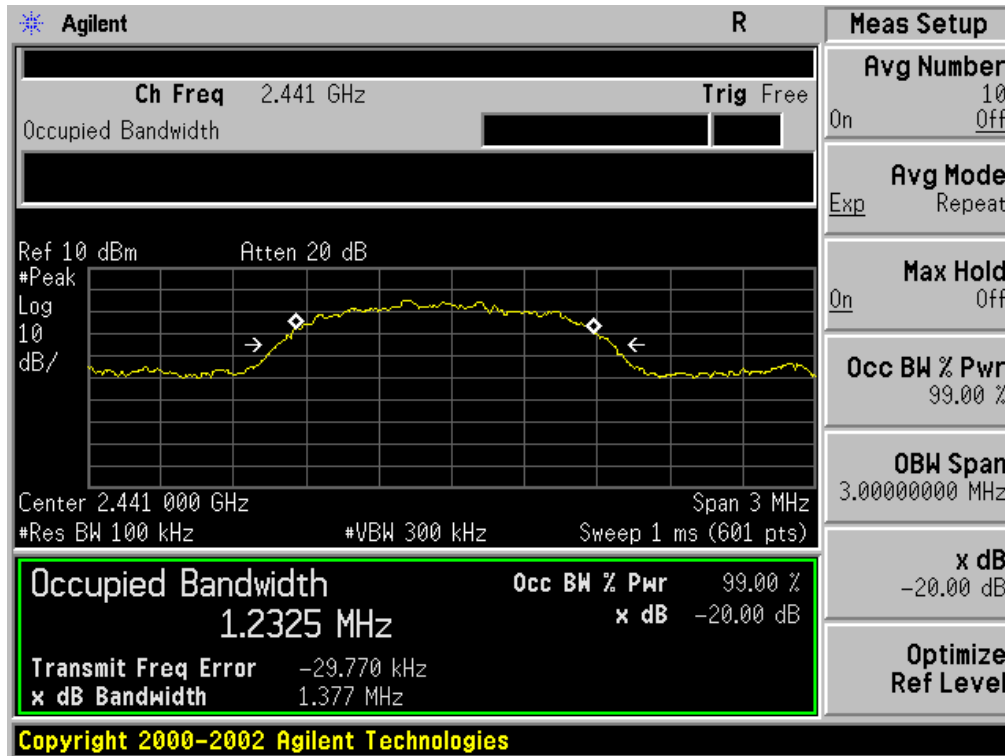


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

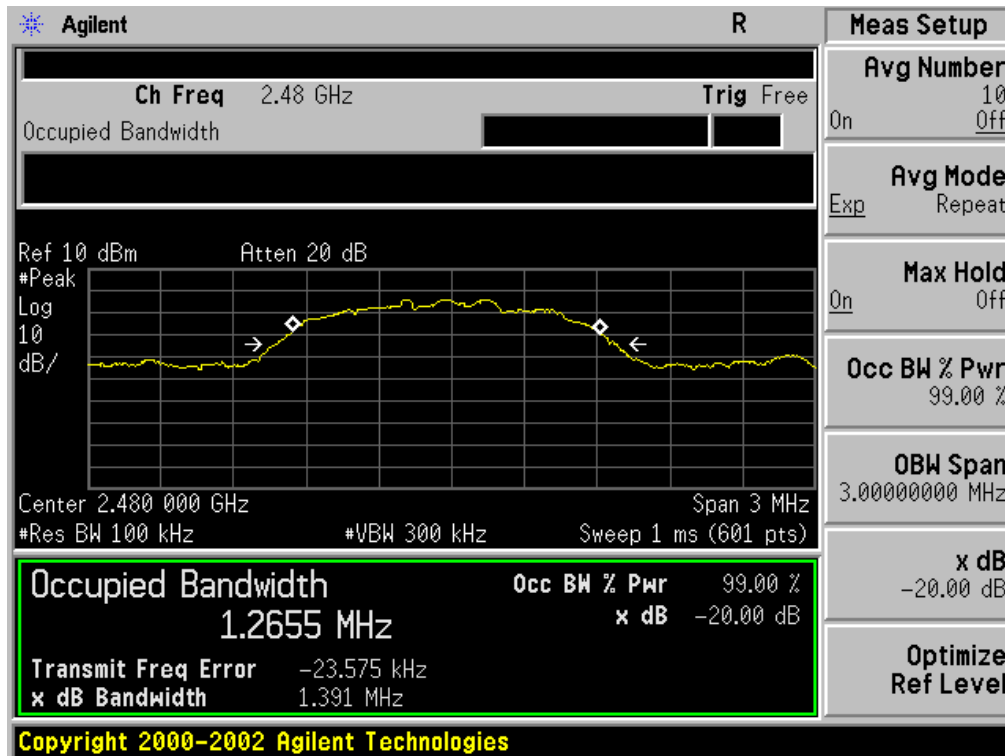


FOR BLE

BLUETOOTH 1Mbps LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.043	1.204	PASS
	Middle Channel	1.045	1.208	PASS
	High Channel	1.049	1.212	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

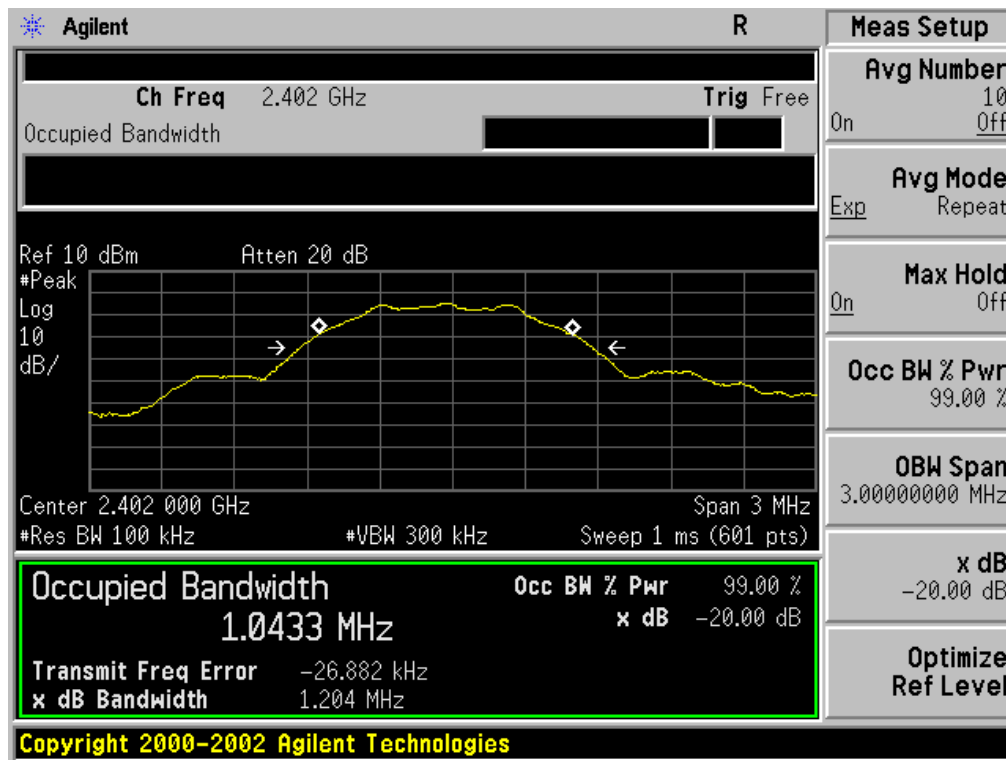

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

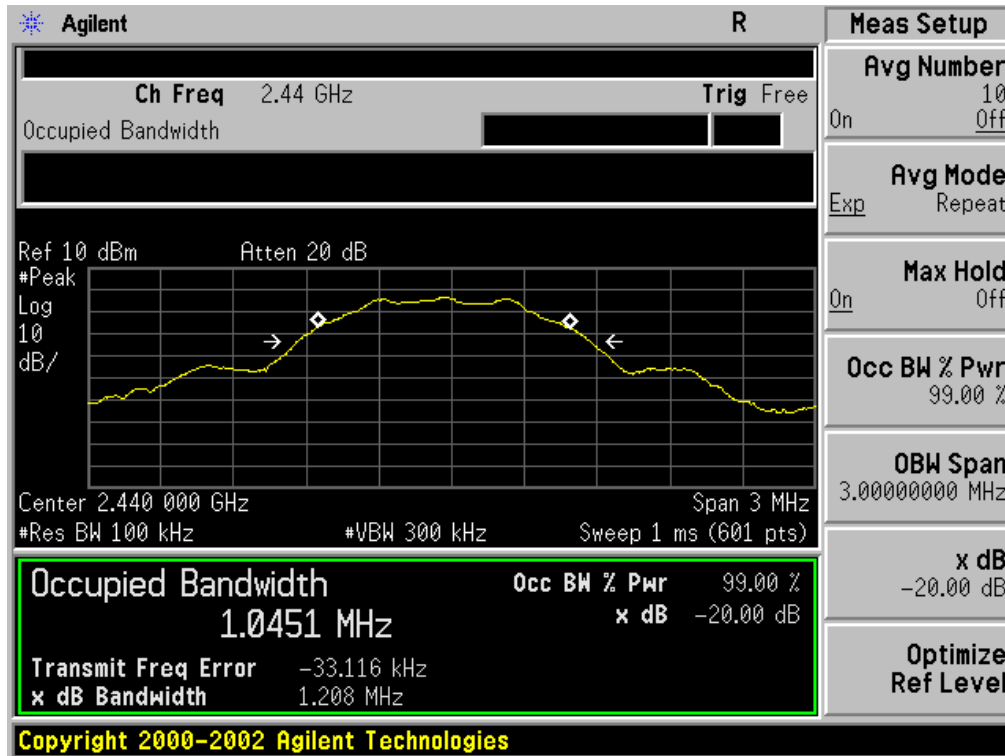

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

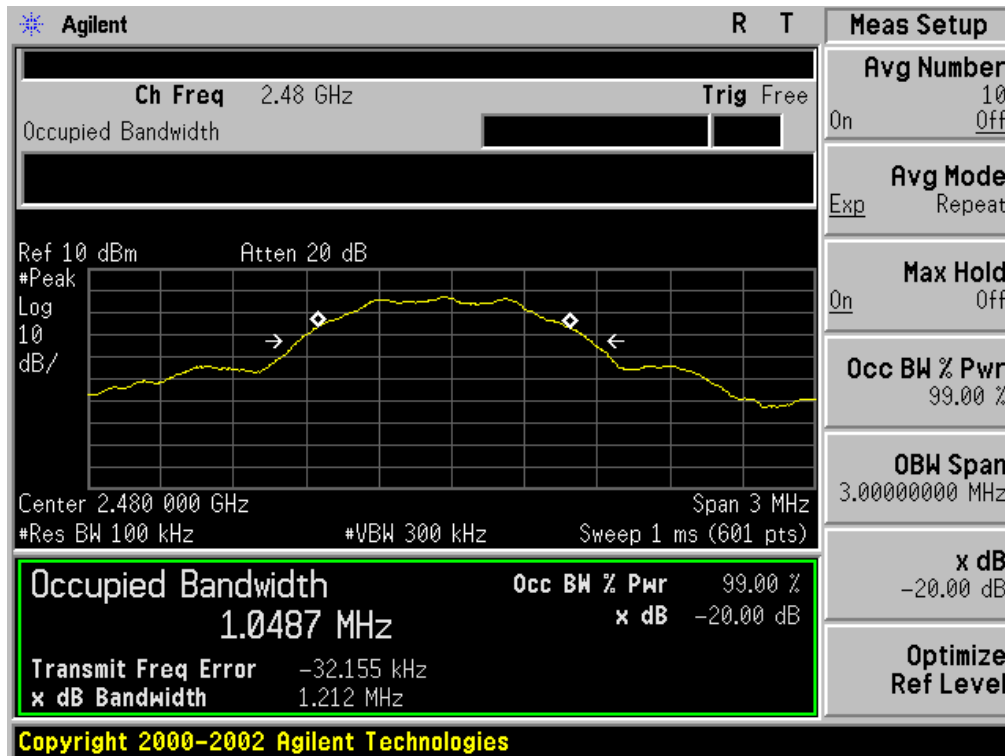

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

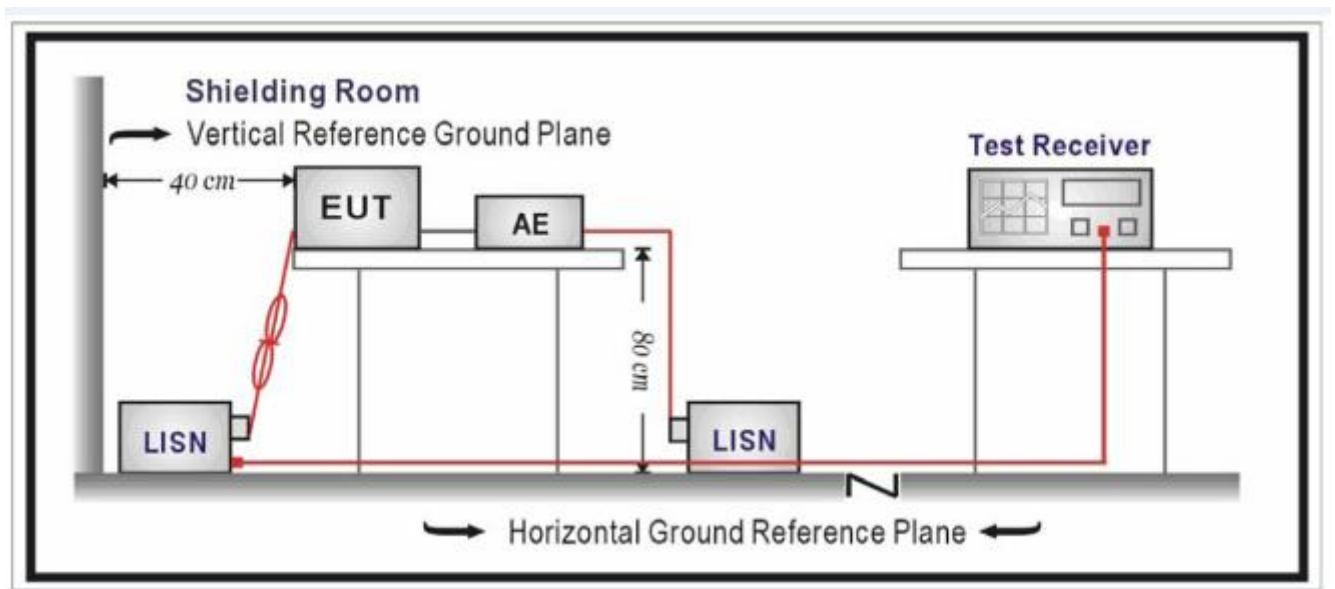

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

FOR BR/EDR


Line Conducted Emission Test Line 1-L

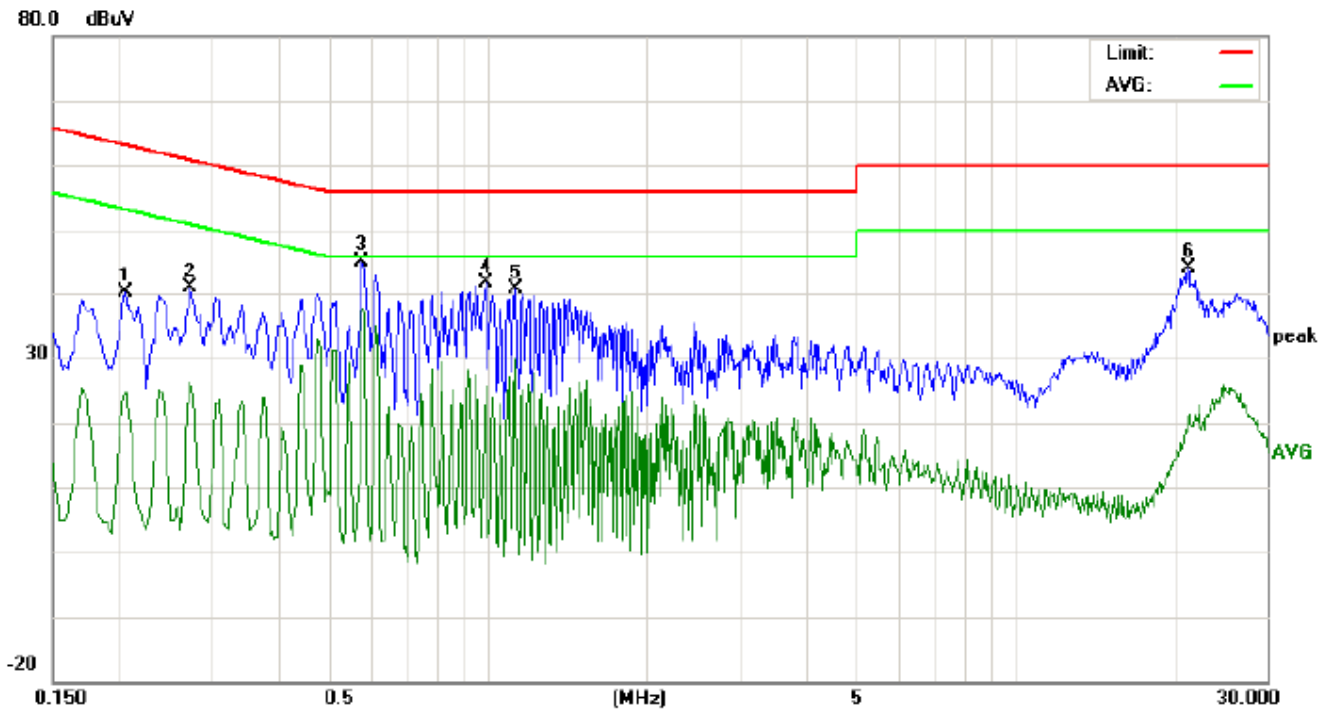

Site: Conduction Phase: **L1** Temperature: 22.5
 Limit: FCC Class B Class B Conduction(QP) Power: Humidity: 50.6 %
 EUT:Swarovski BT Earplug
 M/N:SW0039
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2058	40.07		24.63	0.11	40.18		24.74	63.37	53.37	-23.19	-28.63	P	
2	0.2740	40.66		25.93	0.13	40.79		26.06	60.99	50.99	-20.20	-24.93	P	
3	0.5778	44.91		36.90	0.23	45.14		37.13	56.00	46.00	-10.86	-8.87	P	
4	0.9899	41.38		25.46	0.19	41.57		25.65	56.00	46.00	-14.43	-20.35	P	
5	1.1258	40.47		29.71	0.16	40.63		29.87	56.00	46.00	-15.37	-16.13	P	
6	21.3658	43.97		20.23	0.18	44.15		20.41	60.00	50.00	-15.85	-29.59	P	

Line Conducted Emission Test Line 2-N

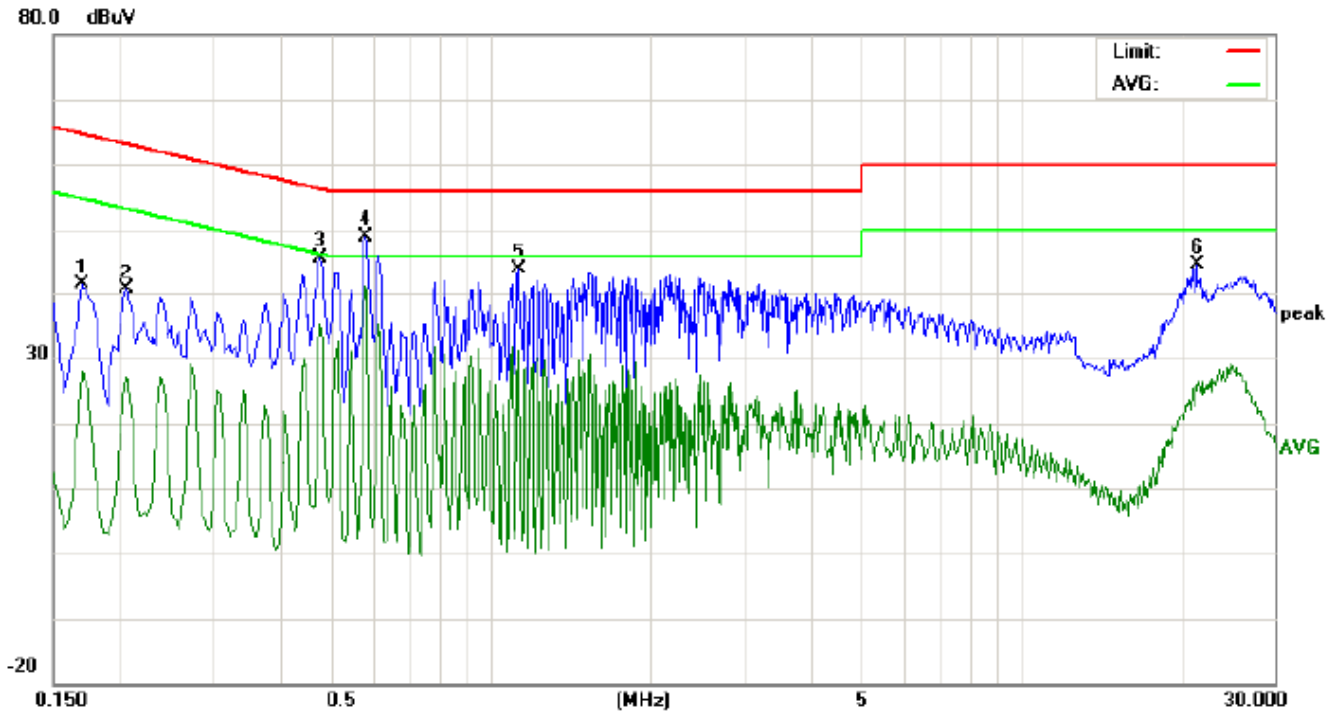


Site: Conduction Phase: **N** Temperature: 22.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 50.6 %
EUT:Swarovski BT Earplug
M/N:SW0039
Mode:BT Link with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	41.22		27.82	0.10	41.32		27.92	64.96	54.96	-23.64	-27.04	P	
2	0.2058	40.56		26.99	0.11	40.67		27.10	63.37	53.37	-22.70	-26.27	P	
3	0.4778	45.36		35.01	0.18	45.54		35.19	56.38	46.38	-10.84	-11.19	P	
4	0.5818	48.53		40.91	0.23	48.76		41.14	56.00	46.00	-7.24	-4.86	P	
5	1.1258	43.74		31.02	0.16	43.90		31.18	56.00	46.00	-12.10	-14.82	P	
6	21.3738	44.55		25.68	0.18	44.73		25.86	60.00	50.00	-15.27	-24.14	P	

FOR BLE


Line Conducted Emission Test Line 1-L

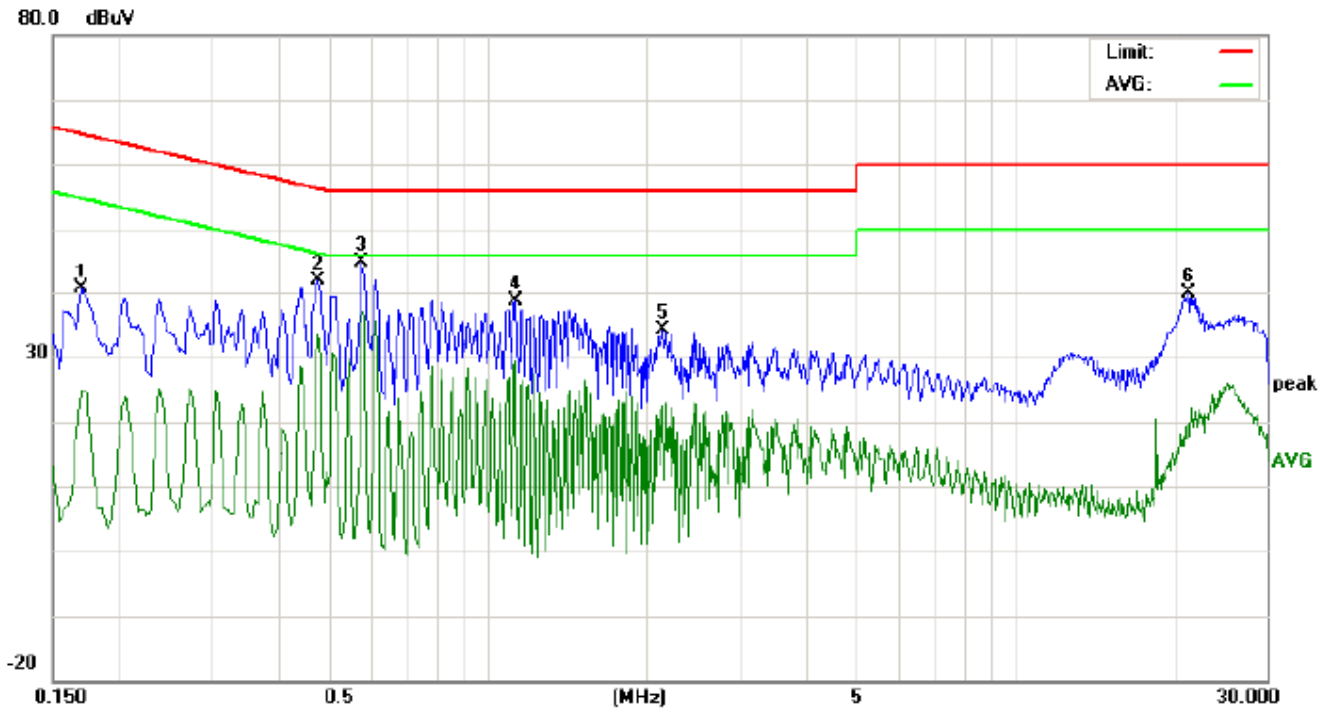

Site: Conduction Phase: *L1* Temperature: 22.5
Limit: FCC Class B Class B Conduction(QP) Power: Humidity: 50.6 %
EUT:Swarovski BT Earplug
M/N:SW0039
Mode: BT Link with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP		
1	0.1700	40.45		24.88	0.10	40.55		24.98	64.96	54.96	-24.41	-29.98	P	
2	0.4780	41.76		33.18	0.18	41.94		33.36	56.37	46.37	-14.43	-13.01	P	
3	0.5780	44.60		35.92	0.23	44.83		36.15	56.00	46.00	-11.17	-9.85	P	
4	1.1300	38.37		24.94	0.17	38.54		25.11	56.00	46.00	-17.46	-20.89	P	
5	2.1460	34.02		22.13	0.18	34.20		22.31	56.00	46.00	-21.80	-23.69	P	
6	21.2979	39.60		19.41	0.18	39.78		19.59	60.00	50.00	-20.22	-30.41	P	

Line Conducted Emission Test Line 2-N

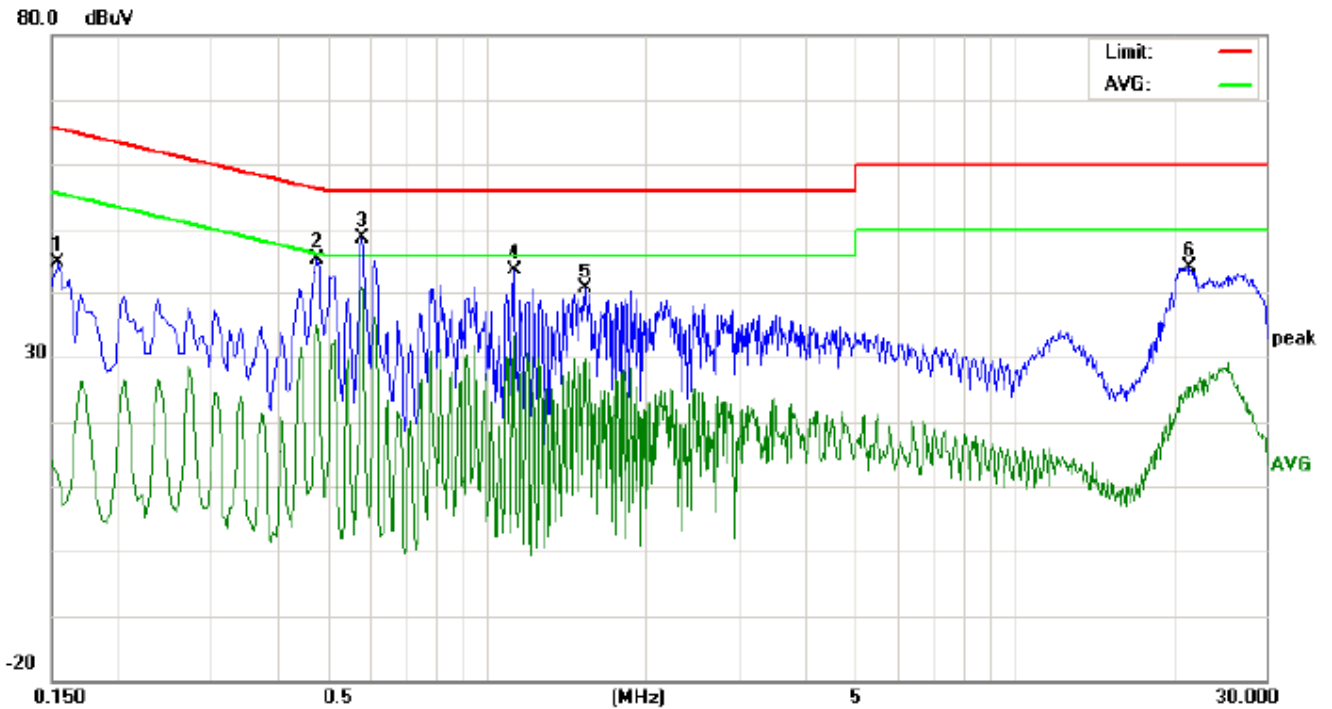


Site: Conduction Phase: **N** Temperature: 22.5
 Limit: FCC Class B Class B Conduction(QP) Power: Humidity: 50.6 %
 EUT:Swarovski BT Earplug
 M/N:SW0039
 Mode: BT Link with charging
 Note:



No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	44.84		11.38	0.10	44.94		11.48	65.78	55.78	-20.84	-44.30	P	
2	0.4779	45.30		34.79	0.18	45.48		34.97	56.38	46.38	-10.90	-11.41	P	
3	0.5819	48.29		40.60	0.23	48.52		40.83	56.00	46.00	-7.48	-5.17	P	
4	1.1259	43.41		33.06	0.17	43.58		33.23	56.00	46.00	-12.42	-12.77	P	
5	1.5380	40.42		29.32	0.21	40.63		29.53	56.00	46.00	-15.37	-16.47	P	
6	21.4499	43.95		25.14	0.19	44.14		25.33	60.00	50.00	-15.86	-24.67	P	


APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP

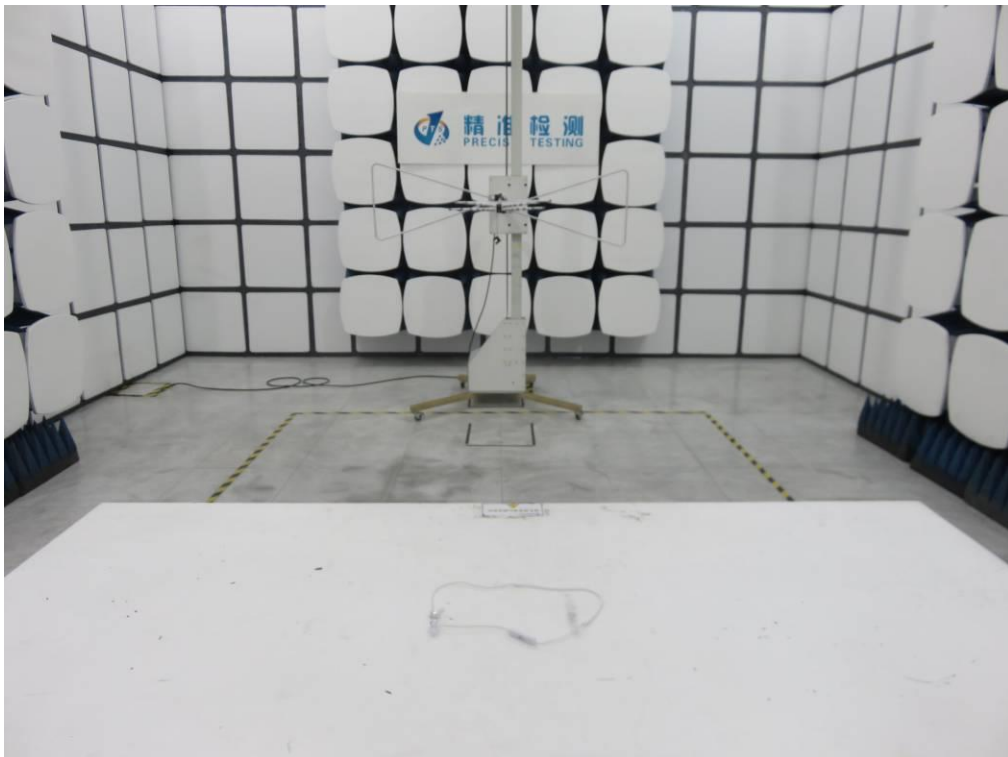

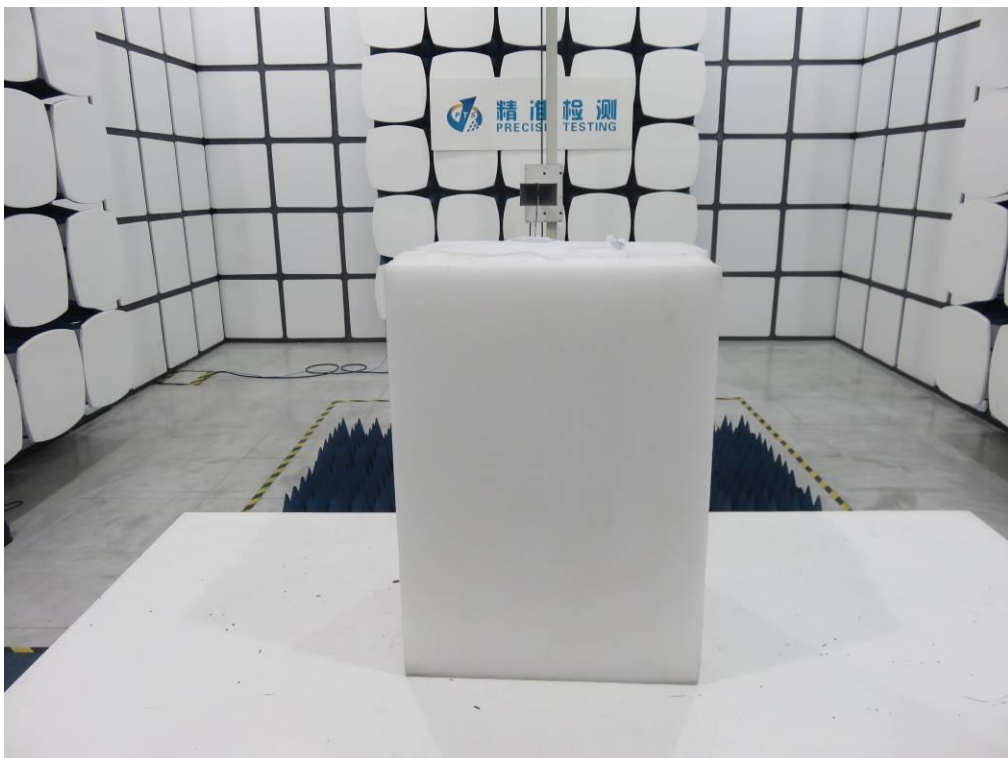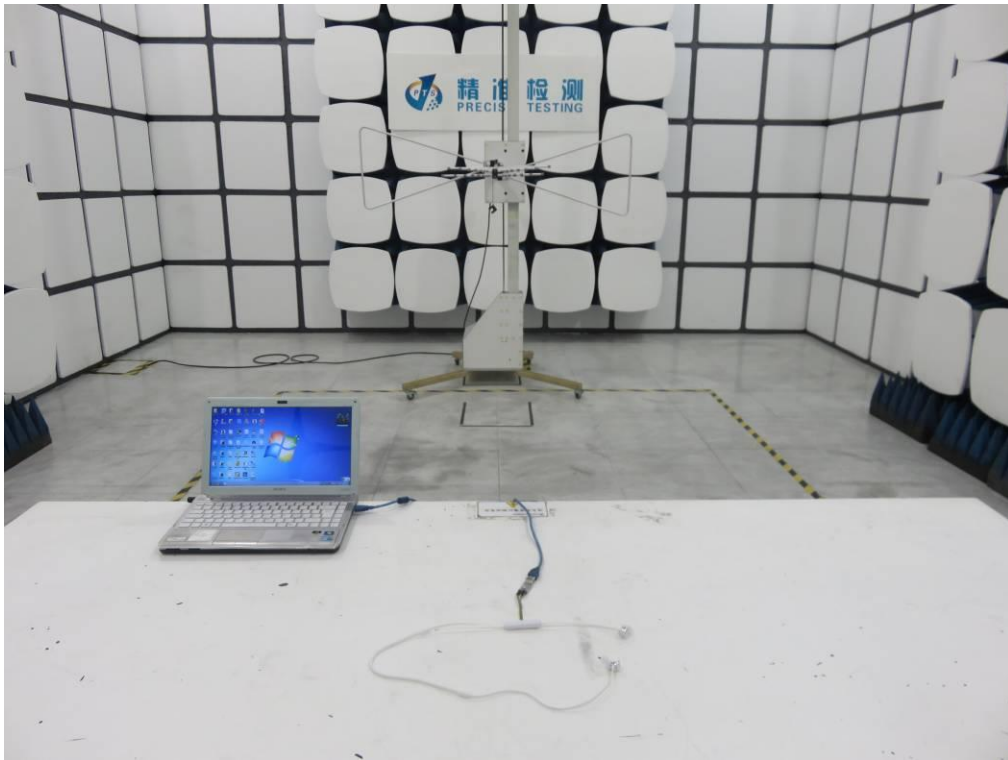


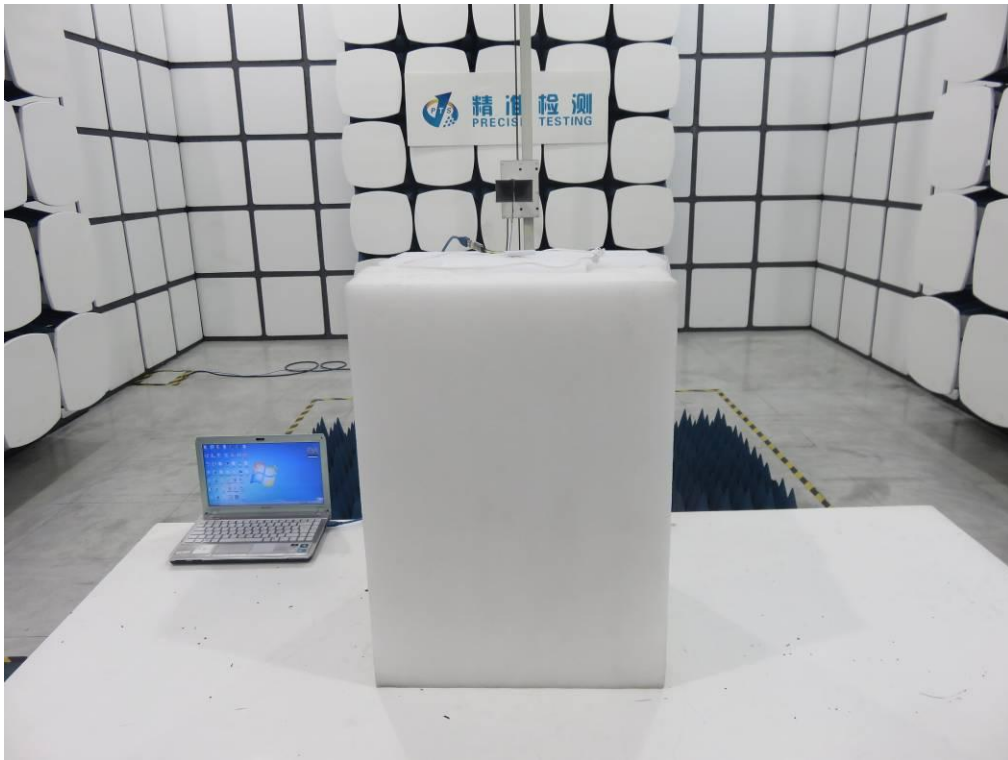

APPENDIX B: PHOTOGRAPHS OF EUT
TOP VIEW OF EUT

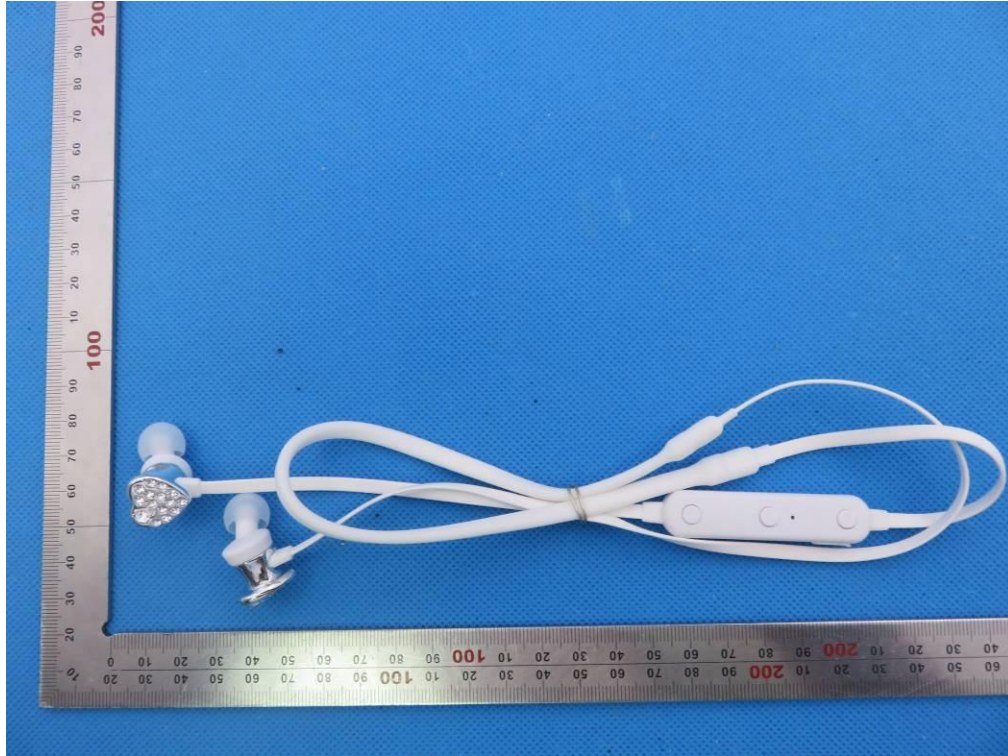


BOTTOM VIEW OF EUT

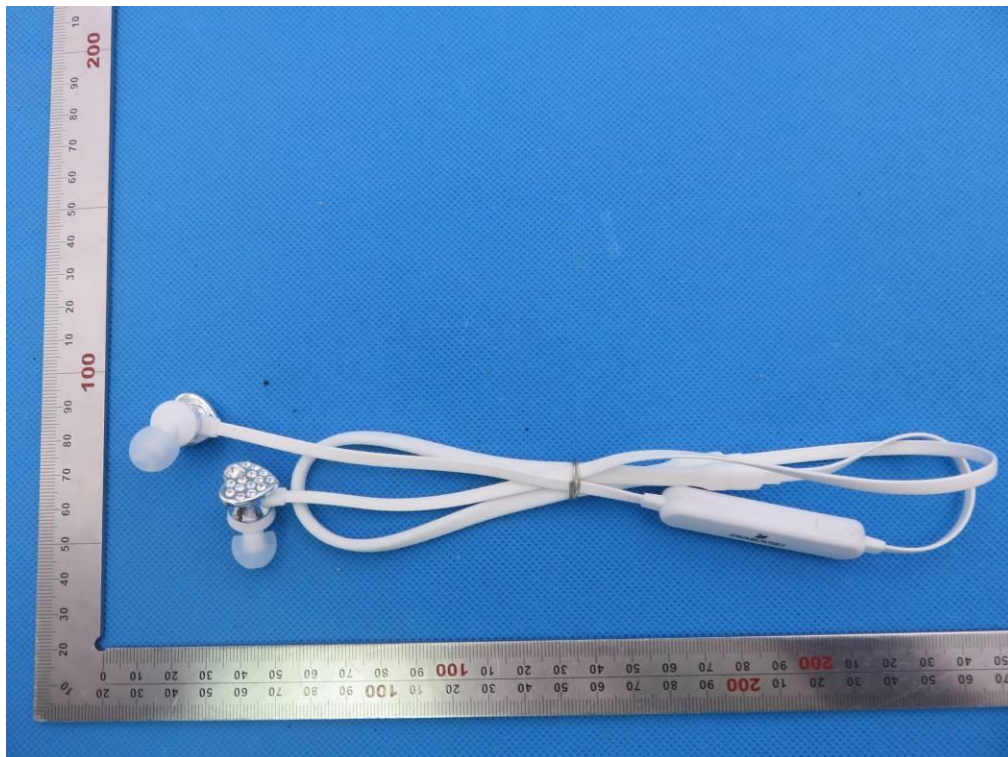

FRONT VIEW OF EUT




BACK VIEW OF EUT

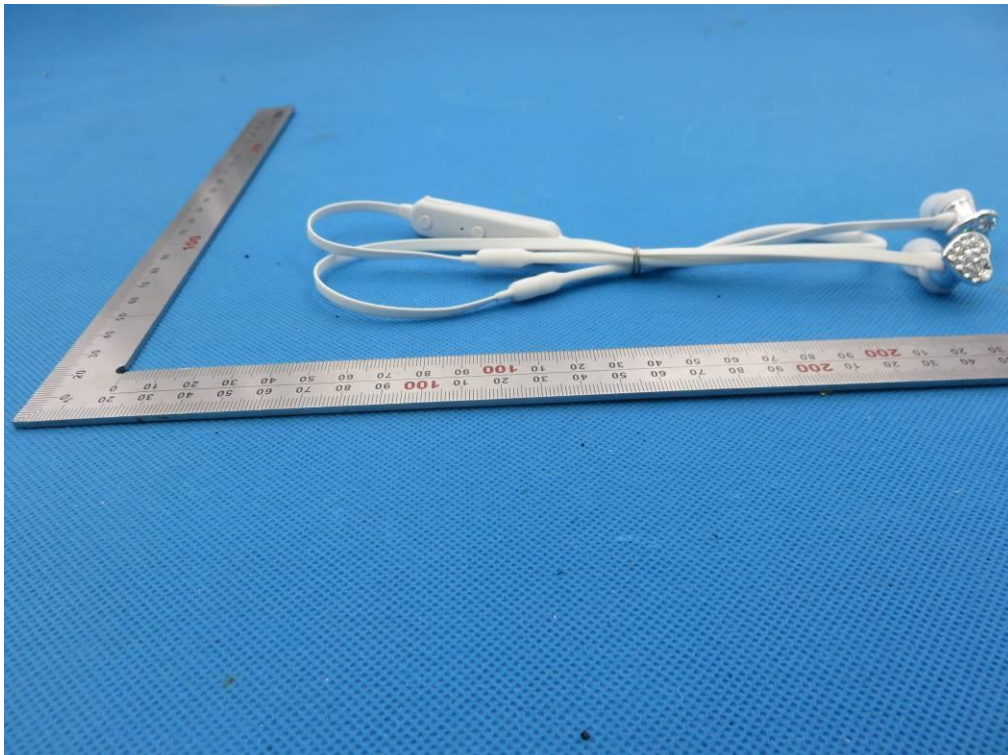

LEFT VIEW OF EUT




RIGHT VIEW OF EUT

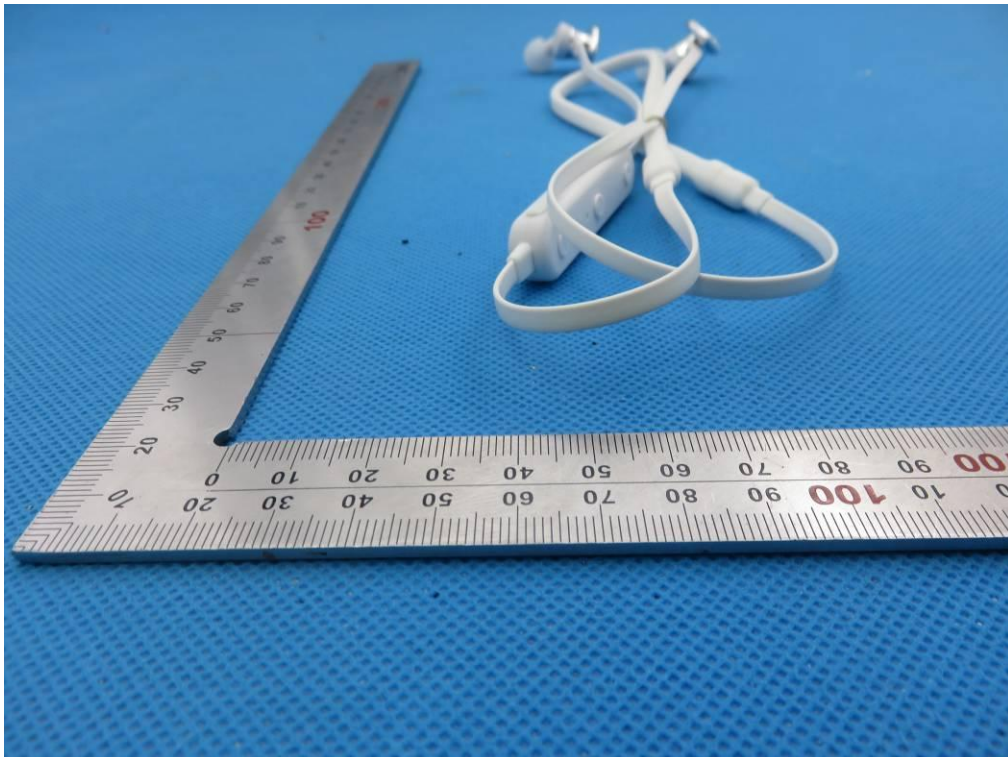


VIEW OF EUT (PORT)




OPEN VIEW OF EUT

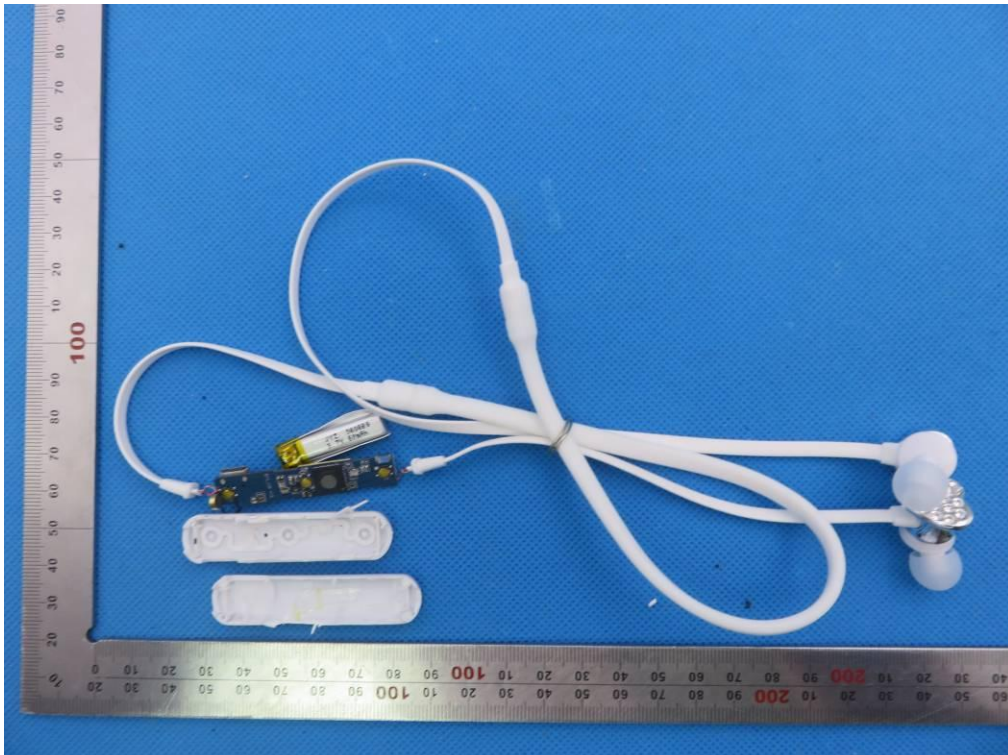


INTERNAL VIEW OF EUT-1

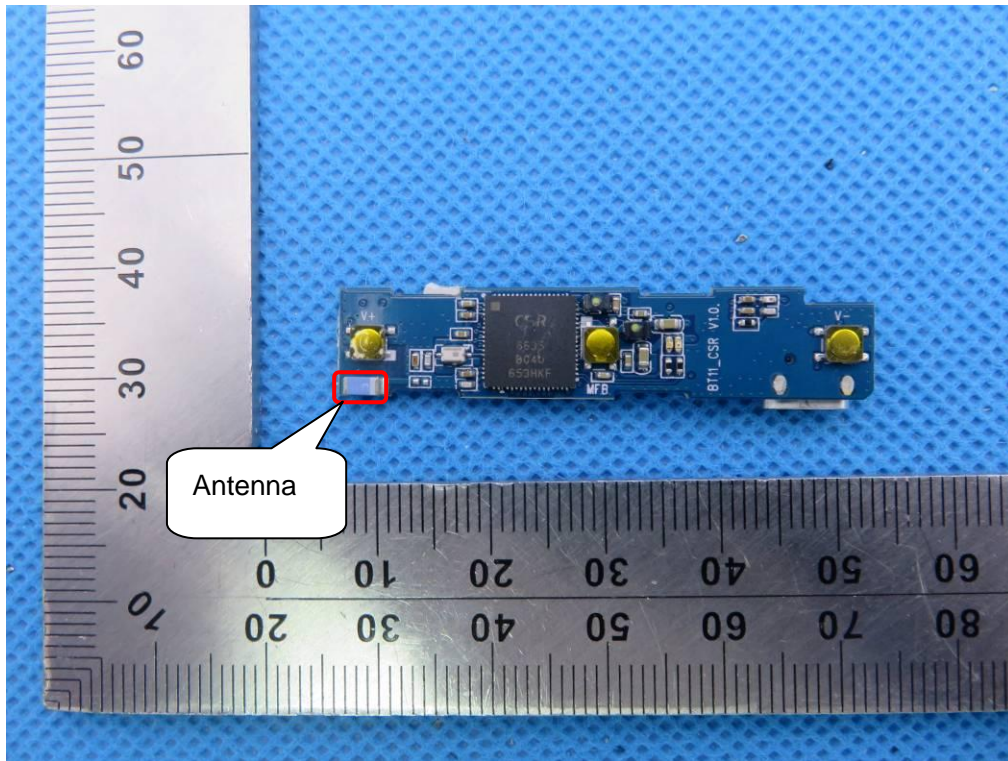

INTERNAL VIEW OF EUT-2

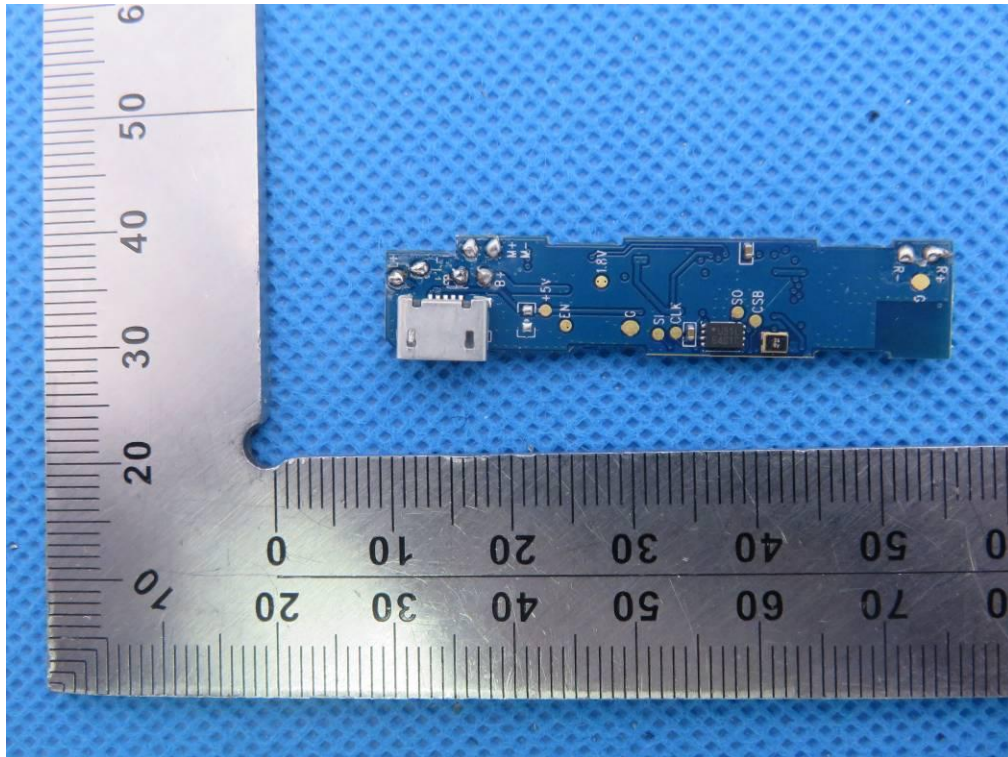

INTERNAL VIEW OF EUT-3

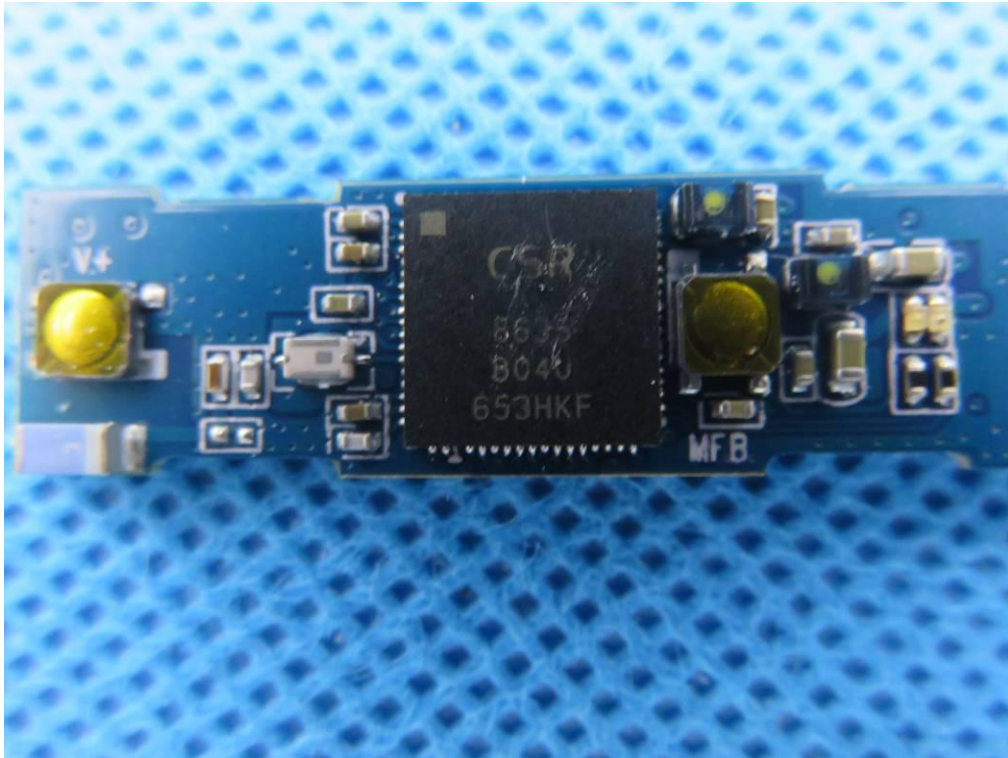

Other sample
TOP VIEW OF EUT



BOTTOM VIEW OF EUT



VIEW OF ADAPTER (AE)



THE ADAPTER SUPPLIED BY AGC

----END OF REPORT----