

# **FCC Part 15C Test Report**

FCC ID:2AL8LRC02

Product Name:	2.4G Remote Controller of Electric Baby Carrier
Trademark:	N/A
Model Name :	RC02 170311 V1.1
Prepared For :	Pinghu Zhimeng Technology Co., Ltd.
Address :	Dongxi Road, 17 Team, Qianjin Village, Quantang, Pinghu, Zhejiang, China
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen,China
Test Date:	May 18 - May 22, 2017
Date of Report :	May 22, 2017
Report No.:	BCTC-FY170502949E



### **VERIFICATION OF COMPLIANCE**

Applicant's name...... Pinghu Zhimeng Technology Co., Ltd.

Zhejiang, China

Manufacture's Name ..... Pinghu Zhimeng Technology Co., Ltd.

Address ...... Dongxi Road, 17 Team, Qianjin Village, Quantang, Pinghu,

Zhejiang, China

**Product description** 

Product name ...... 2.4G Remote Controller of Electric Baby Carrier

Trademark: N/A

Model Name: RC02 170311 V1.1

FCC Part15.249

Standards: ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result ..... Pass

Prepared by(Engineer): Eric Yang

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	4
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	8
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	D 9
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . EMC EMISSION TEST	12
3.1 RADIATED EMISSION MEASUREMENT	12
3.1.1 RADIATED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE 3.1.3 DEVIATION FROM TEST STANDARD	13 13
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	15
3.1.6 TEST RESULTS	16
4 . BANDWIDTH TEST	21
4.1 APPLIED PROCEDURES / LIMIT	21
4.1.1 TEST PROCEDURE	21
4.1.2 DEVIATION FROM STANDARD 4.1.3 TEST SETUP	21 21
4.1.4 EUT OPERATION CONDITIONS	21
4.1.5 TEST RESULTS	22
5 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	25
5.1 DEVIATION FROM STANDARD	26
5.2 EUT OPERATION CONDITIONS 5.3 TEST RESULTS	26 26
6 . ANTENNA REQUIREMENT	29
6.1 STANDARD REQUIREMENT	29
6.2 EUT ANTENNA	29
7 . EUT TEST PHOTO	30



### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C						
Standard Section	Test Item	Judgment	Remark			
15.207(a)	Conducted Emission	N/A				
15.209(a)&&15.249(a) &15.249(c)&15.205(a)	Fundamental &Radiated Spurious Emission Measurement	PASS				
15.215(c)	Bandwidth	PASS				
15.249(d)	Band Edge Emission	PASS				
15.203	Antenna Requirement	PASS				

### 1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registration No.:187086



### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately  $\mathbf{95}$  %  $^{\circ}$ 

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%

### 2. GENERAL INFORMATION



### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	2.4G Remote Controller of Electric Baby Carrier				
Trade Name	N/A				
Model Name	RC02 170311 V1.1				
Serial Model	N/A				
Model Difference	N/A				
Product Description	Operation Frequency: 2402-2480MHz Modulation Type: GFSK Number Of Channel 79 CH Channel spacing 1MHz Antenna Designation: Please see Note 3.  Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.				
Channel List	Please refer to the Note 2.				
Battery	DC3.0V(2*1.5V AAA battery)				
Connecting I/O Port(s)	Please refer to the User's Manual				
hardware version	-				
Software version	-				

### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

	Channel List						
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
00	2402	27	2429	54	2456		
01	2403	28	2430	55	2457		
02	2404	29	2431	56	2458		
03	2405	30	2432	57	2459		
04	2406	31	2433	58	2460		
05	2407	32	2434	59	2461		
06	2408	33	2435	60	2462		
07	2409	34	2436	61	2463		
80	2410	35	2437	62	2464		
09	2411	36	2438	63	2465		
10	2412	37	2439	64	2466		
11	2413	38	2440	65	2467		
12	2414	39	2441	66	2468		
13	2415	40	2442	67	2469		
14	2416	41	2443	68	2470		
15	2417	42	2444	69	2471		
16	2418	43	2445	70	2472		
17	2419	44	2446	71	2473		
18	2420	45	2447	72	2474		
19	2421	46	2448	73	2475		
20	2422	47	2449	74	2476		
21	2423	48	2450	75	2477		
22	2424	49	2451	76	2478		
23	2425	50	2452	77	2479		
24	2426	51	2453	78	2480		
25	2427	52	2454				
26	2428	53	2455				

3

### Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	0dBi	

### 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH00	
Mode 2	CH39	GFSK
Mode 3	CH78	
Mode 4	Link mode	

## Shenzhen BCTC Technology Co., Ltd.

### Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

### 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Frequency	2402MHz	2441MHz	2480MHz
Channel	Low	Middle	High



### 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

E-1 EUT



### 2.5DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	2.4G Remote Controller of Electric Baby Carrier	N/A	RC02 170311 V1.1	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



### 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2016.08.27	2017.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2016.08.27	2017.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2016.08.27	2017.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2016.09.03	2017.09.03
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2016.09.03	2017.09.03
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2016.08.27	2017.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2016.08.27	2017.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2016.08.27	2017.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2016.09.03	2017.09.03
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2016.08.27	2017.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2016.08.27	2017.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2016.08.27	2017.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2016.08.27	2017.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2016.08.27	2017.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2016.08.27	2017.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2016.08.27	2017.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2016.08.27	2017.08.26

Conduction Test equipment

00110	Solidaction rest equipment							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until		
1	Test Receiver	R&S	ESCI	1166.5950K03-10 1165-ha	2016.06.06	2017.06.05		
2	LISN	R&S	NSLK81 26	812646 6	2016.08.25	2017.08.24		
3	LISN	R&S	NSLK81 26	812648 7	2016.08.25	2017.08.24		
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06		
5	RF cables	R&S	R204	R20X	2016.07.06	2017.07.05		



### 3. EMC EMISSION TEST

#### 3.1 RADIATED EMISSION MEASUREMENT

### 3.1.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)		
FREQUENCY (MHZ)	PEAK	AVERAGE	
Above 1000	74	54	

### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting		
Attenuation	Auto		
Start Frequency	1000 MHz		
Stop Frequency	10th carrier harmonic		
RB / VB (emission in restricted	1 MHz / 1 MHz for Dook 1 MHz / 10Hz for Average		
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average		

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.1.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.1.4 TEST SETUP

### (A) Radiated Emission Test-Up Frequency Below 30MHz

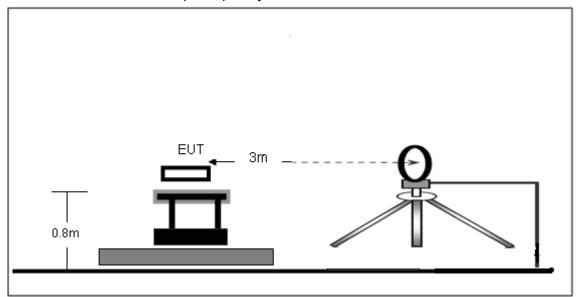


### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

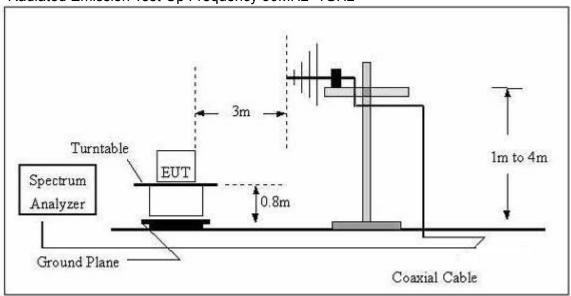



### (C) Radiated Emission Test-Up Frequency Above 1GHz

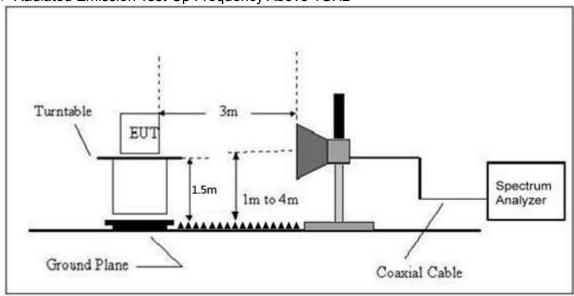

### 3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.1.6 TEST RESULTS

Radiated Spurious Emission (Below 30MHz )

Temperature :	<b>25</b> ℃	Relative Humidity:	55%
Pressure :	1010 hPa	Polarization :	
Test Voltage :	DC3.0V		
Test Mode :	Mode 4		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

### NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



### Radiated Spurious Emission (Between 30MHz - 1GHz)


Temperature :	<b>25</b> ℃	Relative Humidity:	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC3.0V		
Test Mode : (Worst)	Mode 4		

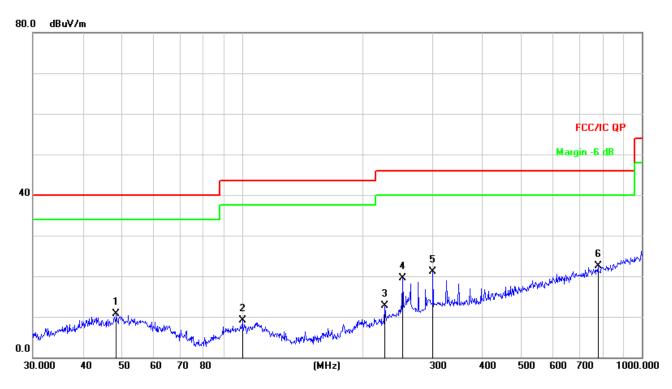

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		48.5016	25.35	-14.68	10.67	40.00	-29.33	QP
2	,	100.2286	25.65	-16.47	9.18	43.50	-34.32	QP
3	2	227.6906	27.41	-14.75	12.66	46.00	-33.34	QP
4	2	252.0627	33.20	-13.69	19.51	46.00	-26.49	QP
5	3	300.3672	33.26	-12.09	21.17	46.00	-24.83	QP
6	*	776.8778	23.85	-1.43	22.42	46.00	-23.58	QP



Temperature :	<b>25</b> ℃	Relative Humidity:	55%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC3.0V		
Test Mode : (Worst)	Mode 4		

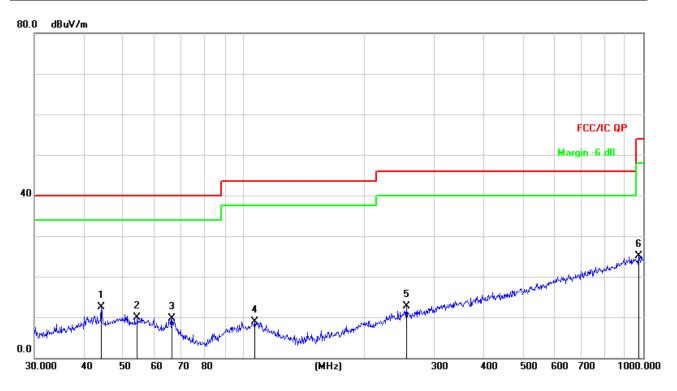

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB	dBuV/m	dB/m	dB	Detector
1	*	44.1202	27.33	-14.88	12.45	40.00	-27.55	QP
2		54.2610	24.87	-14.94	9.93	40.00	-30.07	QP
3		66.2662	26.97	-17.25	9.72	40.00	-30.28	QP
4	•	106.7587	25.22	-16.27	8.95	43.50	-34.55	QP
5	2	255.6231	26.20	-13.55	12.65	46.00	-33.35	QP
6	(	975.7529	23.38	1.64	25.02	54.00	-28.98	QP



### Shenzhen BCTC Technology Co., Ltd. Report No.:BCTC-FY170502949E

## Radiated Spurious Emission (1GHz to 10<sup>th</sup> harmonics)

	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dBµV)	(PK/QP/Ave)	(H/V)	(dB)	(dBµV/m)	(dBµV/m)	rioduit
	2402	93.63	PK	Н	13.85	107.48	114	Pass
	2402	72.17	Ave	Н	13.85	86.02	94	Pass
	4804	50.24	PK	Η	19.33	69.57	74	Pass
	4804	30.73	Ave	Η	19.33	50.06	54	Pass
Lower Channel	12355	31.26	PK	Н	17.81	49.07	74	Pass
2402MHz	17850	25.58	PK	Н	25.39	50.97	74	Pass
	2402	92.74	PK	V	13.85	106.59	114	Pass
	2402	71.33	Ave	٧	13.85	85.18	94	Pass
	4804	47.52	PK	٧	19.33	66.85	74	Pass
	4804	26.94	Ave	V	19.33	46.27	54	Pass
	12355	25.86	PK	V	17.81	43.67	74	Pass
	17850	24.31	PK	V	25.39	49.7	74	Pass
	2441	92.24	PK	Н	13.94	106.18	114	Pass
	2441	71.32	Ave	Н	13.94	85.26	94	Pass
	4882	50.79	PK	Н	19.43	70.22	74	Pass
	4882	36.61	Ave	Н	19.43	56.04	54	Pass
	12355	27.34	PK	Н	17.81	45.15	74	Pass
Middle	17850	26.09	PK	Н	25.39	51.48	74	Pass
Channel 2441MHz	2441	90.43	PK	V	13.94	104.37	114	Pass
	2441	71.25	Ave	V	13.94	85.19	94	Pass
	4882	48.83	PK	٧	19.43	68.26	74	Pass
	4882	26.42	Ave	V	19.43	45.85	54	Pass
	12355	25.65	PK	V	17.81	43.46	74	Pass
	17850	24.43	PK	V	25.39	49.82	74	Pass
Upper	2480	92.71	PK	Н	14.02	106.73	114	Pass
Channel	2480	72.64	Ave	Н	14.02	86.66	94	Pass
2480MHz	4960	49.2	PK	Н	19.51	68.71	74	Pass



### Shenzhen BCTC Technology Co., Ltd.

Report No.:BCTC-FY170502949E

4960	33.71	Ave	Н	19.51	53.22	54	Pass
12355	28.96	PK	Н	17.81	46.77	74	Pass
17850	25.24	PK	Н	25.39	50.63	74	Pass
2480	90.56	PK	V	14.02	104.58	114	Pass
2480	71.33	Ave	V	14.02	85.35	94	Pass
4960	47.94	PK	V	19.51	67.45	74	Pass
4960	32.64	Ave	V	19.51	52.15	54	Pass
12355	27.35	PK	V	17.81	45.16	74	Pass
17850	25.68	PK	V	25.39	51.07	74	Pass

### Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



#### 4. BANDWIDTH TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C							
Section	Test Item	Limit	Frequency Range (MHz)	Result			
15.249	Bandwidth	(20dB bandwidth)	2403-2478	PASS			

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100KHz
VB	≥RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW≥ RBW, Sweep time = Auto.

### 4.1.2 DEVIATION FROM STANDARD

No deviation.

### 4.1.3 TEST SETUP



### **4.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





### 4.1.5 TEST RESULTS

	2.4G Remote Controller of Electric Baby Carrier	Model Name :	RC02 170311 V1.1
Temperature :	<b>25</b> ℃	Relative Humidity:	55%
Pressure:	1012 hPa	Test Voltage :	DC3.0V
Test Mode :	CH00 / CH39 /C78		


	Frequency	20dB Bandwidth (kHz)	Result
	2402 MHz	821.108	PASS
GFSK	2441 MHz	861.473	PASS
	2480 MHz	882.352	PASS



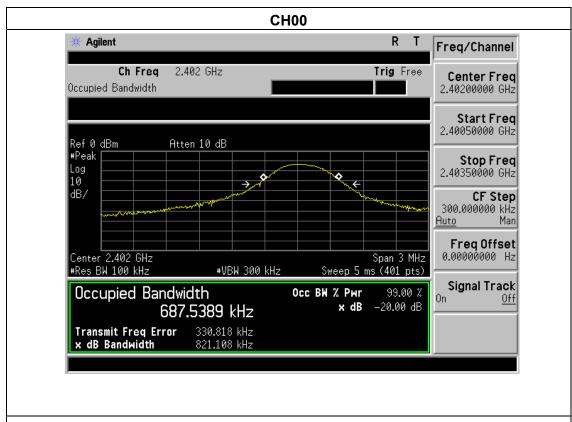

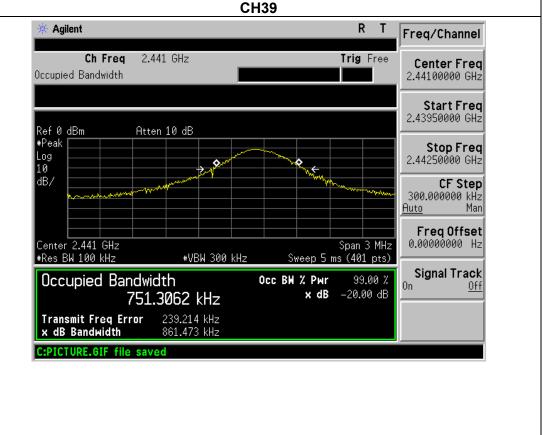

### Shenzhen BCTC Technology Co., Ltd.

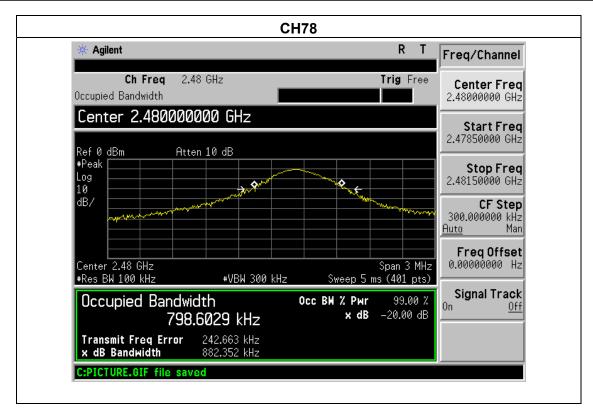



## 5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)(c)

#### **TEST PROCEDURE**

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

#### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



### **5.1 DEVIATION FROM STANDARD**

No deviation.


### **5.2 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### **5.3 TEST RESULTS**

Temperature :	<b>25</b> ℃	Relative Humidity:	54%
Pressure :	1012 hPa	Test Voltage :	DC3.0V
Test Mode :	CH00/ CH78		




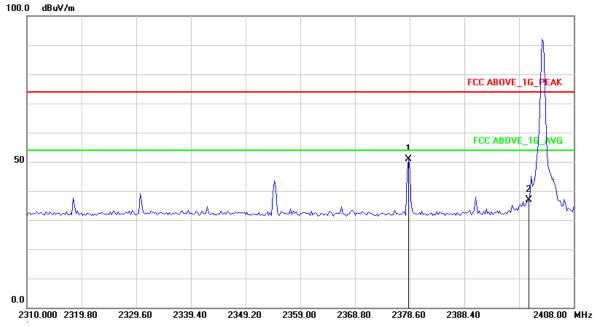

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2378.355	53.97	-3.12	50.85	74.00	-23.15	peak
2	2400.000	40.21	-3.24	36.97	74.00	-37.03	peak


### Shenzhen BCTC Technology Co., Ltd.


### 2402MHz Vertical

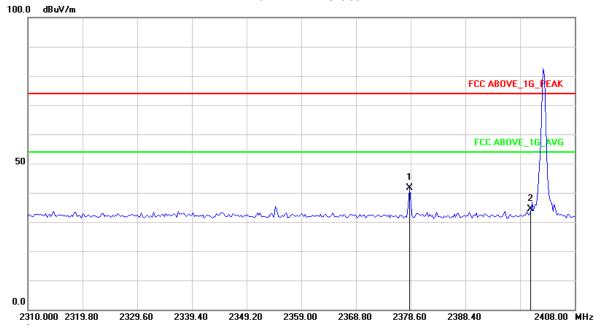

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2378.355	44.86	-3.12	41.74	74.00	-32.26	peak
2	2400.000	37.63	-3.24	34.39	74.00	-39.61	peak






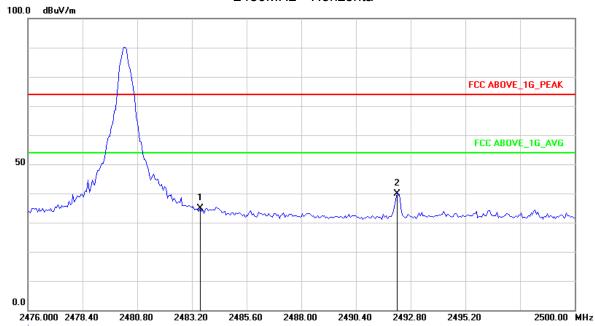

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	38.45	-3.53	34.92	74.00	-39.08	peak
2	2492.200	43.40	-3.53	39.87	74.00	-34.13	peak

### 2480MHz Vertical

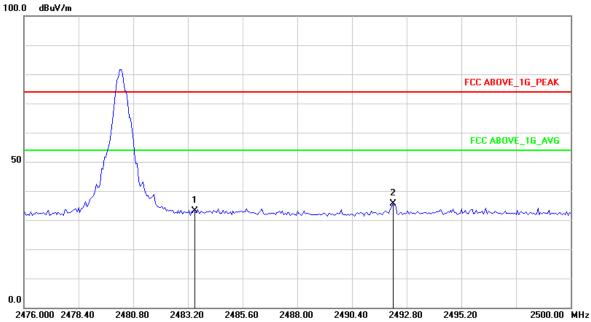

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	36.77	-3.53	33.24	74.00	-40.76	peak
2	2492.200	39.22	-3.53	35.69	74.00	-38.31	peak

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



### **6. ANTENNA REQUIREMENT**

### **6.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


### **6.2 EUT ANTENNA**

The EUT antenna is PCB antenna. It complies with the standard requirement.



### 7. EUT TEST PHOTO



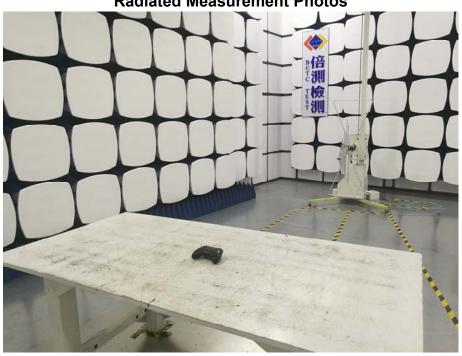





### **7.1. EUT PHOTO**





**\*\*\*\*\* END OF REPORT \*\*\*\***