

FCC Part 22H & 24E

Measurement and Test Report

For

Snake Mobile Products Ltd.

6072 185B St. Surrey, British Columbia, Canada

FCC ID: 2ALHUCAT

FCC Rules: FCC Part 22H, FCC Part 24E

Product Description: Cell Alert Technology

Tested Model: CAT

Report No.: STR17038007I-1

Tested Date: 2017-03-01 to 2017-03-15

Issued Date: 2017-03-16

Tested By: Leo Lee / Engineer

Leo Lee

Reviewed By: Silin Chen / EMC Manager

Silin Chen

Approved & Authorized By: Jandy So / PSQ Manager

Jandy So

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM. Test Technology Co., Ltd.

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. GENERAL INFORMATION | 3 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 3 |
| 1.2 TEST STANDARDS..... | 4 |
| 1.3 TEST METHODOLOGY..... | 4 |
| 1.4 TEST FACILITY | 5 |
| 1.5 EUT SETUP AND TEST MODE..... | 5 |
| 1.6 MEASUREMENT UNCERTAINTY | 6 |
| 1.7 TEST EQUIPMENT LIST AND DETAILS | 7 |
| 2. SUMMARY OF TEST RESULTS | 8 |
| 3. RF EXPOSURE | 9 |
| 3.1 STANDARD APPLICABLE..... | 9 |
| 3.2 TEST RESULT..... | 9 |
| 4. RF OUTPUT POWER | 10 |
| 4.1 STANDARD APPLICABLE..... | 10 |
| 4.2 TEST PROCEDURE..... | 10 |
| 4.3 ENVIRONMENTAL CONDITIONS | 10 |
| 4.4 SUMMARY OF TEST RESULTS/PLOTS | 11 |
| 5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER..... | 14 |
| 5.1 STANDARD APPLICABLE..... | 14 |
| 5.2 TEST PROCEDURE..... | 14 |
| 5.3 ENVIRONMENTAL CONDITIONS | 14 |
| 5.4 SUMMARY OF TEST RESULTS | 15 |
| 6. EMISSION BANDWIDTH | 16 |
| 6.1 STANDARD APPLICABLE..... | 16 |
| 6.2 TEST PROCEDURE..... | 16 |
| 6.3 ENVIRONMENTAL CONDITIONS | 16 |
| 6.4 SUMMARY OF TEST RESULTS/PLOTS | 17 |
| 7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL..... | 24 |
| 7.1 STANDARD APPLICABLE..... | 24 |
| 7.2 TEST PROCEDURE..... | 24 |
| 7.3 ENVIRONMENTAL CONDITIONS | 24 |
| 7.4 SUMMARY OF TEST RESULTS/PLOTS | 25 |
| 8. SPURIOUS RADIATED EMISSIONS..... | 35 |
| 8.1 STANDARD APPLICABLE..... | 35 |
| 8.2 TEST PROCEDURE..... | 35 |
| 8.3 ENVIRONMENTAL CONDITIONS | 35 |
| 8.4 SUMMARY OF TEST RESULTS/PLOTS | 35 |
| 9. FREQUENCY STABILITY | 41 |
| 9.1 STANDARD APPLICABLE..... | 41 |
| 9.2 TEST PROCEDURE..... | 41 |
| 9.3 ENVIRONMENTAL CONDITIONS | 41 |
| 9.4 SUMMARY OF TEST RESULTS/PLOTS | 42 |

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Snake Mobile Products Ltd.
Address of applicant: 6072 185B St. Surrey, British Columbia, Canada

Manufacturer: Shenzhen Reachfar Technology Co.,Ltd.
Address of manufacturer: 5F, Building A, No. 86 Industrial road, Longhua, 518109, Shenzhen, China

| General Description of EUT: | |
|--|---|
| Product Name: | Cell Alert Technology |
| Brand Name: | / |
| Model No.: | CAT |
| Adding Model(s): | V6+, V8, V8S, V13, V16, V26, V28, V30, V32, V38, V40, V42 |
| Hardware version: | G19ER-MB-V1.0 |
| Software version: | / |
| Rated Voltage: | DC 3.7V by battery |
| Battery Capacity: | 520mAh |
| Device Category: | Portable Device |
| <i>The EUT Main board support GSM850/900/DCS1800/PCS1900 function. It is intended for speech, Multimedia Message Service (MMS) transmission. It is equipped with GPRS class 12 for GSM850/900/DCS1800/PCS1900, and GPS functions. For more information see the following datasheet</i> | |
| <i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model CAT, but the circuit and the electronic construction do not change, declared by the manufacturer.</i> | |

| Technical Characteristics of EUT: | |
|--|---|
| 2G | |
| Support Networks: | GSM, GPRS |
| Support Band: | GSM850/PCS1900 |
| Uplink Frequency: | GSM/GPRS 850: 824~849MHz GSM/GPRS 1900: 1850~1910MHz |
| Downlink Frequency: | GSM/GPRS 850: 869~894MHz GSM/GPRS 1900: 1930~1990MHz |
| Max RF Output Power: | GSM850: 31.74dBm, GSM1900: 29.64dBm |
| Type of Emission: | GSM850: 255KGXW, GSM1900: 254KGXW |
| Type of Modulation: | GMSK |
| Type of Antenna: | Integral Antenna |
| Antenna Gain: | 0dBi |
| GRPS Class: | Class 12 |

1.2 Test Standards

The following report is prepared on behalf of the Snake Mobile Products Ltd. in accordance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI/TIA-603-D: 2010 and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 971168 D01 Power Meas License Digital Systems v02r02 shall be performed also.

1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List | | |
|----------------|-------------|----------------------------|
| Test Mode | Description | Remark |
| TM1 | GSM 850 | Low, Middle, High Channels |
| TM2 | GPRS 850 | Low, Middle, High Channels |
| TM3 | GSM 1900 | Low, Middle, High Channels |
| TM4 | GPRS 1900 | Low, Middle, High Channels |

| Testing Configure | | | |
|-------------------|------------------|-------------------|----------------|
| Support Band | Support Standard | Channel Frequency | Channel Number |
| GSM 850 | GSM/GPRS | 824.2 MHz | 128 |
| | | 836.6 MHz | 190 |
| | | 848.8 MHz | 251 |
| PCS 1900 | GSM/GPRS | 1850.2 MHz | 512 |
| | | 1880.0 MHz | 661 |
| | | 1909.8 MHz | 810 |

Note: the transmitter has been tested on the communications mode of GSM, GPRS compliance test and record the worst case.

EUT Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| / | / | / | / |

Auxiliary Equipment List and Details

| Description | Manufacturer | Model | Serial Number |
|-------------|--------------|-------|---------------|
| / | / | / | / |

Special Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| USB Cable | 0.83 | Shielded | Without Core |

1.6 Measurement Uncertainty

| Measurement uncertainty | | | |
|--------------------------------|------------|---------------------|--|
| Parameter | Conditions | Uncertainty | |
| RF Output Power | Conducted | $\pm 0.42\text{dB}$ | |
| Occupied Bandwidth | Conducted | $\pm 1.5\%$ | |
| Frequency Stability | Conducted | 2.3% | |
| Transmitter Spurious Emissions | Radiated | $\pm 5.1\text{dB}$ | |
| Transmitter Spurious Emissions | Conducted | $\pm 0.42\text{dB}$ | |

1.7 Test Equipment List and Details

| No. | Description | Manufacturer | Model | Serial No. | Cal Date | Due. Date |
|-----------|-------------------------|-----------------|-------------|-------------|------------|------------|
| SEMT-1075 | Communication Tester | Rohde & Schwarz | CMW500 | 148650 | 2016-06-04 | 2017-06-03 |
| SEMT-1034 | GSM Tester | Rohde & Schwarz | CMU200 | 104036 | 2016-06-04 | 2017-06-03 |
| SEMT-1072 | Spectrum Analyzer | Agilent | E4407B | MY41440400 | 2016-06-04 | 2017-06-03 |
| SEMT-1079 | Spectrum Analyzer | Agilent | N9020A | US47140102 | 2016-06-04 | 2017-06-03 |
| SEMT-1080 | Signal Generator | Agilent | 83752A | 3610A01453 | 2016-06-04 | 2017-06-03 |
| SEMT-1081 | Vector Signal Generator | Agilent | N5182A | MY47070202 | 2016-06-04 | 2017-06-03 |
| SEMT-1028 | Power Divider | Weinschel | 1506A | PM204 | 2016-06-04 | 2017-06-03 |
| SEMT-1082 | Power Divider | RF-Lambda | RFLT4W5M18G | 14110400027 | 2016-06-04 | 2017-06-03 |
| SEMT-1031 | Spectrum Analyzer | Rohde & Schwarz | FSP30 | 836079/035 | 2016-06-04 | 2017-06-03 |
| SEMT-1007 | EMI Test Receiver | Rohde & Schwarz | ESVB | 825471/005 | 2016-06-04 | 2017-06-03 |
| SEMT-1008 | Amplifier | Agilent | 8447F | 3113A06717 | 2016-06-04 | 2017-06-03 |
| SEMT-1043 | Amplifier | C&D | PAP-1G18 | 2002 | 2016-06-04 | 2017-06-03 |
| SEMT-1069 | Loop Antenna | Schwarz beck | FMZB 1516 | 9773 | 2016-06-04 | 2017-06-03 |
| SEMT-1068 | Broadband Antenna | Schwarz beck | VULB9163 | 9163-333 | 2016-06-04 | 2017-06-03 |
| SEMT-1042 | Horn Antenna | ETS | 3117 | 00086197 | 2016-06-04 | 2017-06-03 |
| SEMT-1121 | Horn Antenna | ETS | 3116B | 00088203 | 2016-06-04 | 2017-06-03 |

2. SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test Item | Result |
|----------------------------|--|-----------|
| § 1.1307, § 2.1093 | RF Exposure | Compliant |
| § 22.913 (a), § 24.232 (c) | RF Output Power | Compliant |
| § 24.51 | Peak-to-average Ratio (PAR) of Transmitter | Compliant |
| § 22.917 (b), § 24.238 (b) | Emission Bandwidth | Compliant |
| § 22.917 (a), § 24.238 (a) | Spurious Emissions at Antenna Terminal | Compliant |
| § 22.917 (a), § 24.238 (a) | Spurious Radiation Emissions | Compliant |
| § 22.917 (a), § 24.238 (a) | Out of Band Emissions | Compliant |
| § 22.355, § 24.235 | Frequency Stability | Compliant |

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the SAR report.

4. RF Output Power

4.1 Standard Applicable


According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

4.2 Test Procedure

Conducted output power test method:

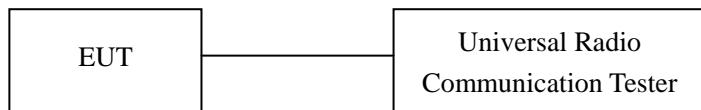

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

4.3 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

4.4 Summary of Test Results/Plots

Max. Radiated Power

ERP For GSM Mode GSM850

| Frequency | Substitution SG | Height | Table | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|-----------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz | dBm | Meter | Degree | H / V | dB | dB | dBm | dBm |
| Low Channel | | | | | | | | |
| 824.2 | 30.43 | 1.5 | 0 | H | 1.5 | 0 | 28.93 | 38.45 |
| 824.2 | 32.42 | 1.5 | 0 | V | 1.5 | 0 | 30.92 | 38.45 |
| Middle Channel | | | | | | | | |
| 836.4 | 30.59 | 1.5 | 0 | H | 1.5 | 0 | 29.09 | 38.45 |
| 836.4 | 32.57 | 1.5 | 0 | V | 1.5 | 0 | 31.07 | 38.45 |
| High Channel | | | | | | | | |
| 848.8 | 30.61 | 1.5 | 0 | H | 1.5 | 0 | 29.11 | 38.45 |
| 848.8 | 32.62 | 1.5 | 0 | V | 1.5 | 0 | 31.12 | 38.45 |

EIRP For GSM Mode PCS1900

| Frequency | Substitution SG | Height | Table | Polar | Cable loss | Antenna Gain | Result | FCC Part 24E Limit |
|----------------|-----------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz | dBm | Meter | Degree | H / V | dB | dB | dBm | dBm |
| Low Channel | | | | | | | | |
| 1850.2 | 21.09 | 1.5 | 0 | H | 1.9 | 7.7 | 26.89 | 33.00 |
| 1850.2 | 23.06 | 1.5 | 0 | V | 1.9 | 7.7 | 28.86 | 33.00 |
| Middle Channel | | | | | | | | |
| 1880.0 | 20.47 | 1.5 | 0 | H | 1.9 | 7.7 | 26.27 | 33.00 |
| 1880.0 | 22.49 | 1.5 | 0 | V | 1.9 | 7.7 | 28.29 | 33.00 |
| High Channel | | | | | | | | |
| 1909.8 | 20.07 | 1.5 | 0 | H | 1.9 | 7.7 | 25.87 | 33.00 |
| 1909.8 | 22.12 | 1.5 | 0 | V | 1.9 | 7.7 | 27.92 | 33.00 |

ERP For GPRS Mode GSM850

| Frequency | Substitution SG | Height | Table | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|-----------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz | dBm | Meter | Degree | H / V | dB | dB | dBm | dBm |
| Low Channel | | | | | | | | |
| 824.2 | 30.40 | 1.5 | 0 | H | 1.5 | 0 | 28.90 | 38.45 |
| 824.2 | 32.39 | 1.5 | 0 | V | 1.5 | 0 | 30.89 | 38.45 |
| Middle Channel | | | | | | | | |
| 836.6 | 30.54 | 1.5 | 0 | H | 1.5 | 0 | 29.04 | 38.45 |
| 836.6 | 32.52 | 1.5 | 0 | V | 1.5 | 0 | 31.02 | 38.45 |
| High Channel | | | | | | | | |
| 848.8 | 30.56 | 1.5 | 0 | H | 1.5 | 0 | 29.06 | 38.45 |
| 848.8 | 32.57 | 1.5 | 0 | V | 1.5 | 0 | 31.07 | 38.45 |

EIRP For GPRS Mode PCS1900

| Frequency | Substitution SG | Height | Table | Polar | Cable loss | Antenna Gain | Result | FCC Part 24E Limit |
|----------------|-----------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz | dBm | Meter | Degree | H / V | dB | dB | dBm | dBm |
| Low Channel | | | | | | | | |
| 1850.2 | 21.03 | 1.5 | 0 | H | 1.9 | 7.7 | 26.83 | 33.00 |
| 1850.2 | 23.07 | 1.5 | 0 | V | 1.9 | 7.7 | 28.87 | 33.00 |
| Middle Channel | | | | | | | | |
| 1880.0 | 20.44 | 1.5 | 0 | H | 1.9 | 7.7 | 26.24 | 33.00 |
| 1880.0 | 22.46 | 1.5 | 0 | V | 1.9 | 7.7 | 28.26 | 33.00 |
| High Channel | | | | | | | | |
| 1909.8 | 20.09 | 1.5 | 0 | H | 1.9 | 7.7 | 25.89 | 33.00 |
| 1909.8 | 22.14 | 1.5 | 0 | V | 1.9 | 7.7 | 27.94 | 33.00 |

Note: Result = Substitution - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

| Test Mode | Channel | Frequency (MHz) | Average Power (dBm) | FCC Part 22.913 Limit (dBm) |
|--------------|----------------|-----------------|---------------------|-----------------------------|
| GSM | Low Channel | 824.2 | 31.73 | 38.45 |
| | Middle Channel | 836.6 | 31.74 | 38.45 |
| | High Channel | 848.8 | 31.69 | 38.45 |
| GPRS(1 Slot) | Low Channel | 824.2 | 31.60 | 38.45 |
| | Middle Channel | 836.6 | 31.35 | 38.45 |
| | High Channel | 848.8 | 31.36 | 38.45 |

For PCS Band (GSM1900)

| Test Mode | Channel | Frequency (MHz) | Average Power (dBm) | FCC Part 24.232 Limit (dBm) |
|--------------|----------------|-----------------|---------------------|-----------------------------|
| GSM | Low Channel | 1850.2 | 28.64 | 33.0 |
| | Middle Channel | 1880.0 | 28.93 | 33.0 |
| | High Channel | 1909.8 | 29.10 | 33.0 |
| GPRS(1 Slot) | Low Channel | 1850.2 | 29.31 | 33.0 |
| | Middle Channel | 1880.0 | 29.47 | 33.0 |
| | High Channel | 1909.8 | 29.64 | 33.0 |

5. Peak-to-average Ratio (PAR) of Transmitter

5.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

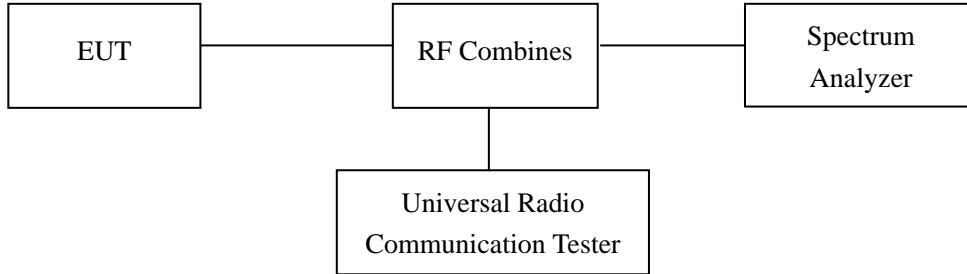

5.3 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

5.4 Summary of Test Results

Only the worst case was selected to record

For PCS Band

| Test Mode | Channel | Frequency (MHz) | PAR (dB) | Limit (dB) |
|--------------|---------|-----------------|----------|------------|
| GSM | 810 | 1909.8 | 9.98 | 13 |
| GPRS(1 Slot) | 810 | 1909.8 | 10.18 | 13 |

6. Emission Bandwidth

6.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

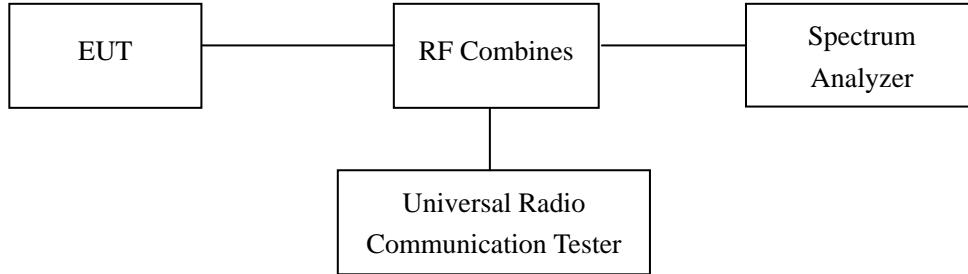

6.3 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

6.4 Summary of Test Results/Plots


For Cellular Band

| Test Mode | Channel | Frequency (MHz) | 99% Emission Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|------------------|----------------|------------------------|-------------------------------------|---------------------------------------|
| GSM | 128 | 824.2 | 251.8831 | 340.165 |
| | 190 | 836.6 | 253.3358 | 338.978 |
| | 251 | 848.8 | 254.6694 | 333.623 |
| GPRS | 128 | 824.2 | 252.2779 | 338.446 |
| | 190 | 836.6 | 253.8871 | 336.364 |
| | 251 | 848.8 | 252.1412 | 333.761 |


For PCS Band

| Test Mode | Channel | Frequency (MHz) | 99% Emission Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|------------------|----------------|------------------------|-------------------------------------|---------------------------------------|
| GSM | 512 | 1850.2 | 250.6339 | 335.522 |
| | 661 | 1880.0 | 254.3511 | 336.927 |
| | 810 | 1909.8 | 254.2857 | 338.718 |
| GPRS | 512 | 1850.2 | 252.3580 | 337.266 |
| | 661 | 1880.0 | 250.7912 | 336.769 |
| | 810 | 1909.8 | 253.5724 | 339.608 |


For Cellular Band
GSM Low Channel

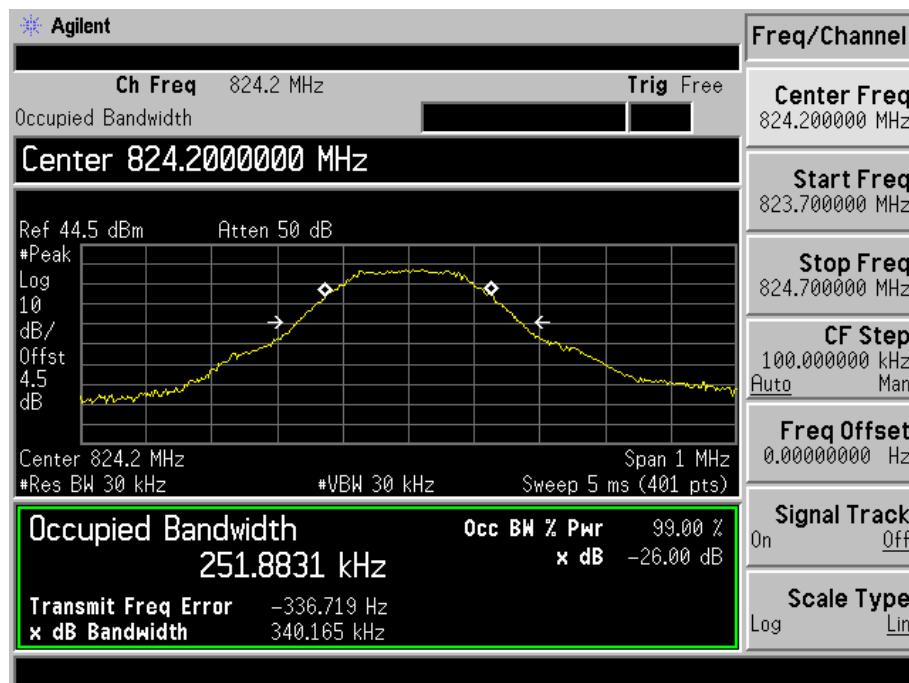


GSM Middle Channel

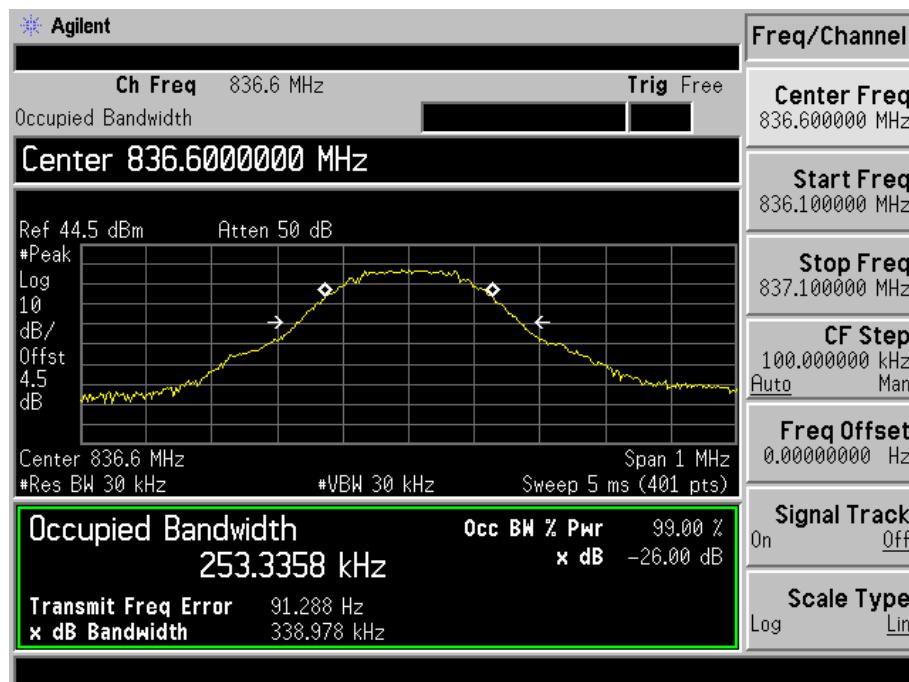


GSM High channel

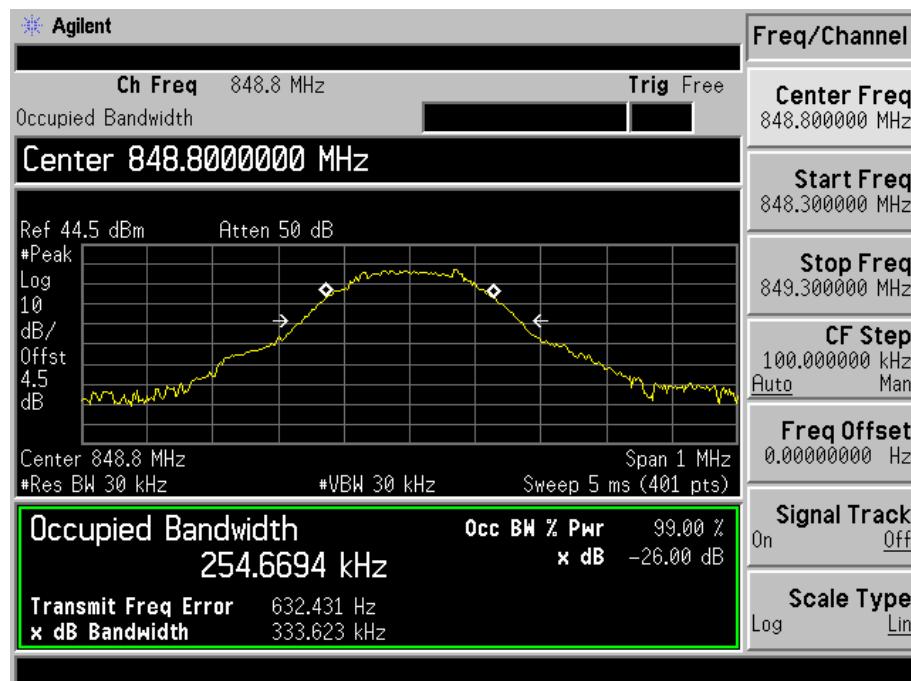


GPRS Low Channel

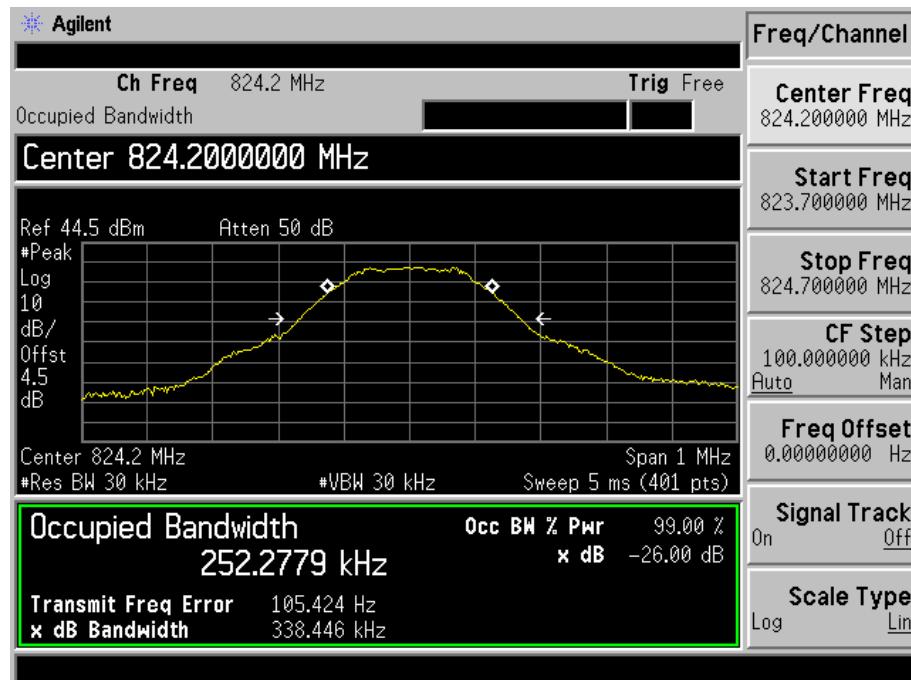

GPRS Middle Channel

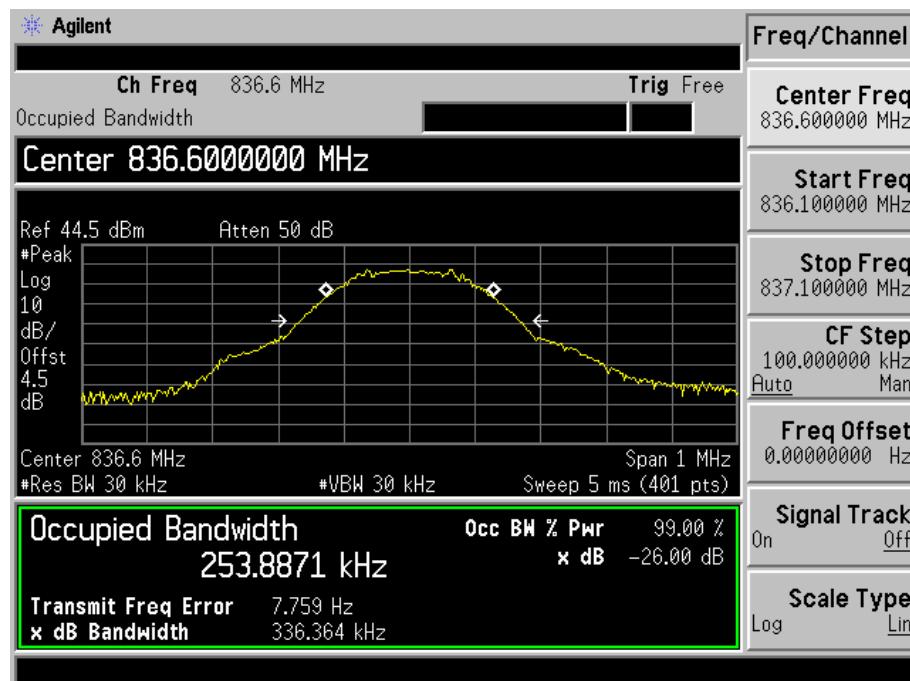

GPRS High Channel

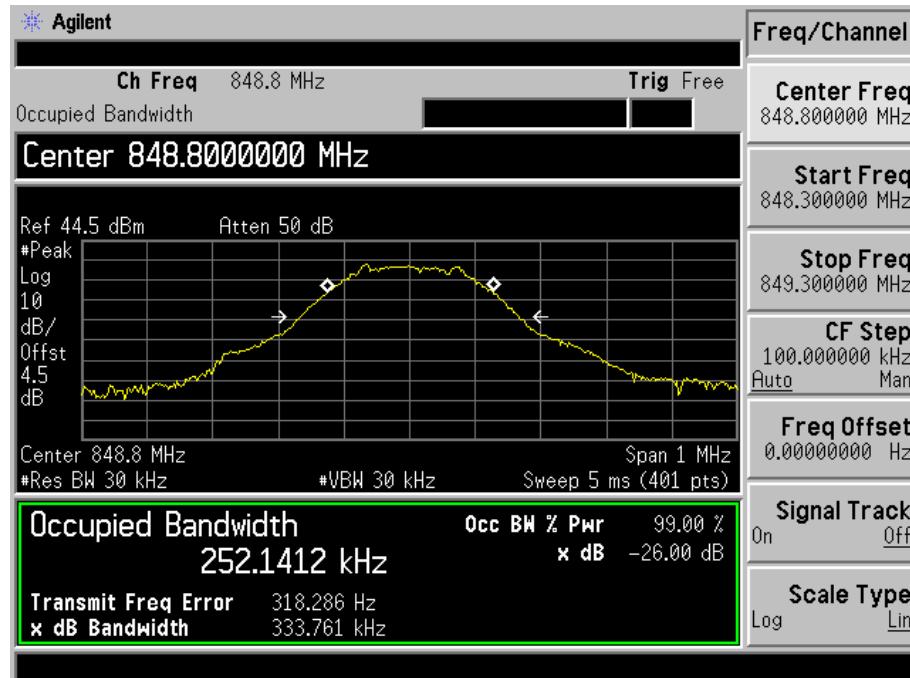


For PCS Band
GSM Low Channel




GSM Middle Channel




GSM High channel

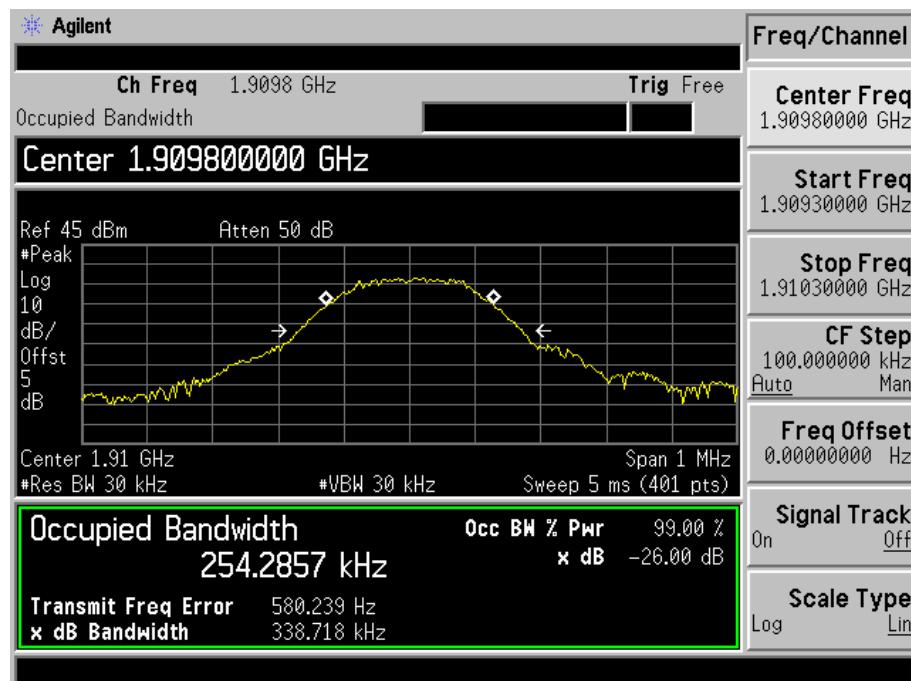

GPRS Low Channel

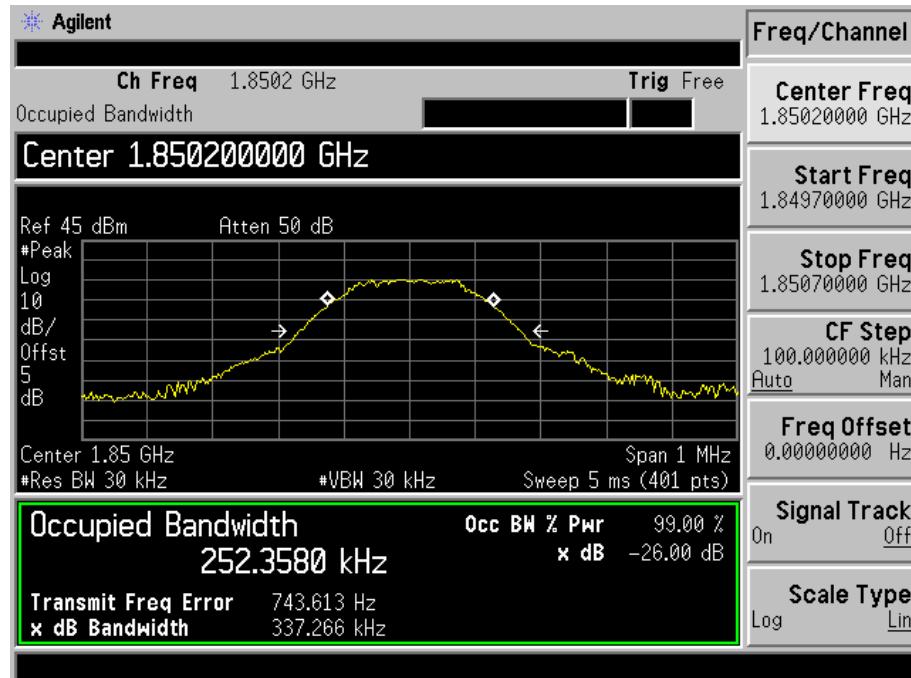

GPRS Middle Channel

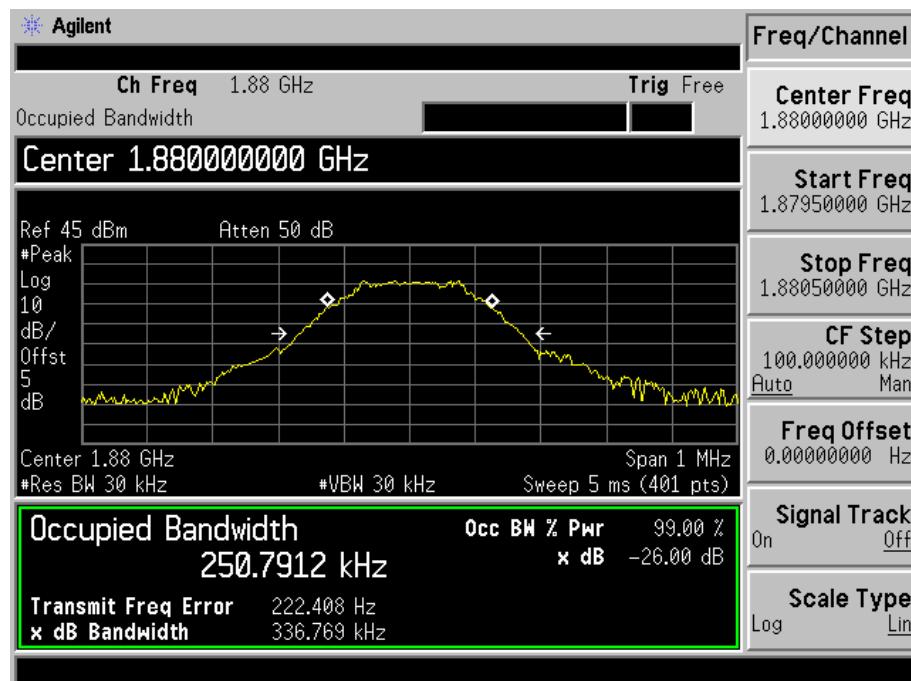

GPRS High Channel



7. Out of Band Emissions at Antenna Terminal

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

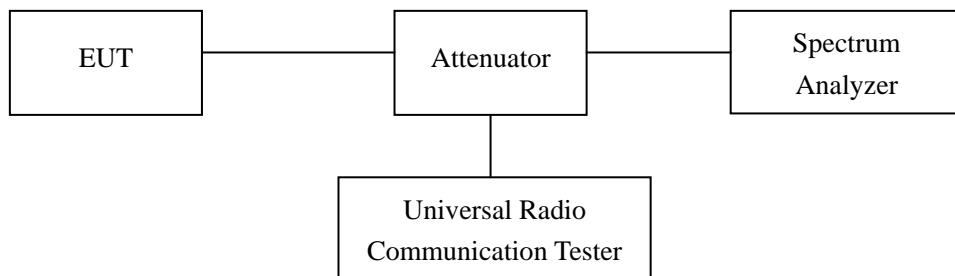


7.3 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 53% |
| ATM Pressure: | 1018 mbar |


7.4 Summary of Test Results/Plots

Please refer to the following test plots For Cellular Band


GSM Low Channel

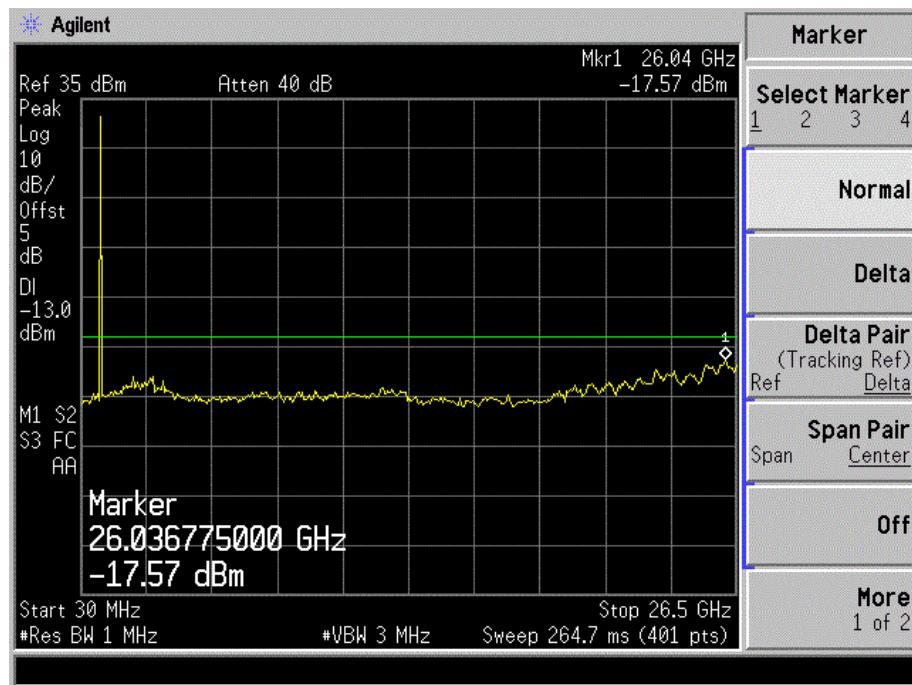


GSM Middle Channel

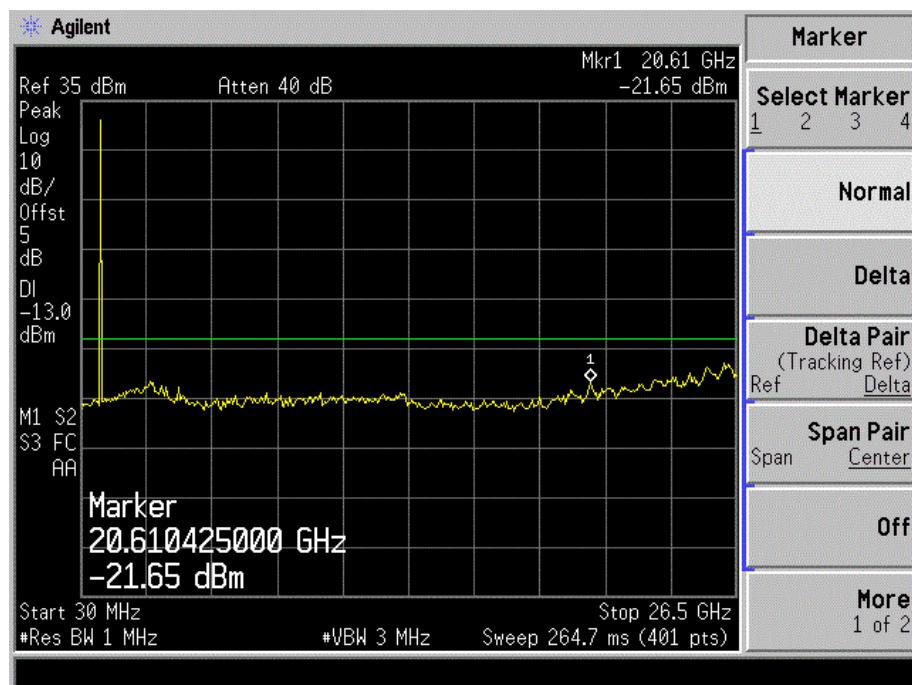


GSM High Channel

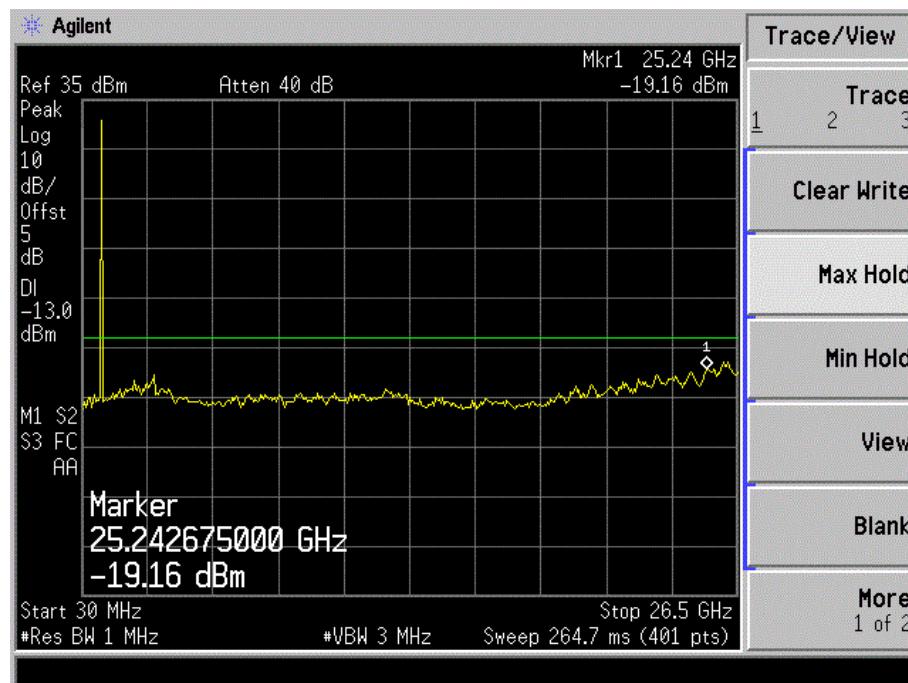


GSM Low Band Emission

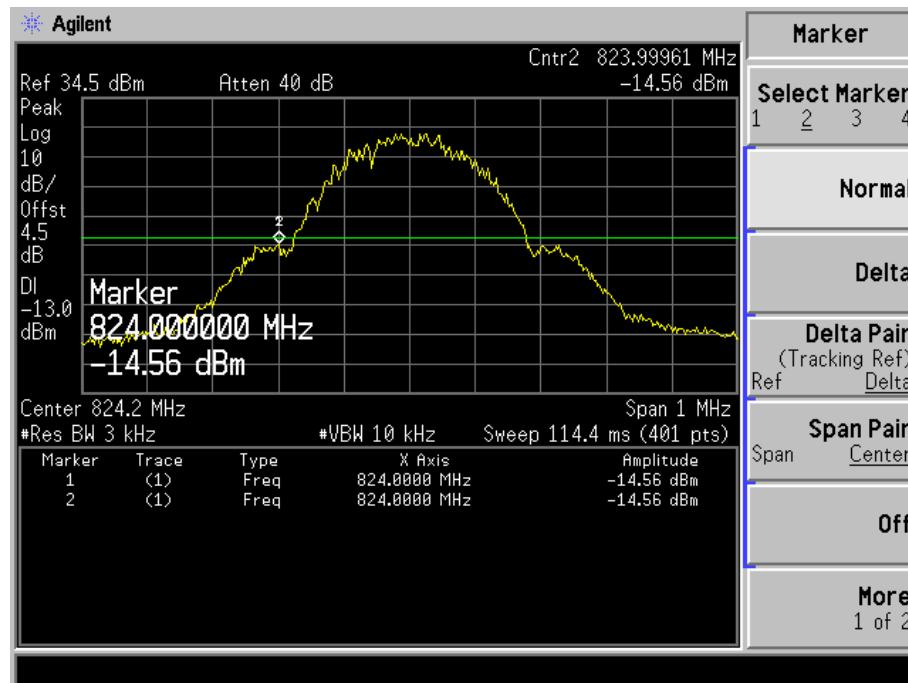


GSM High Band Emission

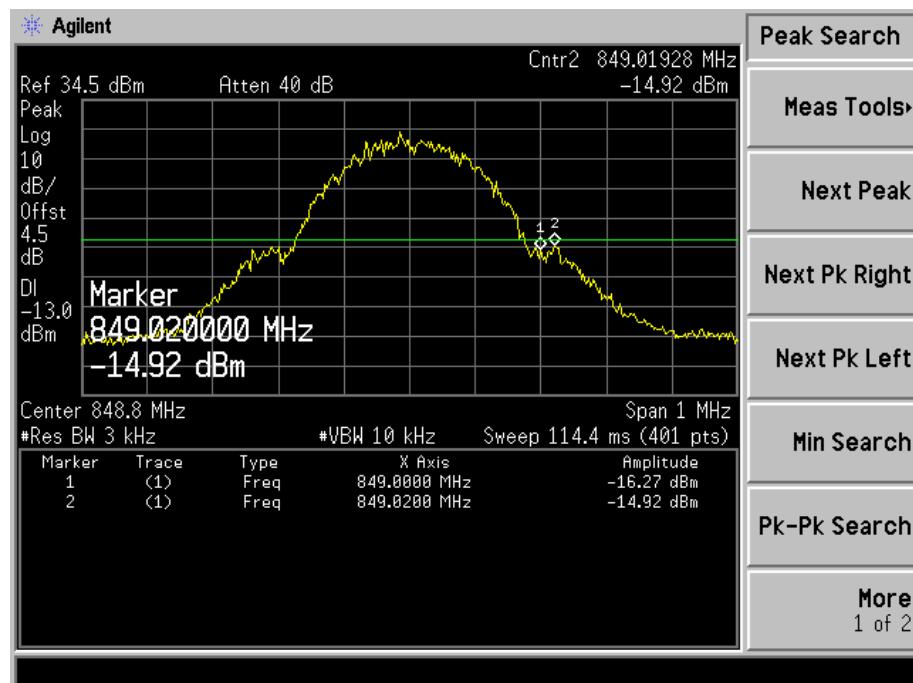


GPRS Low Channel

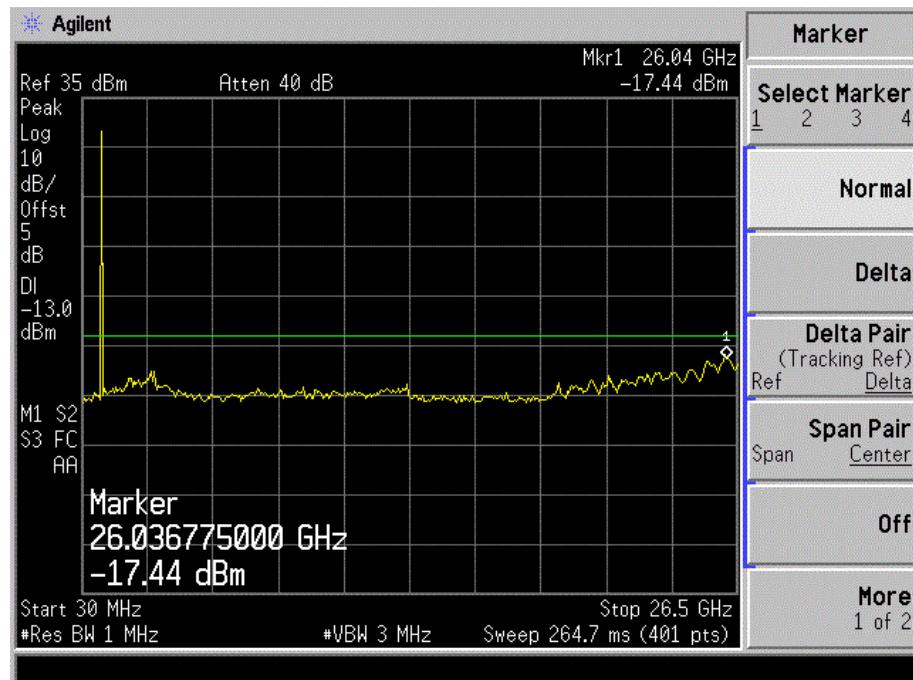


GPRS Middle Channel

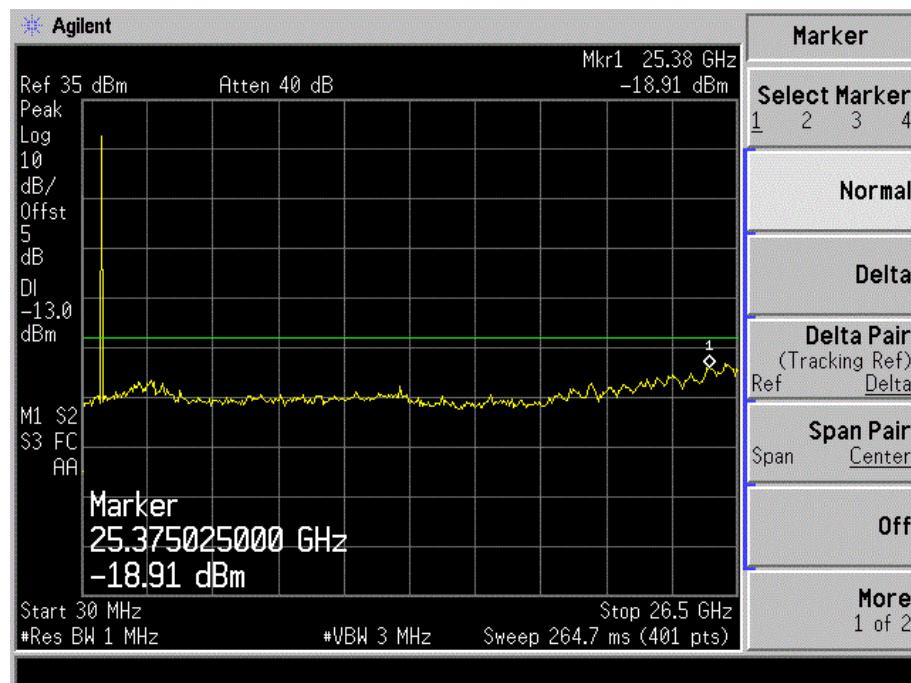


GPRS High Channel

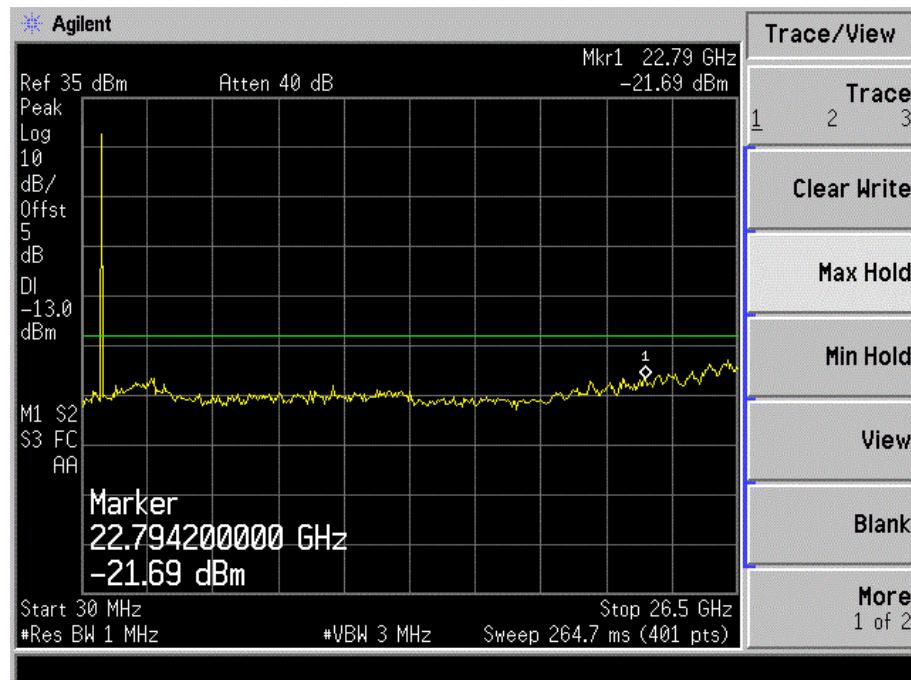


GPRS Low Band Emission

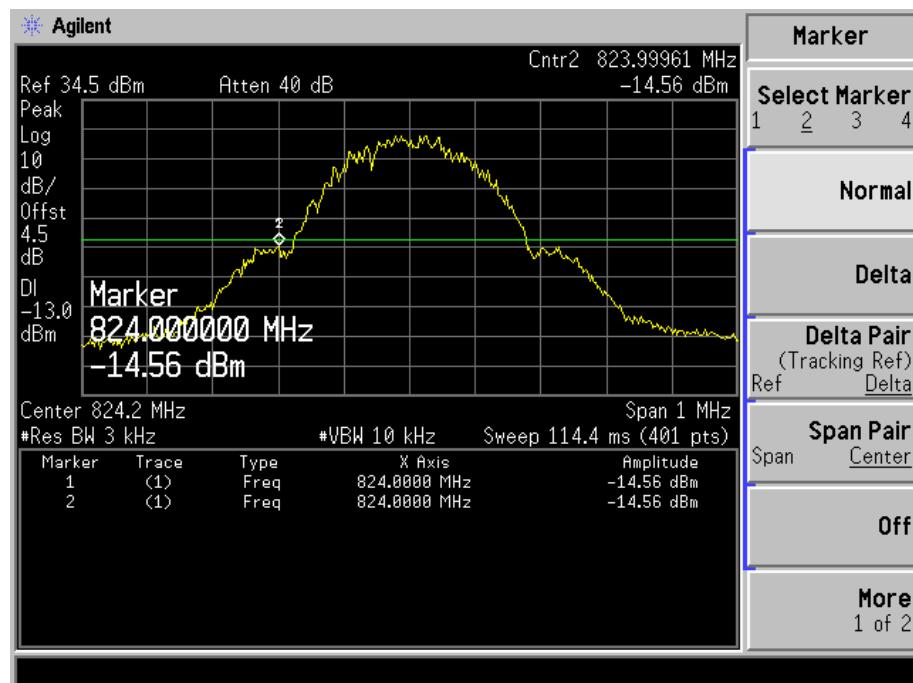


GPRS High Band Emission

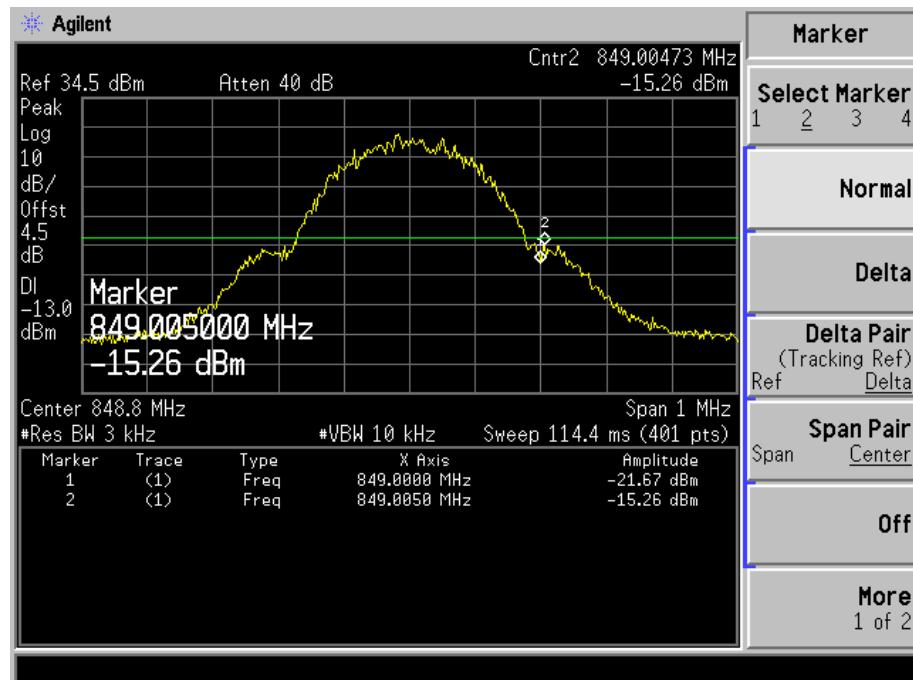


For PCS Band
GSM Low Channel

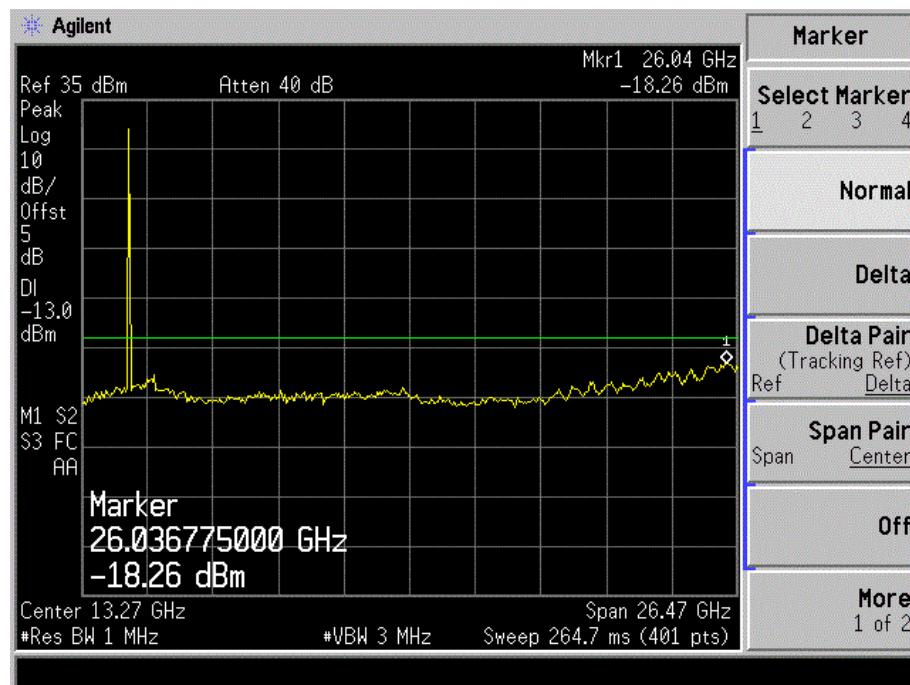


GSM Middle Channel

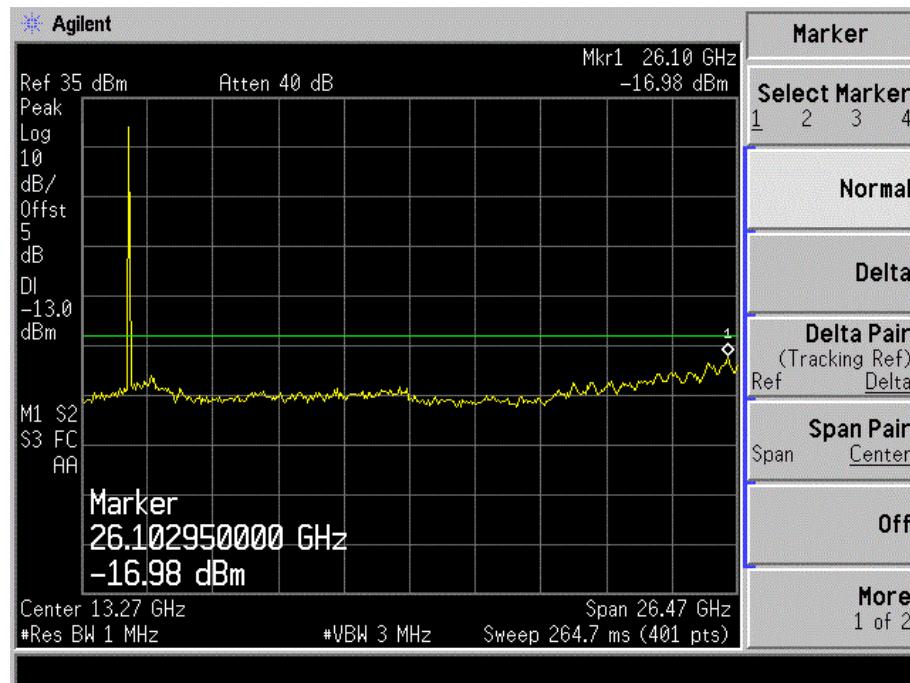


GSM High Channel

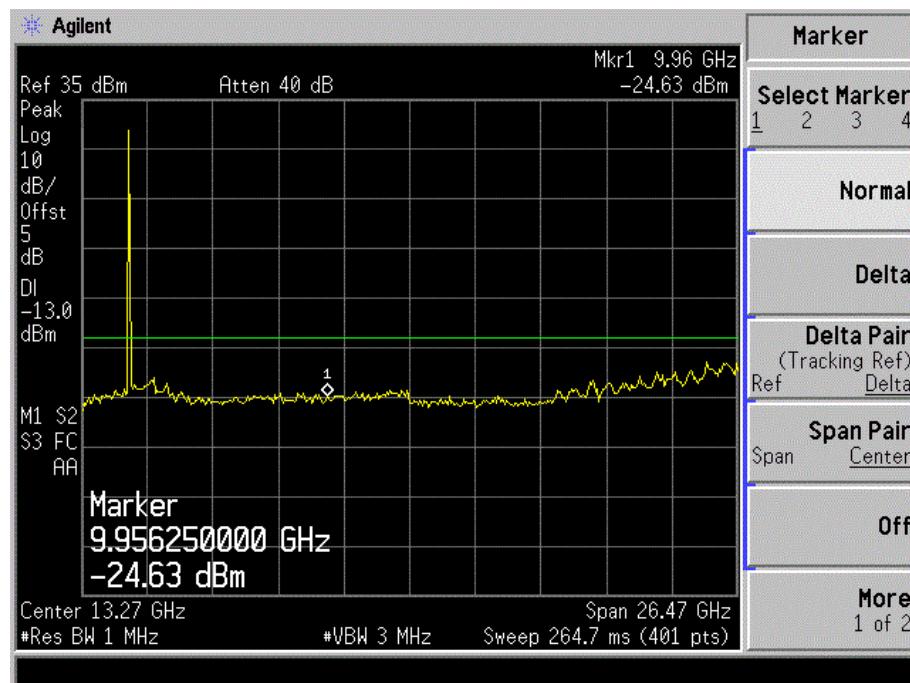


GSM Low Band Emission

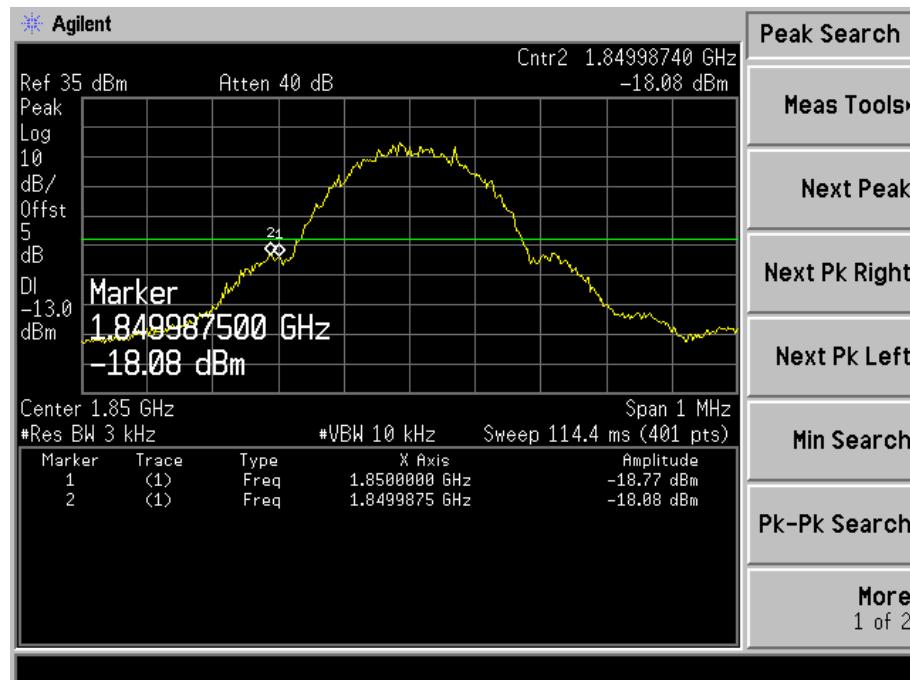


GSM High Band Emission

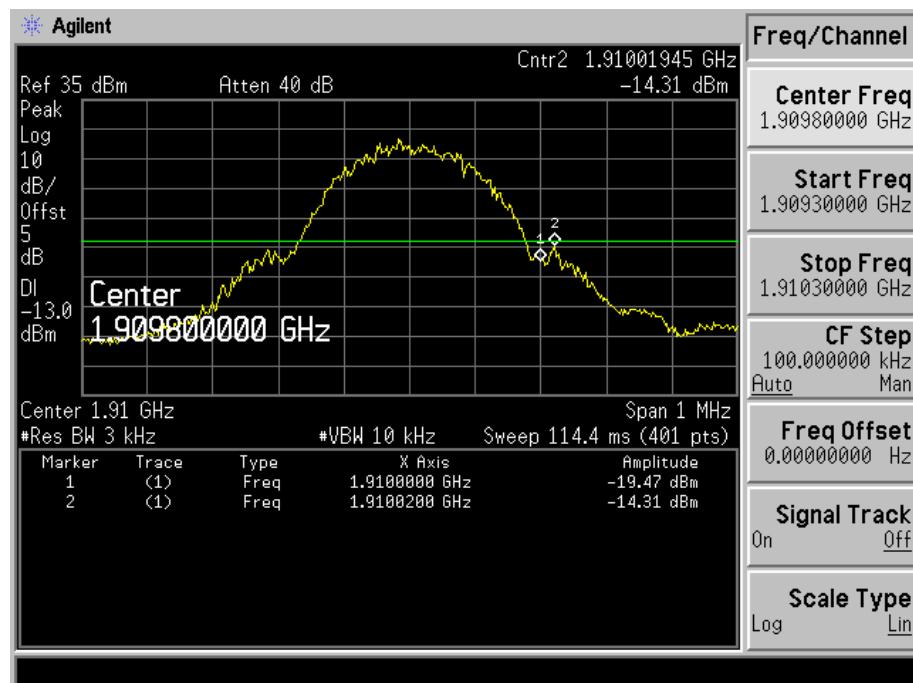


GPRS Low Channel

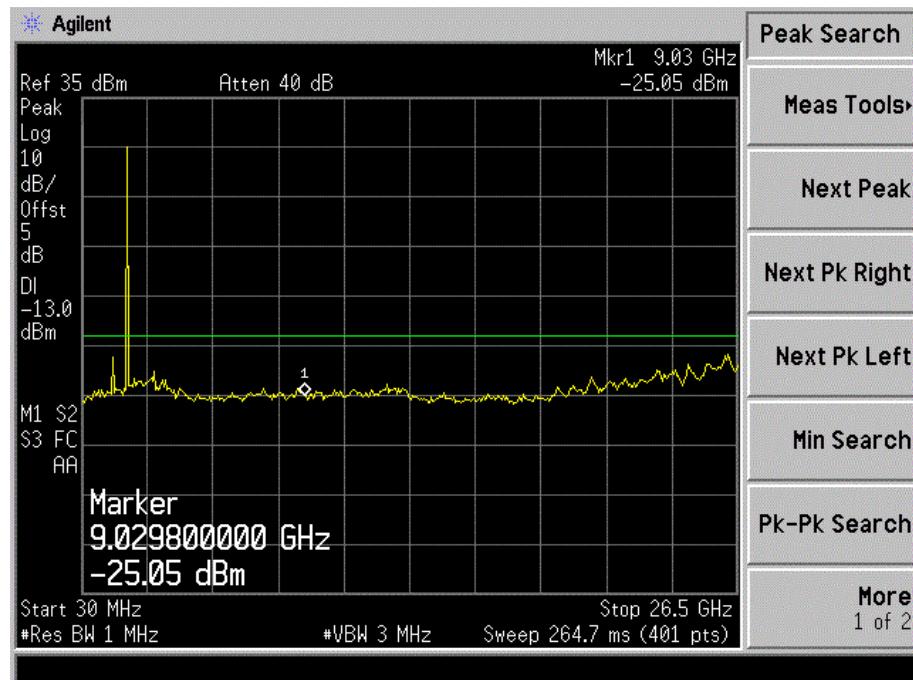


GPRS Middle Channel

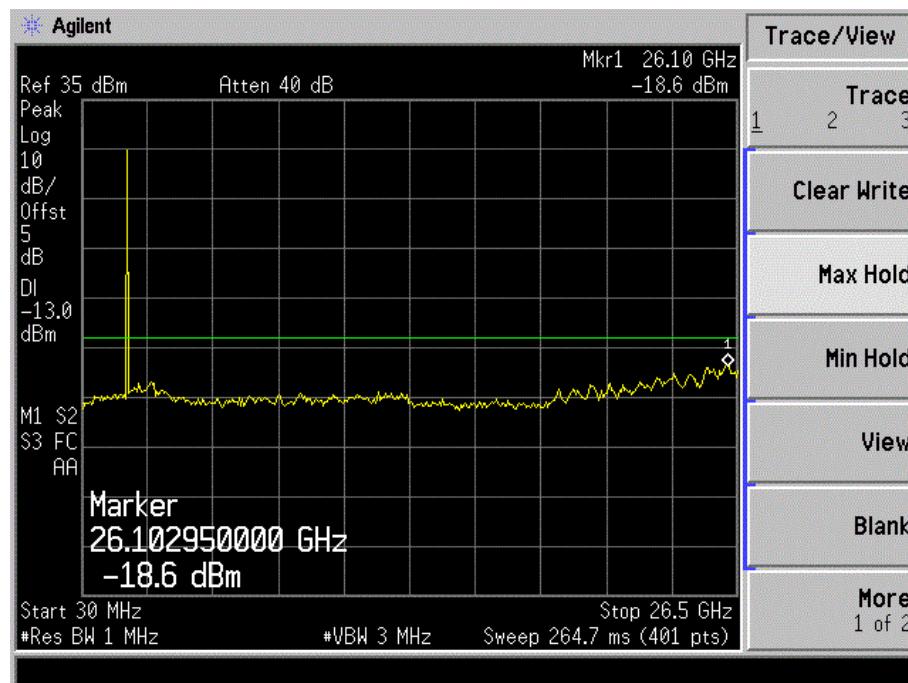


GPRS High Channel

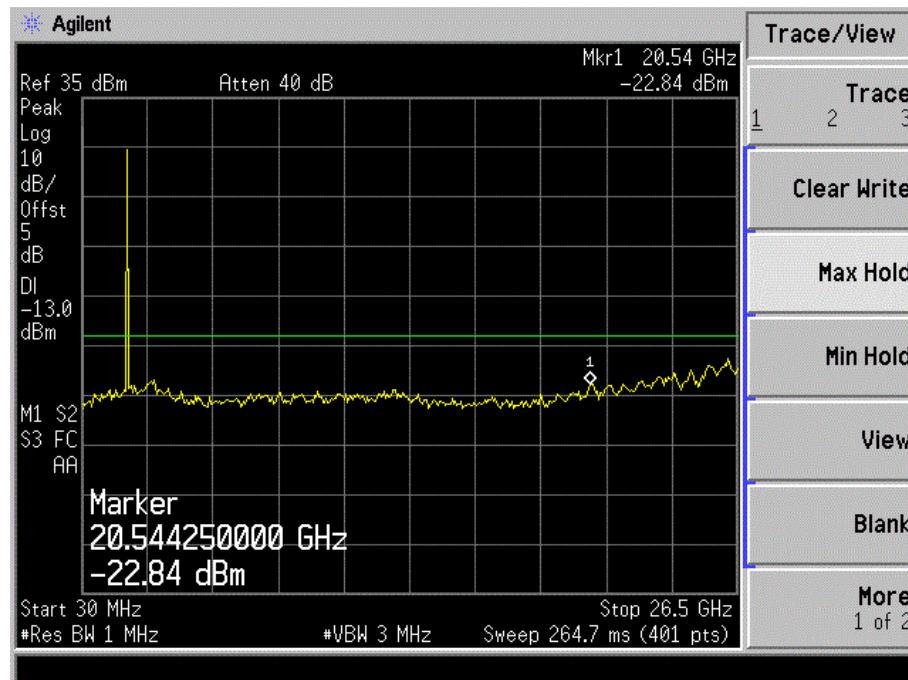

GPRS Low Band Emission

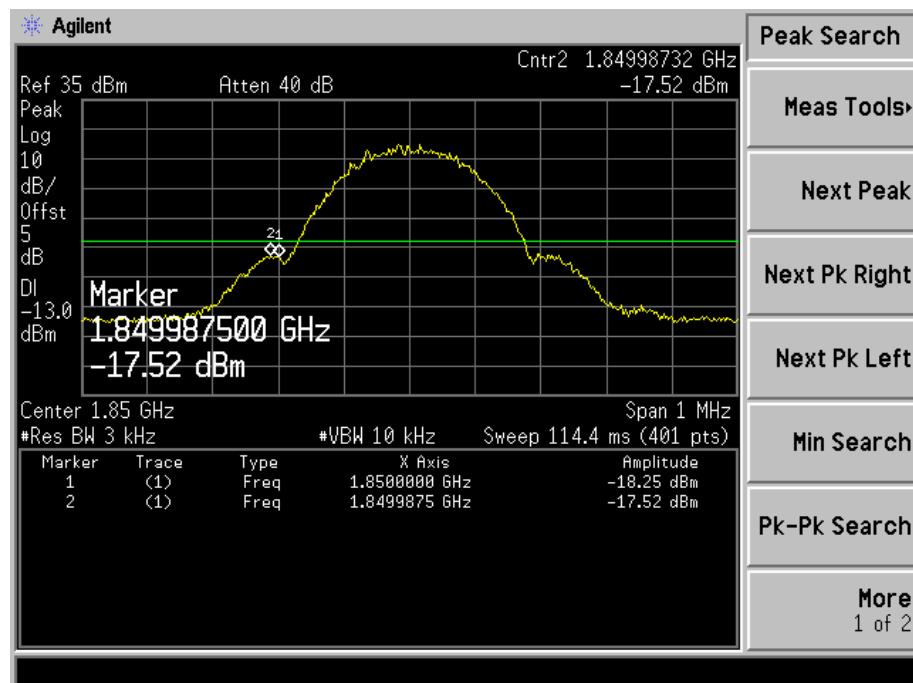

GPRS High Band Emission

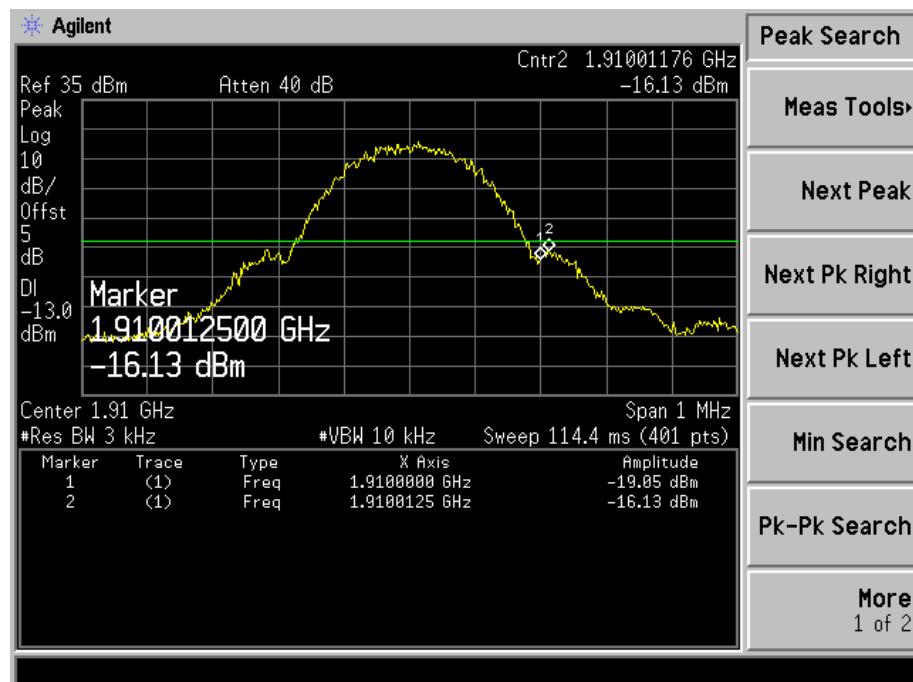

8. Spurious Radiated Emissions

8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}$ (power out in Watts)

8.3 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 52% |
| ATM Pressure: | 1012 mbar |

8.4 Summary of Test Results/Plots


According to the data below, the FCC Part 22.917 and 24.238 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Spurious Emission From 30MHz to 1GHz


For Cellular Band_ GSM850 Mode

Horizontal:

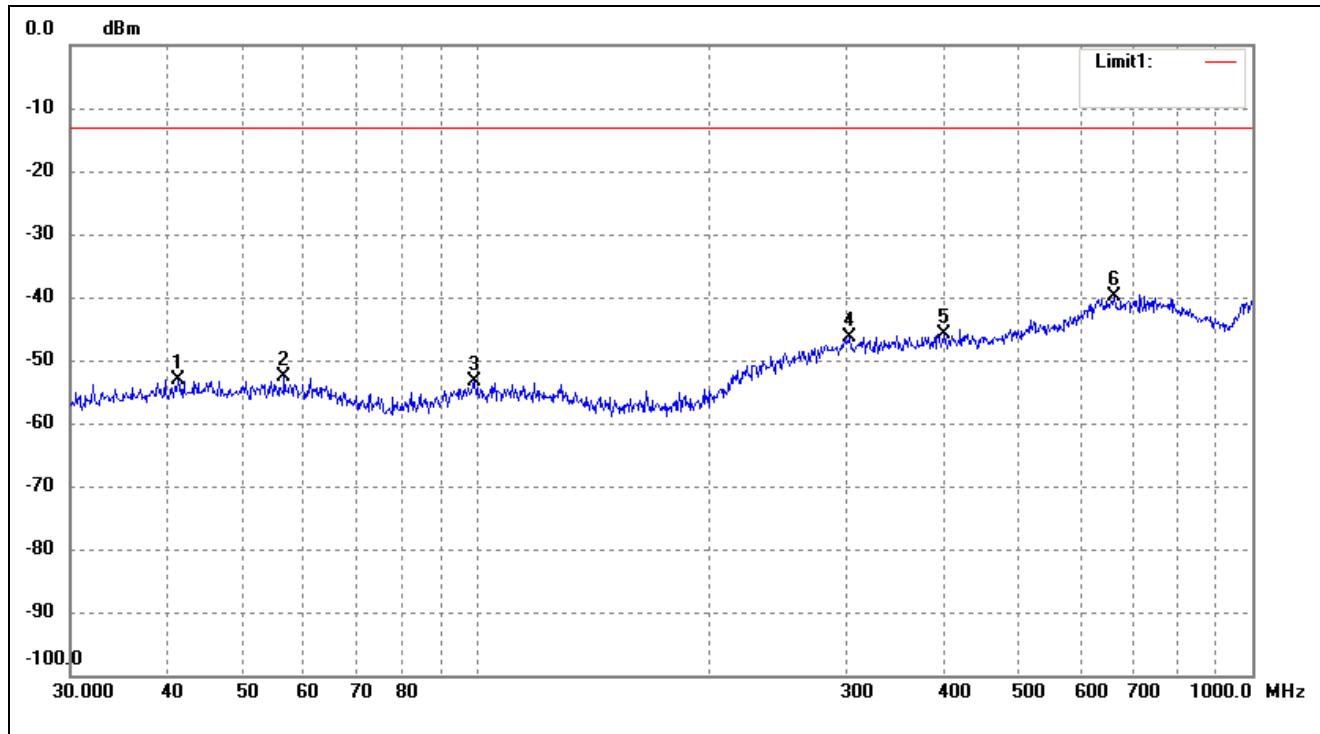

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 41.2765 | -69.86 | 16.73 | -53.13 | -13.00 | -40.13 | ERP |
| 2 | 56.5929 | -69.52 | 16.81 | -52.71 | -13.00 | -39.71 | ERP |
| 3 | 99.5281 | -70.09 | 16.66 | -53.43 | -13.00 | -40.43 | ERP |
| 4 | 302.4812 | -70.10 | 23.75 | -46.35 | -13.00 | -33.35 | ERP |
| 5 | 400.4319 | -70.34 | 24.47 | -45.87 | -13.00 | -32.87 | ERP |
| 6 | 663.4729 | -69.48 | 29.56 | -39.92 | -13.00 | -26.92 | ERP |


Vertical:

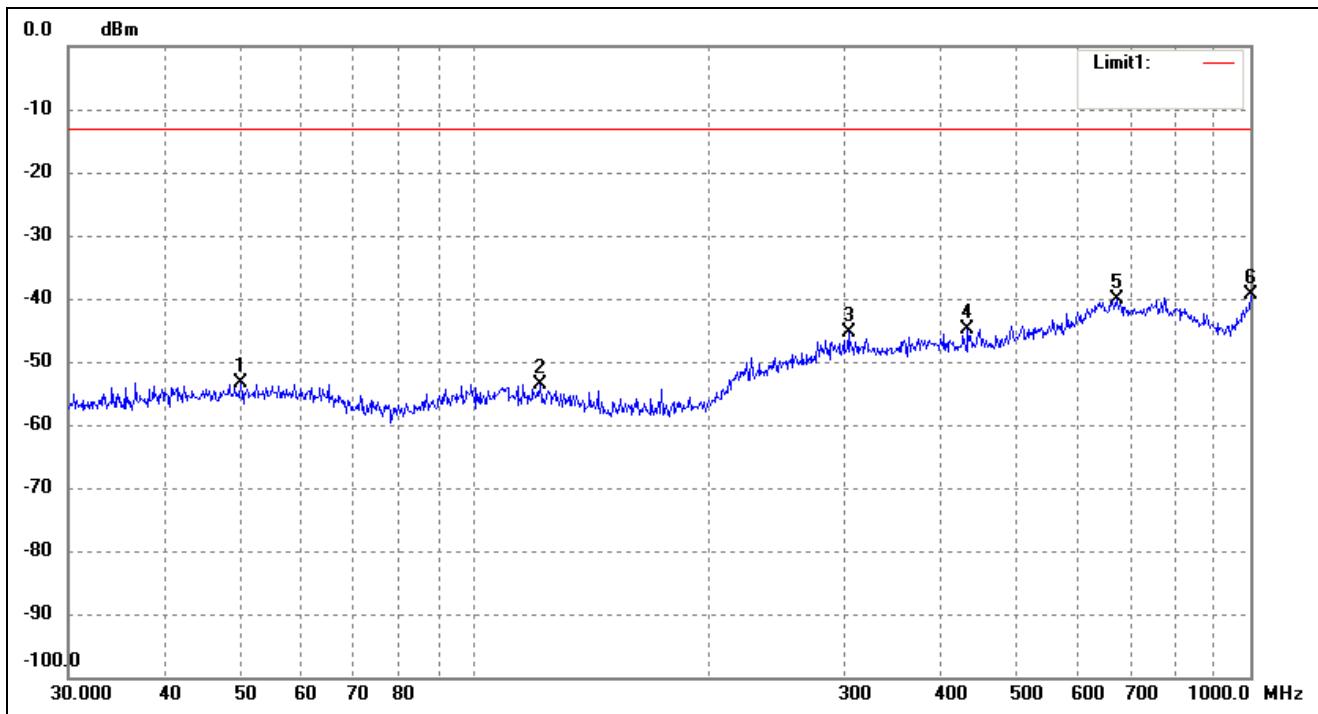

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 50.0566 | -70.18 | 16.78 | -53.40 | -13.00 | -40.40 | ERP |
| 2 | 121.5486 | -70.15 | 16.49 | -53.66 | -13.00 | -40.66 | ERP |
| 3 | 303.5437 | -69.13 | 23.74 | -45.39 | -13.00 | -32.39 | ERP |
| 4 | 432.5457 | -68.99 | 24.06 | -44.93 | -13.00 | -31.93 | ERP |
| 5 | 672.8445 | -70.09 | 30.09 | -40.00 | -13.00 | -27.00 | ERP |
| 6 | 1000.0000 | -68.30 | 28.91 | -39.39 | -13.00 | -26.39 | ERP |


For Cellular Band_ GSM1900 Mode

Horizontal:

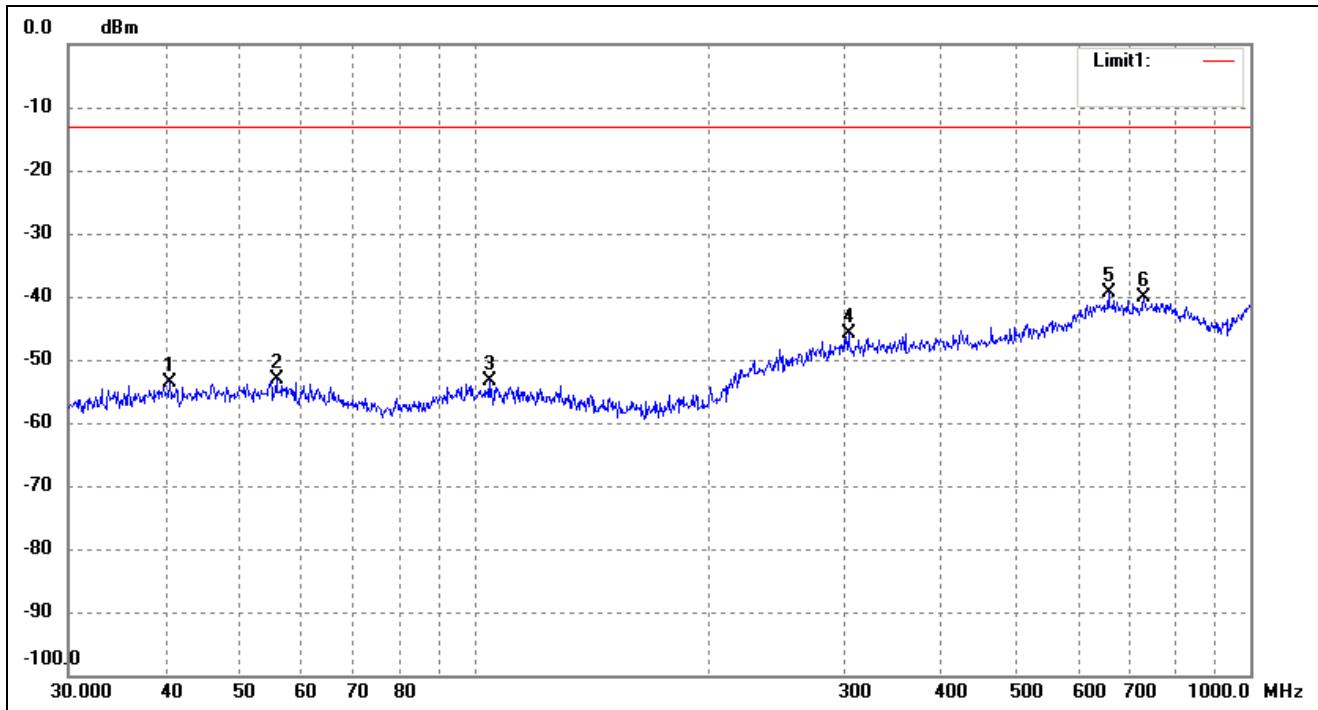

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 40.5591 | -70.40 | 16.73 | -53.67 | -13.00 | -40.67 | ERP |
| 2 | 55.6094 | -69.90 | 16.82 | -53.08 | -13.00 | -40.08 | ERP |
| 3 | 104.5361 | -70.01 | 16.68 | -53.33 | -13.00 | -40.33 | ERP |
| 4 | 303.5437 | -69.54 | 23.74 | -45.80 | -13.00 | -32.80 | ERP |
| 5 | 656.5300 | -68.91 | 29.47 | -39.44 | -13.00 | -26.44 | ERP |
| 6 | 729.3583 | -70.36 | 30.18 | -40.18 | -13.00 | -27.18 | ERP |

Vertical:

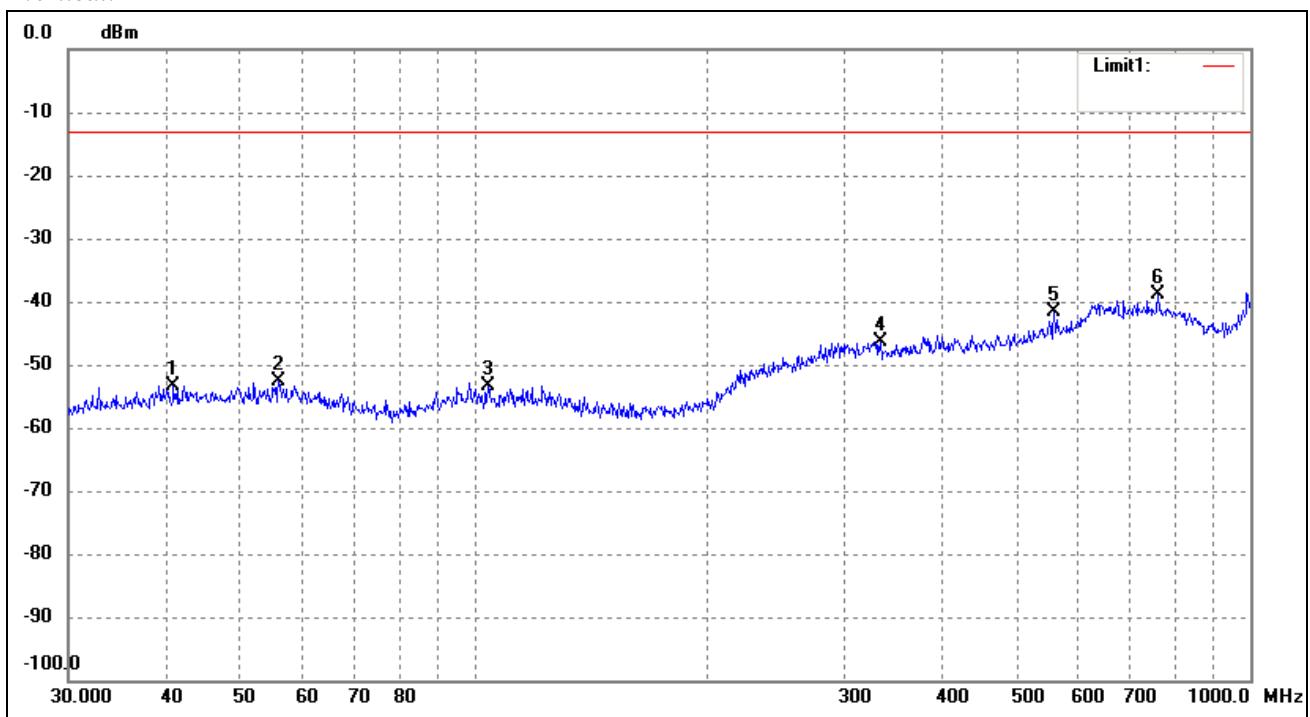

| No. | Frequency (MHz) | Reading (dBm) | Correct Factor(dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Remark |
|-----|--------------------|------------------|-----------------------|-----------------|----------------|----------------|--------|
| 1 | 40.9881 | -70.01 | 16.73 | -53.28 | -13.00 | -40.28 | ERP |
| 2 | 56.0007 | -69.39 | 16.81 | -52.58 | -13.00 | -39.58 | ERP |
| 3 | 104.1701 | -70.01 | 16.69 | -53.32 | -13.00 | -40.32 | ERP |
| 4 | 333.6867 | -69.69 | 23.35 | -46.34 | -13.00 | -33.34 | ERP |
| 5 | 558.7302 | -67.55 | 25.81 | -41.74 | -13.00 | -28.74 | ERP |
| 6 | 760.7036 | -68.71 | 29.90 | -38.81 | -13.00 | -25.81 | ERP |

Note: Margin= (Reading+ Correct)- Limit

Spurious Emissions Above 1GHz

For Cellular Band_GSM850 Mode

| Frequency (MHz) | Reading (dBm) | Correct dB | Result (dBm) | Limit (dBm) | Margin (dB) | Polar |
|---------------------------|------------------|---------------|-----------------|----------------|----------------|-------|
| Low Channel (824.2MHz) | | | | | | |
| 1648.4 | -42.73 | 4.94 | -37.79 | -13.00 | -24.79 | H |
| 2472.6 | -50.00 | 8.46 | -41.54 | -13.00 | -28.54 | H |
| 1648.4 | -44.55 | 4.94 | -39.61 | -13.00 | -26.61 | V |
| 2472.6 | -48.18 | 8.46 | -39.72 | -13.00 | -26.72 | V |
| Middle Channel (836.6MHz) | | | | | | |
| 1673.2 | -55.45 | 5.11 | -50.34 | -13.00 | -37.34 | H |
| 2509.8 | -47.27 | 8.54 | -38.73 | -13.00 | -25.73 | H |
| 1673.2 | -50.91 | 5.11 | -45.80 | -13.00 | -32.80 | V |
| 2509.8 | -49.09 | 8.54 | -40.55 | -13.00 | -27.55 | V |
| High Channel (848.8MHz) | | | | | | |
| 1697.6 | -53.64 | 5.29 | -48.35 | -13.00 | -35.35 | H |
| 2546.4 | -43.64 | 8.59 | -35.05 | -13.00 | -22.05 | H |
| 1697.6 | -53.64 | 5.29 | -48.35 | -13.00 | -35.35 | V |
| 2546.4 | -47.27 | 8.59 | -38.68 | -13.00 | -25.68 | V |

For PCS Band_GSM1900 Mode

| Frequency (MHz) | Reading (dBm) | Correct dB | Result (dBm) | Limit (dBm) | Margin (dB) | Polar |
|--------------------------|------------------|---------------|-----------------|----------------|----------------|-------|
| Low Channel (1850.2MHz) | | | | | | |
| 3700.4 | -45.45 | 10.54 | -34.91 | -13.00 | -21.91 | H |
| 5550.6 | -46.36 | 13.37 | -32.99 | -13.00 | -19.99 | H |
| 3700.4 | -44.55 | 10.54 | -34.01 | -13.00 | -21.01 | V |
| 5550.6 | -50.91 | 13.37 | -37.54 | -13.00 | -24.54 | V |
| Middle Channel (1880MHz) | | | | | | |
| 3760.0 | -53.64 | 10.64 | -43.00 | -13.00 | -30.00 | H |
| 5640.0 | -48.18 | 13.54 | -34.64 | -13.00 | -21.64 | H |
| 3760.0 | -52.73 | 10.64 | -42.09 | -13.00 | -29.09 | V |
| 5640.0 | -50.00 | 13.54 | -36.46 | -13.00 | -23.46 | V |
| High Channel (1909.8MHz) | | | | | | |
| 3819.6 | -54.55 | 10.74 | -43.81 | -13.00 | -30.81 | H |
| 5729.4 | -50.91 | 13.71 | -37.20 | -13.00 | -24.20 | H |
| 3819.6 | -52.73 | 10.74 | -41.99 | -13.00 | -28.99 | V |
| 5729.4 | -50.00 | 13.71 | -36.29 | -13.00 | -23.29 | V |

Note: Result=Reading+ Correct, Margin= Result- Limit

Testing is carried out with frequency rang 9kHz to 20GHz, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so the data is not display.

9. Frequency Stability

9.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

| Frequency range (MHz) | Base, fixed (ppm) | Mobile >3 watts (ppm) | Mobile ≤3 watts (ppm) |
|-----------------------|-------------------|-----------------------|-----------------------|
| 25 to 50 | 20.0 | 20.0 | 50.0 |
| 50 to 450 | 5.0 | 5.0 | 50.0 |
| 450 to 512 | 2.5 | 5.0 | 5.0 |
| 821 to 896 | 1.5 | 2.5 | 2.5 |
| 928 to 929 | 5.0 | N/A | N/A |
| 929 to 960 | 1.5 | N/A | N/A |
| 2110 to 2220 | 10.0 | N/A | N/A |

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

| Temperature: | Supply Voltage |
|----------------|--------------------------------------|
| 20°C | DC 3.3-4.2V declared by manufacturer |
| -30°C to +50°C | Normal |

9.3 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 20°C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

9.4 Summary of Test Results/Plots

For Cellular Band GSM Mode

| Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF (Hz) | Error (ppm) |
| 50 | 3.7 | 53 | 0.0634 |
| 40 | 3.7 | 49 | 0.0586 |
| 30 | 3.7 | 39 | 0.0466 |
| 20 | 3.7 | 35 | 0.0418 |
| 10 | 3.7 | 28 | 0.0335 |
| 0 | 3.7 | 24 | 0.0287 |
| -10 | 3.7 | 32 | 0.0383 |
| -20 | 3.7 | 38 | 0.0454 |
| -30 | 3.7 | 45 | 0.0538 |

For PCS Band GSM Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm | | | |
|--|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF (Hz) | Error (ppm) |
| 50 | 3.7 | 49 | 0.0261 |
| 40 | 3.7 | 40 | 0.0213 |
| 30 | 3.7 | 31 | 0.0165 |
| 20 | 3.7 | 27 | 0.0144 |
| 10 | 3.7 | 22 | 0.0117 |
| 0 | 3.7 | 16 | 0.0085 |
| -10 | 3.7 | 23 | 0.0122 |
| -20 | 3.7 | 29 | 0.0154 |
| -30 | 3.7 | 35 | 0.0186 |

For Cellular Band GPRS Mode

| Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm | | | |
|--|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF (Hz) | Error (ppm) |
| 50 | 3.7 | 45 | 0.0538 |
| 40 | 3.7 | 38 | 0.0454 |
| 30 | 3.7 | 32 | 0.0383 |
| 20 | 3.7 | 28 | 0.0335 |
| 10 | 3.7 | 24 | 0.0287 |
| 0 | 3.7 | 20 | 0.0239 |
| -10 | 3.7 | 25 | 0.0299 |
| -20 | 3.7 | 31 | 0.0371 |
| -30 | 3.7 | 35 | 0.0418 |

For PCS Band GPRS Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm | | | |
|--|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF (Hz) | Error (ppm) |
| 50 | 3.7 | 52 | 0.0277 |
| 40 | 3.7 | 38 | 0.0202 |
| 30 | 3.7 | 34 | 0.0181 |
| 20 | 3.7 | 28 | 0.0149 |
| 10 | 3.7 | 23 | 0.0122 |
| 0 | 3.7 | 15 | 0.0080 |
| -10 | 3.7 | 21 | 0.0112 |
| -20 | 3.7 | 25 | 0.0133 |
| -30 | 3.7 | 29 | 0.0154 |

So, Frequency Stability Versus Input Voltage is:

| Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency (Hz) | Error (ppm) |
| 20 | 3.3 | 42 | 0.0502 |
| | 3.7 | 35 | 0.0418 |
| | 4.3 | 38 | 0.0454 |
| Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm | | | |
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency (Hz) | Error (ppm) |
| 20 | 3.3 | 25 | 0.0133 |
| | 3.7 | 27 | 0.0144 |
| | 4.3 | 32 | 0.0170 |
| Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm | | | |
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency (Hz) | Error (ppm) |
| 20 | 3.3 | 34 | 0.0406 |
| | 3.7 | 28 | 0.0335 |
| | 4.3 | 28 | 0.0335 |
| Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm | | | |
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency (Hz) | Error (ppm) |
| 20 | 3.3 | 29 | 0.0154 |
| | 3.7 | 28 | 0.0149 |
| | 4.3 | 33 | 0.0176 |

***** END OF REPORT *****